



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Class 2 Permissive Change Report

Harris Corporation
RF Communications Division
1680 University Avenue
Rochester, NY 14610

Model: M7300 UHF-H Mobile Radio

FCC ID: OWDTR-0062-E
IC: 3636B-0062

February 2, 2013

Standards Referenced for this Report	
Part 2: 2012	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2012	Private Land Mobile Radio Services
TIA-102.CCAA August 2011	Two-Slot Time Division Multiple Access Transceiver Measurement Methods
TIA-102.CCAB October 2011	Two - Slot Time Division Multiple Access Transceiver Performance Recommendations
SRSP-500	Technical Requirements for Land Mobile and Fixed Radio Services Operating in the Bands 138-144 MHz and 148-174 MHz
RSS-119, Issue 11; June 2011	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Emission Designator (Transmit Mode)
440-512 (450-470 IC)	50.0	0.5	8K10DXW

Report Prepared By: Daniel Baltzell

Document Number: 2012361

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	4
2	General Information	4
2.1	Test Facility	4
2.2	Related Submittal(s)/Grant(s)	4
2.3	Grant Notes	4
3	Tested System Details	5
4	FCC Rules and Regulations §90.1215(a) and §2.1046(a), IC RSS-119 5.4: Peak Output Power	7
4.1	Test Procedure.....	7
4.2	Test Data.....	7
5	FCC Rules and Regulations §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emissions Masks; RSS-119 §4.2: Transmitter Unwanted Emissions	8
5.1	Test Procedure.....	8
5.2	Test Data.....	8
6	FCC Rules and Regulations §2.1049(c)(1); §90.210; RSS-119 §5.8: Occupied Bandwidth	9
6.1	Test Procedure.....	9
6.2	Test Data.....	10
7	FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; IC RSS-119 5.8.9.2 Out-of-Band Emissions Limit.....	16
7.1	Test Procedure.....	16
7.2	Test Data for Motorcycle Mount Configuration	16
8	Conclusion	20

Table of Figures

Figure 3-1:	Configuration of Tested System.....	5
Figure 3-2:	Configuration of Tested System (Motorcycle Mount).....	6

Table of Tables

Table 3-1:	Equipment Under Test (EUT).....	5
Table 4-1:	RF Power Output: Modulated Carrier Output Power	7
Table 4-2:	RF Power Output (Rated Power)	7
Table 4-3:	Test Equipment Used for Testing RF Power Output – Conducted	7
Table 5-1:	Test Equipment Used for Testing Spurious Emissions.....	8
Table 6-1:	Test Equipment Used for Testing Occupied Bandwidth	15
Table 7-1:	Field Strength of Spurious Radiation – 440.0125 MHz.....	16
Table 7-2:	Field Strength of Spurious Radiation – 450 MHz.....	17
Table 7-3:	Field Strength of Spurious Radiation – 454 MHz.....	17
Table 7-4:	Field Strength of Spurious Radiation – 456 MHz.....	18
Table 7-5:	Field Strength of Spurious Radiation – 470 MHz.....	18
Table 7-6:	Field Strength of Spurious Radiation – 511.9875 MHz.....	19
Table 7-7:	Test Equipment Used For Testing Field Strength of Spurious Radiation	19

Table of Plots

Plot 6-1:	Occupied Bandwidth – H-CPM TDMA; 440.0125 MHz; Mask D	10
Plot 6-2:	Occupied Bandwidth – H-CPM TDMA; 450 MHz; Mask D	11
Plot 6-3:	Occupied Bandwidth – H-CPM TDMA; 454MHz; Mask D	12
Plot 6-4:	Occupied Bandwidth – H-CPM TDMA; 456 MHz; Mask D	13
Plot 6-5:	Occupied Bandwidth – H-CPM TDMA; 470 MHz; Mask D	14
Plot 6-6:	Occupied Bandwidth – H-CPM TDMA; 511.9875 MHz; Mask D	15

Table of Appendixes

Appendix A:	Description of Change.....	21
Appendix B:	Agency Authorization Letter	22
Appendix C:	IC Letters	23
Appendix D:	Motorcycle Antenna	24
Appendix E:	Test Configuration Photographs	25

Table of Photographs

Photograph 1:	Radiated Emissions (Spurious/Harmonics) – Front View	25
Photograph 2:	Radiated Emissions (Spurious/Harmonics) – Back View.....	26

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.543(d)	RSS-119 5.5, 5.8	Complies

2 General Information

The following Class 2 Permissive Change Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission and Industry Canada rules and regulations. The Equipment Under Test (EUT) was M7300 UHF-H Radio Family; FCC ID: OWDTR-0062-E, IC: 3636B-0062.

The purpose of this Class 2 Permissive Change is to add emission designator 8K10DXW (H-CPM TDMA) and the motorcycle mount enclosure.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

The original FCC and IC certifications were granted September 27, 2010. The model name as registered with Industry Canada is M7300 440-512MHz, 50W.

2.3 Grant Notes

Power is continuously variable from 10 - 50 W. The grant listed power is rated power.

3 Tested System Details

The test sample was received on January 14, 2013. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple test patterns using the H-CPM TDMA mode. All test patterns were investigated and found to be nearly identical from an emissions perspective.

Table 3-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
M7300 UHF-H Radio	Harris Corporation	M7300	RU144750-031	OWDTR-0062-E	20955

Figure 3-1: Configuration of Tested System


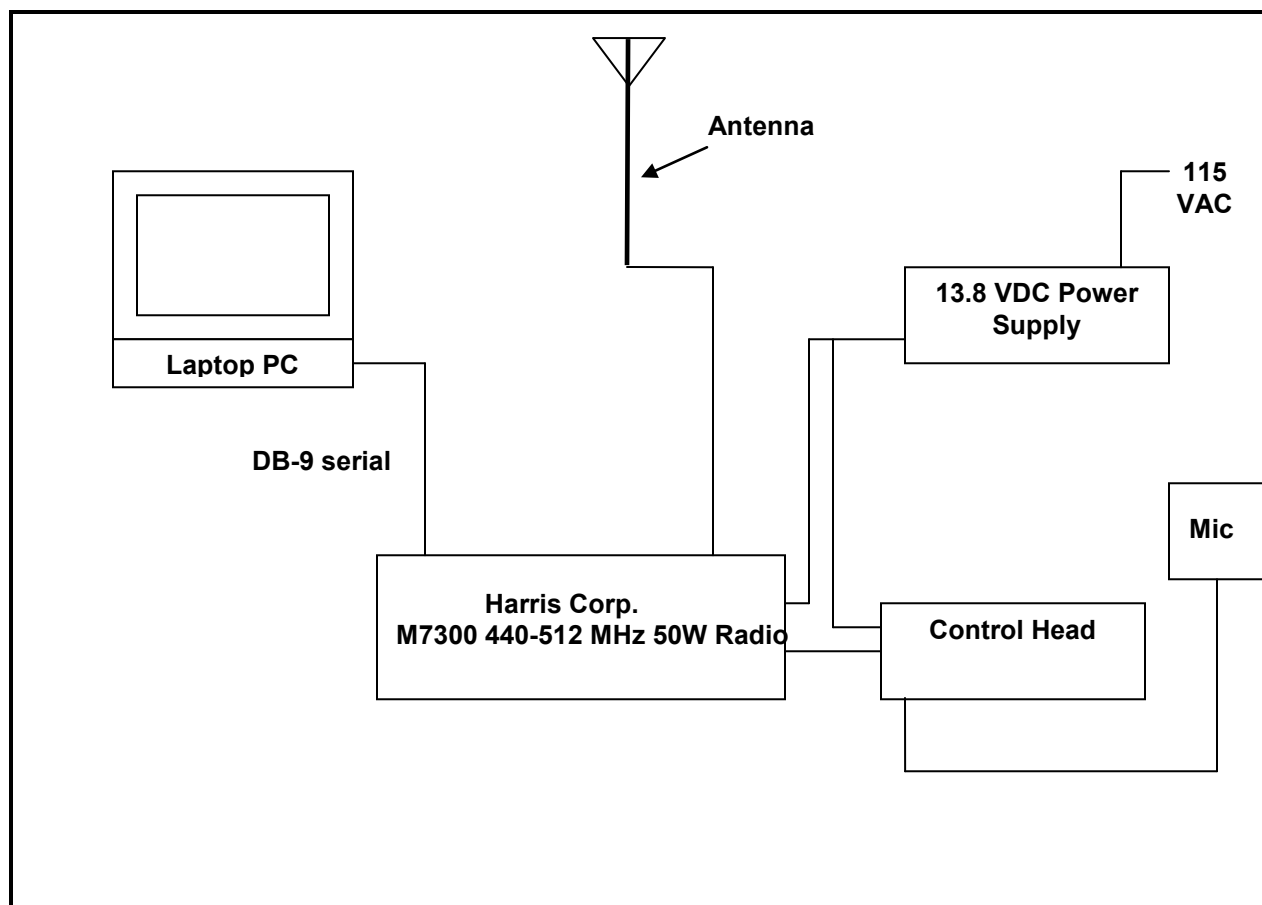


Figure 3-2: Configuration of Tested System (Motorcycle Mount)

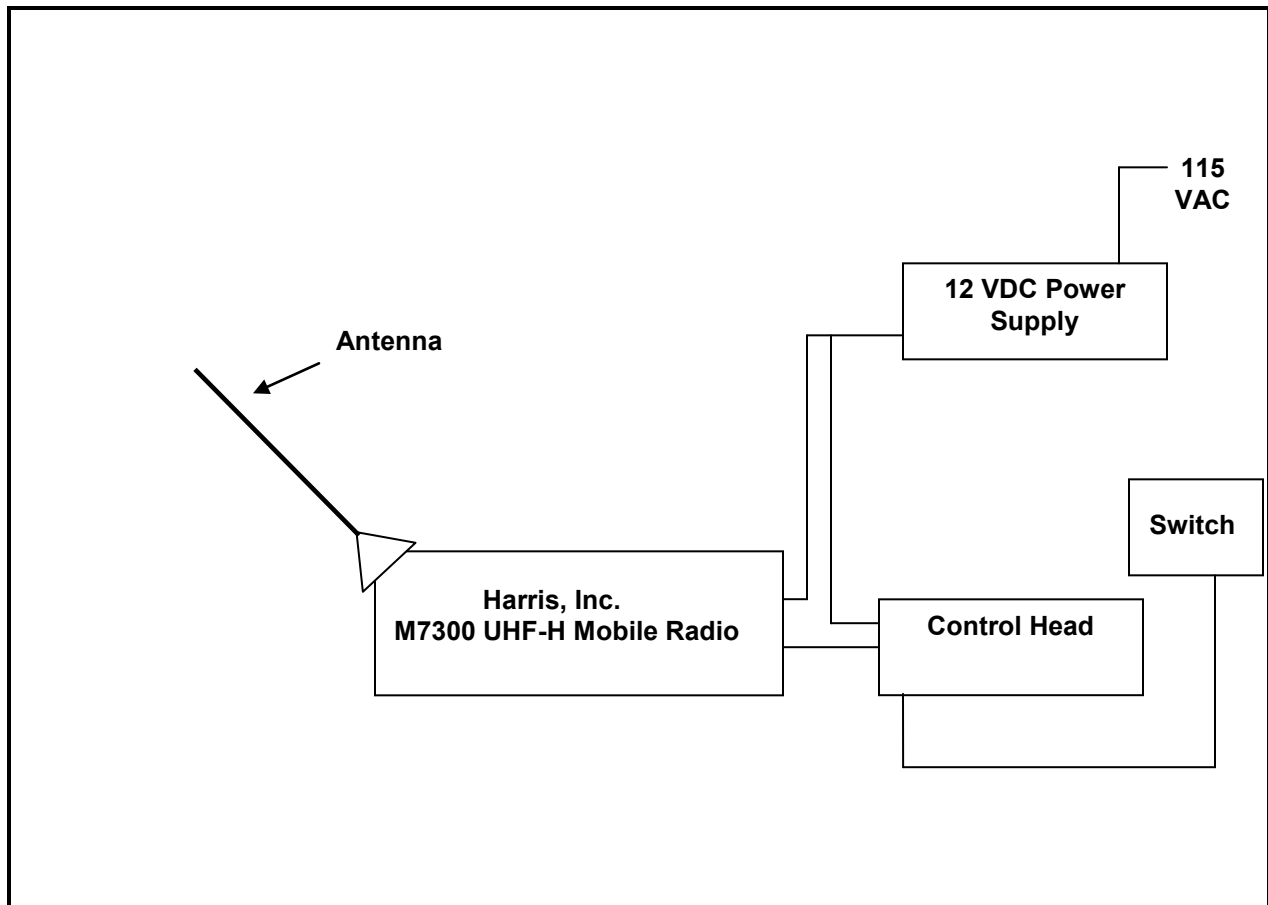

4 FCC Rules and Regulations §90.1215(a) and §2.1046(a), IC RSS-119 5.4: Peak Output Power

4.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.1, TIA-102.CCAB October 2011, section 3.2.1

The EUT was connected via an appropriate 50 ohm attenuator to a signal analyzer. Attenuator loss was accounted for.

4.2 Test Data

Table 4-1: RF Power Output: Modulated Carrier Output Power

Frequency (MHz)	High Power (dBm)	High Power (W)
440.0125	47.2	52.8
450.0000	47.2	52.8
454.0000	47.2	52.8
456.0000	47.2	52.8
470.0000	47.2	52.8
511.9875	47.2	52.8

Table 4-2: RF Power Output (Rated Power)

Frequency (MHz)	High Power Rated (W)
440-512	50

Table 4-3: Test Equipment Used for Testing RF Power Output – Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901537	Weinschel Corp	48-40-34	Attenuator, 40 dB, 100W	CB66628	12/14/13

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

January 24, 2013
Date of Test

5 FCC Rules and Regulations §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emissions Masks; RSS-119 §4.2: Transmitter Unwanted Emissions

5.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.7, TIA-102.CCAB October 2011, section 3.2.7

The transmitter is terminated with a 50 Ω load and interfaced with a signal analyzer.

5.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10xFc.

Limit: $P(\text{dBm}) - (50 + 10 \times \text{LOG } P(\text{W}))$

The worst case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

No spurious emissions were found to be within 20 dB of the limit; therefore, no spurious emissions are reported.

Table 5-1: Test Equipment Used for Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901537	Weinschel Corp	48-40-34	Attenuator, 40 dB, 100W	CB66628	12/14/13

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

January 24, 2013
Date of Test

6 FCC Rules and Regulations §2.1049(c)(1); §90.210; RSS-119 §5.8: Occupied Bandwidth

6.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.5, TIA-102.CCAB October 2011, section 3.2.5

FCC §90.210

Applicable Emission Masks		
Frequency Band (MHz)	Mask for Equipment with Audio Low Pass Filter	Mask for Equipment without Audio Low Pass Filter
Below 25 ¹	A or B	A or C
25–50	B	C
72–76	B	C
150–174 ²	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512 ²	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869 ³	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990 MHz	L or M	L or M
5850–5925 ⁴		
All other bands	B	C

¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.


² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.

³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691.


⁴ DSRCS Roadside Unit equipment in the 5850–5925 MHz band is governed under subpart M of this part.

6.2 Test Data


Plot 6-1: Occupied Bandwidth – H-CPM TDMA; 440.0125 MHz; Mask D

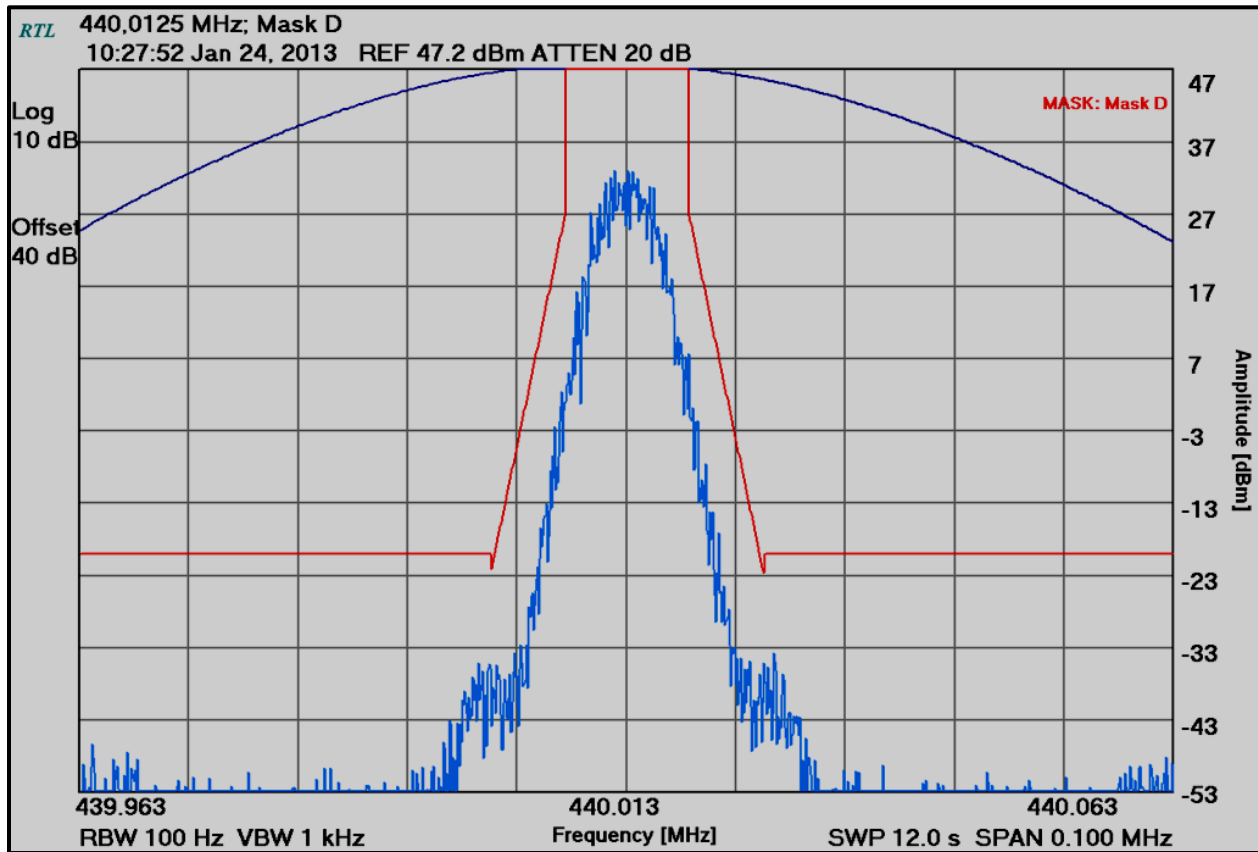


Plot 6-2: Occupied Bandwidth – H-CPM TDMA; 450 MHz; Mask D

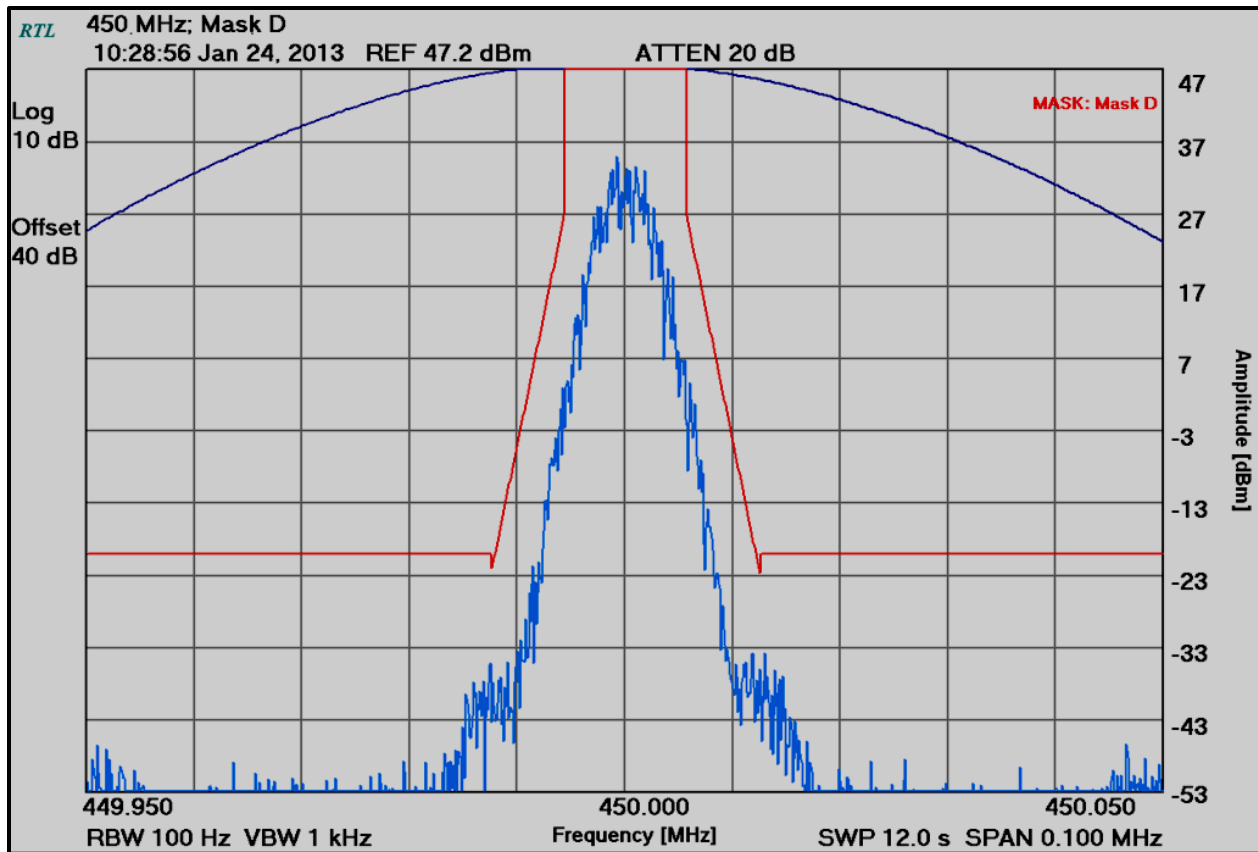


Plot 6-3: Occupied Bandwidth – H-CPM TDMA; 454MHz; Mask D

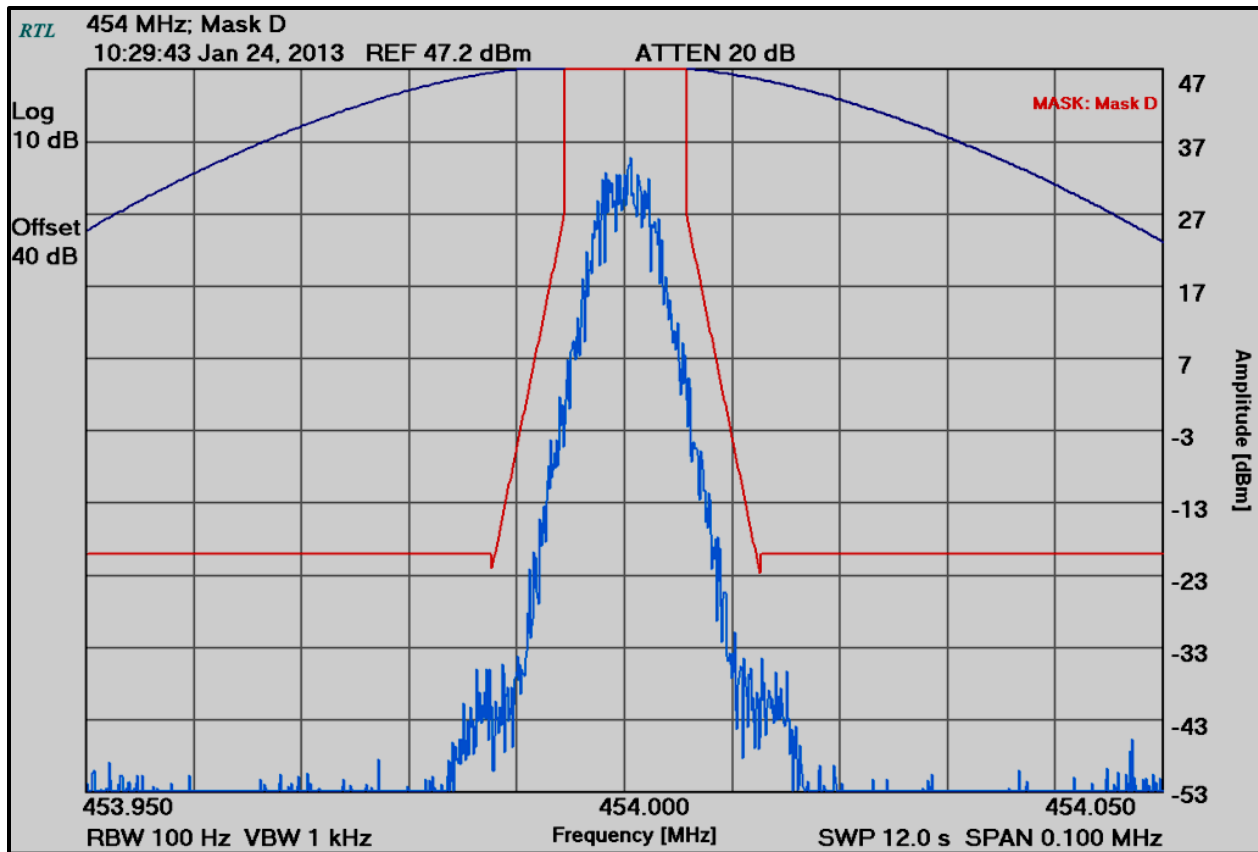

Plot 6-4: Occupied Bandwidth – H-CPM TDMA; 456 MHz; Mask D

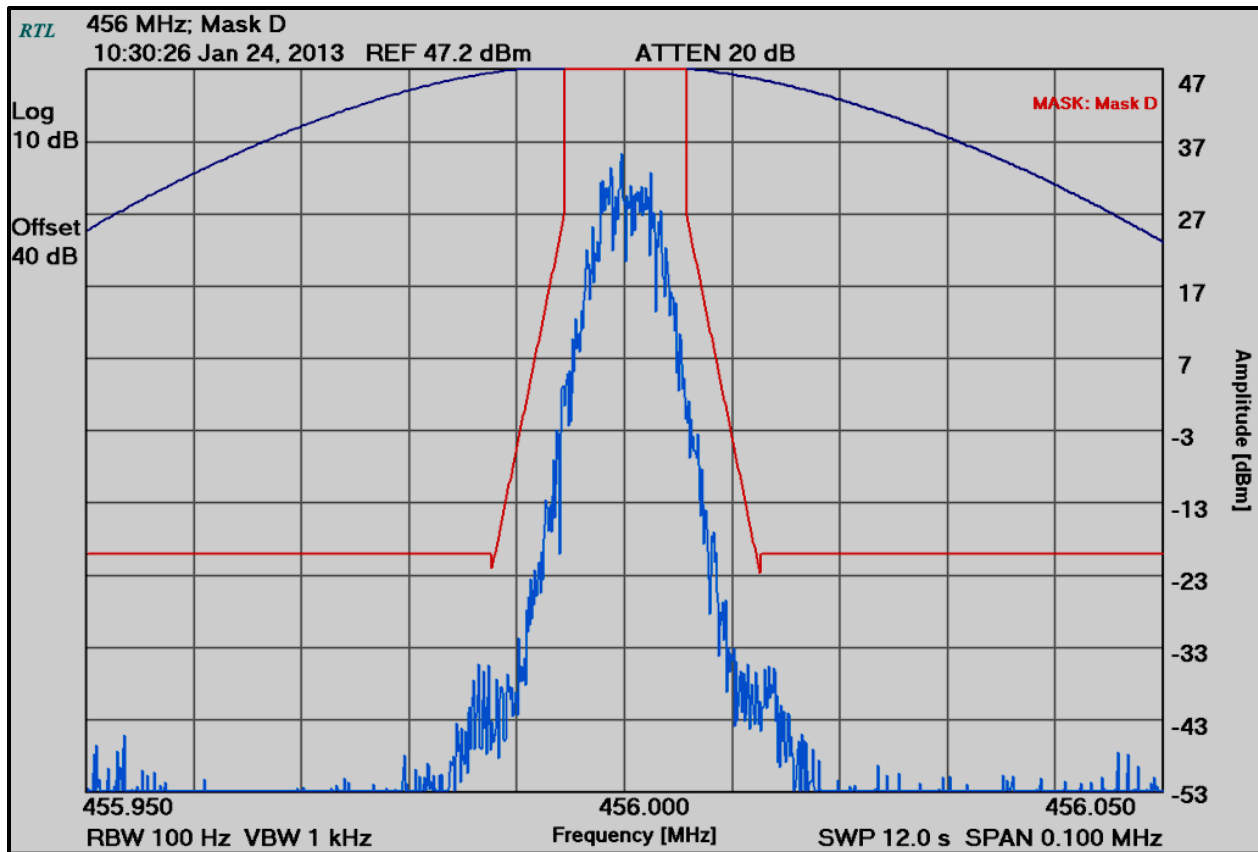

Plot 6-5: Occupied Bandwidth – H-CPM TDMA; 470 MHz; Mask D

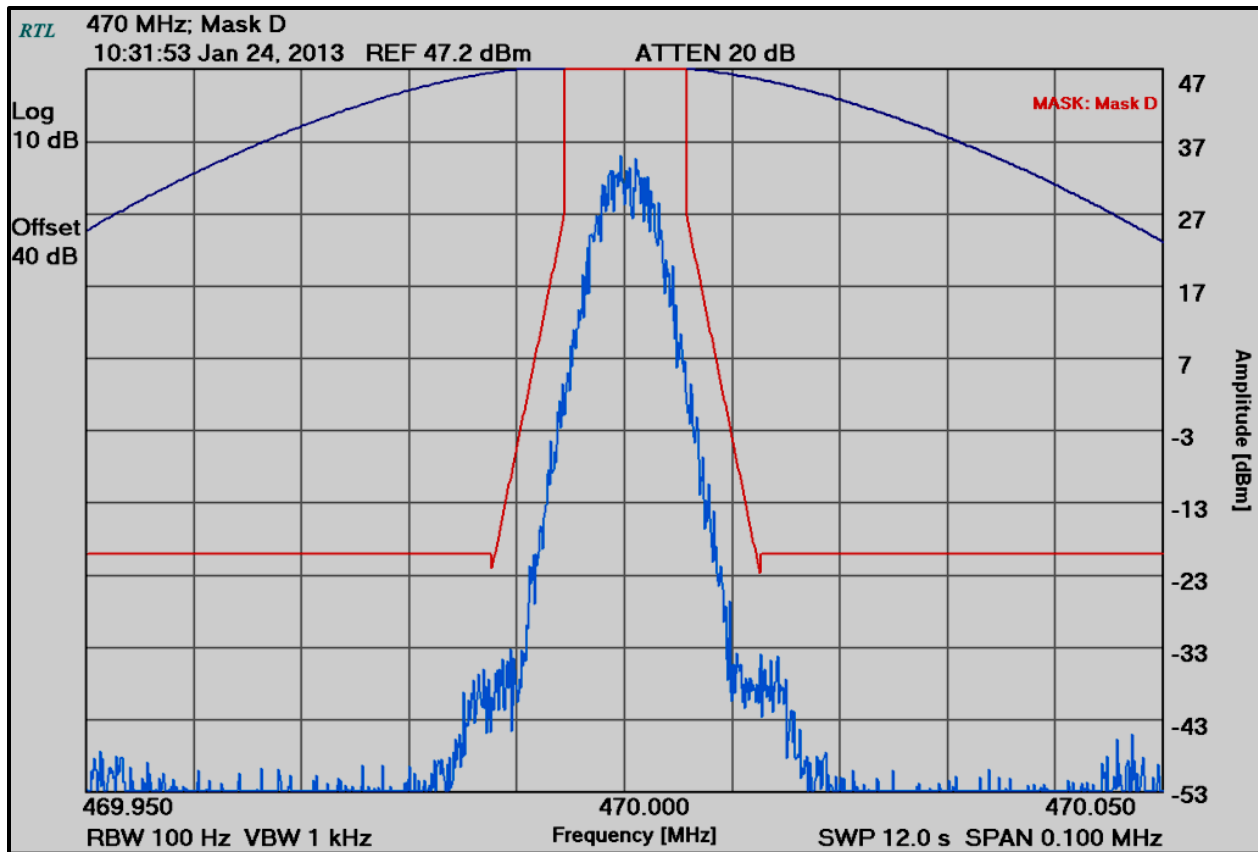

Plot 6-6: Occupied Bandwidth – H-CPM TDMA; 511.9875 MHz; Mask D

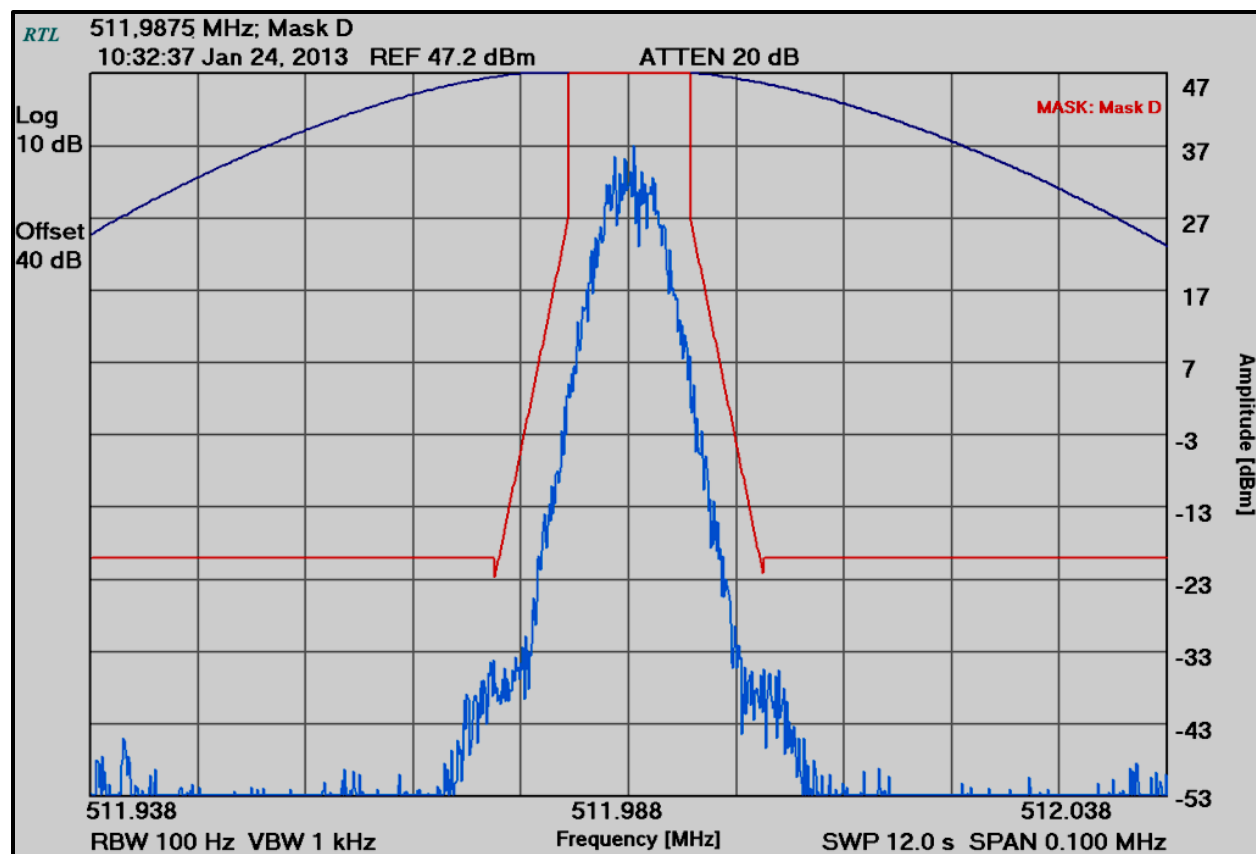


Table 6-1: Test Equipment Used for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901537	Weinschel Corp	48-40-34	Attenuator, 40 dB, 100W	CB66628	12/14/13
901337	Narda Microline	766-10	Attenuator (DC-4GHz, 10 dB, 20W)	6242	8/17/13

Test Personnel:

Daniel Baltzell
Test Engineer

Signature

January 24, 2013
Date of Test

7 FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; IC RSS-119 5.8.9.2 Out-of-Band Emissions Limit

7.1 Test Procedure

ANSI/TIA-603-2004, section 2.2.12

The device uses digital modulation modulated to its maximum extent using a pseudo-random data sequence.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBd) was added to achieve the ERP level, then converted from the corrected signal generator level (dBm) to dBc and compared to the limit.

7.2 Test Data for Motorcycle Mount Configuration

Table 7-1: Field Strength of Spurious Radiation – 440.0125 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
880.0250	66.6	-30.6	0.5	0.8	77.5	-24.7
1320.0375	53.6	-45.7	0.7	5.1	88.4	-35.6
1760.0500	48.0	-48.8	0.8	6.3	90.5	-37.7
2200.0625	52.5	-47.9	0.9	6.9	89.2	-36.4
2640.0750	40.0	-60.6	1.0	7.1	101.6	-48.8
3080.0875	49.4	-49.3	1.1	6.8	90.8	-38.0
3520.1000	32.1	-64.8	1.2	7.1	106.0	-53.2
3960.1125	34.5	-60.5	1.3	7.0	102.0	-49.2
4400.1250	26.7	-65.3	1.4	8.5	105.3	-52.5

Table 7-2: Field Strength of Spurious Radiation – 450 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
900.0000	62.7	-37.2	0.5	0.9	84.1	-31.3
1350.0000	48.0	-51.1	0.7	5.3	93.6	-40.8
1800.0000	54.5	-42.0	0.8	6.4	83.6	-30.8
2250.0000	62.8	-38.1	0.9	6.9	79.3	-26.5
2700.0000	41.4	-58.8	1.0	7.4	99.6	-46.8
3150.0000	36.3	-62.1	1.1	6.8	103.7	-50.9
3600.0000	30.3	-66.2	1.2	7.2	107.4	-54.6
4050.0000	32.5	-62.1	1.3	7.4	103.2	-50.4
4500.0000	29.1	-62.4	1.4	8.4	102.5	-49.7

Table 7-3: Field Strength of Spurious Radiation – 454 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
908.0000	59.5	-39.0	0.5	0.9	85.8	-33.0
1362.0000	43.4	-55.5	0.7	5.4	97.9	-45.1
1816.0000	50.1	-46.3	0.8	6.3	88.0	-35.2
2270.0000	68.4	-32.7	0.9	6.9	73.9	-21.1
2724.0000	43.8	-56.4	1.0	7.5	97.2	-44.4
3178.0000	36.9	-61.4	1.1	6.7	103.0	-50.2
3632.0000	36.5	-59.9	1.2	7.0	101.3	-48.5
4086.0000	30.4	-64.0	1.3	7.6	104.9	-52.1
4540.0000	28.4	-62.9	1.4	8.5	103.0	-50.2

Table 7-4: Field Strength of Spurious Radiation – 456 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
912.0000	61.4	-38.8	0.5	0.9	85.6	-32.8
1368.0000	43.7	-55.6	0.7	5.5	98.0	-45.2
1824.0000	50.0	-46.6	0.8	6.2	88.4	-35.6
2280.0000	71.9	-29.3	0.9	6.9	70.5	-17.7
2736.0000	49.5	-50.5	1.0	7.5	91.2	-38.4
3192.0000	40.7	-57.5	1.1	6.7	99.1	-46.3
3648.0000	37.0	-59.3	1.2	6.9	100.8	-48.0
4104.0000	28.3	-65.1	1.3	7.7	105.9	-53.1
4560.0000	27.7	-63.5	1.4	8.6	103.5	-50.7

Table 7-5: Field Strength of Spurious Radiation – 470 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
940.0000	51.5	-48.4	0.5	1.1	95.1	-42.3
1410.0000	45.5	-53.0	0.7	5.7	95.1	-42.3
1880.0000	52.2	-43.7	0.8	5.8	86.0	-33.2
2350.0000	63.1	-38.7	0.9	6.9	80.0	-27.2
2820.0000	50.4	-49.2	1.0	7.6	89.9	-37.1
3290.0000	39.1	-58.7	1.1	6.8	100.2	-47.4
3760.0000	40.4	-55.4	1.2	6.5	97.4	-44.6
4230.0000	29.3	-64.5	1.3	8.2	104.8	-52.0
4700.0000	32.5	-59.3	1.4	8.5	99.4	-46.6

Table 7-6: Field Strength of Spurious Radiation – 511.9875 MHz

Conducted Power 47.2 dBm; 52.8 W; Limit=50+10LogP=67.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1023.9750	48.9	-53.1	0.6	4.2	96.7	-43.9
1535.9625	48.9	-50.0	0.7	6.3	91.6	-38.8
2047.9500	55.1	-45.7	0.8	6.2	87.5	-34.7
2559.9375	50.4	-50.5	1.0	7.0	91.8	-39.0
3071.9250	54.2	-44.6	1.1	6.8	86.0	-33.2
3583.9125	33.5	-63.1	1.2	7.2	104.3	-51.5
4095.9000	28.1	-65.3	1.3	7.7	106.1	-53.3
4607.8875	26.5	-64.4	1.4	8.6	104.4	-51.6
5119.8750	26.2	-65.3	1.5	8.3	105.7	-52.9

Table 7-7: Test Equipment Used For Testing Field Strength of Spurious Radiation


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	8/10/13
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
900791	Chase	CBL6111B	Bilog Antenna (30 MHz–2000 MHz)	N/A	1/31/13
900321	EMCO	3161-03	Horn Antennas (4–8 GHz)	9508-1020	4/19/14
900772	EMCO	3161-02	Horn Antenna (2-4 GHz)	9804-1044	4/19/14
900928	Hewlett Packard	83752A	Synthesized Sweeper, (0.01-20 GHz)	3610A00866	2/18/13
901595	Mini-Circuits	ZHL-4240V	Amplifier	H090293-5	2/17/13
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: M7300 UHF-H Mobile Radio
ID's: OWDTR-0062-E/3636B-0062
Standards: FCC Part 90/IC RSS-119
Report #: 2012361

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

January 31, 2013
Date of Test

8 Conclusion

The data in this Class 2 measurement report shows that the Harris Corporation Model M7300 UHF-H; FCC ID: OWDTR-0062-E, IC: 3636B-0062, complies with all the applicable requirements of FCC Parts 90 and 2, and Industry Canada RSS-119.