



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Daryl Popowitch
Phone: (434) 455-9527

Model: SG5300-900
SG5300 900 MHz Radio

FCC ID: OWDTR-0064-E
IC: 3636B-0064

June 17, 2011

Standards Referenced for this Report	
Part 2: 2010	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2010	Private Land Mobile Radio Services
TIA-EIA-603-C August 2004	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
ANSI/TIA/EIA – 102.CAAA-2002	Digital C4FM/CQPSK Transceiver Measurement Methods
RSS-119 Issue 11	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Transmit Mode/ Emission Designator
896 – 901	3.0	0.95	OpenSky Data (NPSPAC channels) / 8K80F1D
935 – 940	3.0	0.95	OpenSky Data (NPSPAC channels) / 8K80F1D

Report Prepared By: Richard B. McMurray, P.E.

Document Number: 2011066

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	5
2	General Information	5
2.1	Test Facility	5
2.2	Related Submittal(s)/Grant(s)	5
2.3	Grant Notes	5
2.4	Tested System Details	6
3	FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage	6
4	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.635	7
4.1	Test Procedure	7
4.2	Test Data	7
5	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals	8
5.1	Test Procedure	8
5.2	Test Data	8
6	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210	9
6.1	Test Procedure	9
6.2	Test Data	9
7	FCC Rules and Regulations Part 90.213 and Part 2.1055: Frequency Stability	15
7.1	Test Procedure	15
7.2	Test Data	15
7.2.1	CFR 47 Part 90.213 Requirements	15
7.2.2	Frequency Stability/Temperature Variation	16
7.2.3	Frequency Stability/Voltage Variation	17
8	FCC Rules and Regulations Part 90.210 and Part 2.1053(a); RSS-119 5.8: Field Strength of Spurious Radiation	18
8.1	Test Procedure	18
8.2	Test Data	18
8.2.1	CFR 47 Part 90.210 Requirements	18
9	FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth	22
10	Conclusion	22

Table of Figures

Figure 2-1: Configuration of Tested System.....	6
---	---

Table of Tables

Table 2-1: Equipment Under Test (EUT).....	6
Table 4-1: RF Conducted Output Power – High Power	7
Table 4-2: RF Conducted Output Power – Low Power	7
Table 4-3: Test Equipment Used For Testing RF Power Output - Conducted.....	7
Table 5-1: Test Equipment Used For Testing Spurious Emissions	8
Table 6-1: Test Equipment Used For Occupied Bandwidth	14
Table 7-1: Temperature Frequency Stability – 898.50000 MHz	16
Table 7-2: Temperature Frequency Stability – 937.5000 MHz	16
Table 7-3: Frequency Stability/Voltage Variation – 898.50000 MHz	17
Table 7-4: Frequency Stability/Voltage Variation – 937.5000 MHz	17
Table 7-5: Test Equipment Used For Testing Frequency Stability.....	17
Table 8-1: Field Strength of Spurious Radiation – 896.0125 MHz; High Power	18
Table 8-2: Field Strength of Spurious Radiation – 898.5000 MHz; High Power	19
Table 8-3: Field Strength of Spurious Radiation – 900.9875 MHz; High Power	19
Table 8-4: Field Strength of Spurious Radiation – 935.0125 MHz; High Power	20
Table 8-5: Field Strength of Spurious Radiation – 937.5000 MHz; High Power	20
Table 8-6: Field Strength of Spurious Radiation – 939.9875 MHz; High Power	21
Table 8-7: Test Equipment for Testing Field Strength of Spurious Radiation	21

Table of Plots

Plot 6-1: Occupied Bandwidth – 896.0125 MHz Mask J	9
Plot 6-2: Occupied Bandwidth – 898.5000 MHz Mask J	10
Plot 6-3: Occupied Bandwidth – 900.9875 MHz Mask J	11
Plot 6-4: Occupied Bandwidth – 935.0125 MHz Mask J	12
Plot 6-5: Occupied Bandwidth – 937.5000 MHz Mask J	13
Plot 6-6: Occupied Bandwidth – 939.9875 MHz Mask J	14

Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure	23
Appendix B:	Agency Authorization	24
Appendix C:	FCC Confidentiality Request Letter.....	25
Appendix D:	IC Letters	26
Appendix E:	IC Confidentiality Request Letter	27
Appendix F:	Label Information.....	28
Appendix G:	Operational Description	30
Appendix H:	Parts List	31
Appendix I:	Test / Tune Procedure	32
Appendix J:	Schematics.....	33
Appendix K:	Block Diagram	34
Appendix L:	Manual.....	35
Appendix M:	Test Configuration Photographs.....	36
Appendix N:	External Photographs.....	38
Appendix O:	Internal Photographs	41

Table of Photographs

Photograph 1:	ID Label Sample.....	28
Photograph 2:	ID Label Placement.....	29
Photograph 3:	Radiated Emissions – Front View	36
Photograph 4:	Radiated Emissions – Back View.....	37
Photograph 5:	Front View	38
Photograph 6:	Top View	39
Photograph 7:	Rear View	40
Photograph 8:	Side View	40
Photograph 9:	Main Board Top View	41
Photograph 10:	Main Board Bottom View.....	41
Photograph 11:	Interface Board Top View.....	42
Photograph 12:	Interface Board Bottom View	43
Photograph 13:	RF Shield Top View.....	44
Photograph 14:	RF Shield Bottom View	45
Photograph 15:	Heat Conductive Block.....	46
Photograph 16:	Metal Base Removed	47
Photograph 17:	Plastic Cover Inside View.....	48

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.635	5.4	Complies
Spurious Emissions at Antenna Terminals	2.1051	5.5, 5.8	Complies
Field Strength of Spurious Radiation	2.1053(a), 90.210	5.5, 5.8	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.210	5.5, 5.8	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.213	5.9	Complies

2 General Information

The following Type Certification Report is prepared on behalf of **Harris Corporation** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **SG5300 900 MHz Radio, Model SG5300-900; FCC ID: OWDTR-0064-E, IC: 3636B-0064.**

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47 Parts 2 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia, 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

N/A

2.3 Grant Notes

Power is continuously variable from 0.5 to 3 W.


2.4 Tested System Details

The test sample was received on May 4, 2011. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable. The EUT was programmed for multiple modes of operation and modulation types.

Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	P/N	S/N	FCC ID	RTL Bar Code
900 MHz Radio	Harris Corporation	SG5300-900	RU-019026-900	A40129900001	OWDTR-0064-E	19948
900 MHz Radio	Harris Corporation	SG5300-900	RU-019026-900	A40129900002	OWDTR-0064-E	19931

Figure 2-1: Configuration of Tested System



3 FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage

7.5 V / 2.5 A

4 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.635

4.1 Test Procedure

ANSI/TIA-603-C-2004, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's rated power:

Conducted power is continuously variable from 0.5 to 3 W.

4.2 Test Data

Table 4-1: RF Conducted Output Power – High Power

Frequency (MHz)	Power Measured (dBm)	Power Measured (Watts)
896.0125	35.6	3.6
898.5000	35.6	3.6
900.9875	35.6	3.6
935.0125	34.6	2.9
937.5000	34.6	2.9
939.9875	34.6	2.9

Table 4-2: RF Conducted Output Power – Low Power


Frequency (MHz)	Power Measured (dBm)	Power Measured (Watts)
896.0125	27.9	0.62
898.5000	27.9	0.62
900.9875	27.9	0.62
935.0125	27.6	0.58
937.5000	27.6	0.58
939.9875	27.6	0.58

Table 4-3: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	4/08/2012

Test Personnel:

Richard B. McMurray, P.E.
Test Engineer


Signature

May 5, 2011
Date of Test

5 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals

5.1 Test Procedure

ANSI/TIA-603-C-2004, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 9,600 bps for OTP mode.

5.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: (43 + 10 LOG P(W))


The following channels (in MHz) were investigated: 896.0125, 898.5000, 900.9875, 935.0125, 937.5000 and 939.9875 MHz.

No emissions were found within 20 dB of the limit; per 2.1057(c) no data is being reported.

Table 5-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	4/08/2012

Test Personnel:

Richard B. McMurray, P.E.		May 5, 2011
Test Engineer	Signature	Date of Test

6 FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210

Occupied Bandwidth - Compliance with the Emission Masks (Mask J)


6.1 Test Procedure

ANSI/TIA-603-C-2004, section 2.2.11 and TIA/EIA-102.CAAA-2002 section 2.2.5


Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence
– 9,600 baud for OTP.

6.2 Test Data


Plot 6-1: Occupied Bandwidth – 896.0125 MHz Mask J

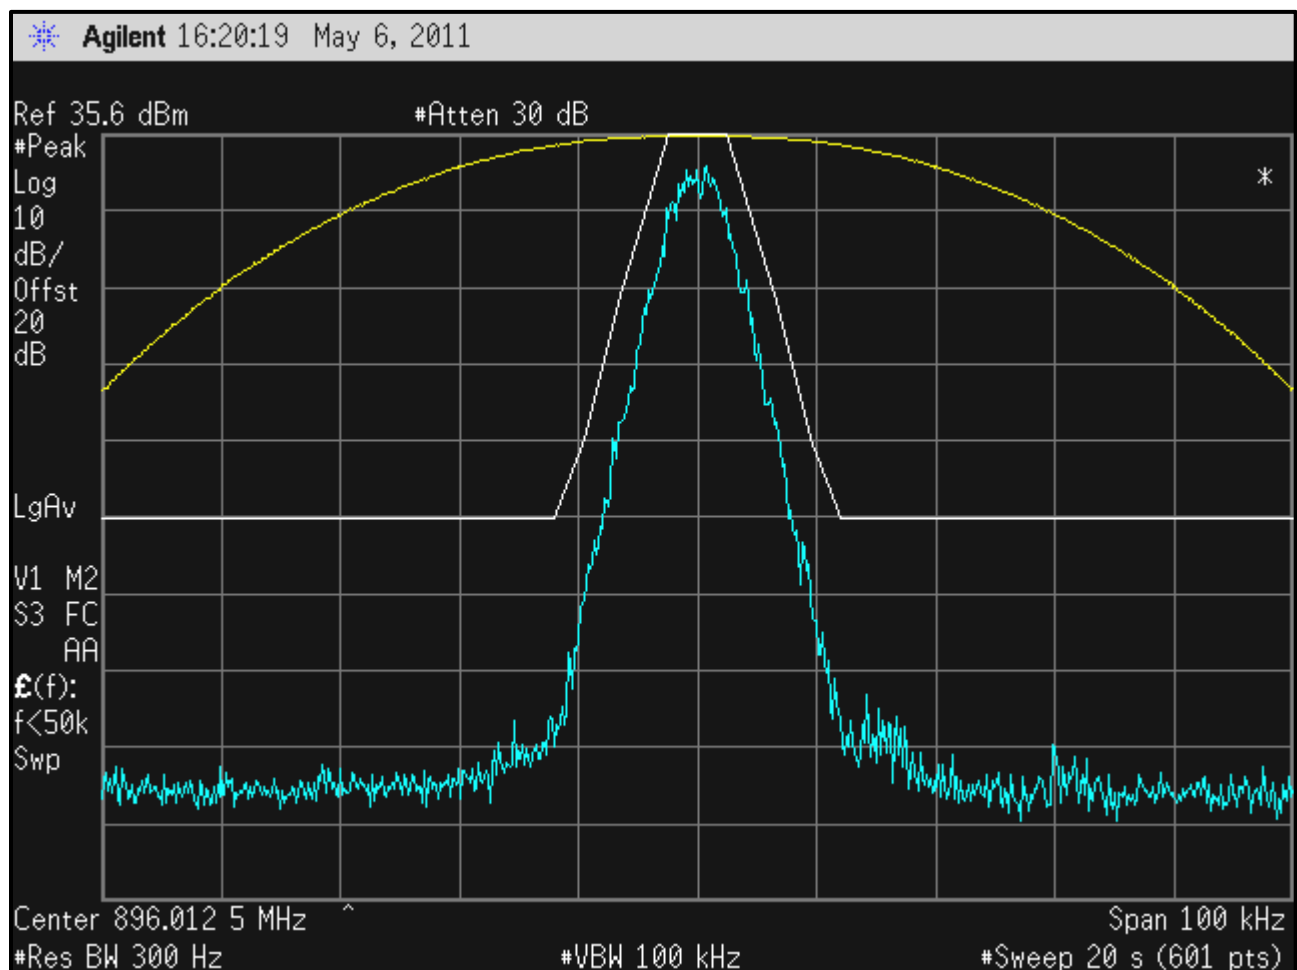


Plot 6-2: Occupied Bandwidth – 898.5000 MHz Mask J

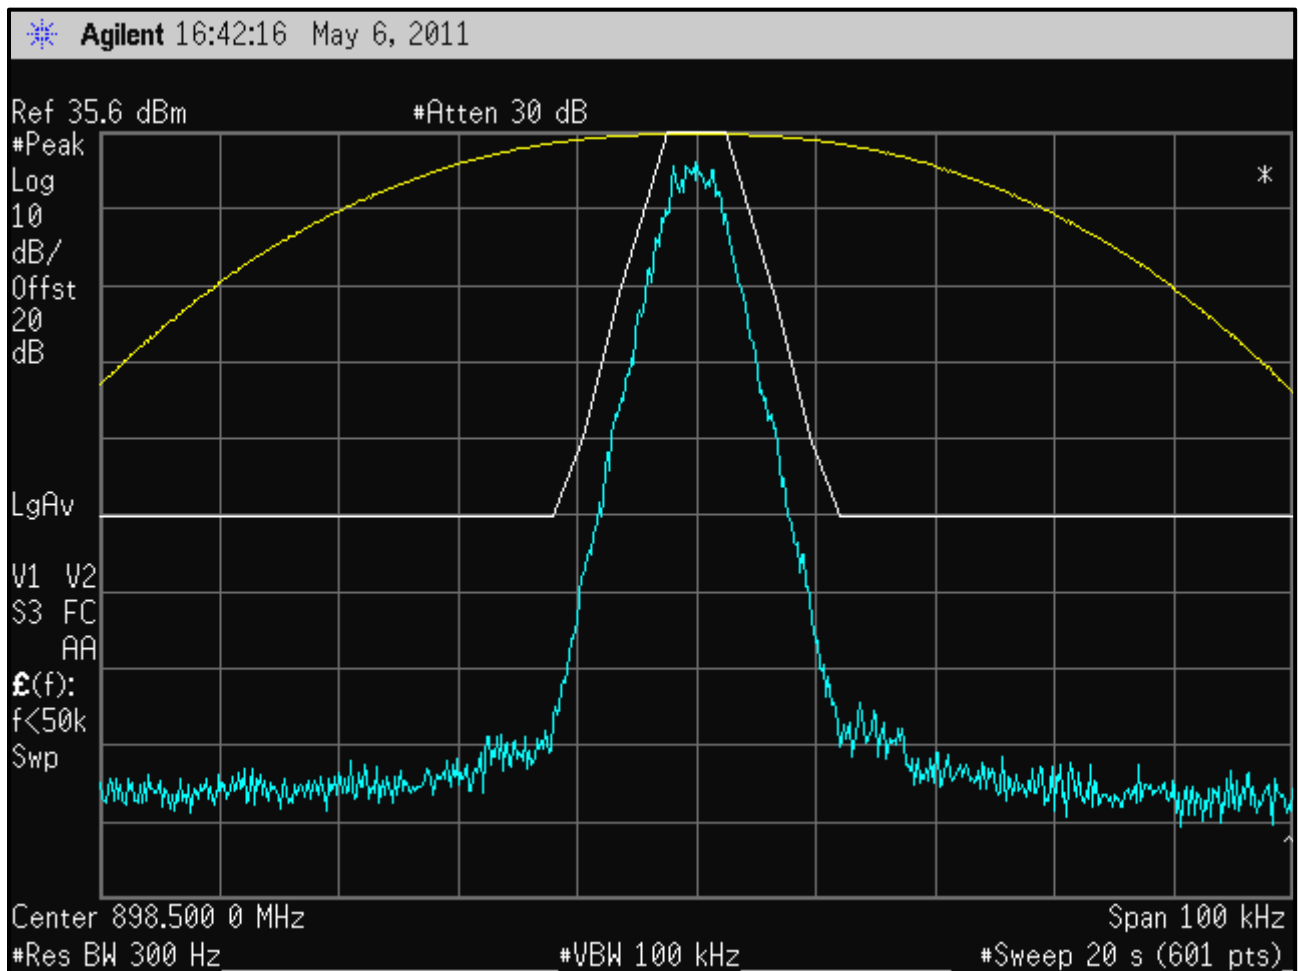


Plot 6-3: Occupied Bandwidth – 900.9875 MHz Mask J

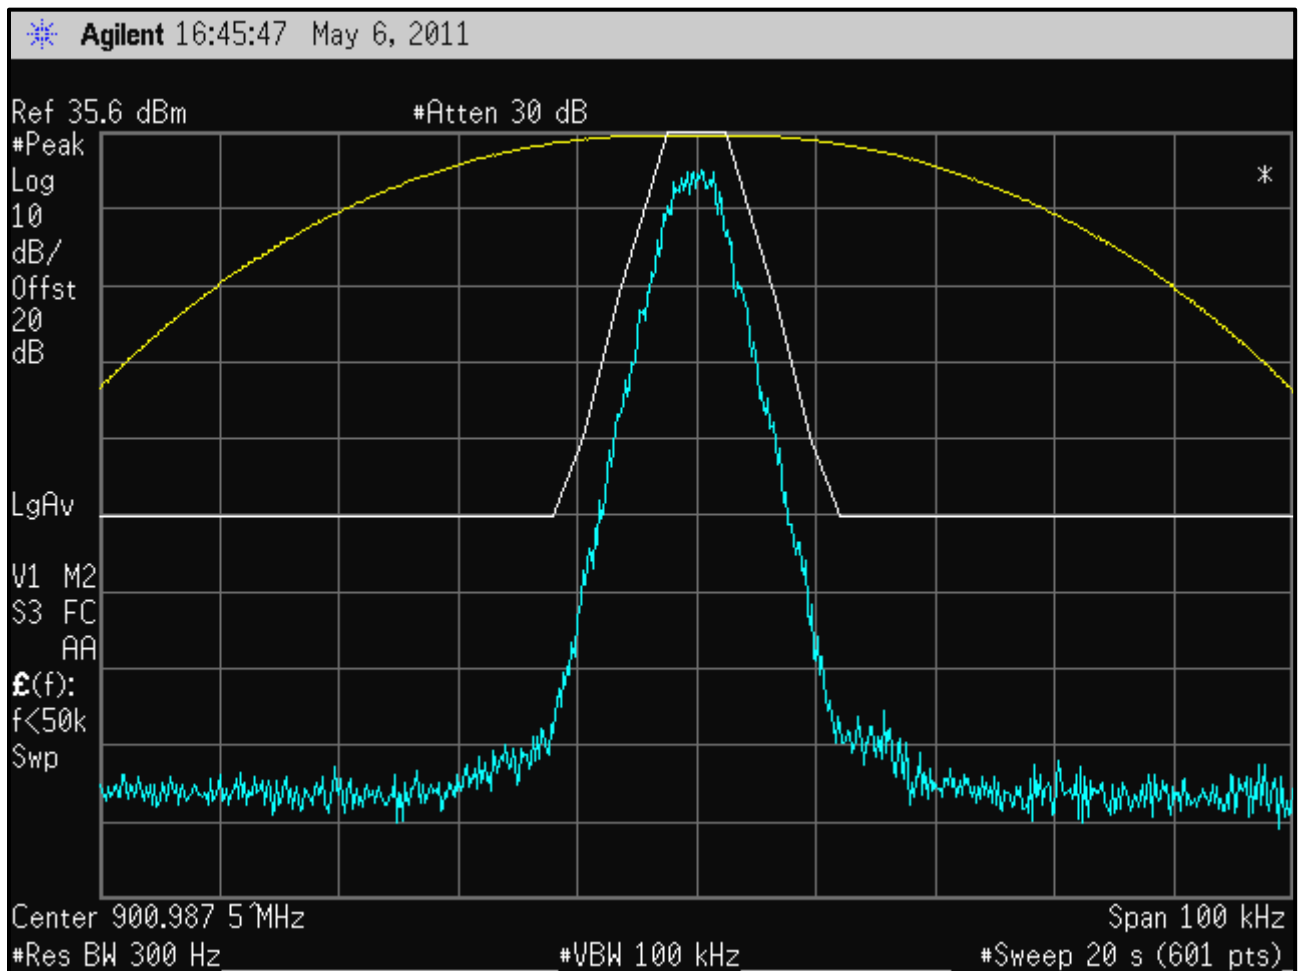

Plot 6-4: Occupied Bandwidth – 935.0125 MHz Mask J

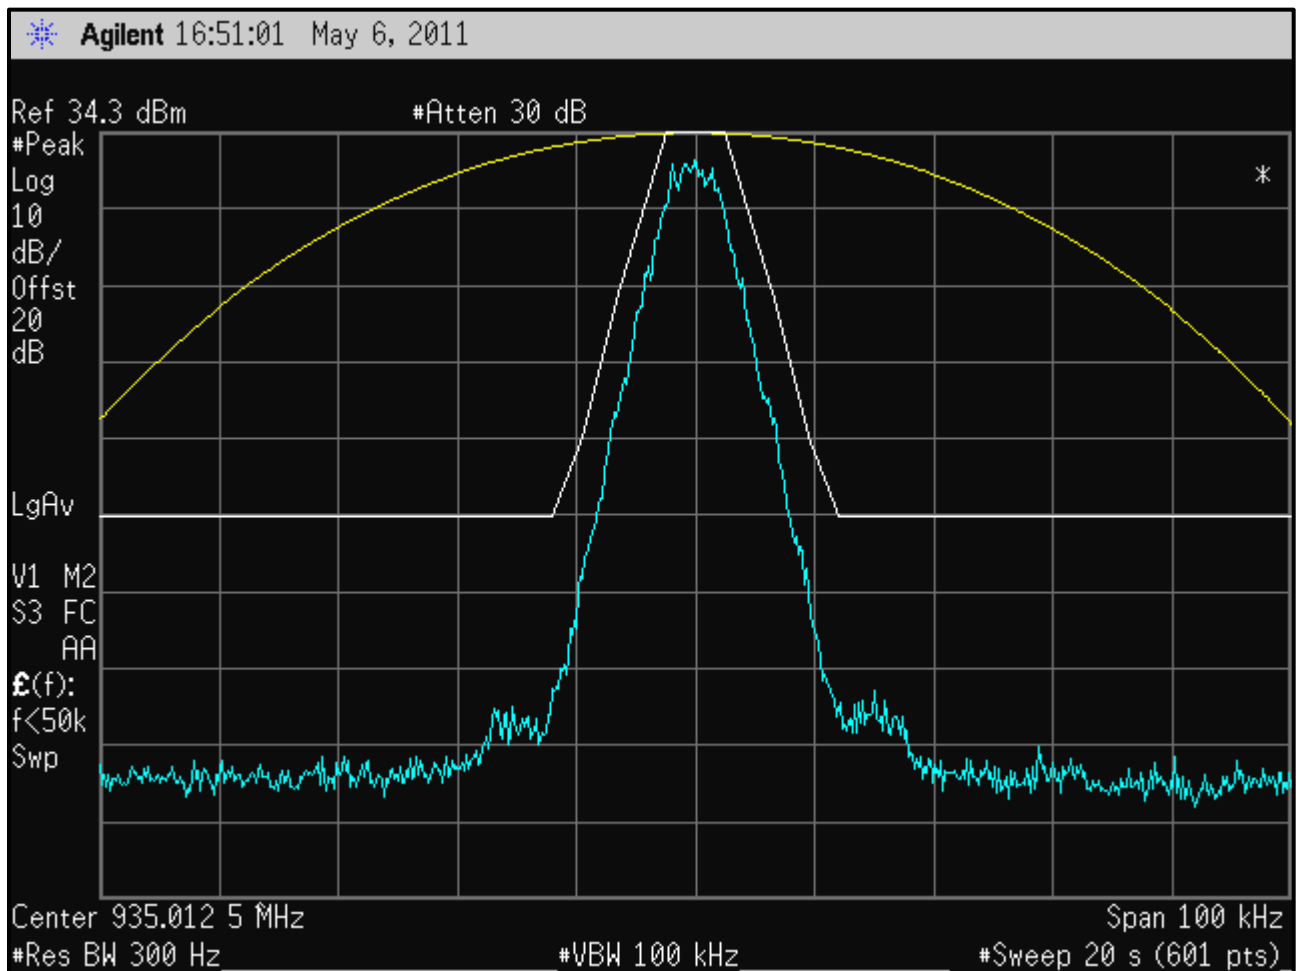

Plot 6-5: Occupied Bandwidth – 937.5000 MHz Mask J

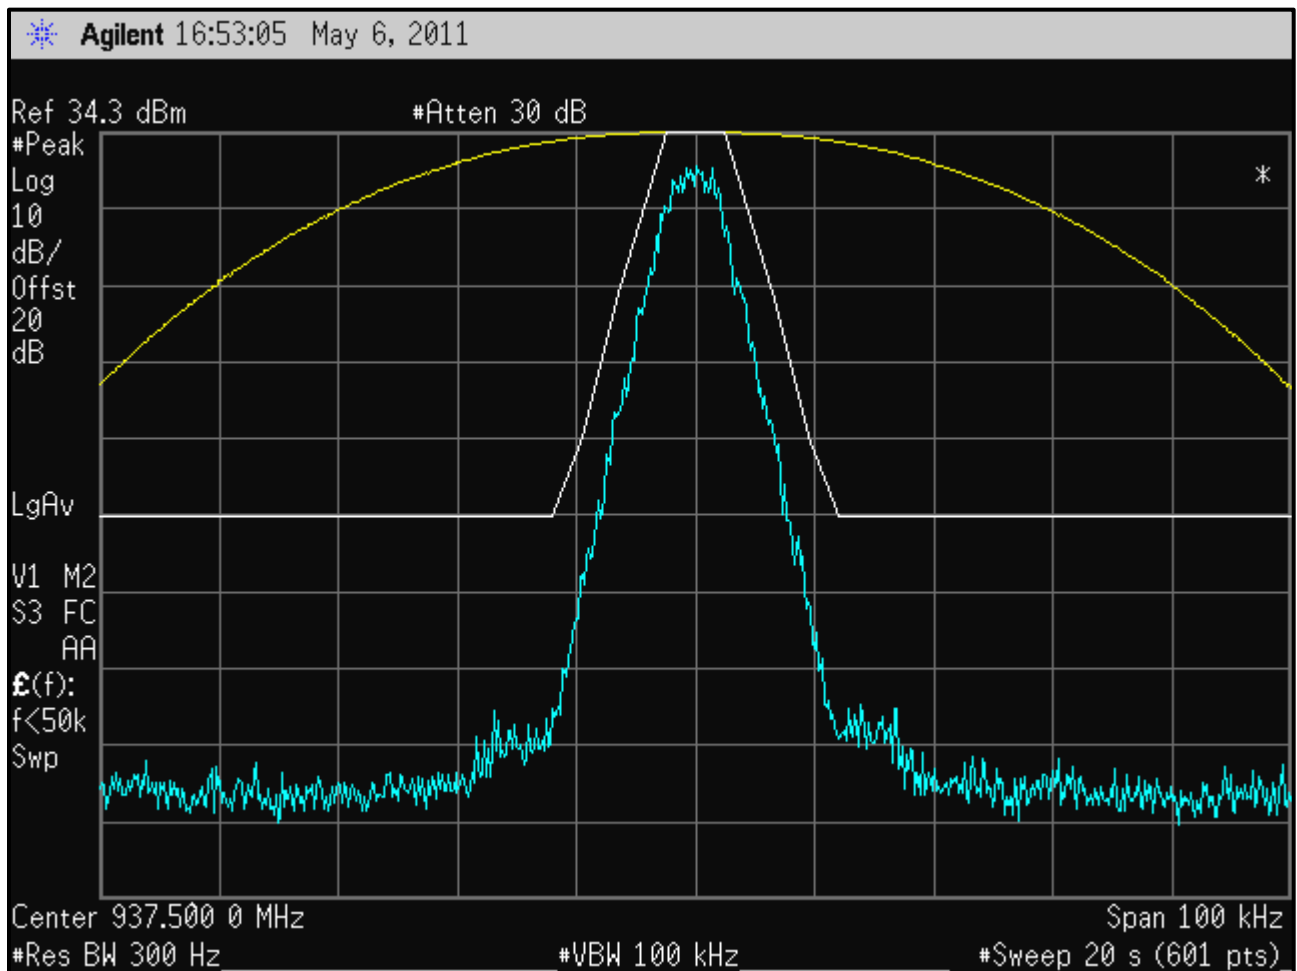

Plot 6-6: Occupied Bandwidth – 939.9875 MHz Mask J

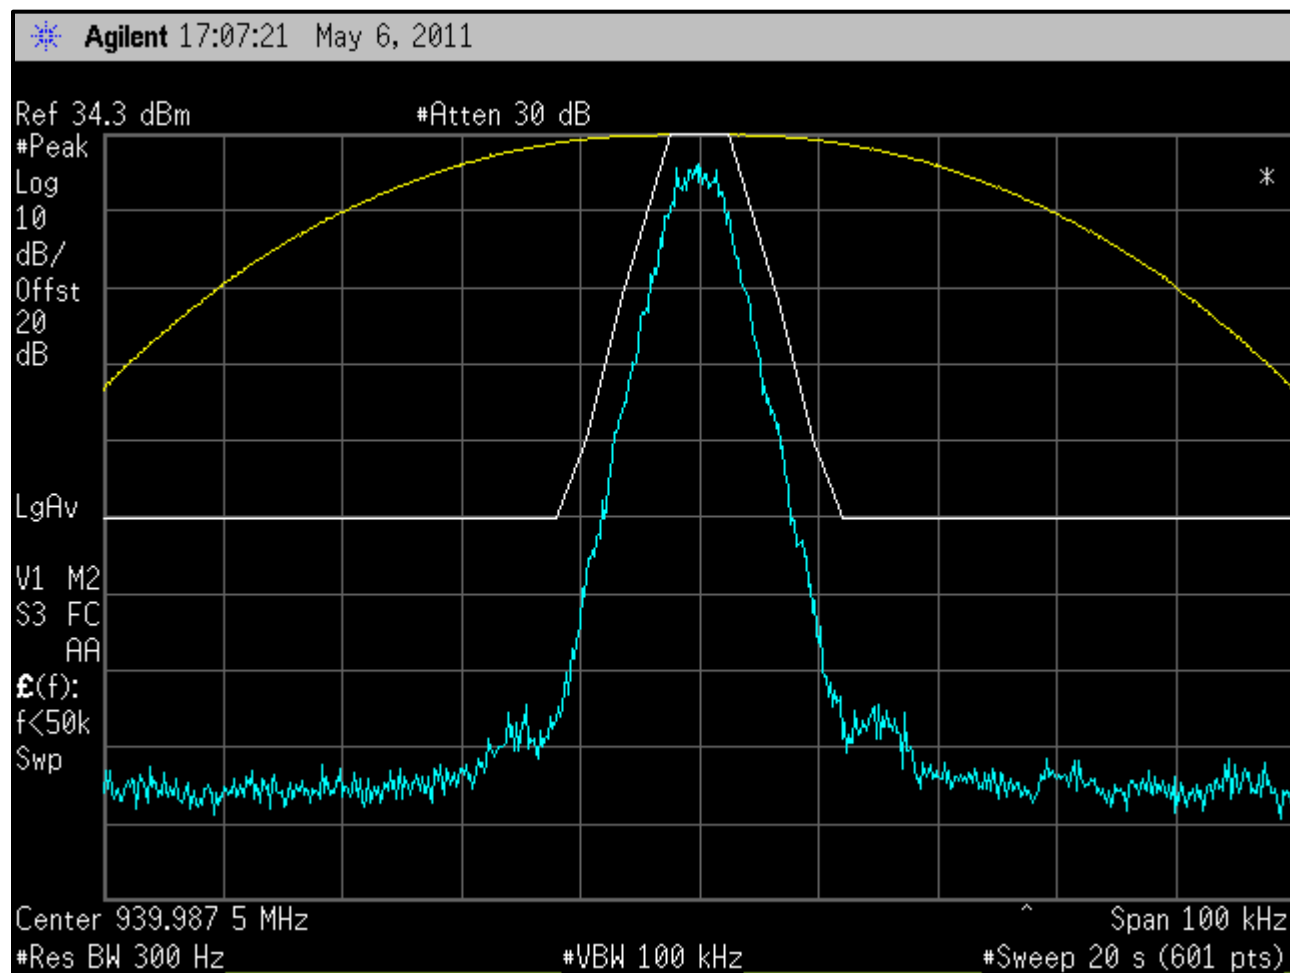


Table 6-1: Test Equipment Used For Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	4/08/2012

Test Personnel:

Richard B. McMurray, P.E.
 Test Engineer

Richard B. McMurray
 Signature

May 6, 2011
 Date of Test

7 FCC Rules and Regulations Part 90.213 and Part 2.1055: Frequency Stability

7.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.2.

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and an hour elapsed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10°C through the range. A ½ hour period was observed to stabilize the EUT at each measurement step, and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% of nominal value.

7.2 Test Data

7.2.1 CFR 47 Part 90.213 Requirements

For mobile stations over 2 W:

896 – 901 MHz band: 1.5 ppm

935 – 940 MHz band: 1.5 ppm

7.2.2 Frequency Stability/Temperature Variation

Table 7-1: Temperature Frequency Stability – 898.50000 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	898 500 600	0.85
-20	898 500 633	0.89
-10	898 500 530	0.77
0	898 500 204	0.41
10	898 500 038	0.23
20 (reference)	898 499 835	0.00
30	898 499 743	0.10
40	898 499 523	0.35
50	898 499 315	0.58
60	898 499 322	0.57

Table 7-2: Temperature Frequency Stability – 937.5000 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	937 500 655	0.94
-20	937 500 665	0.95
-10	937 500 375	0.64
0	937 500 255	0.51
10	937 499 960	0.19
20 (reference)	937 499 778	0.00
30	937 499 811	0.04
40	937 499 440	0.36
50	937 499 271	0.54
60	937 499 340	0.47

The worst-case deviation was found to be 0.95 ppm.

Result: The EUT is compliant.

7.2.3 Frequency Stability/Voltage Variation

Table 7-3: Frequency Stability/Voltage Variation – 898.50000 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
9	898 499 802	0.02
33	898 499 820	0.00
57	898 499 815	0.01


Table 7-4: Frequency Stability/Voltage Variation – 937.5000 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
9	937 499 780	0.00
33	937 499 778	0.00
57	937 499 779	0.00

Table 7-5: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	01/13/2013
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	07/29/2011
901350	Meterman	33XR	Multimeter	040402802	12/28/2012

Test Personnel:

Richard B. McMurray, P.E. Test Engineer	 Signature	May 6 and 8, 2011 Dates of Test
--	--	------------------------------------

8 FCC Rules and Regulations Part 90.210 and Part 2.1053(a); RSS-119 5.8: Field Strength of Spurious Radiation

8.1 Test Procedure

ANSI/TIA-603-C-2004, Section 2.2.12.

Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 9,600 bps.

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

8.2 Test Data

8.2.1 CFR 47 Part 90.210 Requirements

The worst-case emissions test data are shown.

Table 8-1: Field Strength of Spurious Radiation – 896.0125 MHz; High Power

Limit = $43 + 10 \log P = 48.6 \text{ dBc}$; Conducted Power = $35.6 \text{ dBm} = 3.6 \text{ W}$

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1792.0250	40.9	H	-76.1	1.4	6.5	106.6	-58.0
2688.0375	55.3	V	-65.0	1.8	7.6	94.8	-46.2
3584.0500	52.1	H	-68.6	2.1	7.3	99.0	-50.4
4480.0625	45.2	V	-68.9	2.5	8.8	98.2	-49.6
5376.0750	33.7	V	-78.6	2.7	8.5	108.5	-59.9
6272.0875	32.6	V	-80.0	2.8	9.1	109.4	-60.8
7168.1000	32.0	V	-79.5	2.8	9.3	108.6	-60.0
8064.1125	30.5	V	-77.9	2.7	9.2	107.0	-58.4
8960.1250	31.0	H	-75.4	2.5	9.0	104.5	-55.9

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the $\frac{1}{2}$ wave dipole antenna.

Table 8-2: Field Strength of Spurious Radiation – 898.5000 MHz; High Power

Limit = $43 + 10 \log P = 48.6$ dBc; Conducted Power = 35.6 dBm = 3.6 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1797.0000	39.2	H	-77.9	1.4	6.5	108.4	-59.8
2695.5000	50.1	H	-70.9	1.8	7.6	100.6	-52.0
3594.0000	56.6	V	-63.4	2.1	7.3	93.8	-45.2
4492.5000	45.2	V	-68.9	2.5	8.8	98.1	-49.5
5391.0000	32.8	H	-79.6	2.7	8.5	109.5	-60.9
6289.5000	29.8	V	-82.8	2.8	9.1	112.1	-63.5
7188.0000	30.2	V	-81.4	2.8	9.3	110.5	-61.9
8086.5000	30.2	H	-78.2	2.7	9.2	107.3	-58.7
8985.0000	30.4	H	-76.2	2.5	9.0	105.3	-56.7

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 8-3: Field Strength of Spurious Radiation – 900.9875 MHz; High Power

Limit = $43 + 10 \log P = 48.6$ dBc; Conducted Power = 35.6 dBm = 3.6 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1801.9750	39.3	H	-77.9	1.4	6.5	108.4	-59.8
2702.9625	49.4	V	-71.1	1.8	7.7	100.8	-52.2
3603.9500	55.5	V	-64.3	2.1	7.2	94.7	-46.1
4504.9375	46.3	V	-67.7	2.5	8.9	96.9	-48.3
5405.9250	32.3	V	-79.9	2.7	8.5	109.8	-61.2
6306.9125	30.6	V	-82.0	2.8	9.2	111.2	-62.6
7207.9000	30.2	H	-81.3	2.8	9.2	110.5	-61.9
8108.8875	29.4	V	-78.9	2.7	9.2	108.0	-59.4
9009.8750	31.7	H	-75.1	2.5	9.1	104.1	-55.5

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 8-4: Field Strength of Spurious Radiation – 935.0125 MHz; High Power

Limit = $43 + 10 \log P = 47.6$ dBc; Conducted Power = 34.6 dBm = 2.9 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1870.0250	43.5	H	-71.9	1.4	6.2	101.7	-54.1
2805.0375	51.2	H	-68.7	1.9	8.0	97.1	-49.5
3740.0500	58.8	H	-60.8	2.2	7.0	90.6	-43.0
4675.0625	41.4	V	-72.2	2.5	9.0	100.3	-52.7
5610.0750	30.2	V	-82.5	2.8	8.9	111.0	-63.4
6545.0875	34.2	V	-78.6	2.8	9.7	106.3	-58.7
7480.1000	31.3	V	-79.3	2.8	9.0	107.7	-60.1
8415.1125	27.6	H	-79.3	2.6	9.2	107.3	-59.7
9350.1250	28.3	V	-76.7	2.5	9.4	104.4	-56.8

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 8-5: Field Strength of Spurious Radiation – 937.5000 MHz; High Power

Limit = $43 + 10 \log P = 47.6$ dBc; Conducted Power = 34.6 dBm = 2.9 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1875.0000	46.2	H	-69.0	1.4	6.2	98.8	-51.2
2812.5000	51.2	H	-68.8	1.9	8.0	97.2	-49.6
3750.0000	59.1	V	-59.7	2.2	7.0	89.6	-42.0
4687.5000	38.6	V	-75.0	2.6	9.0	103.2	-55.6
5625.0000	29.9	H	-83.4	2.8	8.9	111.9	-64.3
6562.5000	33.4	H	-79.7	2.8	9.6	107.4	-59.8
7500.0000	28.7	H	-82.5	2.8	9.1	110.9	-63.3
8437.5000	22.5	H	-84.4	2.6	9.2	112.4	-64.8
9375.0000	27.2	H	-78.2	2.6	9.4	106.0	-58.4

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 8-6: Field Strength of Spurious Radiation – 939.9875 MHz; High Power

Limit = $43 + 10 \log P = 47.6$ dBc; Conducted Power = 34.6 dBm = 2.9 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Polarity	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1879.9750	42.6	H	-72.4	1.4	6.2	102.2	-54.6
2819.9625	54.1	H	-65.9	1.9	8.0	94.5	-46.9
3759.9500	61.4	V	-57.6	2.2	7.0	87.4	-39.8
4699.9375	37.6	V	-76.0	2.6	9.0	104.2	-56.6
5639.9250	30.5	H	-82.9	2.8	9.0	111.3	-63.7
6579.9125	34.6	H	-78.5	2.8	9.6	106.3	-58.7
7519.9000	29.7	V	-80.8	2.8	9.1	109.1	-61.5
8459.8875	24.1	V	-81.3	2.6	9.2	109.3	-61.7
9399.8750	26.4	V	-78.6	2.6	9.4	106.4	-58.8

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 8-7: Test Equipment for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	1/31/2013
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	10/27/2012
901364	MITEQ	JS4-01002600-36-5P	Amplifier 0.1-26 GHz, 28 dB gain, power 5 dB	849863	3/31/2012
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	1/13/2012
900928	Hewlett Packard	HP 83752A	Synthesized Sweeper (.01 - 20 GHz)	3610A00866	2/17/2012
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/19/2011
901517	Insulated Wire Inc.	KPS-1503-360-KPS-09302008	RF cable 36"	NA	10/19/2011
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	10/19/2011
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/2011
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	6/14/2011
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	6/14/2011

Test Personnel:

Daniel W. Baltzell		May 11, 2011
Test Engineer	Signature	Date of Test

9 FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

OTP Modulation

896 – 901, 935 - 940 MHz

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = +/-1.8 kHz

Number of states in each symbol (S) = 2

$B_n = [4800/\log_2(2) + 2(2000)(1)] = 8.80 \text{ kHz}$

Emission designator: 8K80F1D

10 Conclusion

The data in this measurement report shows that the **Harris Corporation Model SG5300-900, FCC ID: OWDTR-0064-E, IC: 3636B-0064**, complies with all the applicable requirements of Parts 2 and 90 of the FCC Rules and IC RSS-119.