



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
0704110WD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC/IC)

Test Lab Information		Name	CELLTECH LABS INC.					
		Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada					
Test Lab Accreditation(s)		A2LA	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)					
		Name	HARRIS CORPORATION					
Applicant Information		Address	221 Jefferson Ridge Parkway, Lynchburg, VA 24501 U.S.A.					
		FCC	47 CFR §2.1093		IC	Health Canada Safety Code 6		
Procedure(s) Applied		FCC	OET Bulletin 65, Supplement C		FCC	KDB 447498 D01v04		
		FCC	KDB 643646 D01v01r01 (SAR Test Reduction Considerations for Occ. PTT Radios)					
Device Classification(s)		IC	RSS-102 Issue 4		IEEE	1528-2003		
		IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz) - RSS-119					
Device Identifier(s)		FCC ID:	OWDTR-0066-E		Application Type	FCC TCB Certification		
		IC	3636B-0066		Application Type	IC CB Certification		
Date of Sample Receipt	July 04, 2011			Dates of Evaluation	July 05-08, 11-12, 2011			
Device Description	Portable 800-Band Digital Push-To-Talk (PTT) Radio Transceiver							
Device Model(s)		800 MHz P5500 (SYSTEM version)			P/N: RU-123550-006			
		800 MHz P5300 (SYSTEM version)			P/N: RU-123550-008 (color difference only)			
Device Model(s) Tested	P5500 (SYSTEM version)				S/N: Re-8T-004 (Identical Prototype)			
Test Sample Revision No.s	Hardware	TMS-1		Firmware	R14B01			
Transmit Frequency Range(s)	FCC/IC	806-824 MHz		851-869 MHz				
Manufacturer's Rated Output Power		3 Watts Nominal (Conducted)		Upper Tolerance Spec.	+ 0.23 Watts			
		(1) 1/4-wave Whip		P/N: KRE 101 1223/01	Gain Spec.: 0 dBi	Length: 100mm		
Antenna Type(s) Tested		(2) High-Gain		P/N: KRE 101 506/1	Gain Spec.: 2.5 dBi	Length: 175mm		
		(3) 1/4-wave Whip		P/N: KRE 101 506/2	Gain Spec.: 0 dBi	Length: 83mm		
Battery Type(s) Tested		Ni-MH		Immersible, non-IS	7.5V, 2400 mAh	BT-023406-003		
		Ni-MH		Immersible, <IS>	7.5V, 2400 mAh	BT-023406-004		
		Li-Ion		Immersible, non-IS	7.4V, 2000 mAh	BT-023406-005		
Body-worn Accessories Tested	See manufacturer's accessory listing (Section 7.0)							
Audio Accessories Tested	See manufacturer's accessory listing (Section 7.0)							
Max. SAR Level(s) Evaluated		Face-held	2.42 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.		
		Body-worn	4.00 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.		
FCC/IC Spatial Peak SAR Limit	Head/Body	8.0 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.			
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and IEC International Standard 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.								
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.								
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.								
The results and statements contained in this report pertain only to the device(s) evaluated.								
Test Report Approved By			Sean Johnston		Lab Manager	Celltech Labs Inc.		

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 1 of 242					

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($F < 0.5$ GHZ)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 NO. OF TEST CHANNELS (N_c)	5
7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	6
8.0 FLUID DIELECTRIC PARAMETERS	8
FLUID DIELECTRIC PARAMETERS (CONT.)	9
FLUID DIELECTRIC PARAMETERS (CONT.)	10
FLUID DIELECTRIC PARAMETERS (CONT.)	11
FLUID DIELECTRIC PARAMETERS (CONT.)	12
FLUID DIELECTRIC PARAMETERS (CONT.)	13
9.0 TEST PROCEDURES APPLIED PER FCC KDB 643646	14
10.0 SAR MEASUREMENT SUMMARY	15
SAR MEASUREMENT SUMMARY (CONT.)	16
SAR MEASUREMENT SUMMARY (CONT.)	17
SAR MEASUREMENT SUMMARY (CONT.)	18
SAR MEASUREMENT SUMMARY (CONT.)	19
SAR MEASUREMENT SUMMARY (CONT.)	20
SAR MEASUREMENT SUMMARY (CONT.)	21
SAR MEASUREMENT SUMMARY (CONT.)	22
SAR MEASUREMENT SUMMARY (CONT.)	23
SAR MEASUREMENT SUMMARY (CONT.)	24
SAR MEASUREMENT SUMMARY (CONT.)	25
SAR MEASUREMENT SUMMARY (CONT.)	26
SAR MEASUREMENT SUMMARY (CONT.)	27
SAR MEASUREMENT SUMMARY (CONT.)	28
SAR MEASUREMENT SUMMARY (CONT.)	29
SAR MEASUREMENT SUMMARY (CONT.)	30
SAR MEASUREMENT SUMMARY (CONT.)	31
SAR MEASUREMENT SUMMARY (CONT.)	32
SAR MEASUREMENT SUMMARY (CONT.)	33
SAR MEASUREMENT SUMMARY (CONT.)	34
11.0 SAR SCALING (TUNE-UP TOLERANCE)	35
12.0 DETAILS OF SAR EVALUATION	36
13.0 SAR EVALUATION PROCEDURES	36
14.0 SYSTEM PERFORMANCE CHECK	37
15.0 SIMULATED EQUIVALENT TISSUES	38
16.0 SAR LIMITS	38
17.0 ROBOT SYSTEM SPECIFICATIONS	39
18.0 PROBE SPECIFICATION (ET3DV6)	40
19.0 SAM TWIN PHANTOM V4.0C	40
20.0 SIDE PLANAR PHANTOM	40
21.0 BARSKI PLANAR PHANTOM	40
22.0 DEVICE HOLDER	41
23.0 TEST EQUIPMENT LIST	41
24.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION	42
25.0 MEASUREMENT UNCERTAINTIES	43
26.0 REFERENCES	44
APPENDIX A - SAR MEASUREMENT DATA	45
APPENDIX B - SYSTEM PERFORMANCE CHECK	158
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	165
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	172
APPENDIX E - DIPOLE CALIBRATION	238
APPENDIX F - PROBE CALIBRATION	239
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	240
APPENDIX H - SAM TWIN PHANTOM CERTIFICATE OF CONFORMITY	241
APPENDIX I - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01V01R01)	242

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Revision History			
Revision No.	Description	Implemented By	Release Date
1.0	Initial Release	Sean Johnston	July 18, 2011
1.1	a. FCC ID correction - all pages b. Added HW Rev. No. (page 1)	Jon Hughes	July 25, 2011
1.2	Per FCC KDB Inquiry Tracking #538279: a. Added SAR Data Table Numbering b. Added Appendix I	Jon Hughes	October 05, 2011

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Cheri Frangiadakis	Jon Hughes	Sean Johnston

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 242	

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ilac-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the HARRIS Corporation Model: P5500 (800) Portable 800-Band PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]) and IEEE Standard 1528-2003 (see reference [5]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER LEVELS					
Test Freq. (MHz)	Band	Mode	dBm	Watts	Method
806.0125	806-824 MHz	CW	35.0	3.16	Average Conducted
823.9875	806-824 MHz	CW	35.0	3.16	Average Conducted
851.0125	851-869 MHz	CW	35.0	3.16	Average Conducted
868.9875	851-869 MHz	CW	35.0	3.16	Average Conducted

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 242

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*		
Exposure Conditions	P mW (General Population)	P mW (Occupational)
Held to face, $d \geq 2.5$ cm	250	1250
Body-worn, $d \geq 1.5$ cm	200	1000
Body-worn, $d \geq 1.0$ cm	150	750

1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds.
 2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.
 * Per FCC KDB 447498 D01v04 Section 5)b)ii) (see reference [8]).

Note: The thresholds specified in the above table do not apply to this 800 MHz band radio ($f \geq 0.5$ GHz). The output power threshold of $\geq 60/f_{(\text{GHz})}$ mW specified in FCC KDB 447498 (see reference [8]) was applied.

5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz $<$ 300 MHz and ± 50 MHz \geq 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [10]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	<u>± 50 MHz \geq 300 MHz</u>
835 MHz	806.0125 MHz	29 MHz	< 50 MHz
	823.9875 MHz	11 MHz	< 50 MHz
	851.0125 MHz	16 MHz	< 50 MHz
	868.9875 MHz	34 MHz	< 50 MHz

Note: The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps were not required.

6.0 NO. OF TEST CHANNELS (N_c)

Antenna Part No.	Antenna Type	Test Freq. Range	Band	N_c	Test Frequencies (MHz)
(1) KRE 101 1223/01	1/4-wave Whip	806.0125 - 868.9875 MHz	FCC/IC	4	806.0125, 823.9875, 851.0125, 868.9875
(2) KRE 101 506/1	High-Gain	806.0125 - 868.9875 MHz	FCC/IC	4	806.0125, 823.9875, 851.0125, 868.9875
(3) KRE 101 506/2	1/4-wave Whip	806.0125 - 868.9875 MHz	FCC/IC	4	806.0125, 823.9875, 851.0125, 868.9875

Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [8]).

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	 HARRIS
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 242



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
0704110WD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Accessory ID # for Test Report			Accessory Category: ANTENNA		
			Part Number	Description	
1	KRE 101 1223/01		1/4-wave whip		
2	KRE 101 1506/1		High gain, flexible construction		
3	KRE 101 1506/2		1/4 wave whip, wide bandwidth		
Accessory ID # for Test Report			Accessory Category: BATTERY		
			Part Number	Description	
a	BT-023406-003		Ni-MH, immersible, non-IS		
b	BT-023406-004		Ni-MH, immersible, <IS>		
c	BT-023406-005		Li-Ion, immersible, non-IS		
n/a	BT-023406-103 *		Ni-MH, immersible, Goldpeak cells, non-IS		
Accessory ID # for Test Report			Accessory Category: BODY-WORN		
			Part Number	Description	
1***	CC-023931-003 (kit) KRY 101 1609/1 (belt loop)		Kit contains (CC-023931-001 Leather Case w/o D-rings, FM-011820 elastic strap, KRY1011608/2 swivel mount), used with KRY 101 1609/1 Belt Loop		
2	CC-023931-004 (kit) KRY 101 1609/1 (belt loop)		Kit contains (CC-023931-002 Leather Case w/ D-rings, FM-011820 elastic strap, KRY1011608/2 swivel mount), used with KRY 101 1609/1 Belt Loop		
3	CC-023931-002 FM-011820 CC103333V1		CC-023931-002 Leather Case w/ D-rings + FM-011820 elastic strap, used with CC103333V1 Shoulder Strap		
4	KRY 101 1608/2 KRY 101 1609/1		Swivel Mount & Belt Loop		
5***	CC-023932-001 KRY 101 1609/1		Nylon Case (black) w/ Belt Loop		
n/a	CC-023932-002 ** KRY 101 1609/1		Nylon Case (orange) w/ Belt Loop		
6	CC23894		Metal Belt Clip		
7	CC-014534-002		Kit containing CC-014534-001 BEE Nylon Case (black) & CC-014527 BEE Leather Belt Loop		
8	CC-014528-003		Kit containing CC-014528-001 BEE Leather Case w/o D-rings, & KRY1011608/2 swivel mount, and CC-014527 BEE Leather Belt Loop		
9***	CC-014528-004		Kit containing CC-014528-002 BEE Leather Case w/ D-rings, & KRY1011608/2 swivel mount, and CC-014524-001 BEE Shoulder Strap		
n/a	CC-014524-002		BEE Short Leather Retaining Strap		
Accessory ID # for Test Report			Accessory Category: AUDIO		
			Part Number	Description	
				Audio Accessory Grouping	
G7a	MC-023933-001		Speaker-Mic, No Ant. (cc), <IS>	Group 7	
n/a	MC-023933-002		Speaker-Mic, W/ Ant. (cc) provision, <IS>	n/a (contains integral antenna)	
G7b	MC-009104-002		Speaker-Mic, GPS, non-IS	Group 7	
n/a	LS103239V1		Earphone for speaker-mic <IS>	n/a (accessory to Group 7)	
G7c	MC-011617-601		Ruggedized Speaker Mic-Coil Cord	Group 7	
G7d	MC-011617-701		Standard Speaker Mic - Non Ant	Group 7	
G12a	EA-009580-001		Earphone Kit, Black	Group 12	

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 6 of 242



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
070411OWD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

G12b****	EA-009580-002	Earphone Kit, Beige	Group 12
G8a	EA-009580-003	2-Wire Kit, Palm mic, Black	Group 8
G8b****	EA-009580-004	2-Wire Kit, Palm mic, Beige	Group 8
G9a	EA-009580-005	3-Wire Kit, Mini-Lapel Mic, Black	Group 9
G9b****	EA-009580-006	3-Wire Kit, Mini-Lapel Mic, Beige	Group 9
G4	EA-009580-007	Explorer Headset w/ PTT	Group 4
G2	EA-009580-008	Lightweight headset single spkr w/ PTT	Group 2
G3a	EA-009580-009	Breeze Headset w/ PTT	Group 3
G1a	EA-009580-010	Headset, heavy duty, N/C behind the head, w/ PTT	Group 1
G5	EA-009580-011	Ranger Headset w/ PTT	Group 5
G10	EA-009580-012	Skull mic w/body PTT & earcup	Group 10
G1b	EA-009580-013	Headset, heavy duty, N/C over the head, w/ PTT	Group 1
G11a	EA-009580-014	Throat mic w/acoustic tube & body PTT	Group 11
G11b	EA-009580-015	Throat mic w/acoustic tube, body PTT, & ring PTT	Group 11
G3b	EA-009580-016	Breeze headset w/ PTT & pigtail jack	Group 3
G6a	EA-009580-017	Hurricane headset w/ PTT	Group 6
G6b	EA-009580-018	Hurricane headset w/ PTT & pigtail jack	Group 6

Manufacturer's disclosed accessory listing information provided by HARRIS Corporation

* BT-023406-103 does not need to be explicitly tested for SAR since the Goldpeak cells have the same physical form factor as the Sanyo cells used in the BT-023406-003.

** The orange nylon case does NOT have to be explicitly tested for SAR due to physical similarity to the black case.

*** Body-worn accessories 1, 5 and 9 were not tested due to their physical similarity to accessories 8, 7 and 3 respectively. Preliminary SAR evaluations were performed to determine the worst case between each similar accessory, which was then selected for the compliance evaluations.

**** Audio accessories G8b, G9b and G12b were not tested as they differ only in color to G8a, G9a and G12a respectively.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 0704110WD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

8.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 07/05/2011		Frequency: 835 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	44.07	0.79	41.5	0.9	6.19%	-12.22%
0.745	43.88	0.8	41.5	0.9	5.73%	-11.11%
0.755	43.74	0.81	41.5	0.9	5.40%	-10.00%
0.765	43.75	0.82	41.5	0.9	5.42%	-8.89%
0.775	43.62	0.84	41.5	0.9	5.11%	-6.67%
0.785	43.27	0.85	41.5	0.9	4.27%	-5.56%
0.795	43.38	0.86	41.5	0.9	4.53%	-4.44%
0.805	43.22	0.86	41.5	0.9	4.14%	-4.44%
0.815	42.9	0.87	41.5	0.9	3.37%	-3.33%
0.824*	43	0.888	41.5	0.9	3.61%	-1.33%
0.825	43	0.89	41.5	0.9	3.61%	-1.11%
0.835	43.35	0.9	41.5	0.9	4.46%	0.00%
0.845	42.73	0.91	41.5	0.9	2.96%	1.11%
0.855	42.59	0.91	41.5	0.9	2.63%	1.11%
0.865	42.61	0.92	41.5	0.9	2.67%	2.22%
0.869*	42.5	0.92	41.5	0.9	2.41%	2.22%
0.875	42.43	0.92	41.5	0.9	2.24%	2.22%
0.885	42.32	0.95	41.5	0.9	1.98%	5.56%
0.895	42.35	0.96	41.5	0.9	2.05%	6.67%
0.905	41.8	0.97	41.5	0.9	0.72%	7.78%
0.915	42.07	0.98	41.5	0.9	1.37%	8.89%
0.925	41.93	0.98	41.5	0.9	1.04%	8.89%
0.935	41.9	1	41.5	0.9	0.96%	11.11%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 5	835	24.0°C	23.2°C	≥ 15 cm	101.1 kPa	29%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 242

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ilac-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS (CONT.)

FLUID DIELECTRIC PARAMETERS						
Date: 07/06/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	54.59	0.85	55.2	0.97	-1.11%	-12.37%
0.745	54.67	0.85	55.2	0.97	-0.96%	-12.37%
0.755	54.62	0.87	55.2	0.97	-1.05%	-10.31%
0.765	54.23	0.87	55.2	0.97	-1.76%	-10.31%
0.775	54.27	0.88	55.2	0.97	-1.68%	-9.28%
0.785	54.39	0.89	55.2	0.97	-1.47%	-8.25%
0.795	54.21	0.9	55.2	0.97	-1.79%	-7.22%
0.805	53.93	0.92	55.2	0.97	-2.30%	-5.15%
0.815	53.73	0.92	55.2	0.97	-2.66%	-5.15%
0.824*	53.9	0.938	55.2	0.97	-2.36%	-3.30%
0.825	53.9	0.94	55.2	0.97	-2.36%	-3.09%
0.835	53.69	0.96	55.2	0.97	-2.74%	-1.03%
0.845	53.68	0.95	55.2	0.97	-2.75%	-2.06%
0.855	53.79	0.96	55.2	0.97	-2.55%	-1.03%
0.865	53.94	0.98	55.2	0.97	-2.28%	1.03%
0.869*	53.9	0.98	55.2	0.97	-2.36%	1.03%
0.875	53.74	0.98	55.2	0.97	-2.64%	1.03%
0.885	53.68	1	55.2	0.97	-2.75%	3.09%
0.895	53.54	1	55.2	0.97	-3.01%	3.09%
0.905	53.62	1.01	55.2	0.97	-2.86%	4.12%
0.915	52.99	1.04	55.2	0.97	-4.00%	7.22%
0.925	52.74	1.04	55.2	0.97	-4.46%	7.22%
0.935	53.17	1.07	55.2	0.97	-3.68%	10.31%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 6	835	24.0°C	22.2°C	≥ 15 cm	101.1 kPa	31%	1000



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
070411OWD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

FLUID DIELECTRIC PARAMETERS (CONT.)

FLUID DIELECTRIC PARAMETERS						
Date: 07/07/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	55.25	0.86	55.2	0.97	0.09%	-11.34%
0.745	54.87	0.87	55.2	0.97	-0.60%	-10.31%
0.755	54.69	0.87	55.2	0.97	-0.92%	-10.31%
0.765	54.86	0.88	55.2	0.97	-0.62%	-9.28%
0.775	54.65	0.89	55.2	0.97	-1.00%	-8.25%
0.785	54.57	0.89	55.2	0.97	-1.14%	-8.25%
0.795	54.55	0.91	55.2	0.97	-1.18%	-6.19%
0.805	54.24	0.9	55.2	0.97	-1.74%	-7.22%
0.815	54.2	0.93	55.2	0.97	-1.81%	-4.12%
0.824*	54.3	0.93	55.2	0.97	-1.63%	-4.12%
0.825	54.32	0.93	55.2	0.97	-1.59%	-4.12%
0.835	54.27	0.95	55.2	0.97	-1.68%	-2.06%
0.845	54.32	0.96	55.2	0.97	-1.59%	-1.03%
0.855	54.09	0.97	55.2	0.97	-2.01%	0.00%
0.865	53.82	0.98	55.2	0.97	-2.50%	1.03%
0.869*	53.8	0.984	55.2	0.97	-2.54%	1.44%
0.875	53.71	0.99	55.2	0.97	-2.70%	2.06%
0.885	53.74	1	55.2	0.97	-2.64%	3.09%
0.895	53.39	1.01	55.2	0.97	-3.28%	4.12%
0.905	53.43	1.02	55.2	0.97	-3.21%	5.15%
0.915	53.29	1.02	55.2	0.97	-3.46%	5.15%
0.925	53.56	1.04	55.2	0.97	-2.97%	7.22%
0.935	53.25	1.04	55.2	0.97	-3.53%	7.22%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 7	835	24.0°C	23.8°C	≥ 15 cm	101.1 kPa	33%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 242

 Celltech Testing and Engineering Services Ltd	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

FLUID DIELECTRIC PARAMETERS (CONT.)

FLUID DIELECTRIC PARAMETERS						
Date: 07/08/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	55.22	0.88	55.2	0.97	0.04%	-9.28%
0.745	55.1	0.87	55.2	0.97	-0.18%	-10.31%
0.755	55.29	0.88	55.2	0.97	0.16%	-9.28%
0.765	55.09	0.89	55.2	0.97	-0.20%	-8.25%
0.775	54.82	0.91	55.2	0.97	-0.69%	-6.19%
0.785	54.79	0.91	55.2	0.97	-0.74%	-6.19%
0.795	54.92	0.94	55.2	0.97	-0.51%	-3.09%
0.805	54.79	0.94	55.2	0.97	-0.74%	-3.09%
0.815	54.87	0.94	55.2	0.97	-0.60%	-3.09%
0.824*	54.6	0.967	55.2	0.97	-1.09%	-0.31%
0.825	54.63	0.97	55.2	0.97	-1.03%	0.00%
0.835	54.54	0.97	55.2	0.97	-1.20%	0.00%
0.845	54.41	0.99	55.2	0.97	-1.43%	2.06%
0.855	54.33	1	55.2	0.97	-1.58%	3.09%
0.865	54.29	1	55.2	0.97	-1.65%	3.09%
0.869*	54.2	1	55.2	0.97	-1.81%	3.09%
0.875	54.11	1.01	55.2	0.97	-1.97%	4.12%
0.885	53.81	1.04	55.2	0.97	-2.52%	7.22%
0.895	54.16	1.03	55.2	0.97	-1.88%	6.19%
0.905	53.66	1.05	55.2	0.97	-2.79%	8.25%
0.915	53.35	1.06	55.2	0.97	-3.35%	9.28%
0.925	53.46	1.05	55.2	0.97	-3.15%	8.25%
0.935	53.54	1.07	55.2	0.97	-3.01%	10.31%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 8	835	22.0°C	21.0°C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 242

 Celltech Testing and Engineering Services Ltd	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

FLUID DIELECTRIC PARAMETERS (CONT.)

FLUID DIELECTRIC PARAMETERS						
Date: 07/11/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	55.58	0.87	55.2	0.97	0.69%	-10.31%
0.745	55.24	0.88	55.2	0.97	0.07%	-9.28%
0.755	55.02	0.89	55.2	0.97	-0.33%	-8.25%
0.765	54.89	0.9	55.2	0.97	-0.56%	-7.22%
0.775	54.84	0.9	55.2	0.97	-0.65%	-7.22%
0.785	54.99	0.93	55.2	0.97	-0.38%	-4.12%
0.795	54.78	0.94	55.2	0.97	-0.76%	-3.09%
0.805	54.51	0.95	55.2	0.97	-1.25%	-2.06%
0.815	54.64	0.95	55.2	0.97	-1.01%	-2.06%
0.824*	54.4	0.968	55.2	0.97	-1.45%	-0.21%
0.825	54.33	0.97	55.2	0.97	-1.58%	0.00%
0.835	54.53	0.97	55.2	0.97	-1.21%	0.00%
0.845	54.1	0.99	55.2	0.97	-1.99%	2.06%
0.855	54.19	0.99	55.2	0.97	-1.83%	2.06%
0.865	53.99	1	55.2	0.97	-2.19%	3.09%
0.869*	53.9	1	55.2	0.97	-2.36%	3.09%
0.875	53.67	1	55.2	0.97	-2.77%	3.09%
0.885	53.72	1.01	55.2	0.97	-2.68%	4.12%
0.895	53.75	1.04	55.2	0.97	-2.63%	7.22%
0.905	53.46	1.04	55.2	0.97	-3.15%	7.22%
0.915	53.22	1.05	55.2	0.97	-3.59%	8.25%
0.925	53.24	1.06	55.2	0.97	-3.55%	9.28%
0.935	53.17	1.06	55.2	0.97	-3.68%	9.28%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 11	835	23.0°C	21.5°C	≥ 15 cm	101.1 kPa	35%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 242

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS (CONT.)

FLUID DIELECTRIC PARAMETERS						
Date: 07/12/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	53.93	0.85	55.2	0.97	-2.30%	-12.37%
0.745	53.89	0.86	55.2	0.97	-2.37%	-11.34%
0.755	53.63	0.85	55.2	0.97	-2.84%	-12.37%
0.765	54.04	0.88	55.2	0.97	-2.10%	-9.28%
0.775	53.57	0.88	55.2	0.97	-2.95%	-9.28%
0.785	53.36	0.9	55.2	0.97	-3.33%	-7.22%
0.795	53.29	0.89	55.2	0.97	-3.46%	-8.25%
0.805	53.34	0.92	55.2	0.97	-3.37%	-5.15%
0.815	53.19	0.93	55.2	0.97	-3.64%	-4.12%
0.824*	53	0.93	55.2	0.97	-3.99%	-4.12%
0.825	52.95	0.93	55.2	0.97	-4.08%	-4.12%
0.835	53.16	0.94	55.2	0.97	-3.70%	-3.09%
0.845	53.12	0.94	55.2	0.97	-3.77%	-3.09%
0.855	52.87	0.96	55.2	0.97	-4.22%	-1.03%
0.865	52.54	0.97	55.2	0.97	-4.82%	0.00%
0.869*	52.6	0.978	55.2	0.97	-4.71%	0.82%
0.875	52.71	0.99	55.2	0.97	-4.51%	2.06%
0.885	52.39	1	55.2	0.97	-5.09%	3.09%
0.895	52.3	1.01	55.2	0.97	-5.25%	4.12%
0.905	52.42	1.01	55.2	0.97	-5.04%	4.12%
0.915	52.2	1.02	55.2	0.97	-5.43%	5.15%
0.925	52.49	1.03	55.2	0.97	-4.91%	6.19%
0.935	52.19	1.03	55.2	0.97	-5.45%	6.19%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
July 12	835	22.0°C	21.3°C	≥ 15 cm	101.1 kPa	47%	1000

	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

9.0 TEST PROCEDURES APPLIED PER FCC KDB 643646

a. Face-held Configuration - Default Battery Selection - per FCC KDB 643646, Page 2, Section 1) A): *"When multiple standard batteries are supplied with a radio, the battery with the highest capacity is considered the default battery for making head SAR measurements."*

b. Face-held Configuration - Audio Accessory with Integral Antenna - face-held SAR evaluation for audio accessories with integral antenna are not specifically addressed in FCC KDB 643646. The procedures described in a. above were applied.

c. Body-worn Configuration - Audio Accessory with Integral Antenna - per FCC KDB 643646, Page 7-8: *"Audio accessories with an integral antenna or radiating element must be tested separately from those without any primary radiating element. An audio accessory with a built-in antenna that enables the antenna on a PTT radio to be disconnected from its output while the audio accessory is in use should be tested using the highest capacity default battery. When transmission from the antenna on the PTT radio is disabled while the audio accessory is transmitting using its integral antenna, the normal body-worn accessories for the radio are not expected to influence the SAR of the audio accessory. In addition, special body-worn attachments are generally used for audio accessories with an integral antenna; the audio accessory must be tested according to how it is attached to the user during normal operation. Body SAR is measured with the audio accessory positioned against a flat phantom representative of the normal operating and exposure conditions expected by users. All sides of the audio accessory that may be positioned against the user must be considered for SAR compliance. 1) An audio accessory is tested on the highest output power channel, according to the test channels required by KDB 447498 (6)(c) and in the frequency range covered by the antenna on the audio accessory within the operating frequency bands of the radio to measure body SAR. B) When the body SAR of an audio accessory tested in 1) is: $I \leq 3.5 \text{ W/kg}$, testing of all other required channels is not necessary for that audio accessory."*

d. Body-worn Configuration - Default Battery Selection - per FCC KDB 643646, Page 5, Section 1) A): *"Start by testing a PTT radio with the thinnest battery and a standard (default) body-worn accessory that are both supplied with the radio and, if applicable, a default audio accessory....."*

e. Body-worn Configuration - Default Body-worn Accessory Selection - the belt-clip was selected as the default body-worn accessory based on the smaller separation distance it provides between the radio and the user in comparison to the remaining accessories. Per FCC KDB 643646, Page 5, Section 1) A): *"When multiple default body-worn accessories are supplied with a radio, the standard body-worn accessory expected to result in the highest SAR based on its construction and exposure conditions is considered the default body-worn accessory for making body-worn measurements."*

f. Body-worn Configuration - Additional Body-worn Accessories - the remaining body-worn accessories were evaluated based on the *"additional body-worn accessory"* guidance provided in FCC KDB 643646, Page 7, Section 4). The remaining body-worn accessories can be utilized with all the audio accessory options.

g. Body-worn Configuration - Default Audio Accessory Selection - According to the manufacturer, the radio is not supplied to the end user with a standard default audio accessory (as referenced in FCC KDB 643646, Page 4, Section "Body SAR Test Considerations for Body-worn Accessories"); therefore the procedures described in note (j) below were applied in order to establish the default audio accessory.

h. Body-worn Configuration - Selection of Remaining Default Audio Accessories by Category - the Remaining Default Audio Accessories by Category were selected based on the guidance provided in FCC KDB 643646, Section "Body SAR Test Considerations for Audio Accessories without Built-in Antenna", Page 10: *"For audio accessories with similar construction and operating requirements, test only the audio accessory within the group that is expected to result in the highest SAR, with respect to changes in RF characteristics and exposure conditions for the combination. If it is unclear which audio accessory within a group of similar accessories is expected to result in the highest SAR, good engineering judgment and preliminary testing should be applied to select the accessory that is expected to result in the highest SAR."* Please refer to note (i) below for the procedure implemented to establish the Default Audio Accessory by Category (Grouping). The Remaining Default Audio Accessories by Category were evaluated on the highest SAR channel and antenna combination from the Default Audio Accessory evaluations (see note e.) based on the guidance provided in FCC KDB 643646, Page 10, Section 1) A) thru D).

i. Body-worn Configuration - Selection of Additional Audio Accessories by Category - the Additional Audio Accessories by Category were selected based on the guidance provided in FCC KDB 643646, Section "Body SAR Test Considerations for Audio Accessories without Built-in Antenna", Page 10 and the following procedures were applied per Section D: *"I) if the SAR measured in D) is > 7.0 W/kg and it is one of the accessories within a group of similar audio accessories, test all other audio accessories within that group of similar audio accessories using the highest body-worn SAR combination (antenna, battery and body-worn accessory) and channel configuration identified in 1) that is applicable to the audio accessory*

a) when the SAR for a similar audio accessory in I) is > 7.0 W/kg, test that audio accessory on all required channels using the combination in I.)"

j. According to the manufacturer, all the optional audio accessories can be used with any accessory combination (antenna, battery & body-worn accessory) - see also Appendix I. Therefore, in order to establish the overall default audio accessory and default accessory by category (grouping), preliminary SAR evaluations (area scans with belt-clip, thinnest battery and worst-case antenna configuration from face-held evaluations) were performed by Celltech with all of the optional audio accessories connected to the radio consecutively.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 242

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

10.0 SAR MEASUREMENT SUMMARY

TABLE 1				FACE-HELD SAR EVALUATION RESULTS														
Device-Under-Test				P5500 PTT Radio Transceiver (System)														
Test Date(s)				July 5, 2011														
C				1	2	3	4	5	6									
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g									
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS										
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f									
				Drift (dB)	50%+droop	Drift dB	50%+droop	Drift dB	50%+droop									
1	1 (1223/01)	806.0125	3.16	N/A		N/A		N/A										
2		823.9875	3.16	F1	3.82	1.91		N/A		N/A								
3					-0.134	1.97		N/A		N/A								
4		851.0125	3.16	N/A		N/A		N/A		N/A								
5		868.9875	3.16	F2	3.43	1.72		N/A		N/A								
6					0.062	N/A		N/A		N/A								
7	2 (1506/1)	806.0125	3.16	N/A		N/A		N/A		N/A								
8		823.9875	3.16	F3	1.60	0.800		N/A		N/A								
9					-0.189	0.836		N/A		N/A								
10		851.0125	3.16	N/A		N/A		N/A		N/A								
11		868.9875	3.16	F4	0.856	0.428		N/A		N/A								
12					0.035	N/A		N/A		N/A								
13	3 (1506/2)	806.0125	3.16	N/A		N/A		N/A		N/A								
14		823.9875	3.16	F5	4.84	2.42	F7	4.83	2.42	F8 4.82 2.41								
15					-0.033	2.44		-0.037	2.44									
16		851.0125	3.16	N/A		N/A		N/A		N/A								
17		868.9875	3.16	F6	3.65	1.83	F9	3.91	1.96	F10 3.80 1.90								
18					0.030	N/A		0.038	N/A									
SAR LIMITS				HEAD		SPATIAL PEAK		RF EXPOSURE CATEGORY										
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled										
Notes																		
C = Column; R = Row				F1-F10 (F = Face) denotes the corresponding Face SAR Plot # as shown in Appendix A														
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Side Planar Phantom														
Front Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)													
w/ Antenna 1	w/ Antenna 2	w/ Antenna 3			Antenna 1		Antenna 2		Antenna 3									
2.5 cm	2.5 cm	2.5 cm			5.2 cm		5.0 cm		5.0 cm									

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066		
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ilac-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

FACE-HELD SAR EVALUATION RESULTS (Continued)

Test Procedures in accordance with FCC KDB 643646 (see reference [9])

1. For face-held configuration, battery "a" was selected as the default battery*.
2. When the head SAR of an antenna tested on the highest output power channel using the default battery is ≤ 3.5 W/kg (F1-F6), testing of all other required channels is not necessary.
3. When the SAR for all antennas tested using the default battery is ≤ 4.0 W/kg (F1-F6), test additional batteries using the antenna and channel configuration that resulted in the highest SAR (F7-F10).
4. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* Battery "a" was selected as the default battery based on preliminary evaluations performed to establish the default battery between battery "a" and "b", which are both the same mAh rating and are higher capacity than battery "c".

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 2				FACE-HELD SAR EVALUATION RESULTS															
Device-Under-Test				Speaker-Microphone Audio Accessory with Antenna (with P5500 System Radio)															
Accessory Part No.				MC-023933-002															
Test Date(s)				July 5, 2011															
C				1	2	3	4	5	6										
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g									
1	1 (1223/01)	806.0125	3.16	Battery (a) - Ni-MH NIS			Battery (b) - Ni-MH IS			Battery (c) - Li-Ion NIS									
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f										
		823.9875	3.16	Drift (dB)		50%+droop		Drift dB		50%+droop									
				2.12	1.06	-0.058	1.07												
		851.0125	3.16	N/A			N/A			N/A									
		868.9875	3.16	F12	0.863	0.432	N/A	N/A	N/A	N/A									
2	2 (1506/1)				-0.199	0.452													
	806.0125	3.16	N/A			N/A				N/A									
	823.9875	3.16	F13	1.69	0.845	N/A	N/A	N/A	N/A										
				-0.103	0.865														
	851.0125	3.16	N/A			N/A			N/A										
	868.9875	3.16	F14	0.944	0.472	N/A	N/A	N/A	N/A										
3				3 (1506/2)						-0.205	0.495								
	806.0125	3.16	N/A			N/A			N/A										
	823.9875	3.16	F15	2.06	1.03	N/A	N/A	N/A	N/A										
				-0.180	1.07														
	851.0125	3.16	N/A			N/A			N/A										
	868.9875	3.16	F16	1.42	0.710	N/A	N/A	N/A	N/A										
				-0.146	0.734														
SAR LIMITS					HEAD			SPATIAL PEAK		RF EXPOSURE CATEGORY									
FCC 47 CFR 2.1093				Health Canada Safety Code 6				8.0 W/kg		1 gram average		Occupational / Controlled							
Notes																			
C = Column; R = Row				F11-F16 (F = Face) denotes the corresponding Face SAR Plot # as shown in Appendix A															
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Side Planar Phantom															
Front Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)														
w/ Antenna 1			w/ Antenna 2		w/ Antenna 3		Antenna 1		Antenna 2		Antenna 3								
2.5 cm			2.5 cm		2.5 cm		4.2 cm		4.0 cm		4.0 cm								

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 242

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. Battery "a" was selected as the default battery.
2. When the head SAR of an antenna tested on the highest output power channel using the default battery is ≤ 3.5 W/kg (F11-F16), testing of all other required channels is not necessary.
3. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066		
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz				
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 3				BODY-WORN SAR EVALUATION RESULTS																
Device-Under-Test				Speaker-Microphone Audio Accessory with Antenna (with P5500 System Radio)																
Accessory Part No.				MC-023933-002																
BODY-WORN ACCESSORY				Lapel-Clip																
AUDIO ACCESSORY				LS103239V1 (Earphone for speaker/mic <IS>)																
Test Date(s)				July 11, 2011																
C				1	2	3	4	5	6											
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SARW/kg 1g	SAR W/kg 1g	SARW/kg 1g	SAR W/kg 1g	SARW/kg 1g											
				Radio Battery (a) - Ni-MH NIS		Radio Battery (b) - Ni-MH IS		Radio Battery (c) - Li-Ion NIS												
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f											
				Drift (dB)	50%+droop	Drift dB	50%+droop	Drift dB	50%+droop											
1	1 (1223/01)	806.0125	3.16	N/A			N/A		N/A											
2		823.9875	3.16	B1	2.35	1.18	N/A		N/A											
3					-0.327	1.27														
4		851.0125	3.16	N/A			N/A		N/A											
5		868.9875	3.16	B2	1.73	0.865	N/A		N/A											
6					-0.134	0.892														
7	2 (1506/1)	806.0125	3.16	N/A			N/A		N/A											
8		823.9875	3.16	B3	2.58	1.29	N/A		N/A											
9					-0.043	1.30														
10		851.0125	3.16	N/A			N/A		N/A											
11		868.9875	3.16	B4	1.77	0.885	N/A		N/A											
12					0.016	N/A														
13	3 (1506/2)	806.0125	3.16	N/A			N/A		N/A											
14		823.9875	3.16	B5	2.49	1.25	N/A		N/A											
15					-0.065	1.26														
16		851.0125	3.16	N/A			N/A		N/A											
17		868.9875	3.16	B6	2.47	1.24	N/A		N/A											
18					-0.076	1.26														
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY												
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled												
Notes																				
C = Column; R = Row				B1-B6 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A																
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom																
Back Side of DUT Distance to Planar Phantom (see Appendix D)						Closest Antenna Distance to Planar Phantom (see Appendix D)														
w/ Antenna 1		w/ Antenna 2		w/ Antenna 3		Antenna (1)		Antenna (2)		Antenna (3)										
1.1 cm		1.1 cm		1.1 cm		2.5 cm		2.3 cm		2.3 cm										

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 242

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. Battery "a" was selected as the default battery.
2. When the body SAR of an audio accessory is ≤ 3.5 W/kg (B1-B6), testing of all other required channels is not necessary for that audio accessory.
3. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 0704110WD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 4			BODY-WORN SAR EVALUATION RESULTS													
Device-Under-Test			P5500 PTT Radio Transceiver (System)													
BODY-WORN ACCESSORY ID #			6 (Default) Metal Belt-Clip (CC23894)													
AUDIO ACCESSORY ID #			G4 (Default) Explorer Headset w/PTT (EA-009580-007)													
Test Date(s)			July 6, 2011													
C			1	2	3	4	5	6								
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g							
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS								
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f							
				Drift (dB)	50%+droop	Drift dB	50%+droop	Drift dB	50%+droop							
1	1 (1223/01)	806.0125	3.16	N/A		N/A		N/A								
2		823.9875	3.16	B7	4.40	2.20	N/A		N/A							
3					-0.237	2.32	N/A		N/A							
4		851.0125	3.16	N/A		N/A		N/A								
5		868.9875	3.16	B8	4.36	2.18	B15	4.60	2.30	B16						
6					-0.539	2.47		-0.193	2.41		3.17	1.59				
7	2 (1506/1)	806.0125	3.16	N/A		N/A		N/A								
8		823.9875	3.16	B9	5.17	2.59	B13	5.10	2.55	B14	4.22	2.11				
9					-0.411	2.84		0.042	N/A		0.024	N/A				
10		851.0125	3.16	N/A		N/A		N/A								
11		868.9875	3.16	B10	3.28	1.64	N/A		N/A							
12					-0.087	1.67	N/A		N/A							
13	3 (1506/2)	806.0125	3.16	N/A		N/A		N/A								
14		823.9875	3.16	B11	4.89	2.45	N/A		N/A							
15					-0.130	2.52	N/A		N/A							
16		851.0125	3.16	N/A		N/A		N/A								
17		868.9875	3.16	B12	4.26	2.13	N/A		N/A							
18					-0.262	2.26	N/A		N/A							
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY								
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled								
Notes																
C = Column; R = Row				B7-B16 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A												
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom												
Back Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)											
w/ Battery (a)		w/ Battery (b)		w/ Battery (c)		Antenna (1)		Antenna (2)		Antenna (3)						
1.1 cm		1.1 cm		1.1 cm		1.9 cm		1.7 cm		1.7 cm						

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. For body-worn configuration, battery "a" was selected as the default* battery.
2. When the body SAR of an antenna is ≤ 3.5 W/kg (B7-B12), testing of all other required channels is not necessary for that antenna.
3. When the SAR for all antennas tested using the thinnest* battery is ≤ 4.0 W/kg (B7-B12), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B13-B16).
4. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
5. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 0704110WD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 5			BODY-WORN SAR EVALUATION RESULTS														
Device-Under-Test			P5500 PTT Radio Transceiver (System)														
BODY-WORN ACCESSORY ID #			4 (Additional) Swivel Mount (KRY 101 1608/2) & Belt Loop (KRY 101 1609/1)														
AUDIO ACCESSORY ID #			G4 (Default) Explorer Headset w/PTT (EA-009580-007)														
Test Date(s)			July 6 & 7, 2011														
C			1	2	3	4	5	6									
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g								
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS									
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f								
				Drift (dB)	50%+droop	Drift dB	50%+droop	Drift dB	50%+droop								
1	1 (1223/01)	806.0125	3.16	N/A		N/A		N/A									
2		823.9875	3.16	B17	1.84	0.920	N/A		N/A								
3					-0.348	0.997											
4		851.0125	3.16	N/A		N/A		N/A									
5		868.9875	3.16	B18	1.79	0.895	B25	1.89	0.945	B26	1.87	0.935					
6					-0.549	1.02		-0.284	1.01		-0.239	0.988					
7	2 (1506/1)	806.0125	3.16	N/A		N/A		N/A									
8		823.9875	3.16	B19	1.84	0.920	N/A		N/A								
9					-0.088	0.939											
10		851.0125	3.16	N/A		N/A		N/A									
11		868.9875	3.16	B20	1.26	0.630	N/A		N/A								
12					-0.346	0.682											
13	3 (1506/2)	806.0125	3.16	N/A		N/A		N/A									
14		823.9875	3.16	B21	2.39	1.20	B23	2.65	1.34	B24	3.50	1.75					
15					-0.137	1.23		-0.115	1.36		-0.131	1.80					
16		851.0125	3.16	N/A		N/A		N/A									
17		868.9875	3.16	B22	1.57	0.785	N/A		N/A								
18					-0.703	0.923											
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY									
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled									
Notes																	
C = Column; R = Row				B17-B26 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A													
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom													
Back Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)												
w/ Battery (a)		w/ Battery (b)		w/ Battery (c)		Antenna (1)		Antenna (2)									
3.0 cm		3.0 cm		3.0 cm		3.8 cm		3.6 cm									

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066		
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 23 of 242						

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. For body-worn configuration, battery "a" was selected as the default* battery.
2. When the body SAR of an antenna is ≤ 3.5 W/kg (B17-B22), testing of all other required channels is not necessary for that antenna.
3. When the SAR for all antennas tested using the thinnest* battery is ≤ 4.0 W/kg (B17-B22), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B23-B26).
4. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
5. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 6				BODY-WORN SAR EVALUATION RESULTS																	
Device-Under-Test				P5500 PTT Radio Transceiver (System)																	
BODY-WORN ACCESSORY ID #				3 (Additional) Leather Case w/D-rings (CC-023931-002) & Shoulder-Strap (CC103333V1)																	
AUDIO ACCESSORY ID #				G4 (Default) Explorer Headset w/PTT (EA-009580-007)																	
Test Date(s)				July 7, 2011																	
C				1	2	3	4	5	6												
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SARW/kg 1g	SAR W/kg 1g	SARW/kg 1g	SAR W/kg 1g	SARW/kg 1g												
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS													
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f												
1	1 (1223/01)	806.0125	3.16	N/A			N/A		N/A												
2		823.9875	3.16	B27	4.38	2.19	N/A		N/A												
3					0.102	N/A															
4		851.0125	3.16	N/A			N/A		N/A												
5		868.9875	3.16	B28	3.52	1.76	N/A		N/A												
6					-0.279	1.88															
7	2 (1506/1)	806.0125	3.16	N/A			N/A		N/A												
8		823.9875	3.16	B29	2.13	1.07	N/A		N/A												
9					-0.084	1.09															
10		851.0125	3.16	N/A			N/A		N/A												
11		868.9875	3.16	B30	1.31	0.655	N/A		N/A												
12					-0.141	0.677															
13	3 (1506/2)	806.0125	3.16	N/A			N/A		N/A												
14		823.9875	3.16	B31	4.67	2.34	B33	4.50	2.25	B34	4.74	2.37									
15					-0.189	2.44		-0.082	2.29		-0.162	2.46									
16		851.0125	3.16	N/A			N/A		N/A												
17		868.9875	3.16	B32	4.01	2.01	B35	3.62	1.81	B36	5.41	2.71									
18					-0.192	2.10		-0.159	1.88		-0.204	2.84									
SAR LIMITS				BODY			SPATIAL PEAK		RF EXPOSURE CATEGORY												
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg			1 gram average		Occupational / Controlled												
Notes																					
C = Column; R = Row				B27-B36 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A																	
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom																	
Back Side of DUT Distance to Planar Phantom (see Appendix D)						Closest Antenna Distance to Planar Phantom (see Appendix D)															
w/ Battery (a)		w/ Battery (b)		w/ Battery (c)		Antenna (1)		Antenna (2)		Antenna (3)											
1.2 cm		1.2 cm		1.2 cm		3.0 cm		2.9 cm		2.9 cm											

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])
1. For body-worn configuration, battery "a" was selected as the default* battery.
2. For body-worn accessories with similar construction and operating configurations, test only the body-worn accessory within the group that is expected to result in the highest SAR**.
3. When the body SAR of an antenna is ≤ 3.5 W/kg (B27-B32), testing of all other required channels is not necessary for that antenna.
4. When the SAR for all antennas tested using the thinnest* battery is ≤ 4.0 W/kg (B27-B32), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B33-B36).
5. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
6. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

** Body-worn accessory #3 and #9 are of similar construction and operating configuration; #3 was selected for the SAR evaluation based on preliminary evaluations of both accessory #3 and #9.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 242

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 7			BODY-WORN SAR EVALUATION RESULTS															
Device-Under-Test			P5500 PTT Radio Transceiver (System)															
BODY-WORN ACCESSORY ID #			2 (Additional) Leather Case Kit w/D-rings (CC-023931-004) & Belt Loop (KRY 101 1609/1)															
AUDIO ACCESSORY ID #			G4 (Default) Explorer Headset w/PTT (EA-009580-007)															
Test Date(s)			July 7, 2011															
C			1	2	3	4	5	6										
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g									
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS										
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f									
1			Drift (dB)	50%+droop	Drift dB	50%+droop	Drift dB	50%+droop										
1	1 (1223/01)	806.0125	3.16	N/A		N/A		N/A										
2		823.9875	3.16	B37	1.81	0.905	N/A		N/A									
3					-0.121	0.931												
4		851.0125	3.16	N/A		N/A		N/A										
5		868.9875	3.16	B38	1.28	0.640	N/A		N/A									
6					-0.396	0.701												
7	2 (1506/1)	806.0125	3.16	N/A		N/A		N/A										
8		823.9875	3.16	B39	1.22	0.610	N/A		N/A									
9					-0.168	0.634												
10		851.0125	3.16	N/A		N/A		N/A										
11		868.9875	3.16	B40	0.834	0.417	N/A		N/A									
12					0.243	N/A												
13	3 (1506/2)	806.0125	3.16	N/A		N/A		N/A										
14		823.9875	3.16	B41	2.16	1.08	B43	1.88	0.940	B44								
15					-0.405	1.19		-0.635	1.09									
16		851.0125	3.16	N/A		N/A		N/A										
17		868.9875	3.16	B42	1.64	0.820	B45	1.44	0.720	B46								
18					-0.206	0.860		-0.094	0.736									
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY										
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled										
Notes																		
C = Column; R = Row				B37-B46 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A														
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom														
Back Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)													
w/ Battery (a)	w/ Battery (b)	w/ Battery (c)	Antenna (1)		Antenna (2)		Antenna (3)											
4.0 cm	4.0 cm	4.0 cm	4.8 cm		4.6 cm		4.6 cm											

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066		
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 27 of 242						

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [6])

1. For body-worn configuration, battery "a" was selected as the default* battery.
2. When the body SAR of an antenna is ≤ 3.5 W/kg (B37-B42), testing of all other required channels is not necessary for that antenna.
3. When the SAR for all antennas tested using the thinnest* battery is ≤ 4.0 W/kg (B37-B42), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B43-B46).
4. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
5. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 0704110WD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 8				BODY-WORN SAR EVALUATION RESULTS											
Device-Under-Test			P5500 PTT Radio Transceiver (System)												
BODY-WORN ACCESSORY ID #			8 (Additional) BEE Leather Case Kit (CC-014528-003) & BEE Leather Belt Loop (CC-014527)												
AUDIO ACCESSORY ID #			G4 (Default) Explorer Headset w/PTT (EA-009580-007)												
Test Date(s)			July 8, 2011												
C			1	2	3	4	5	6							
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g						
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS							
				100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f						
Drift (dB)			Drift (dB)	50%+droop		Drift dB	50%+droop	Drift dB	50%+droop						
1	1 (1223/01)	806.0125	3.16	N/A			N/A		N/A						
2		823.9875	3.16	B47	1.66	0.830	N/A		N/A						
3					-0.259	0.881									
4		851.0125	3.16	N/A			N/A		N/A						
5		868.9875	3.16	B48	0.970	0.485	N/A		N/A						
6					-0.184	0.506									
7	2 (1506/1)	806.0125	3.16	N/A			N/A		N/A						
8		823.9875	3.16	B49	0.864	0.432	N/A		N/A						
9					-0.405	0.474									
10		851.0125	3.16	N/A			N/A		N/A						
11		868.9875	3.16	B50	0.648	0.324	N/A		N/A						
12					-0.122	0.333									
13	3 (1506/2)	806.0125	3.16	N/A			N/A		N/A						
14		823.9875	3.16	B51	2.38	1.19	B53	1.52	0.760 <th>B54</th> <td>1.95</td> <td>0.975</td>	B54	1.95	0.975			
15					-0.291	1.27		-0.136	0.784		-0.144	1.01			
16		851.0125	3.16	N/A			N/A		N/A						
17		868.9875	3.16	B52	1.17	0.585	B55	1.13	0.565	B56	1.35	0.675			
18					-0.233	0.617		-0.189	0.590		-0.165	0.701			
SAR LIMITS				BODY			SPATIAL PEAK		RF EXPOSURE CATEGORY						
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg		1 gram average		Occupational / Controlled						
Notes															
C = Column; R = Row				B47-B56 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A											
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom											
Back Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)										
w/ Battery (a)		w/ Battery (b)		w/ Battery (c)		Antenna (1)		Antenna (2)		Antenna (3)					
5.1 cm		5.1 cm		5.1 cm		5.9 cm		5.7 cm		5.7 cm					

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 242

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])
1. For body-worn configuration, battery "a" was selected as the default* battery.
2. For body-worn accessories with similar construction and operating configurations, test only the body-worn accessory within the group that is expected to result in the highest SAR**.
3. When the body SAR of an antenna is \leq 3.5 W/kg (B47-B52), testing of all other required channels is not necessary for that antenna.
4. When the SAR for all antennas tested using the thinnest* battery is \leq 4.0 W/kg (B47-B52), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B53-B56).
5. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
6. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

** Body-worn accessory #1 and #8 are of similar construction and operating configuration; #8 was selected for the SAR evaluation based on preliminary evaluations of both accessory #1 and #8.

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 0704110WD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

TABLE 9				BODY-WORN SAR EVALUATION RESULTS														
Device-Under-Test			P5500 PTT Radio Transceiver (System)															
BODY-WORN ACCESSORY ID #			7 (Additional) BEE Nylon Case Kit (CC-014534-002) & BEE Leather Belt Loop (CC-014527)															
AUDIO ACCESSORY ID #			G4 (Default) <i>Explorer Headset w/PTT (EA-009580-007)</i>															
Test Date(s)			July 7 & 8, 2011															
C			1	2	3	4	5	6										
R	Antenna Accessory ID #	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g	SAR W/kg 1g									
				Battery (a) - Ni-MH NIS		Battery (b) - Ni-MH IS		Battery (c) - Li-Ion NIS										
1	(1223/01)	806.0125	3.16	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f									
				Drift (dB)		Drift dB		Drift dB										
				50%+droop		50%+droop		50%+droop										
2	(1506/1)	823.9875	3.16	N/A		N/A		N/A										
3				B57	1.93	0.965	N/A		N/A									
4					-0.259	1.02												
5				B58	2.00	1.00	N/A		N/A									
6					-0.179	1.04												
7	(1506/1)	868.9875	3.16	806.0125	N/A		N/A		N/A									
8				B59	0.712	0.356	N/A		N/A									
9					-0.428	0.393												
10				851.0125	N/A		N/A		N/A									
11				B60	0.568	0.284	N/A		N/A									
12					-0.100	0.291												
13	(1506/2)	868.9875	3.16	806.0125	N/A		N/A		N/A									
14				B61	1.87	0.935	B63	2.15	1.08	B64	2.12	1.06						
15					-0.207	0.981		0.005	N/A		-0.066	1.08						
16				851.0125	N/A		N/A		N/A		N/A							
17				B62	2.29	1.15	B65	2.17	1.09	B66	2.17	1.09						
18					-0.174	1.19		-0.142	1.12		-0.170	1.13						
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY										
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled										
Notes																		
C = Column; R = Row				B57-B66 (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A														
Test Mode = CW (Unmodulated Continuous Wave)				Phantom = Barski Planar Phantom														
Back Side of DUT Distance to Planar Phantom (see Appendix D)					Closest Antenna Distance to Planar Phantom (see Appendix D)													
w/ Battery (a)	w/ Battery (b)	w/ Battery (c)	Antenna (1)		Antenna (2)		Antenna (3)											
4.4 cm	4.4 cm	4.4 cm	5.2 cm		5.0 cm		5.0 cm											

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066		
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 31 of 242						

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. For body-worn configuration, battery "a" was selected as the default* battery.
2. For body-worn accessories with similar construction and operating configurations, test only the body-worn accessory within the group that is expected to result in the highest SAR**.
3. When the body SAR of an antenna is ≤ 3.5 W/kg (B57-B62), testing of all other required channels is not necessary for that antenna.
4. When the SAR for all antennas tested using the thinnest* battery is ≤ 4.0 W/kg (B57-B62), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (B63-B66).
5. The audio accessory G4 was selected as the default audio accessory based on preliminary evaluations resulting in the most conservative SAR of all the disclosed audio accessory options.
6. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

** Body-worn accessory #5 and #7 are of similar construction and operating configuration; #7 was selected for the SAR evaluation based on preliminary evaluations of both accessory #5 and #7.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
0704110WD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



SAR MEASUREMENT SUMMARY (CONT.)

TABLE 10		BODY-WORN SAR EVALUATION RESULTS							
		REMAINING DEFAULT AUDIO ACCESSORIES BY GROUPING							
Device-Under-Test		P5500 PTT Radio Transceiver (System)							
BODY-WORN ACCESSORY ID #		3 (Additional) Leather Case w/D-rings (CC-023931-002) & Shoulder-Strap (CC103333V1)							
Test Date(s)		July 11 & 12, 2011							
C	R	Antenna Accessory ID #	Battery Accessory ID #	Audio Accessory ID #	Cond. Power Before Test (W)	Test Freq. (MHz)	1		
							2		
							1g SAR (W/kg)		
Plot #	SAR Drift dB	100% ptt d/f		50% ptt d/f		50%+droop	50%+droop		
		SAR Drift dB		50%+droop					
1	3 (1506/2)	c (Li-ion NIS)	G1a (EA-009580-010)	3.16	823.9875	A1	6.98		
2							3.49		
3				3.16	868.9875	A2	0.063		
4							N/A		
5	3 (1506/2)	c (Li-ion NIS)	G2 (EA-009580-008)	3.16	823.9875	A3	5.76		
6							2.88		
7				3.16	868.9875	A4	-0.043		
8							2.91		
9	3 (1506/2)	c (Li-ion NIS)	G3b (EA-009580-016)	3.16	823.9875	A5	6.44		
10							3.22		
11				3.16	868.9875	A6	-0.068		
12							3.27		
13	3 (1506/2)	c (Li-ion NIS)	G5 (EA-009580-011)	3.16	823.9875	A7	4.37		
14							2.19		
15				3.16	868.9875	A8	-0.271		
16							2.33		
17	3 (1506/2)	c (Li-ion NIS)	G6b (EA-009580-018)	3.16	823.9875	A9	8.00		
18							4.00		
19				3.16	868.9875	A10	0.000		
20							N/A		
21	3 (1506/2)	c (Li-ion NIS)	G7a (MC-023933-001)	3.16	823.9875	A11	6.16		
22							3.08		
23				3.16	868.9875	A12	-0.015		
24							3.09		
25	3 (1506/2)	c (Li-ion NIS)	G8a (EA-009580-003)	3.16	823.9875	A13	6.71		
26							3.36		
27				3.16	868.9875	A14	0.042		
28							N/A		
29	3 (1506/2)	c (Li-ion NIS)	G9a (EA-009580-005)	3.16	823.9875	A15	5.34		
30							2.67		
31				3.16	868.9875	A16	0.014		
32							N/A		
33	3 (1506/2)	c (Li-ion NIS)	G10 (EA-009580-012)	3.16	823.9875	A17	5.90		
34							2.95		
35				3.16	868.9875	A18	0.017		
36							N/A		
37	3 (1506/2)	c (Li-ion NIS)	G11b (EA-009580-015)	3.16	823.9875	A19	4.72		
38							2.36		
39				3.16	868.9875	A20	-0.058		
40							2.39		
41	3 (1506/2)	c (Li-ion NIS)	G12b (EA-009580-001)	3.16	823.9875	A21	6.45		
42							3.23		
43				3.16	868.9875	A22	-0.037		
44							3.25		

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 33 of 242

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

SAR MEASUREMENT SUMMARY (CONT.)

Test Procedures applied in accordance with FCC KDB 643646 (see reference [9])

1. The audio accessories selected are the default accessories per audio accessory grouping.
2. The antenna was selected based on the maximum SAR level configuration from the body-worn evaluations.
3. The battery was selected based on the maximum SAR level configuration from the body-worn evaluations.
4. The body-worn accessory was selected based on the maximum SAR level configuration from the body-worn evaluations.
5. For the audio accessories that have not been tested in the body-worn accessories test sequences in the previous section, the highest SAR for an antenna, body-worn accessory and battery combination tested in the body-worn accessories sequences applicable to an audio accessory is used to determine SAR test requirements according to the following: A) ≤ 4.0 W/kg, SAR tests for that audio accessory is not necessary (A1-A22).
6. SAR evaluations for the remaining audio accessories within each grouping were not required based on the SAR levels from the default audio accessories per audio accessory grouping were not > 7.0 W/kg.

* All battery options are the same thickness; therefore preliminary evaluations were performed to establish the default battery.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 242

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

11.0 SAR SCALING (TUNE-UP TOLERANCE)

MAX. SAR LEVELS SCALED TO HARRIS MAXIMUM TOLERANCE SPECIFICATION									
Test Config.	DUT	Freq. (MHz)	Antenna Acc. ID #	Battery Type	Conducted Power (W) Before Test	SAR Level 1g (50% PTT d/f)		Scaling up to 3.23 W (+ .09 dB)	Scaled SAR (50% PTT d/f) 1g (W/kg)
						W/kg	Plot		
Face-held	P5500	823.9875	3 (1506/2)	NiMH NIS	3.16	2.44	F5	+ 0.09 dB	2.49
Face-held	P5500	868.9875	3 (1506/2)	NiMH IS	3.16	1.96	F9	+ 0.10 dB	2.04
Body-worn	P5500	823.9875	3 (1506/2)	Li-ion NIS	3.16	4.00	A5	+ 0.09 dB	4.08
Body-worn	P5500	868.9875	3 (1506/2)	Li-ion NIS	3.16	6.43	A10	+ 0.10 dB	3.40
SAR LIMITS				BODY	SPATIAL PEAK		RF EXPOSURE CATEGORY		
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg	1 gram average		Occupational / Controlled		

Note(s):

1. The maximum SAR levels per frequency split and Head/Body configuration are reported in the above table.
2. The upper power tolerance level reported is the specification provided by Harris Corporation.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 35 of 242

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

12.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6) c) (see reference [8]).
2. The DUT was evaluated for SAR in accordance with the procedures described in FCC KDB 643646 (see reference [9]).
3. The SAR evaluations were performed with a fully charged battery.
4. The SAR droop of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables. A SAR-versus-Time power droop evaluation was performed (see Appendix A).
5. The fluid temperature remained within +/-2°C from the fluid dielectric parameter measurement to the completion of each SAR test.
6. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
7. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

13.0 SAR EVALUATION PROCEDURES

- a.
 - (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 - (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies \geq 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 36 of 242


14.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, system checks were performed with a planar phantom and 835 MHz SPEAG dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.					
Jul 05	Head 835	2.35 ±10%	2.31	-1.7%	41.5 ±5%	43.4	+4.6%	0.90 ±5%	0.90	0.0%	1000	24.0	23.2	≥ 15	29	101.1
Jul 06	Body 835	2.49 ±10%	2.41	-3.2%	55.2 ±5%	53.7	-2.7%	0.97 ±5%	0.97	-1.0%	1000	24.0	22.2	≥ 15	31	101.1
Jul 11	Body 835	2.49 ±10%	2.52	+1.2%	55.2 ±5%	54.5	-1.3%	0.97 ±5%	0.97	0.0%	1000	23.0	21.5	≥ 15	35	101.1

Notes	1.	The target SAR values are the measured values from the dipole calibration performed by SPEAG (see Appendix E).
	2.	The target dielectric parameters are the nominal values from the dipole calibration performed by SPEAG (see Appendix E).
	3.	The fluid temperature remained within +/-2°C from the fluid dielectric parameter measurement to the completion of the system performance check.
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
	5.	<p>System Performance Checks were not performed for each SAR evaluation test date based on compliance with the following provision per TCBC Workshop Presentation April 5-7, 2011 (Kwok Chan Presentation File 04-06-2011-FCC 4 RF Exposure Guidance 040611- KC):</p> <p><u>SAR System Verification</u></p> <p>when head and body tissue dielectric parameters are required to test a device, separate SAR system verifications are required</p> <ul style="list-style-type: none"> - daily verification of each liquid is usually not necessary when liquid parameter tolerances are maintained in a controlled environment - typically every few days is sufficient or when liquid is changed

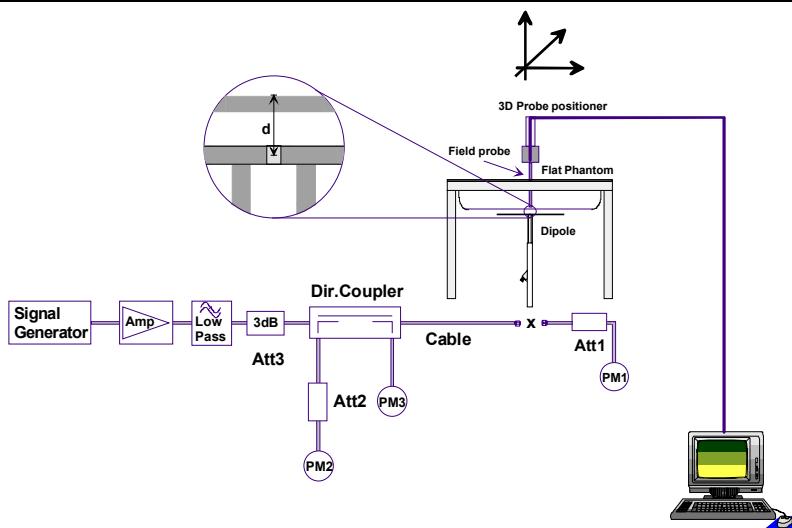

System Performance Check Measurement Setup Diagram (IEEE 1528-2003)

835 MHz SPEAG Validation Dipole Setup

	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

15.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [11] and [12]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES					
INGREDIENT	Water	835 MHz Head Tissue Mixture	40.71 %	835 MHz Body Tissue Mixture	53.79 %
	Sugar		56.63 %		45.13 %
	Salt		1.48 %		0.98 %
	HEC		0.99 %		--
	Bactericide		0.19 %		0.10 %

16.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
	Spatial Average (averaged over the whole body)	0.08 W/kg	0.4 W/kg
	Spatial Peak (averaged over any 1 g of tissue)	1.6 W/kg	8.0 W/kg
	Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.						Page 38 of 242



Date(s) of Evaluation
July 05-08, 11-12, 2011

Test Report Serial No.
0704110WD-T1108-S90P

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
October 05, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

17.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 3 GHz)
<u>Phantom</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ± 0.1 mm
Volume	Approx. 25 liters
<u>Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglass
Bottom Thickness	$2.0 \text{ mm} \pm 0.1 \text{ mm}$
Inner Dimensions	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
<u>Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ± 0.1 mm
Volume	Approx. 70 liters

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 39 of 242					

18.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges
Calibration:	PEEK enclosure material (resistant to organic solvents, glycol) In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy \pm 8%)
Frequency:	10 MHz to > 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone



ET3DV6 E-Field Probe

19.0 SAM TWIN PHANTOM V4.0C


The SAM Twin Phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix H for specifications of the SAM Twin Phantom V4.0C).



SAM Twin Phantom V4.0C

20.0 SIDE PLANAR PHANTOM

The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.

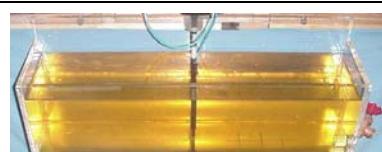

Plexiglas Side Planar Phantom

21.0 BARSKI PLANAR PHANTOM

The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom is used for DUT SAR evaluations and system performance check evaluations. See Appendix G for dimensions and specifications of the Barski Planar Phantom.



Barski Planar Phantom

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		

 Celltech Testing and Engineering Services Ltd.	Date(s) of Evaluation July 05-08, 11-12, 2011	Test Report Serial No. 070411OWD-T1108-S90P	Test Report Revision No. Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date October 05, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

22.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.	
	Device Holder

23.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	22Jun11	Annual
x	-D835V2 Validation Dipole	00217	4d075	20Apr09	Triennial
x	Side Planar Phantom	00156	161	CNR	CNR
x	Barski Planar Phantom	00155	03-01	CNR	CNR
x	SPEAG SAM Twin Phantom V4.0C	00154	1033	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 41 of 242

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

24.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION

SAR dipoles calibrated less than two years ago but more than one year ago were confirmed by maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5Ω from prior calibration) requirements per extended calibrations in FCC KDB 450824 (see reference [10]).

SPEAG D835V3 SN: 4d075						
Date of Measurement	Frequency	Fluid Type	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
Apr. 20, 2009	835 MHz	Head	-29.1	-	51.8	-
Jun. 29, 2011			-27.3	-6.2%	48.6	-3.2
Apr. 20, 2009	835 MHz	Body	-26.7	-	48.0	-
Apr. 20, 2011			-24.0	10.1%	51.3	3.3

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver			Model:	P5500 (800)	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 242

 Celltech <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

25.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION

Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (835 MHz)	E.2.1	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	4.12	Normal	1	0.64	0.43	2.6	1.8	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	4.71	Normal	1	0.6	0.49	2.8	2.3	∞
Combined Standard Uncertainty				RSS			11.31	10.88	
Expanded Uncertainty (95% Confidence Interval)				k=2			22.61	21.77	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

26.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [9] Federal Communications Commission, Office of Engineering and Technology - "SAR Test Reduction Considerations for Occupational PTT Radios", KDB 643646 D01v01r01: April 2011.
- [10] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [12] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [13] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [14] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [15] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 2: June 2007.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver		Model:	P5500 (800)	806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 44 of 242

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 158 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 07/05/2011

System Performance Check - 835 MHz Dipole - Head

DUT: Dipole D835V2; Asset: 00217; Serial: 411; Calibration: 04/20/2009

Ambient Temp: 24.0°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 29%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 43.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.5, 6.5, 6.5); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 835 MHz Dipole

Head d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.41 mW/g


Head d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.8 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.52 mW/g

Maximum value of SAR (measured) = 2.50 mW/g

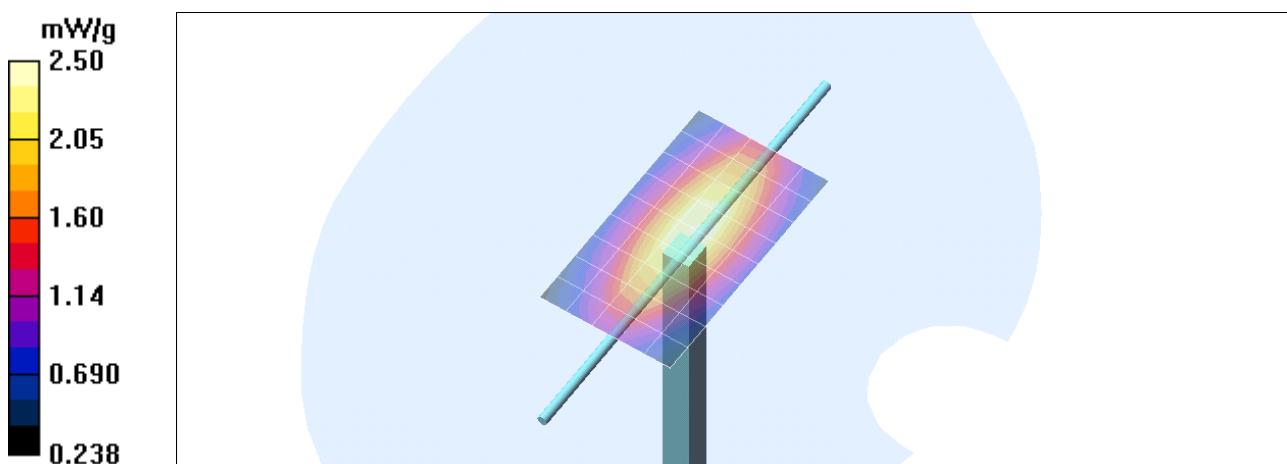


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

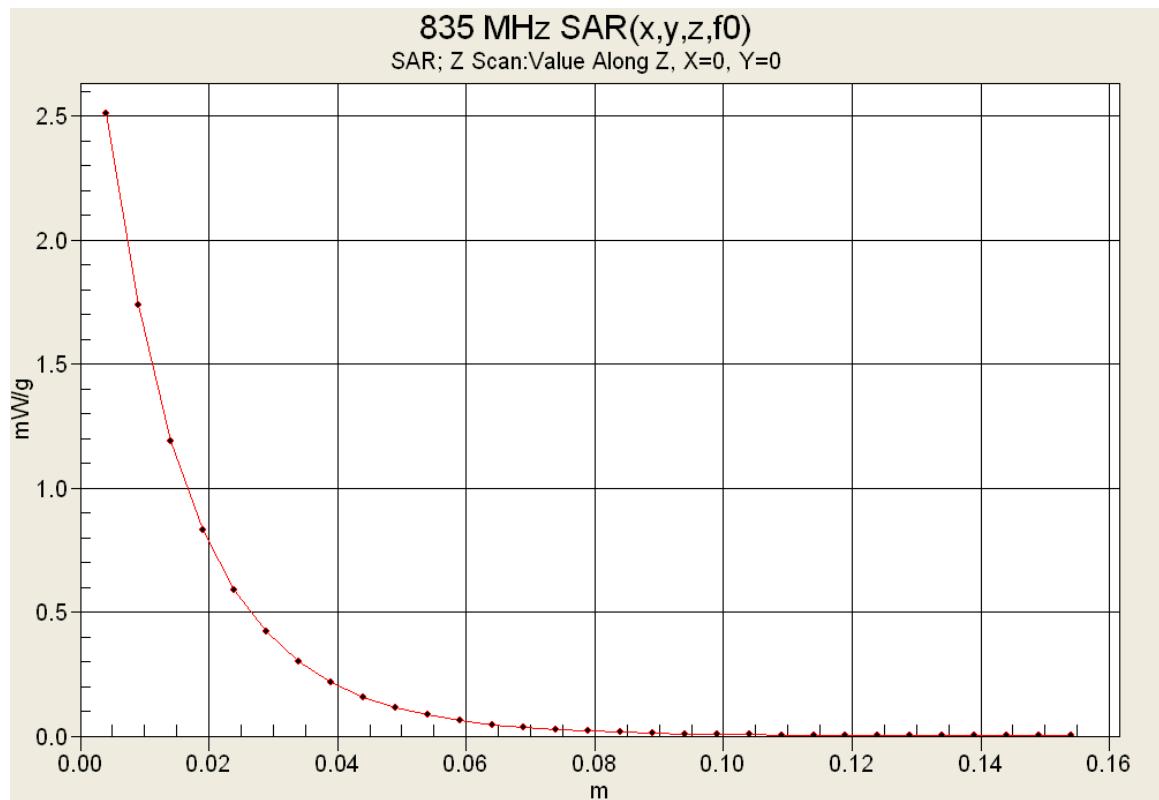

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	 HARRIS
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 160 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 07/06/2011

System Performance Check - 835 MHz Dipole - Body

DUT: Dipole D835V2; Asset: 00217; Serial: 411; Calibration: 04/20/2009

Ambient Temp: 24.0°C; Fluid Temp: 22.2°C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 835 MHz Dipole

Body d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.58 mW/g


Body d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.1 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.62 mW/g

Maximum value of SAR (measured) = 2.60 mW/g

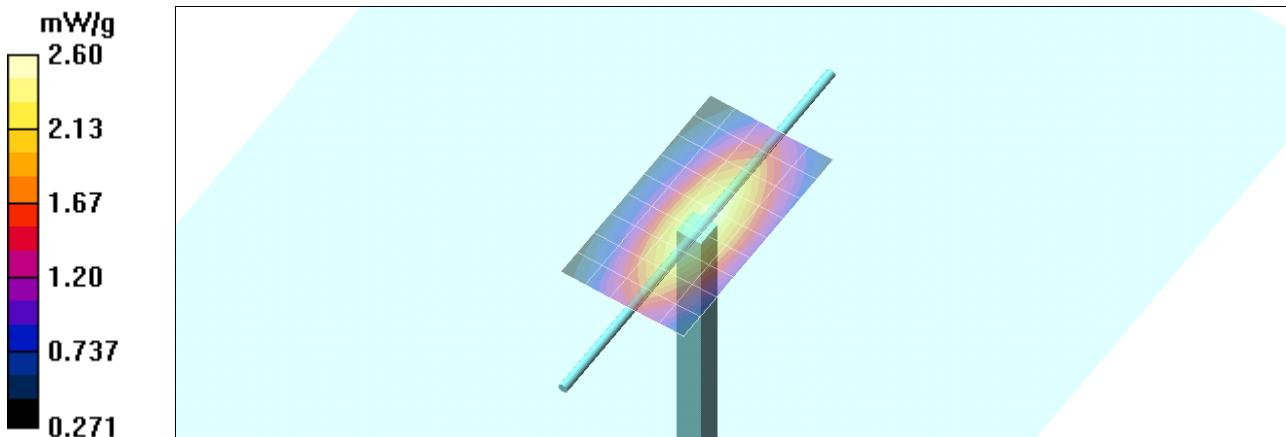


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 161 of 242

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

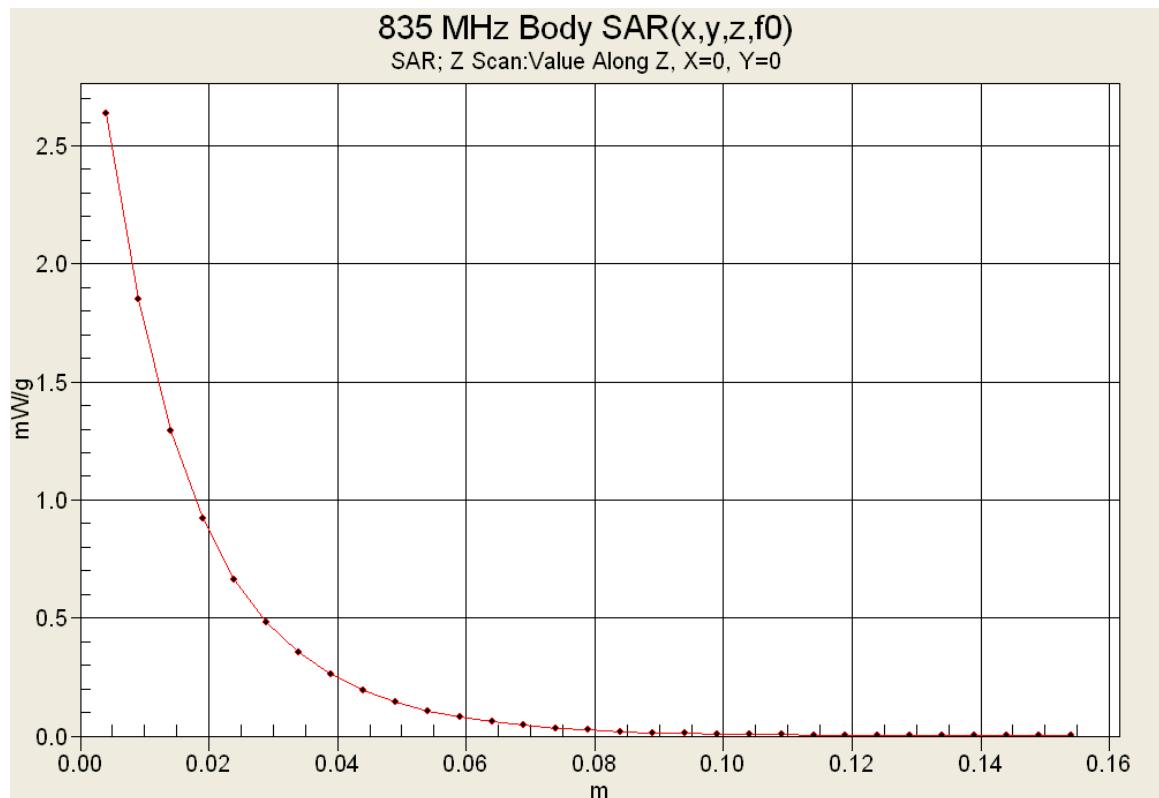

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	 HARRIS
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 162 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 07/11/2011

System Performance Check - 835 MHz Dipole - Body

DUT: Dipole D835V2; Asset: 00217; Serial: 411; Calibration: 04/20/2009

Ambient Temp: 23°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 835 MHz Dipole

Body d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.71 mW/g


Body d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 3.55 W/kg

SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.73 mW/g

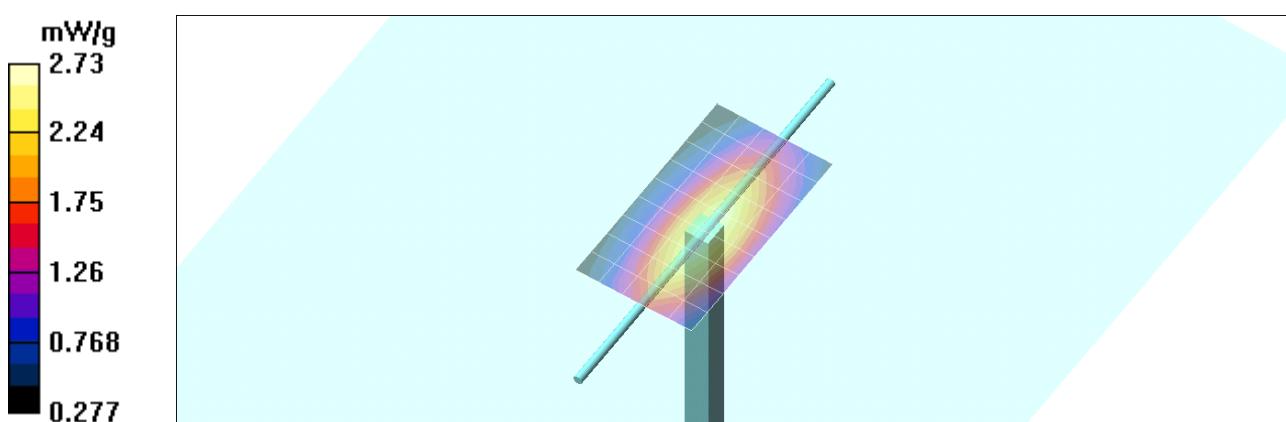


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 163 of 242

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

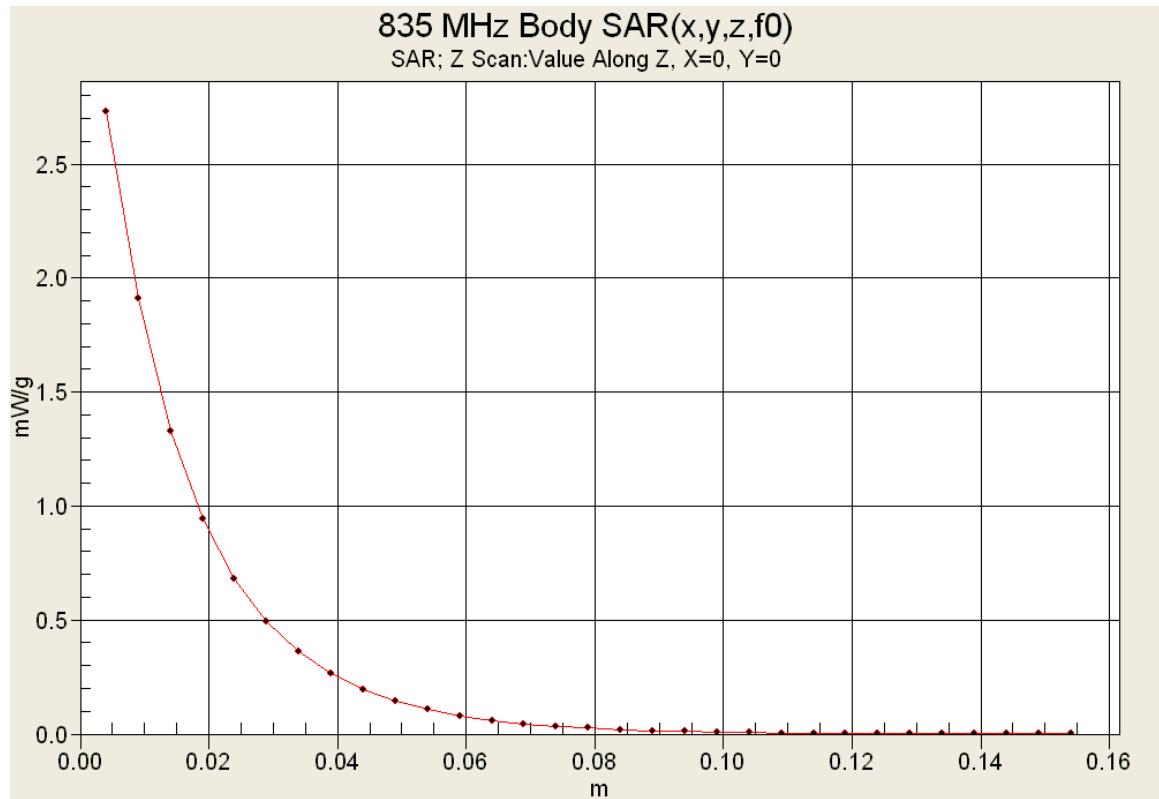

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E	IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz		

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 165 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

835 MHz Head

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

05/Jul/2011

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.7350	42.02	0.89	44.07	0.79
0.7450	41.97	0.89	43.88	0.80
0.7550	41.92	0.89	43.74	0.81
0.7650	41.86	0.89	43.75	0.82
0.7750	41.81	0.90	43.62	0.84
0.7850	41.76	0.90	43.27	0.85
0.7950	41.71	0.90	43.38	0.86
0.8050	41.66	0.90	43.22	0.86
0.8150	41.60	0.90	42.90	0.87
0.8250	41.55	0.90	43.00	0.89
0.8350	41.50	0.90	43.35	0.90
0.8450	41.50	0.91	42.73	0.91
0.8550	41.50	0.92	42.59	0.91
0.8650	41.50	0.93	42.61	0.92
0.8750	41.50	0.94	42.43	0.92
0.8850	41.50	0.95	42.32	0.95
0.8950	41.50	0.96	42.35	0.96
0.9050	41.50	0.97	41.80	0.97
0.9150	41.50	0.98	42.07	0.98
0.9250	41.48	0.98	41.93	0.98
0.9350	41.46	0.99	41.90	1.00

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 166 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

835 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

06/Jul/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	54.59	0.85
0.7450	55.55	0.96	54.67	0.85
0.7550	55.51	0.96	54.62	0.87
0.7650	55.47	0.96	54.23	0.87
0.7750	55.43	0.97	54.27	0.88
0.7850	55.39	0.97	54.39	0.89
0.7950	55.36	0.97	54.21	0.90
0.8050	55.32	0.97	53.93	0.92
0.8150	55.28	0.97	53.73	0.92
0.8250	55.24	0.97	53.90	0.94
0.8350	55.20	0.97	53.69	0.96
0.8450	55.17	0.98	53.68	0.95
0.8550	55.14	0.99	53.79	0.96
0.8650	55.11	1.01	53.94	0.98
0.8750	55.08	1.02	53.74	0.98
0.8850	55.05	1.03	53.68	1.00
0.8950	55.02	1.04	53.54	1.00
0.9050	55.00	1.05	53.62	1.01
0.9150	55.00	1.06	52.99	1.04
0.9250	54.98	1.06	52.74	1.04
0.9350	54.96	1.07	53.17	1.07

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 167 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

835 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

07/Jul/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	55.25	0.86
0.7450	55.55	0.96	54.87	0.87
0.7550	55.51	0.96	54.69	0.87
0.7650	55.47	0.96	54.86	0.88
0.7750	55.43	0.97	54.65	0.89
0.7850	55.39	0.97	54.57	0.89
0.7950	55.36	0.97	54.55	0.91
0.8050	55.32	0.97	54.24	0.90
0.8150	55.28	0.97	54.20	0.93
0.8250	55.24	0.97	54.32	0.93
0.8350	55.20	0.97	54.27	0.95
0.8450	55.17	0.98	54.32	0.96
0.8550	55.14	0.99	54.09	0.97
0.8650	55.11	1.01	53.82	0.98
0.8750	55.08	1.02	53.71	0.99
0.8850	55.05	1.03	53.74	1.00
0.8950	55.02	1.04	53.39	1.01
0.9050	55.00	1.05	53.43	1.02
0.9150	55.00	1.06	53.29	1.02
0.9250	54.98	1.06	53.56	1.04
0.9350	54.96	1.07	53.25	1.04

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 168 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA  ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

835 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

08/Jul/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	55.22	0.88
0.7450	55.55	0.96	55.10	0.87
0.7550	55.51	0.96	55.29	0.88
0.7650	55.47	0.96	55.09	0.89
0.7750	55.43	0.97	54.82	0.91
0.7850	55.39	0.97	54.79	0.91
0.7950	55.36	0.97	54.92	0.94
0.8050	55.32	0.97	54.79	0.94
0.8150	55.28	0.97	54.87	0.94
0.8250	55.24	0.97	54.63	0.97
0.8350	55.20	0.97	54.54	0.97
0.8450	55.17	0.98	54.41	0.99
0.8550	55.14	0.99	54.33	1.00
0.8650	55.11	1.01	54.29	1.00
0.8750	55.08	1.02	54.11	1.01
0.8850	55.05	1.03	53.81	1.04
0.8950	55.02	1.04	54.16	1.03
0.9050	55.00	1.05	53.66	1.05
0.9150	55.00	1.06	53.35	1.06
0.9250	54.98	1.06	53.46	1.05
0.9350	54.96	1.07	53.54	1.07

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 169 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

835 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

11/Jul/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	55.58	0.87
0.7450	55.55	0.96	55.24	0.88
0.7550	55.51	0.96	55.02	0.89
0.7650	55.47	0.96	54.89	0.90
0.7750	55.43	0.97	54.84	0.90
0.7850	55.39	0.97	54.99	0.93
0.7950	55.36	0.97	54.78	0.94
0.8050	55.32	0.97	54.51	0.95
0.8150	55.28	0.97	54.64	0.95
0.8250	55.24	0.97	54.33	0.97
0.8350	55.20	0.97	54.53	0.97
0.8450	55.17	0.98	54.10	0.99
0.8550	55.14	0.99	54.19	0.99
0.8650	55.11	1.01	53.99	1.00
0.8750	55.08	1.02	53.67	1.00
0.8850	55.05	1.03	53.72	1.01
0.8950	55.02	1.04	53.75	1.04
0.9050	55.00	1.05	53.46	1.04
0.9150	55.00	1.06	53.22	1.05
0.9250	54.98	1.06	53.24	1.06
0.9350	54.96	1.07	53.17	1.06

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 170 of 242

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 0704110WD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

835 MHz Body

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

12/Jul/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	53.93	0.85
0.7450	55.55	0.96	53.89	0.86
0.7550	55.51	0.96	53.63	0.85
0.7650	55.47	0.96	54.04	0.88
0.7750	55.43	0.97	53.57	0.88
0.7850	55.39	0.97	53.36	0.90
0.7950	55.36	0.97	53.29	0.89
0.8050	55.32	0.97	53.34	0.92
0.8150	55.28	0.97	53.19	0.93
0.8250	55.24	0.97	52.95	0.93
0.8350	55.20	0.97	53.16	0.94
0.8450	55.17	0.98	53.12	0.94
0.8550	55.14	0.99	52.87	0.96
0.8650	55.11	1.01	52.54	0.97
0.8750	55.08	1.02	52.71	0.99
0.8850	55.05	1.03	52.39	1.00
0.8950	55.02	1.04	52.30	1.01
0.9050	55.00	1.05	52.42	1.01
0.9150	55.00	1.06	52.20	1.02
0.9250	54.98	1.06	52.49	1.03
0.9350	54.96	1.07	52.19	1.03

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)		806-824 / 851-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 171 of 242

 Celltech Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX E - DIPOLE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 238 of 242



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D835V2-4d075_Apr09**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d075**

Calibration procedure(s) **QA CAL-05.v7**
Calibration procedure for dipole validation kits

Calibration date: **April 20, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: April 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TS	tissue simulating liquid
ConvF	sensitivity in TS / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TS:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TS parameters:* The measured TS parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.1 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature during test	(22.1 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 mW / g
SAR normalized	normalized to 1W	9.40 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.46 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.54 mW / g
SAR normalized	normalized to 1W	6.16 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.19 mW / g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature during test	(22.1 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.49 mW / g
SAR normalized	normalized to 1W	9.96 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.61 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.64 mW / g
SAR normalized	normalized to 1W	6.56 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.39 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 3.1 $j\Omega$
Return Loss	- 29.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.0 Ω - 4.1 $j\Omega$
Return Loss	- 26.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.401 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 09, 2007

DASY5 Validation Report for Head TSL

Date/Time: 14.04.2009 11:20:38

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d075

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.97, 5.97, 5.97); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin=250mW; dip=15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.74 mW/g

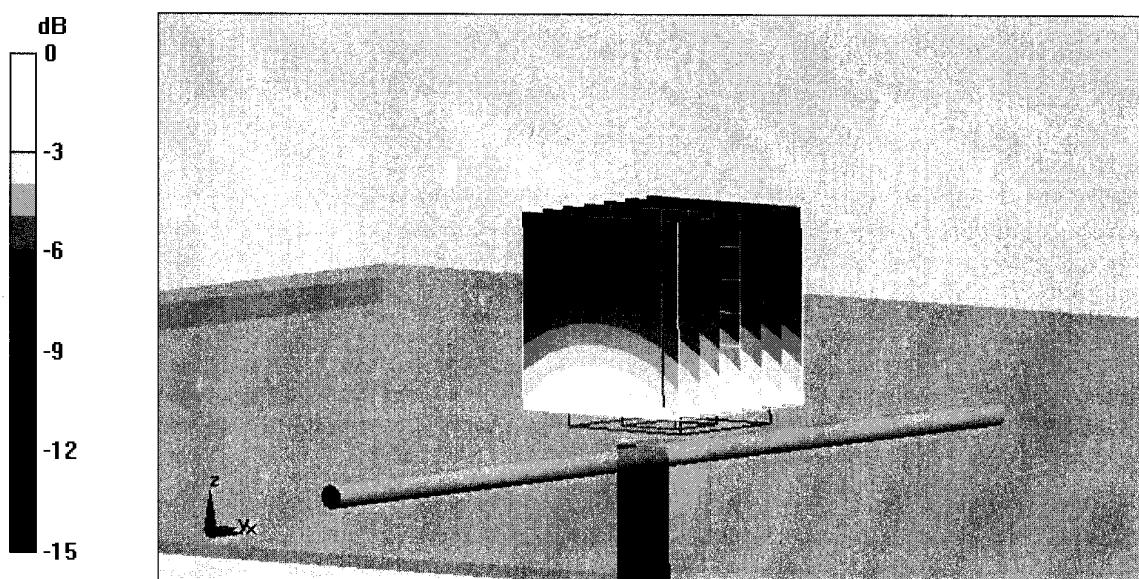

0 dB = 2.74mW/g


Impedance Measurement Plot for Head TSL

14 Apr 2009 09:17:58
CH1 S11 1 U FS 1: 51.762 Ω -3.1074 Ω 61.339 pF 835.000 000 MHz

*
Del
Cor

Avg
16

↑

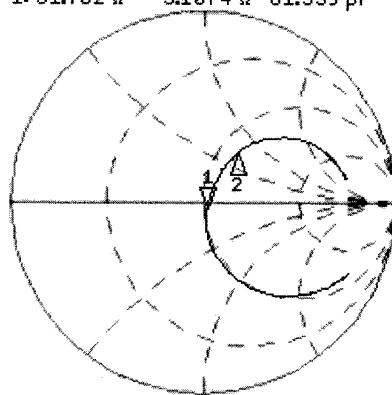


CH1 Markers
2: 60.352 Ω
33.270 Ω
900.000 MHz

CH2 S11 LOG 5 dB/ REF -20 dB 1:-29.100 dB 835.000 000 MHz

Cor

Avg
16

↑

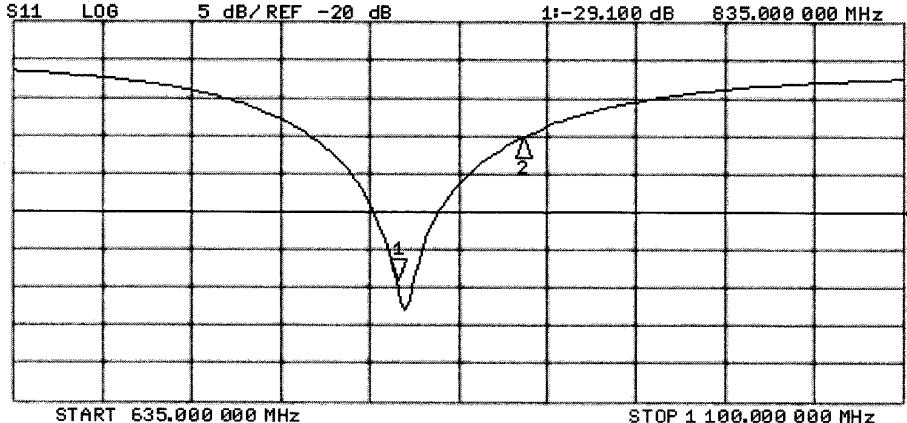

CH2 Markers
2:-10.391 dB
900.000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 20.04.2009 09:57:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d075

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.9, 5.9, 5.9); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m; Power Drift = -0.00173 dB

Peak SAR (extrapolated) = 3.61 W/kg


SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 2.9 mW/g

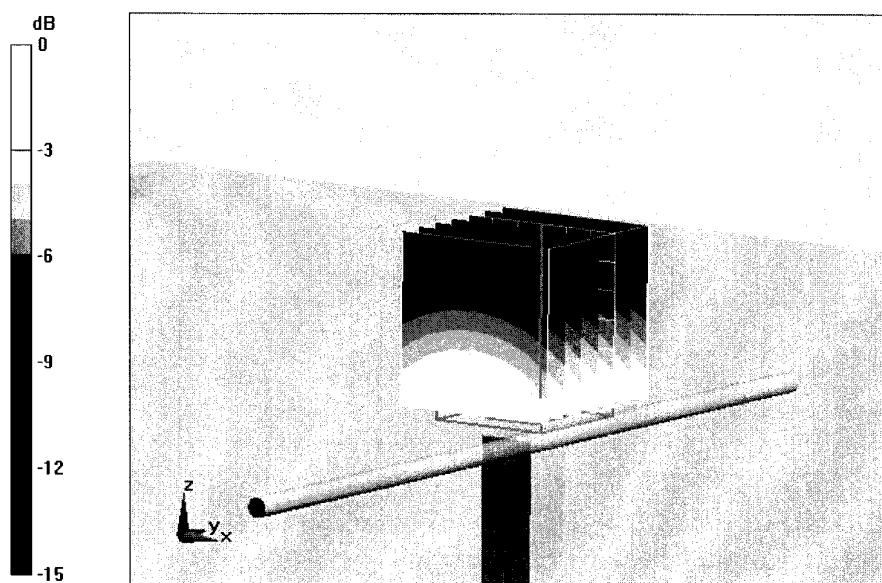

0 dB = 2.9mW/g

Impedance Measurement Plot for Body TSL

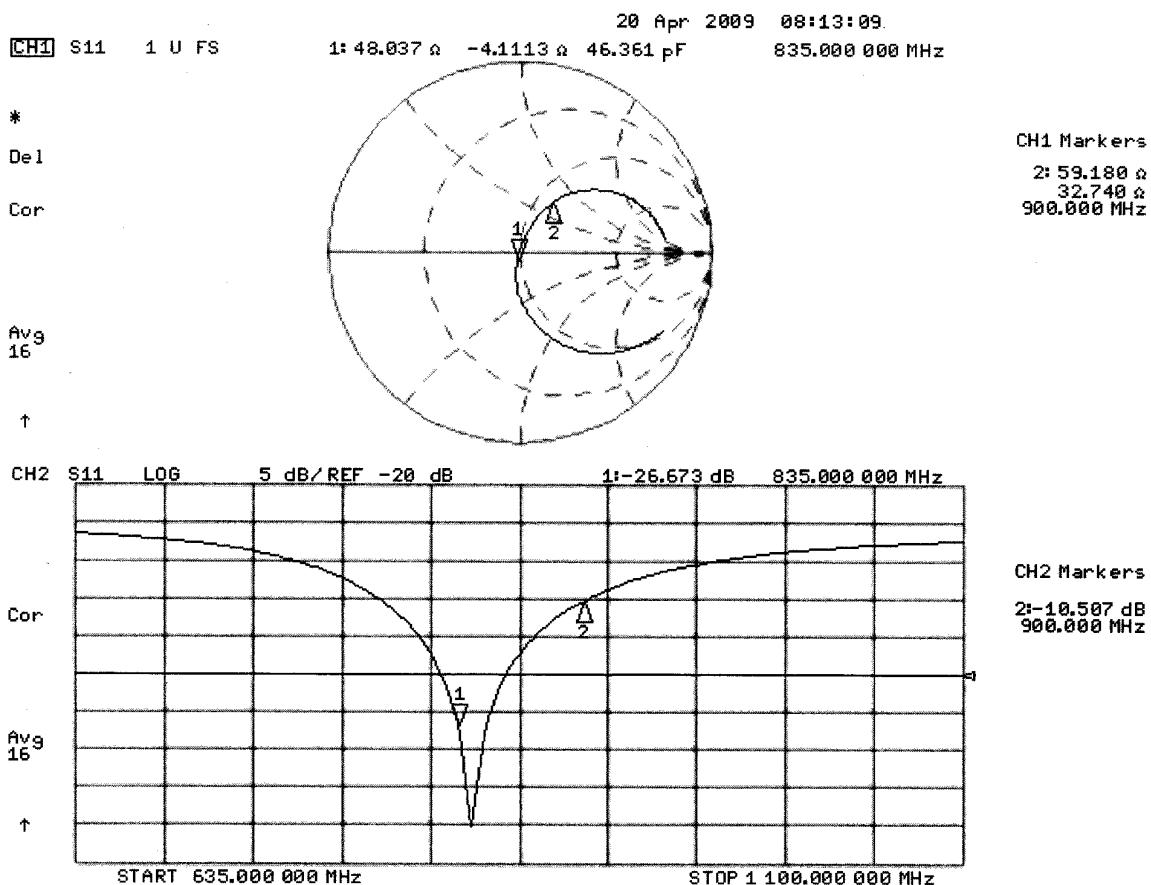

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX F - PROBE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 239 of 242

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590_Jun11**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4**
 Calibration procedure for dosimetric E-field probes

Calibration date: **June 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM x,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORM x,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORMx,y,z$ are only intermediate values, i.e., the uncertainties of $NORMx,y,z$ does not affect the E^2 -field uncertainty inside TSL (see below $ConvF$).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of $ConvF$.
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z$: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORMx,y,z * ConvF$ whereby the uncertainty corresponds to that given for $ConvF$. A frequency dependent $ConvF$ is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Calibrated: June 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μ V/(V/m) ²) ^A	1.93	2.00	1.66	\pm 10.1 %
DCP (mV) ^B	96.0	98.7	88.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	104.2	\pm 2.7 %
			Y	0.00	0.00	1.00	117.7	
			Z	0.00	0.00	1.00	129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.30	7.30	7.30	0.18	2.10	± 13.4 %
835	41.5	0.90	6.50	6.50	6.50	0.38	2.55	± 12.0 %
900	41.5	0.97	6.39	6.39	6.39	0.39	2.47	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1590

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.82	7.82	7.82	0.12	2.04	± 13.4 %
835	55.2	0.97	6.37	6.37	6.37	0.42	2.33	± 12.0 %
900	55.0	1.05	6.27	6.27	6.27	0.40	2.45	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

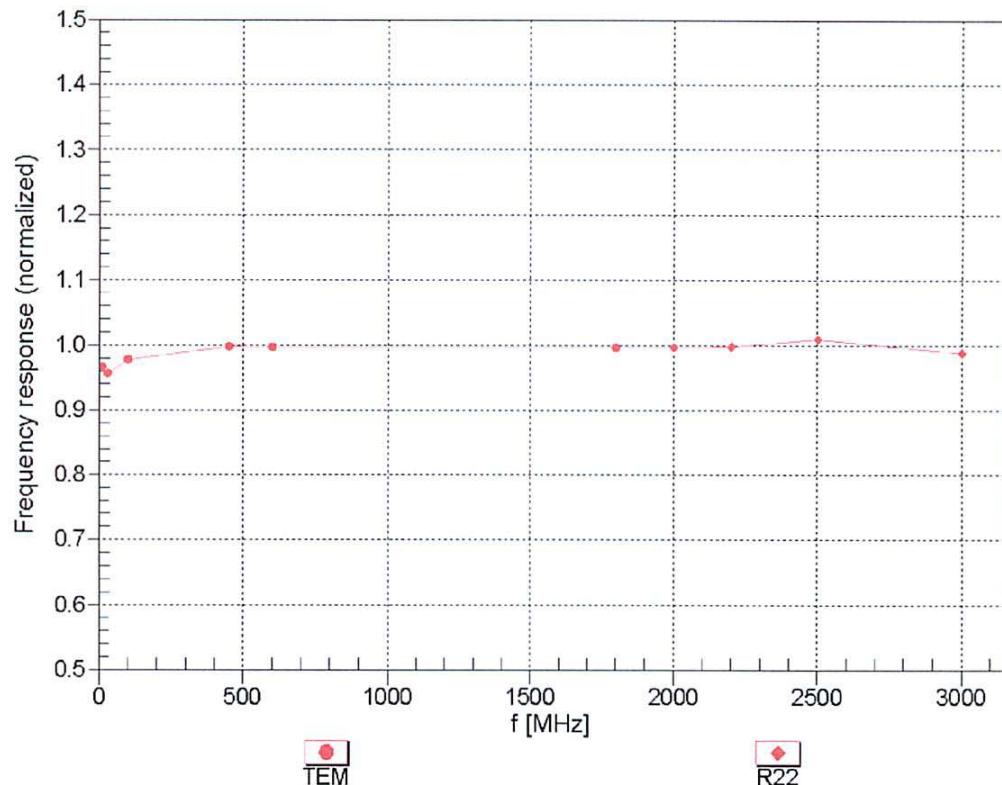



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


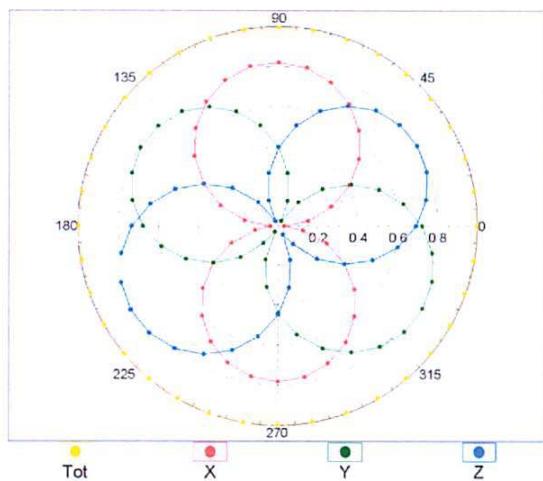


f=1800 MHz,R22

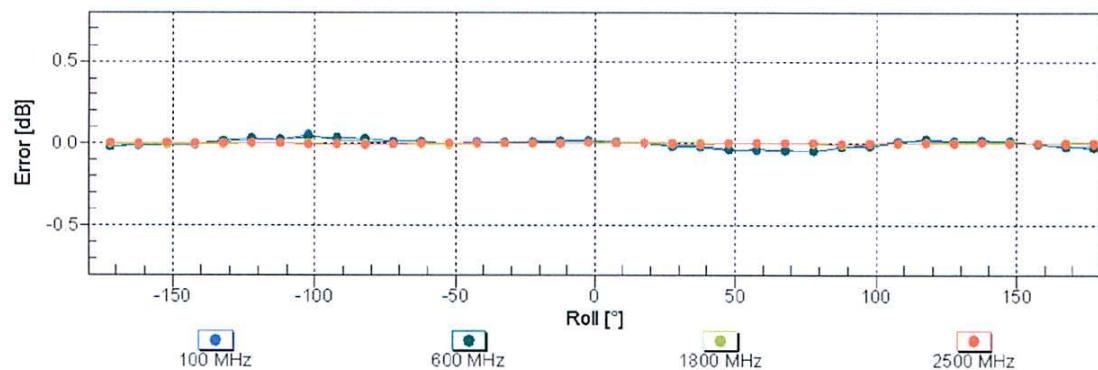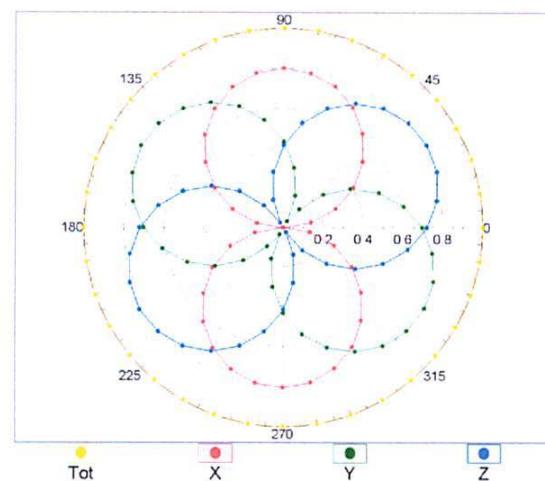Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)


Dynamic Range $f(\text{SAR}_{\text{head}})$

(TEM cell, $f = 900$ MHz)

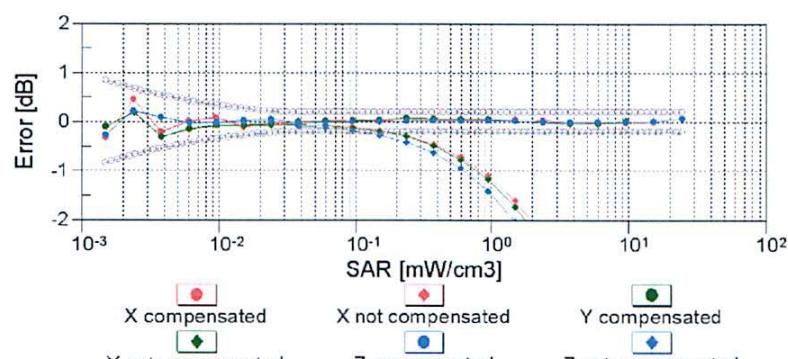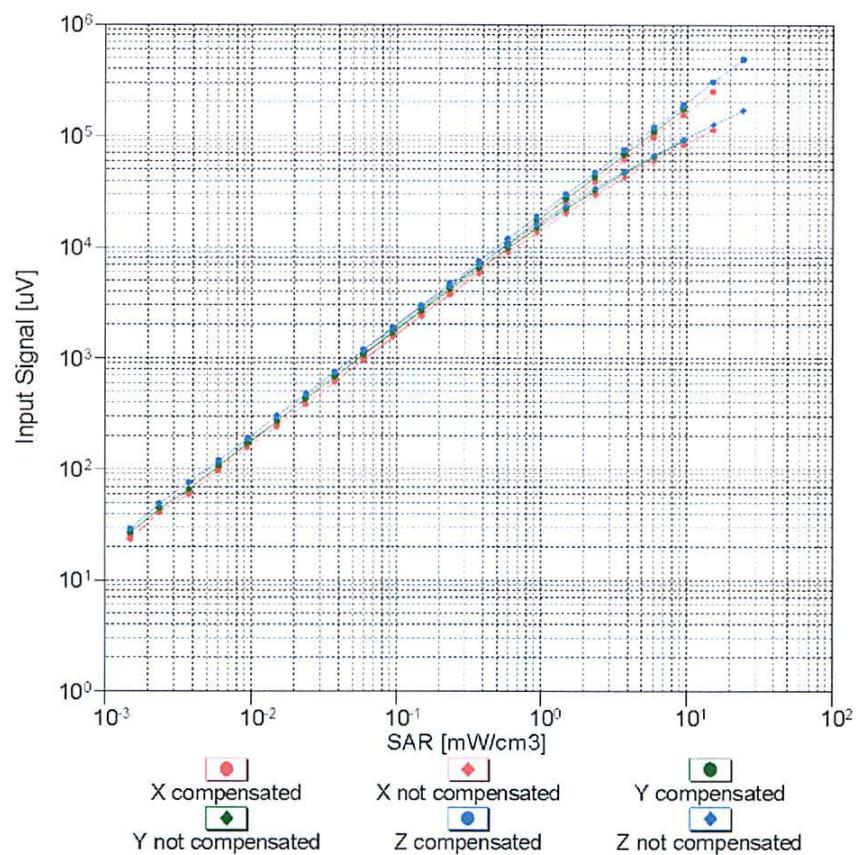


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

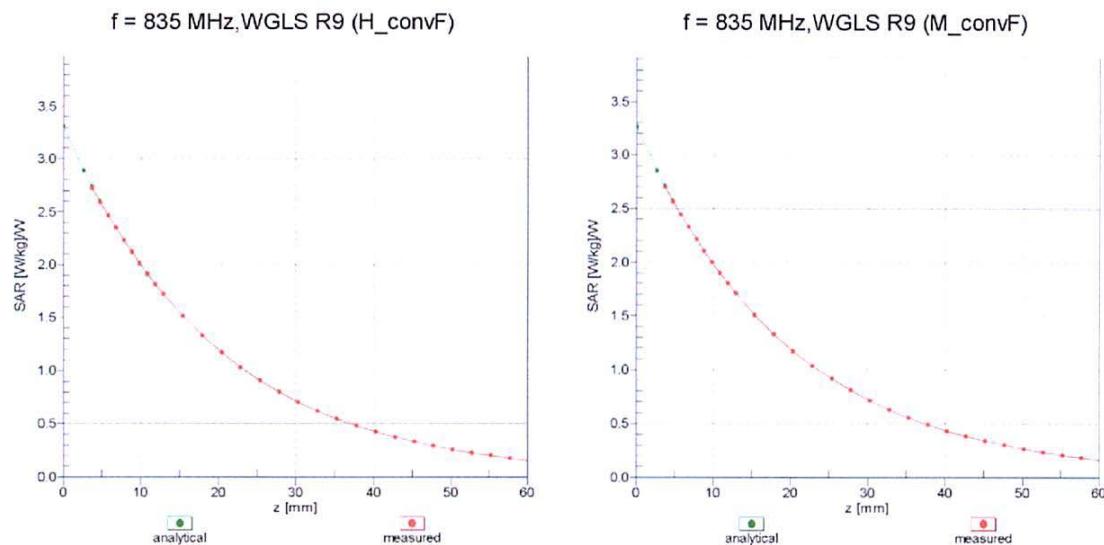

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

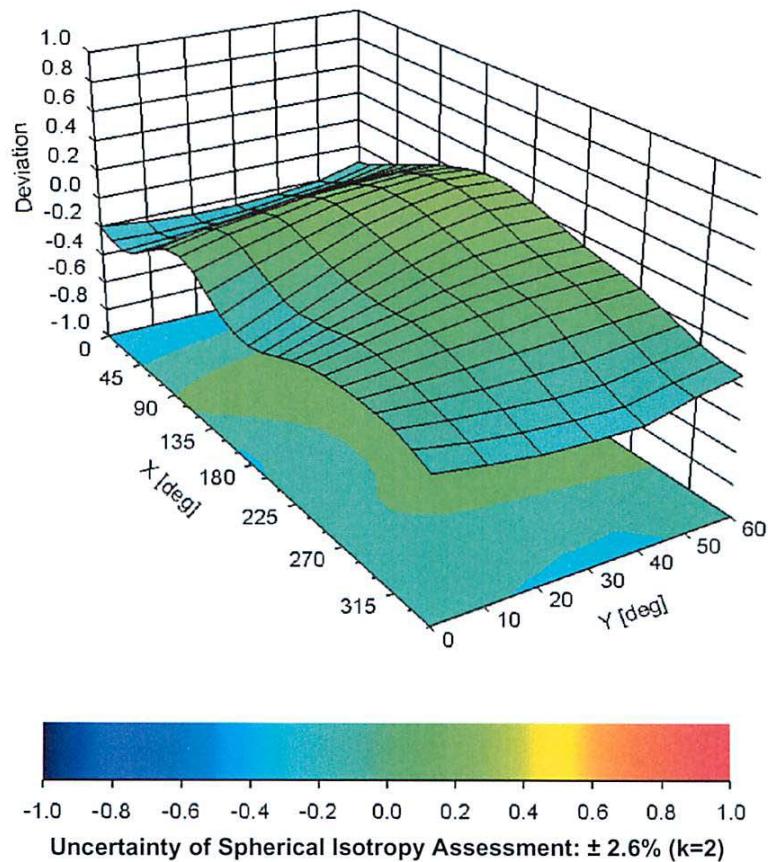

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 240 of 242

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: A handwritten signature in black ink, appearing to read 'Daniel Chailler'.

Daniel Chailler



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

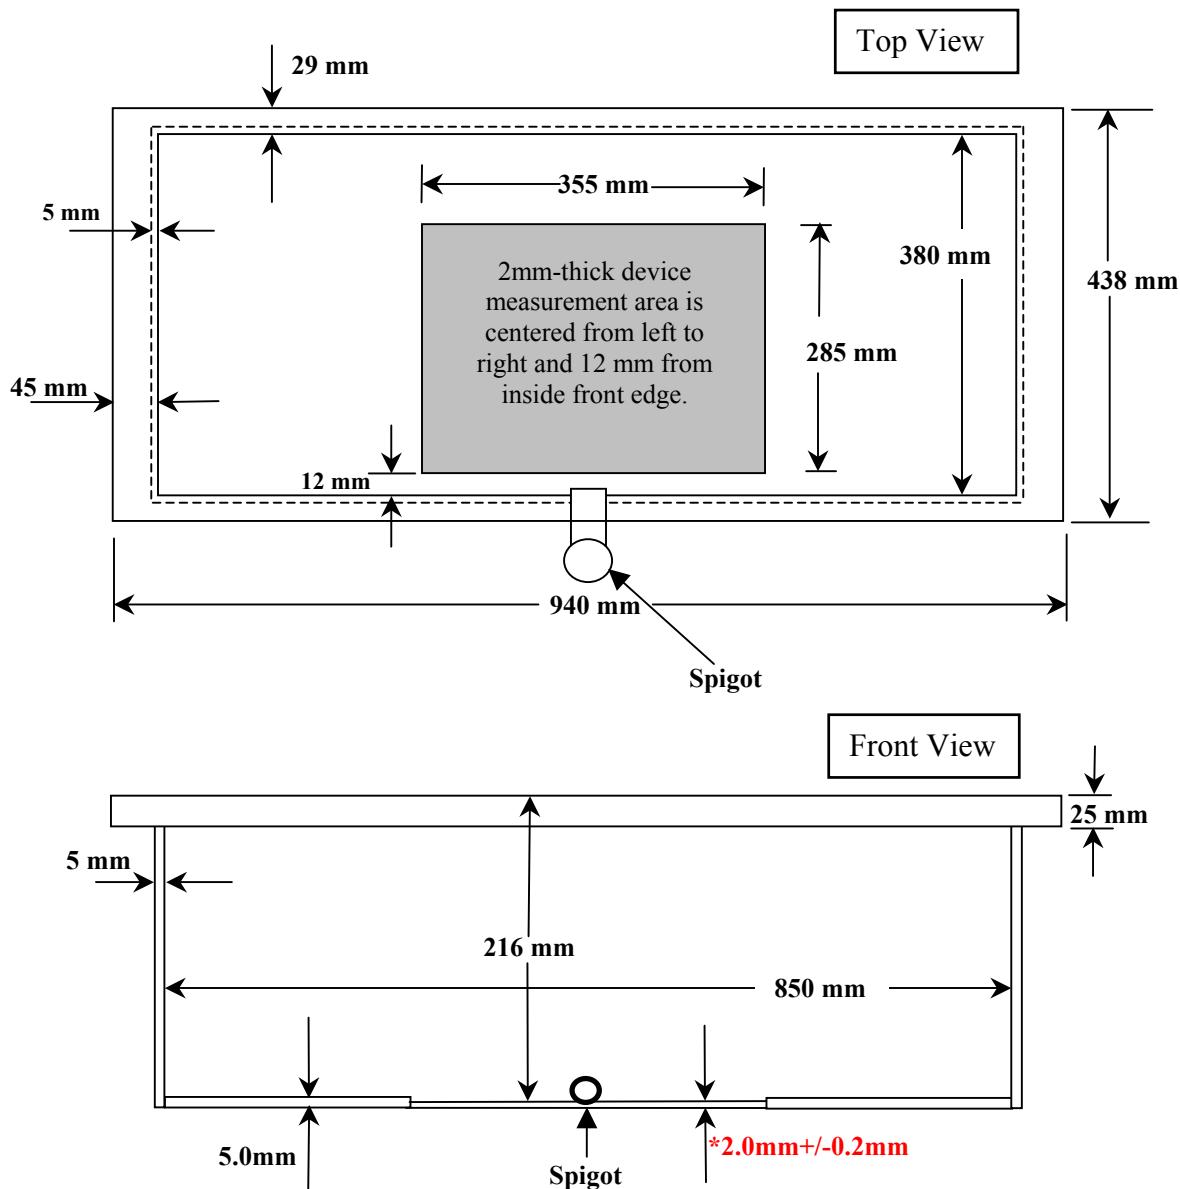

Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX H - SAM TWIN PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 241 of 242

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp


Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> July 05-08, 11-12, 2011	<u>Test Report Serial No.</u> 070411OWD-T1108-S90P	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)
	<u>Test Report Issue Date</u> October 05, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

APPENDIX I - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01v01r01)

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0066-E		IC:	3636B-0066	
DUT Type:	Portable 800-Band PTT Radio Transceiver	Model:	P5500 (800)	806-824 / 851-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 242 of 242



HARRIS CORPORATION FCC ID: OWDTR-0066-E
P5500 800-Band PTT Radio Transceiver (System)

Body SAR Test Considerations for Audio Accessories without Built-in Antenna (FCC KDB 643646 D01v01r01 Page 9) - Audio Accessory Combinations

Audio Accessory ID #	Battery a												Battery b												Battery c											
	Antenna 1-3						Antenna 1-3						Antenna 1-3						Antenna 1-3						Antenna 1-3						Antenna 1-3					
	Bw#2	Bw#3	Bw#4	Bw#6	Bw#7	Bw#8	Bw#2	Bw#3	Bw#4	Bw#6	Bw#7	Bw#8	Bw#2	Bw#3	Bw#4	Bw#6	Bw#7	Bw#8	Bw#2	Bw#3	Bw#4	Bw#6	Bw#7	Bw#8	Bw#2	Bw#3	Bw#4	Bw#6	Bw#7	Bw#8						
G1a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G1b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G2	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G3a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G3b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G4	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G5	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G6a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G6b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G7a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G7b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G7c	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G7d	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G8a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G8b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G9a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G9b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G10	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G11a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G11b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G12a	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			
G12b	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3			

Notes:

1. All audio accessory options can be utilized with any antenna, battery and body-worn combination.
2. The accessory combinations evaluated for SAR are highlighted in yellow.
3. Please refer to Section 7.0 of the SAR report for description of accessory ID #.
4. Bw = Body-worn