

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F1

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.742 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.36 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 41.7 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.32 mW/g; SAR(10 g) = 1.03 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.37 mW/g

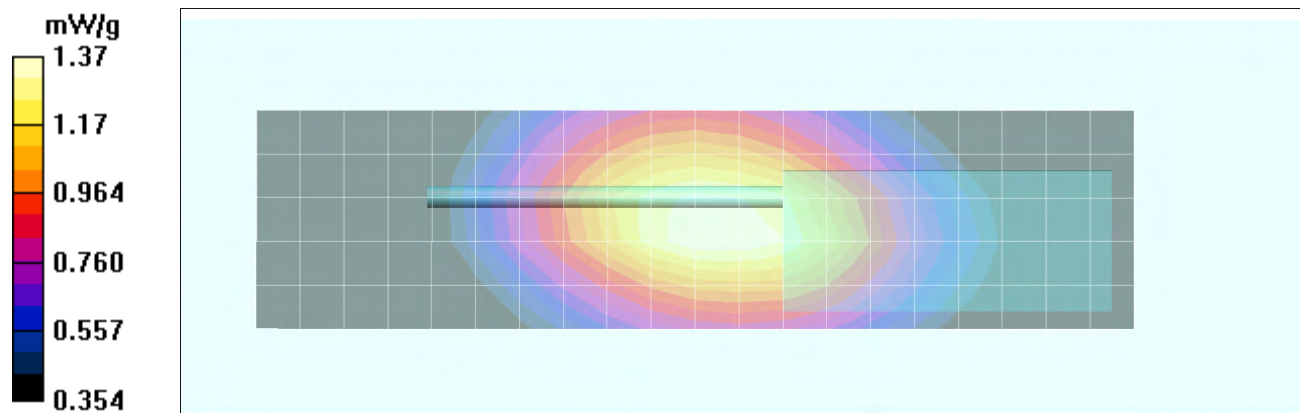

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F2

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.761 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.419 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 23.1 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.313 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.417 mW/g

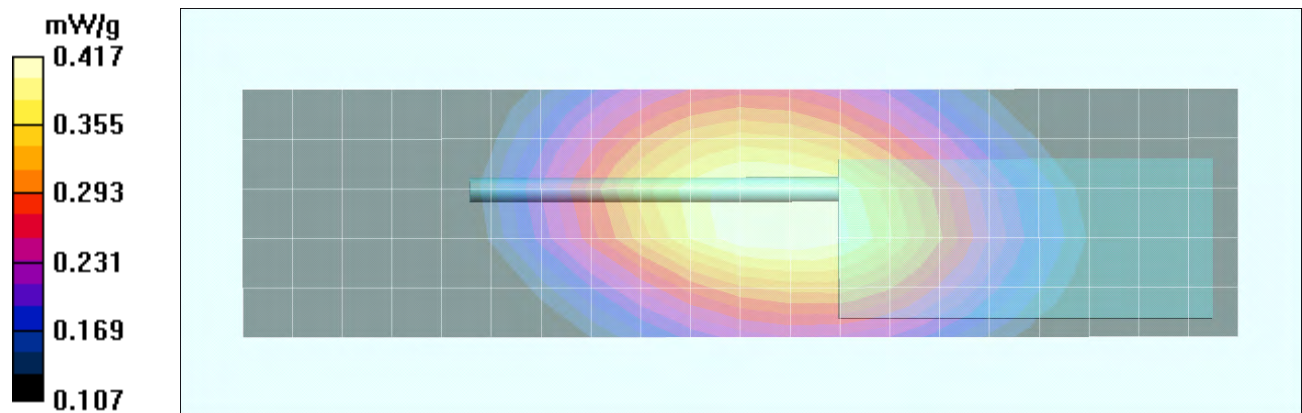

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F3

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.773 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.214 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.3 V/m; Power Drift = -0.384 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.157 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.213 mW/g

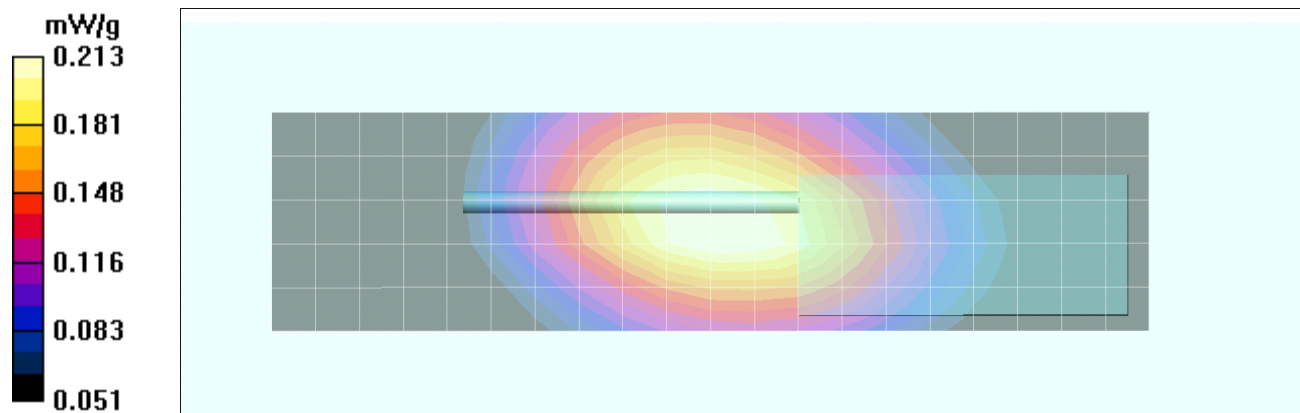

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F4

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.773 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.29 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 39.9 V/m; Power Drift = -0.233 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.964 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.30 mW/g

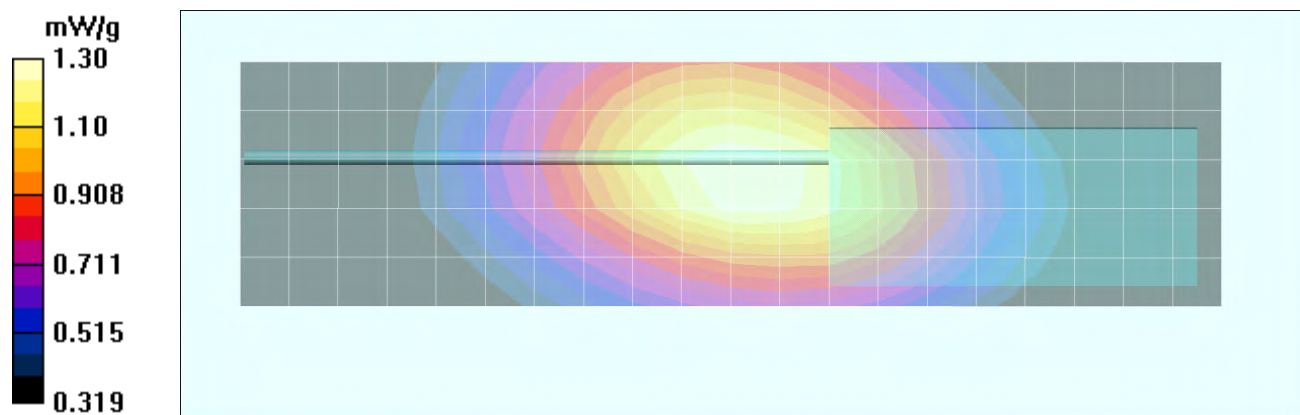

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F5

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.742 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.29 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 41.6 V/m; Power Drift = -0.387 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.962 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

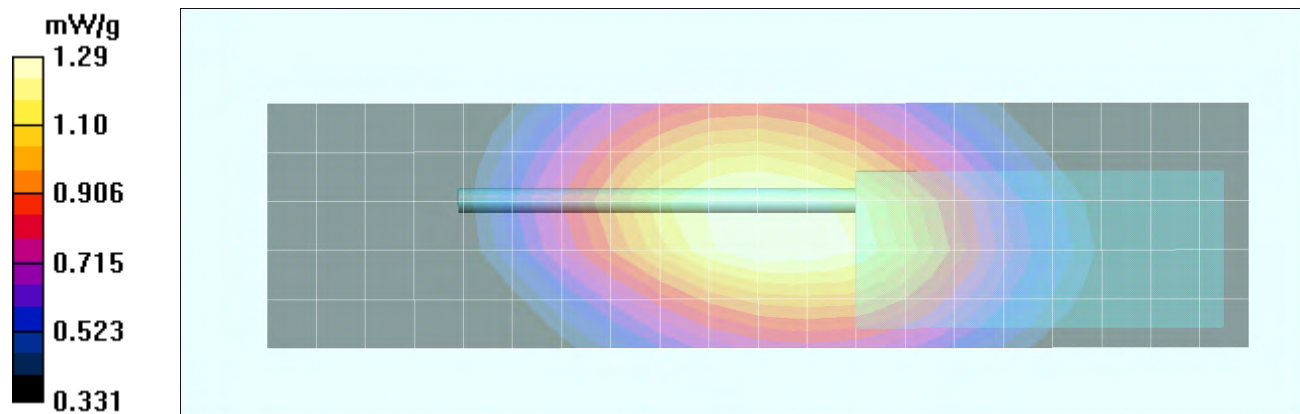

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 45 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F6

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.742 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.19 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 39.9 V/m; Power Drift = -0.228 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.895 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

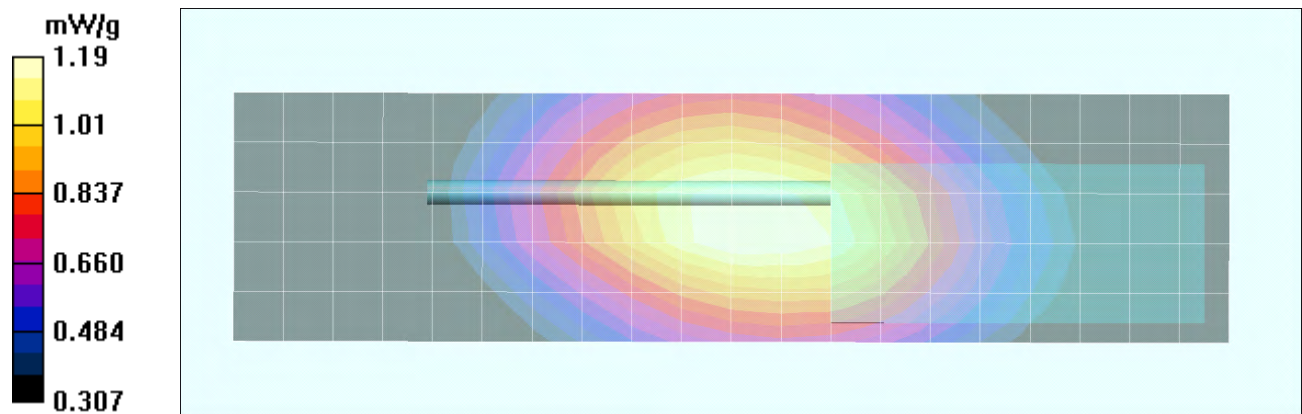

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F7

Date Tested: 10/18/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.742 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.46 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 43.3 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 1.11 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 1.47 mW/g

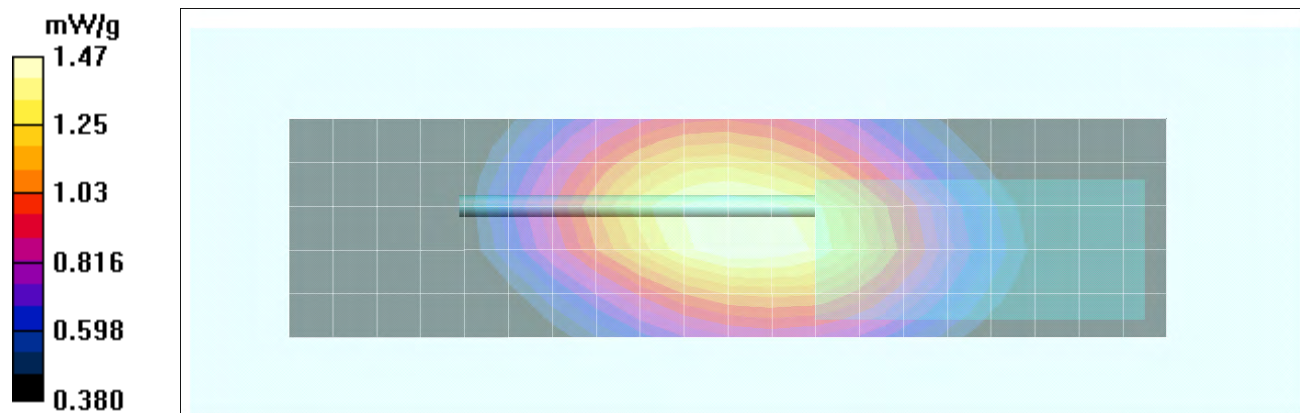

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 47 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Z-axis Scan

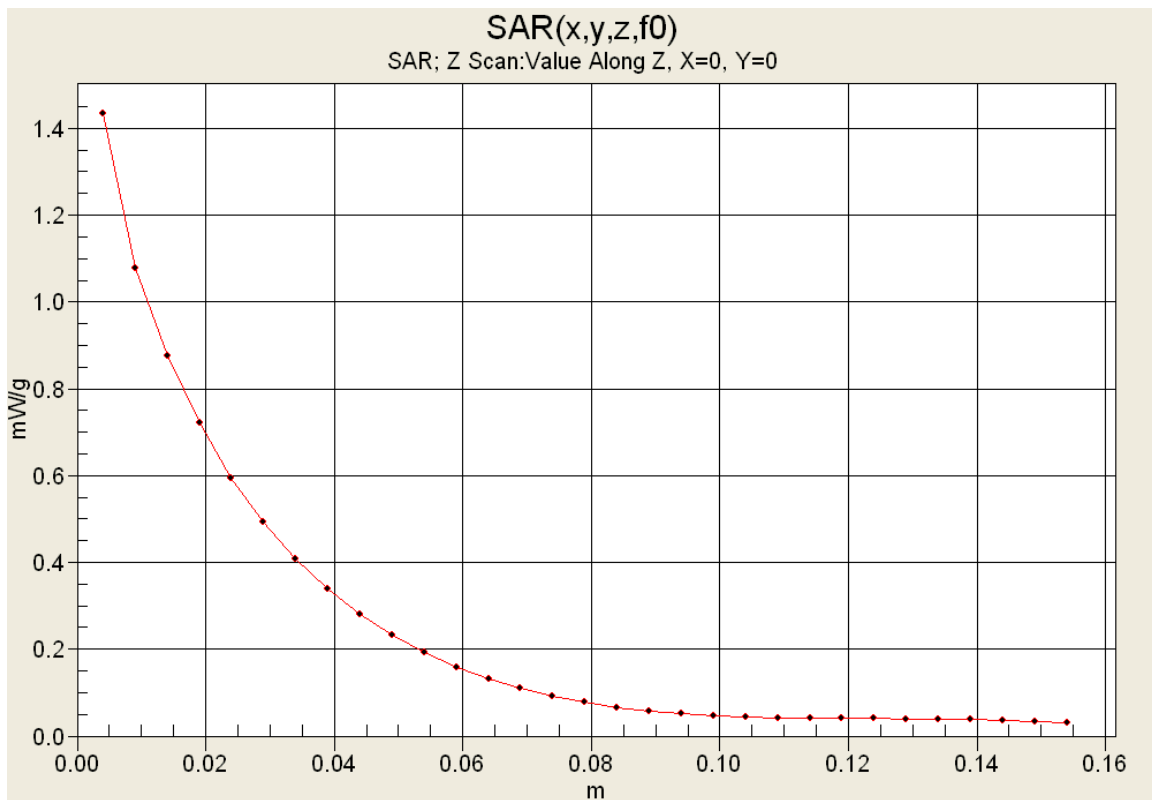

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 48 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F8

Date Tested: 10/18/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.742 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.54 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 44.1 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 1.49 mW/g; SAR(10 g) = 1.15 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

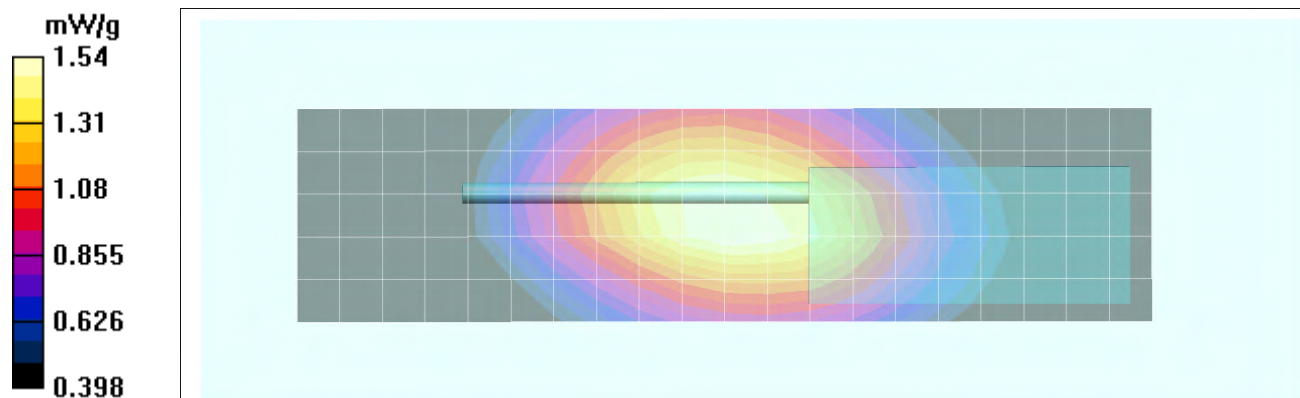

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 49 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Z-axis Scan

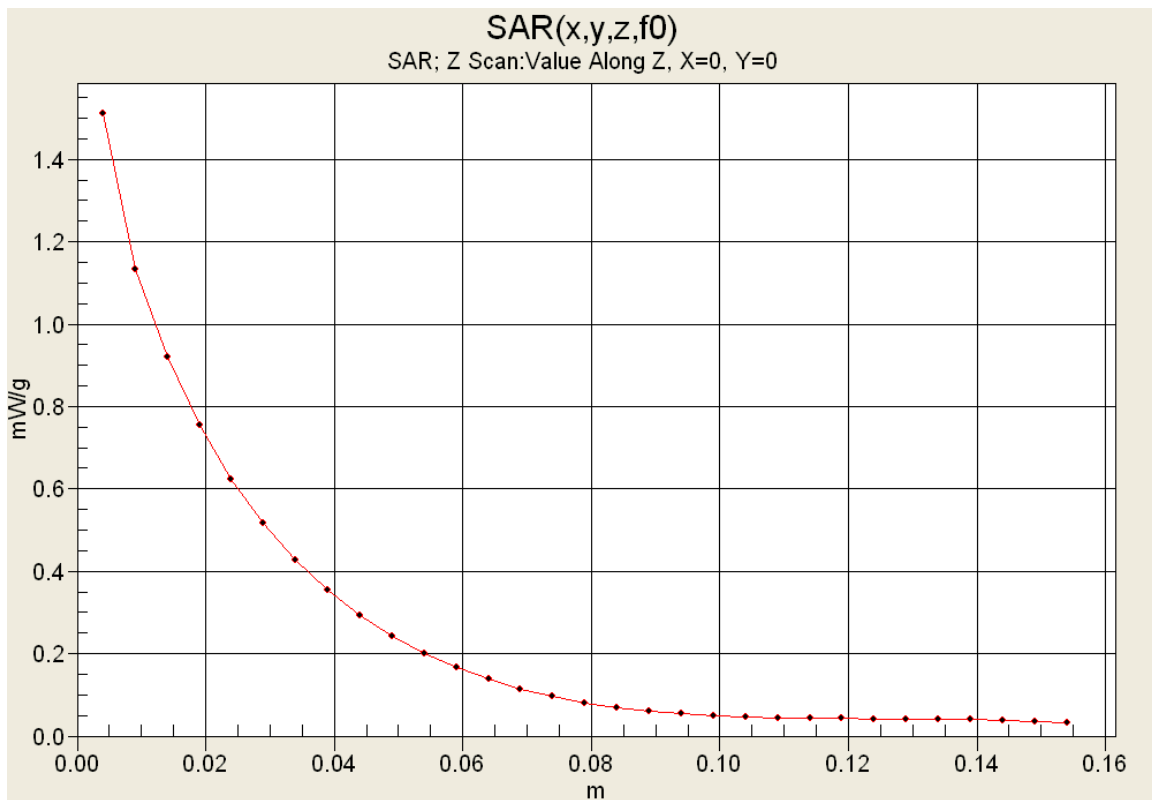

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 50 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F9

Date Tested: 10/18/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.761 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.444 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 24.2 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.332 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.445 mW/g

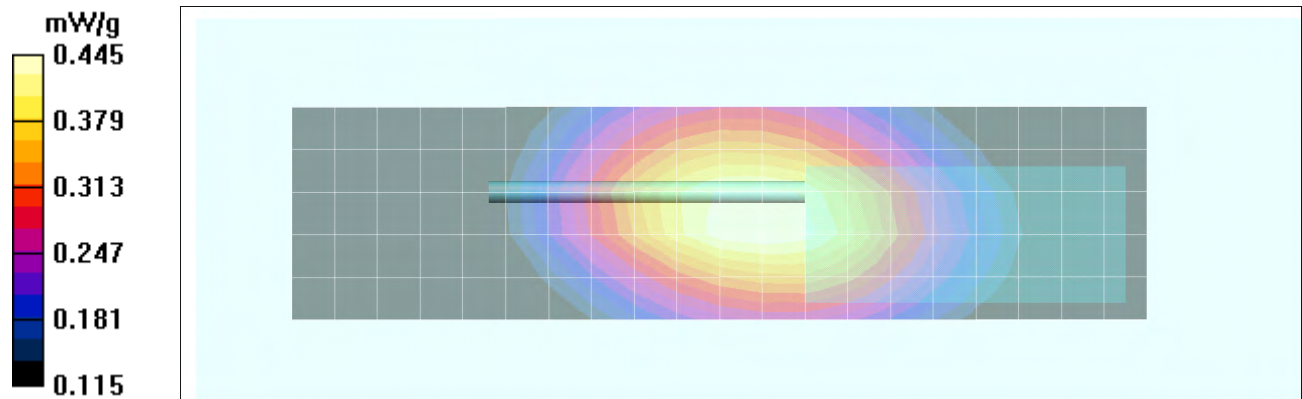

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 51 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F10

Date Tested: 10/18/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.773 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.212 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.4 V/m; Power Drift = -0.408 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.154 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.209 mW/g

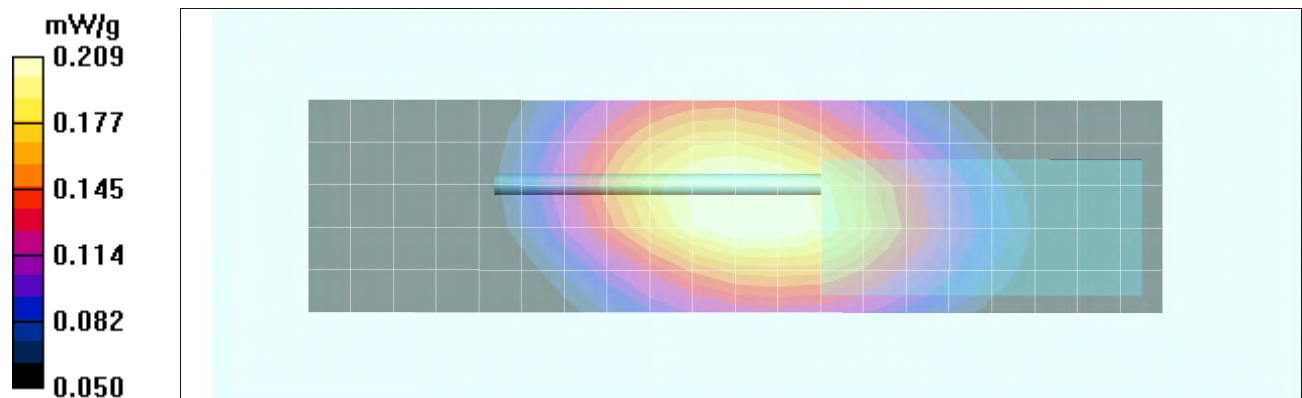

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 52 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Face SAR Plot F11

Date Tested: 10/18/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.773 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.32 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 40.5 V/m; Power Drift = -0.241 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.976 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.31 mW/g

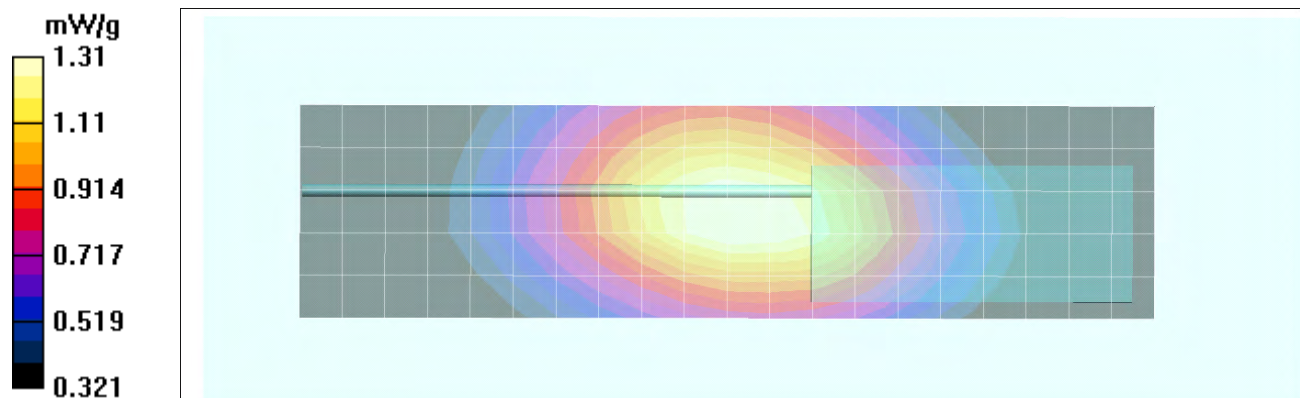

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 53 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B1

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.585 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.7 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.369 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.581 mW/g

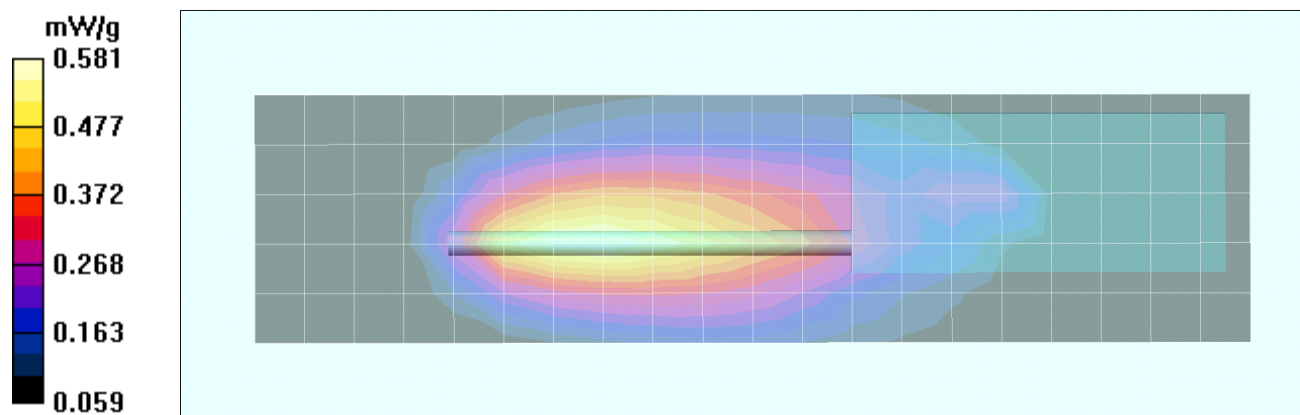

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 54 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B2

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.94 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 55.2 V/m; Power Drift = -0.211 dB

Peak SAR (extrapolated) = 40.3 W/kg

SAR(1 g) = 9.16 mW/g; SAR(10 g) = 4.02 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.63 mW/g

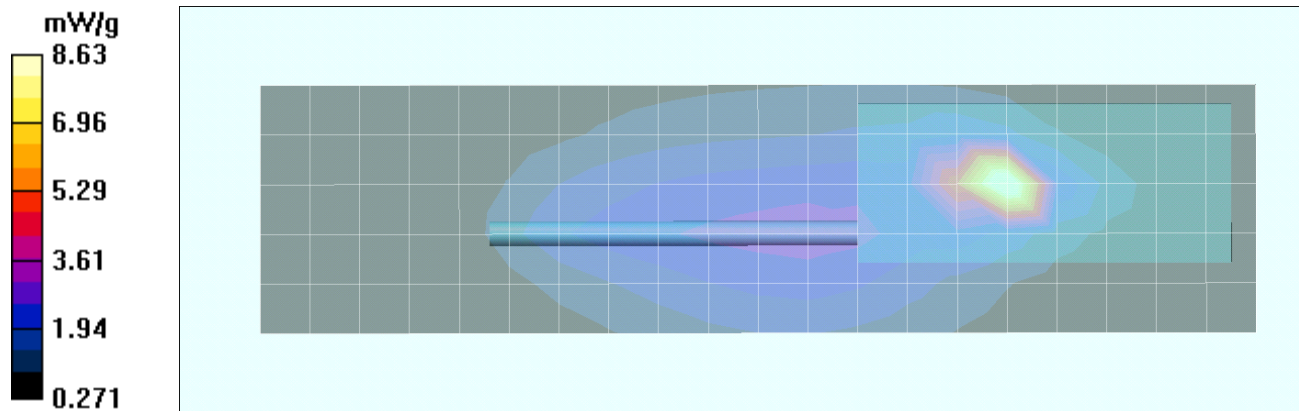

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 55 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B3

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 156.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 156.4 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 62.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 5.85 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 50.2 V/m; Power Drift = -0.274 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 6.68 mW/g; SAR(10 g) = 2.99 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 6.01 mW/g

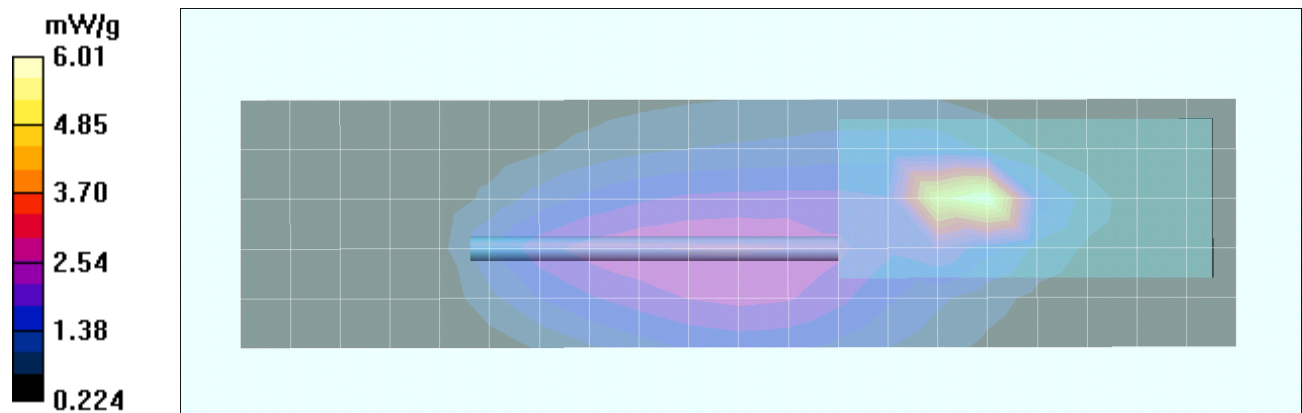

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 56 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B4

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.350 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.7 V/m; Power Drift = -0.250 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.171 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.332 mW/g

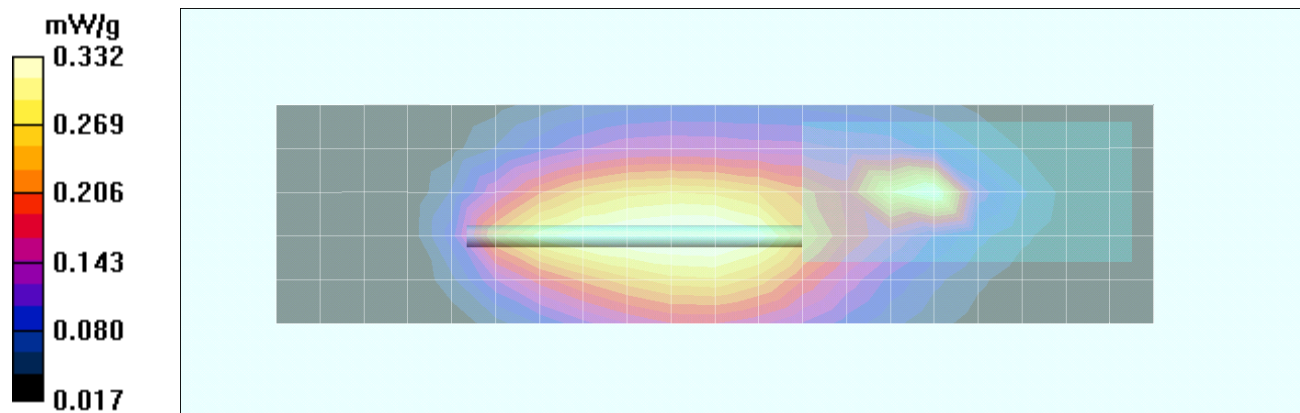

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 57 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B5

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.21 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 32.8 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 4.21 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.637 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.25 mW/g

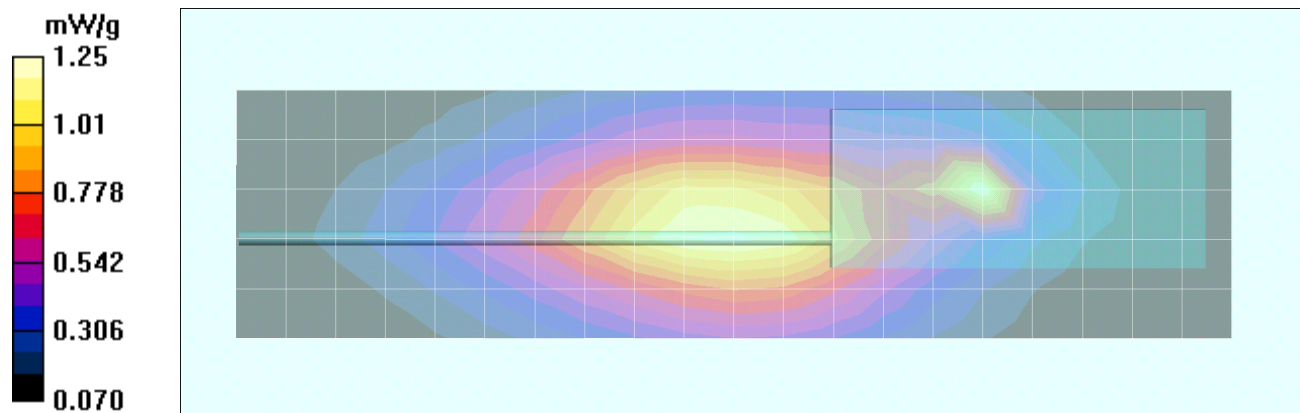

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 58 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B6

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.44 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 24.9 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 1.47 mW/g; SAR(10 g) = 0.651 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.42 mW/g

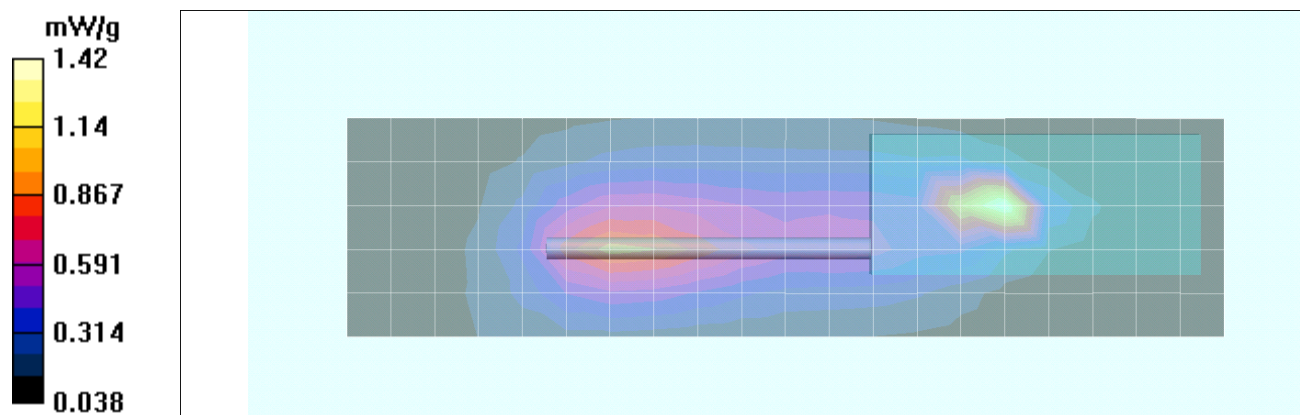

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 59 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B7

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.96 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 55.4 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 39.4 W/kg

SAR(1 g) = 9.29 mW/g; SAR(10 g) = 4.17 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.53 mW/g

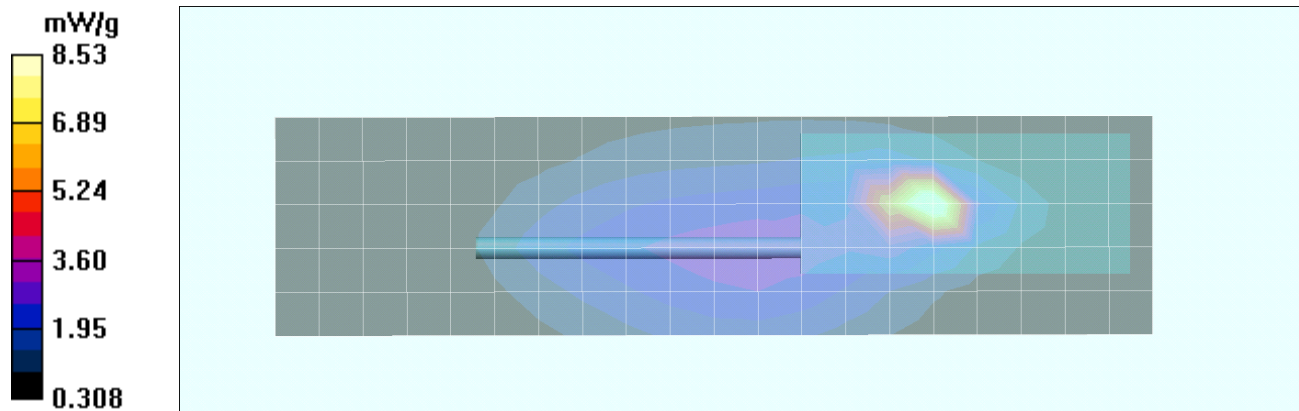

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 60 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B8

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.3 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 58.9 V/m; Power Drift = 0.243 dB

Peak SAR (extrapolated) = 45.2 W/kg

SAR(1 g) = 10.8 mW/g; SAR(10 g) = 4.84 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.5 mW/g

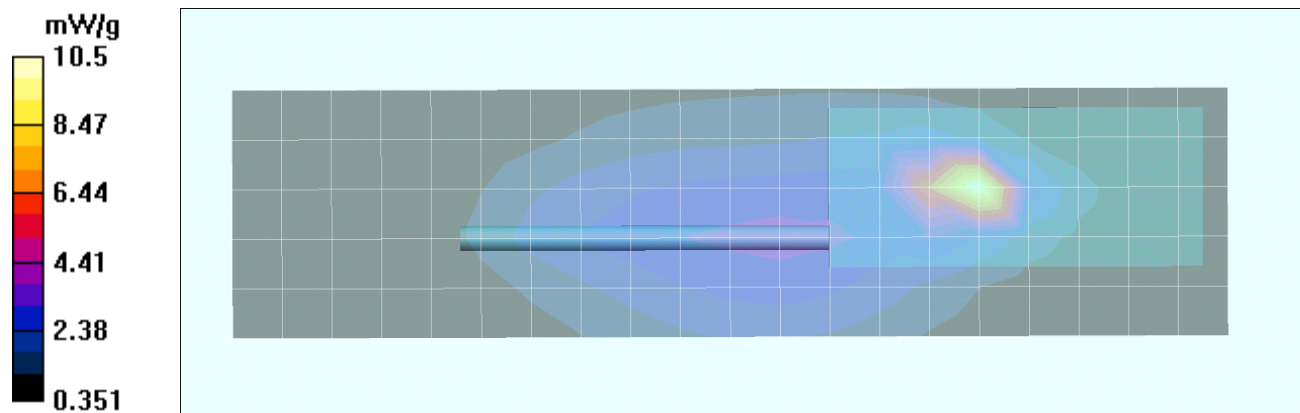


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 61 of 203

Z-axis Scan

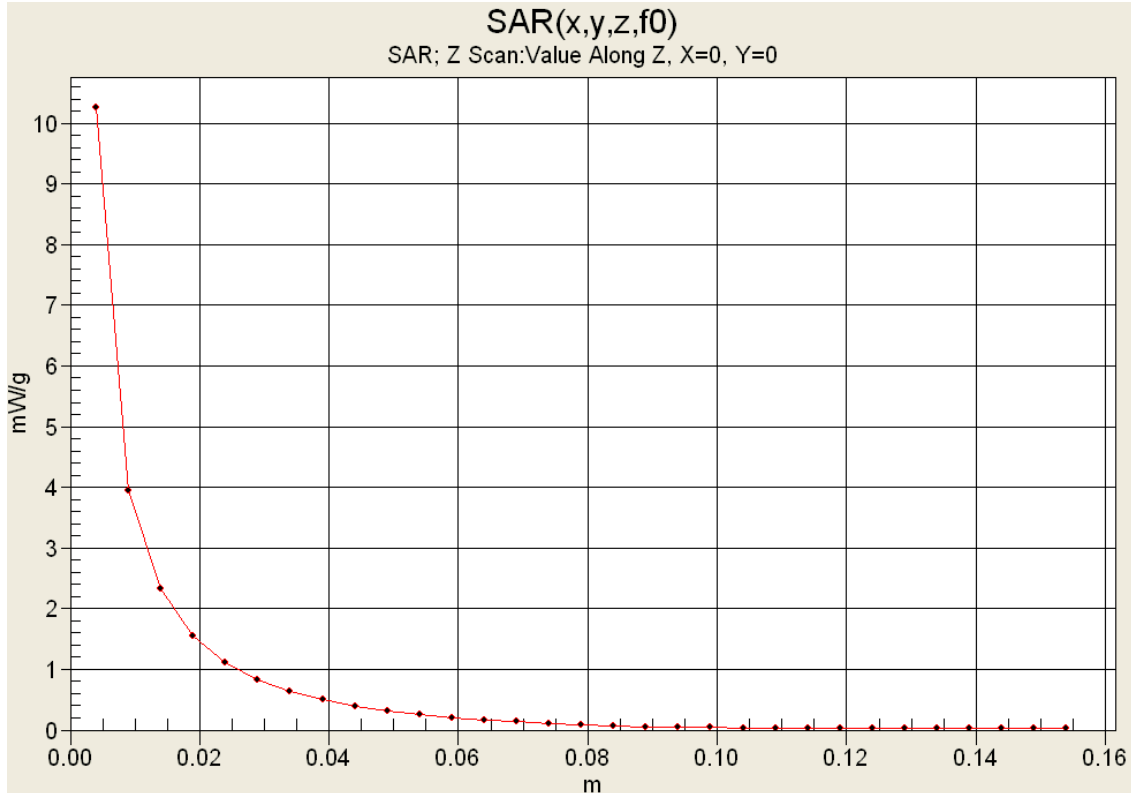

SAR vs. TIME

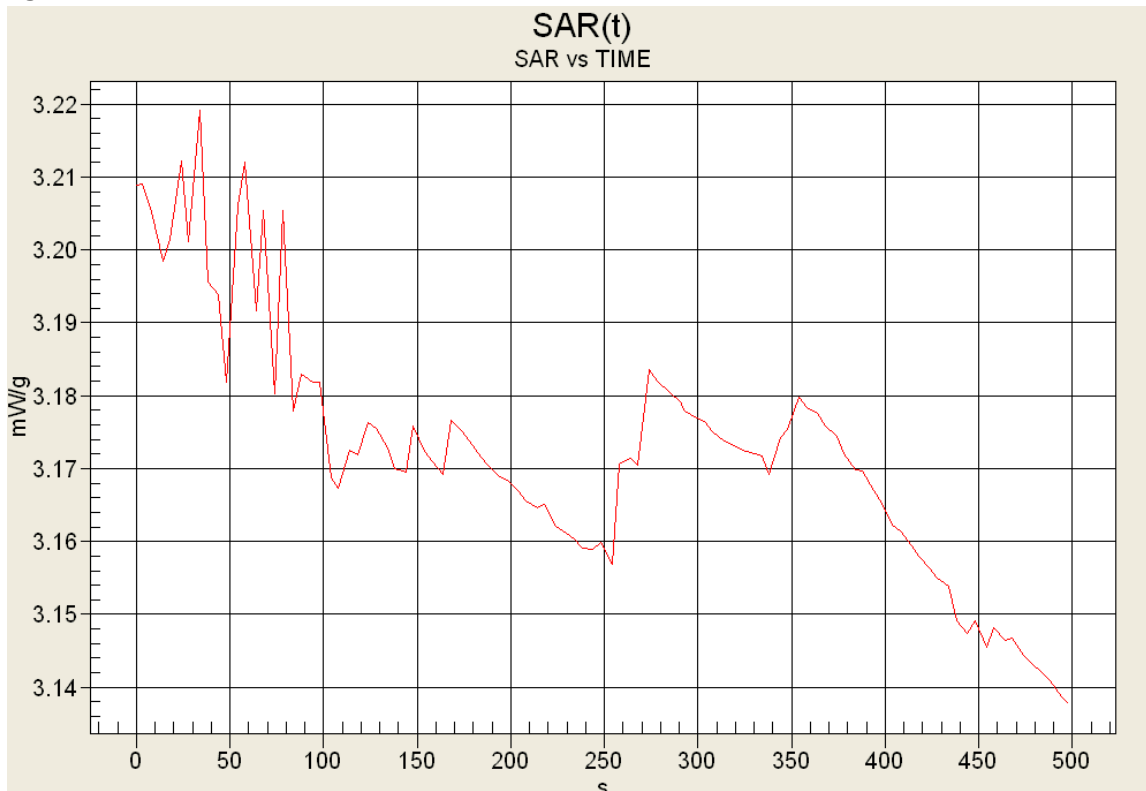

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B9

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 64.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.142 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.6 V/m; Power Drift = -1.65 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.091 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.126 mW/g

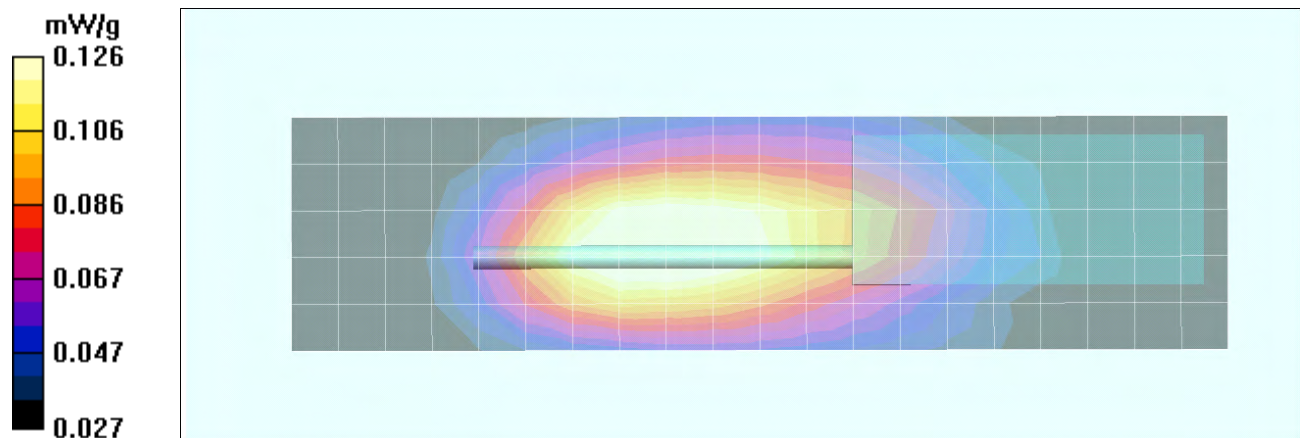

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 63 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B10

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.788$ mho/m; $\epsilon_r = 63.9$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.261 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 17.6 V/m; Power Drift = -0.227 dB

Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.125 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.222 mW/g

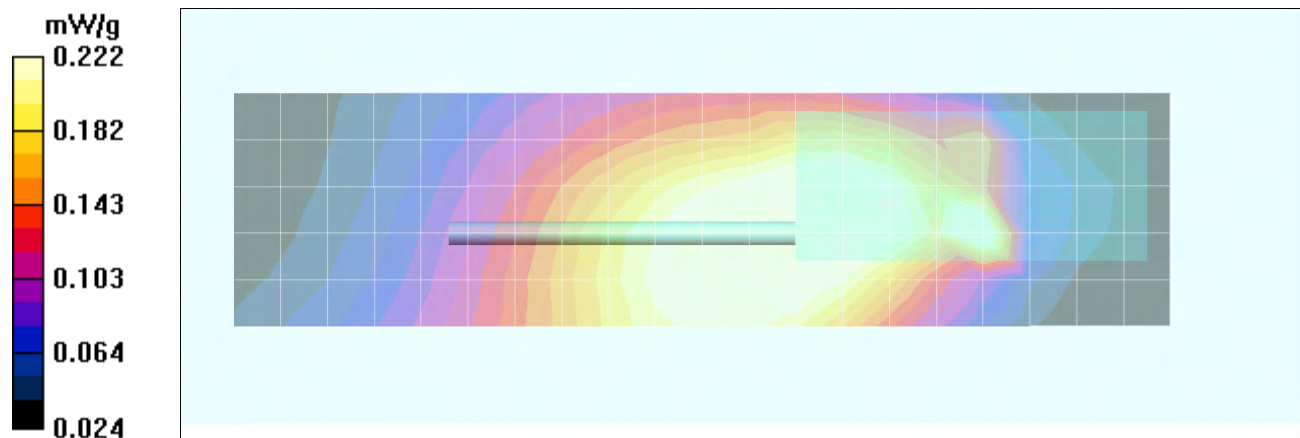

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 64 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B11

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.206 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.5 V/m; Power Drift = -0.253 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.147 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.196 mW/g

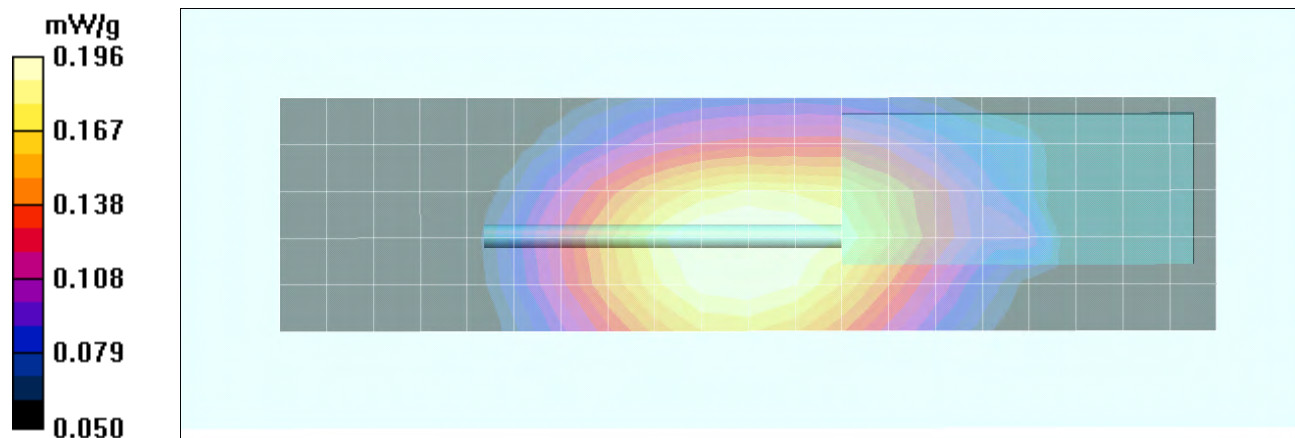

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 65 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B12

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.29 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 35.7 V/m; Power Drift = -0.178 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.890 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

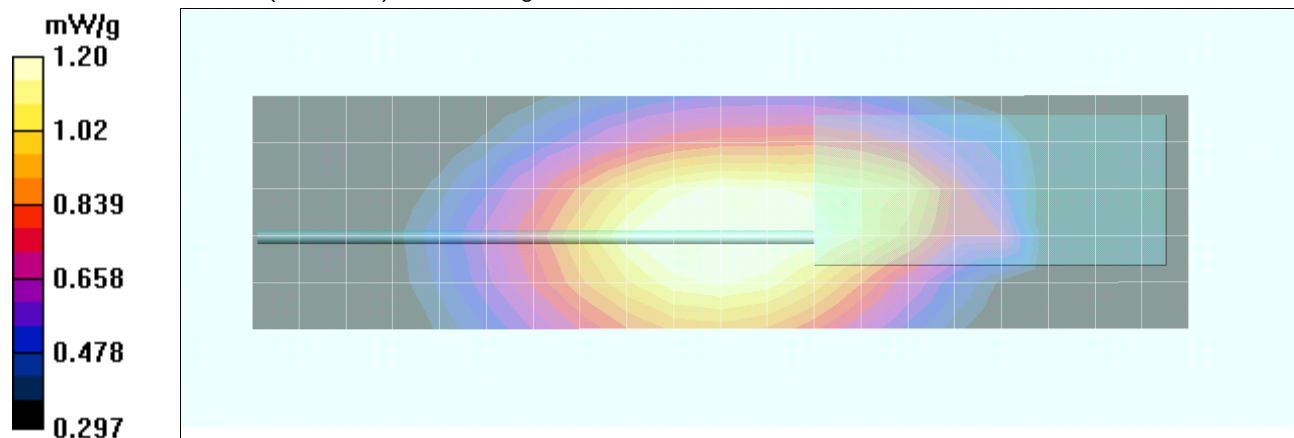

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 66 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B13

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.12 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 35.2 V/m; Power Drift = -1.57 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.784 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 mW/g

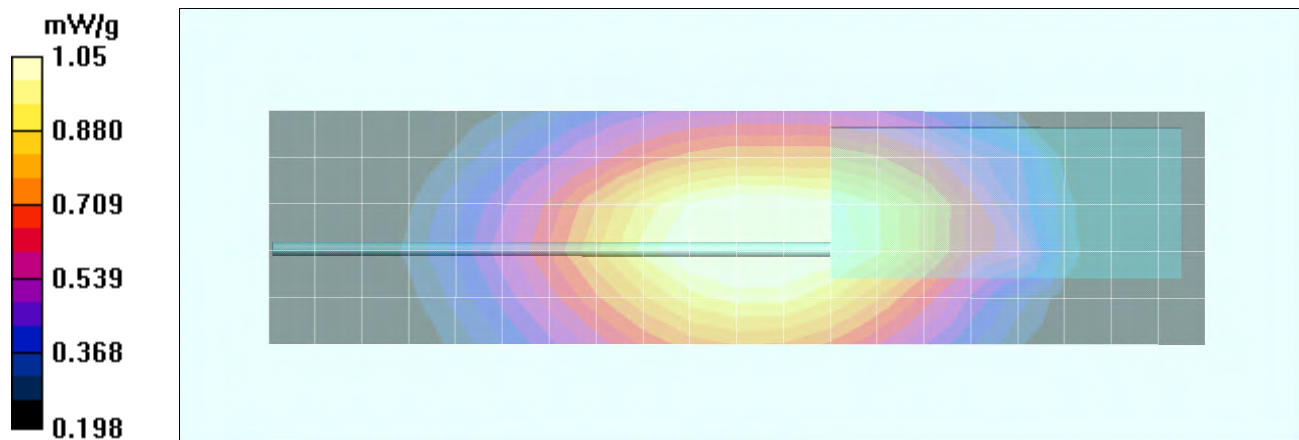

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 67 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B14

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.10 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.0 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.786 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.04 mW/g

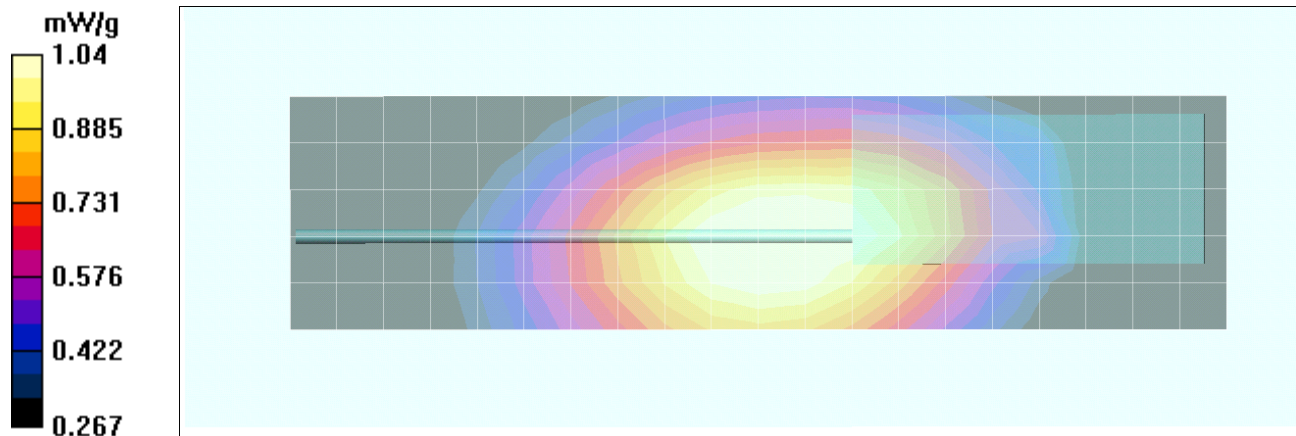

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 68 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B15

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4$ MHz; $\sigma = 0.793$ mho/m; $\epsilon_r = 63.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 35.7 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.864 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.16 mW/g

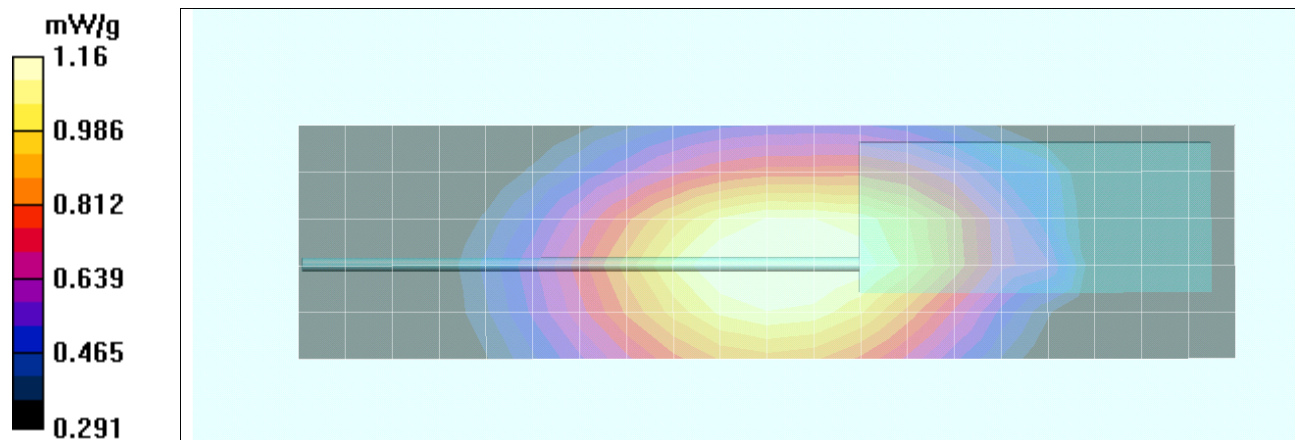

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 69 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B16

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.76 \text{ mho/m}$; $\epsilon_r = 62.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.155 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 12.0 V/m; Power Drift = -1.71 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.077 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.106 mW/g

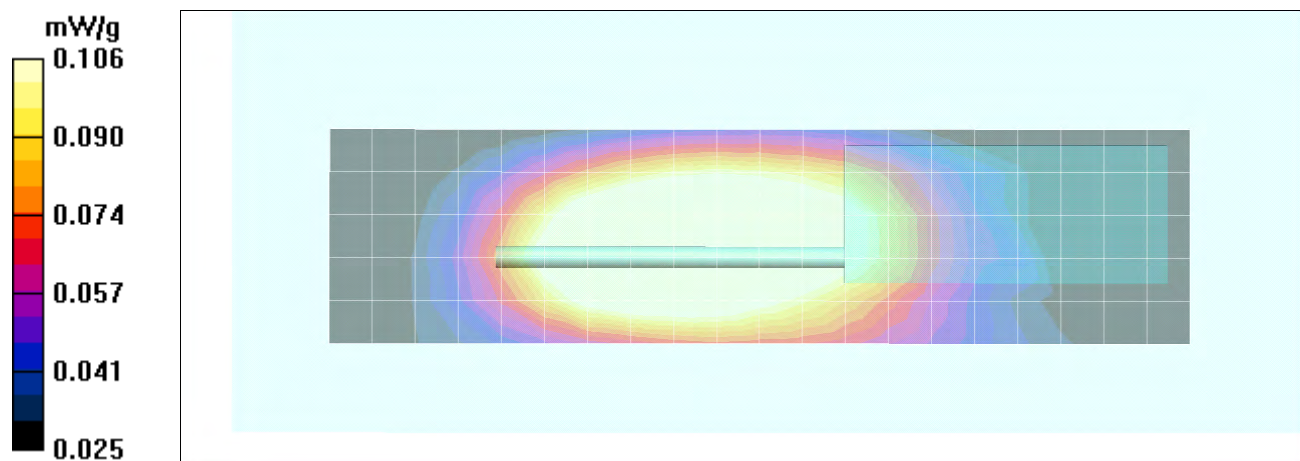

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 70 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B17

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.762$ mho/m; $\epsilon_r = 64$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.283 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 17.1 V/m; Power Drift = -0.306 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.119 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.251 mW/g

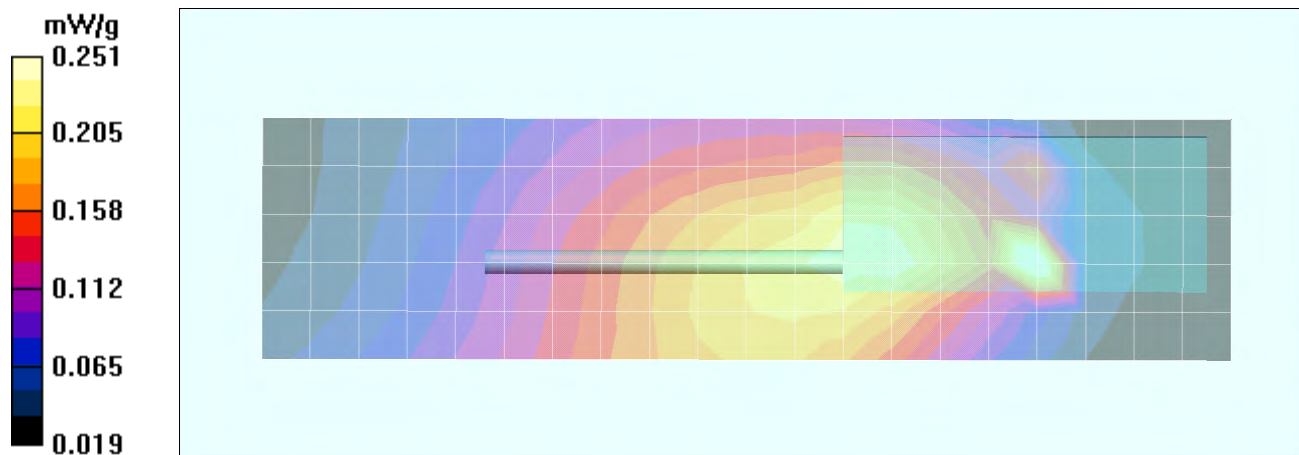

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 71 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B18

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.191 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.0 V/m; Power Drift = -0.299 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.136 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.180 mW/g

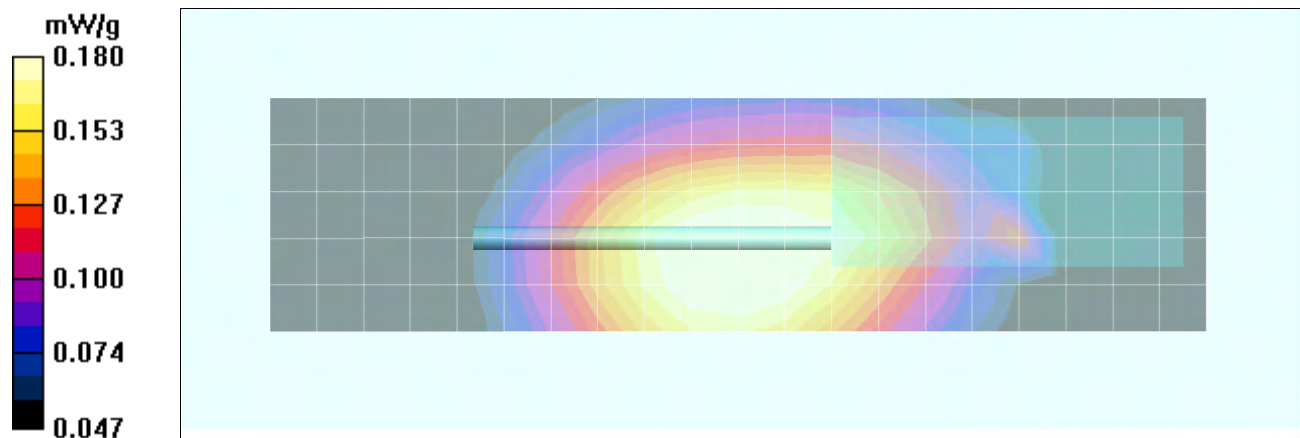

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 72 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B19

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.11 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 32.6 V/m; Power Drift = 0.279 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.987 mW/g; SAR(10 g) = 0.756 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 mW/g

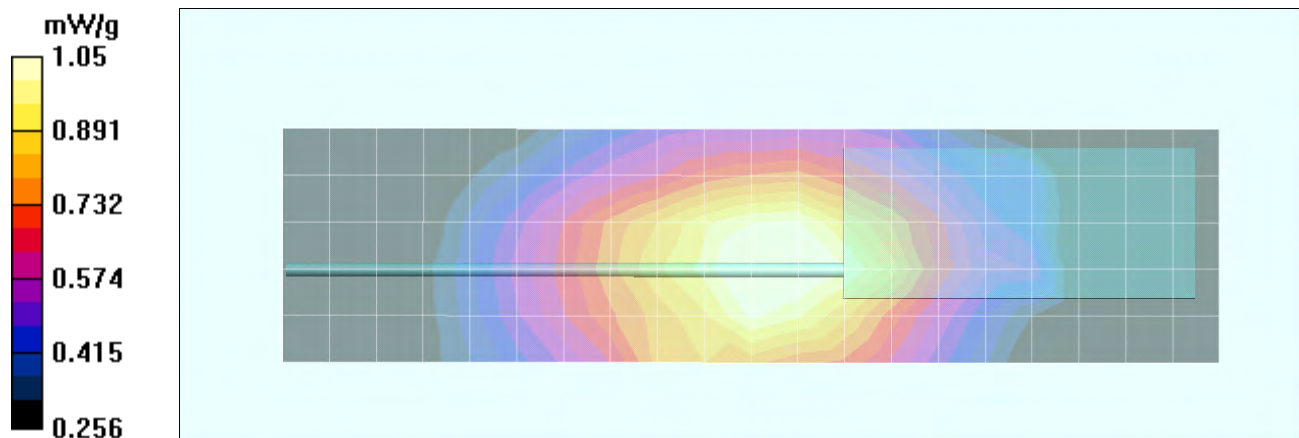

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 73 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B20

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.767 \text{ mho/m}$; $\epsilon_r = 63$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.866 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.6 V/m; Power Drift = -1.62 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.811 mW/g; SAR(10 g) = 0.580 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.827 mW/g

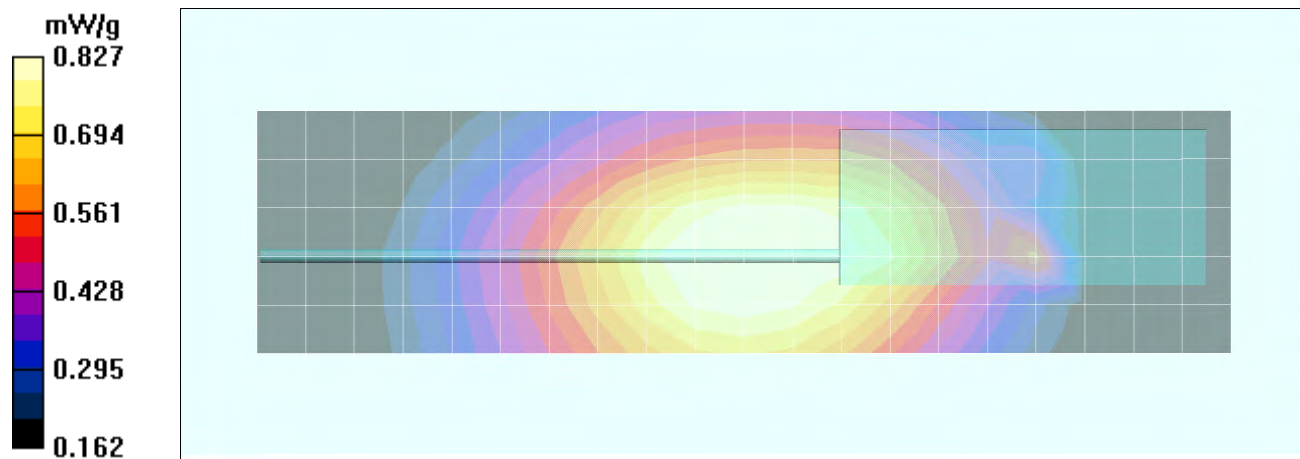

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 74 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B21

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.767 \text{ mho/m}$; $\epsilon_r = 63$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.881 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.9 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.630 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.839 mW/g

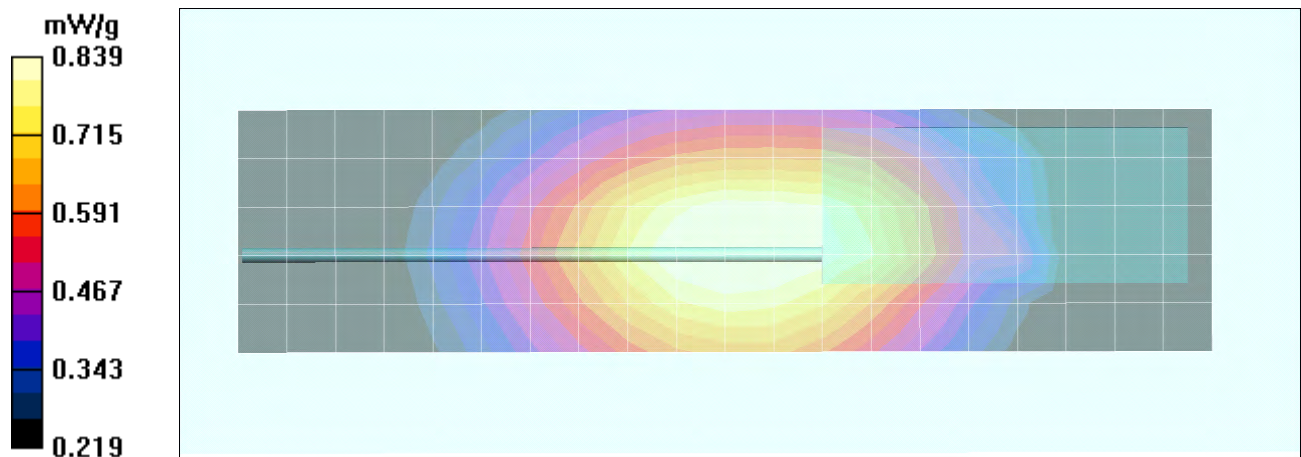

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 75 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B22

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.767 \text{ mho/m}$; $\epsilon_r = 63$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.999 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 34.0 V/m; Power Drift = -0.175 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.721 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.959 mW/g

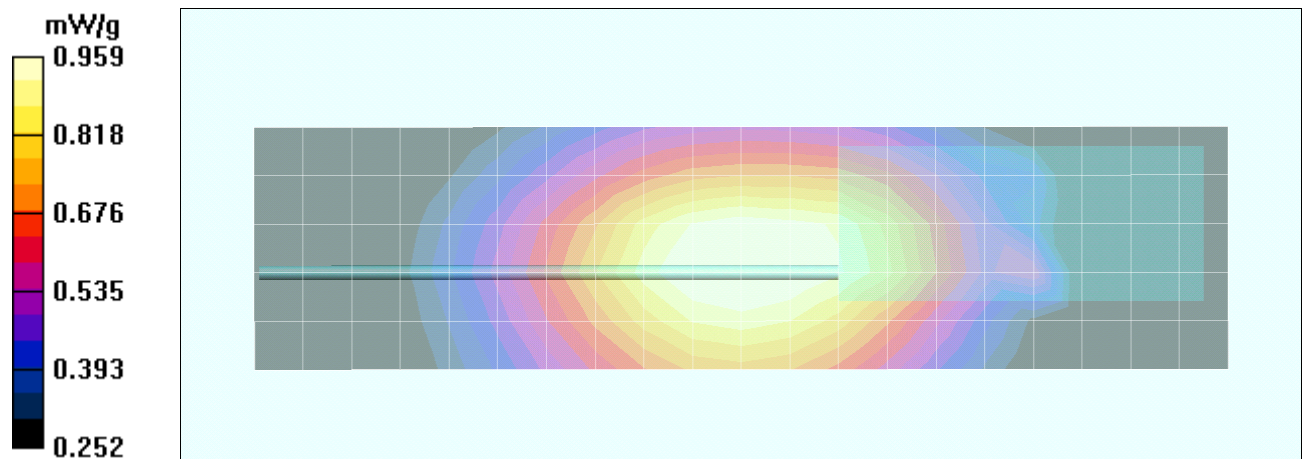

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 76 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B23

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.66 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 20.0 V/m; Power Drift = 0.335 dB

Peak SAR (extrapolated) = 4.23 W/kg

SAR(1 g) = 1.56 mW/g; SAR(10 g) = 0.558 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.05 mW/g

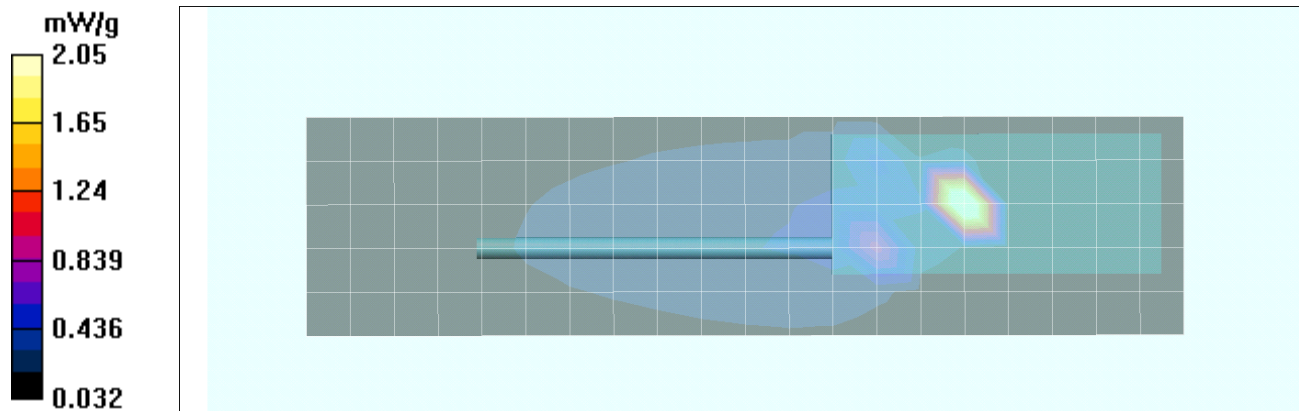

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 77 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B24

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.70 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 30.8 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 8.49 W/kg

SAR(1 g) = 3.21 mW/g; SAR(10 g) = 1.24 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.86 mW/g

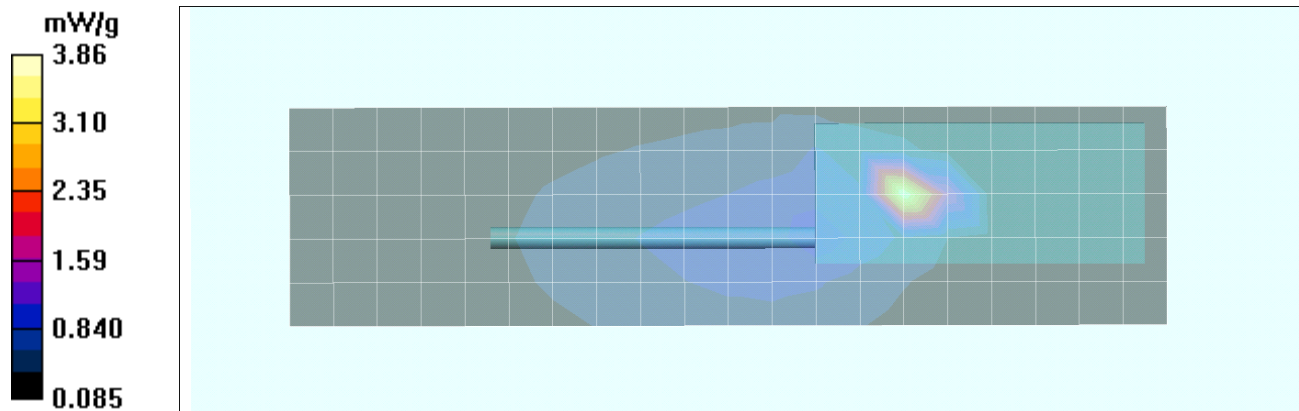

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 78 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B25

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.426 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.8 V/m; Power Drift = -0.245 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.161 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.470 mW/g

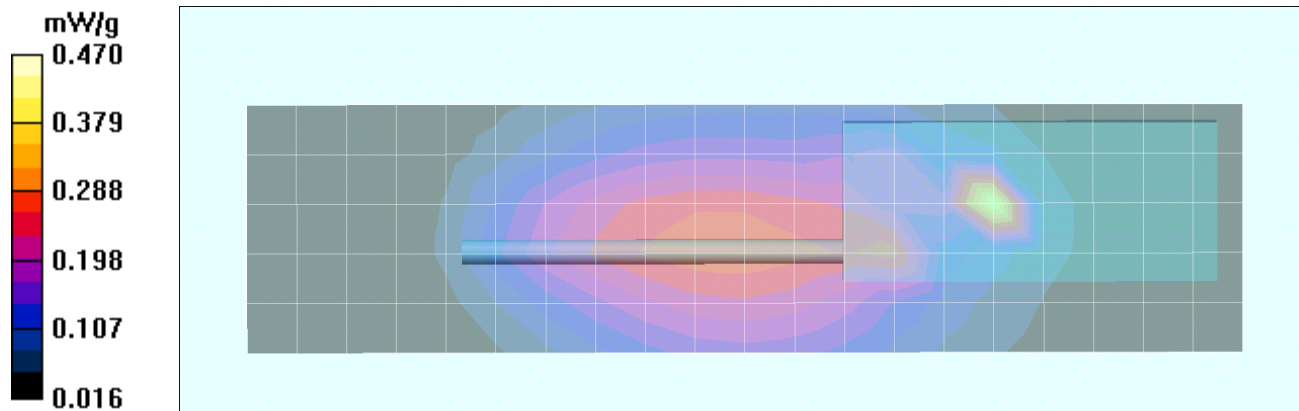

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 79 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B26

Date Tested: 10/19/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.11 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.4 V/m; Power Drift = -0.295 dB

Peak SAR (extrapolated) = 4.03 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.683 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.35 mW/g

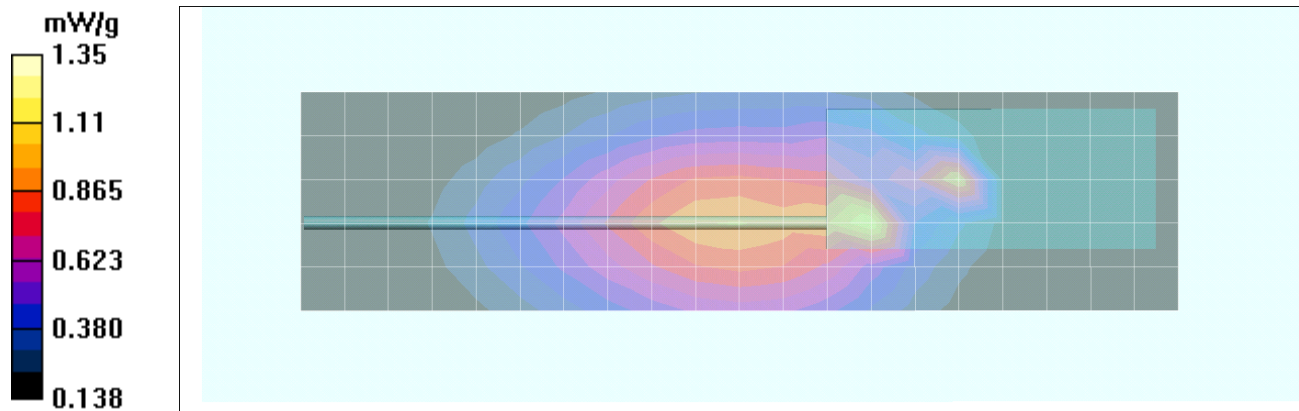

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 80 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B27

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.788 \text{ mho/m}$; $\epsilon_r = 63.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.40 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 21.0 V/m; Power Drift = -0.217 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.438 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.52 mW/g

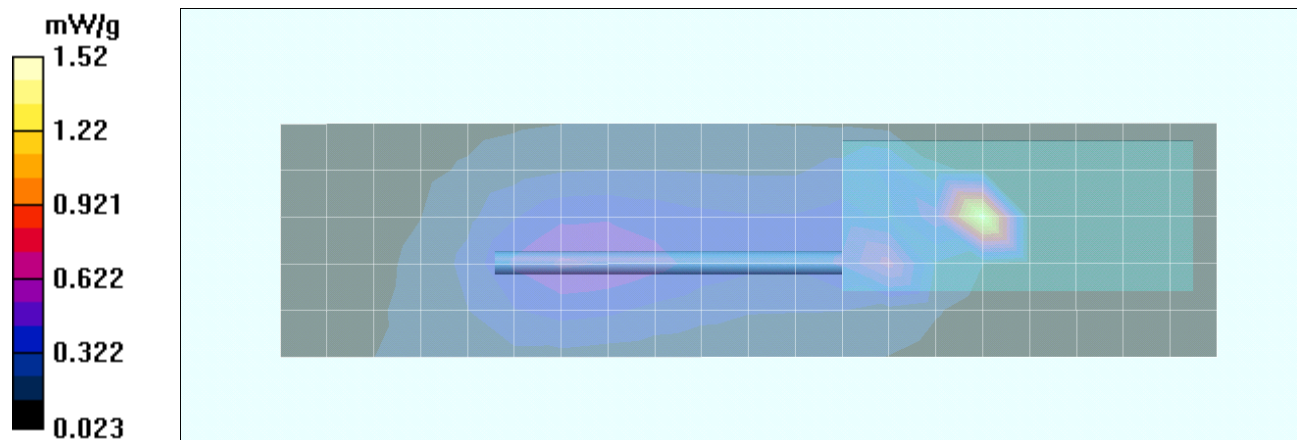

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 81 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B28

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.788 \text{ mho/m}$; $\epsilon_r = 63.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.23 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 37.2 V/m; Power Drift = -0.237 dB

Peak SAR (extrapolated) = 9.35 W/kg

SAR(1 g) = 3.63 mW/g; SAR(10 g) = 1.42 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 4.74 mW/g

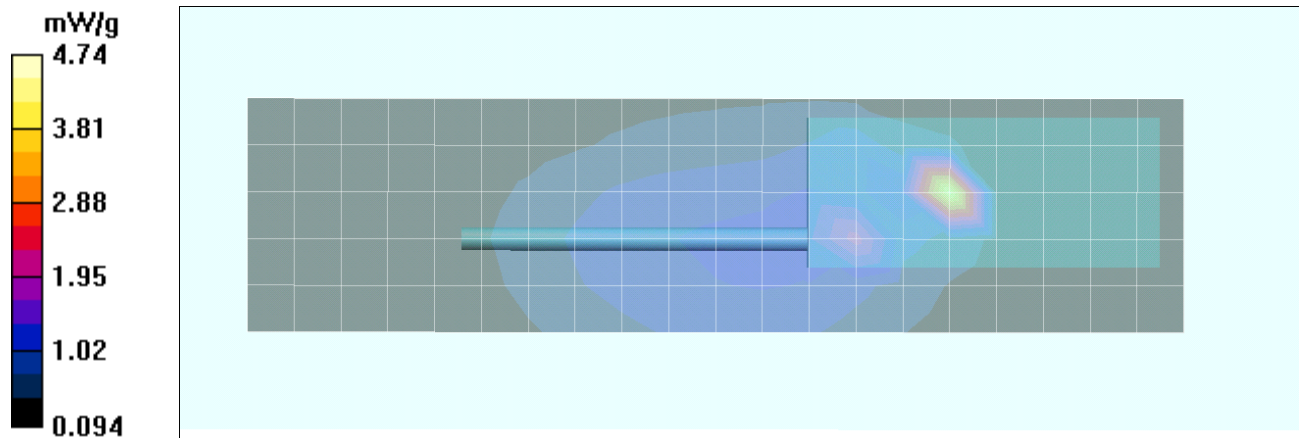

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 82 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Z-axis Scan

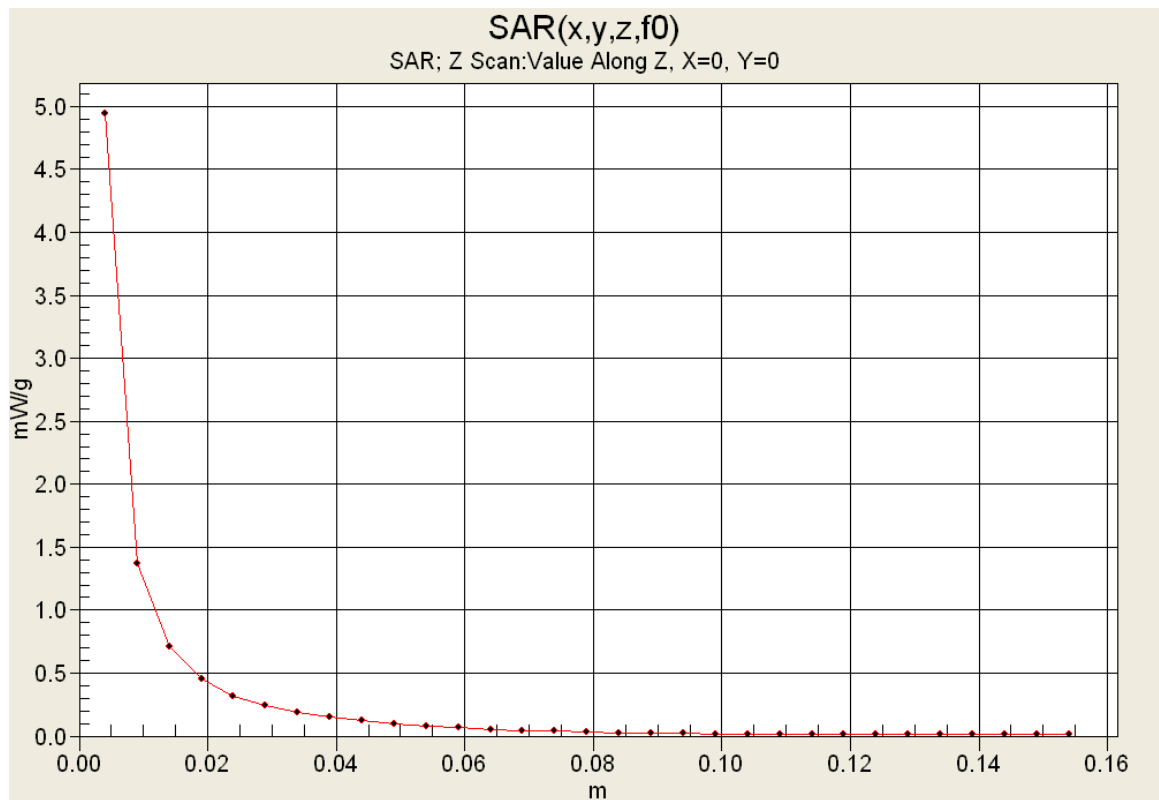

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 83 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B29

Date Tested: 10/20/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.788$ mho/m; $\epsilon_r = 63.9$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.05 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 35.9 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 9.28 W/kg

SAR(1 g) = 3.56 mW/g; SAR(10 g) = 1.39 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.62 mW/g

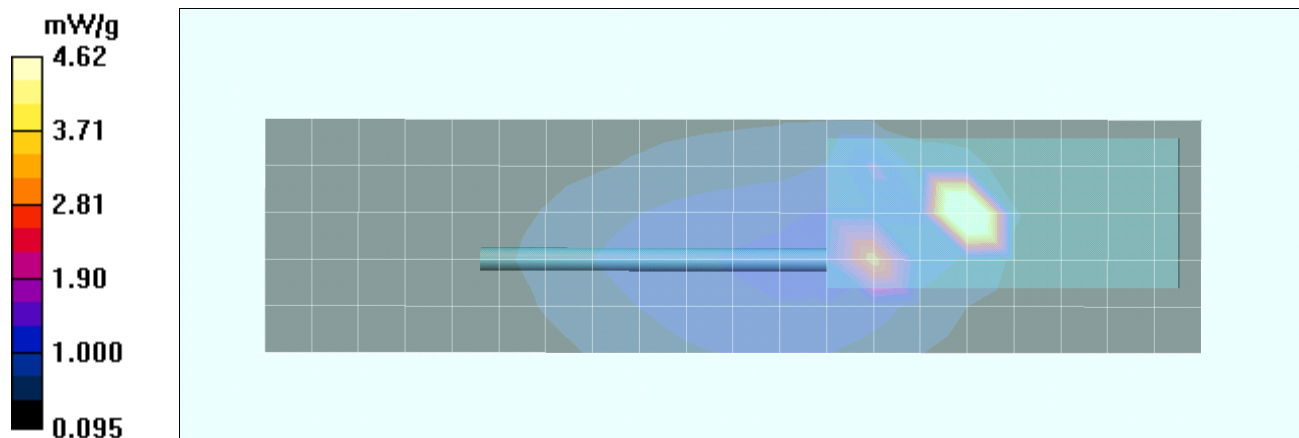

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 84 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B30

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.788 \text{ mho/m}$; $\epsilon_r = 63.8$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.141 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 9.97 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.097 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.139 mW/g

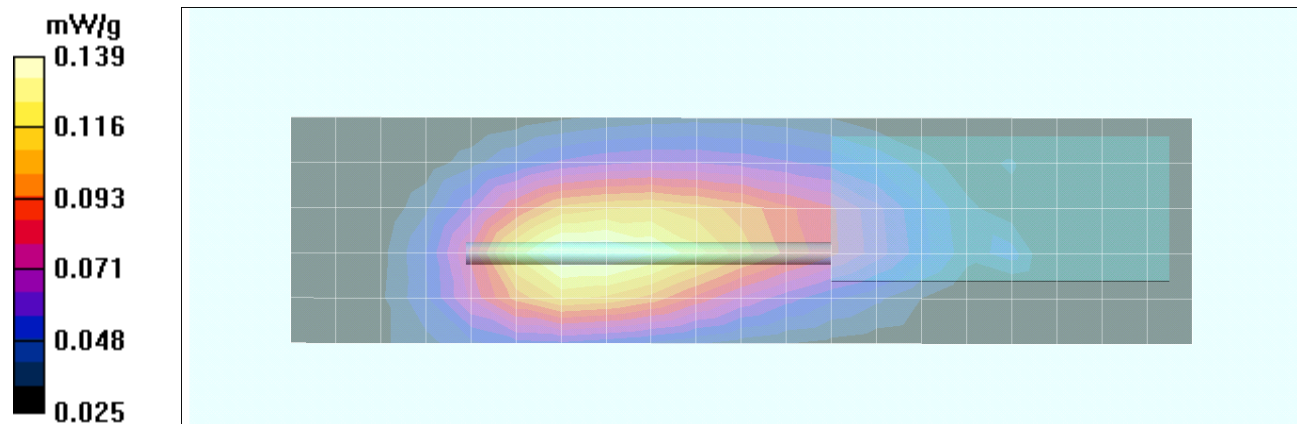

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 85 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B31

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.772$ mho/m; $\epsilon_r = 63.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.532 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 24.4 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.377 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.512 mW/g

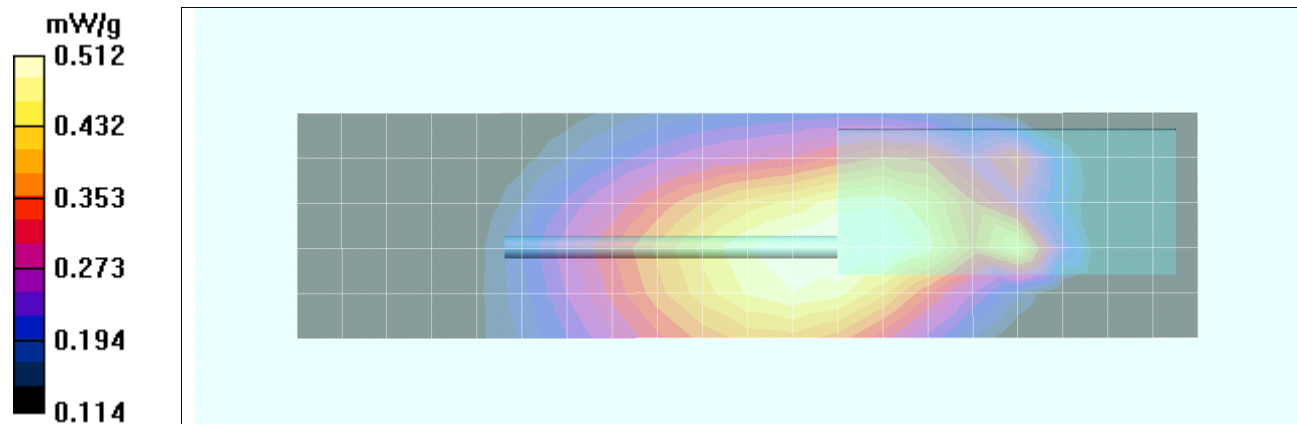

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 86 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B32

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.270 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.6 V/m; Power Drift = -0.227 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.192 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.265 mW/g

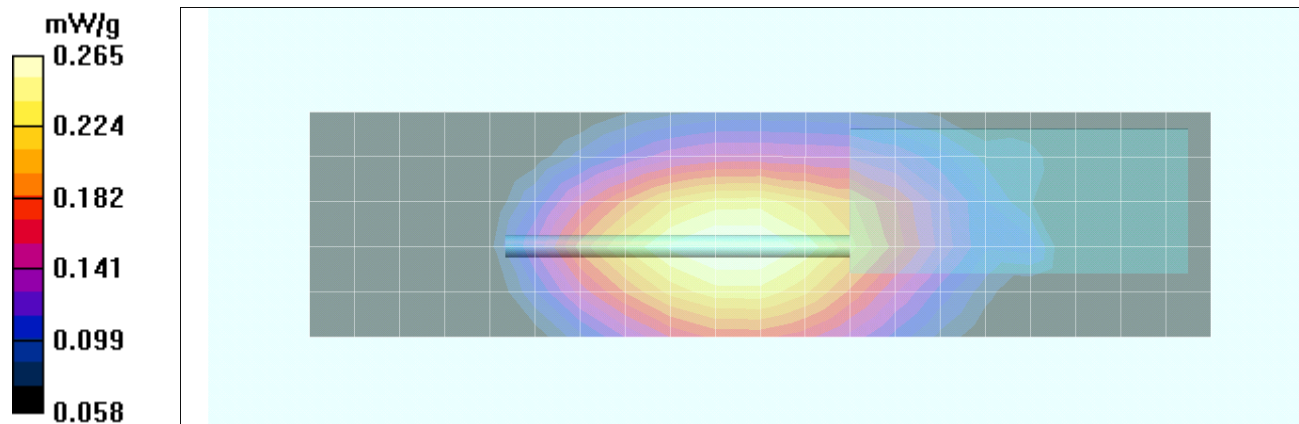

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 87 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B33

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.42 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 36.9 V/m; Power Drift = -0.210 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.33 mW/g; SAR(10 g) = 1 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.39 mW/g

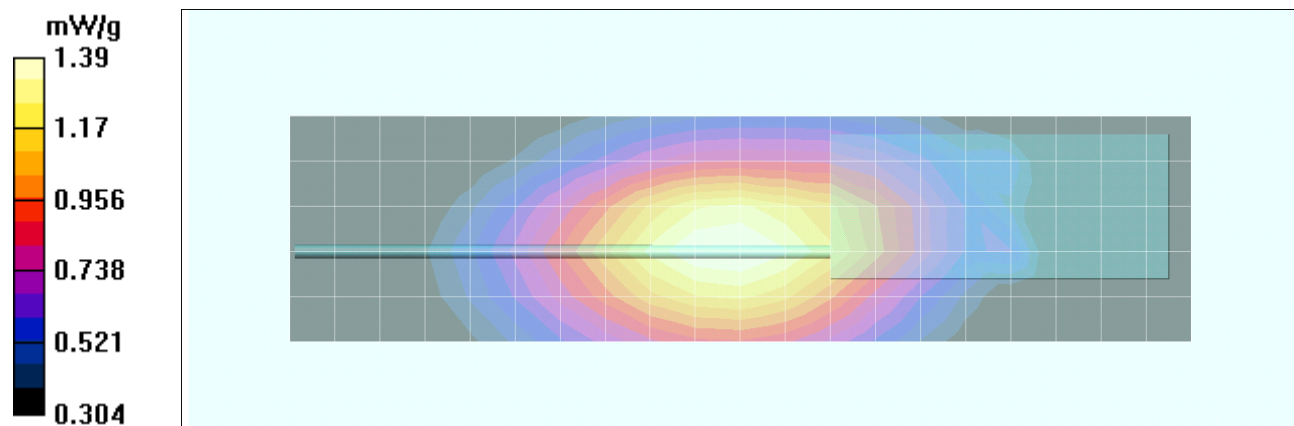

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 88 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B34

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.936 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 35.6 V/m; Power Drift = -1.58 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.657 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.905 mW/g

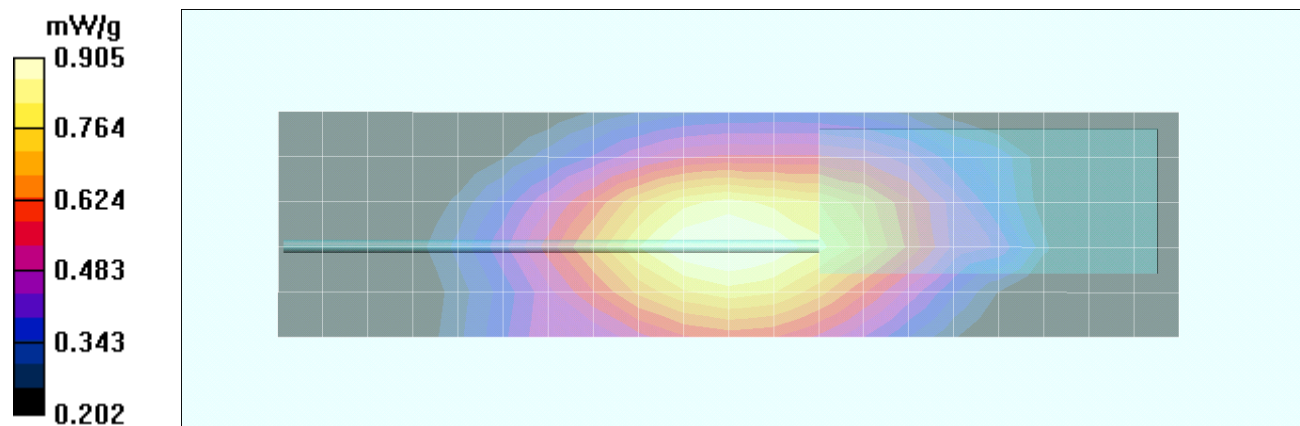

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 89 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B35

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.24 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 35.4 V/m; Power Drift = -1.55 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.851 mW/g; SAR(10 g) = 0.646 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.883 mW/g

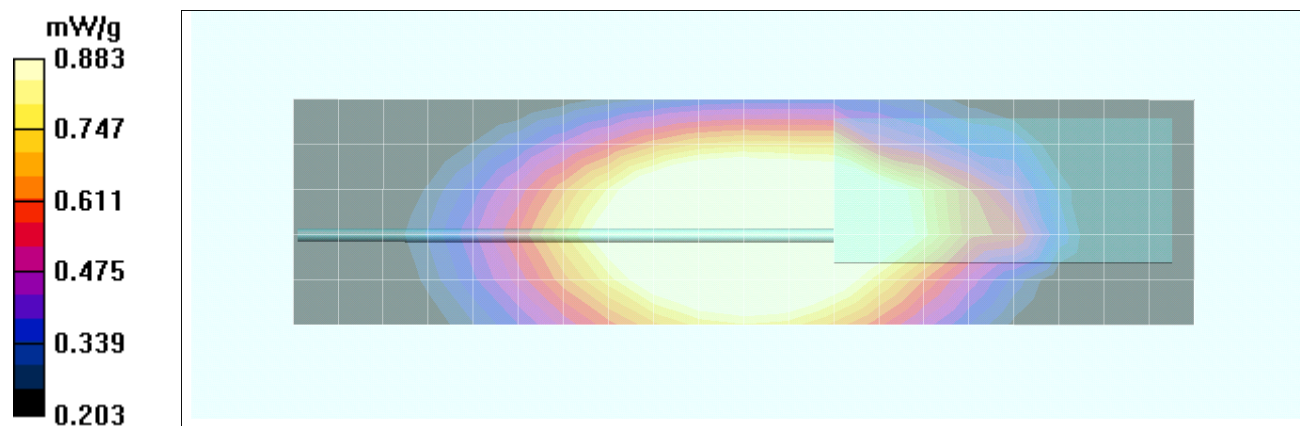

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 90 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B36

Date Tested: 12/07/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.39 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 36.9 V/m; Power Drift = -1.57 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.712 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.988 mW/g

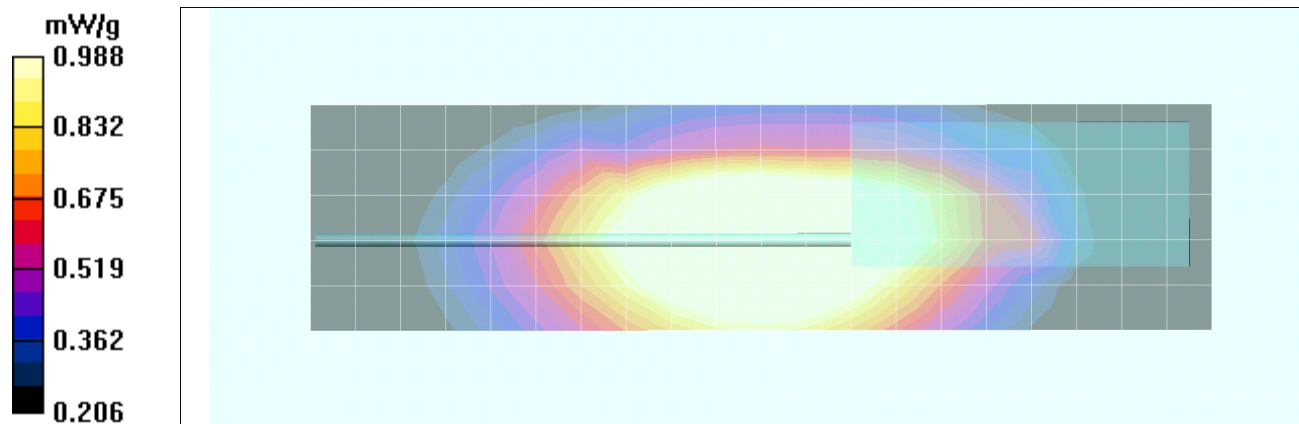

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 91 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B37

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.598 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 19.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.387 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.597 mW/g

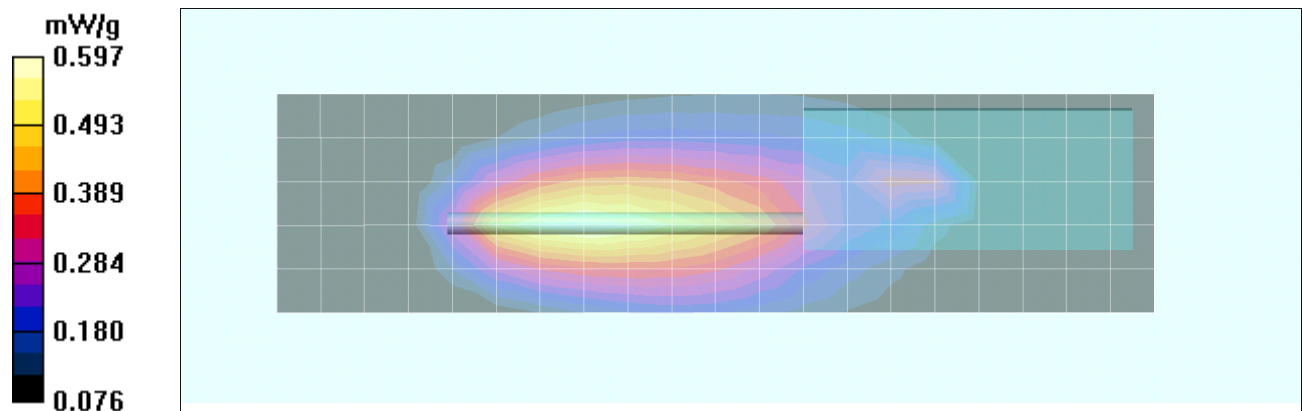

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 92 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B38

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.77 \text{ mho/m}$; $\epsilon_r = 63.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.4 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 50.4 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 39.8 W/kg

SAR(1 g) = 8.56 mW/g; SAR(10 g) = 3.71 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 7.91 mW/g

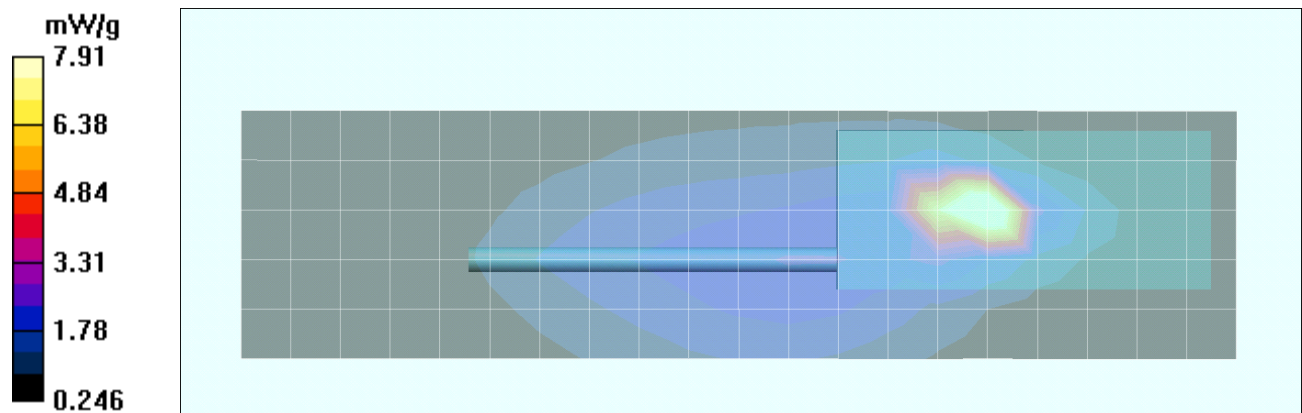

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 93 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Z-axis Scan

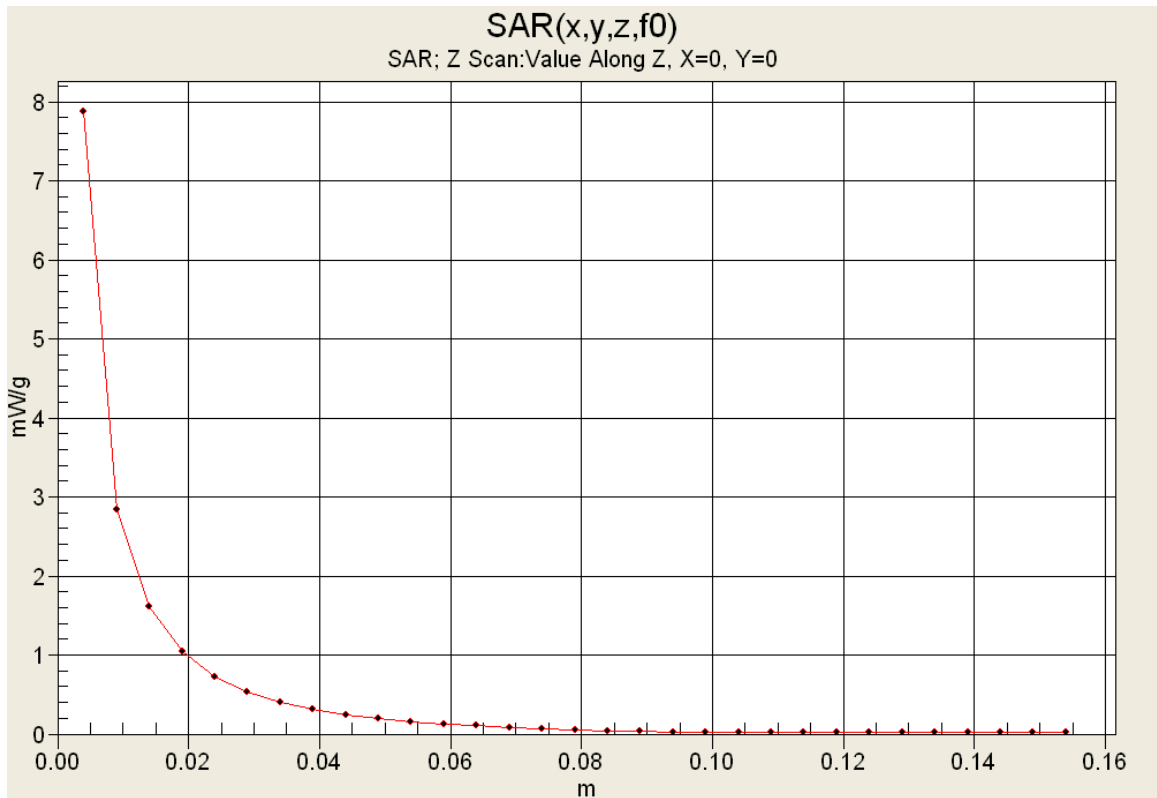

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 94 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B39

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.360 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.8 V/m; Power Drift = -0.313 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.245 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.353 mW/g

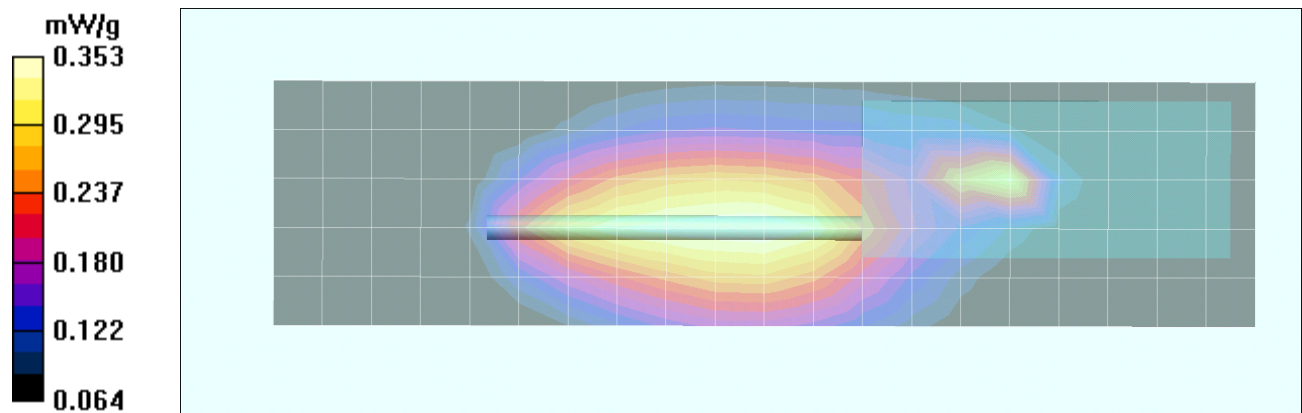

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 95 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B40

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.35 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.8 V/m; Power Drift = -0.281 dB

Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.628 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

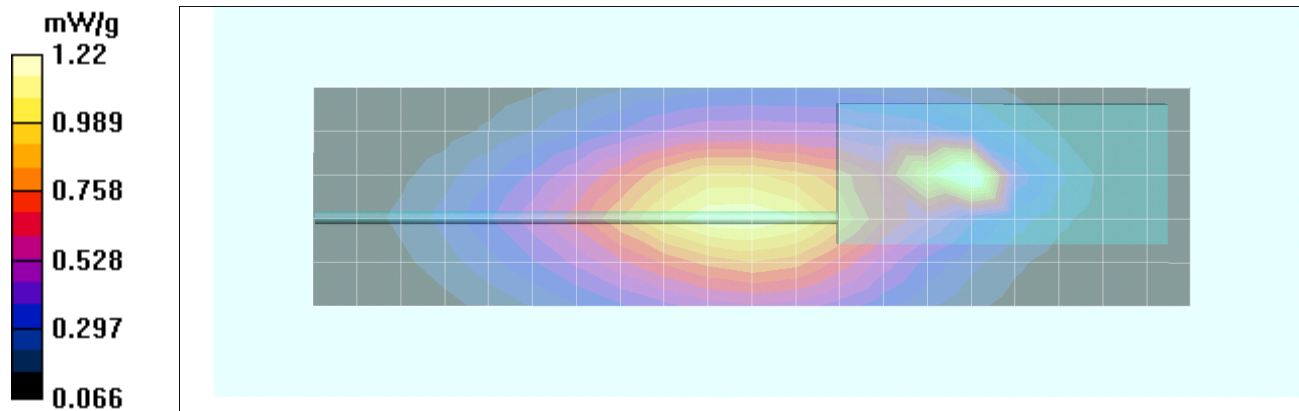

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 96 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B41

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 64.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.380 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 19.3 V/m; Power Drift = -0.517 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.253 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.345 mW/g

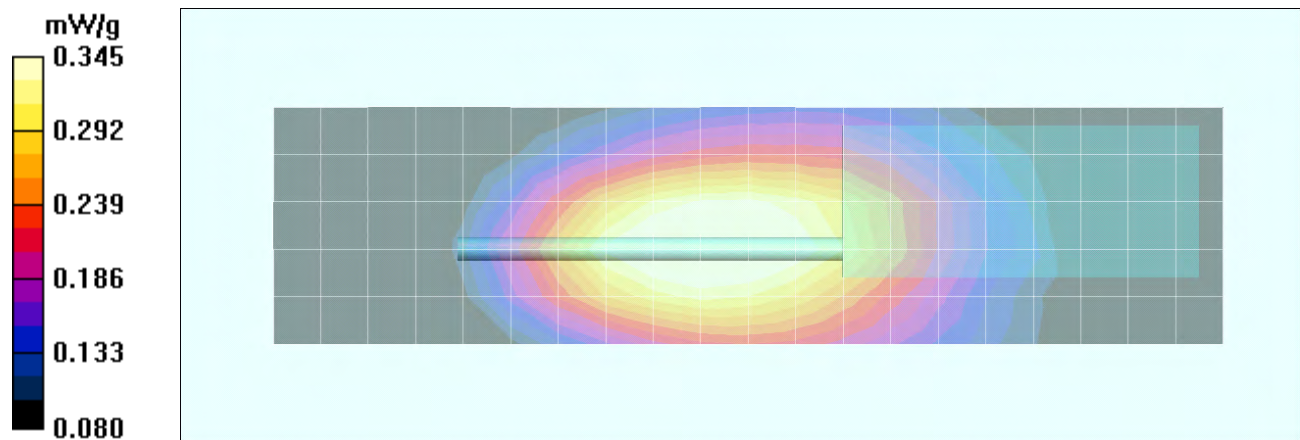

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 97 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B42

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.788 \text{ mho/m}$; $\epsilon_r = 63.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.303 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.1 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.212 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.288 mW/g

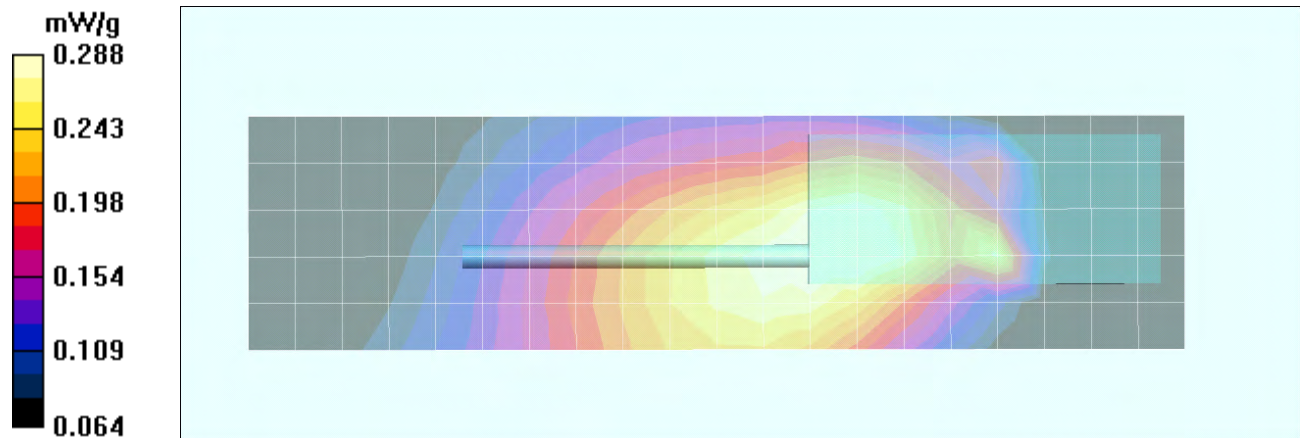

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 98 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B43

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4$ MHz; $\sigma = 0.793$ mho/m; $\epsilon_r = 63.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.203 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.7 V/m; Power Drift = -0.352 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.141 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.189 mW/g

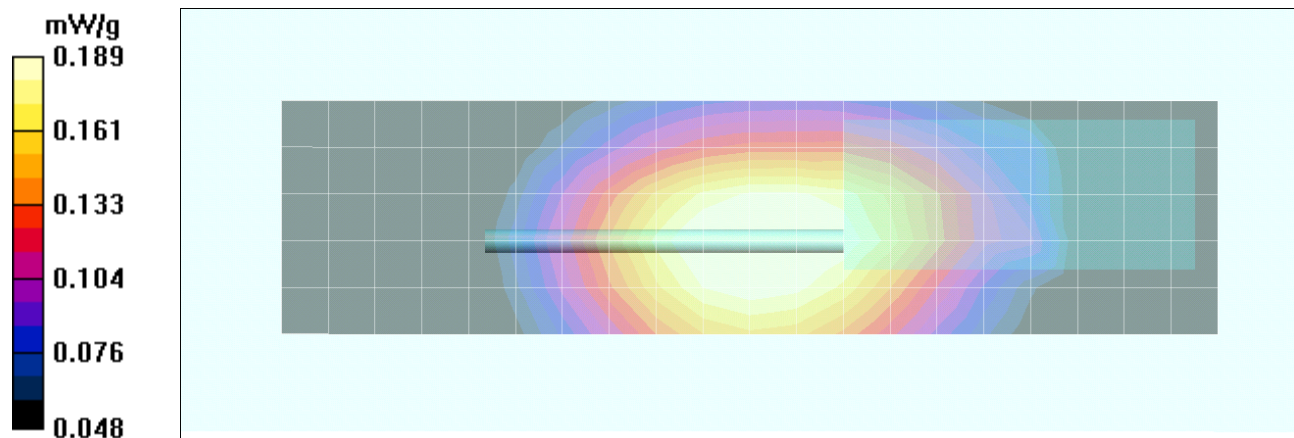

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 99 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B44

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4$ MHz; $\sigma = 0.793$ mho/m; $\epsilon_r = 63.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.23 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 36.4 V/m; Power Drift = -0.234 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.862 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.16 mW/g

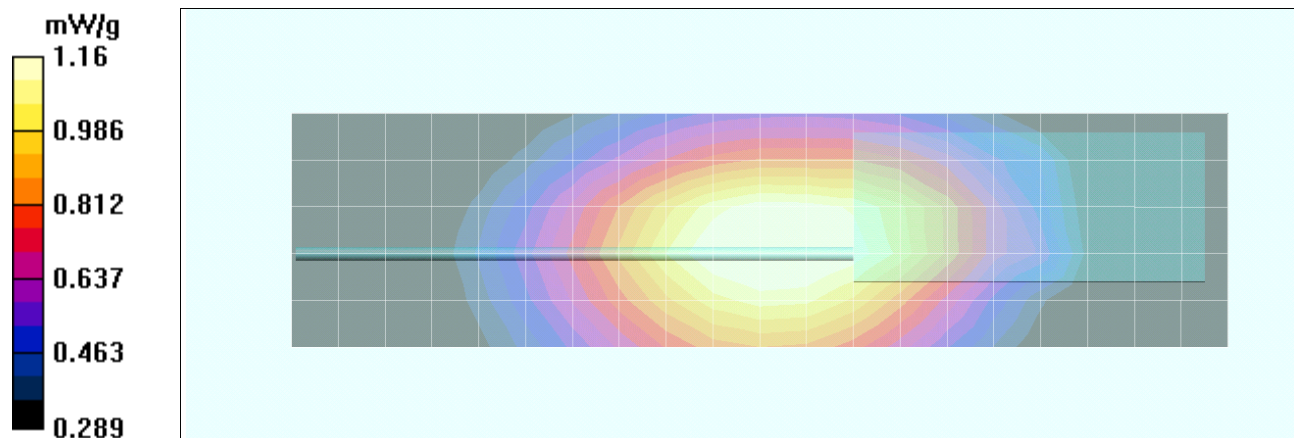

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 100 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B45

Date Tested: 10/21/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.76 \text{ mho/m}$; $\epsilon_r = 62.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.240 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.5 V/m; Power Drift = -0.303 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.168 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.229 mW/g

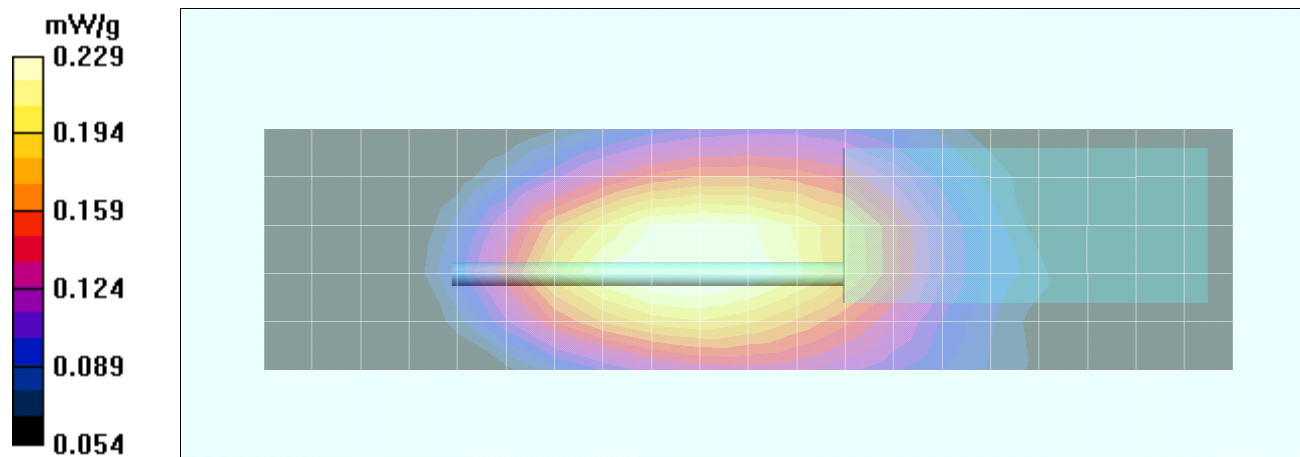

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 101 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B46

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.788$ mho/m; $\epsilon_r = 63.9$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.313 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 18.4 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.141 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.302 mW/g

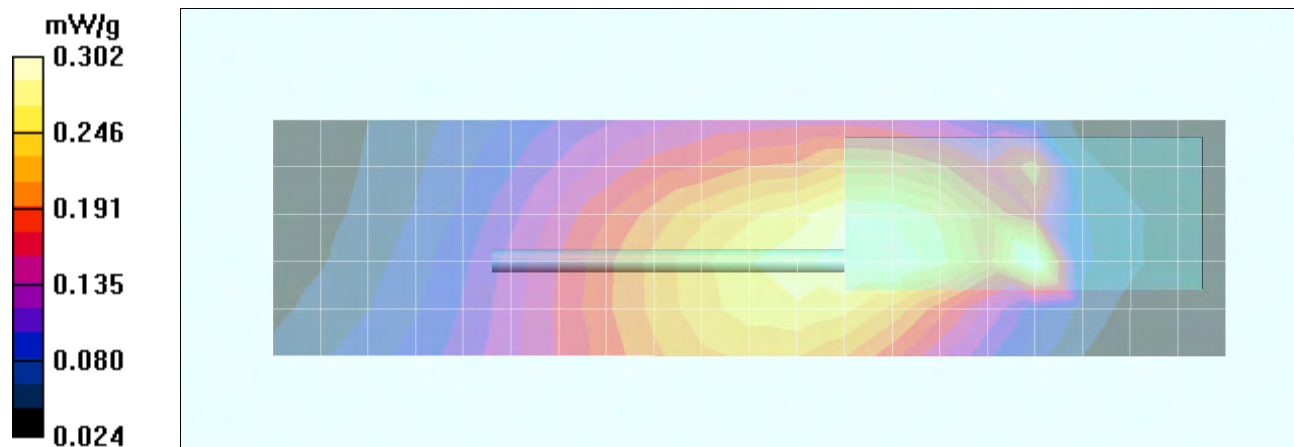

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 102 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B47

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.793 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.182 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 14.0 V/m; Power Drift = -0.300 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.128 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.170 mW/g

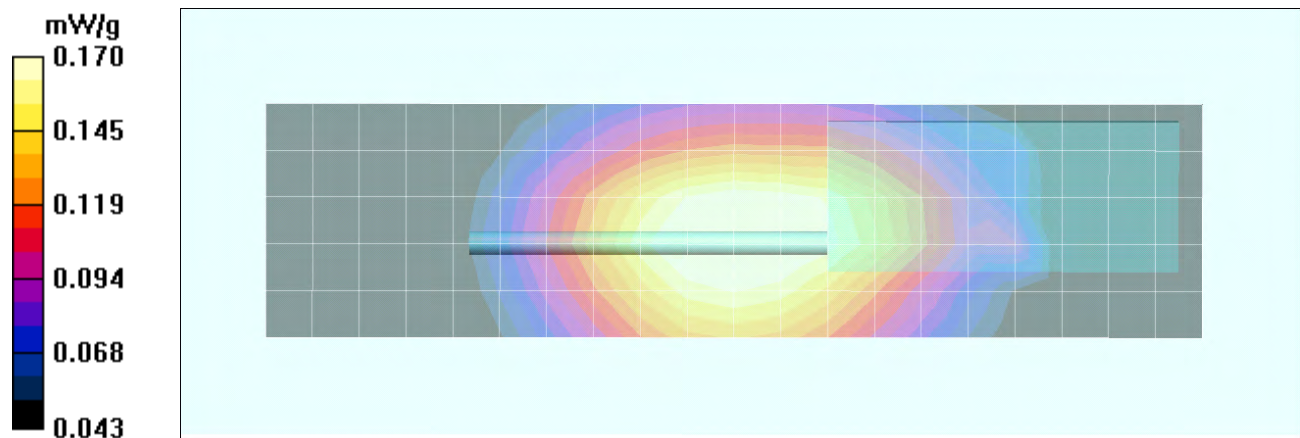

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 103 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B48

Date Tested: 10/21/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.767 \text{ mho/m}$; $\epsilon_r = 63$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.685 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 27.7 V/m; Power Drift = -0.308 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.485 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.643 mW/g

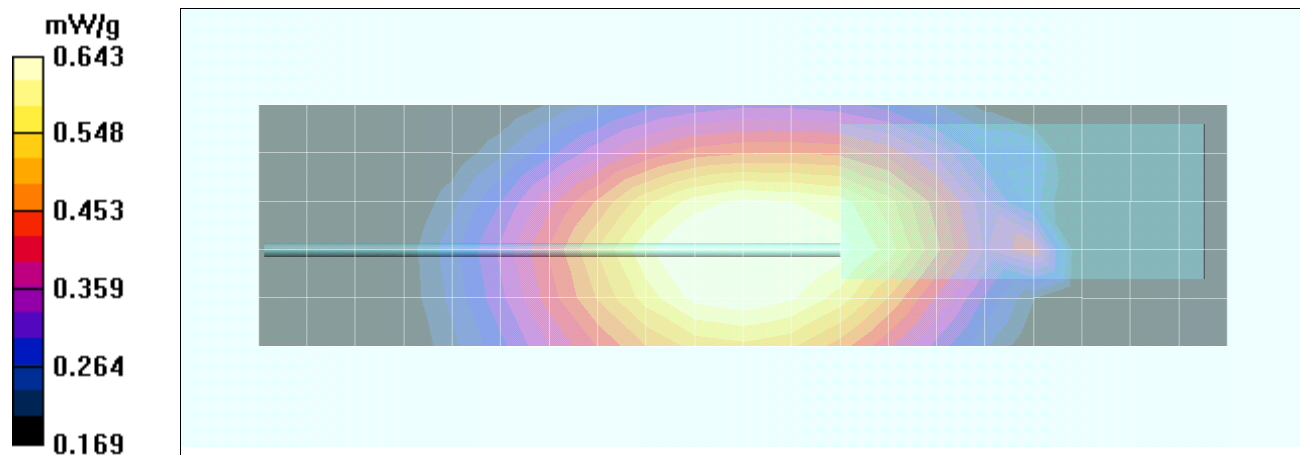

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 104 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B49

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 64.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.646 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 22.2 V/m; Power Drift = -1.97 dB

Peak SAR (extrapolated) = 0.756 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.277 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.402 mW/g

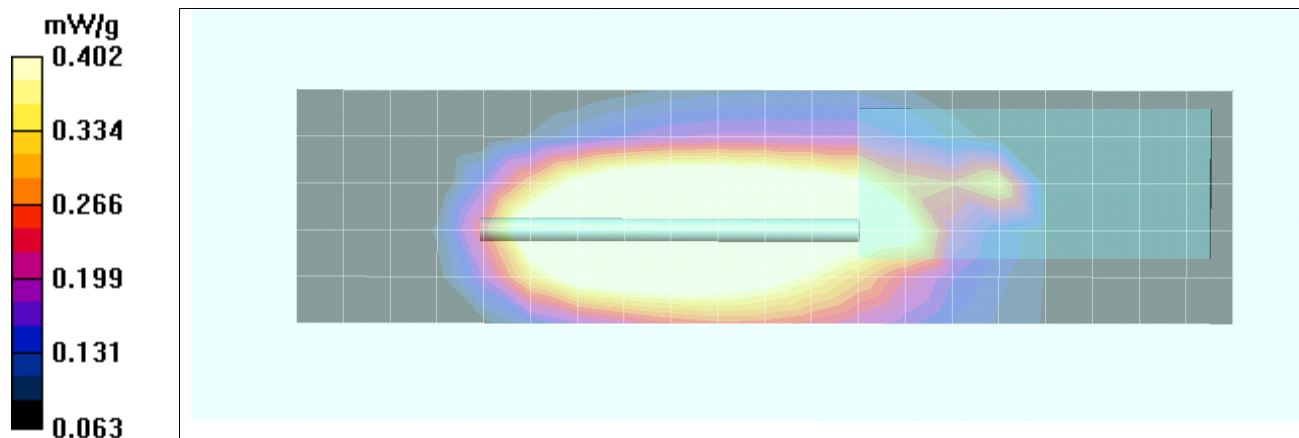

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 105 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B50

Date Tested: 10/20/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.6C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.788$ mho/m; $\epsilon_r = 63.9$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.46 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 22.9 V/m; Power Drift = -0.464 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 1.35 mW/g; SAR(10 g) = 0.512 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.71 mW/g

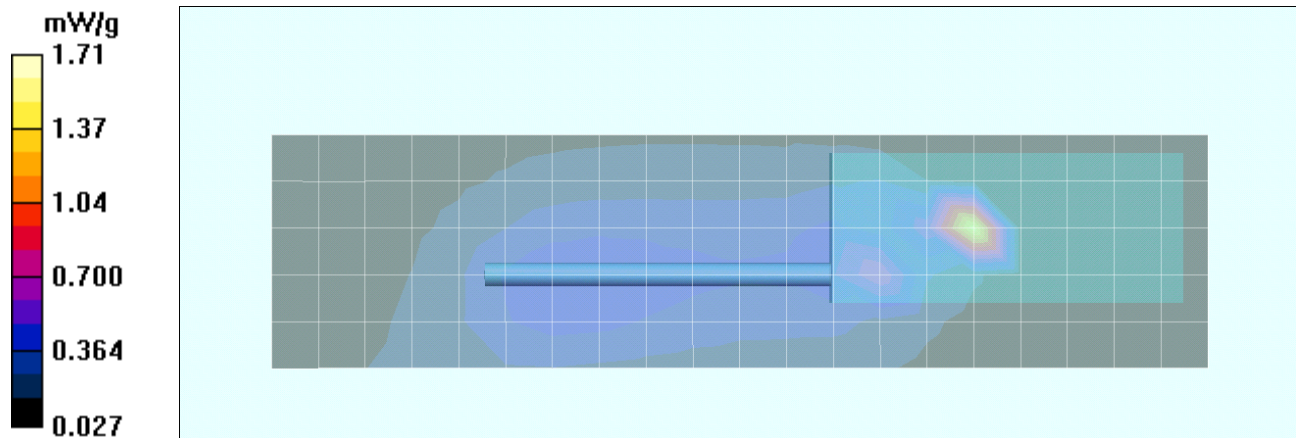

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 106 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B51

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.383 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.4 V/m; Power Drift = -0.372 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.157 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.437 mW/g

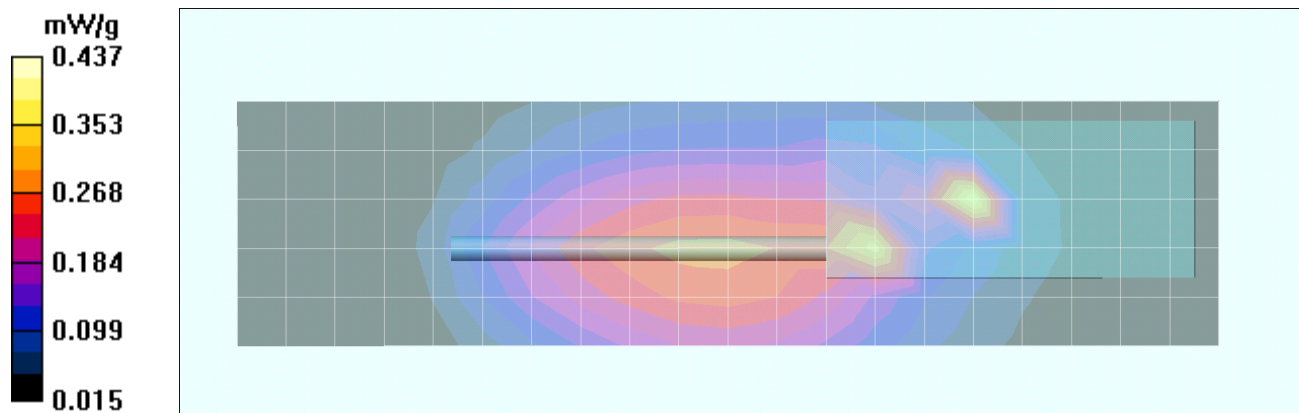

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 107 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B52

Date Tested: 10/19/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 21.0C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.783 \text{ mho/m}$; $\epsilon_r = 62$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.61 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 37.6 V/m; Power Drift = -1.95 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.527 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.45 mW/g

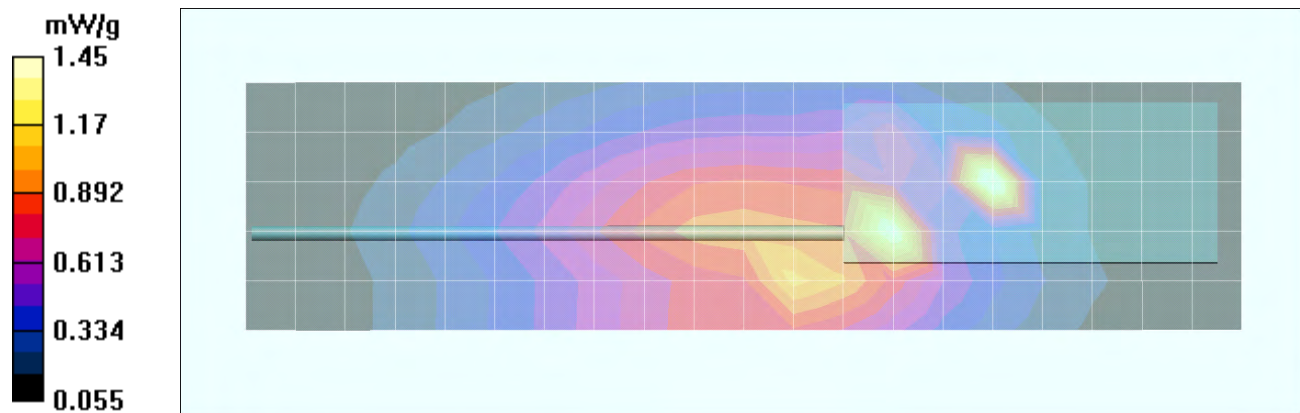

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 108 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B53

Date Tested: 12/07/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 144 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 144 \text{ MHz}$; $\sigma = 0.788 \text{ mho/m}$; $\epsilon_r = 63.8$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.422 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.7 V/m; Power Drift = -2.05 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.194 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.369 mW/g

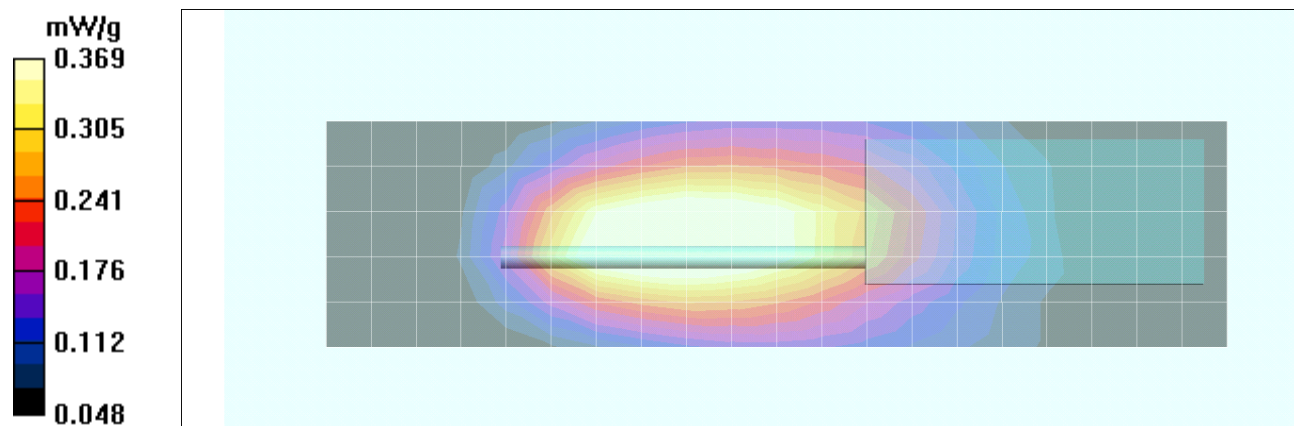

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 109 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B54

Date Tested: 12/07/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.772 \text{ mho/m}$; $\epsilon_r = 63.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.670 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 27.8 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.491 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.663 mW/g

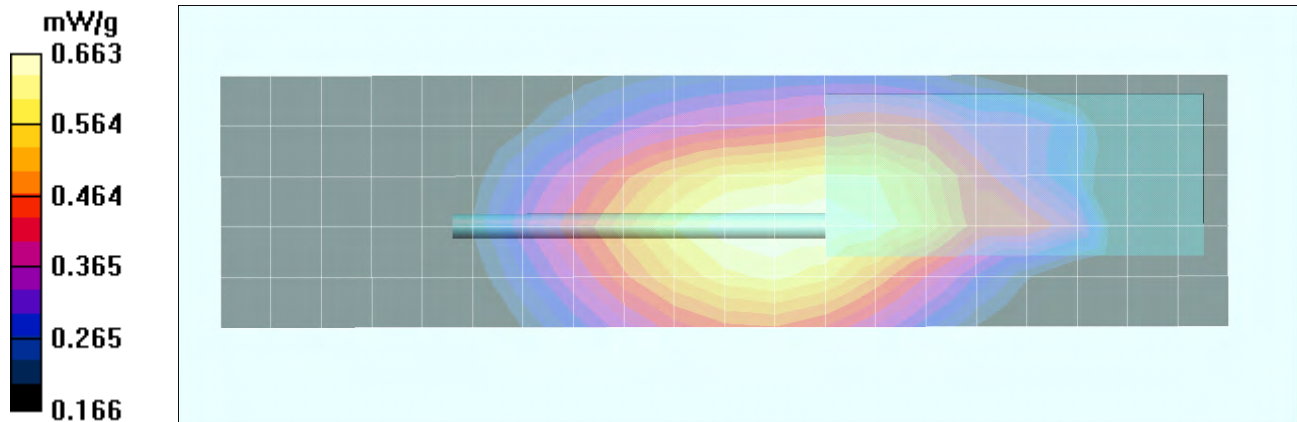

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 110 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot B55

Date Tested: 12/07/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.276 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.8 V/m; Power Drift = -0.340 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.191 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.262 mW/g

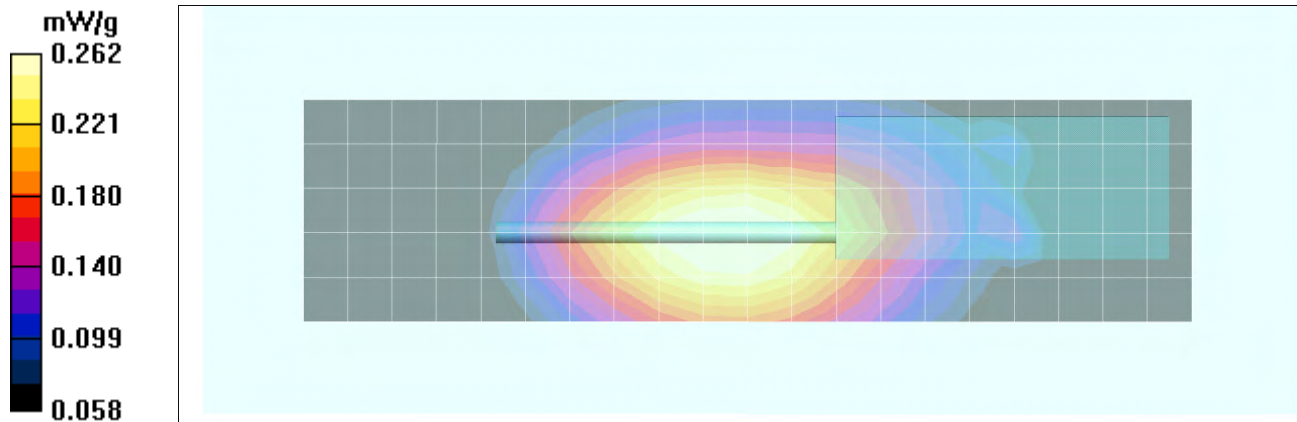

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 111 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Body SAR Plot B56

Date Tested: 12/07/2011

DUT: Harris XG-25P (SCAN); Type: Portable VHF PTT Radio Transceiver; Serial: No.26

Ambient Temp: 22C; Fluid Temp: 22.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication CW

Frequency: 173.4 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 173.4 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 62.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.44 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 37.0 V/m; Power Drift = -1.82 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 1.03 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 1.40 mW/g

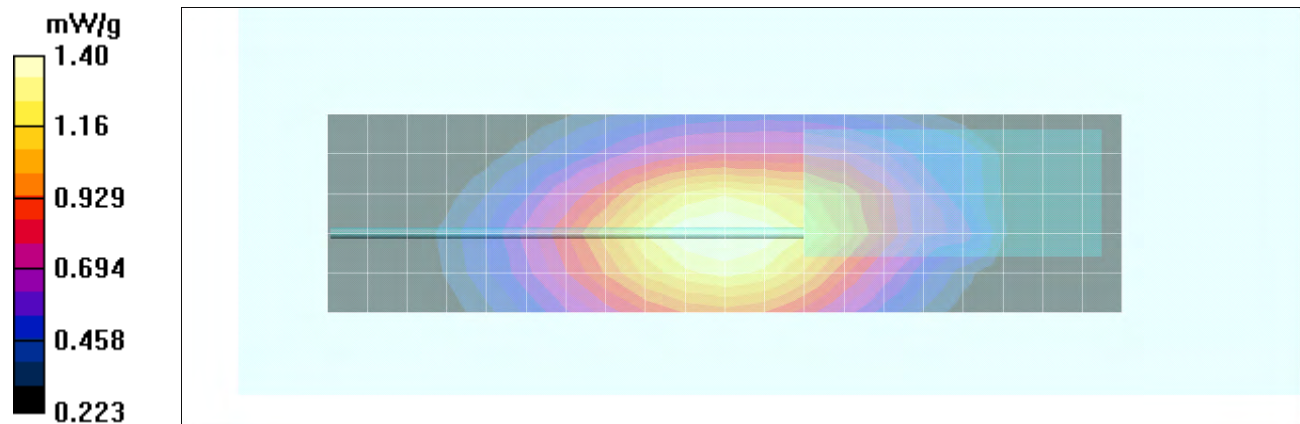

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 112 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Z-axis Scan

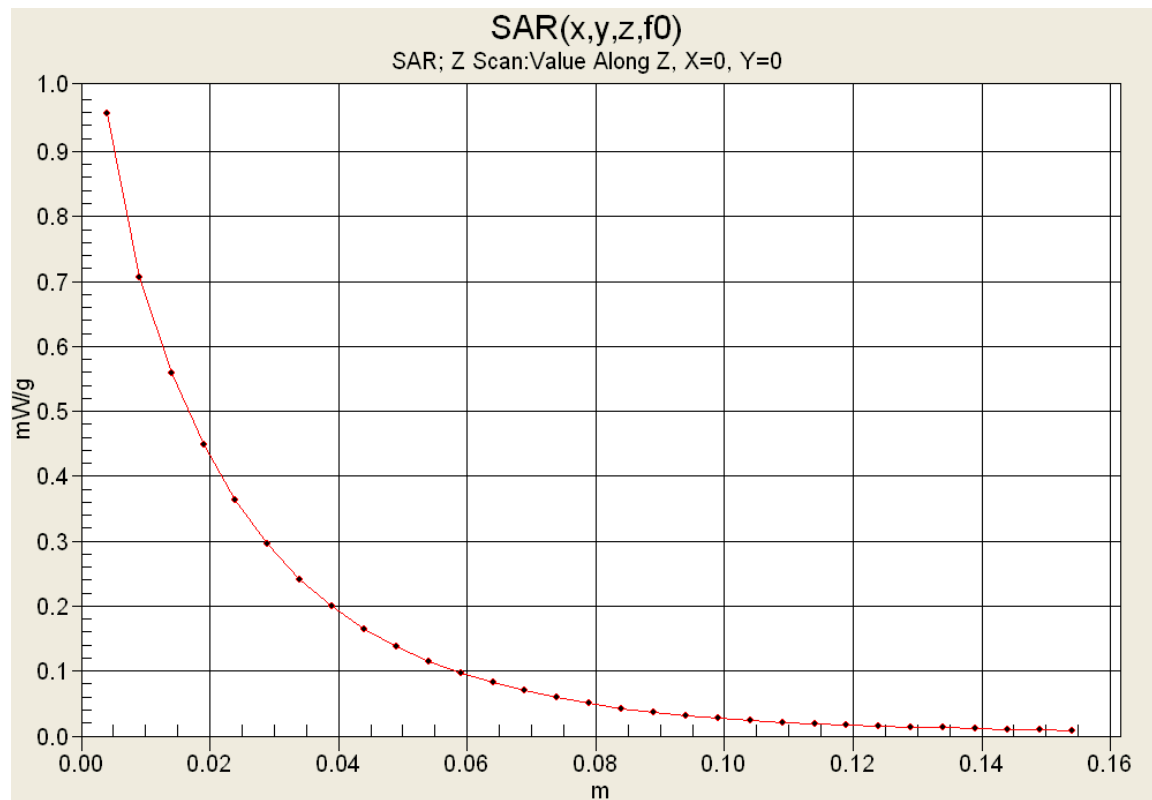

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 113 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A1

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.81 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 67.3 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 9.01 mW/g; SAR(10 g) = 4.22 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.09 mW/g

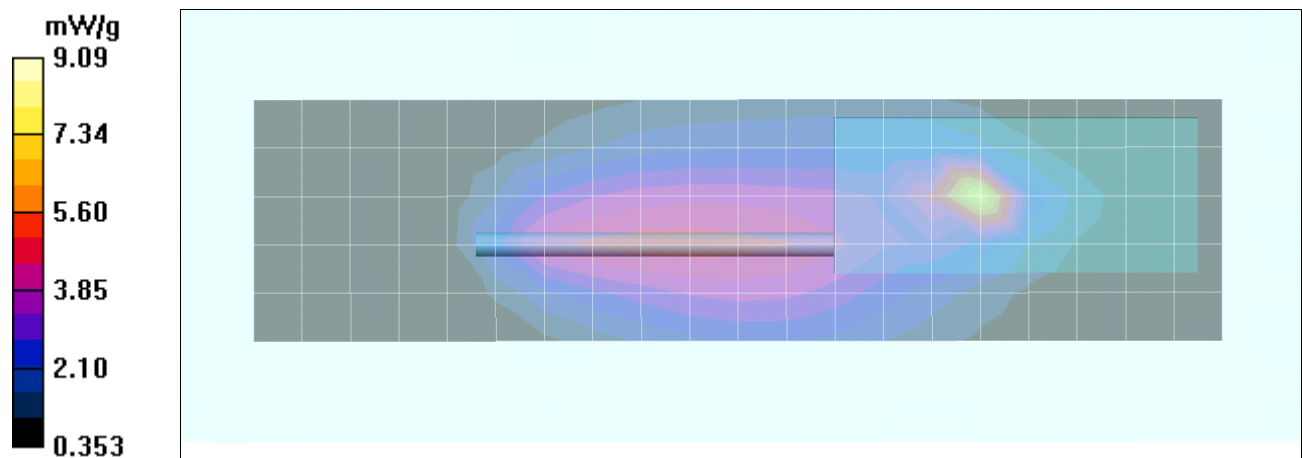

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 114 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A2

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.03 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 66.9 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 8.52 mW/g; SAR(10 g) = 4.1 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.42 mW/g

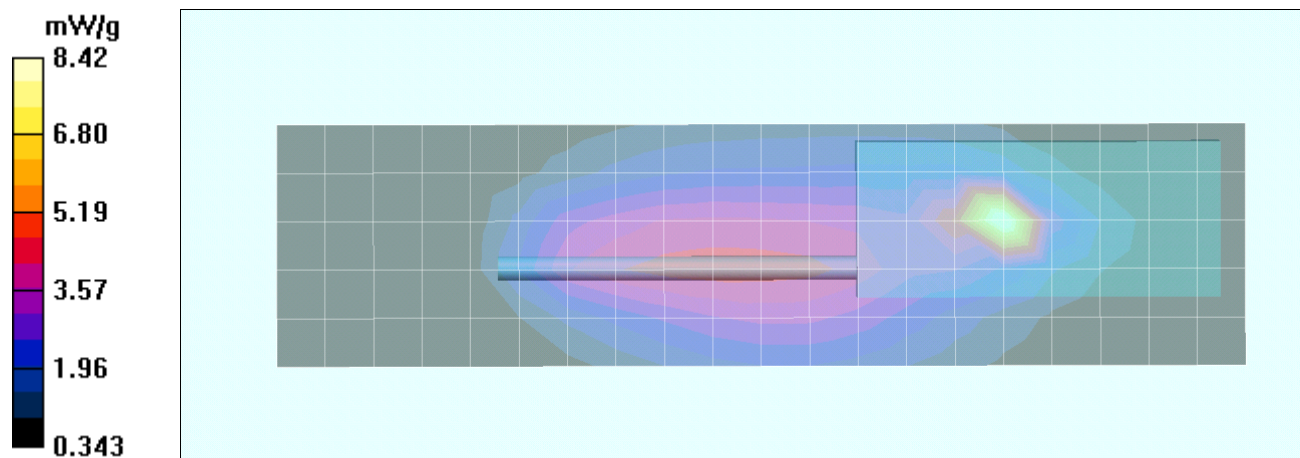

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 115 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A3

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.2 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 68.4 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 9.44 mW/g; SAR(10 g) = 4.42 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 9.35 mW/g

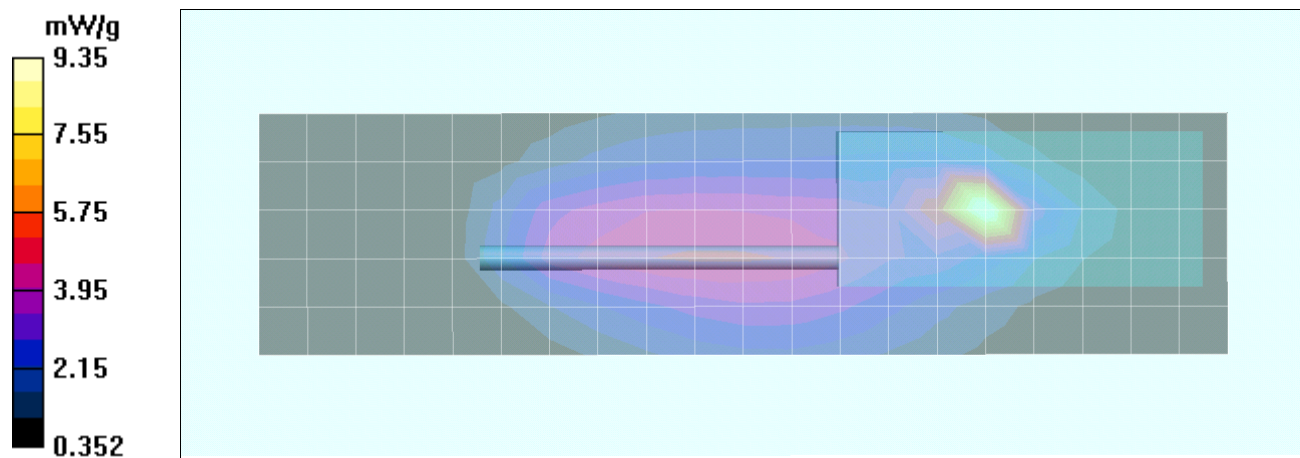

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 116 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Z-axis Scan

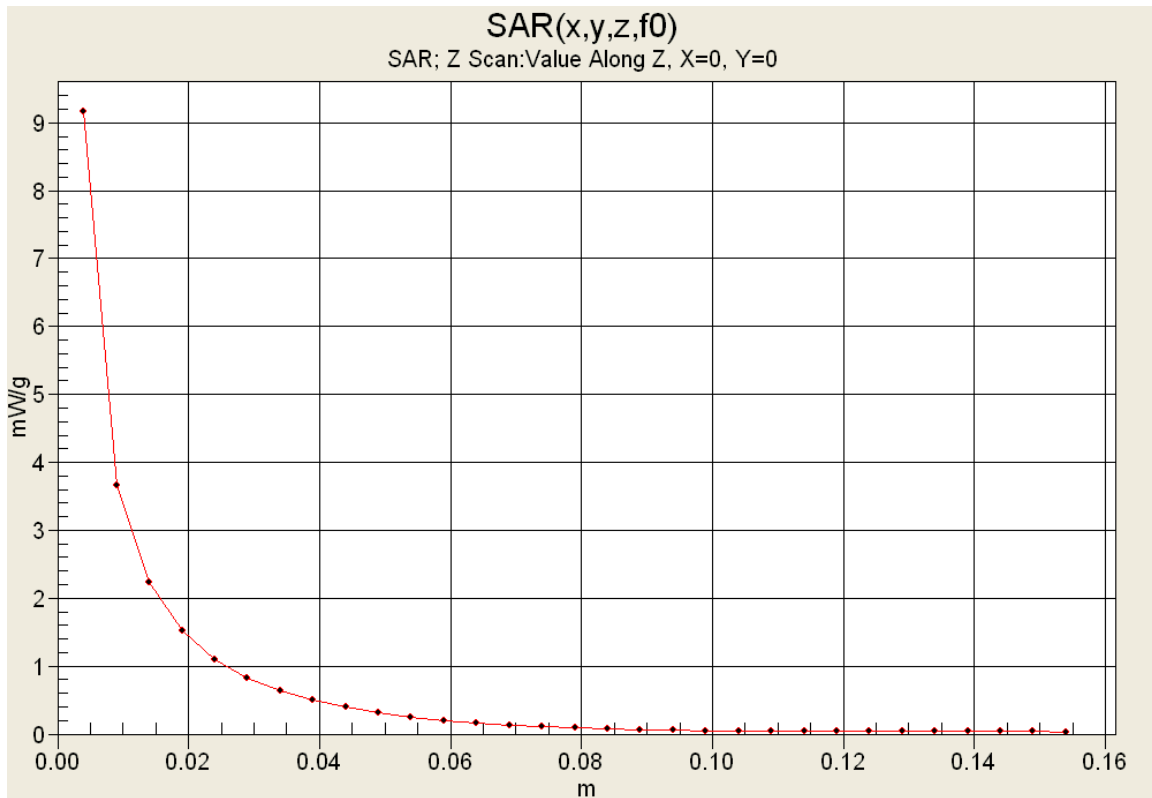

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 117 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot A4

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 11.1 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 65.1 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 9.3 mW/g; SAR(10 g) = 4.33 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.60 mW/g

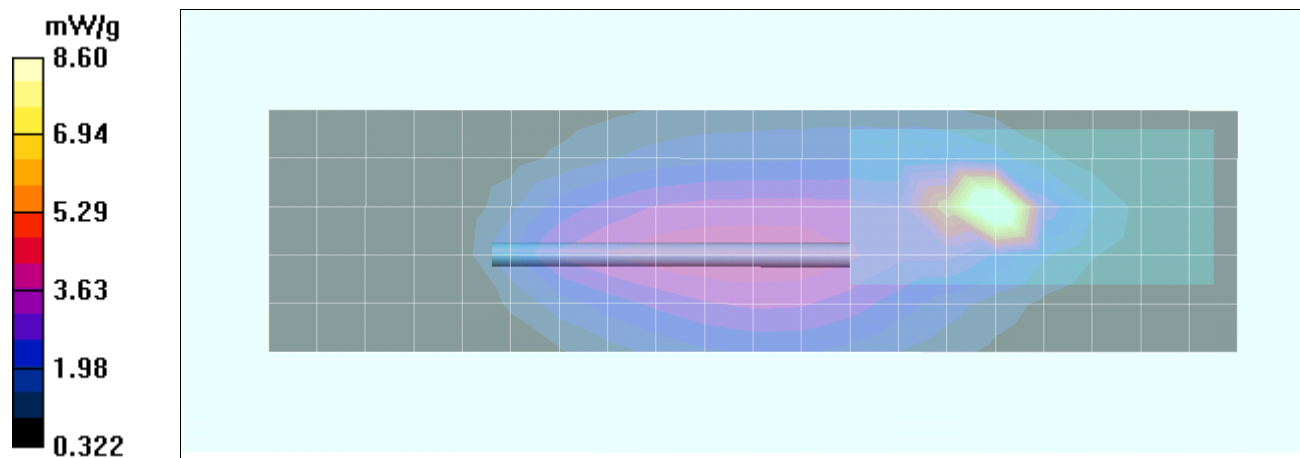

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 118 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A5

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.75 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 65.7 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.15 mW/g; SAR(10 g) = 3.86 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.69 mW/g

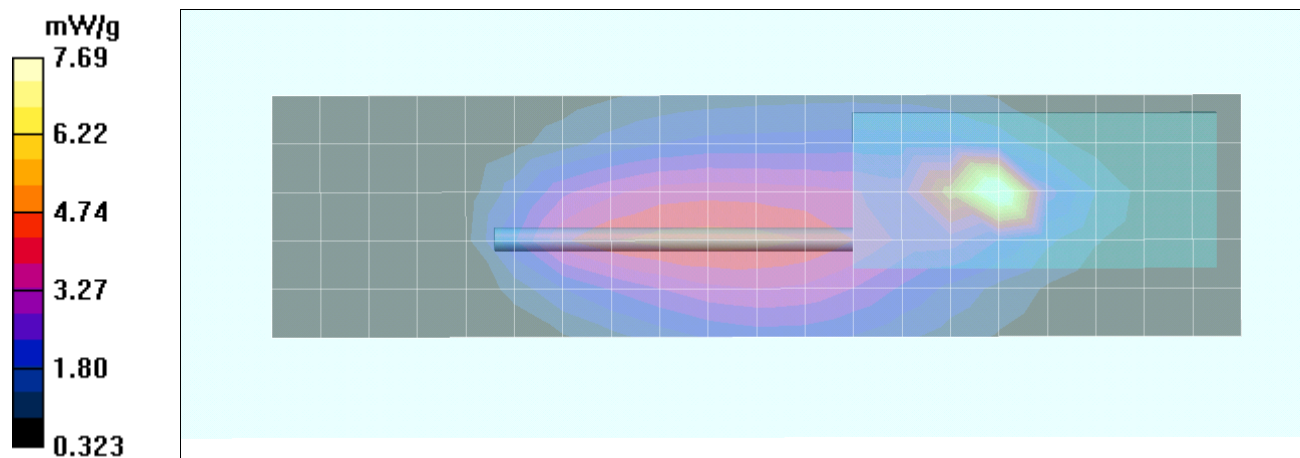

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 119 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A6

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.25 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 62.2 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 7.48 mW/g; SAR(10 g) = 3.52 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.06 mW/g

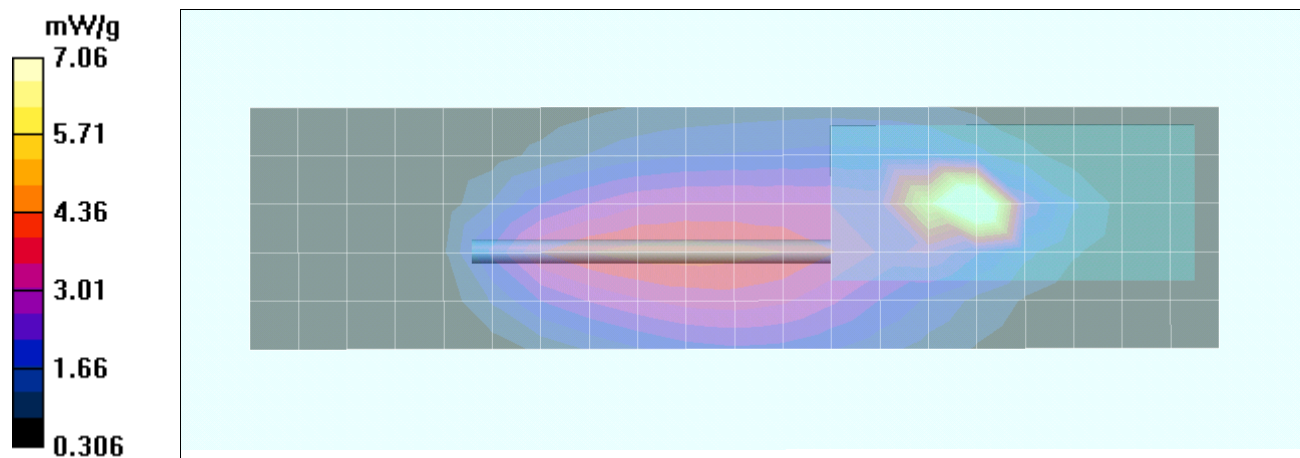

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 120 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot A7

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8$ MHz; $\sigma = 0.762$ mho/m; $\epsilon_r = 64$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: dx=20mm, dy=20mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.80 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 65.9 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 30.9 W/kg

SAR(1 g) = 8.07 mW/g; SAR(10 g) = 3.89 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.60 mW/g

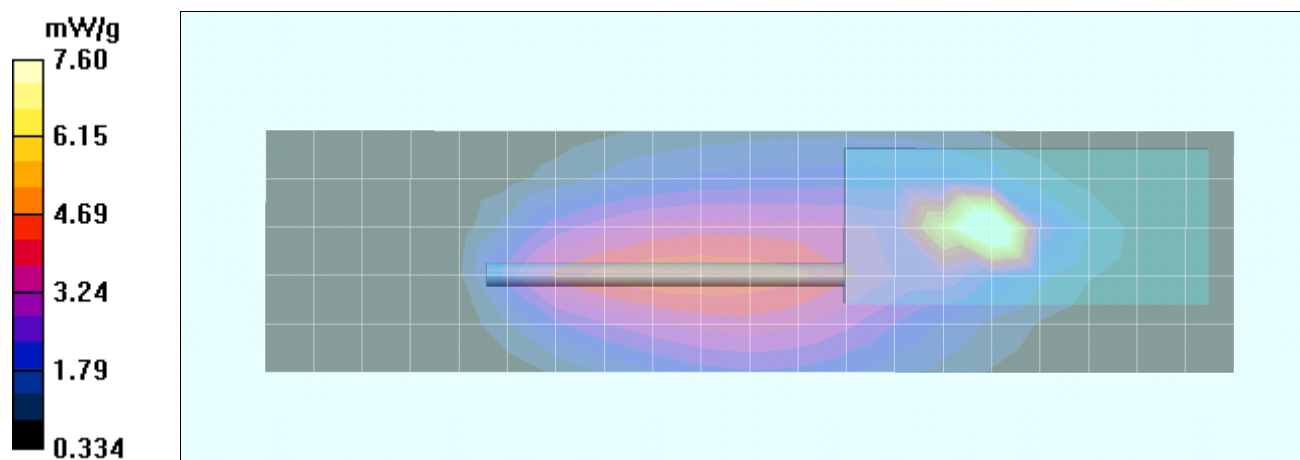

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 121 of 203

	<u>Date(s) of Evaluation</u> 10/17-21, 12/07, 2011	<u>Test Report Serial No.</u> 092811OWD-T1126-S90V	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				

Body SAR Plot A8

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 12.0 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 61.4 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 7.58 mW/g; SAR(10 g) = 3.57 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.57 mW/g

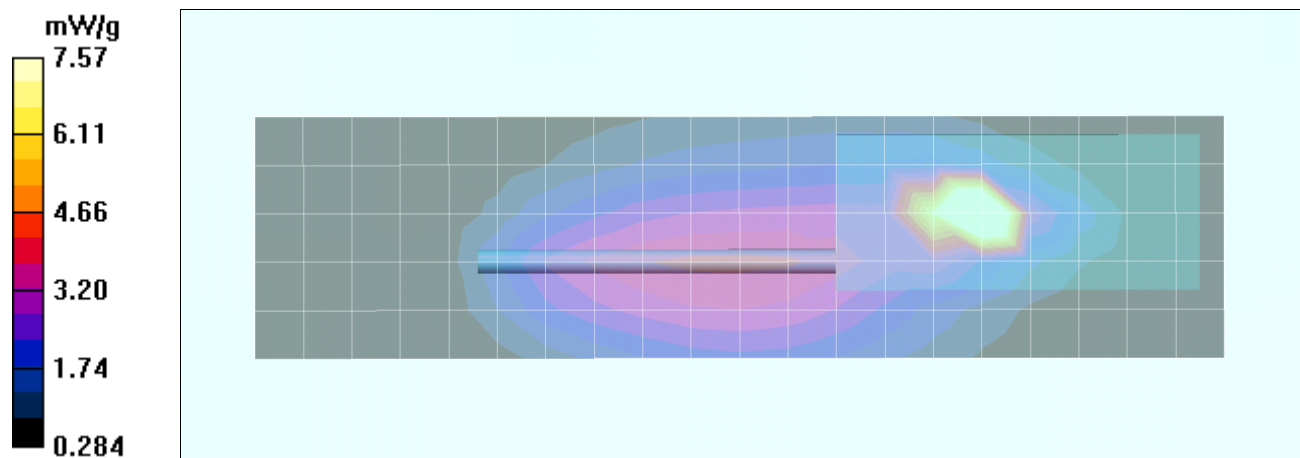

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 122 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A9

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.4 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 66.0 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 37.0 W/kg

SAR(1 g) = 8.82 mW/g; SAR(10 g) = 4.1 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.38 mW/g

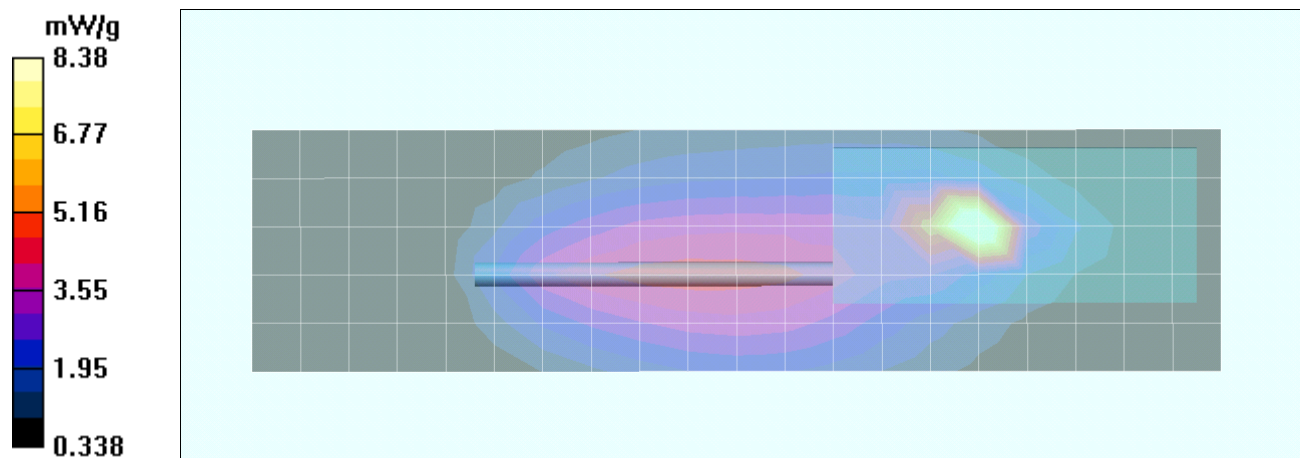

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 123 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A10

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 10.6 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 65.3 V/m; Power Drift = -0.244 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.5 mW/g; SAR(10 g) = 3.97 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 7.91 mW/g

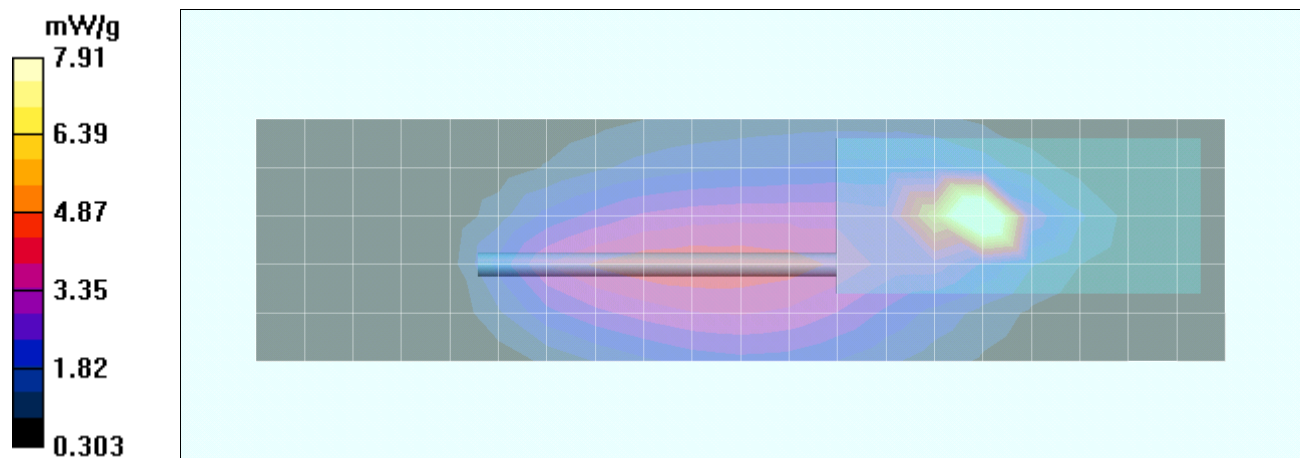

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 124 of 203

	Date(s) of Evaluation 10/17-21, 12/07, 2011	Test Report Serial No. 092811OWD-T1126-S90V	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot A11

Date Tested: 10/21/2011

DUT: Harris XG-25P (SYSTEM); Type: Portable VHF PTT Radio Transceiver; Serial: No.19

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication CW

Frequency: 150.8 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used (interpolated): $f = 150.8 \text{ MHz}$; $\sigma = 0.762 \text{ mho/m}$; $\epsilon_r = 64$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (6x21x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 12.8 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 63.4 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 37.1 W/kg

SAR(1 g) = 9.26 mW/g; SAR(10 g) = 4.22 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.17 mW/g

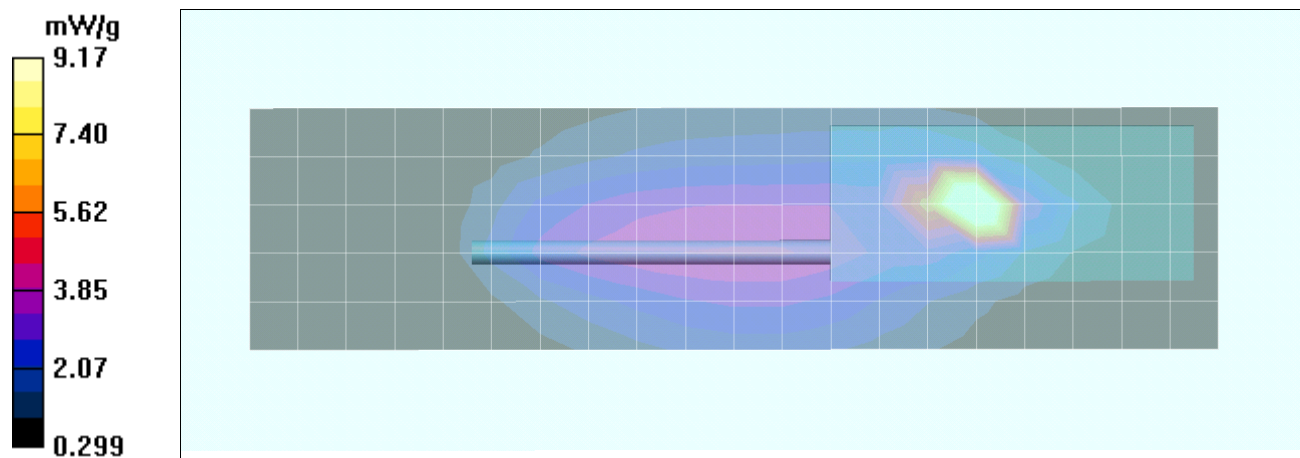

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0072-E	IC:	3636B-0072	
DUT Type:	Portable VHF PTT Radio Transceiver	Model:	XG-25P VHF	Freq.:	138 - 174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 125 of 203