



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



DECLARATION OF COMPLIANCE		SAR RF EXPOSURE EVALUATION			FCC & IC C2PC				
Test Lab Information		Name	CELLTECH LABS INC.						
		Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada						
Test Lab Accreditation(s)		ISO 17025	A2LA Test Lab Certificate No. 2470.01						
Applicant Information		Name	HARRIS CORPORATION						
		Address	221 Jefferson Ridge Parkway, Lynchburg, VA 24501 U.S.A.						
Standard(s) Applied		FCC	47 CFR §2.1093						
		IC	Health Canada Safety Code 6						
Procedure(s) Applied		FCC	OET Bulletin 65, Supp. C	FCC	KDB 447498 D01v04; KDB 178919 D01v05r01				
		FCC	KDB 643646 D01v01r01		FCC	KDB Inquiry Tracking #863140, #235657			
		IC	RSS-102 Issue 4	IEEE	1528-2003	IEC 62209-2:2010			
Device Classification(s)		FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90						
		IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz) - RSS-119						
Device Identifier(s)		FCC ID:	OWDTR-0074-E						
		IC:	3636B-0074						
Application Type		Class II Permissive Change - Add XG-75 700/800 SCAN Model Variant (w/out DTMF Keypad)							
Date of Sample Receipt		August 30, 2011							
Dates of Evaluation		September 22-29 & December 5-6, 2011							
Device Description		Portable 700/800-Band Digital Push-To-Talk (PTT) Radio Transceiver							
Device Model(s)		XG-75 700/800	PN: RU-103895-001	MN: EVXG-PB78B	Scan (Black/Gray)	without DTMF			
			PN: RU-103895-003	MN: EVXG-PB78Y	Scan (Yellow/Black)	without DTMF			
Device Model(s) Tested		XG-75 7/800 (Scan)		S/N: XG-T2-D104 (Identical Prototype)		PN: RU-103895-001			
Test Sample Revision No.s		Hardware	Revision -						
		Firmware	R14B05						
Transmit Frequency Range(s)		FCC/IC	(1) 769-775 MHz	(2) 799-805 MHz	(3) 806-824 MHz	(4) 851-869 MHz			
Manufacturer's Rated Output Power		700 Band	2.9 Watts Nominal (Conducted)		Upper Tolerance Spec.	+ 0.05 Watts			
		800 Band	3.0 Watts Nominal (Conducted)		Upper Tolerance Spec.	+ 0.23 Watts			
Antenna Type(s) Tested		Antenna Accessory ID No. 1, 2 (See Section 7.0)							
Battery Type(s) Tested		Battery Accessory ID No. a, d (See Section 7.0)							
Body-worn Accessories Tested		Body-worn Accessory ID No. 1, 3, 4, 5 (See Section 7.0)							
Audio Accessories Tested		Audio Accessory ID No. G7a (See Section 7.0)							
Max. SAR Level(s) Evaluated		Face-held	1.81 W/kg	1g	50% PTT duty factor	Occupational / Controlled Exposure			
		Body-worn	3.08 W/kg	1g	50% PTT duty factor	Occupational / Controlled Exposure			
FCC/IC Spatial Peak SAR Limit		Head/Body	8.0 W/kg	1g	50% PTT duty factor	Occupational / Controlled Exposure			
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and IEC International Standard 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.									
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.									
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.									
The results and statements contained in this report pertain only to the device(s) evaluated.									
Test Report Approved By				Sean Johnston	Lab Manager	Celltech Labs Inc.			
Applicant:		HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074			
DUT Type:		Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz				
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 90			

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celltech Labs Inc.						



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	5
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($F < 0.5$ GHZ)	5
5.0 NO. OF TEST CHANNELS (N_c)	5
6.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	6
7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	7
8.0 FLUID DIELECTRIC PARAMETERS	9
9.0 SAR TEST REDUCTION PROCEDURES FOR SYSTEM MODEL (FCC KDB 643646)	15
10.0 SAR TEST REDUCTION PROCEDURES FOR SCAN MODEL (KDB INQ. #235657)	16
11.0 SAR MEASUREMENT SUMMARY	17
12.0 SAR SCALING (TUNE-UP TOLERANCE)	23
13.0 DETAILS OF SAR EVALUATION	24
14.0 SAR EVALUATION PROCEDURES	24
15.0 SYSTEM PERFORMANCE CHECK	25
16.0 SIMULATED EQUIVALENT TISSUES	26
17.0 SAR LIMITS	26
18.0 ROBOT SYSTEM SPECIFICATIONS	27
19.0 PROBE SPECIFICATION (ET3DV6)	28
20.0 PHANTOM(S)	28
21.0 DEVICE HOLDER	28
22.0 TEST EQUIPMENT LIST	29
23.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION	29
24.0 MEASUREMENT UNCERTAINTIES	30
25.0 REFERENCES	31
APPENDIX A - SAR MEASUREMENT PLOTS	32
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	48
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	55
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	62
APPENDIX E - DIPOLE CALIBRATION	86
APPENDIX F - PROBE CALIBRATION	87
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	88
APPENDIX H - SAM TWIN PHANTOM CERTIFICATE OF CONFORMITY	89
APPENDIX I - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01V01R01)	90

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					
	Page 2 of 90					

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

REVISION HISTORY			
REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	1st Release	Jon Hughes	November 25, 2011
1.1	2nd Release	Jon Hughes	December 14, 2011
	Added SAR data for Leather Belt-Loop & Swivel Mount accessory (Section 11.0 & Appendix A)		
	Added Leather Belt-Loop & Swivel Mount accessory (#6) to Section 7.0		

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Cheri Frangiadakis	Jon Hughes	Sean Johnston

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 90	


 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the HARRIS Corporation Model: XG-75 7/800 Portable 700/800-Band PTT Radio Transceiver (Scan model variant) complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-2:2010 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

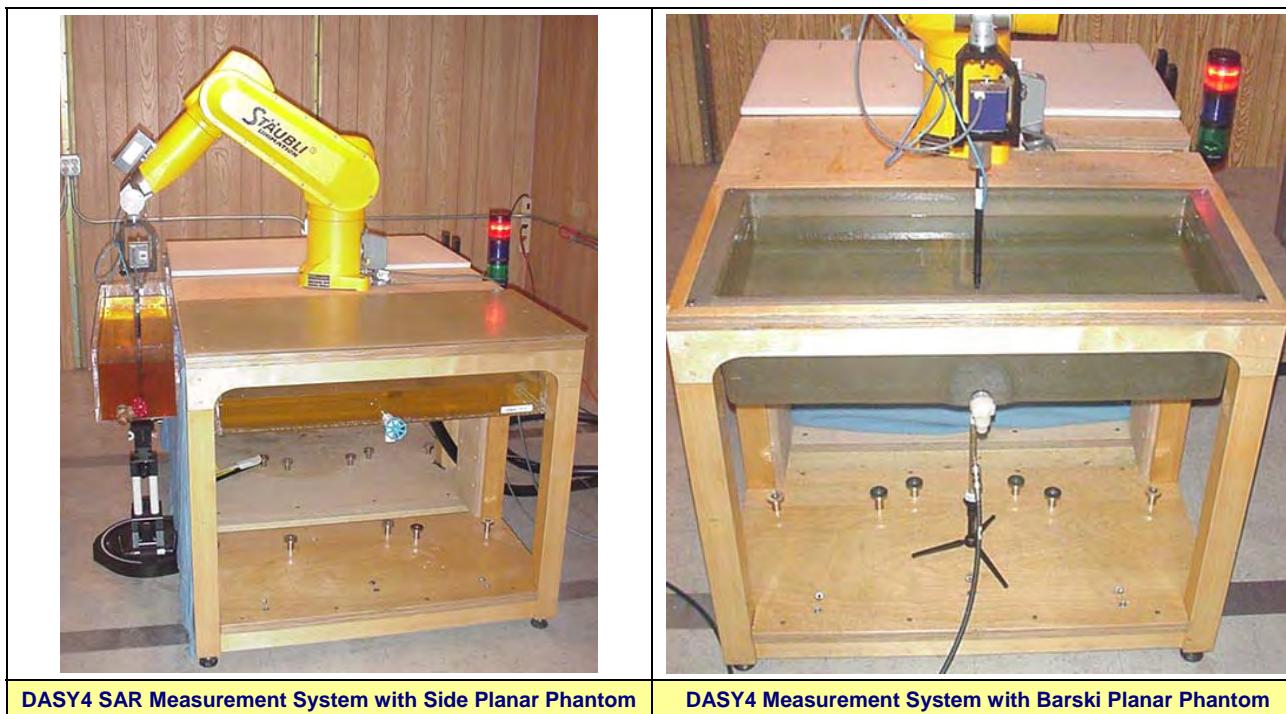

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER LEVELS							
N_c	Test Freq.	Freq. Band		Mode	dBm	Watts	Method
1	770.0 MHz	1	769-775 MHz	CW	34.55	2.85	Average Conducted
1	802.0 MHz	2	799-805 MHz	CW	34.55	2.85	Average Conducted
2	806.0 MHz	3	806-824 MHz	CW	34.94	3.12	Average Conducted
2	824.0 MHz	3	806-824 MHz	CW	34.96	3.13	Average Conducted
2	851.0 MHz	4	851-869 MHz	CW	34.98	3.15	Average Conducted
2	869.0 MHz	4	851-869 MHz	CW	35.00	3.16	Average Conducted

Notes

1. The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).

2. The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [13]) and IC RSS-Gen (see reference [14]).

4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*		
Exposure Conditions	P mW (General Population)	P mW (Occupational)
Held to face, $d \geq 2.5$ cm	250	1250
Body-worn, $d \geq 1.5$ cm	200	1000
Body-worn, $d \geq 1.0$ cm	150	750

1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds.
2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.
* Per FCC KDB 447498 D01v04 Section 5)b)i) (see reference [8]).

Note: The power thresholds specified in the above table do not apply to this 700/800 MHz band radio ($f \geq 0.5$ GHz). The output power threshold of $\geq 60/f_{(\text{GHz})}$ mW specified in FCC KDB 447498 (see reference [7]) was applied.

5.0 NO. OF TEST CHANNELS (N_c)

Antenna Part No.		Antenna Type	Test Freq. Range	Band	N_c	Test Frequencies (MHz)
(1)	KRE 101 506/1	High Gain	769 - 869 MHz	FCC/IC	6	770.0, 802.0, 806.0, 824.0, 851.0, 869.0
(2)	KRE 101 506/2	1/4-wave Whip	769 - 869 MHz	FCC/IC	6	770.0, 802.0, 806.0, 824.0, 851.0, 869.0

Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 90	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

6.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz $<$ 300 MHz and ± 50 MHz \geq 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [9]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz \geq 300 MHz
835 MHz	770 MHz	65 MHz	> 50 MHz ²
	802 MHz	33 MHz	< 50 MHz ¹
	806 MHz	29 MHz	< 50 MHz ¹
	824 MHz	11 MHz	< 50 MHz ¹
	851 MHz	16 MHz	< 50 MHz ¹
	869 MHz	34 MHz	< 50 MHz ¹

1. The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps were not required.
2. The probe calibration and measurement frequency interval is > 50 MHz; therefore the following additional steps were implemented (per FCC KDB 450824 D01 v01r01): *The measured 1-g SAR may be compensated with respect to $\pm 5\%$ tolerances in ϵ_r and $\pm 5\%$ tolerances in σ , computed according to valid SAR sensitivity data, to reduce SAR underestimation and maintain conservativeness. SAR sensitivity data is per SPEAG DASY4 Manual (see reference [16]).*

Probe Calibration Frequency = 835 MHz					Target Parameters: Head 41.5 ϵ_r / 0.9 σ ~ Body 55.2 ϵ_r / 0.97 σ									
Test Freq.	Date	Tissue	σ	Sensitivity	ϵ_r	Sensitivity	% Change	Compensated SAR Level W/kg						
770 MHz	9/23	Body	-2.58%	0.59	3.99%	-0.57	3.79%	B1	3.20	1g	50% ptt d/f			
								B3	0.732	1g	50% ptt d/f			
								B5	0.535	1g	50% ptt d/f			
								B7	1.15	1g	50% ptt d/f			
								B8	2.12	1g	50% ptt d/f			
								B9	1.09	1g	50% ptt d/f			
Parameter					ϵ	σ	ρ							
$f=800$ MHz, $d=15$ mm ($\epsilon_r=41.5$, $\sigma=0.90$ S/m)														
SAR Peak					- 0.70	+ 0.86	-							
SAR 1 g					- 0.57	+ 0.59	0.10							
SAR 10 g					- 0.45	+ 0.35	0.18							

Notes

1. The above sensitivity formula (Head) from the DASY4 manual (see reference [10]) can be applied to Body tissue parameters (per SAR system manufacturer).
2. B1, B3, B5, B7, B8 and B9 denotes the corresponding SAR test plot no. in Appendix A.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Accessory ID # for Test Report	ACCESSORY CATEGORY: ANTENNA		
	Part Number	Description	
1	KRE 101 1506/1	High gain, flexible construction (764-870 MHz), 2 dBi gain spec.	
2	KRE 101 1506/2	1/4 wave whip, wide bandwidth (764-870 MHz), 0 dBi gain spec.	
Accessory ID # for Test Report	ACCESSORY CATEGORY: BATTERY		
	Part Number	Description	
a	BT-023406-003	Ni-MH, immersible, non-IS (7.5V, 2400mAh)	
b	BT-023406-004	Ni-MH, immersible, <IS> (7.5V, 2400mAh)	
c	BT-023406-005	Li-Ion, immersible, non-IS (7.4V, 2000mAh)	
d	BT-023436-001	Lithium-Polymer, immersible, non-IS (7.4V, 3600mAh)	
e	BT-023406-103	Ni-MH, immersible, Goldpeak cells, non-IS (7.5V, 2400mAh)	
Accessory ID # for Test Report	ACCESSORY CATEGORY: BODY-WORN		
	Part Number	Description	
1	KT-016201-001 (kit)	Kit containing: FM-016199-001 P7300 BEE Nylon case (Black) (with radio retaining strap) & CC-014527 BEE Leather Belt Loop	
2	KT-016201-002 (kit)	Kit contains: FM-016199-002 P7300 BEE Nylon case (Orange) (with radio retaining strap) & CC-014527 BEE Leather Belt Loop	
3	KT-016201-003 (kit)	Kit contains: FM-016199-003 P7300 BEE Leather Case (with radio retaining strap) w/o Shoulder Strap D-rings, KRY1011608/2 Swivel Mount & CC-014527 BEE Leather Belt Loop	
4	KT-016201-004	Kit contains: FM-016199-004 P7300 BEE Leather Case with Shoulder Strap D-rings (with radio retaining strap), KRY1011608/2 Swivel Mount & CC-014524-001 BEE Shoulder Strap	
5	CC23894	Metal Belt Clip	
6	FM-017262-001 CC-014527	Swivel Mount Belt Loop, Leather (BEE)	
Accessory ID # for Test Report	ACCESSORY CATEGORY: AUDIO		
	Part Number	Description	Audio Accessory Grouping
G7a	MC-023933-001	Speaker-Mic, No Ant. (cc), <IS>	Group 7
n/a	MC-023933-002	Speaker-Mic, W/ Ant. (cc) provision, <IS>	n/a (contains integral antenna)
G7b	MC-009104-002	Speaker-Mic, GPS, non-IS	Group 7
n/a	LS103239V1	Earphone for Speaker-Mic <IS>	n/a (accessory to Group 7)
G7c	MC-011617-601	Ruggedized Speaker Mic-Coil Cord	Group 7
G7d	MC-011617-701	Standard Speaker Mic - Non Ant	Group 7
G12a	EA-009580-001	Earphone Kit, Black	Group 12
G12b	EA-009580-002	Earphone Kit, Beige	Group 12
G8a	EA-009580-003	2-Wire Kit, Palm mic, Black	Group 8
G8b	EA-009580-004	2-Wire Kit, Palm mic, Beige	Group 8
G9a	EA-009580-005	3-Wire Kit, Mini-Lapel Mic, Black	Group 9
G9b	EA-009580-006	3-Wire Kit, Mini-Lapel Mic, Beige	Group 9
G4	EA-009580-007	Explorer Headset w/ PTT	Group 4
G2	EA-009580-008	Lightweight headset single spkr w/ PTT	Group 2
G3a	EA-009580-009	Breeze Headset w/ PTT	Group 3
G1a	EA-009580-010	Headset, heavy duty, N/C behind the head, w/ PTT	Group 1

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 7 of 90	



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

G5	EA-009580-011	Ranger Headset w/ PTT	Group 5
G10	EA-009580-012	Skull mic w/body PTT & earcup	Group 10
G1b	EA-009580-013	Headset, heavy duty, N/C over the head, w/ PTT	Group 1
G11a	EA-009580-014	Throat mic w/acoustic tube & body PTT	Group 11
G11b	EA-009580-015	Throat mic w/acoustic tube, body PTT, & ring PTT	Group 11
G3b	EA-009580-016	Breeze headset w/ PTT & pigtail jack	Group 3
G6a	EA-009580-017	Hurricane headset w/ PTT	Group 6
G6b	EA-009580-018	Hurricane headset w/ PTT & pigtail jack	Group 6

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 90	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

8.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 09/22/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	57.77	0.88	55.2	0.97	4.66%	-9.28%
0.745	57.56	0.9	55.2	0.97	4.28%	-7.22%
0.755	57.28	0.92	55.2	0.97	3.77%	-5.15%
0.765	57.64	0.92	55.2	0.97	4.42%	-5.15%
0.775	57.3	0.93	55.2	0.97	3.80%	-4.12%
0.785	57.4	0.94	55.2	0.97	3.99%	-3.09%
0.795	57.17	0.96	55.2	0.97	3.57%	-1.03%
0.805	57.26	0.95	55.2	0.97	3.73%	-2.06%
0.815	56.55	0.97	55.2	0.97	2.45%	0.00%
0.825	56.7	0.98	55.2	0.97	2.72%	1.03%
0.835	56.95	0.99	55.2	0.97	3.17%	2.06%
0.845	56.93	0.98	55.2	0.97	3.13%	1.03%
0.855	56.55	1	55.2	0.97	2.45%	3.09%
0.865	56.6	1.01	55.2	0.97	2.54%	4.12%
0.875	56.58	1.04	55.2	0.97	2.50%	7.22%
0.885	56.28	1.04	55.2	0.97	1.96%	7.22%
0.895	56.35	1.05	55.2	0.97	2.08%	8.25%
0.905	56.2	1.06	55.2	0.97	1.81%	9.28%
0.915	56.37	1.06	55.2	0.97	2.12%	9.28%
0.925	56.1	1.08	55.2	0.97	1.63%	11.34%
0.935	56.11	1.09	55.2	0.97	1.65%	12.37%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 22	835 Body	23.0°C	23.3°C	≥ 15 cm	101.1 kPa	36%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 09/23/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	57.57	0.9	55.2	0.97	4.29%	-7.22%
0.745	57.53	0.91	55.2	0.97	4.22%	-6.19%
0.755	57.5	0.93	55.2	0.97	4.17%	-4.12%
0.765	57.28	0.93	55.2	0.97	3.77%	-4.12%
0.770*	57.4	0.945	55.2	0.97	3.99%	-2.58%
0.775	57.5	0.96	55.2	0.97	4.17%	-1.03%
0.785	57.64	0.95	55.2	0.97	4.42%	-2.06%
0.795	57.02	0.97	55.2	0.97	3.30%	0.00%
0.802*	57.1	0.97	55.2	0.97	3.44%	0.00%
0.805	57.17	0.97	55.2	0.97	3.57%	0.00%
0.815	57.17	0.98	55.2	0.97	3.57%	1.03%
0.824*	57.1	0.998	55.2	0.97	3.44%	2.89%
0.825	57.08	1	55.2	0.97	3.41%	3.09%
0.835	56.91	0.99	55.2	0.97	3.10%	2.06%
0.845	56.95	1.01	55.2	0.97	3.17%	4.12%
0.855	56.94	1.01	55.2	0.97	3.15%	4.12%
0.865	56.64	1.02	55.2	0.97	2.61%	5.15%
0.875	56.41	1.02	55.2	0.97	2.19%	5.15%
0.885	56.53	1.03	55.2	0.97	2.41%	6.19%
0.895	56.23	1.07	55.2	0.97	1.87%	10.31%
0.905	56.19	1.07	55.2	0.97	1.79%	10.31%
0.915	56.31	1.07	55.2	0.97	2.01%	10.31%
0.925	56.1	1.09	55.2	0.97	1.63%	12.37%
0.935	55.93	1.11	55.2	0.97	1.32%	14.43%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 23	835 Body	23.0°C	23.3°C	≥ 15 cm	101.1 kPa	33%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 10 of 90

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ilac-MRA  WEEE <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 09/28/2011		Frequency: 835 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	43.79	0.82	41.5	0.9	5.52%	-8.89%
0.745	43.24	0.83	41.5	0.9	4.19%	-7.78%
0.755	43.57	0.83	41.5	0.9	4.99%	-7.78%
0.765	43.53	0.85	41.5	0.9	4.89%	-5.56%
0.775	43.15	0.86	41.5	0.9	3.98%	-4.44%
0.785	43.15	0.87	41.5	0.9	3.98%	-3.33%
0.795	43.14	0.88	41.5	0.9	3.95%	-2.22%
0.805	43.06	0.9	41.5	0.9	3.76%	0.00%
0.815	42.69	0.91	41.5	0.9	2.87%	1.11%
0.825	42.67	0.91	41.5	0.9	2.82%	1.11%
0.835	42.51	0.94	41.5	0.9	2.43%	4.44%
0.845	42.63	0.93	41.5	0.9	2.72%	3.33%
0.855	42.36	0.93	41.5	0.9	2.07%	3.33%
0.865	42.16	0.95	41.5	0.9	1.59%	5.56%
0.875	42	0.95	41.5	0.9	1.20%	5.56%
0.885	42.05	0.97	41.5	0.9	1.33%	7.78%
0.895	41.78	0.99	41.5	0.9	0.67%	10.00%
0.905	41.76	0.98	41.5	0.9	0.63%	8.89%
0.915	41.58	0.99	41.5	0.9	0.19%	10.00%
0.925	41.43	1.02	41.5	0.9	-0.17%	13.33%
0.935	41.19	1.03	41.5	0.9	-0.75%	14.44%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 28	835 Head	22.0°C	22.3°C	≥ 15 cm	101.1 kPa	31%	1000

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ilac-MRA  WEEE <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 09/29/2011		Frequency: 835 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	44.07	0.81	41.5	0.9	6.19%	-10.00%
0.745	43.8	0.83	41.5	0.9	5.54%	-7.78%
0.755	43.6	0.83	41.5	0.9	5.06%	-7.78%
0.765	43.59	0.86	41.5	0.9	5.04%	-4.44%
0.775	43.36	0.86	41.5	0.9	4.48%	-4.44%
0.785	43.2	0.88	41.5	0.9	4.10%	-2.22%
0.795	43.35	0.87	41.5	0.9	4.46%	-3.33%
0.805	42.88	0.88	41.5	0.9	3.33%	-2.22%
0.815	42.92	0.9	41.5	0.9	3.42%	0.00%
0.824*	43	0.9	41.5	0.9	3.61%	0.00%
0.825	43.02	0.9	41.5	0.9	3.66%	0.00%
0.835	42.34	0.92	41.5	0.9	2.02%	2.22%
0.845	42.58	0.92	41.5	0.9	2.60%	2.22%
0.855	42.17	0.93	41.5	0.9	1.61%	3.33%
0.865	42.15	0.95	41.5	0.9	1.57%	5.56%
0.875	41.99	0.96	41.5	0.9	1.18%	6.67%
0.885	42	0.96	41.5	0.9	1.20%	6.67%
0.895	41.84	0.98	41.5	0.9	0.82%	8.89%
0.905	41.79	0.99	41.5	0.9	0.70%	10.00%
0.915	41.71	1	41.5	0.9	0.51%	11.11%
0.925	41.6	1	41.5	0.9	0.24%	11.11%
0.935	41.3	1	41.5	0.9	-0.48%	11.11%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 29	835 Head	22.0°C	22.2°C	≥ 15 cm	101.1 kPa	30%	1000

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 12/5/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	56.55	0.89	55.2	0.97	2.45%	-8.25%
0.745	56.68	0.89	55.2	0.97	2.68%	-8.25%
0.755	56.58	0.92	55.2	0.97	2.50%	-5.15%
0.765	56.5	0.91	55.2	0.97	2.36%	-6.19%
0.775	56.15	0.92	55.2	0.97	1.72%	-5.15%
0.785	56.2	0.94	55.2	0.97	1.81%	-3.09%
0.795	56.13	0.95	55.2	0.97	1.68%	-2.06%
0.805	55.95	0.96	55.2	0.97	1.36%	-1.03%
0.815	56.05	0.96	55.2	0.97	1.54%	-1.03%
0.825	55.99	0.98	55.2	0.97	1.43%	1.03%
0.835	55.62	0.98	55.2	0.97	0.76%	1.03%
0.845	55.45	1	55.2	0.97	0.45%	3.09%
0.855	55.76	0.99	55.2	0.97	1.01%	2.06%
0.865	55.87	1.01	55.2	0.97	1.21%	4.12%
0.875	55.52	1.03	55.2	0.97	0.58%	6.19%
0.885	55.45	1.03	55.2	0.97	0.45%	6.19%
0.895	55.25	1.04	55.2	0.97	0.09%	7.22%
0.905	54.93	1.06	55.2	0.97	-0.49%	9.28%
0.915	55.28	1.07	55.2	0.97	0.14%	10.31%
0.925	54.85	1.09	55.2	0.97	-0.63%	12.37%
0.935	54.93	1.09	55.2	0.97	-0.49%	12.37%

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Dec 5	835 Body	23.0°C	20.6°C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 13 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FLUID DIELECTRIC PARAMETERS						
Date: 12/6/2011		Frequency: 835 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.735	56.52	0.87	55.2	0.97	2.39%	-10.31%
0.745	56.39	0.89	55.2	0.97	2.16%	-8.25%
0.755	56.21	0.91	55.2	0.97	1.83%	-6.19%
0.765	56.24	0.91	55.2	0.97	1.88%	-6.19%
0.775	56.08	0.93	55.2	0.97	1.59%	-4.12%
0.770*	56.2	0.92	55.2	0.97	1.81%	-5.15%
0.785	56.37	0.94	55.2	0.97	2.12%	-3.09%
0.795	55.87	0.95	55.2	0.97	1.21%	-2.06%
0.805	55.74	0.95	55.2	0.97	0.98%	-2.06%
0.815	55.91	0.97	55.2	0.97	1.29%	0.00%
0.824*	55.7	0.97	55.2	0.97	0.91%	0.00%
0.825	55.64	0.97	55.2	0.97	0.80%	0.00%
0.835	55.67	0.99	55.2	0.97	0.85%	2.06%
0.845	55.6	0.98	55.2	0.97	0.72%	1.03%
0.855	55.57	1	55.2	0.97	0.67%	3.09%
0.865	55.39	1.02	55.2	0.97	0.34%	5.15%
0.875	55.33	1.03	55.2	0.97	0.24%	6.19%
0.885	55.17	1.03	55.2	0.97	-0.05%	6.19%
0.895	55.16	1.03	55.2	0.97	-0.07%	6.19%
0.905	55.01	1.04	55.2	0.97	-0.34%	7.22%
0.915	55.11	1.06	55.2	0.97	-0.16%	9.28%
0.925	54.95	1.08	55.2	0.97	-0.45%	11.34%
0.935	54.64	1.07	55.2	0.97	-1.01%	10.31%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Dec 6	835 Body	22.0°C	21.1°C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 14 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

9.0 SAR TEST REDUCTION PROCEDURES FOR SYSTEM MODEL (FCC KDB 643646)

- a. Face-held Configuration - Default Battery Selection - per FCC KDB 643646, Page 2, Section 1) A): *"When multiple standard batteries are supplied with a radio, the battery with the highest capacity is considered the default battery for making head SAR measurements."*
- b. Body-worn Configuration - Default Battery Selection - per FCC KDB 643646, Page 5, Section 1) A): *"Start by testing a PTT radio with the thinnest battery and a standard (default) Body-worn accessory that are both supplied with the radio and, if applicable, a default audio accessory....."*
- c. Body-worn Configuration - Default Body-worn Accessory Selection - the belt-clip was selected as the default Body-worn accessory based on the smaller separation distance it provides between the radio and the user in comparison to the remaining accessories. Per FCC KDB 643646, Page 5, Section 1) A): *"When multiple default Body-worn accessories are supplied with a radio, the standard Body-worn accessory expected to result in the highest SAR based on its construction and exposure conditions is considered the default Body-worn accessory for making Body-worn measurements."*
- d. Body-worn Configuration - Additional Body-worn Accessories - the remaining Body-worn accessories were evaluated based on the *"additional Body-worn accessory"* guidance provided in FCC KDB 643646, Page 7, Section 4). The remaining Body-worn accessories can be utilized with all the audio accessory options.
- e. Body-worn Configuration - Default Audio Accessory Selection - According to the manufacturer, the radio is not supplied to the end user with a standard default audio accessory (as referenced in FCC KDB 643646, Page 4, Section "Body SAR Test Considerations for Body-worn Accessories"); therefore the procedures described in note (j) below were applied in order to establish the default audio accessory.
- f. Body-worn Configuration - Selection of Remaining Default Audio Accessories by Category - the Remaining Default Audio Accessories by Category were selected based on the guidance provided in FCC KDB 643646, Section "Body SAR Test Considerations for Audio Accessories without Built-in Antenna", Page 10: *"For audio accessories with similar construction and operating requirements, test only the audio accessory within the group that is expected to result in the highest SAR, with respect to changes in RF characteristics and exposure conditions for the combination. If it is unclear which audio accessory within a group of similar accessories is expected to result in the highest SAR, good engineering judgment and preliminary testing should be applied to select the accessory that is expected to result in the highest SAR."* Please refer to note (i) below for the procedure implemented to establish the Default Audio Accessory by Category (Grouping). The Remaining Default Audio Accessories by Category were evaluated on the highest SAR channel and antenna combination from the Default Audio Accessory evaluations (see note e.) based on the guidance provided in FCC KDB 643646, Page 10, Section 1) A) thru D).
- g. Body-worn Configuration - Selection of Additional Audio Accessories by Category - the Additional Audio Accessories by Category were selected based on the guidance provided in FCC KDB 643646, Section "Body SAR Test Considerations for Audio Accessories without Built-in Antenna", Page 10.
- h. According to the manufacturer, all the optional audio accessories can be used with any accessory combination (antenna, battery & Body-worn accessory) - see also Appendix I (Audio Accessory Combinations). Therefore, in order to establish the overall default audio accessory and default accessory by category (grouping), preliminary SAR evaluations (area scans with belt-clip, thinnest battery and worst-case antenna configuration from face-held evaluations) were performed by Celltech with all of the optional audio accessories connected to the radio consecutively.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074					
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz							
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.									
	Page 15 of 90									

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

10.0 SAR TEST REDUCTION PROCEDURES FOR SCAN MODEL (KDB INQ. #235657)

With respect to the SAR results for the *original model*, please test the SAR for *additional models* according to the following where reported and measured should mean the SAR results at 50% duty factor before further scaling or compensation.

1. For face exposure, *additional models* should be measured for each of the antennas using the highest SAR configuration reported among the battery configurations for the *base model*; i.e., one SAR per antenna for each additional model.
2. For body-worn accessories with the default audio accessory, *additional models* should be measured for each of the antennas and body-worn accessories using the highest SAR configuration reported among the battery configurations for the *base model*; i.e., one SAR per antenna and body-worn accessory combination. For each of these configurations, if the measured SAR for the *additional models* is > 7.0 W/kg repeat all SAR measured for the *base model* that are > 6.0 W/kg using the *additional models*. In addition, all SAR measured for the *base model* > 7.0 W/kg must be repeated for the *additional models*.
3. For the remaining default audio accessories, all SAR measured for each combination of antenna, battery, body-worn accessory and audio accessory with the *base model* with SAR >= 7.0 W/kg must be repeated for the *additional models* for such combinations. When the highest SAR measured for a *base model* combination of antenna, battery, body-worn accessory and audio accessory is < 7.0 W/kg, measure SAR for the *additional models* using the highest SAR reported for each *base model* combination; i.e., at least one test per combination. However, if the highest reported SAR for a *base model* combination is < 5.0 W/kg, no test is needed for that combination. For each *additional model* combination, if the measured SAR is > 7.0 W/kg repeat all SAR measured for that combination when the reported *base model* SAR is > 6.0 W/kg.
4. For the rest of the additional (non-default) audio accessories tested for the *base model*, apply the same procedures used for the remaining default audio accessories in #3 above. A combination should be determined according to audio accessory part numbers; not by audio category.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.				Page 16 of 90	



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



11.0 SAR MEASUREMENT SUMMARY

FACE-HELD SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

TABLE 1				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)				XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)							
C				Cond. Power Before Test (W)	1	2	3	Cond. Power Before Test (W)	4	5	6				
R	Antenna Accessory ID #	Freq. Band	Test Freq. (MHz)		SAR W/kg (1g)	SAR W/kg (1g)	Battery Accessory ID #		SAR W/kg (1g)	SAR W/kg (1g)	Battery Accessory ID #				
					100% ptt d/f	50% ptt d/f			100% ptt d/f	50% ptt d/f					
					Drift (dB)	50%+droop			Drift dB	50%+droop					
1	1	1	770.0	2.85	N/A				2.84	N/A					
2		2	802.0	2.85	N/A				2.82	N/A					
3			806.0	3.12	N/A				3.10	N/A					
4		3	824.0	3.13	F1	1.16	0.580	d	3.15	F3	1.11	0.555	d		
5						-0.798	0.697				-0.757	0.661			
6		4	851.0	3.15	N/A				3.15	N/A					
7			869.0	3.16	N/A				3.15	N/A					
8	2	1	770.0	2.85	N/A				2.84	N/A					
9		2	802.0	2.85	N/A				2.82	N/A					
10			806.0	3.12	N/A				3.10	N/A					
11		3	824.0	3.13	F2	3.61	1.81	d	3.15	F7	3.70	1.85	d		
12						-0.026	1.82				-0.078	1.88			
13		4	851.0	3.15	N/A				3.15	N/A					
14			869.0	3.16	N/A				3.15	N/A					
SAR LIMITS				HEAD		SPATIAL PEAK		RF EXPOSURE CATEGORY							
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg		1 gram average		Occupational / Controlled						

Notes

Band 1: 769-775 MHz
Test Freq.: 770.0 MHz

Band 2: 799-805 MHz
Test Freq.: 802.0 MHz

Band 3: 806-824 MHz
Test Freq.'s: 806.0, 824.0 MHz

Band 4: 851-869 MHz
Test Freq.'s: 851.0, 869.0 MHz

Test Date(s): Sep. 29, 2011

N/A = Not Applicable

C = Column; R = Row

Fx denotes the corresponding Face SAR Plot # as shown in Appendix A (SCAN Model only)
Fx denotes the corresponding Face SAR Plot # from the original Cert. report (SYSTEM Model)

Test Mode = CW (Unmodulated Continuous Wave)

Phantom = Side Planar Phantom

DUT Distance to Planar Phantom
(Front of DUT Parallel to Phantom)

Shortest Antenna Distance to Planar Phantom

Antenna 1

Antenna 2

2.5 cm

5.3 cm

5.3 cm

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

BODY-WORN ACCESSORY ID #				5 (Default) Metal Belt-Clip																				
AUDIO ACCESSORY ID #				G7a (Default)																				
TABLE 2				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)					XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)															
C	R			Cond. Power Before Test (W)	1	2	3	Cond. Power Before Test (W)	4	5	6	Battery Accessory ID #												
					SAR W/kg (1g)	SAR W/kg (1g)	Battery Accessory ID #		SAR W/kg (1g)	SAR W/kg (1g)														
					100% ptt d/f	50% ptt d/f			100% ptt d/f	50% ptt d/f														
					Drift (dB)	50%+droop			Drift dB	50%+droop														
1	1	1	770.0	2.85	B1	6.16	3.08	a	B9	6.65	3.33	a												
2						-0.828	3.73			-0.212	3.49													
3					N/A				N/A															
4		3	802.0	2.85	N/A			2.82	N/A															
5			806.0	3.12	N/A			3.10	N/A															
6		4	824.0	3.13	N/A			3.15	N/A															
7			851.0	3.15	N/A			3.15	N/A															
8	2	1	869.0	3.16	N/A			3.15	N/A															
9		2	770.0	2.85	N/A			2.84	N/A			a												
10			802.0	2.85	B2	3.68	1.84	a	B14	5.51	2.76													
11		3	806.0	3.12		-0.415	2.03			2.82	-0.042	2.78												
12			824.0	3.13	N/A			3.10	N/A															
13		4	851.0	3.15	N/A			3.15	N/A															
14			869.0	3.16	N/A			3.15	N/A															
SAR LIMITS					BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY															
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg		1 gram average		Occupational / Controlled															
Notes																								
Band 1: 769-775 MHz Test Freq.: 770.0 MHz			Band 2: 799-805 MHz Test Freq.: 802.0 MHz			Band 3: 806-824 MHz Test Freq.'s: 806.0, 824.0 MHz			Band 4: 851-869 MHz Test Freq.'s: 851.0, 869.0 MHz															
Test Date(s): Sep. 23, 2011					N/A = Not Applicable																			
C = Column; R = Row					Bx denotes the corresponding Body SAR Plot # as shown in Appendix A (SCAN Model only) Bx denotes the corresponding Body SAR Plot # from the original Cert. report (SYSTEM Model)																			
Test Mode = CW (Unmodulated Continuous Wave)					Phantom = Barski Planar Phantom																			
DUT Distance to Planar Phantom (Back of DUT Parallel to Phantom)					Shortest Antenna Distance to Planar Phantom																			
					Antenna 1				Antenna 2															
1.6 cm					2.0 cm				2.0 cm															

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 90



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

BODY-WORN ACCESSORY ID # 1 (Additional) Nylon Case & Leather Belt-Loop

AUDIO ACCESSORY ID # G7a (Default)

TABLE 3				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)				XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)													
C				Cond. Power Before Test (W)	1		2		3		Cond. Power Before Test (W)	4		5		6					
R	Antenna Accessory ID #	Freq. Band	Test Freq. (MHz)		SAR W/kg (1g)		SAR W/kg (1g)					SAR W/kg (1g)		SAR W/kg (1g)		Battery Accessory ID #					
					100% ptt d/f		50% ptt d/f					100% ptt d/f		50% ptt d/f							
					Drift (dB)		50%+droop					Drift dB		50%+droop							
1	1	1	770.0	2.85	B3	1.41	0.705		d	2.84	B33	1.65	0.825		d						
2						-0.320	0.759					-0.414	0.908								
3				2.85	N/A					2.82	N/A										
4				3.12	N/A					3.10	N/A										
5				3.13	N/A					3.15	N/A										
6				3.15	N/A					3.15	N/A										
7				3.16	N/A					3.15	N/A										
8	2	2	802.0	2.85	N/A					2.84	N/A										
9				2.85	N/A					2.82	N/A										
10				3.12	N/A					3.10	N/A										
11				3.12	N/A					3.10	N/A										
12				3.13	B4	1.73	0.865		d	3.15	B36	1.61	0.805		d						
13				3.13		-0.168	0.899					-0.212	0.845								
14				3.15	N/A					3.15	N/A										
869.0				3.16	N/A					3.15	N/A										

SAR LIMITS

FCC 47 CFR 2.1093 Health Canada Safety Code 6 8.0 W/kg 1 gram average Occupational / Controlled

Notes

Band 1: 769-775 MHz
Test Freq.: 770.0 MHz

Band 2: 799-805 MHz
Test Freq.: 802.0 MHz

Band 3: 806-824 MHz
Test Freq.'s: 806.0, 824.0 MHz

Band 4: 851-869 MHz
Test Freq.'s: 851.0, 869.0 MHz

Test Date(s): Sep. 23, 2011 N/A = Not Applicable

C = Column; R = Row Bx denotes the corresponding Body SAR Plot # as shown in Appendix A (SCAN Model only)
Bx denotes the corresponding Body SAR Plot # from the original Cert. report (SYSTEM Model)

Test Mode = CW (Unmodulated Continuous Wave) Phantom = Barski Planar Phantom

DUT Distance to Planar Phantom (Back of DUT Parallel to Phantom)		Shortest Antenna Distance to Planar Phantom	
		Antenna 1	Antenna 2
4.3 cm		4.7 cm	4.7 cm

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 90	



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

BODY-WORN ACCESSORY ID # 3 (Additional) Leather Case & Belt-Loop

AUDIO ACCESSORY ID # G7a (Default)

TABLE 4				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)				XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)														
C				Cond. Power Before Test (W)	1		2		3		Cond. Power Before Test (W)	4		5		6						
R	Antenna Accessory ID #	Freq. Band	Test Freq. (MHz)		SAR W/kg (1g)		SAR W/kg (1g)					SAR W/kg (1g)		SAR W/kg (1g)		Battery Accessory ID #						
					100% ptt d/f		50% ptt d/f					100% ptt d/f		50% ptt d/f								
					Drift (dB)		50%+droop					Drift dB		50%+droop								
1	1	1	770.0	2.85	B5	1.03	0.515		a	2.84	B37	0.944	0.472		a							
2						-0.409	1.13					-0.377	0.515									
3				2	802.0	2.85	N/A				2.82	N/A										
4				3	806.0	3.12	N/A				3.10	N/A										
5					824.0	3.13	N/A				3.15	N/A										
6				4	851.0	3.15	N/A				3.15	N/A										
7					869.0	3.16	N/A				3.15	N/A										
8	2	2	770.0	2.85	N/A				d	2.84	N/A											
9				2	802.0	2.85	N/A				2.82	N/A										
10				3	806.0	3.12	N/A				3.10	N/A										
11					824.0	3.13	B6	1.57	0.785		d	B50	1.61	0.805		d						
12				4	851.0	3.15		-0.177	0.818				-0.225	0.848								
13					869.0	3.16	N/A				3.15	N/A										
14	SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY													
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled														

Notes

Band 1: 769-775 MHz
Test Freq.: 770.0 MHz

Band 2: 799-805 MHz
Test Freq.: 802.0 MHz

Band 3: 806-824 MHz
Test Freq.'s: 806.0, 824.0 MHz

Band 4: 851-869 MHz
Test Freq.'s: 851.0, 869.0 MHz

Test Date(s): Sep. 23, 2011	N/A = Not Applicable															
C = Column; R = Row	Bx denotes the corresponding Body SAR Plot # as shown in Appendix A (SCAN Model only) Bx denotes the corresponding Body SAR Plot # from the original Cert. report (SYSTEM Model)															
Test Mode = CW (Unmodulated Continuous Wave)	Phantom = Barski Planar Phantom															
DUT Distance to Planar Phantom (Back of DUT Parallel to Phantom)	Shortest Antenna Distance to Planar Phantom															
5.0 cm	Antenna 1							Antenna 2								
5.3 cm																

Applicant: HARRIS Corporation	FCC ID: OWDTR-0074-E	IC: 3636B-0074	
DUT Type: Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		
	Page 20 of 90		



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

BODY-WORN ACCESSORY ID # 4 (Additional) Leather Case & Shoulder-Strap

AUDIO ACCESSORY ID # G7a (Default)

TABLE 5				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)				XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)							
C				Cond. Power Before Test (W)	1	2	3	Cond. Power Before Test (W)	4	5	6				
R	Antenna Accessory ID #	Freq. Band	Test Freq. (MHz)		SAR W/kg (1g)	SAR W/kg (1g)	Battery Accessory ID #		SAR W/kg (1g)	SAR W/kg (1g)	Battery Accessory ID #				
					100% ptt d/f	50% ptt d/f			100% ptt d/f	50% ptt d/f					
					Drift (dB)	50%+droop			Drift dB	50%+droop					
1	1	1	770.0	2.85	B7	2.19	1.10	a	2.84	B51	2.63				
2						-0.714	1.29				-0.425				
3		2	802.0	2.85	N/A				2.82	N/A					
4					N/A				3.10	N/A					
5		3	806.0	3.12	N/A				3.15	N/A					
6					N/A				3.15	N/A					
7		4	824.0	3.13	N/A				3.15	N/A					
8					N/A				3.15	N/A					
9	2	1	869.0	3.16	N/A				3.15	N/A					
10					B8	4.08	2.04	d	2.84	B61	4.76				
11						0.034	n/a				-0.082				
12		2	802.0	2.85	N/A				2.82	N/A					
13					N/A				3.10	N/A					
14		3	806.0	3.12	N/A				3.15	N/A					
					N/A				3.15	N/A					
SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY							
FCC 47 CFR 2.1093		Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled							

Notes

Band 1: 769-775 MHz
Test Freq.: 770.0 MHz

Band 2: 799-805 MHz

Test Freq.: 802.0 MHz

Band 3: 806-824 MHz

Test Freq.'s: 806.0, 824.0 MHz

Band 4: 851-869 MHz

Test Freq.'s: 851.0, 869.0 MHz

Test Date(s): Sep. 23, 2011

N/A = Not Applicable

C = Column; R = Row

Bx denotes the corresponding Body SAR Plot # as shown in Appendix A (SCAN Model only)
Bx denotes the corresponding Body SAR Plot # from the original Cert. report (SYSTEM Model)

Test Mode = CW (Unmodulated Continuous Wave)

Phantom = Barski Planar Phantom

DUT Distance to Planar Phantom
(Back of DUT Parallel to Phantom)

Shortest Antenna Distance to Planar Phantom

3.0 cm

3.3 cm

3.3 cm

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					
	Page 21 of 90					



Date(s) of Evaluation
09/22-29 & 12/5-6, 2011

Test Report Serial No.
083011OWD-T1113S-C2PC

Test Report Revision No.
Rev. 1.1 (2nd Release)

Test Report Issue Date
December 14, 2011

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
Occupational (Controlled)



Test Lab Certificate No. 2470.01

BODY-WORN SAR EVALUATION RESULTS (System Radio versus Scan Radio Model Variant Comparison)

BODY-WORN ACCESSORY ID # 6 (Additional) Leather Belt-Loop

AUDIO ACCESSORY ID # G7a (Default)

TABLE 6				XG-75 7/800 SCAN Radio Variant Model (does not contain DTMF keypad)				XG-75 7/800 SYSTEM Radio Base Model (contains DTMF keypad)												
C				Cond. Power Before Test (W)	1		2		3		Cond. Power Before Test (W)	4		5		6				
R	Antenna Accessory ID #	Freq. Band	Test Freq. (MHz)		SAR W/kg (1g)		SAR W/kg (1g)		Battery Accessory ID #	SAR W/kg (1g)		SAR W/kg (1g)		Battery Accessory ID #						
					100% ptt d/f		50% ptt d/f			100% ptt d/f		50% ptt d/f								
					Drift (dB)		50%+droop			Drift dB		50%+droop								
1	1	1	770.0	2.85	B9	2.09	1.05		a	2.84	B65	2.23	1.12		a					
2						-0.009	1.05					-0.316	1.20							
3				2.85	N/A					2.82	N/A									
4				3.12	N/A					3.10	N/A									
5				3.13	N/A					3.15	N/A									
6				3.15	N/A					3.15	N/A									
7				3.16	N/A					3.15	N/A									
8	2	2	770.0	2.85	N/A					2.84	N/A									
9				2.85	N/A					2.82	N/A									
10				3.12	N/A					3.10	N/A									
11				3.13	B10	3.00	1.50		d	3.15	B78	2.62	1.31		d					
12						-0.379	1.64					-0.239	1.38							
13				3.15	N/A					3.15	N/A									
14				3.16	N/A					3.15	N/A									

SAR LIMITS

FCC 47 CFR 2.1093 Health Canada Safety Code 6 8.0 W/kg 1 gram average Occupational / Controlled

Notes

Band 1: 769-775 MHz
Test Freq.: 770.0 MHz

Band 2: 799-805 MHz
Test Freq.: 802.0 MHz

Band 3: 806-824 MHz
Test Freq.'s: 806.0, 824.0 MHz

Band 4: 851-869 MHz
Test Freq.'s: 851.0, 869.0 MHz

Test Date(s): Dec. 6, 2011 N/A = Not Applicable

C = Column; R = Row Bx denotes the corresponding Body SAR Plot # as shown in Appendix A (SCAN Model only)
Bx denotes the corresponding Body SAR Plot # from the original Cert. report (SYSTEM Model)

Test Mode = CW (Unmodulated Continuous Wave) Phantom = Barski Planar Phantom

DUT Distance to Planar Phantom (Back of DUT Parallel to Phantom)	Shortest Antenna Distance to Planar Phantom	
	Antenna 1	Antenna 2
3.3 cm	3.5 cm	3.5 cm

Applicant: HARRIS Corporation	FCC ID: OWDTR-0074-E	IC: 3636B-0074	
DUT Type: Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		
	Page 22 of 90		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 0830110WD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ETL ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

12.0 SAR SCALING (TUNE-UP TOLERANCE)

TABLE 7

SCALING OF MAX. SAR LEVELS (MANUFACTURER'S TUNE-UP TOLERANCE SPECIFICATION)

Test Config.	Test Freq. (MHz)	Antenna Accessory ID #	Battery Accessory ID #	Body-worn Accessory ID #	Conducted Power (W) Before Test	SAR Level 1g (50% PTT d/f)		Scaling up to Manuf. Upper Tol. Power Spec.	Scaled SAR (50% PTT d/f) 1g (W/kg)
						W/kg	Plot #		
Face-held	824.0	2	d	n/a	3.13	1.81	F2	+0.14 dB	1.87
Body-worn	770.0	1	a	5	2.85	3.08	B1	+0.15 dB	3.19
SAR LIMITS					HEAD / BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg		1 gram average		Occupational / Controlled

Manufacturer's Rated Output Power Specification inc. Upper Tolerance

700 Band = 2.95 Watts

700 Band = 2.00 Watts

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 90

	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

13.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for the original System radio model SAR evaluations were selected in accordance with the procedures described in FCC KDB 447498 Section 6) c) (see reference [7]).
2. The original System radio model was evaluated for SAR in accordance with the procedures described in FCC KDB 643646 (see reference [8]) and is previously certified for the FCC with FCC ID: OWDTR-0074-E and for IC with IC: 3636B-0074.
3. The number of test frequencies and the test channels evaluated for the Scan radio model SAR evaluations were selected in accordance with the procedures described in FCC KDB Inquiry #235657.
4. The SAR evaluations were performed with the DUT battery fully charged.
5. The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables. A SAR-versus-Time power droop evaluation was performed (see Appendix A).
6. The fluid temperature remained within +/-2°C from the fluid dielectric parameter measurement to the completion of the SAR evaluation.
7. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
8. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

14.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For Body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
 - e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
 - f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
 - g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					



Test Lab Certificate No. 2470.01


15.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, system checks were performed with a planar phantom and 835 MHz SPEAG dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.	Dev.					
Sep 22	Body 835	2.49 ±10%	2.40	-3.6%	55.2 ±5%	57.0	+3.3%	0.97 ±5%	0.99	+2.1%	1000	23.0	23.3	≥ 15	36	101.1
Sep 28	Head 835	2.35 ±10%	2.35	0.0%	41.5 ±5%	42.5	+2.4%	0.90 ±5%	0.94	+4.4%	1000	22.0	22.3	≥ 15	31	101.1
Dec 5	Body 835	2.49 ±10%	2.39	-4.0%	55.2 ±5%	55.6	+0.7%	0.97 ±5%	0.98	+1.0%	1000	23.0	20.6	≥ 15	30	101.1

Notes	1.	The target SAR values are the measured values specified by the SAR system manufacturer in the dipole calibration (see Appendix E).
	2.	The target fluid dielectric parameters are the nominal values specified by the SAR system manufacturer in the dipole calibration (see Appendix E) and specified in IEEE Standard 1528-2003 (Head) and IC RSS-102 Issue 4 (Body).
	3.	The fluid temperature remained within +/-2°C from the fluid dielectric parameter measurement to the completion of the system performance check.
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
	5.	<p>System Performance Checks were not performed for all DUT SAR measurement dates based on compliance with the following provision per TCBC Workshop Presentation April 5-7, 2011 (Kwok Chan Presentation File 04-06-2011-FCC 4 RF Exposure Guidance 040611- KC):</p> <p><u>SAR System Verification</u></p> <p>when head and body tissue dielectric parameters are required to test a device, separate SAR system verifications are required</p> <ul style="list-style-type: none"> - daily verification of each liquid is usually not necessary when liquid parameter tolerances are maintained in a controlled environment - typically every few days is sufficient or when liquid is changed

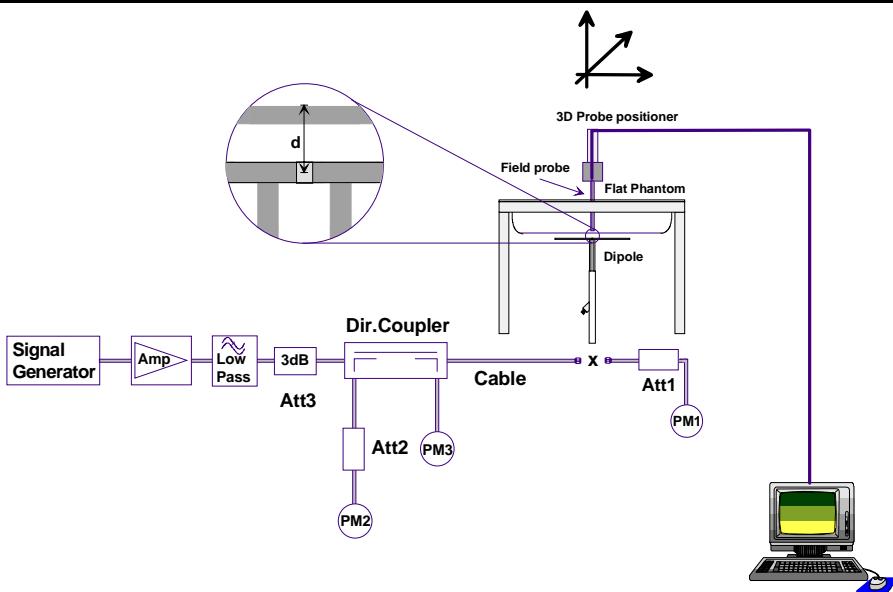

System Performance Check Measurement Setup Diagram (IEEE Standard 1528-2003)

835 MHz SPEAG Validation Dipole Setup

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

16.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES					
INGREDIENT	Water	835 MHz Head Tissue Mixture	40.71 %	835 MHz Body Tissue Mixture	53.79 %
	Sugar		56.63 %		45.13 %
	Salt		1.48 %		0.98 %
	HEC		0.99 %		--
	Bactericide		0.19 %		0.10 %

17.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
	Spatial Average (averaged over the whole body)	0.08 W/kg	0.4 W/kg
	Spatial Peak (averaged over any 1 g of tissue)	1.6 W/kg	8.0 W/kg
	Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celtech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.						Page 26 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

18.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 25 liters
<u>Phantom 1</u>	
Type	Side Planar Phantom
Shell Material	Plexiglass
Bottom Thickness	2.0 mm ± 0.1 mm
Inner Dimensions	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
<u>Phantom 2</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 90	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 0830110WD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

19.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy \pm 8%)	
Frequency:	10 MHz to $>$ 6 GHz; Linearity: \pm 0.2 dB (30 MHz to 3 GHz)	
Directivity:	\pm 0.2 dB in head tissue (rotation around probe axis) \pm 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to $>$ 100 mW/g; Linearity: \pm 0.2 dB	
Surface Detect:	\pm 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	

20.0 PHANTOM(S)

<p>The Side Planar Phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and Body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/- 0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski planar phantom.</p>	
<p>The SAM Twin Phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/- 0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix H for specifications of the SAM Twin Phantom V4.0C).</p>	

21.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	 <p>Device Holder</p>
--	--

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

22.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	22Jun11	Annual
x	-D835V2 Validation Dipole	00217	4d075	20Apr09	Triennial
x	Side Planar Phantom	00156	161	CNR	CNR
x	Barski Planar Phantom	00155	03-01	CNR	CNR
x	SPEAG SAM Twin Phantom V4.0C	00154	1033	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

23.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION

SAR dipoles calibrated less than two years ago but more than one year ago were confirmed by maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5Ω from prior calibration) requirements per extended calibrations in FCC KDB 450824 (see reference [9]).

SPEAG D835V2 SN: 4d075						
Date of Measurement	Frequency	Fluid Type	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
Apr. 20, 2009	835 MHz	Head	-29.1	-	51.8	-
Jun. 29, 2011			-27.3	-6.2%	48.6	-3.2
Apr. 20, 2009	835 MHz	Body	-26.7	-	48.0	-
Apr. 20, 2011			-24.0	10.1%	51.3	3.3

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074		
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 29 of 90						

Date(s) of Evaluation
09/22-29 & 12/5-6, 2011Test Report Serial No.
083011OWD-T1113S-C2PCTest Report Revision No.
Rev. 1.1 (2nd Release)Test Report Issue Date
December 14, 2011Description of Test(s)
Specific Absorption RateRF Exposure Category
Occupational (Controlled)

Test Lab Certificate No. 2470.01

24.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION

Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (835 MHz)	E.2.1	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	5.15	Normal	1	0.64	0.43	3.3	2.2	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	3.99	Normal	1	0.6	0.49	2.4	2.0	∞
Combined Standard Uncertainty				RSS				11.38	10.90
Expanded Uncertainty (95% Confidence Interval)				k=2				22.76	21.79
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2									

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

25.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "SAR Test Reduction Considerations for Occupational PTT Radios", KDB 643646 D01v01r01: April 2011.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [13] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [14] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 2: June 2007.
- [15] Federal Communications Commission, Office of Engineering and Technology - "Permissive Change Policies" - KDB Publication 178919 D01v05r01: June 2011.
- [16] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 22 Application Note, SAR Sensitivities: Sept. 2005.

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celtech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc.					

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 90

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Face SAR Plot F1

Date Tested: 09/29/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 22C; Fluid Temp: 22.2C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used (interpolated): $f = 824$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.5, 6.5, 6.5); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.26 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.32 V/m; Power Drift = -0.798 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.869 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.23 mW/g

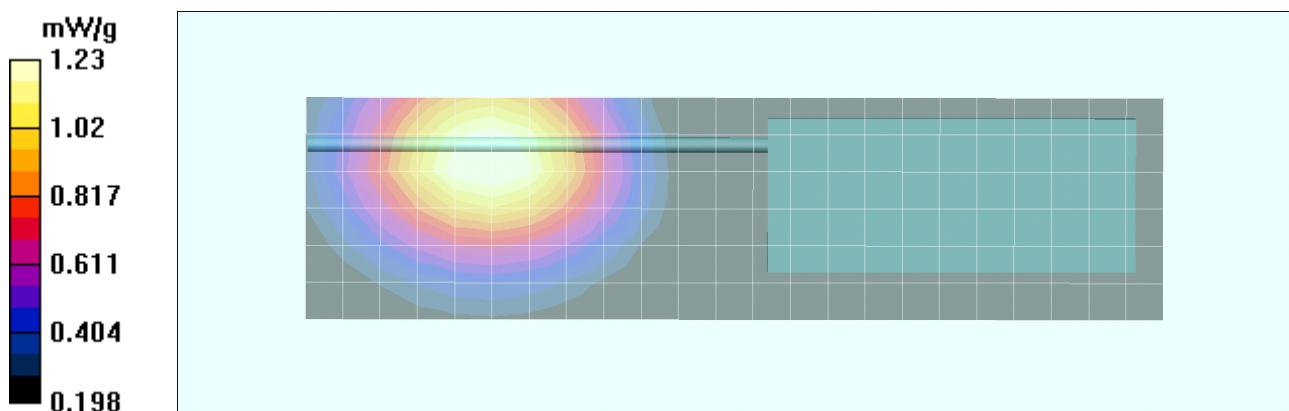

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Face SAR Plot F2

Date Tested: 09/29/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 22C; Fluid Temp: 22.2C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used (interpolated): $f = 824$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.5, 6.5, 6.5); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.82 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.8 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 4.42 W/kg

SAR(1 g) = 3.61 mW/g; SAR(10 g) = 2.71 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

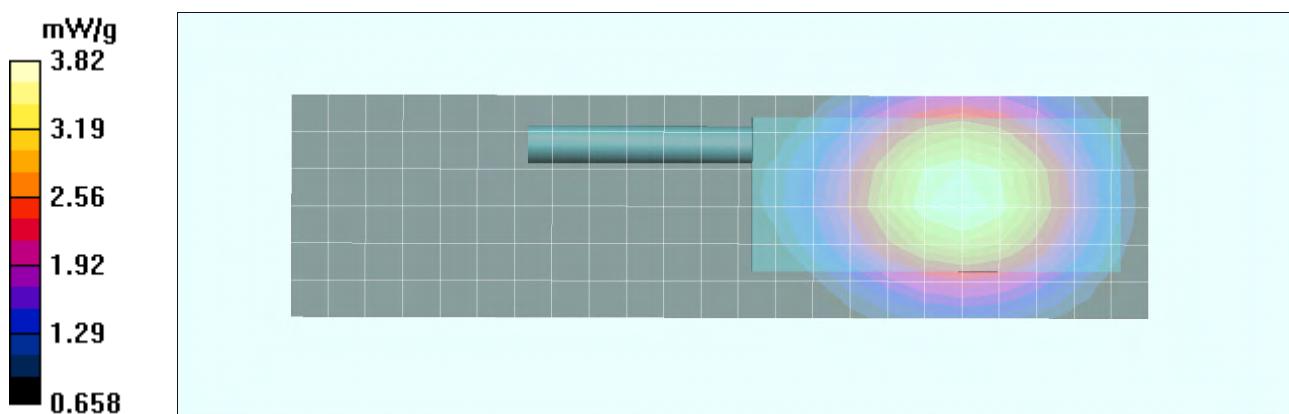


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

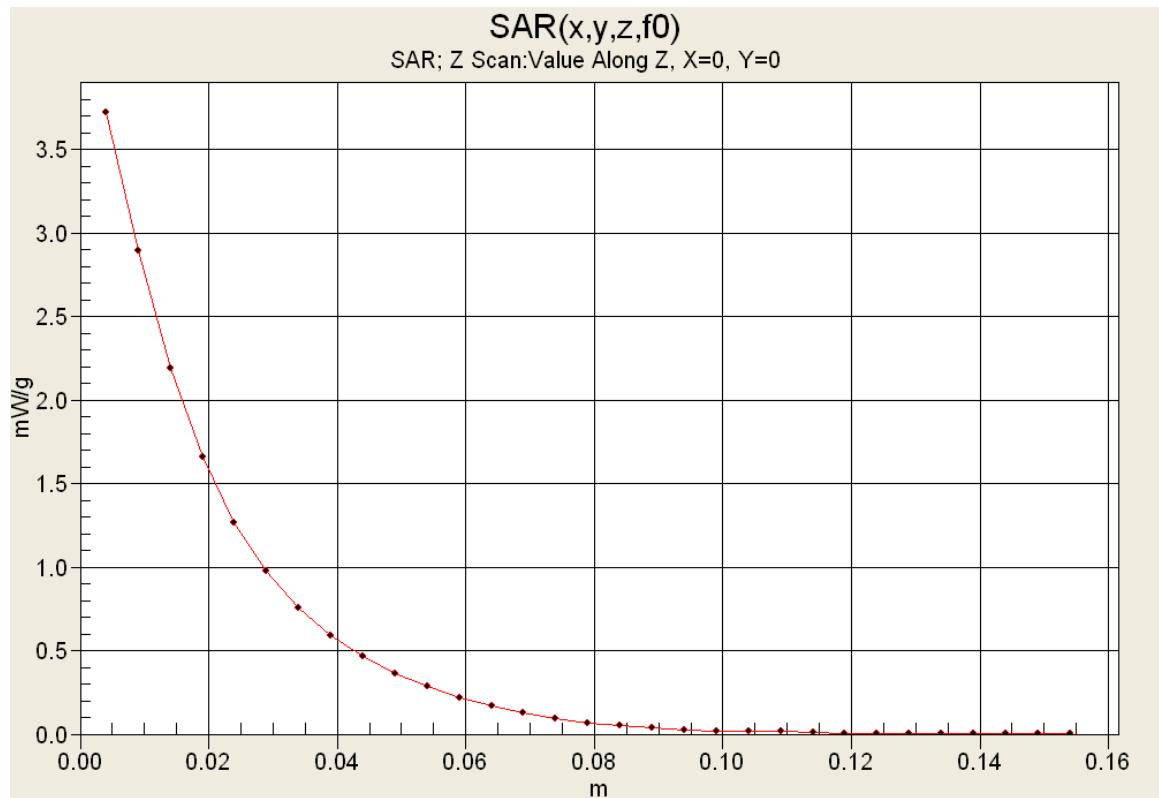

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B1

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 6.48 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.9 V/m; Power Drift = -0.828 dB

Peak SAR (extrapolated) = 7.93 W/kg

SAR(1 g) = 6.16 mW/g; SAR(10 g) = 4.45 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 6.60 mW/g

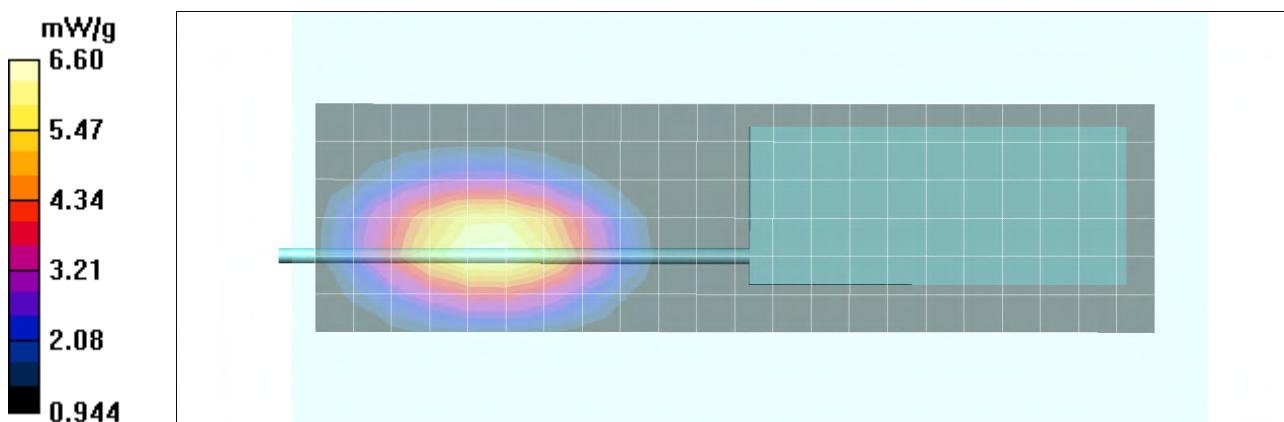


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 90

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

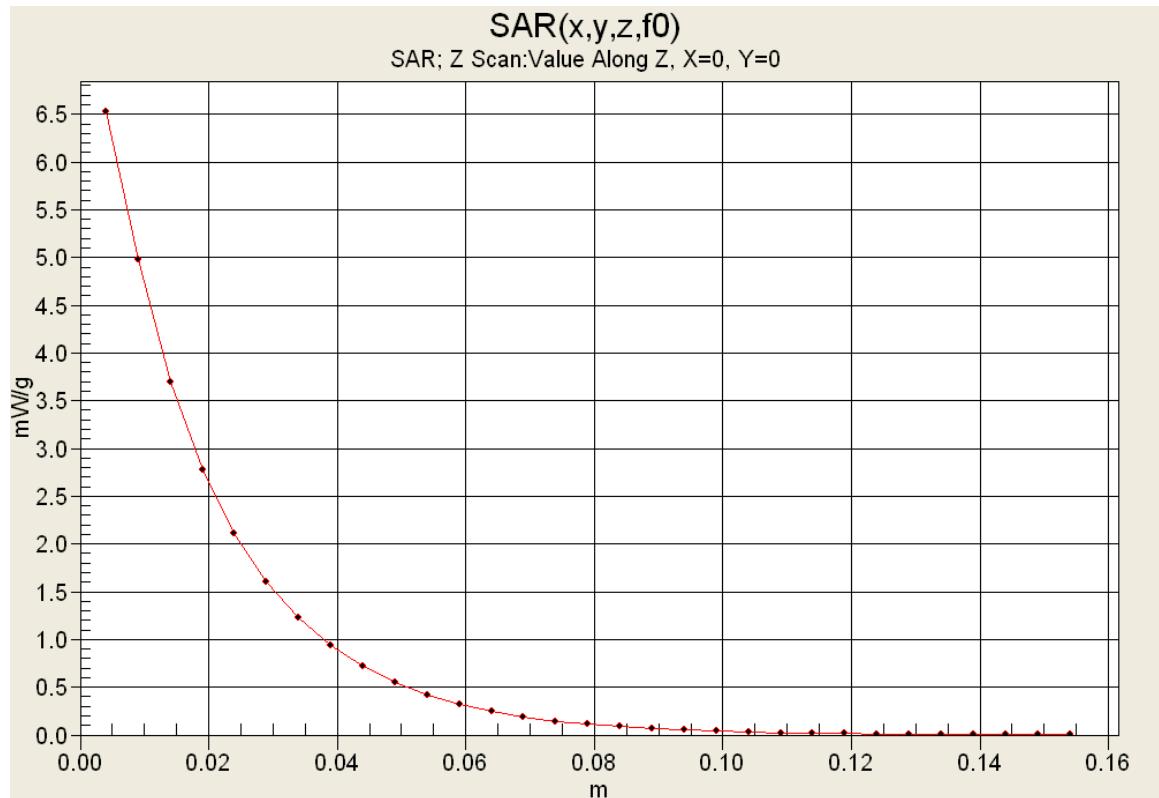

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B2

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 802 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 802$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 57.1$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.33 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 56.4 V/m; Power Drift = -0.415 dB

Peak SAR (extrapolated) = 4.90 W/kg

SAR(1 g) = 3.68 mW/g; SAR(10 g) = 2.58 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.96 mW/g

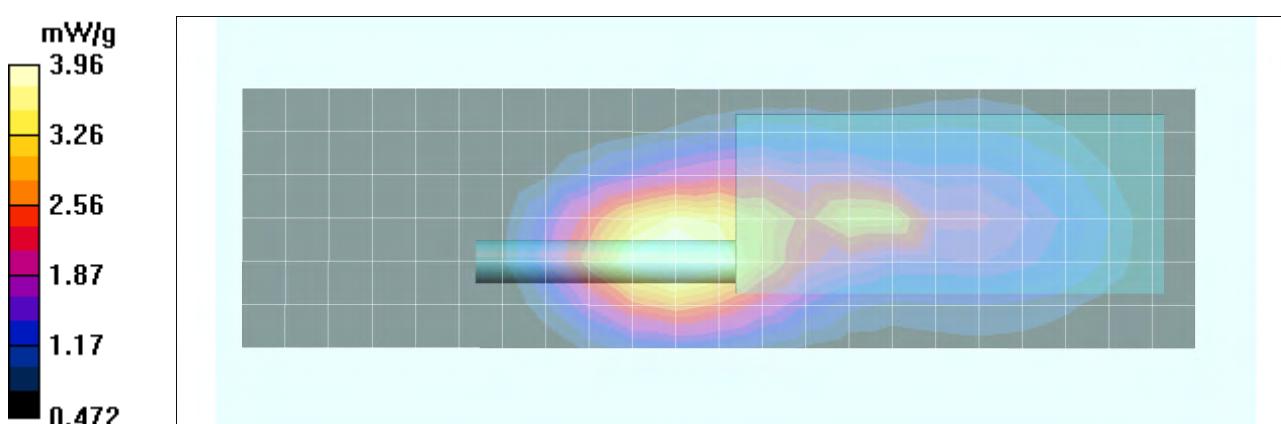

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 90	

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B3

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.53 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.89 V/m; Power Drift = -0.320 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 1.07 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.49 mW/g

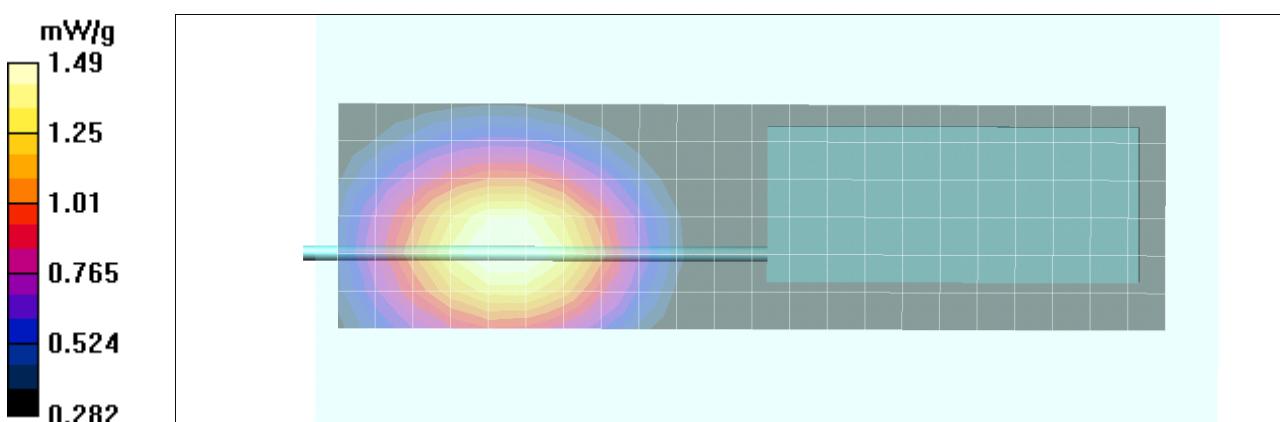

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B4

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 824 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 824$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 57.1$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.87 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.1 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.73 mW/g; SAR(10 g) = 1.33 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.82 mW/g

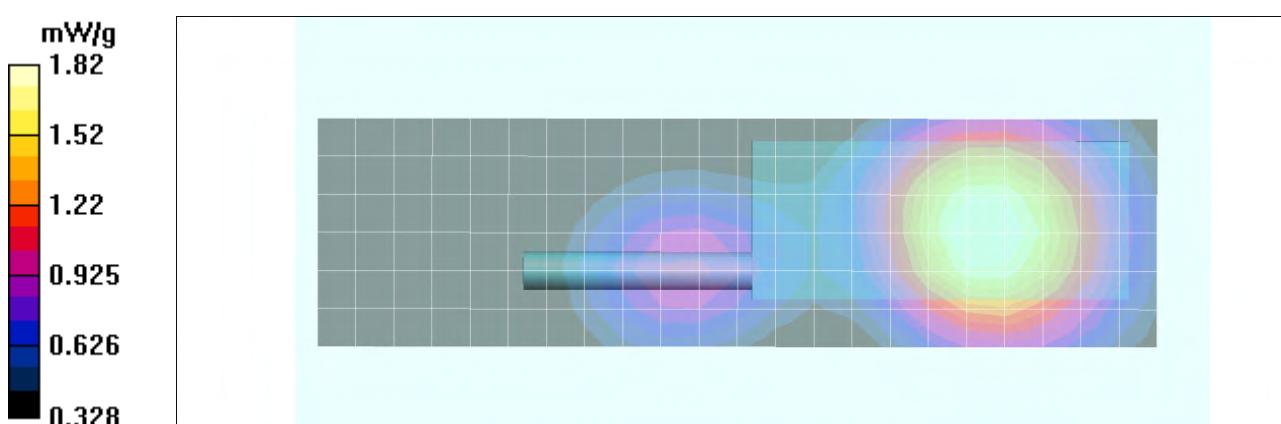

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B5

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.11 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.39 V/m; Power Drift = -0.409 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.790 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.09 mW/g

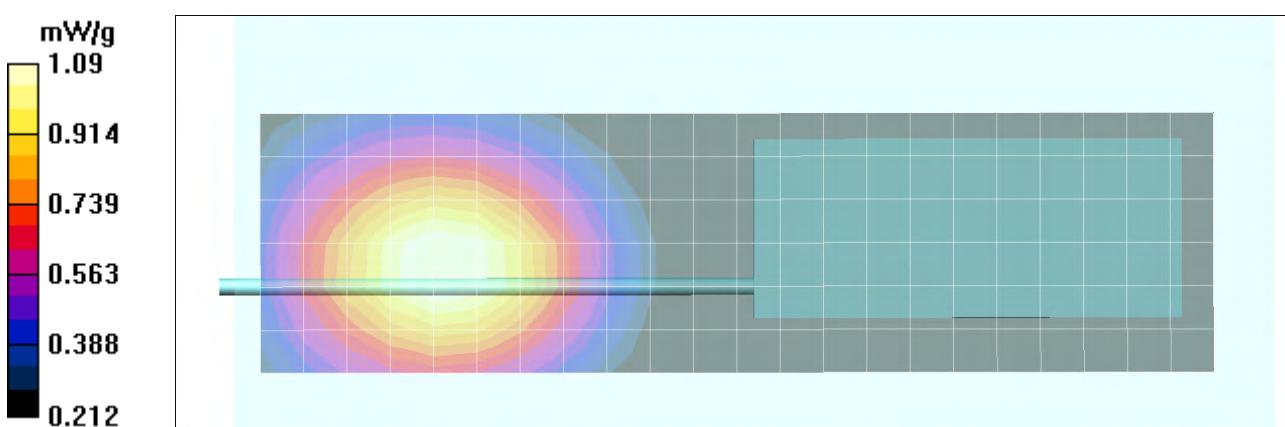

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B6

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 824 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 824$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 57.1$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.69 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.3 V/m; Power Drift = -0.177 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.57 mW/g; SAR(10 g) = 1.21 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.66 mW/g

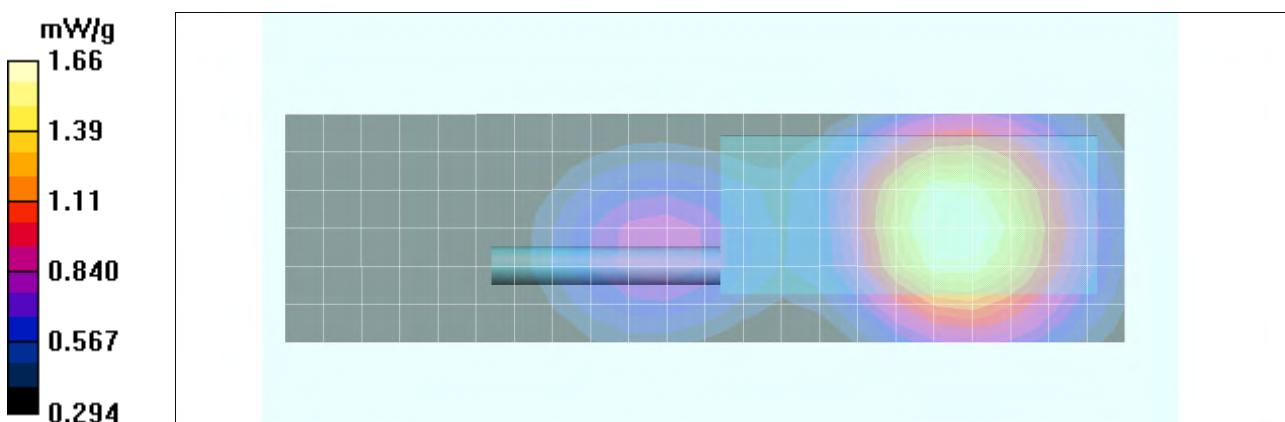

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 90	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B7

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.33 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.2 V/m; Power Drift = -0.714 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 2.19 mW/g; SAR(10 g) = 1.64 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.31 mW/g

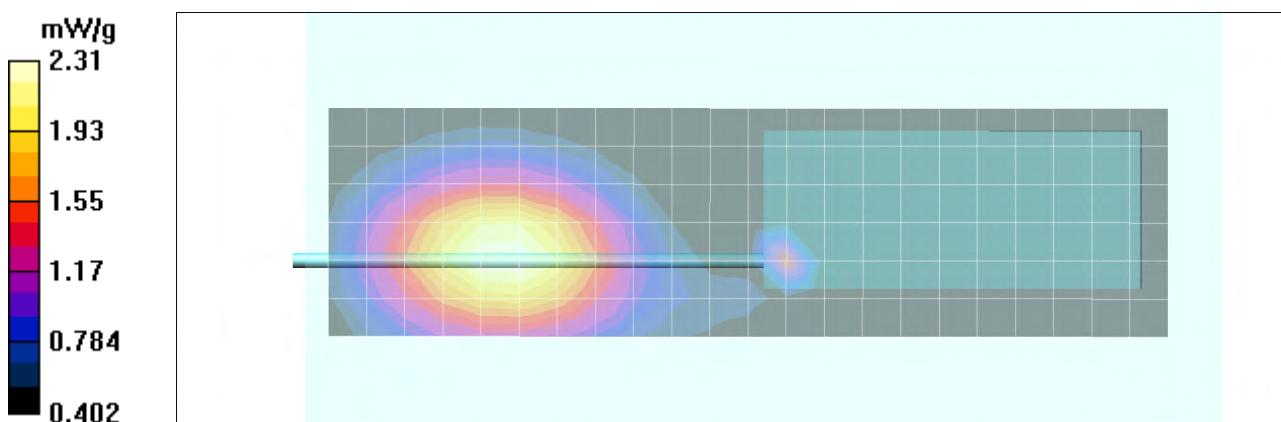

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B8

Date Tested: 09/23/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 57.4$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.75 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 42.8 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 4.08 mW/g; SAR(10 g) = 2.17 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.45 mW/g

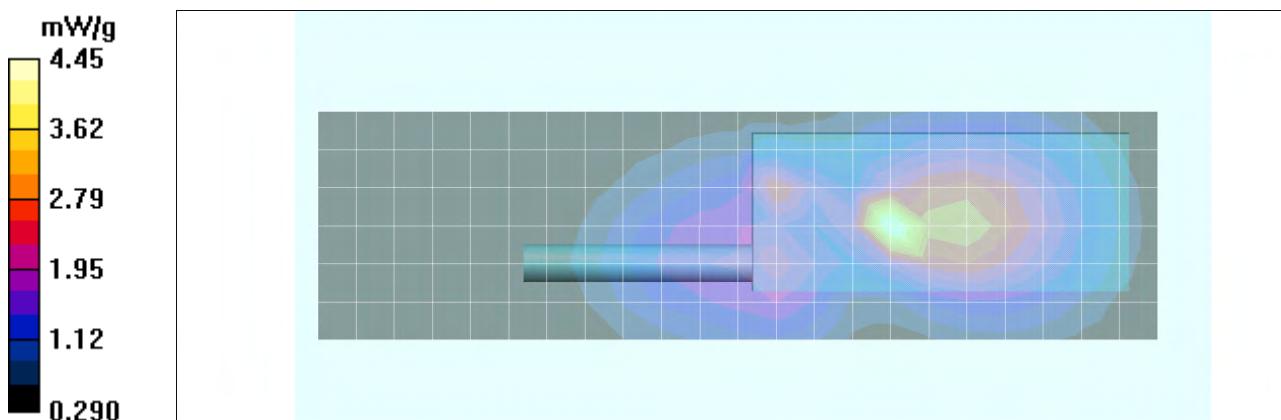

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Body SAR Plot B9

Date Tested: 12/06/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 22C; Fluid Temp: 21.1C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 770 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 770$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 56.2$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.38 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.37 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 2.09 mW/g; SAR(10 g) = 1.58 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.22 mW/g

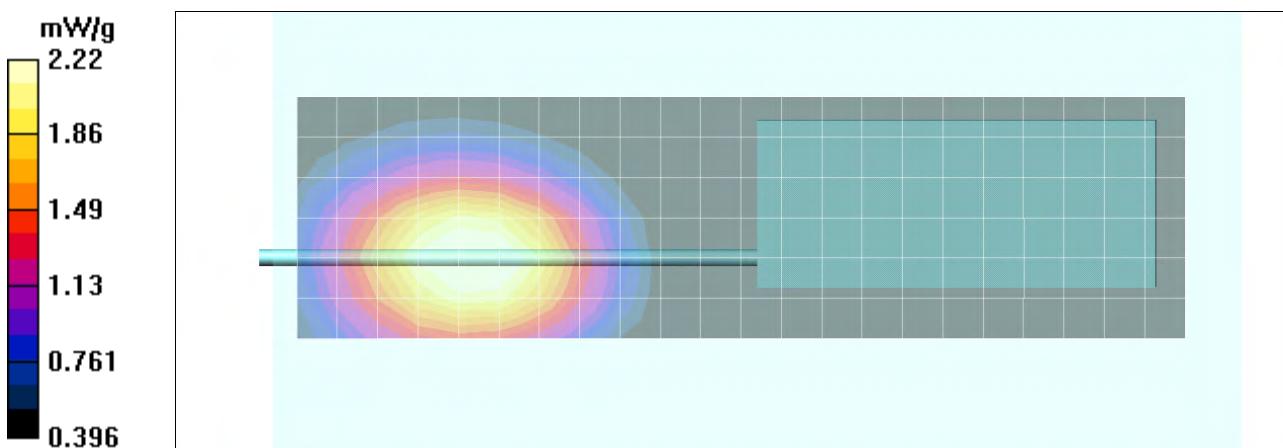

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 45 of 90	

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Body SAR Plot B10

Date Tested: 12/06/2011

DUT: Harris XG-75; Type: Portable 700/800-Band PTT Radio Transceiver; Serial: XG-T2-D104

Ambient Temp: 22C; Fluid Temp: 21.1C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 824 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used (interpolated): $f = 824$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Area Scan (7x24x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.17 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 31.5 V/m; Power Drift = -0.379 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 3 mW/g; SAR(10 g) = 2.3 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 3.16 mW/g

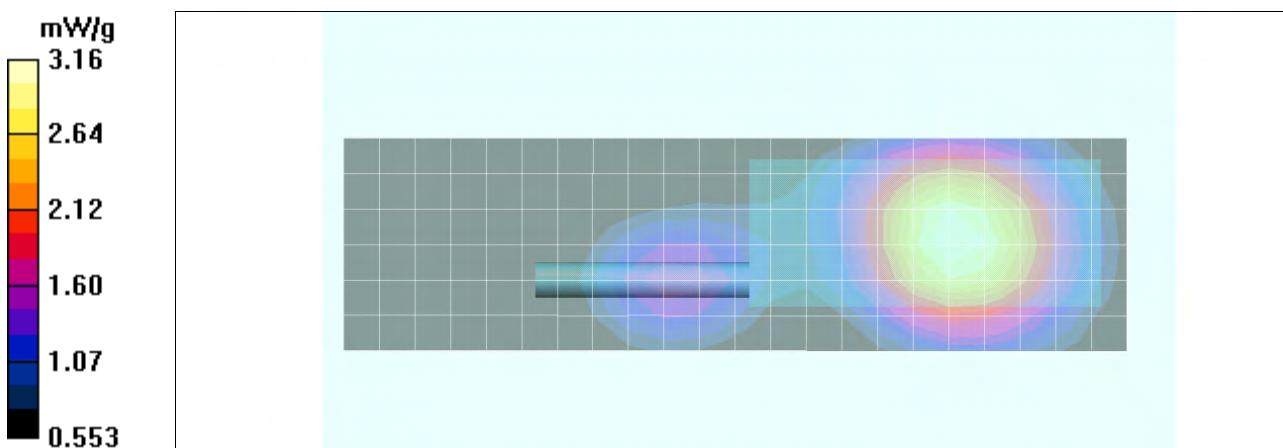


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

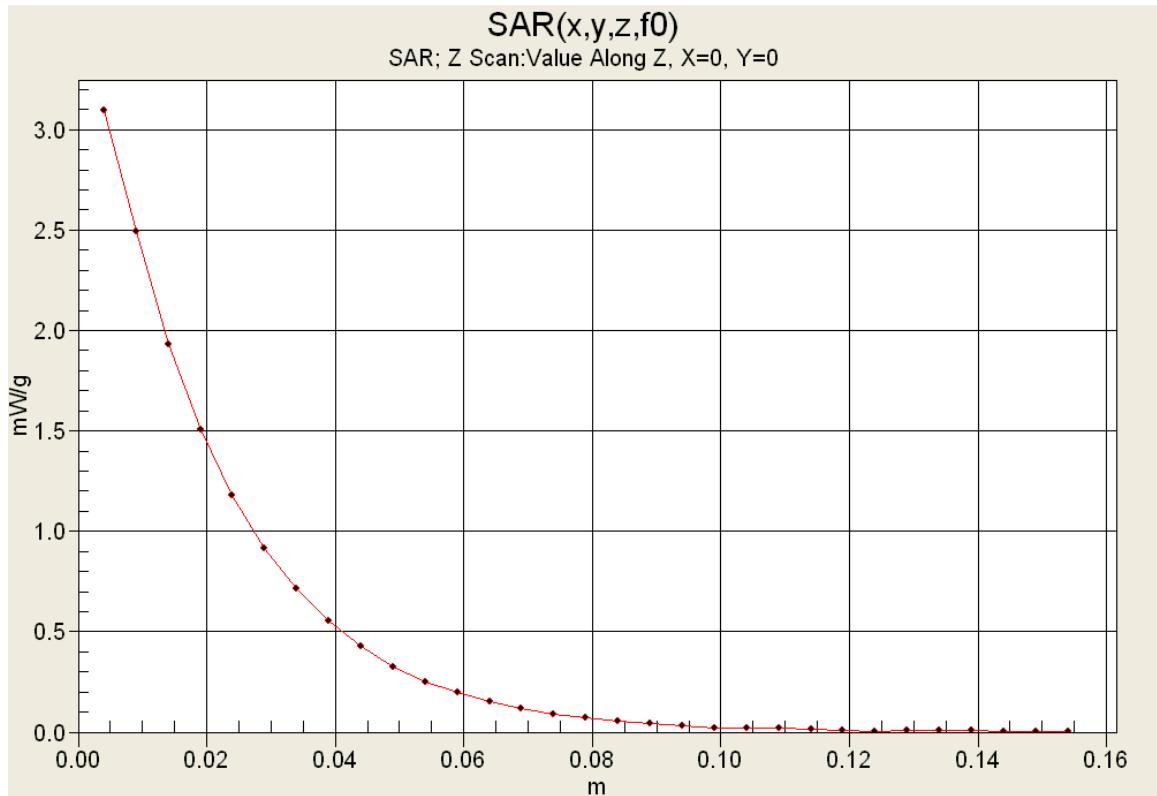

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Date Tested: 09/22/2011

System Performance Check - 835 MHz Dipole - Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d075; Calibrated: 04/20/2009

Ambient Temp: 23C; Fluid Temp: 23.3C; Barometric Pressure: 101.1 kPa; Humidity: 36%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 57$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.58 mW/g


Body d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.0 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.60 mW/g

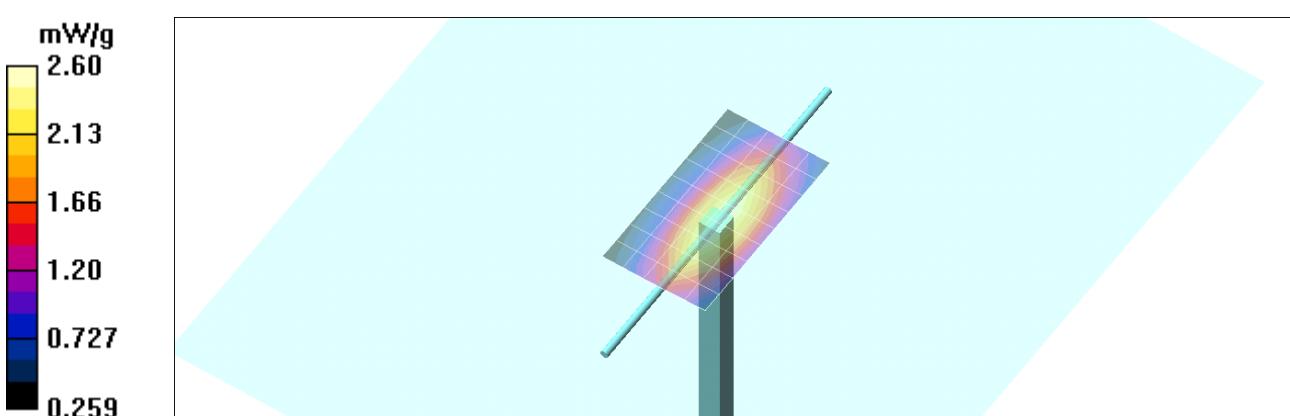


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

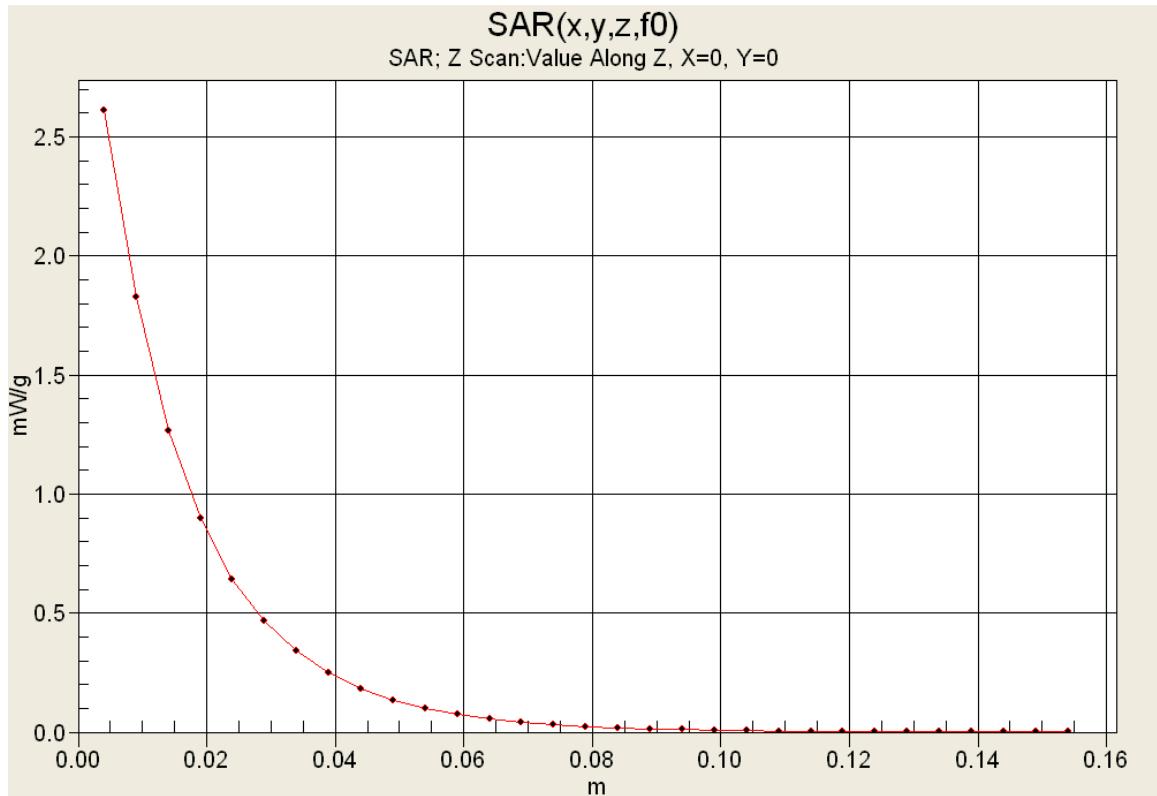

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	 HARRIS
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2011

System Performance Check - 835 MHz Dipole - Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d075; Calibrated: 04/20/2009

Ambient Temp: 22C; Fluid Temp: 22.3C; Barometric Pressure: 101.1 kPa; Humidity: 31%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.5, 6.5, 6.5); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.48 mW/g


Head d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.2 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.55 mW/g

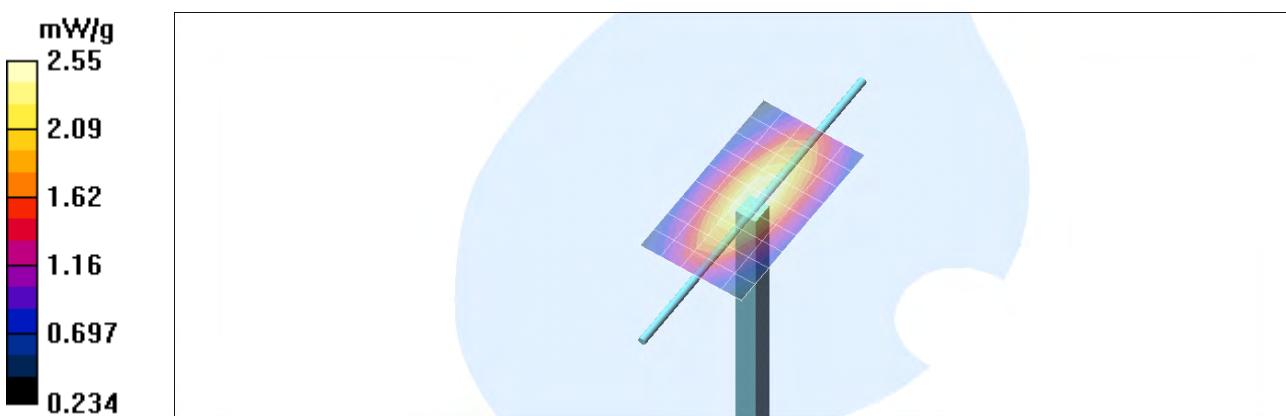


Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Z-Axis Scan

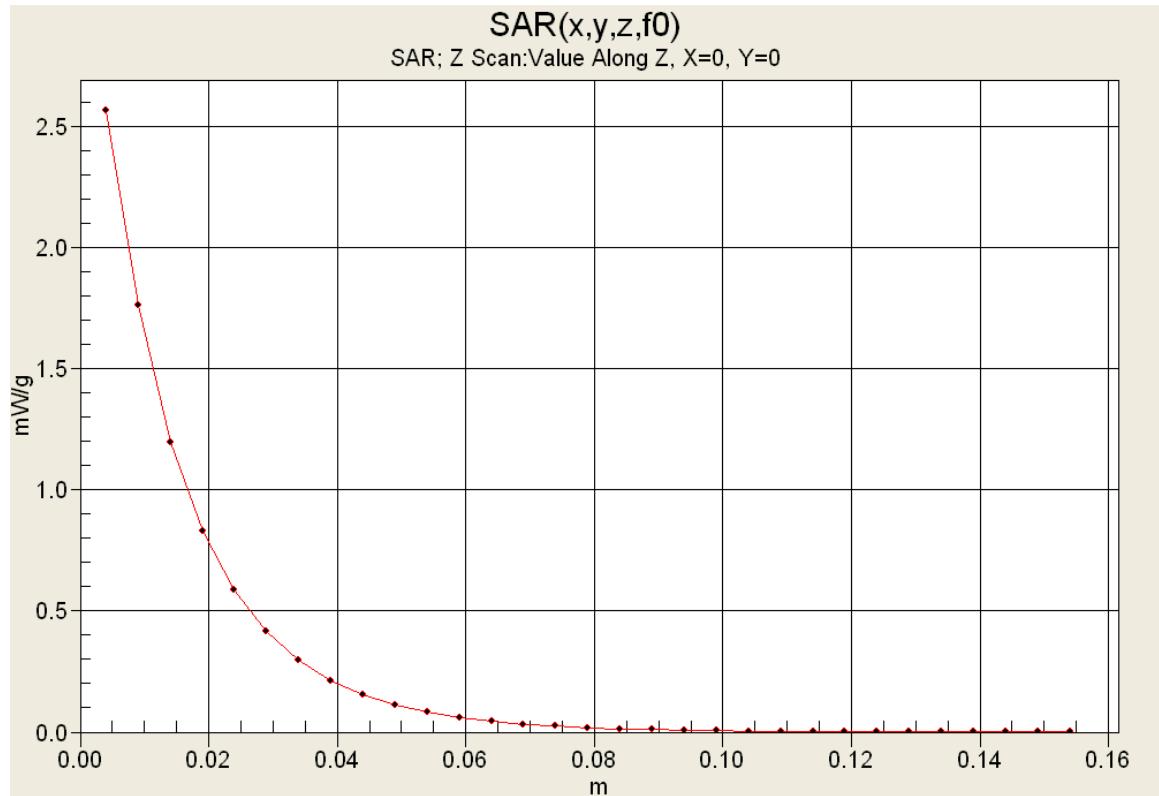

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	 HARRIS
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 12/05/2011

System Performance Check - 835 MHz Dipole - Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d075; Calibrated: 04/20/2009

Ambient Temp: 23C; Fluid Temp: 20.6C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(6.37, 6.37, 6.37); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body d=15mm Pin=250mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.58 mW/g


Body d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.8 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.59 mW/g


Maximum value of SAR (measured) = 2.59 mW/g

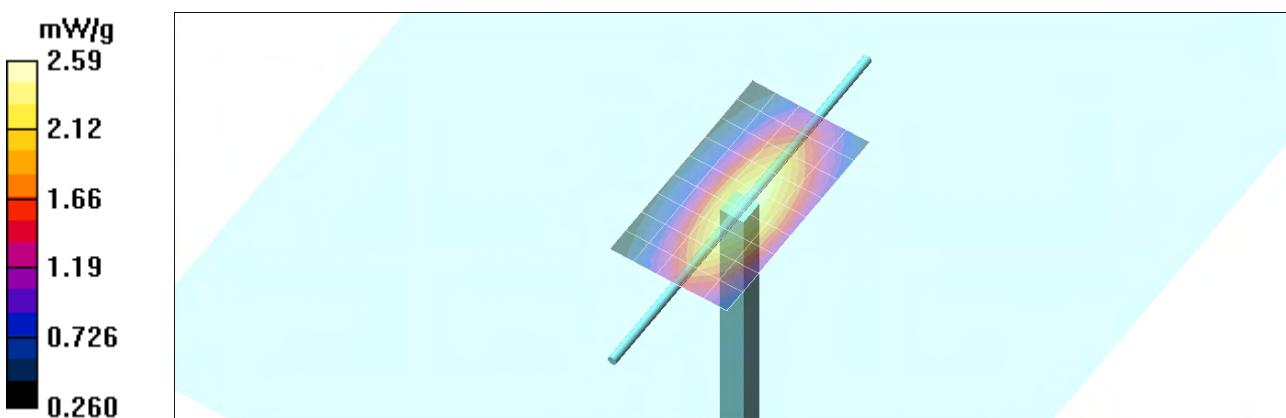

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Z-Axis Scan

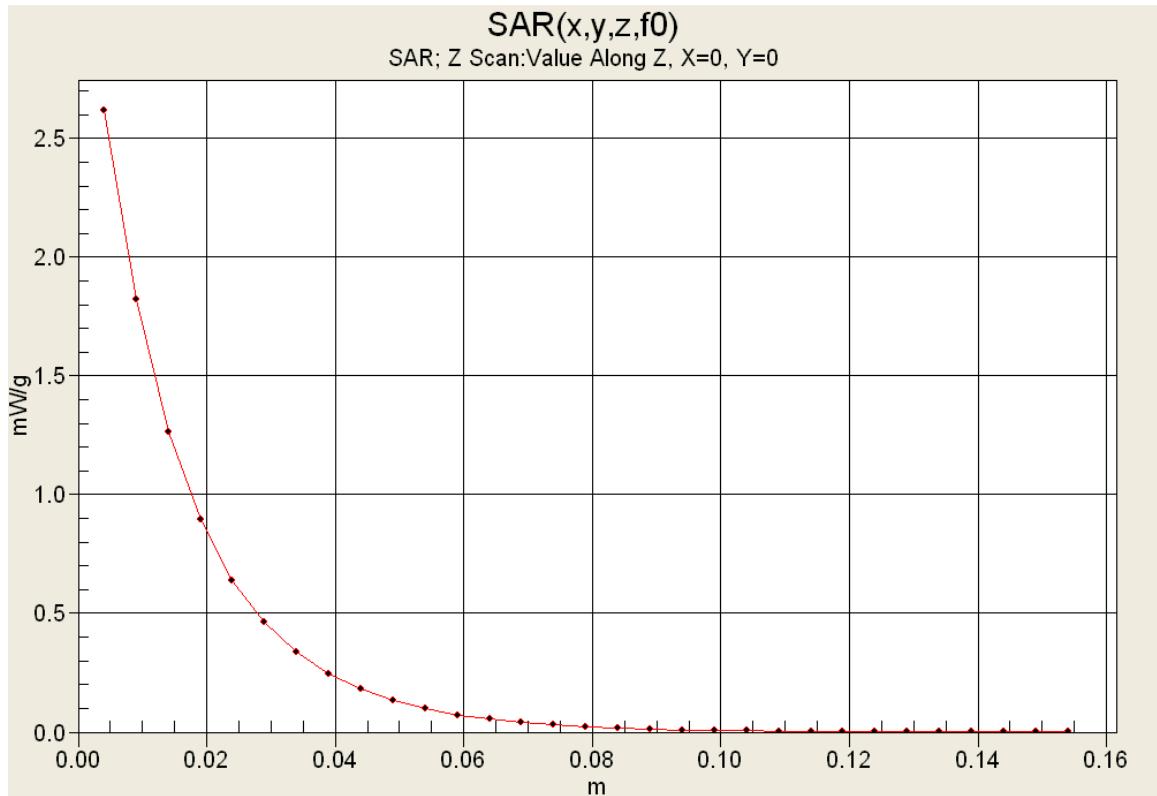

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 54 of 90	

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)		769-805/806-869 MHz	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 0830110WD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

835 MHz Body

Celltech Labs

Test Result for UIM Dielectric Parameter

22/Sep/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	57.77	0.88
0.7450	55.55	0.96	57.56	0.90
0.7550	55.51	0.96	57.28	0.92
0.7650	55.47	0.96	57.64	0.92
0.7750	55.43	0.97	57.30	0.93
0.7850	55.39	0.97	57.40	0.94
0.7950	55.36	0.97	57.17	0.96
0.8050	55.32	0.97	57.26	0.95
0.8150	55.28	0.97	56.55	0.97
0.8250	55.24	0.97	56.70	0.98
0.8350	55.20	0.97	56.95	0.99
0.8450	55.17	0.98	56.93	0.98
0.8550	55.14	0.99	56.55	1.00
0.8650	55.11	1.01	56.60	1.01
0.8750	55.08	1.02	56.58	1.04
0.8850	55.05	1.03	56.28	1.04
0.8950	55.02	1.04	56.35	1.05
0.9050	55.00	1.05	56.20	1.06
0.9150	55.00	1.06	56.37	1.06
0.9250	54.98	1.06	56.10	1.08
0.9350	54.96	1.07	56.11	1.09

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 56 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 0830110WD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

835 MHz Body

Celltech Labs
Test Result for UIM Dielectric Parameter

23/Sep/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	57.57	0.90
0.7450	55.55	0.96	57.53	0.91
0.7550	55.51	0.96	57.50	0.93
0.7650	55.47	0.96	57.28	0.93
0.7750	55.43	0.97	57.50	0.96
0.7850	55.39	0.97	57.64	0.95
0.7950	55.36	0.97	57.02	0.97
0.8050	55.32	0.97	57.17	0.97
0.8150	55.28	0.97	57.17	0.98
0.8250	55.24	0.97	57.08	1.00
0.8350	55.20	0.97	56.91	0.99
0.8450	55.17	0.98	56.95	1.01
0.8550	55.14	0.99	56.94	1.01
0.8650	55.11	1.01	56.64	1.02
0.8750	55.08	1.02	56.41	1.02
0.8850	55.05	1.03	56.53	1.03
0.8950	55.02	1.04	56.23	1.07
0.9050	55.00	1.05	56.19	1.07
0.9150	55.00	1.06	56.31	1.07
0.9250	54.98	1.06	56.10	1.09
0.9350	54.96	1.07	55.93	1.11

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074		
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz				
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 57 of 90		

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 0830110WD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

835 MHz Head

Celltech Labs
Test Result for UIM Dielectric Parameter

28/Sep/2011

Frequency (GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.7350	42.02	0.89	43.79	0.82
0.7450	41.97	0.89	43.24	0.83
0.7550	41.92	0.89	43.57	0.83
0.7650	41.86	0.89	43.53	0.85
0.7750	41.81	0.90	43.15	0.86
0.7850	41.76	0.90	43.15	0.87
0.7950	41.71	0.90	43.14	0.88
0.8050	41.66	0.90	43.06	0.90
0.8150	41.60	0.90	42.69	0.91
0.8250	41.55	0.90	42.67	0.91
0.8350	41.50	0.90	42.51	0.94
0.8450	41.50	0.91	42.63	0.93
0.8550	41.50	0.92	42.36	0.93
0.8650	41.50	0.93	42.16	0.95
0.8750	41.50	0.94	42.00	0.95
0.8850	41.50	0.95	42.05	0.97
0.8950	41.50	0.96	41.78	0.99
0.9050	41.50	0.97	41.76	0.98
0.9150	41.50	0.98	41.58	0.99
0.9250	41.48	0.98	41.43	1.02
0.9350	41.46	0.99	41.19	1.03

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074		
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz				
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 58 of 90		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 0830110WD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 ILAC-MRA  TUV ACCREDITED
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

835 MHz Head

Celltech Labs

Test Result for UIM Dielectric Parameter

29/Sep/2011

Frequency (GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.7350	42.02	0.89	44.07	0.81
0.7450	41.97	0.89	43.80	0.83
0.7550	41.92	0.89	43.60	0.83
0.7650	41.86	0.89	43.59	0.86
0.7750	41.81	0.90	43.36	0.86
0.7850	41.76	0.90	43.20	0.88
0.7950	41.71	0.90	43.35	0.87
0.8050	41.66	0.90	42.88	0.88
0.8150	41.60	0.90	42.92	0.90
0.8250	41.55	0.90	43.02	0.90
0.8350	41.50	0.90	42.34	0.92
0.8450	41.50	0.91	42.58	0.92
0.8550	41.50	0.92	42.17	0.93
0.8650	41.50	0.93	42.15	0.95
0.8750	41.50	0.94	41.99	0.96
0.8850	41.50	0.95	42.00	0.96
0.8950	41.50	0.96	41.84	0.98
0.9050	41.50	0.97	41.79	0.99
0.9150	41.50	0.98	41.71	1.00
0.9250	41.48	0.98	41.60	1.00
0.9350	41.46	0.99	41.30	1.00

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 59 of 90	

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 0830110WD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

835 MHz Body

Celltech Labs

Test Result for UIM Dielectric Parameter

05/Dec/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	56.55	0.89
0.7450	55.55	0.96	56.68	0.89
0.7550	55.51	0.96	56.58	0.92
0.7650	55.47	0.96	56.50	0.91
0.7750	55.43	0.97	56.15	0.92
0.7850	55.39	0.97	56.20	0.94
0.7950	55.36	0.97	56.13	0.95
0.8050	55.32	0.97	55.95	0.96
0.8150	55.28	0.97	56.05	0.96
0.8250	55.24	0.97	55.99	0.98
0.8350	55.20	0.97	55.62	0.98
0.8450	55.17	0.98	55.45	1.00
0.8550	55.14	0.99	55.76	0.99
0.8650	55.11	1.01	55.87	1.01
0.8750	55.08	1.02	55.52	1.03
0.8850	55.05	1.03	55.45	1.03
0.8950	55.02	1.04	55.25	1.04
0.9050	55.00	1.05	54.93	1.06
0.9150	55.00	1.06	55.28	1.07
0.9250	54.98	1.06	54.85	1.09
0.9350	54.96	1.07	54.93	1.09

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 60 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 0830110WD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

835 MHz Body

Celltech Labs
Test Result for UIM Dielectric Parameter
06/Dec/2011

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7350	55.59	0.96	56.52	0.87
0.7450	55.55	0.96	56.39	0.89
0.7550	55.51	0.96	56.21	0.91
0.7650	55.47	0.96	56.24	0.91
0.7750	55.43	0.97	56.08	0.93
0.7850	55.39	0.97	56.37	0.94
0.7950	55.36	0.97	55.87	0.95
0.8050	55.32	0.97	55.74	0.95
0.8150	55.28	0.97	55.91	0.97
0.8250	55.24	0.97	55.64	0.97
0.8350	55.20	0.97	55.67	0.99
0.8450	55.17	0.98	55.60	0.98
0.8550	55.14	0.99	55.57	1.00
0.8650	55.11	1.01	55.39	1.02
0.8750	55.08	1.02	55.33	1.03
0.8850	55.05	1.03	55.17	1.03
0.8950	55.02	1.04	55.16	1.03
0.9050	55.00	1.05	55.01	1.04
0.9150	55.00	1.06	55.11	1.06
0.9250	54.98	1.06	54.95	1.08
0.9350	54.96	1.07	54.64	1.07

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver	XG-75 7/800 (SCAN)	769-805/806-869 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 61 of 90

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX E - DIPOLE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 86 of 90



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D835V2-4d075_Apr09**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d075**

Calibration procedure(s) **QA CAL-05.v7**
Calibration procedure for dipole validation kits

Calibration date: **April 20, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: **Name** **Jeton Kastrati** **Function** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: April 22, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.1 \pm 6 %	0.89 mho/m \pm 6 %
Head TSL temperature during test	(22.1 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 mW / g
SAR normalized	normalized to 1W	9.40 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.46 mW /g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.54 mW / g
SAR normalized	normalized to 1W	6.16 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.19 mW /g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature during test	(22.1 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.49 mW / g
SAR normalized	normalized to 1W	9.96 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.61 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.64 mW / g
SAR normalized	normalized to 1W	6.56 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.39 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 3.1 $j\Omega$
Return Loss	- 29.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.0 Ω - 4.1 $j\Omega$
Return Loss	- 26.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.401 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 09, 2007

DASY5 Validation Report for Head TSL

Date/Time: 14.04.2009 11:20:38

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d075

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.97, 5.97, 5.97); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin=250mW; dip=15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.74 mW/g

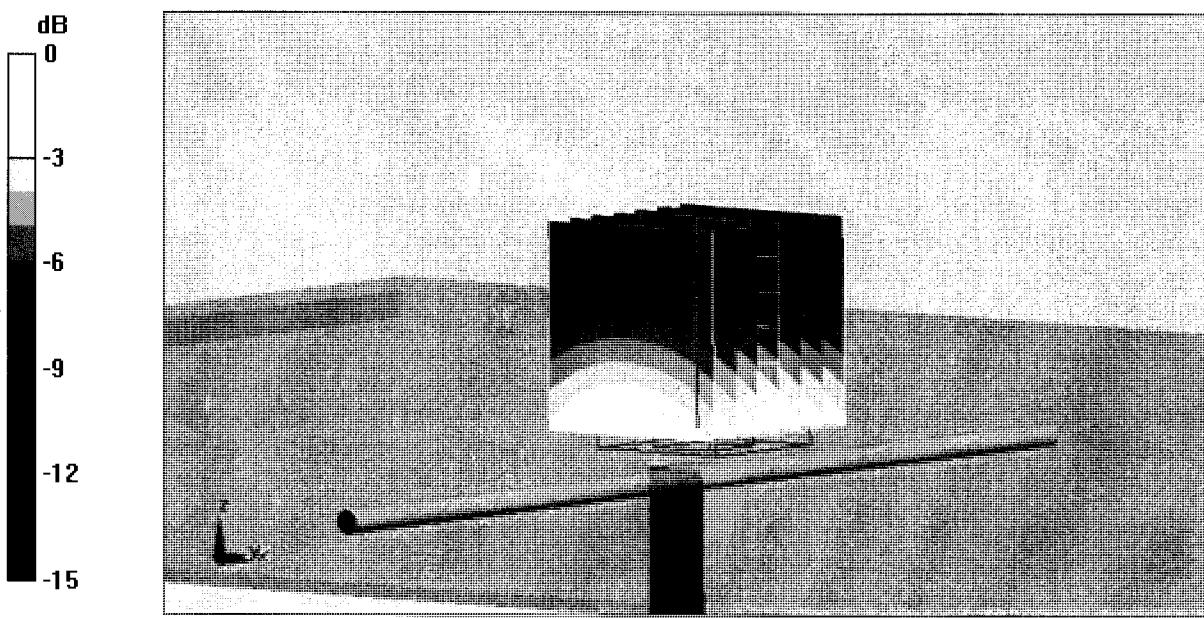


Impedance Measurement Plot for Head TSL

CH1 S11 1 U FS 1: 51.762 Ω -3.1074 Ω 61.339 pF 14 Apr 2009 09:17:58
835.000 000 MHz

*
Del
Cor

Avg
16

↑

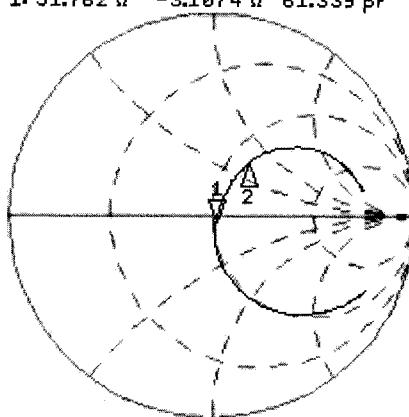


CH1 Markers
2: 60.352 Ω
33.270 Ω
900.000 MHz

CH2 S11 L06 5 dB/ REF -20 dB 1:-29.100 dB 835.000 000 MHz

Cor
Avg
16

↑

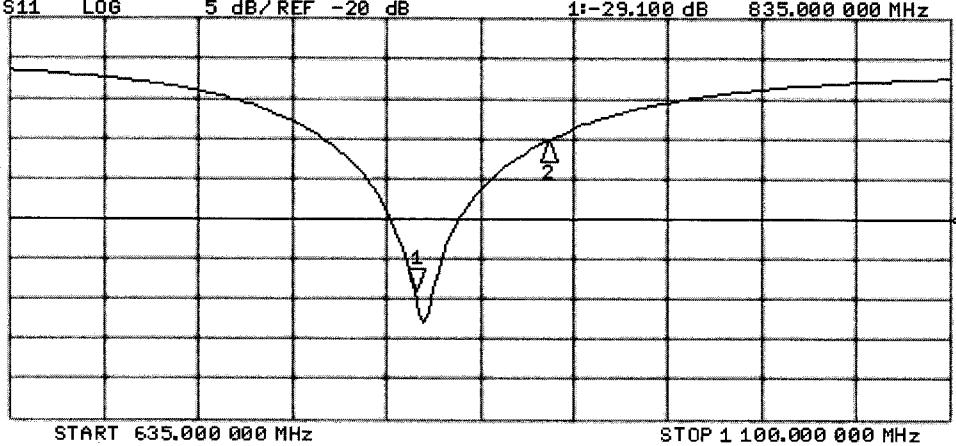

CH2 Markers
2:-10.391 dB
900.000 MHz

START 635.000 000 MHz

STOP 1 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 20.04.2009 09:57:39

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d075

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.9, 5.9, 5.9); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.4 V/m; Power Drift = -0.00173 dB

Peak SAR (extrapolated) = 3.61 W/kg


SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 2.9 mW/g

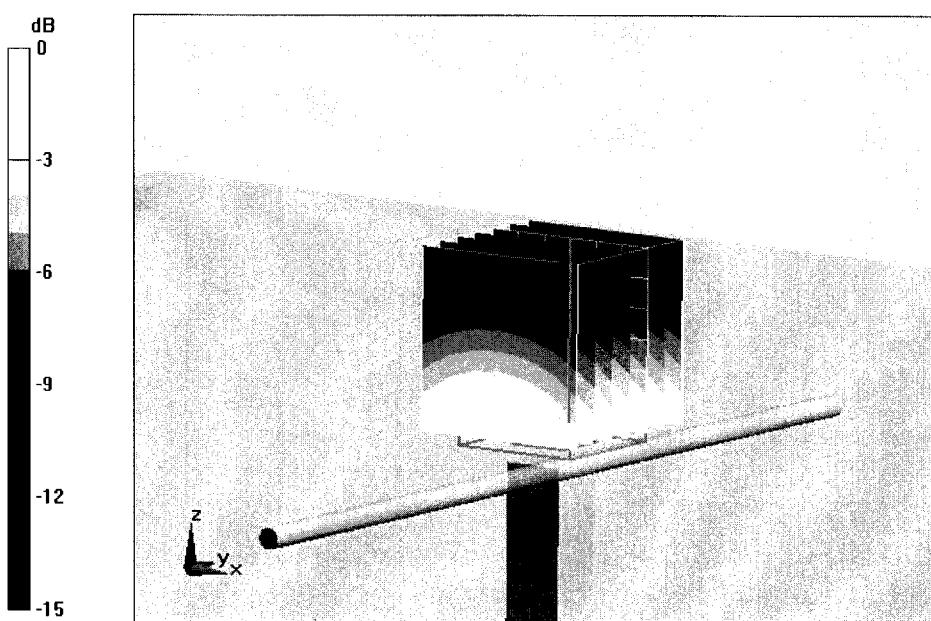

0 dB = 2.9mW/g

Impedance Measurement Plot for Body TSL

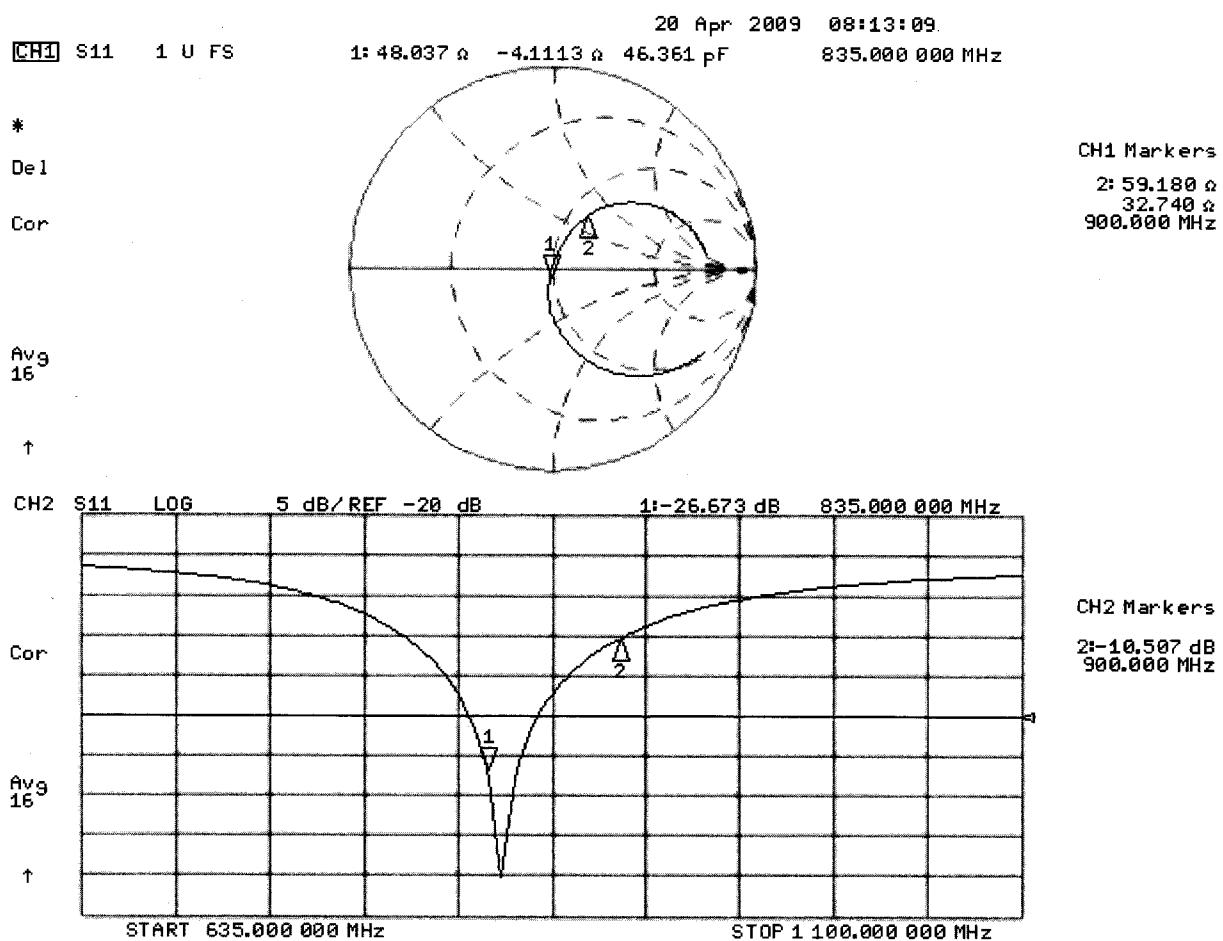

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX F - PROBE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 87 of 90



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **ET3-1590_Jun11**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4**
 Calibration procedure for dosimetric E-field probes

Calibration date: **June 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = **NORM_{x,y,z}** * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to **NORM_{x,y,z}** * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Calibrated: June 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.93	2.00	1.66	$\pm 10.1\%$
DCP (mV) ^B	96.0	98.7	88.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	104.2	$\pm 2.7\%$
			Y	0.00	0.00	1.00	117.7	
			Z	0.00	0.00	1.00	129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.30	7.30	7.30	0.18	2.10	± 13.4 %
835	41.5	0.90	6.50	6.50	6.50	0.38	2.55	± 12.0 %
900	41.5	0.97	6.39	6.39	6.39	0.39	2.47	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1590

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.82	7.82	7.82	0.12	2.04	± 13.4 %
835	55.2	0.97	6.37	6.37	6.37	0.42	2.33	± 12.0 %
900	55.0	1.05	6.27	6.27	6.27	0.40	2.45	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

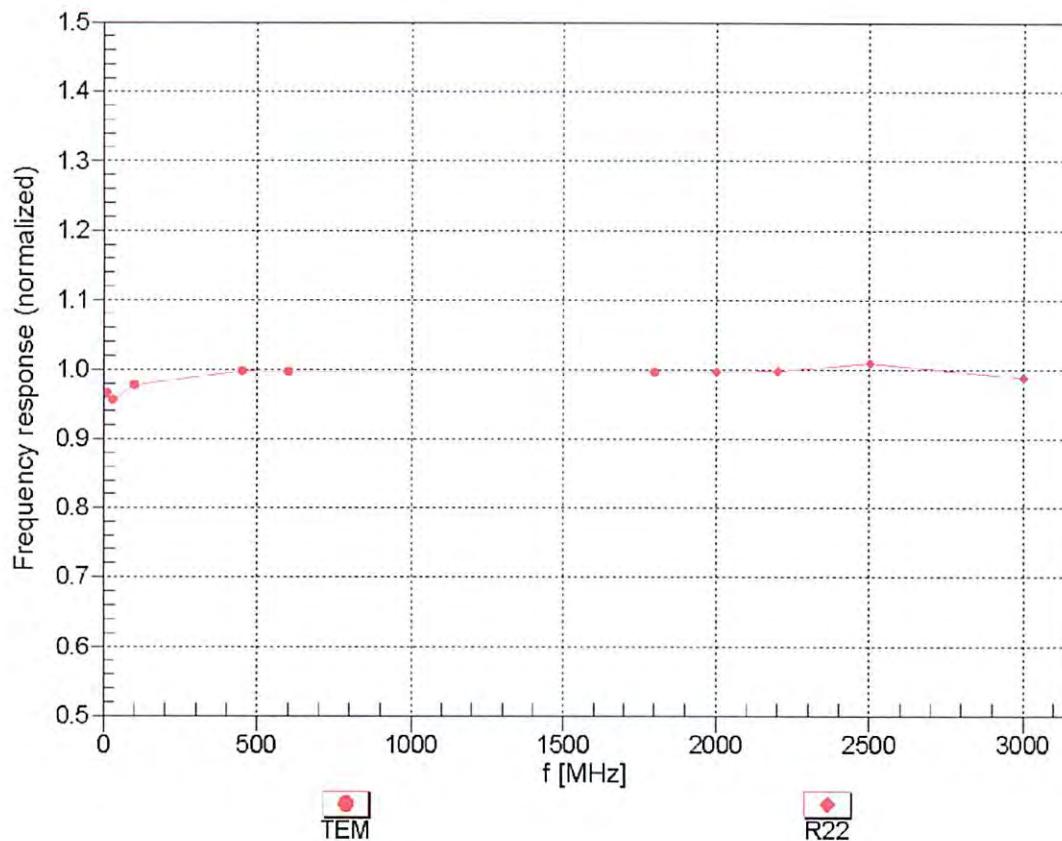



Uncertainty of Frequency Response of E-field: $\pm 6.3\% (k=2)$

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


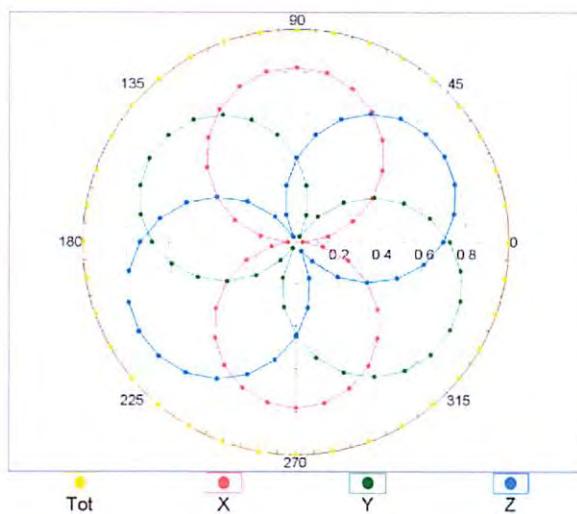


f=1800 MHz,R22

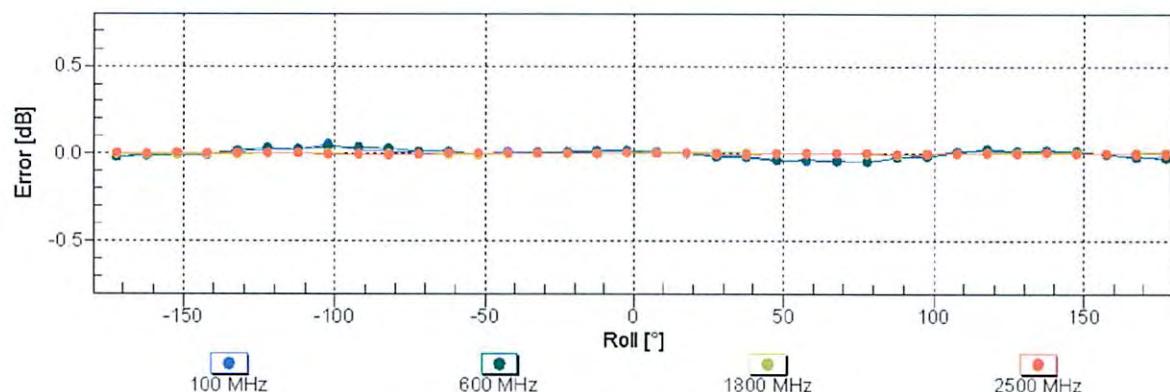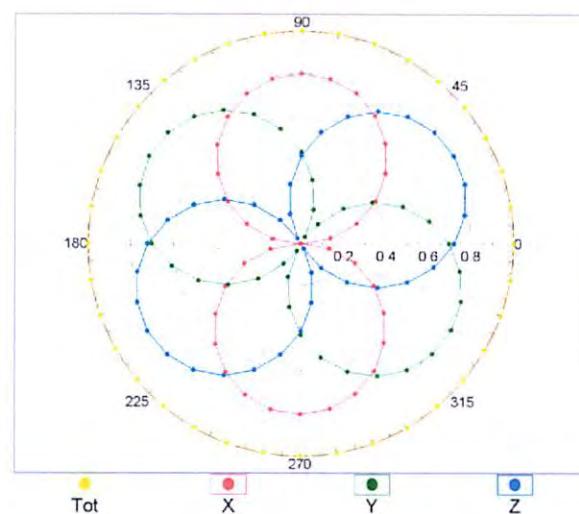Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Dynamic Range $f(\text{SAR}_{\text{head}})$

(TEM cell , $f = 900$ MHz)

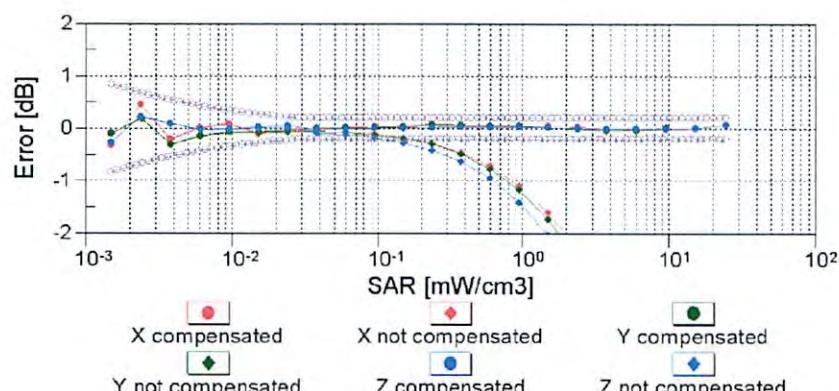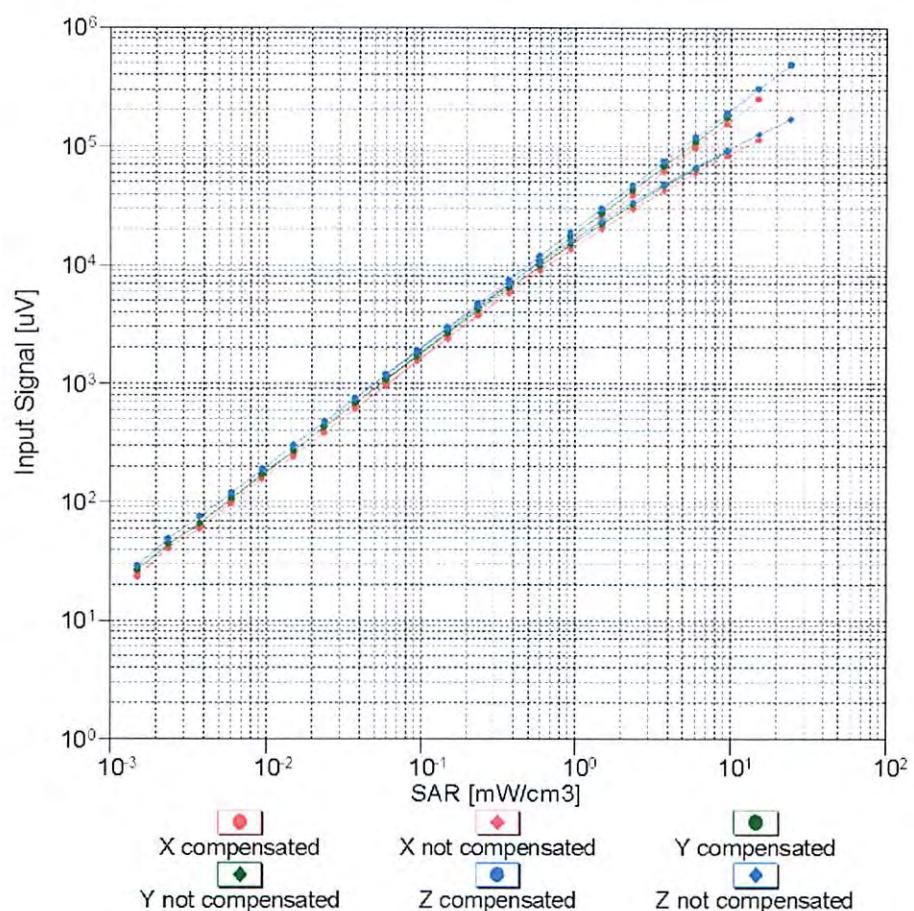


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

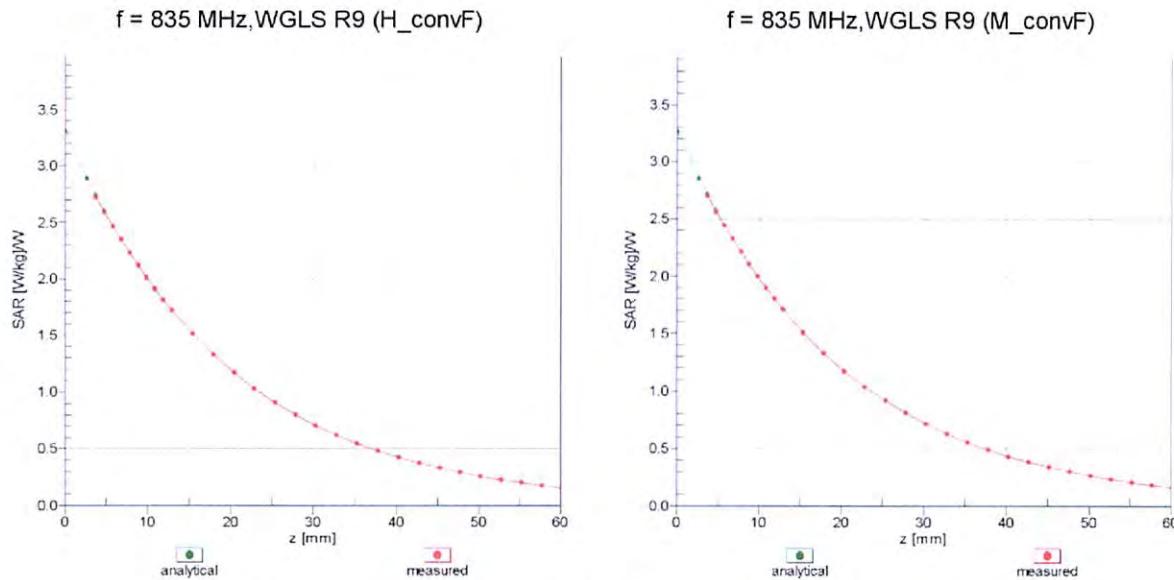

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

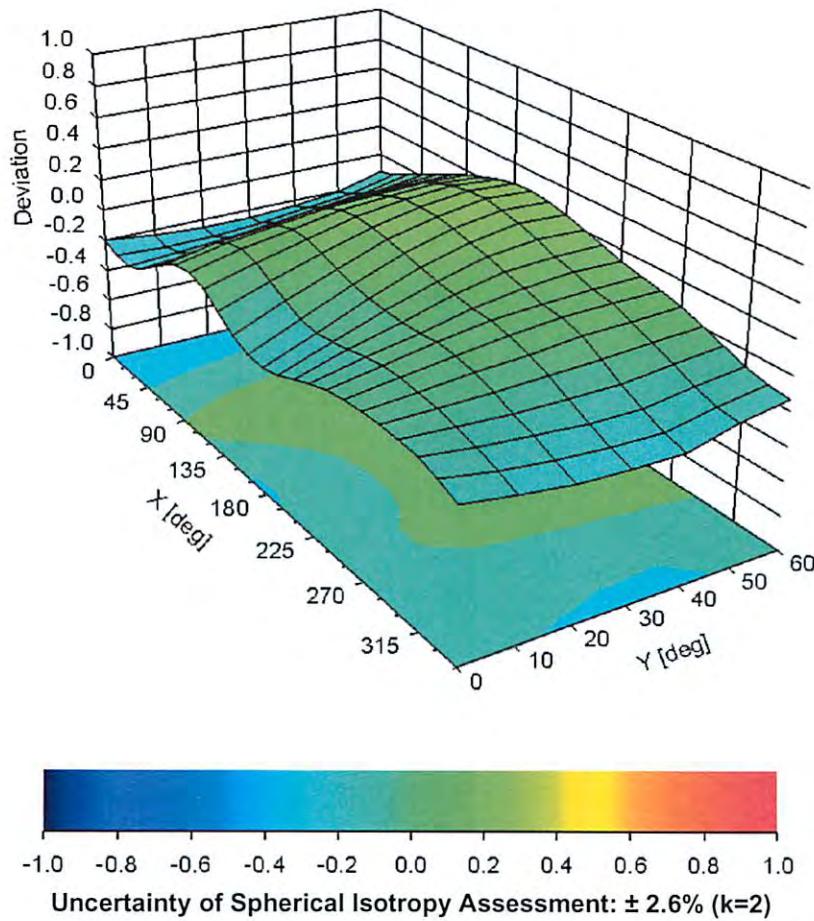

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 88 of 90

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01

Date: June 16, 2003

Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailler



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

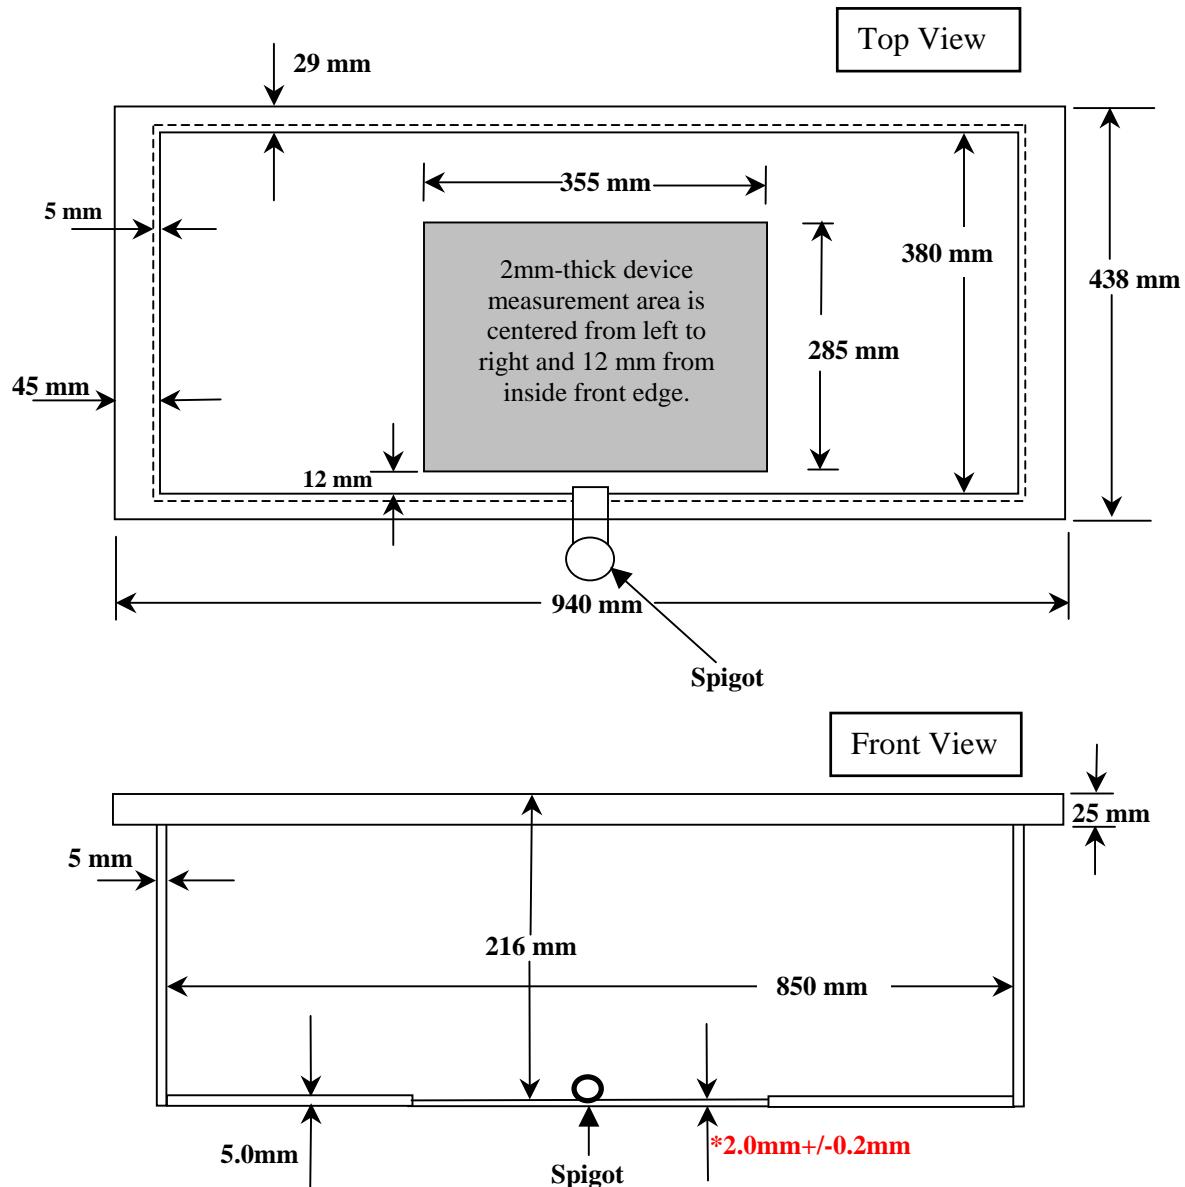

Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> 09/22-29 & 12/5-6, 2011	<u>Test Report Serial No.</u> 083011OWD-T1113S-C2PC	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)
	<u>Test Report Issue Date</u> December 14, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

APPENDIX H - SAM TWIN PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 89 of 90

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0		
Type No	QD 000 P40 BA		
Series No	TP-1002 and higher		
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland		

Tests

The series production process used allows the limitation to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

18.11.2001

Signature / Stamp


Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

 Celltech Testing and Engineering Services Lab	Date(s) of Evaluation 09/22-29 & 12/5-6, 2011	Test Report Serial No. 083011OWD-T1113S-C2PC	Test Report Revision No. Rev. 1.1 (2nd Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date December 14, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

APPENDIX I - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01v01r01)

Applicant:	HARRIS Corporation	FCC ID:	OWDTR-0074-E	IC:	3636B-0074	
DUT Type:	Portable 700/800-Band PTT Radio Transceiver		XG-75 7/800 (SCAN)	769-805/806-869 MHz		

HARRIS CORPORATION FCC ID: OWDTR-0074-E
XG-75 700/800 PTT Radio Transceiver (SCAN)

Body SAR Test Considerations for Audio Accessories without Built-in Antenna - Audio Accessory Combinations (FCC KDB 643646 D01v01r01 Page 9)																											
Audio Accessory ID #	Battery a (Default)						Battery b (Additional)						Battery c (Additional)						Battery d (Additional)								
	Antenna 1-2						Antenna 1-2						Antenna 1-2						Antenna 1-2								
	Bw#5	Bw#1	Bw#3	Bw#4	Bw#6	Bw#5	Bw#1	Bw#3	Bw#4	Bw#6	Bw#5	Bw#1	Bw#3	Bw#4	Bw#6	Bw#5	Bw#1	Bw#3	Bw#4	Bw#6	Bw#5	Bw#1	Bw#3	Bw#4	Bw#6		
G1a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G1b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G3a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G3b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G4	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G5	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G6a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G6b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G7a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G7b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G7c	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G7d	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G8a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G8b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G9a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G9b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G10	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G11a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G11b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G12a	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
G12b	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	

Notes:

1. All audio accessory options can be utilized with any antenna, battery and body-worn combination.
2. The accessory combinations evaluated for SAR are highlighted in yellow.
3. Please refer to Section 7.0 of the SAR report for description of accessory ID #.
4. Bw = Body-worn