



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Daryl Popowitch
Phone: (434) 455-9527

800/900 MHz Base Station Radio
Model: HD-4C89 (4 Channel Station)

FCC ID: OWDTR-0108-E
IC: 3636B-0108

January 7, 2013

Standards Referenced for this Report	
Part 2: 2012	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2011	Private Land Mobile Radio Services
TIA-EIA-603-C August 2004	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
Industry Canada RSS-119 Issue 11	Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41- 960 MHz

Frequency Range (MHz)	Rated Conducted Output Power (W)	Frequency Tolerance (ppm)	Transmit Mode	Emission Designator
851 – 869	1.0 – 35.0	0.09	4-level FSK, digitized data or voice, 8 kbps	7K60F1D/E
935 – 940	1.0 – 35.0	0.09	4-level FSK, digitized data or voice, 8 kbps	7K60F1D/E

Report Prepared By: Dan Baltzell

Document Number: 2012348

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	6
2	General Information	6
2.1	Test Facility	6
2.2	Related Submittal(s)/Grant(s)	6
2.3	Grant Notes	6
3	Tested System Details	7
4	FCC Rules and Regulations Part 2.1033(c)(8) Voltages and Currents Through The Final Amplifying Stage	9
5	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limit; IC RSS-119 4.1 Transmitter Output Power	9
5.1	Test Procedure	9
5.2	Test Data	9
6	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations	10
6.1	Test Procedure	10
6.2	Test Data	10
7	FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; IC RSS-119 5.8.9.2 Out-of-band Emission Limit	18
7.1	Test Procedure	18
7.2	Test Data	18
8	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; IC RSS-119 5.5 Channel Spacing, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks	23
8.1	Test Procedure	23
8.2	Test Data	24
9	FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; IC RSS-119 5.3 Transmitter Frequency Stability	33
9.1	Test Procedure	33
9.2	Test Data	33
9.2.1	Frequency Stability/Voltage Variation	34
10	FCC Part 2.1047: Modulation Characteristics; IC RSS-119 5.8 Types of Modulation	35
11	FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth	35
12	Conclusion	35

Table of Figures

Figure 3-1: Configuration of Tested System.....	7
---	---

Table of Tables

Table 3-1: Equipment Under Test (EUT).....	7
Table 5-1: RF Conducted Output Power – Measured	9
Table 5-2: Test Equipment Used For Testing RF Power Output - Conducted	9
Table 6-1: Test Equipment Used For Testing Spurious Emissions	17
Table 7-1: Field Strength of Spurious Radiation – 851.0125 MHz.....	18
Table 7-2: Field Strength of Spurious Radiation – 860.5000 MHz.....	19
Table 7-3: Field Strength of Spurious Radiation – 868.9875 MHz.....	19
Table 7-4: Field Strength of Spurious Radiation – 935.0125 MHz.....	20
Table 7-5: Field Strength of Spurious Radiation – 938.0000 MHz.....	20
Table 7-6: Field Strength of Spurious Radiation – 939.9875 MHz.....	21
Table 7-7: Test Equipment Used For Testing Field Strength of Spurious Radiation	22
Table 8-1: Test Equipment Used For Testing Occupied Bandwidth	32
Table 9-1: Temperature Frequency Stability – 938 MHz	33
Table 9-2: Temperature Frequency Stability – 860.5 MHz	34
Table 9-3: Frequency Stability/Voltage Variation – 938 MHz.....	34
Table 9-4: Frequency Stability/Voltage Variation – 860.500 MHz.....	34
Table 9-5: Test Equipment Used For Testing Frequency Stability.....	34

Table of Plots

Plot 6-1: Spurious Emissions at Antenna Terminals – 851.0125 MHz.....	11
Plot 6-2: Spurious Emissions at Antenna Terminals – 860.5000 MHz.....	12
Plot 6-3: Spurious Emissions at Antenna Terminals – 868.9875 MHz.....	13
Plot 6-4: Spurious Emissions at Antenna Terminals – 935.0125 MHz.....	14
Plot 6-5: Spurious Emissions at Antenna Terminals – 938.0000 MHz.....	15
Plot 6-6: Spurious Emissions at Antenna Terminals – 939.9875 MHz.....	16
Plot 8-1: Occupied Bandwidth – 851.0125 MHz; Mask D	24
Plot 8-2: Occupied Bandwidth – 860.5000 MHz; Mask D	25
Plot 8-3: Occupied Bandwidth – 868.9875 MHz; Mask D	26
Plot 8-4: Occupied Bandwidth – 851.0125 MHz; Mask H	27
Plot 8-5: Occupied Bandwidth – 860.5000 MHz; Mask G	28
Plot 8-6: Occupied Bandwidth – 935.0125 MHz; Mask J	29
Plot 8-7: Occupied Bandwidth – 938.0000 MHz; Mask J	30
Plot 8-8: Occupied Bandwidth – 939.9875 MHz; Mask J	31

Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure	36
Appendix B:	Agency Authorization	37
Appendix C:	FCC Confidentiality Request Letter.....	38
Appendix D:	IC Letters	39
Appendix E:	IC Confidentiality Request Letter	40
Appendix F:	Canadian Based Representative Attestation Letter	41
Appendix G:	ID Label & Location	42
Appendix H:	Operational Description.....	44
Appendix I:	Parts List	45
Appendix J:	Test / Tune Procedure	46
Appendix K:	Schematics.....	47
Appendix L:	Block Diagram	48
Appendix M:	Manual.....	49
Appendix N:	Test Configuration Photographs	50
Appendix O:	External Photographs.....	52
Appendix P:	Internal Photographs.....	62

Table of Photographs

Photograph 1: Configuration	8
Photograph 2: ID Label Sample	42
Photograph 3: ID Label Location	43
Photograph 4: Radiated Emissions (Spurious/Harmonics) – Front View	50
Photograph 5: Radiated Emissions (Spurious/Harmonics) – Back View	51
Photograph 6: CHU Front	52
Photograph 7: CHU Back	53
Photograph 8: CHU Side	54
Photograph 9: CHU Side	55
Photograph 10: BSCU Front	56
Photograph 11: BSCU Back	57
Photograph 12: BSCU Side	58
Photograph 13: Power Supply Front	59
Photograph 14: Power Supply Back	60
Photograph 15: Power Supply Side	61
Photograph 16: CHU	62
Photograph 17: CHU	63
Photograph 18: CHU	64
Photograph 19: CHU	65
Photograph 20: CHU	66
Photograph 21: CHU	67
Photograph 22: CHU	68
Photograph 23: CHU	69
Photograph 24: CHU	70
Photograph 25: CHU	71
Photograph 26: CHU	72
Photograph 27: CHU	73
Photograph 28: CHU	74
Photograph 29: CHU	75
Photograph 30: CHU	76
Photograph 31: CHU	77
Photograph 32: CHU	78
Photograph 33: CHU	79
Photograph 34: CHU	80
Photograph 35: CHU	81
Photograph 36: CHU	82
Photograph 37: CHU	83
Photograph 38: CHU	84

1 Test Result Summary

Test	FCC Reference	Result
RF Power Output	2.1046(a)	Complies
Spurious Emissions at Antenna Terminals	2.1051, 90.210	Complies
Field strength of spurious radiation	2.1053(a)	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1)	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.213	Complies
Modulation Characteristics	2.1047(a)(b)	Complies

2 General Information

The following Certification Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission and Industry Canada rules and regulations. The Equipment Under Test (EUT) was the 800/900 MHz base station radio, Model HD-4C89 (4 channel base station).

The radio is subject to FCC DoC. DoC testing was performed and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2, and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

This is a new FCC and IC certification application for the Harris Corporation 800/900 MHz base station radio, Model HD-4C89, FCC ID: OWDTR-0108-E, IC: 3636B-0108. This is a Family Certification for IC to include 3 models: HD-4C89, HD-3C89 and HD-2C89.

2.3 Grant Notes

RF power switchable from 1 W to rated power 35 W.

3 Tested System Details


The test sample, a 4 channel base station, Model HD-4C89, was received on December 18, 2012. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable. The device was programmed for multiple modes of operation.

There is also a 3 channel base station, Model HD-3C89, and a 2 channel base station, Model HD-2C89. The 4 channel base station Model HD-4C89 represents the worst case configuration, and applies to any lesser configuration.


Table 3-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	FCC ID	RTL Bar Code
800/900 MHZ 4 Channel Base Station Radio	Harris Corporation	HD-4C89	OWDTR-0108-E	20821

Figure 3-1: Configuration of Tested System

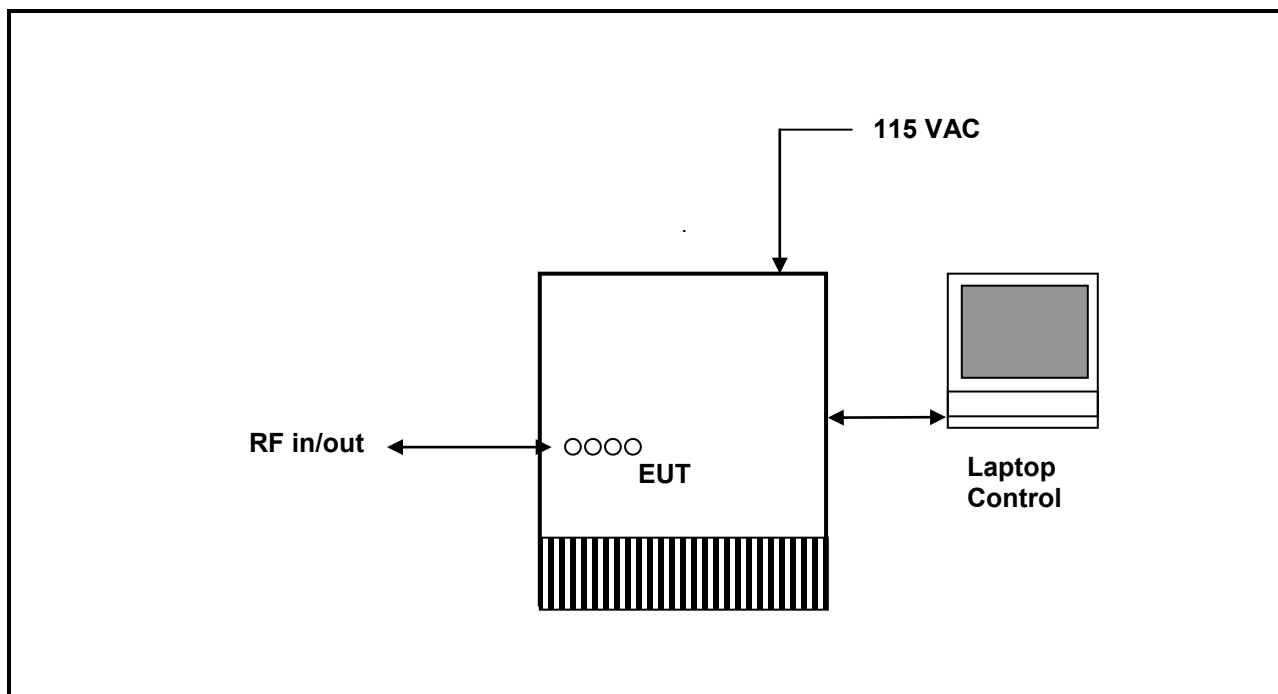

Photograph 1: Configuration

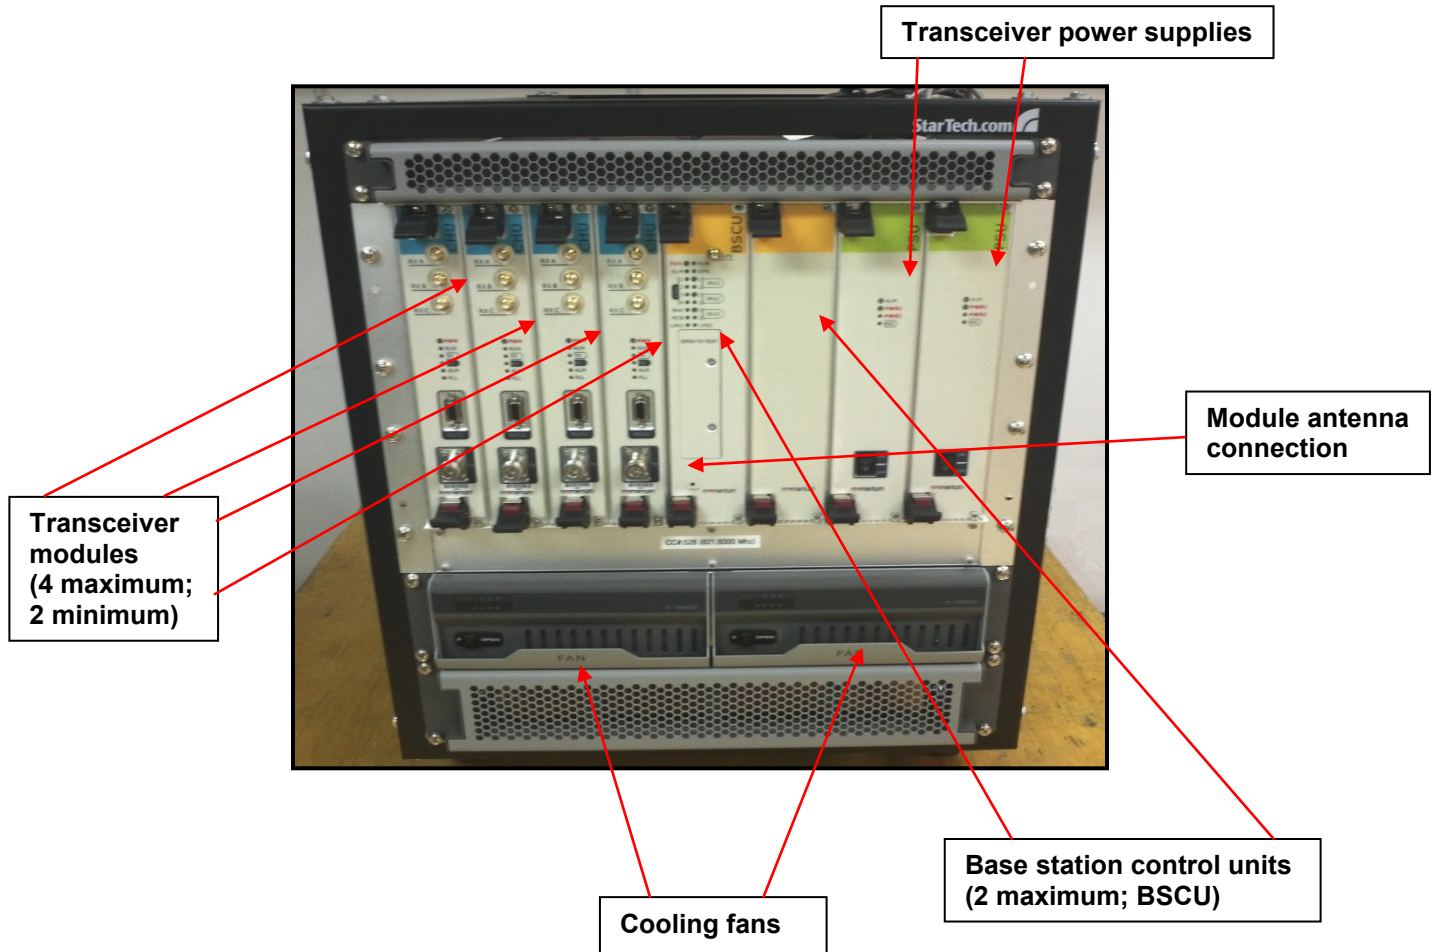

4 FCC Rules and Regulations Part 2.1033(c)(8) Voltages and Currents Through The Final Amplifying Stage

Final PA Voltage: 13.6 VDC
Final PA Current: 4.2A@35W

5 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limit; IC RSS-119 4.1 Transmitter Output Power

5.1 Test Procedure

ANSI/TIA/EIA-603-2004, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's rated power: 1-35 W.

5.2 Test Data

Table 5-1: RF Conducted Output Power – Measured

Frequency (MHz)	High Power (dBm)	High Power (W)	Low Power (dBm)	Low Power (W)
851.0125	45.5	35.5	30.7	1.2
860.5000	45.6	36.3	30.8	1.2
868.9875	45.5	35.5	30.2	1.1
935.0125	45.6	36.3	30.8	1.2
938.0000	45.8	38.0	30.8	1.2
939.9875	45.7	37.2	30.8	1.2

Table 5-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	3/13/13
901536	Aeroflex	48-40-34	40 dB Attenuator	CB6627	10/14/12

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

December 18, 2012
Date of Test

6 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations

6.1 Test Procedure

ANSI/TIA/EIA-603-2004, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

6.2 Test Data


Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc Limits: (50 + 10 LOG P(W))

The following channels (in MHz) were investigated:


800 MHz	900 MHz
851.0125	935.0125
860.5000	938.0000
868.9875	939.9875

Both high and low power settings were checked; high power was found to be worst case and is presented.


Plot 6-1: Spurious Emissions at Antenna Terminals – 851.0125 MHz

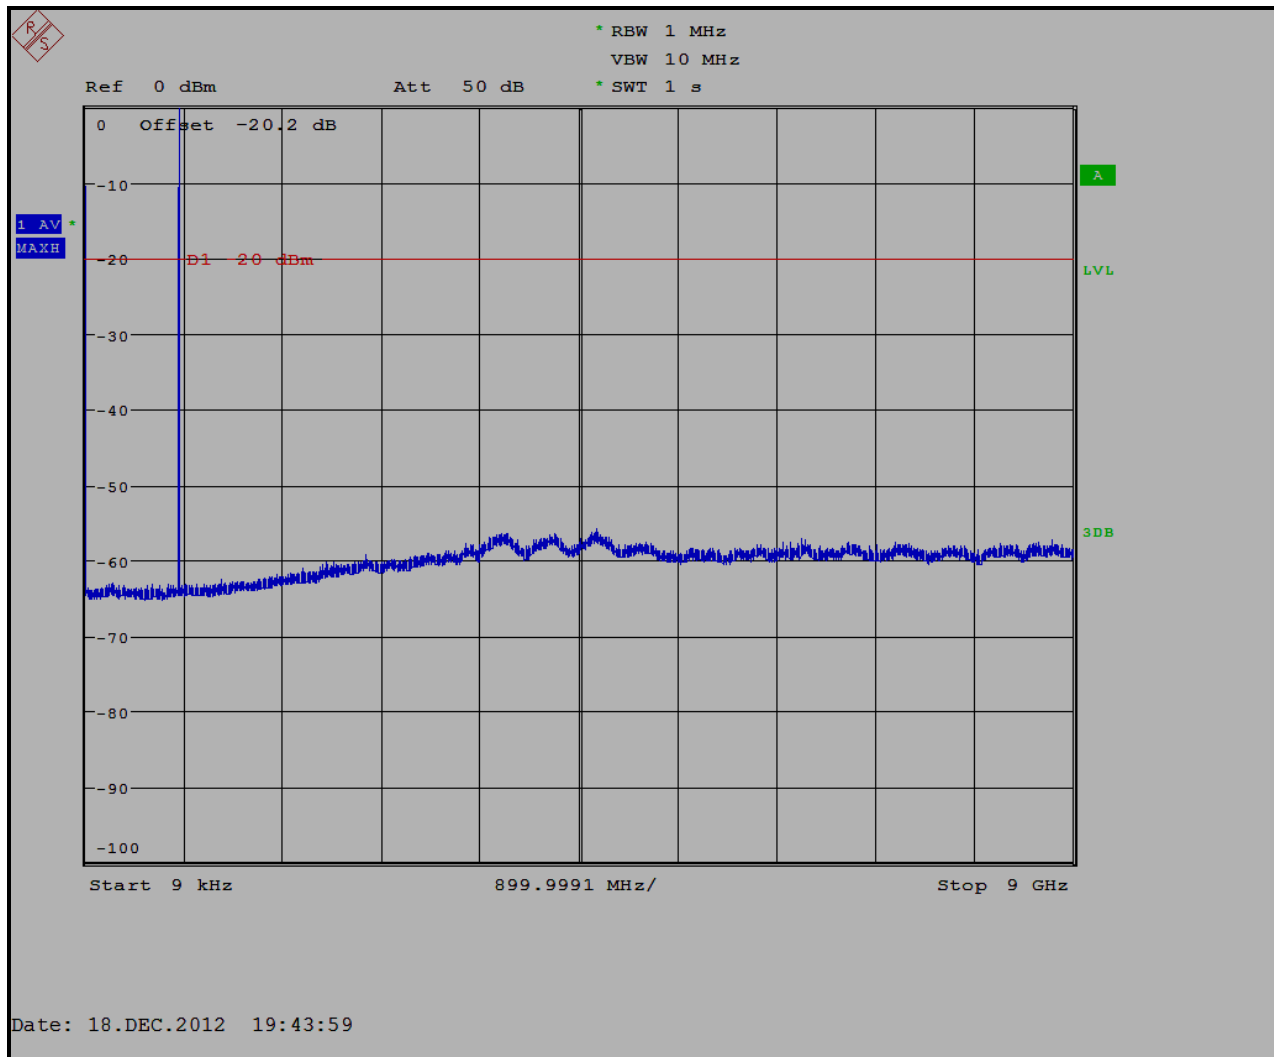


Plot 6-2: Spurious Emissions at Antenna Terminals – 860.5000 MHz

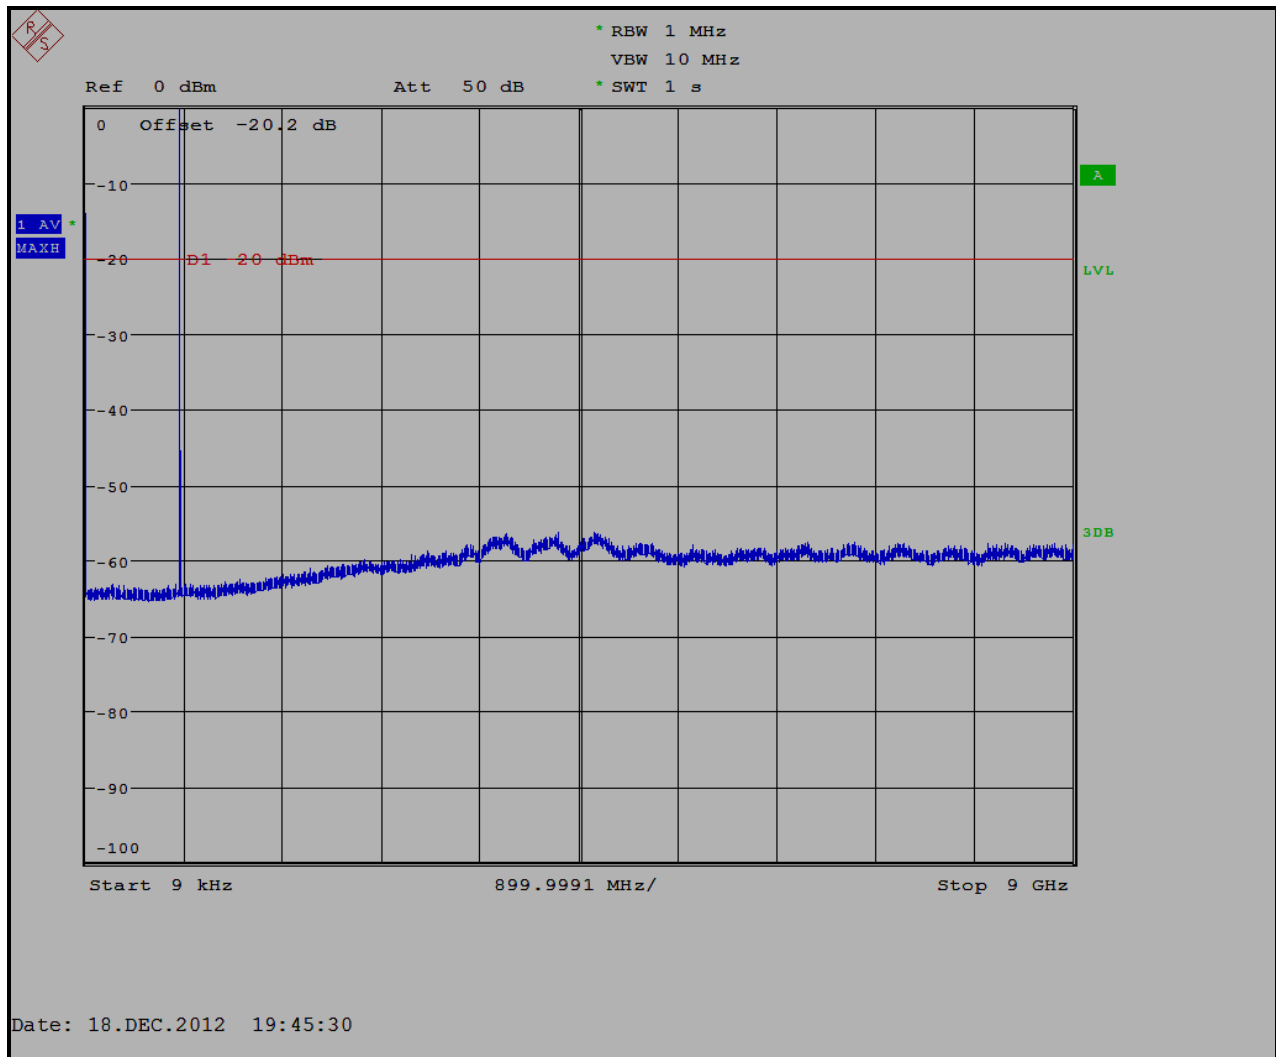


Plot 6-3: Spurious Emissions at Antenna Terminals – 868.9875 MHz

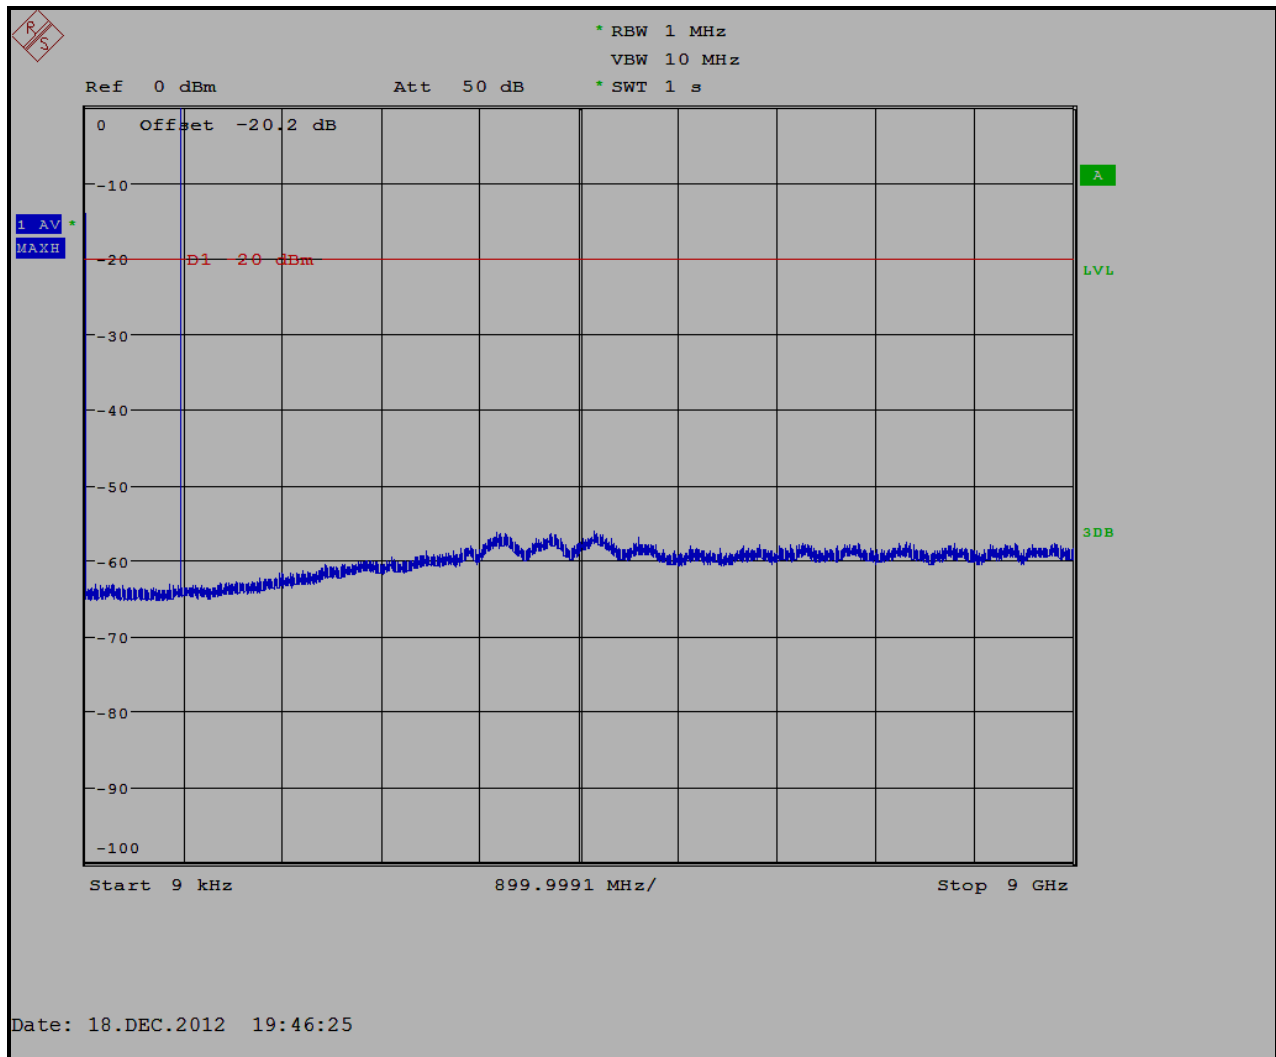

Plot 6-4: Spurious Emissions at Antenna Terminals – 935.0125 MHz

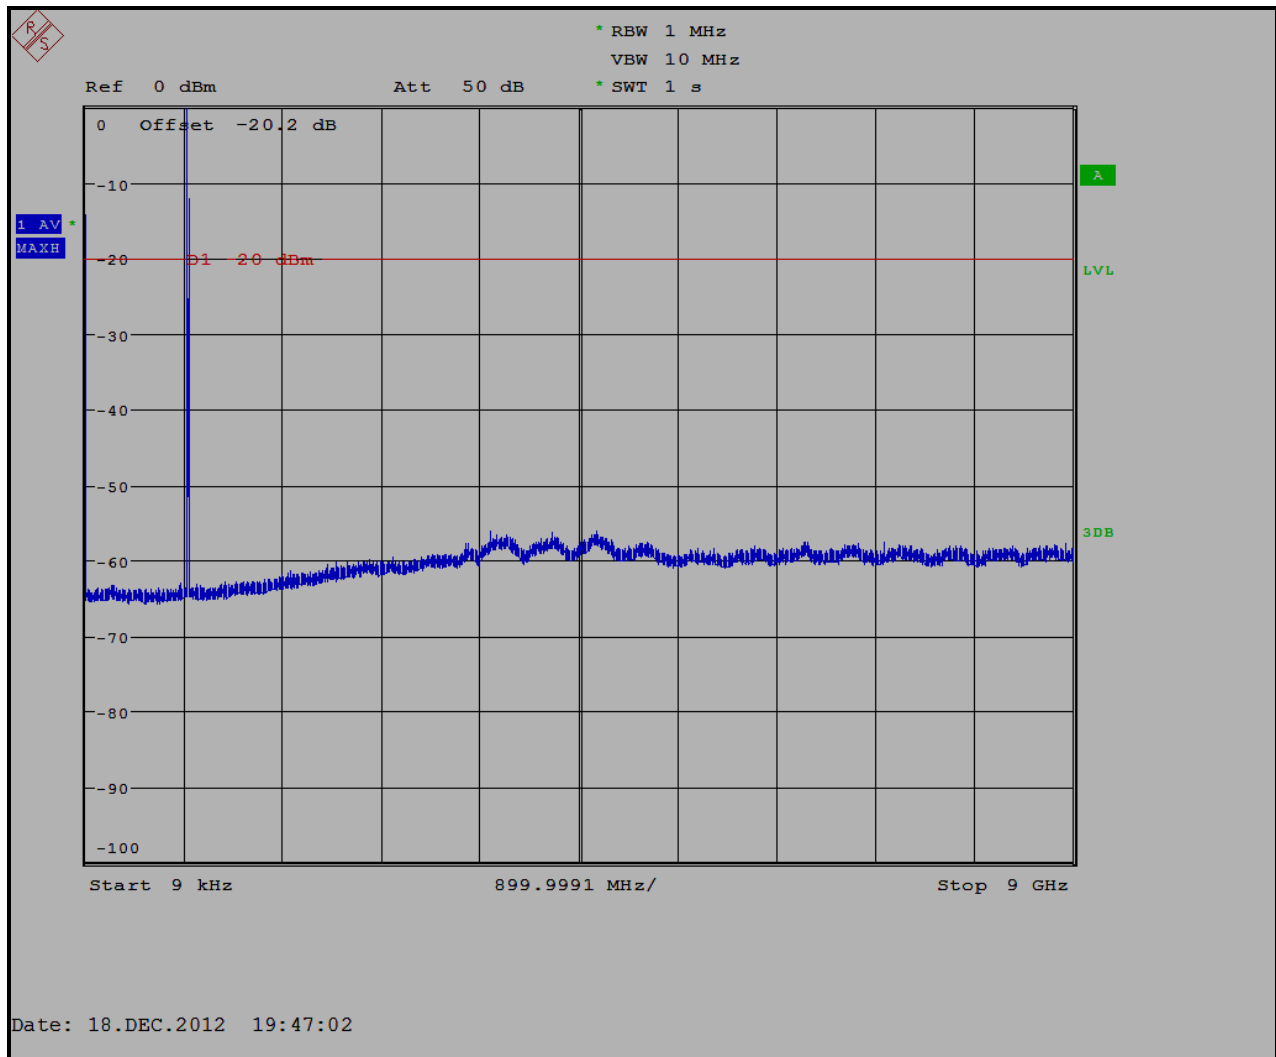

Plot 6-5: Spurious Emissions at Antenna Terminals – 938.0000 MHz

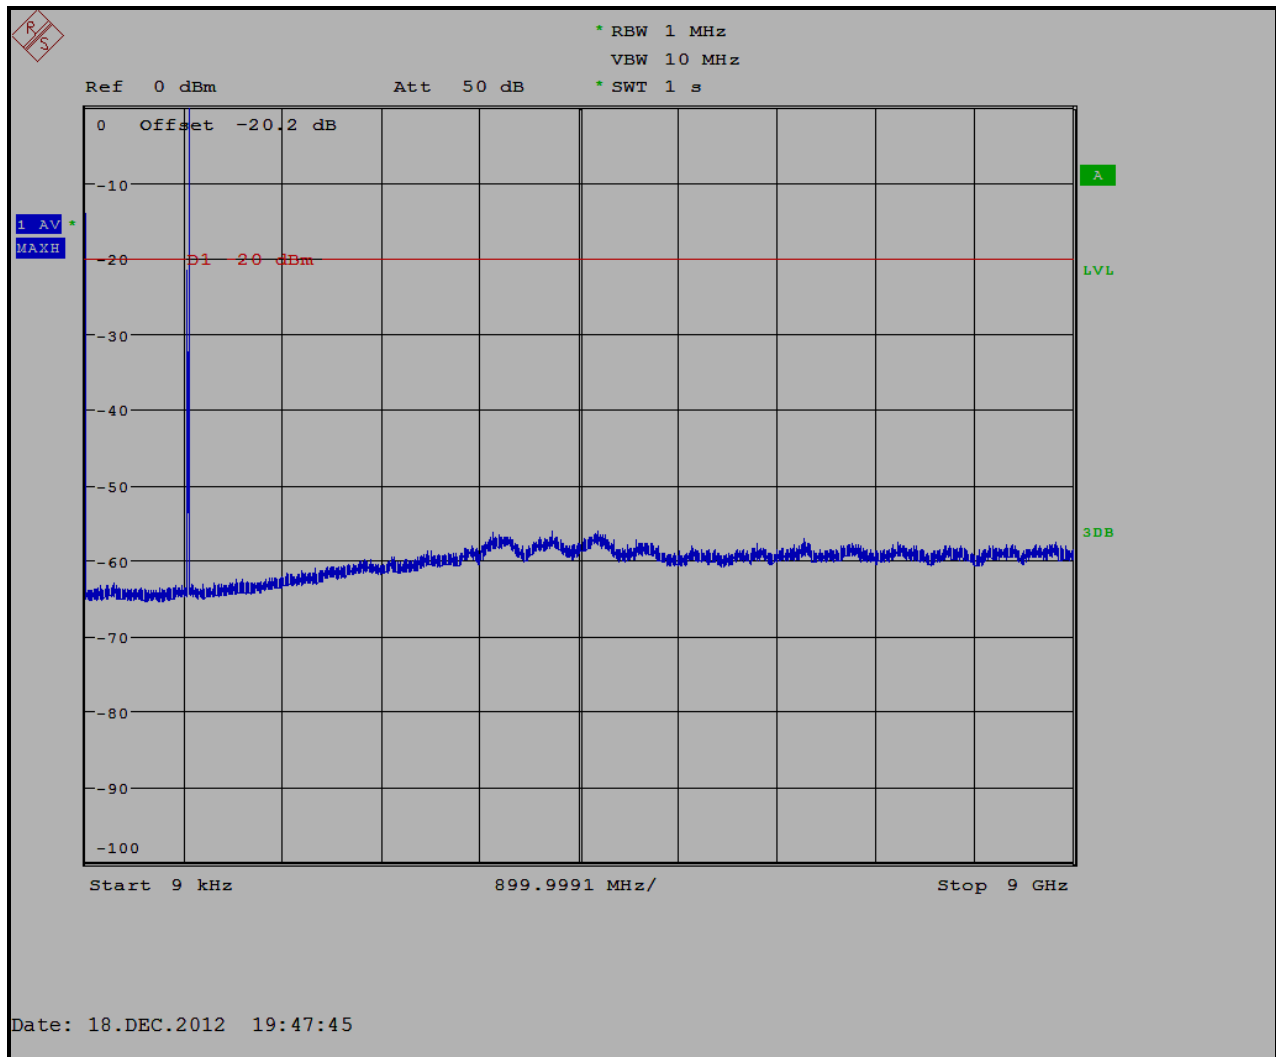

Plot 6-6: Spurious Emissions at Antenna Terminals – 939.9875 MHz

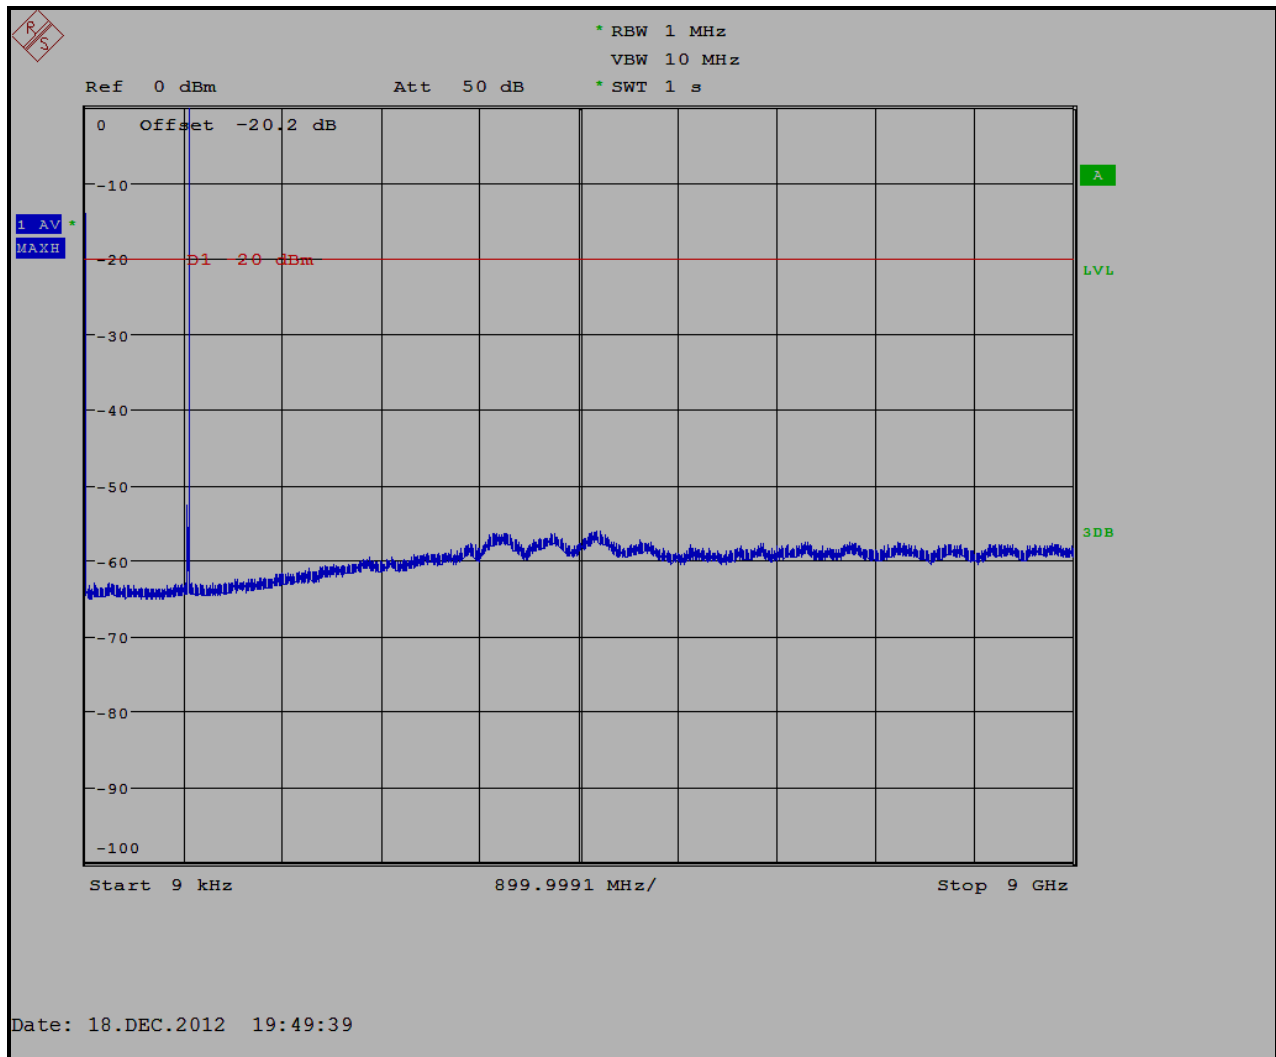


Table 6-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	2/29/13
901536	Aeroflex	48-40-34	40 dB Attenuator	CB6627	10/14/12

Test Personnel:

Daniel Baltzell		December 18, 2012
EMC Test Engineer	Signature	Date of Test

7 FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; IC RSS-119 5.8.9.2 Out-of-band Emission Limit

7.1 Test Procedure

ANSI/TIA-603-2004, section 2.2.12

The device uses digital modulation modulated to its maximum extent using a pseudo-random data sequence.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBd) was added to achieve the ERP level, then converted from the corrected signal generator level (dBm) to dBc and compared to the limit.

7.2 Test Data

Table 7-1: Field Strength of Spurious Radiation – 851.0125 MHz

Conducted Power 45.5 dBm; 35.5 W; Limit=50+10LogP=65.5 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1702.025	45.9	-67.8	3.1	6.9	109.5	-44.0
2553.038	66.7	-47.0	3.8	7.1	89.1	-23.6
3404.050	63.1	-48.2	4.8	7.5	91.0	-25.5
4255.063	50.9	-54.2	5.7	8.3	97.1	-31.6
5106.075	34.1	-69.0	6.3	8.4	112.4	-46.9
5957.088	33.5	-69.7	6.9	9.0	113.1	-47.6
6808.100	34.8	-66.7	7.3	9.3	110.3	-44.8
7659.113	30.8	-71.7	7.6	9.2	115.6	-50.1
8510.125	30.6	-65.3	8.0	9.2	109.6	-44.1

Table 7-2: Field Strength of Spurious Radiation – 860.5000 MHz

Conducted Power 45.6 dBm; 36.3 W; Limit=50+10LogP=65.6 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1721.000	43.4	-68.7	3.1	6.9	110.5	-44.9
2581.500	50.7	-62.8	3.8	7.1	105.1	-39.5
3442.000	48.1	-63.0	4.8	7.6	105.9	-40.3
4302.500	46.8	-58.7	5.7	8.3	101.7	-36.1
5163.000	34.9	-69.2	6.4	8.3	112.8	-47.2
6023.500	33.5	-68.8	6.9	9.0	112.4	-46.8
6884.000	40.1	-62.5	7.4	9.3	106.2	-40.6
7744.500	31.5	-70.0	7.6	9.2	114.0	-48.4
8605.000	34.3	-61.4	8.0	9.2	105.8	-40.2

Table 7-3: Field Strength of Spurious Radiation – 868.9875 MHz

Conducted Power 45.5 dBm; 35.5 W; Limit=50+10LogP=65.5 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1737.975	45.2	-66.5	3.1	7.0	108.1	-42.6
2606.963	52.5	-61.0	3.9	7.2	103.2	-37.7
3475.950	48.8	-62.2	4.9	7.6	105.0	-39.5
4344.938	51.0	-54.9	5.8	8.4	97.8	-32.3
5213.925	36.9	-66.6	6.4	8.3	110.2	-44.7
6082.913	35.0	-67.6	6.9	8.9	111.2	-45.7
6951.900	44.0	-57.5	7.5	9.4	101.1	-35.6
7820.888	32.3	-69.7	7.7	9.2	113.7	-48.2
8689.875	36.3	-60.0	8.0	9.3	104.2	-38.7

Table 7-4: Field Strength of Spurious Radiation – 935.0125 MHz

Conducted Power 45.6 dBm; 36.3 W; Limit=50+10LogP=65.6 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1870.025	43.9	-68.3	3.2	6.2	110.9	-45.3
2805.038	42.8	-70.0	4.1	8.1	111.6	-46.0
3740.050	50.3	-58.7	5.2	7.4	102.1	-36.5
4675.063	33.4	-71.5	6.0	8.6	114.5	-48.9
5610.075	50.2	-52.6	6.7	8.7	96.2	-30.6
6545.088	39.3	-62.7	7.1	9.7	105.7	-40.1
7480.100	31.5	-69.7	7.5	8.9	113.9	-48.3
8415.113	35.4	-66.3	8.0	9.3	110.6	-45.0
9350.125	30.9	-67.1	8.1	9.6	111.3	-45.7

Table 7-5: Field Strength of Spurious Radiation – 938.0000 MHz

Conducted Power 45.8 dBm; 38W; Limit=50+10LogP=65.8 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1876.000	43.6	-68.7	3.2	6.2	111.5	-45.7
2814.000	44.0	-68.8	4.1	8.1	110.7	-44.9
3752.000	52.1	-56.8	5.2	7.3	100.5	-34.7
4690.000	35.2	-69.7	6.0	8.7	112.9	-47.1
5628.000	41.0	-61.7	6.8	8.8	105.5	-39.7
6566.000	44.0	-57.6	7.2	9.7	100.8	-35.0
7504.000	33.3	-68.1	7.5	8.9	112.5	-46.7
8442.000	34.0	-67.3	8.0	9.3	111.8	-46.0
9380.000	33.1	-65.0	8.2	9.6	109.4	-43.6

Table 7-6: Field Strength of Spurious Radiation – 939.9875 MHz

Conducted Power 45.7 dBm; 37.2 W; Limit=50+10LogP=65.7 dBc


Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1879.975	43.2	-69.1	3.2	6.2	111.8	-46.1
2819.963	44.6	-68.1	4.2	8.1	109.9	-44.2
3759.950	49.3	-59.5	5.2	7.3	103.1	-37.4
4699.938	33.4	-71.5	6.0	8.7	114.5	-48.8
5639.925	41.5	-62.2	6.8	8.9	105.8	-40.1
6579.913	46.6	-54.6	7.2	9.7	97.7	-32.0
7519.900	33.0	-68.6	7.5	8.9	112.9	-47.2
8459.888	35.2	-63.9	8.0	9.3	108.3	-42.6
9399.875	36.4	-61.8	8.2	9.6	106.1	-40.4

Table 7-7: Test Equipment Used For Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	8/10/13
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
900791	Chase	CBL6111B	Bilog Antenna (30 MHz-2000 MHz)	N/A	1/31/13
900321	EMCO	3161-03	Horn Antennas (4-8 GHz)	9508-1020	4/19/14
900772	EMCO	3161-02	Horn Antenna (2-4 GHz)	9804-1044	4/19/14
900928	Hewlett Packard	83752A	Synthesized Sweeper, (0.01-20 GHz)	3610A00866	2/18/13
901595	Mini-Circuits	ZHL-4240V	Amplifier	H090293-5	2/17/13
900323	EMCO	3160-07	Horn Antenna (8.2-12.4 GHz)	9605-1054	4/19/14
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

December 21, 2012
Date of Tests

8 FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; IC RSS-119 5.5 Channel Spacing, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks

Occupied Bandwidth - Compliance with the Emission Masks

8.1 Test Procedure

ANSI/TIA/EIA-603-2004, section 2.2.11

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

Applicable Emission Masks		
Frequency Band (MHz)	Mask for Equipment With Audio Low Pass Filter	Mask for Equipment Without Audio Low Pass Filter
Below 25 ¹	A or B	A or C
25–50.....	B	C
72–76.....	B	C
150–174 ²	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512 ²	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869 ³	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990 MHz	L or M	L or M
5850–5925 ⁴		
All other bands	B	C

¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.


² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.

³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691.


⁴ DSRCS Roadside Unit equipment in the 5850–5925 MHz band is governed under subpart M of this part.

8.2 Test Data


Plot 8-1: Occupied Bandwidth – 851.0125 MHz; Mask D

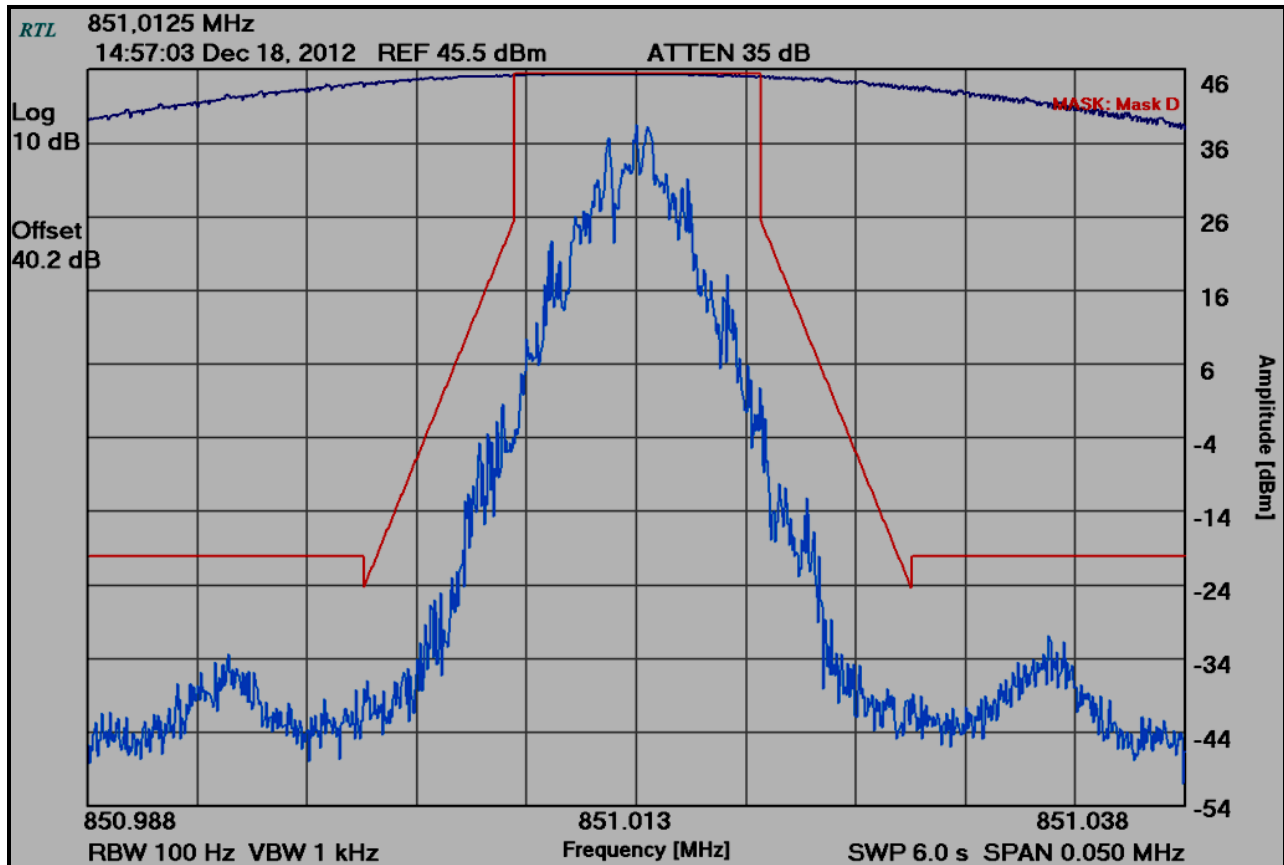


Plot 8-2: Occupied Bandwidth – 860.5000 MHz; Mask D

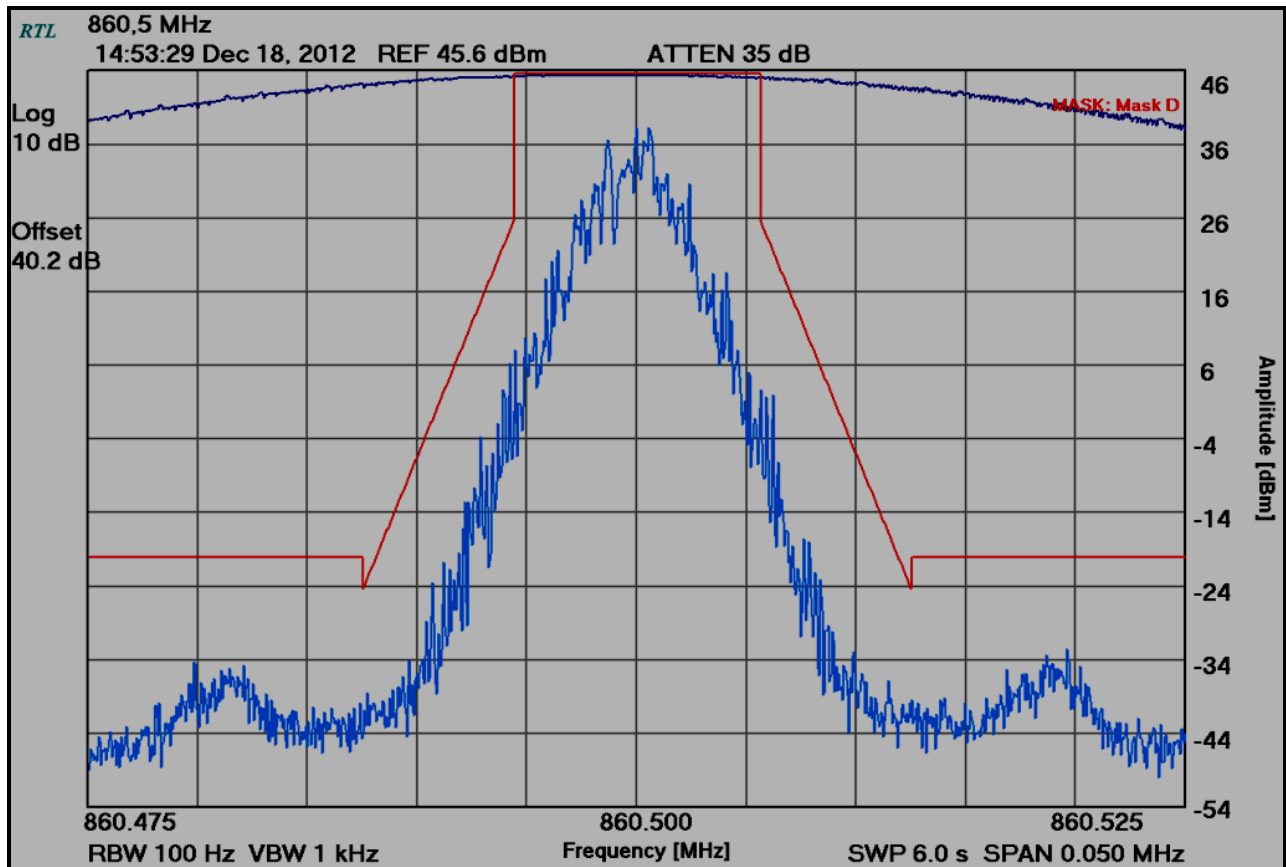


Plot 8-3: Occupied Bandwidth – 868.9875 MHz; Mask D

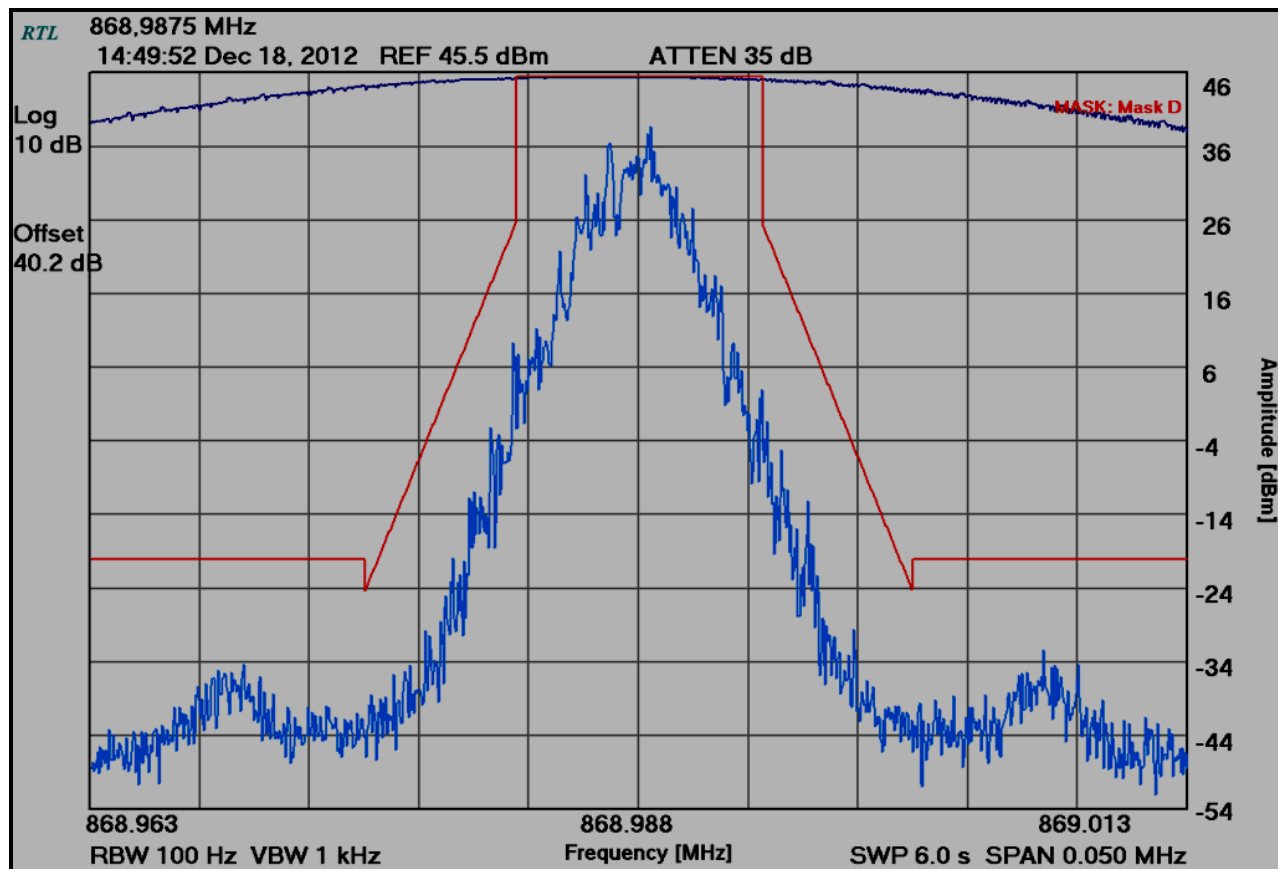


Plot 8-4: Occupied Bandwidth – 851.0125 MHz; Mask H

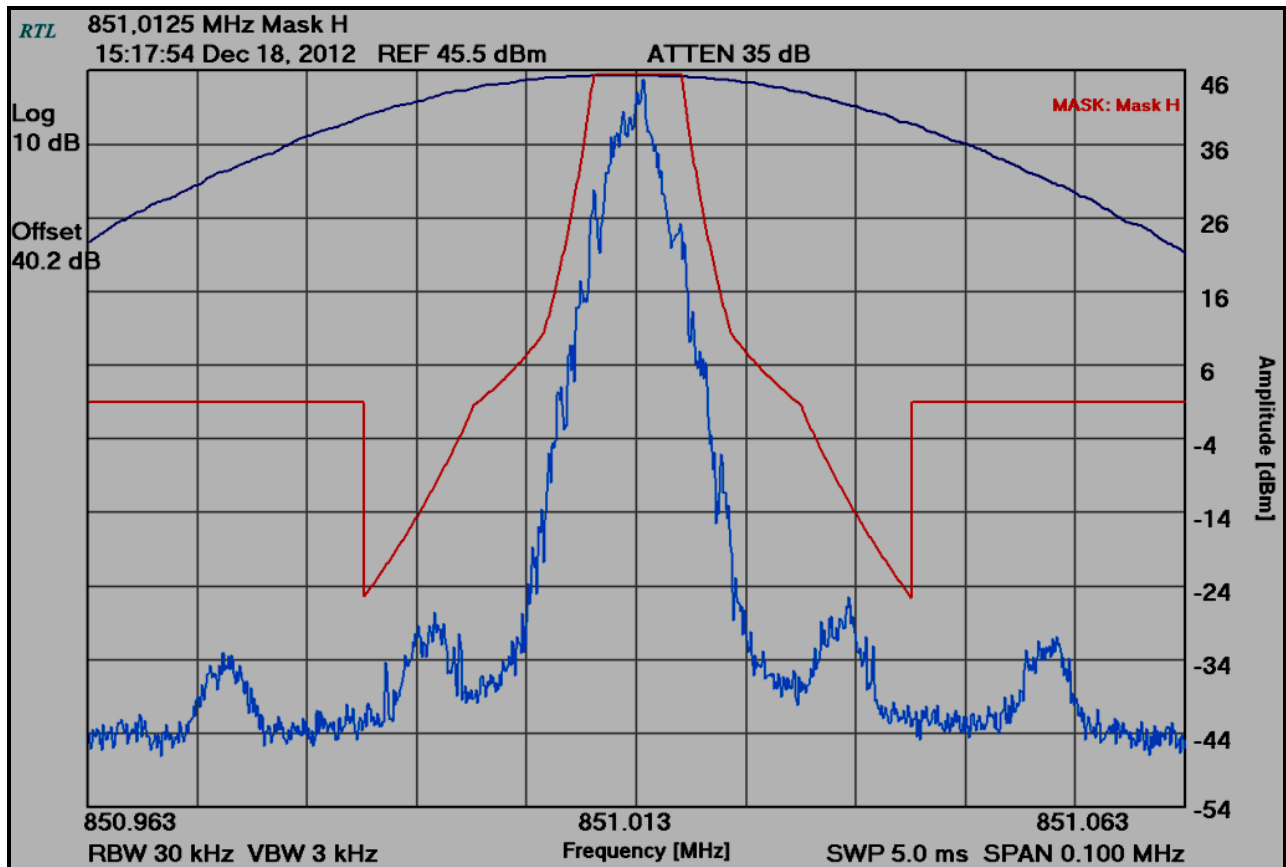


Plot 8-5: Occupied Bandwidth – 860.5000 MHz; Mask G

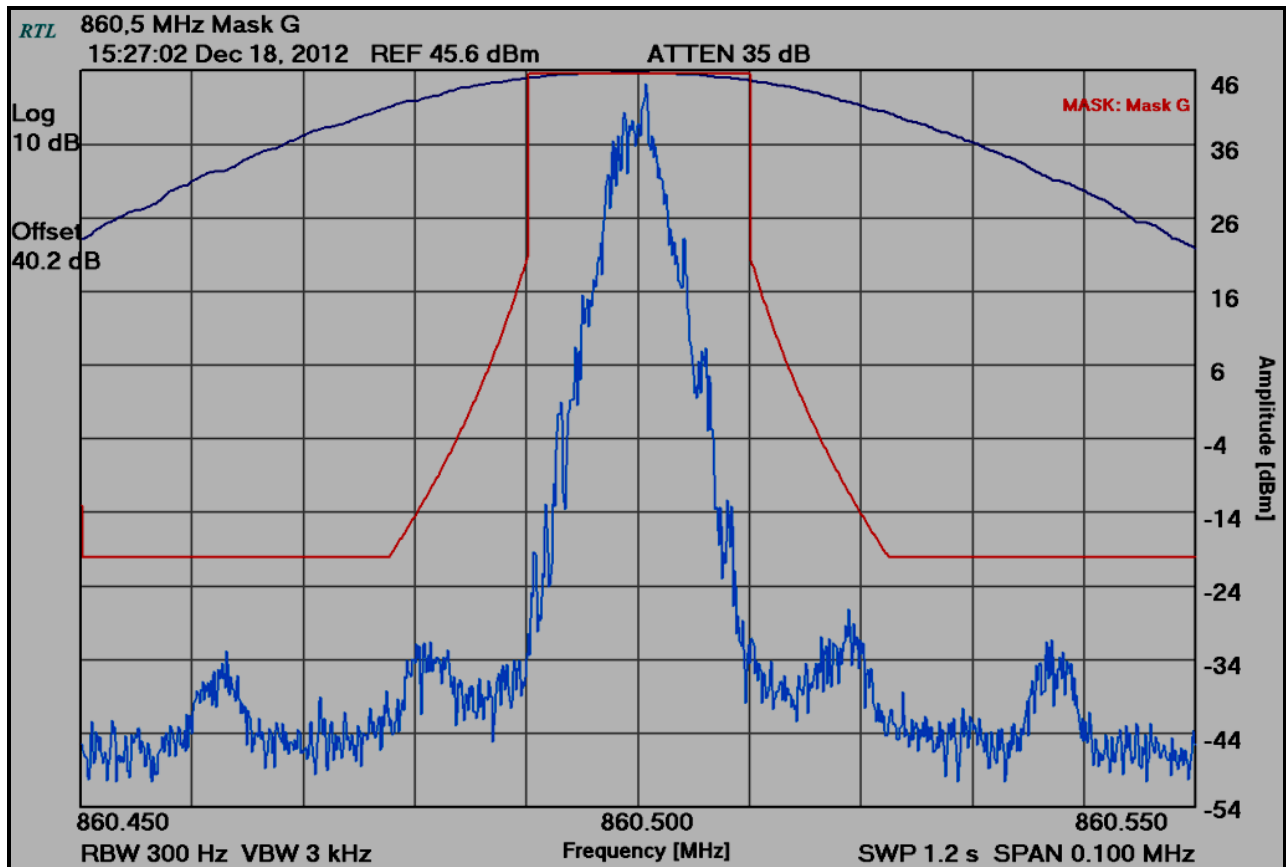

Plot 8-6: Occupied Bandwidth – 935.0125 MHz; Mask J

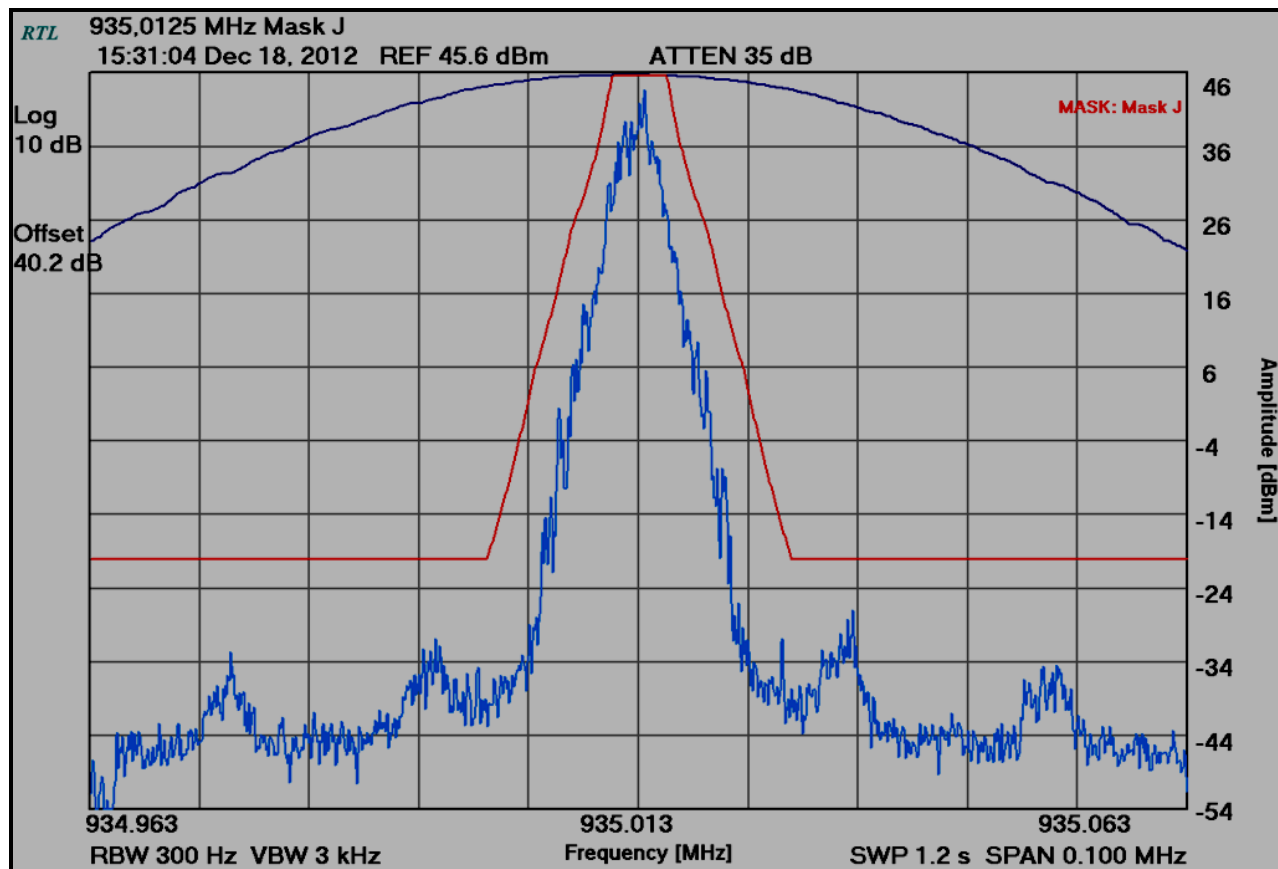

Plot 8-7: Occupied Bandwidth – 938.0000 MHz; Mask J

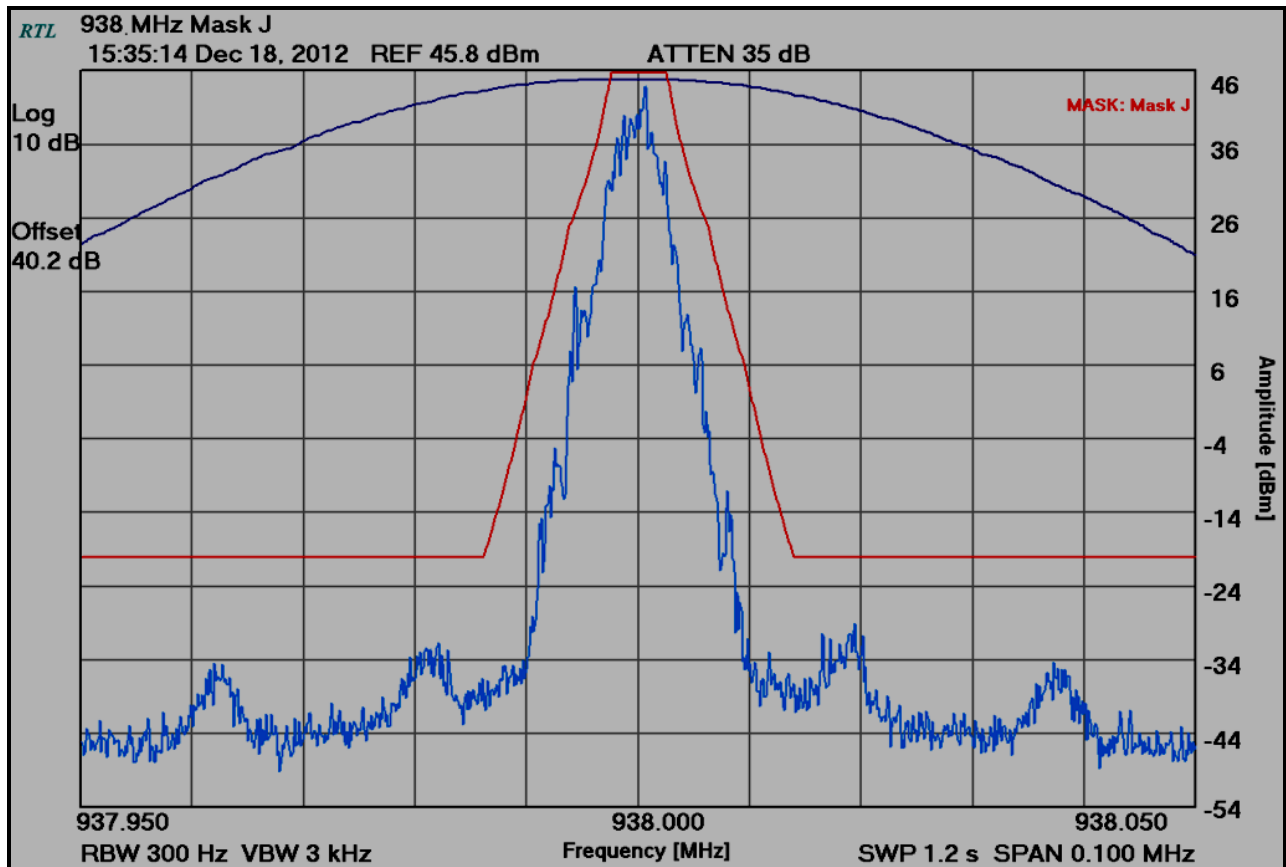

Plot 8-8: Occupied Bandwidth – 939.9875 MHz; Mask J

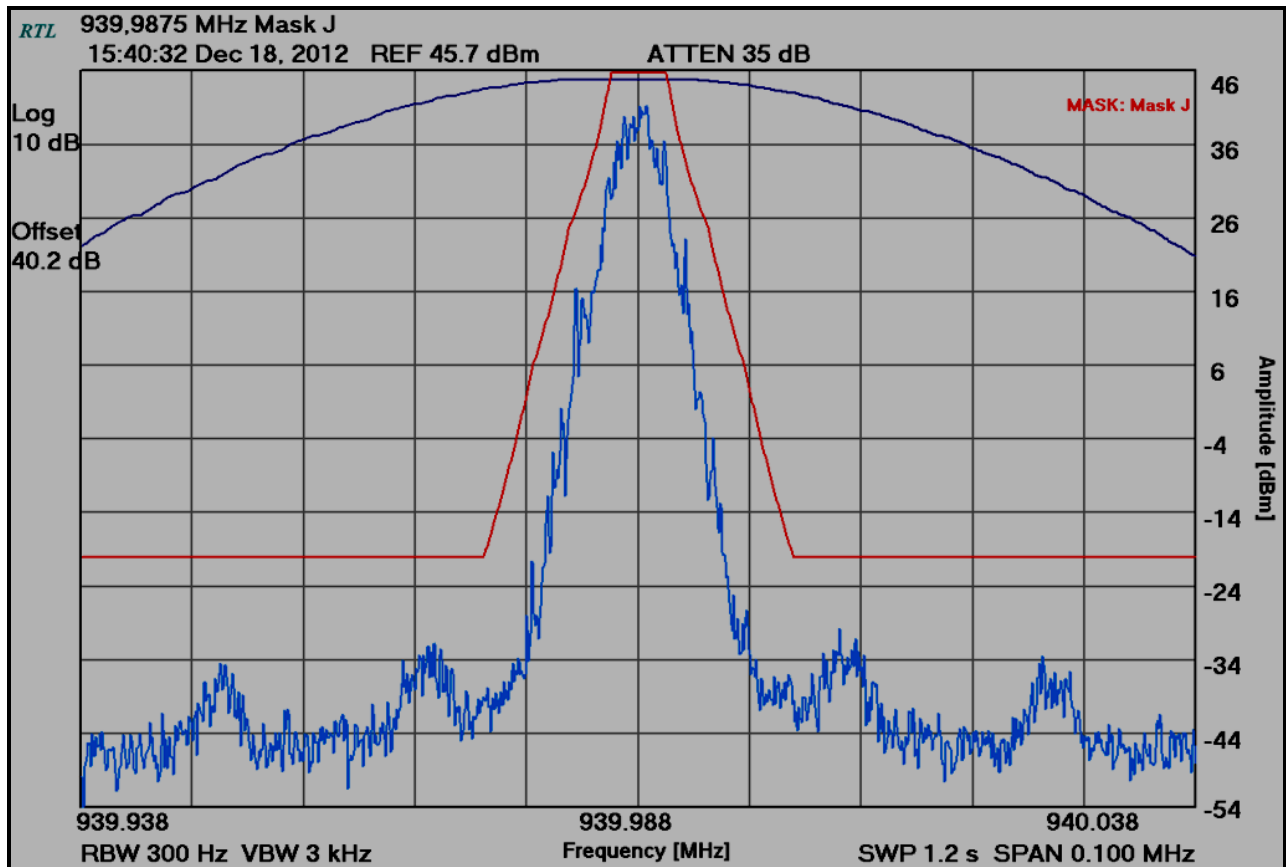


Table 8-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	1166.1660.50	Spectrum Analyzer	2001006	6/3/13
901536	Aeroflex	48-40-34	40 dB Attenuator	CB6627	10/14/13
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13

Test Personnel:

Daniel Baltzell		December 18, 2012
Test Engineer	Signature	Date of Tests

9 FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; IC RSS-119 5.3 Transmitter Frequency Stability

9.1 Test Procedure

ANSI/TIA-603-C-2004, section 2.2.2.

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The EUT was then operated in standby mode for 15 minutes before proceeding. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10°C through the range. A ½ hour period was observed to stabilize the EUT at each measurement step, and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

Limit for frequency block 851-854 MHz for Base Station: 1.0 ppm

Limit for frequency block 854-869 MHz for Base Station: 1.5 ppm

Limit for frequency block 935–940 MHz for Base Station: 0.1 ppm

The worst case test data are shown below in Table 9-1 and Table 9-2.

9.2 Test Data

Table 9-1: Temperature Frequency Stability – 938 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	938.000009	0.01
-20	938.000080	0.09
-10	938.000026	0.03
0	938.000087	0.09
10	938.000093	0.10
20 (reference)	938.000000	0.00
30	938.000020	0.02
40	938.000040	0.04
50	938.000046	0.05
55	938.000064	0.07
60	938.000052	0.06

Table 9-2: Temperature Frequency Stability – 860.5 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	860.500083	0.10
-20	860.499984	-0.02
-10	860.499993	-0.01
0	860.500021	0.02
10	860.499971	-0.03
20 (reference)	860.500000	0.00
30	860.499910	-0.10
40	860.499973	-0.03
50	860.499920	-0.09
55	860.499920	-0.09
60	860.499914	-0.10

Results: The EUT is compliant.

9.2.1 Frequency Stability/Voltage Variation

Table 9-3: Frequency Stability/Voltage Variation – 938 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
97.75	938.000009	0.01
115.00	938.000000	0.00
132.25	937.999970	-0.03

Table 9-4: Frequency Stability/Voltage Variation – 860.500 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
97.75	860.500049	0.06
115.00	860.500000	0.00
132.25	860.499994	-0.01

Table 9-5: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	1/13/13
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	7/18/13
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	2/29/13
901350	Meterman	33XR	Multimeter	040402802	12/28/13
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/13

Test Personnel:

Daniel Baltzell		December 28, 2012
EMC Test Engineer	Signature	Date of Test

10 FCC Part 2.1047: Modulation Characteristics; IC RSS-119 5.8 Types of Modulation

No data is presented since the radio is digitally modulated.

11 FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

Type of Emissions: F1D, F1E

Calculation:

Data rate in bps (R) = 8000

Peak deviation of carrier (D) = 1800

$B_n = [8000/\log_2(4) + 2 (1800) (1)] = 7.600 \text{ kHz}$

Emission designator: 7K60F1D, 7K60F1E

12 Conclusion

The data in this measurement report shows that the Harris Corporation 800/900 MHz 4 channel base station radio, Model HD-4C89, FCC ID: OWDTR-0108-E, IC: 3636B-0108, complies with all the applicable requirements of Parts 90 and 2 of the FCC Rules and Industry Canada RSS-119.