



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Contact: Tom Camper
tcamper@harris.com

XG-15P 700/800 MHz Portable Radio

FCC ID: OWDTR-0134-E
IC: 3636B-0134

March 3, 2015

Standards Referenced for this Report	
Part 2: 2014	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2014	Private Land Mobile Radio Services
TIA-EIA-603-C August 2004	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
RSS-119 Issue 11	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

Frequency Range (MHz)	Rated Conducted Output Power (W)	Frequency Tolerance (ppm)	Transmit Mode	Emission Designator
768 – 776; 798 – 806	0.5 – 3.0	0.4	Analog FM (NB)	11K0F3E
768 – 776; 798 – 806	0.5 – 3.0	0.4	4-level FSK, digitized data or voice, P25 Phase 1, 9.6 kbps	8K40F1D/E
768 – 776; 798 – 806	0.5 – 3.0	0.4	4-level H-CPM (TDMA) Data/Voice; P25 Phase 2	8K10DXW
806 – 816; 851 – 861	0.5 – 3.0	0.4	Analog FM (NPSPAC)	14K0F3E
806 – 816; 851 – 861	0.5 – 3.0	0.4	4-level FSK, digitized data or voice, P25 Phase 1, 9.6 kbps	8K40F1D/E
806 – 816; 851 – 861	0.5 – 3.0	0.4	Analog FM (SMR)	16K0F3E 16K0F9W
806 – 816; 851 – 861	0.5 – 3.0	0.4	4-level H-CPM (TDMA) Data/Voice; P25 Phase 2	8K10DXW

Report Prepared By: Daniel Baltzell

Document Number: 2015011

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.*



Engineering Solutions & Electromagnetic Compatibility Services

700 MHz Band Low Power Channels		
Channel No. (6.25 kHz)	Channel No. (12.5 kHz)	12.5 kHz Channel Spaced Tx Center Frequencies
1	1-2	769.006250
2		
3	3-4	769.018750
4		
5	5-6	769.031250
6		
7	7-8	769.043750
8		
9	9-10	769.056250
10		
11	11-12	769.068750
12		
949	949-950	774.931250
950		
951	951-952	774.943750
952		
953	953-954	774.956250
954		
955	955-956	774.968750
956		
957	957-958	774.981250
958		
959	959-960	774.993750
960		

* these itinerant channels in the above table below are limited to 2.0 W ERP per 90.531(b)(4)

Table of Contents

1	Test Result Summary	9
2	General Information	9
2.1	Test Facility	9
2.2	Related Submittal(s)/Grant(s)	9
2.3	Grant Notes	9
2.4	Tested System Details	10
3	FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents through the Final Amplifying Stage	12
4	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limits; RSS-119 4.1 Transmitter Output Power	12
4.1	Test Procedure	12
4.2	Test Data	12
5	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations	14
5.1	Test Procedure	14
5.2	Test Data	14
6	FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements; RSS-119 4.3 Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 764-776 MHz and 794-806 MHz	15
6.1	Test Procedure	15
6.2	Test Data	17
7	FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; Part 90.543(f): Out of Band Emissions Limit; RSS-119 5.8.9.2 Out-of-band Emission Limit	45
7.1	Test Procedure	45
7.2	Test Data	45
8	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; RSS-119 5.5 Channel Spacing, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks	54
8.1	Test Procedure	54
8.2	Test Data	55
9	FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213, 90.539: Frequency Stability; RSS-119 5.3 Transmitter Frequency Stability	92
9.1	Test Procedure	92
9.2	Test Data	93
9.2.1	Frequency Stability/Voltage Variation	100
10	FCC Part 2.1047: Modulation Characteristics; RSS-119 5.8 Types of Modulation	104
10.1	Test Procedures	104
10.1.1	Audio Frequency Response	104
10.1.2	Audio Low Pass Filter Response	104
10.1.3	Modulation Limiting	104
10.2	Test Data	105
10.2.1	Audio Frequency Response	105
10.2.2	Audio Low Pass Filter Response	107
10.2.3	Modulation Limiting	109
11	FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth	115
12	Conclusion	115

Table of Figures

Figure 2-1:	Configuration of Tested System	11
-------------	--------------------------------------	----

Table of Tables

Table 2-1:	Equipment Under Test (EUT)	10
Table 2-2:	Auxiliary Equipment	10
Table 4-1:	RF Conducted Output Power – Measured	12
Table 4-2:	Test Equipment Used For Testing RF Power Output - Conducted	13
Table 5-1:	Test Equipment Used For Testing Spurious Emissions	14
Table 6-1:	Adjacent Channel Power - 768.0125 MHz; Analog Mode (>400 kHz - RX Band)	17
Table 6-2:	Adjacent Channel Power - 768.0125 MHz; P25 Mode (>400 kHz - RX Band)	18
Table 6-3:	Adjacent Channel Power - 768.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	19
Table 6-4:	Adjacent Channel Power - 769.0125 MHz; Analog Mode (>400 kHz - RX Band)	20
Table 6-5:	Adjacent Channel Power - 769.0125 MHz; P25 Mode (>400 kHz - RX Band)	21
Table 6-6:	Adjacent Channel Power - 769.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	22
Table 6-7:	Adjacent Channel Power – 772.0125 MHz; Analog Mode (>400 kHz - RX Band)	23
Table 6-8:	Adjacent Channel Power – 772.0125 MHz; P25 Mode (>400 kHz - RX Band)	24
Table 6-9:	Adjacent Channel Power – 772.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	25
Table 6-10:	Adjacent Channel Power – 774.9875 MHz; Analog Mode (>400 kHz - RX Band)	26
Table 6-11:	Adjacent Channel Power – 774.9875 MHz; P25 Mode (>400 kHz - RX Band)	27
Table 6-12:	Adjacent Channel Power – 774.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	28
Table 6-13:	Adjacent Channel Power – 775.9875 MHz; Analog Mode (>400 kHz - RX Band)	29
Table 6-14:	Adjacent Channel Power - 775.9875 MHz; P25 Mode (>400 kHz - RX Band)	30
Table 6-15:	Adjacent Channel Power - 775.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	31
Table 6-16:	Adjacent Channel Power - 798.0125 MHz; Analog Mode (>400 kHz - RX Band)	32
Table 6-17:	Adjacent Channel Power – 798.0125 MHz; P25 Mode (>400 kHz - RX Band)	33
Table 6-18:	Adjacent Channel Power – 798.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	34
Table 6-19:	Adjacent Channel Power – 799.0125 MHz; Analog Mode (>400 kHz - RX Band)	35
Table 6-20:	Adjacent Channel Power – 799.0125 MHz; P25 Mode (>400 kHz - RX Band)	36
Table 6-21:	Adjacent Channel Power – 799.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	37
Table 6-22:	Adjacent Channel Power – 801.0125 MHz; Analog Mode (>400 kHz - RX Band)	38
Table 6-23:	Adjacent Channel Power – 801.0125 MHz; P25 Mode (>400 kHz - RX Band)	39
Table 6-24:	Adjacent Channel Power – 801.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	40
Table 6-25:	Adjacent Channel Power – 804.9875 MHz; Analog Mode (>400 kHz - RX Band)	41
Table 6-26:	Adjacent Channel Power – 804.9875 MHz; P25 Mode (>400 kHz - RX Band)	42
Table 6-27:	Adjacent Channel Power – 804.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)	43
Table 6-28:	Test Equipment Used For Testing ACP Requirements	44
Table 7-1:	Field Strength of Spurious Radiation – 768.0125 MHz	45
Table 7-2:	Field Strength of Spurious Radiation – 769.0125 MHz	46
Table 7-3:	Field Strength of Spurious Radiation – 772.0125 MHz	46
Table 7-4:	Field Strength of Spurious Radiation – 774.9875 MHz	47
Table 7-5:	Field Strength of Spurious Radiation – 775.9875 MHz	47
Table 7-6:	Field Strength of Spurious Radiation – 798.0125 MHz	48
Table 7-7:	Field Strength of Spurious Radiation – 799.0125 MHz	48
Table 7-8:	Field Strength of Spurious Radiation – 801.0125 MHz	49
Table 7-9:	Field Strength of Spurious Radiation – 804.9875 MHz	49
Table 7-10:	Field Strength of Spurious Radiation – 806.0125 MHz	50
Table 7-11:	Field Strength of Spurious Radiation – 811.0125MHz	50
Table 7-12:	Field Strength of Spurious Radiation – 815.9875 MHz	51

Table 7-13:	Field Strength of Spurious Radiation – 851.0125 MHz	51
Table 7-14:	Field Strength of Spurious Radiation – 856.0125 MHz	52
Table 7-15:	Field Strength of Spurious Radiation – 860.9875 MHz	52
Table 7-16:	Part 90.543(f): Out of Band Emissions Limit	53
Table 7-17:	Test Equipment Used For Testing Field Strength of Spurious Radiation	53
Table 8-1:	Test Equipment Used For Testing Occupied Bandwidth	91
Table 9-1:	Temperature Frequency Stability – 768.0125 MHz.....	93
Table 9-2:	Temperature Frequency Stability – 769.0125 MHz.....	94
Table 9-3:	Temperature Frequency Stability – 772.0125 MHz.....	94
Table 9-4:	Temperature Frequency Stability – 774.9875 MHz.....	94
Table 9-5:	Temperature Frequency Stability – 775.9875 MHz.....	95
Table 9-6:	Temperature Frequency Stability – 798.0125 MHz.....	95
Table 9-7:	Temperature Frequency Stability – 799.0125 MHz.....	95
Table 9-8:	Temperature Frequency Stability – 801.0125 MHz.....	96
Table 9-9:	Temperature Frequency Stability – 804.9875 MHz.....	96
Table 9-10:	Temperature Frequency Stability – 806.0125 MHz.....	96
Table 9-11:	Temperature Frequency Stability – 811.0125 MHz.....	97
Table 9-12:	Temperature Frequency Stability – 815.9875 MHz.....	97
Table 9-13:	Temperature Frequency Stability – 851.0125 MHz.....	97
Table 9-14:	Temperature Frequency Stability – 856.0125 MHz.....	98
Table 9-15:	Temperature Frequency Stability – 860.9875 MHz.....	98
Table 9-16:	Test Equipment Used For Testing Frequency Stability.....	99
Table 9-17:	Frequency Stability/Voltage Variation – 768.0125 MHz.....	100
Table 9-18:	Frequency Stability/Voltage Variation – 769.0125 MHz.....	100
Table 9-19:	Frequency Stability/Voltage Variation – 772.0125 MHz.....	100
Table 9-20:	Frequency Stability/Voltage Variation – 774.9875 MHz.....	100
Table 9-21:	Frequency Stability/Voltage Variation – 775.9875 MHz.....	100
Table 9-22:	Frequency Stability/Voltage Variation – 798.0125 MHz.....	101
Table 9-23:	Frequency Stability/Voltage Variation – 799.0125 MHz.....	101
Table 9-24:	Frequency Stability/Voltage Variation – 801.0125 MHz.....	101
Table 9-25:	Frequency Stability/Voltage Variation – 804.9875 MHz.....	101
Table 9-26:	Frequency Stability/Voltage Variation – 806.0125 MHz.....	101
Table 9-27:	Frequency Stability/Voltage Variation – 811.0125 MHz.....	101
Table 9-28:	Frequency Stability/Voltage Variation – 815.9875 MHz.....	102
Table 9-29:	Frequency Stability/Voltage Variation – 851.0125 MHz.....	102
Table 9-30:	Frequency Stability/Voltage Variation – 856.0125 MHz.....	102
Table 9-31:	Frequency Stability/Voltage Variation – 860.9875 MHz.....	102
Table 9-32:	Test Equipment Used For Testing Frequency Stability.....	103
Table 10-1:	Test Equipment Used For Testing Modulation Requirements	114

Table of Plots

Plot 6-1:	Adjacent Channel Power - 768.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)	17
Plot 6-2:	Adjacent Channel Power - 768.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	18
Plot 6-3:	Adjacent Channel Power - 768.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	19
Plot 6-4:	Adjacent Channel Power - 769.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)	20
Plot 6-5:	Adjacent Channel Power - 769.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	21
Plot 6-6:	Adjacent Channel Power - 769.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	22
Plot 6-7:	Adjacent Channel Power - 772.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)	23
Plot 6-8:	Adjacent Channel Power - 772.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	24
Plot 6-9:	Adjacent Channel Power - 772.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	25
Plot 6-10:	Adjacent Channel Power - 774.9875 MHz; Analog Mode (9.375 kHz - 350 kHz)	26
Plot 6-11:	Adjacent Channel Power - 774.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)	27
Plot 6-12:	Adjacent Channel Power - 774.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	28
Plot 6-13:	Adjacent Channel Power - 775.9875 MHz; Analog Mode (9.375 kHz - 350 kHz)	29
Plot 6-14:	Adjacent Channel Power - 775.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)	30
Plot 6-15:	Adjacent Channel Power - 775.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	31
Plot 6-16:	Adjacent Channel Power - 798.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)	32
Plot 6-17:	Adjacent Channel Power - 798.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	33
Plot 6-18:	Adjacent Channel Power - 798.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	34
Plot 6-19:	Adjacent Channel Power - 799.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)	35
Plot 6-20:	Adjacent Channel Power - 799.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	36
Plot 6-21:	Adjacent Channel Power - 799.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	37
Plot 6-22:	Adjacent Channel Power - 801.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)	38
Plot 6-23:	Adjacent Channel Power - 801.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)	39
Plot 6-24:	Adjacent Channel Power - 801.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	40
Plot 6-25:	Adjacent Channel Power - 804.9875 MHz; Analog Mode; (9.375 kHz - 350 kHz)	41
Plot 6-26:	Adjacent Channel Power - 804.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)	42
Plot 6-27:	Adjacent Channel Power - 804.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)	43
Plot 8-1:	Occupied Bandwidth - 806.0125 MHz; Wideband Analog; Mask B	55
Plot 8-2:	Occupied Bandwidth - 811.0125 MHz; Wideband Analog; Mask B	56
Plot 8-3:	Occupied Bandwidth - 815.9875 MHz; Wideband Analog; Mask B	57
Plot 8-4:	Occupied Bandwidth - 851.0125 MHz; Wideband Analog; Mask B	58
Plot 8-5:	Occupied Bandwidth - 856.0125 MHz; Wideband Analog; Mask B	59
Plot 8-6:	Occupied Bandwidth - 860.9875 MHz; Wideband Analog; Mask B	60
Plot 8-7:	Occupied Bandwidth - 806.0125 MHz; Analog NPSPAC; Mask B	61
Plot 8-8:	Occupied Bandwidth - 811.0125 MHz; Analog NPSPAC; Mask B	62
Plot 8-9:	Occupied Bandwidth - 815.9875 MHz; Analog NPSPAC; Mask B	63
Plot 8-10:	Occupied Bandwidth - 851.0125 MHz; Analog NPSPAC; Mask B	64
Plot 8-11:	Occupied Bandwidth - 856.0125 MHz; Analog NPSPAC; Mask B	65
Plot 8-12:	Occupied Bandwidth - 860.9875 MHz; Analog NPSPAC; Mask B	66
Plot 8-13:	Occupied Bandwidth - 806.0125 MHz; P25; Mask D	67
Plot 8-14:	Occupied Bandwidth - 811.0125 MHz; P25; Mask D	68
Plot 8-15:	Occupied Bandwidth - 815.9875 MHz; P25; Mask D	69
Plot 8-16:	Occupied Bandwidth - 851.0125 MHz; P25; Mask D	70
Plot 8-17:	Occupied Bandwidth - 856.0125 MHz; P25; Mask D	71
Plot 8-18:	Occupied Bandwidth - 860.9875 MHz; P25; Mask D	72
Plot 8-19:	Occupied Bandwidth - 806.0125 MHz; P25; Mask H	73
Plot 8-20:	Occupied Bandwidth - 811.0125 MHz; P25; Mask G	74
Plot 8-21:	Occupied Bandwidth - 815.9875 MHz; P25; Mask G	75
Plot 8-22:	Occupied Bandwidth - 851.0125 MHz; P25; Mask H	76
Plot 8-23:	Occupied Bandwidth - 856.0125 MHz; P25; Mask G	77
Plot 8-24:	Occupied Bandwidth - 860.9875 MHz; P25; Mask G	78

Plot 8-25:	Occupied Bandwidth – 806.0125 MHz; P25 Phase 2; Mask D.....	79
Plot 8-26:	Occupied Bandwidth – 811.0125 MHz; P25 Phase 2; Mask D.....	80
Plot 8-27:	Occupied Bandwidth – 815.9875 MHz; P25 Phase 2; Mask D.....	81
Plot 8-28:	Occupied Bandwidth – 851.0125 MHz; P25 Phase 2; Mask D.....	82
Plot 8-29:	Occupied Bandwidth – 856.0125 MHz; P25 Phase 2; Mask D.....	83
Plot 8-30:	Occupied Bandwidth – 860.9875 MHz; P25 Phase 2; Mask D.....	84
Plot 8-31:	Occupied Bandwidth – 806.0125 MHz; P25 Phase 2; Mask H.....	85
Plot 8-32:	Occupied Bandwidth – 811.0125 MHz; P25 Phase 2; Mask G.....	86
Plot 8-33:	Occupied Bandwidth – 815.9875 MHz; P25 Phase 2; Mask G.....	87
Plot 8-34:	Occupied Bandwidth – 851.0125 MHz; P25 Phase 2; Mask H.....	88
Plot 8-35:	Occupied Bandwidth – 856.0125 MHz; P25 Phase 2; Mask G.....	89
Plot 8-36:	Occupied Bandwidth – 860.9875 MHz; P25 Phase 2; Mask G.....	90
Plot 10-1:	Modulation Characteristics - Audio Frequency Response – 772.0125 MHz (NB)	105
Plot 10-2:	Modulation Characteristics - Audio Frequency Response – 856.0125 MHz (WB)	106
Plot 10-3:	Modulation Characteristics – Audio Low Pass Filter – 772.0125 MHz (NB)	107
Plot 10-4:	Modulation Characteristics – Audio Low Pass Filter – 856.0125 MHz (WB)	108
Plot 10-5:	Modulation Characteristics – Modulation Limiting – 772.0125 MHz; NB; Positive Peak ...	109
Plot 10-6:	Modulation Characteristics – Modulation Limiting - 772.0125 MHz; (NB) Negative Peak ..	110
Plot 10-7:	Modulation Characteristics – Modulation Limiting – 856.0125 MHz, WB, Positive Peak ..	111
Plot 10-8:	Modulation Characteristics – Modulation Limiting – 856.0125 MHz, WB, Negative Peak ..	112
Plot 10-9:	Modulation Characteristics – Modulation Limiting – 806.0125 MHz, WB (NPSPAC), Positive Peak	113
Plot 10-10:	Modulation Characteristics – Modulation Limiting – 806.0125 MHz, WB (NPSPAC), Negative Peak.....	114

Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure	116
Appendix B:	Agency Authorization	117
Appendix C:	FCC and IC Confidentiality Request Letter	118
Appendix D:	IC Letters	119
Appendix E:	Canadian Based Representative Attestation Letter	120
Appendix F:	AFC Attestation	121
Appendix G:	ID Label & Location	122
Appendix H:	Operational Description	124
Appendix I:	Parts List.....	125
Appendix J:	Test / Tune Procedure.....	126
Appendix K:	Schematics	127
Appendix L:	Block Diagrams	128
Appendix M:	Manuals	129
Appendix N:	Test Configuration Photographs.....	130
Appendix O:	External Photographs	132
Appendix P:	Internal Photographs	136

Table of Photographs

Photograph 1:	FCC ID Label with RF Statement	122
Photograph 2:	IC ID Label.....	122
Photograph 3:	ID Label Locations.....	123
Photograph 4:	Radiated Emissions (Spurious/Harmonics) – Front View	130
Photograph 5:	Radiated Emissions (Spurious/Harmonics) – Back View.....	131
Photograph 6:	Front and Back Views	132
Photograph 7:	Sides 1 and 2.....	133
Photograph 8:	Top View.....	134
Photograph 9:	Bottom View	135
Photograph 10:	Inside Front Cover	136
Photograph 11:	Inside Rear Cover	137
Photograph 12:	Interface PWB in Unit	138
Photograph 13:	Interface PWB Component Side	139
Photograph 14:	Interface PWB LCD Side	140
Photograph 15:	Main PWB in Unit	141
Photograph 16:	Main PWB Side 1	141
Photograph 17:	Main PWB Side 2	142

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1051, 90.210	RSS-119 5.5, 5.8	Complies
Field Strength of Spurious Radiation	2.1053(a), 90.543(c); 90.210	RSS-119 5.5, 5.8	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.543(d); 90.210	RSS-119 5.5, 5.8	Complies
Adjacent Channel Power	90.543	RSS-119 5.3	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.213, 90.539	N/A	Complies
Modulation Characteristics	2.1047(a)(b)	RSS-119 5.9	Complies
Transient Frequency Response	90.214	RSS-119 5.9	N/A

2 General Information

The following Certification Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission and Industry Canada rules and regulations. The Equipment Under Test (EUT) was the XG-15P 700/800 MHz portable radio family; FCC ID: OWDTR-0134-E, IC: 3636B-0134.

The radio is subject to FCC DoC. DoC testing was performed and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

This is a new certification application for FCC and Industry Canada. The Industry Canada Model is XR-PF78B.

2.3 Grant Notes

RF power switchable from 0.5 W to rated power 3 W.

2.4 Tested System Details

The test sample was received on February 11, 2015. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple modes of operation and modulation types.


Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
XG-15P Radio	Harris Corporation	XR-PF78B	RU-144770-001/ T1A-X1D-006	OWDTR-0134-E	21610
XG-15P Radio	Harris Corporation	XR-PF78B	RU-144770-001/ T1A-X1D-005	OWDTR-0134-E	21611

Table 2-2: Auxiliary Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Microphone	Harris Corporation	MC-009104-002	N/A	N/A	20172
Antenna ¼ wave whip	Harris Corporation	KRE 101 1506/2	N/A	N/A	N/A
Battery, Li-ION	Harris Corporation	14002-0214-01	KPAM	N/A	20166

Figure 2-1: Configuration of Tested System

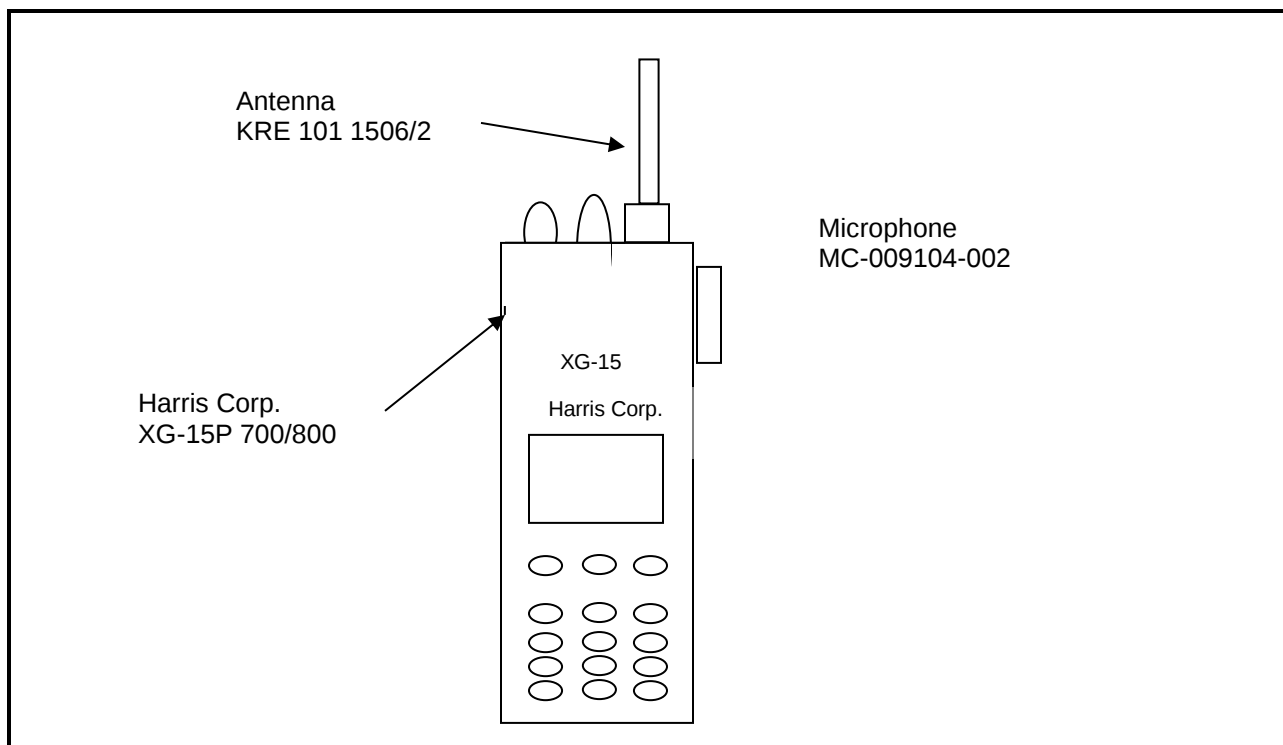

3 FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents through the Final Amplifying Stage

7.5VDC / 0.5 A

4 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limits; RSS-119 4.1 Transmitter Output Power

4.1 Test Procedure

ANSI/TIA/EIA-603-2004, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's rated power: 3 W for 800 band, 3 W for 700 band; for the 2 W ERP used in the 700 MHz band on-scene incident channels, a power setting of 1.9 W is used.

4.2 Test Data

Table 4-1: RF Conducted Output Power – Measured

Frequency (MHz)	High Power (dBm)	High Power (W)	Low Power (dBm)	Low Power (W)
768.0125	34.6	2.9	28.5	0.7
769.0125	34.7	2.9	28.4	0.7
772.0125	34.7	3.0	28.3	0.7
774.9875	34.7	3.0	28.3	0.7
775.9875	34.7	2.9	28.3	0.7
798.0125	34.7	3.0	28.4	0.7
799.0125	34.8	3.0	28.4	0.7
801.0125	34.8	3.0	28.3	0.7
804.9875	34.8	3.0	28.3	0.7
768.0125	34.6	2.9	28.5	0.7
806.0125	35.3	3.4	28.4	0.7
811.0125	35.3	3.4	28.4	0.7
815.9875	35.2	3.3	28.4	0.7
851.0125	35.2	3.3	28.4	0.7
856.0125	35.2	3.3	28.2	0.7
860.9875	35.1	3.2	28.4	0.7
806.0125	35.3	3.4	28.4	0.7

Notes: Data presented is for analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
EUT: XG-15P 700/800 MHz
ID's: OWDTR-0134-E/3636B-0134
Standards: FCC Part 90
Report #: 2015011

Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
901536	Aeroflex	48-40-34	40 dB Attenuator	CB6627	10/6/15

Test Personnel:

Daniel Baltzell		February 13, 2015
EMC Test Engineer	Signature	Date of Test

5 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations

5.1 Test Procedure

ANSI/TIA/EIA-603-2004, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

5.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: (43+10LOG P(W)) for wideband and 50 + 10 LOG P(W)) for narrowband

The following channels (in MHz) were investigated:

700 MHz	800 MHz
768.0125	806.0125
769.0125	811.0125
772.0125	815.9875
774.9875	851.0125
775.9875	856.0125
798.0125	860.9875
799.0125	
801.0125	
804.9875	

Both high and low power settings were checked; high power was found to be worst case and is presented. All modes were investigated and no emissions were found within 20 dB below the limit, no data is presented.

Table 5-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	6/16/15
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	7/1/15

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

February 18, 2015
Date of Test

6 FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements; RSS-119 4.3 Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 764-776 MHz and 794-806 MHz

Effective October 23, 2007, transmitters designed to operate in the 769–775 MHz and 799–805 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in the 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

6.1 Test Procedure

ANSI/TIA-603-C-2004 2.2.14 Unwanted Emissions: Adjacent Channel Power Ratio

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

For a Portable transmitter designed to operate with a 12.5 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)9.375	6.25	-40
(+/-)15.625	6.25	-60
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

For a Portable transmitter designed to operate with a 25 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)15.625	6.25	-40
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

FCC Rules and Regulations 90.543(b)

Setting Reference Level - 90.543(b)(1): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth to the channel size. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset <600 kHz - §90.543(b)(2): Using a spectrum analyzer capable of adjacent channel power (ACP) measurements, set the measurement bandwidth as shown in the table. Measure ACP in dBm. These measurements are made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >600 kHz - §90.543(b)(3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample detection mode. Sweep +/-6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

6.2 Test Data

Plot 6-1: Adjacent Channel Power - 768.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)

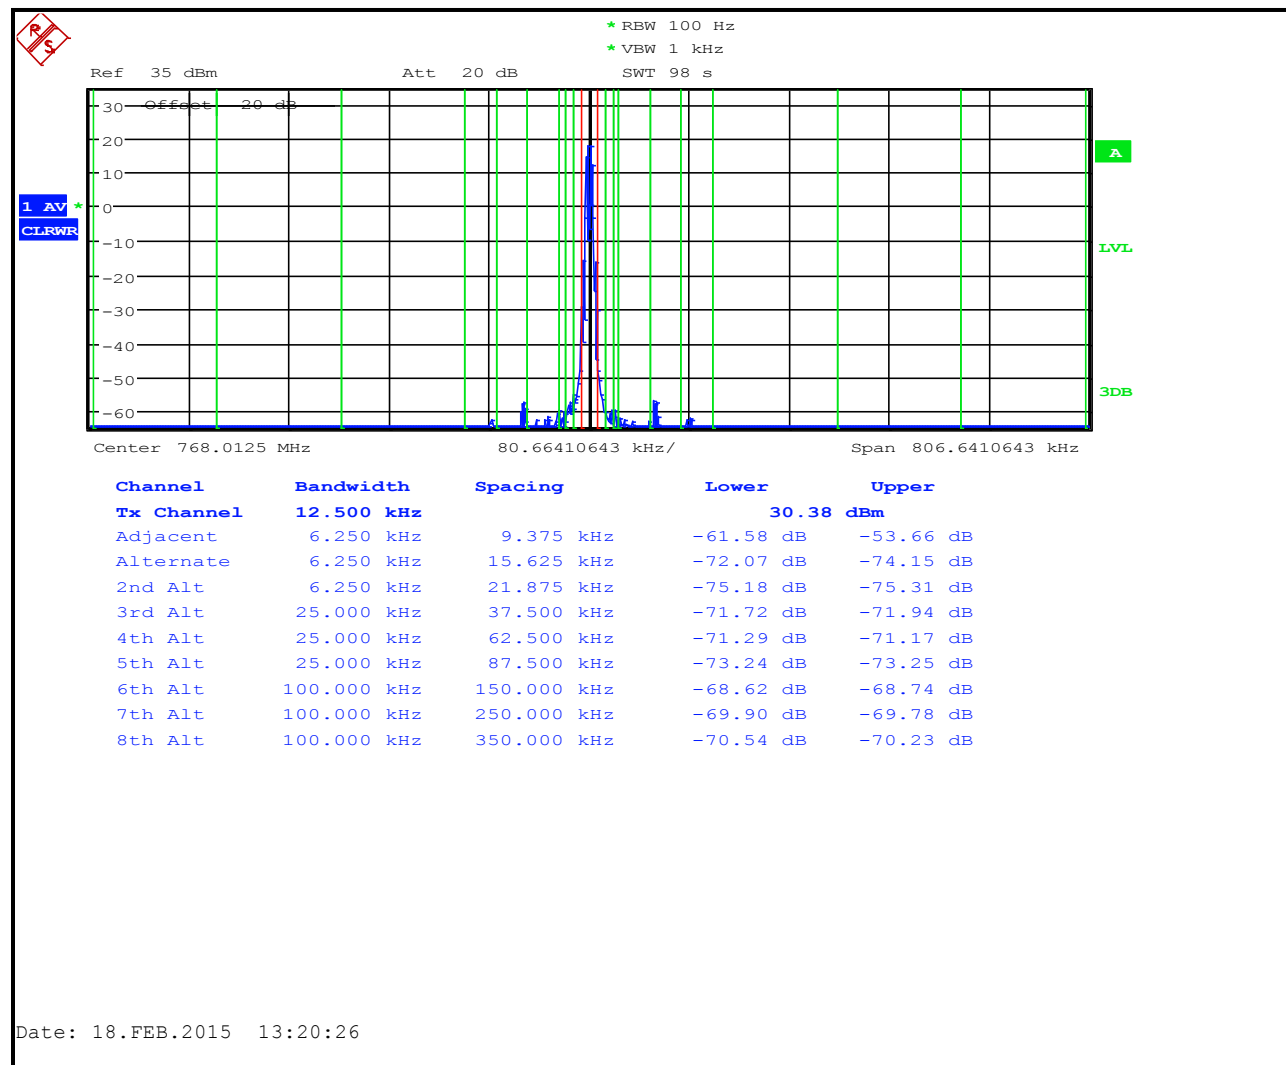


Table 6-1: Adjacent Channel Power - 768.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.1
12 MHz to receive band	30(s)	-75	-81.7
In receive band	30(s)	-100	-102.9

Plot 6-2: Adjacent Channel Power - 768.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

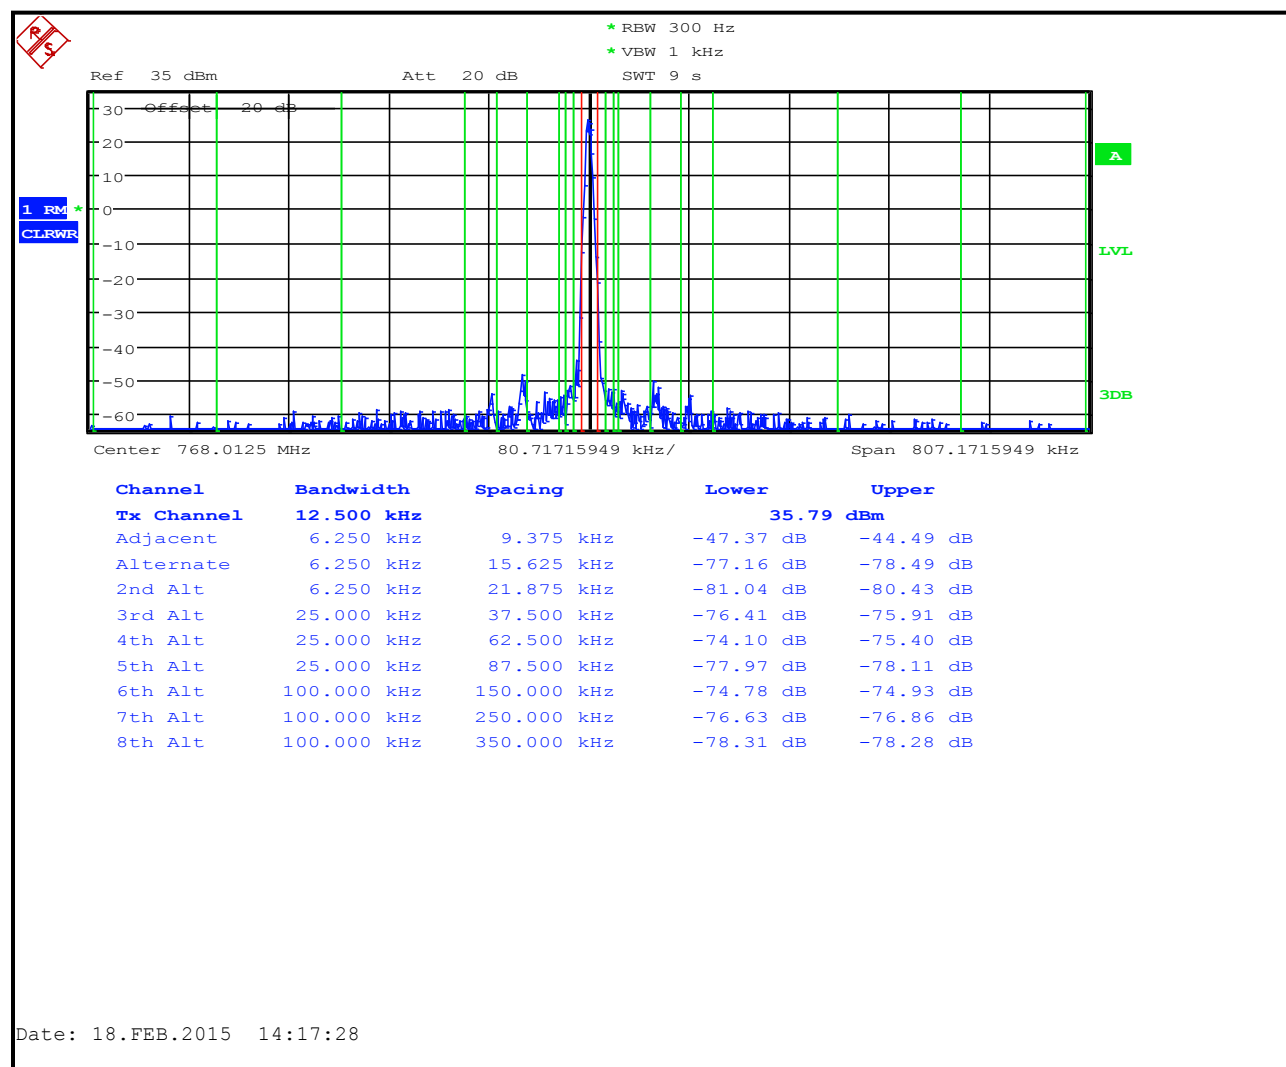


Table 6-2: Adjacent Channel Power - 768.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.6
12 MHz to receive band	30(s)	-75	-80.9
In receive band	30(s)	-100	-104.4

Plot 6-3: Adjacent Channel Power - 768.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

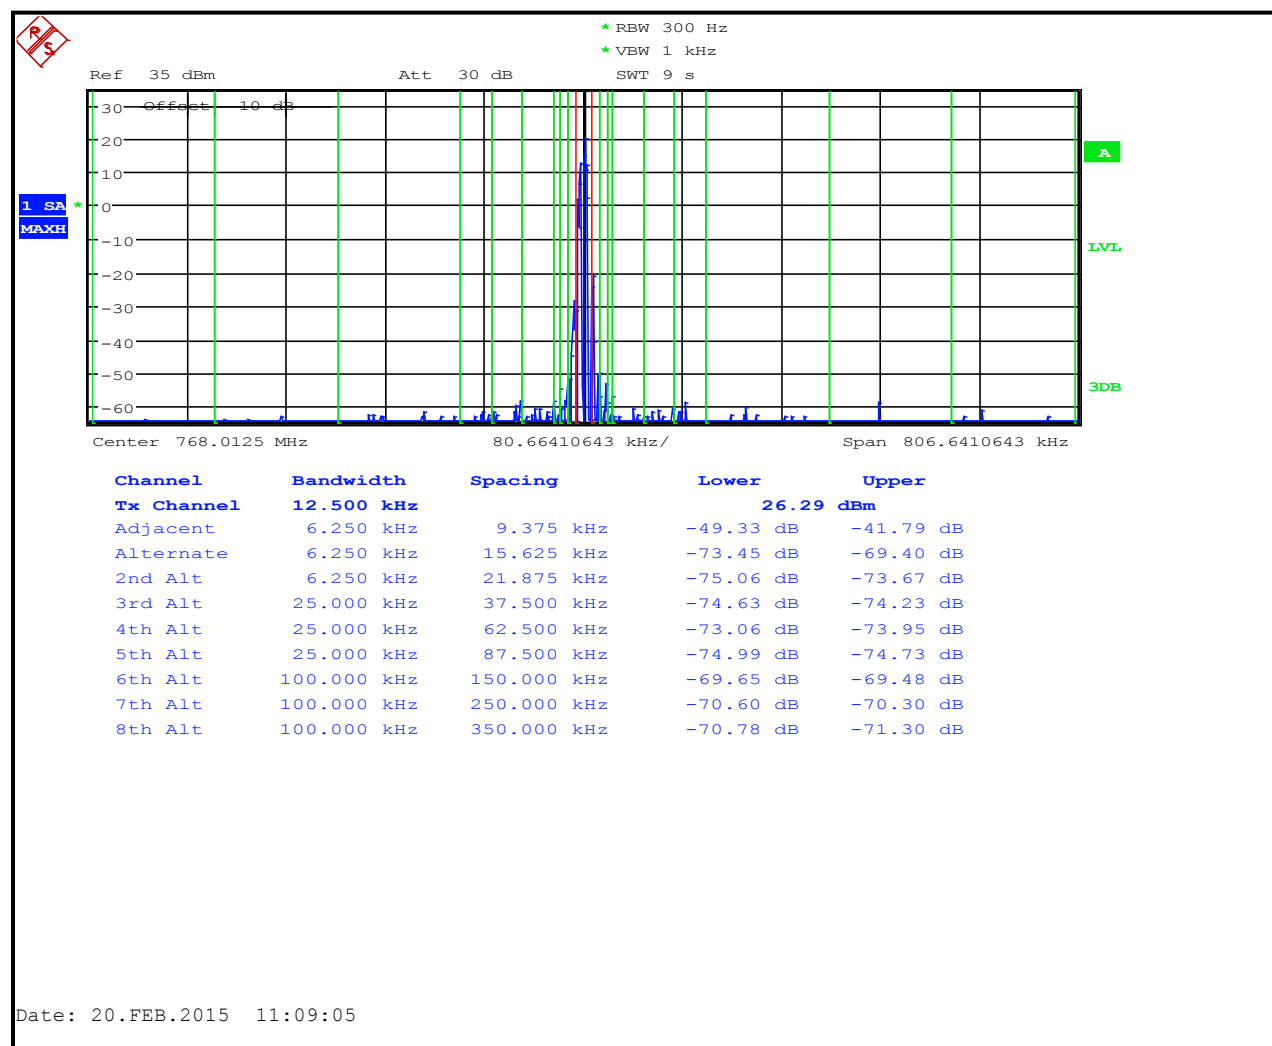


Table 6-3: Adjacent Channel Power - 768.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.7
12 MHz to receive band	30(s)	-75	-86.5
In receive band	30(s)	-100	-106.7

Plot 6-4: Adjacent Channel Power - 769.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)

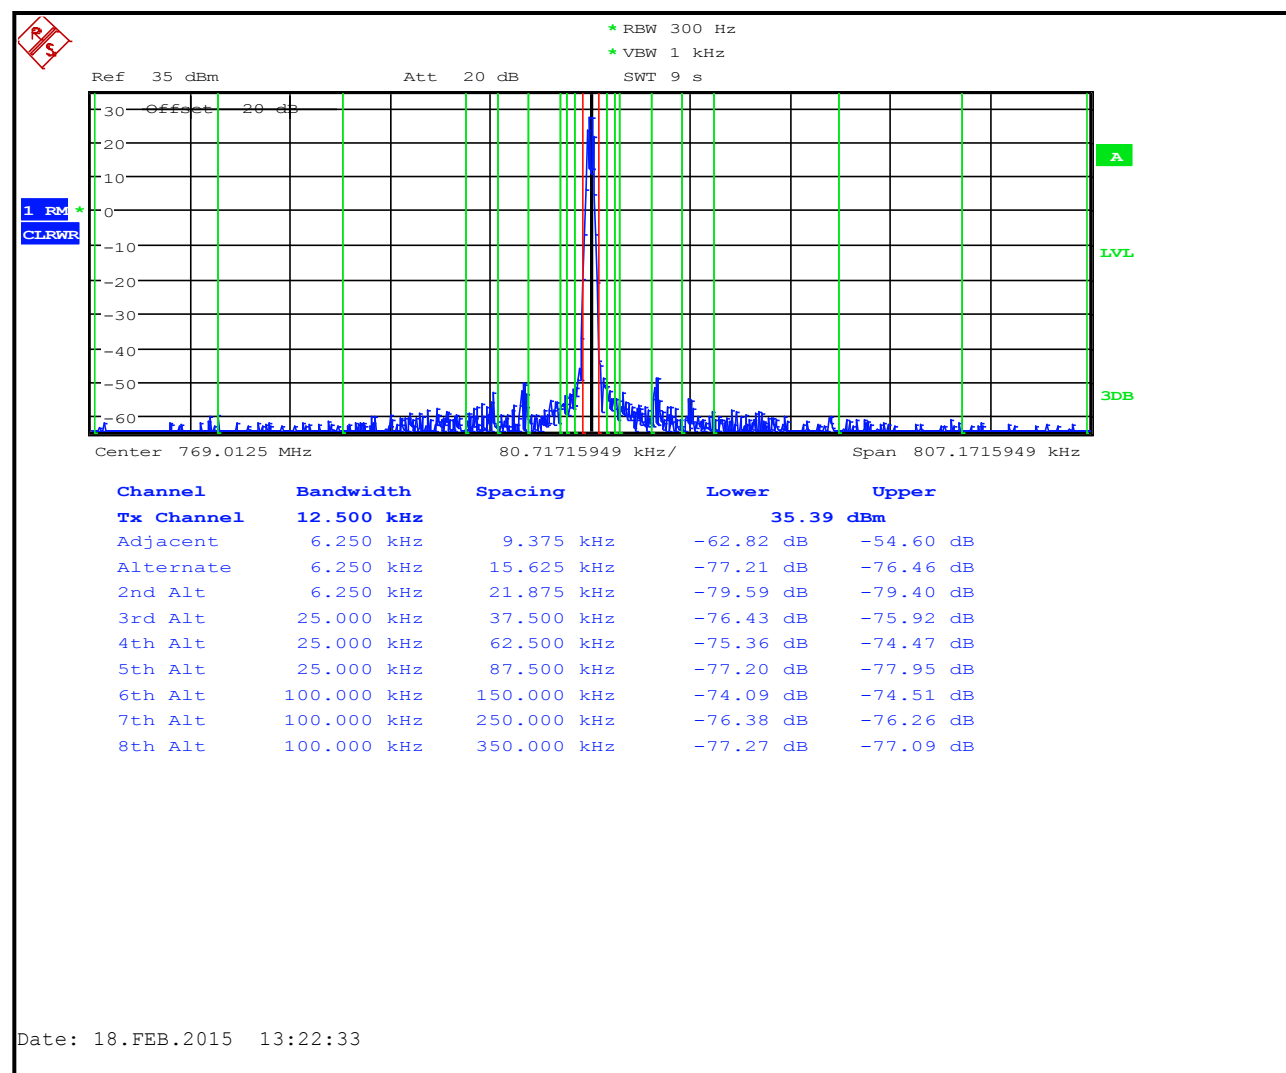


Table 6-4: Adjacent Channel Power - 769.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.4
12 MHz to receive band	30(s)	-75	-77.1
In receive band	30(s)	-100	-104.9

Plot 6-5: Adjacent Channel Power - 769.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

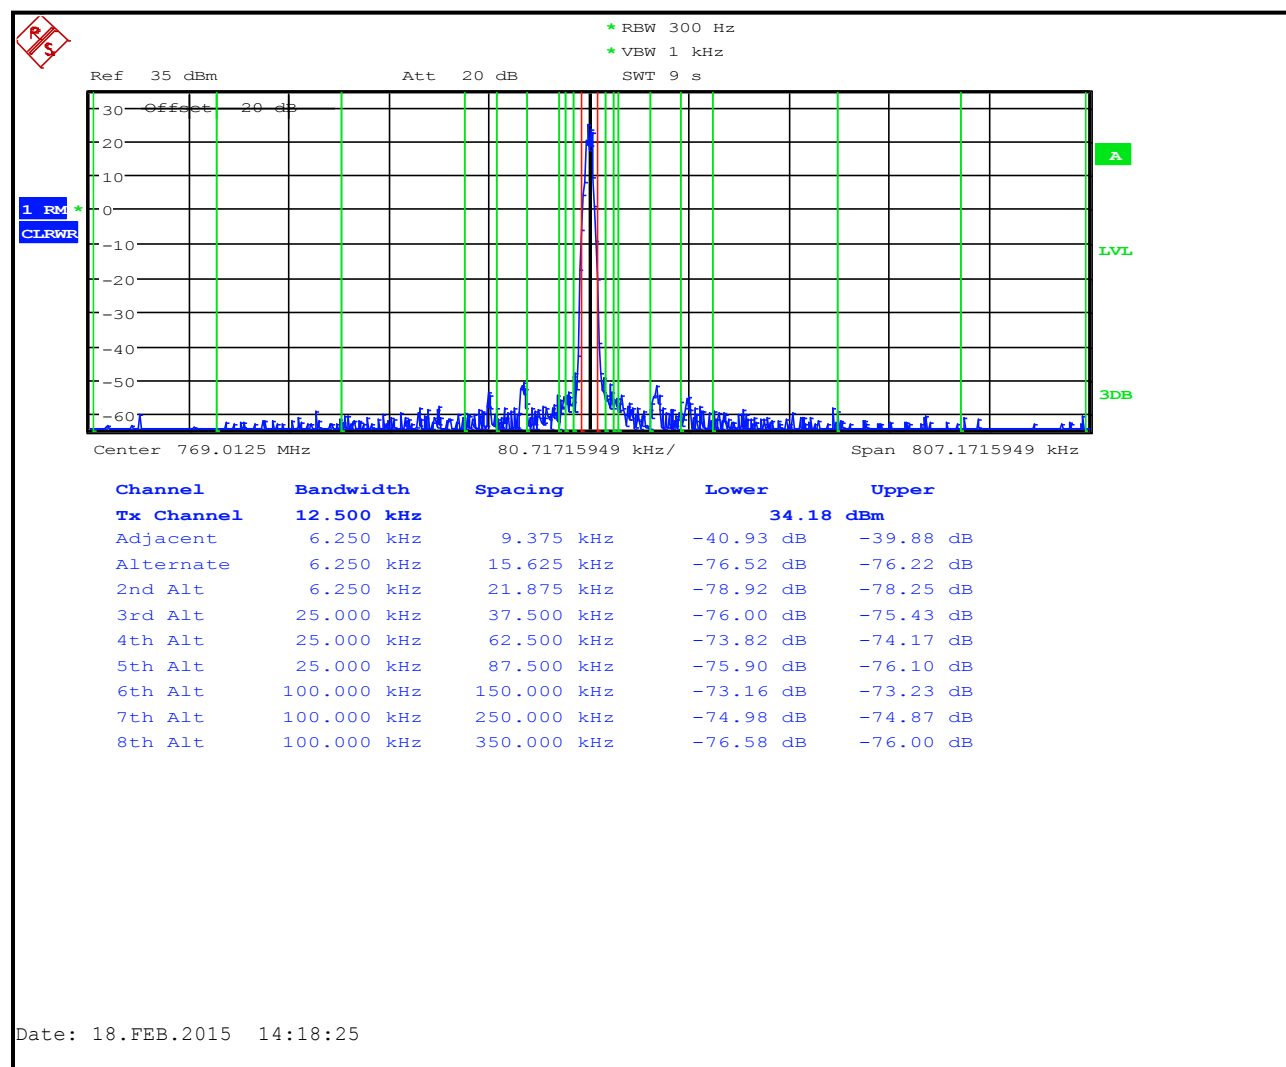


Table 6-5: Adjacent Channel Power - 769.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.4
12 MHz to receive band	30(s)	-75	-77.5
In receive band	30(s)	-100	-106.0

Plot 6-6: Adjacent Channel Power - 769.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

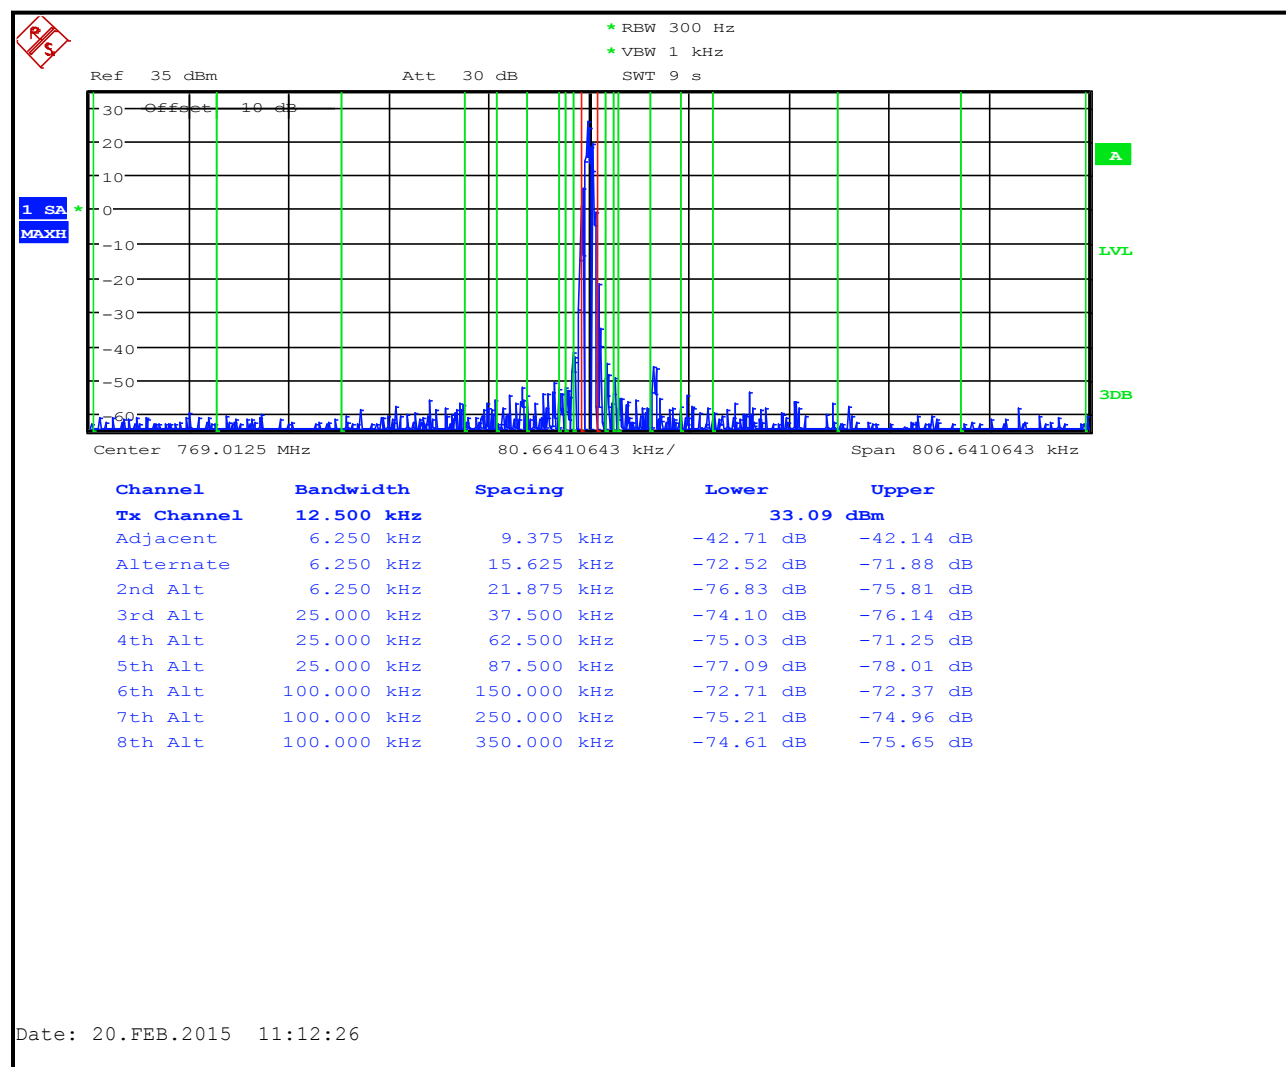


Table 6-6: Adjacent Channel Power - 769.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.8
12 MHz to receive band	30(s)	-75	-86.1
In receive band	30(s)	-100	-107.3

Plot 6-7: Adjacent Channel Power - 772.0125 MHz; Analog Mode (9.375 kHz - 350 kHz)

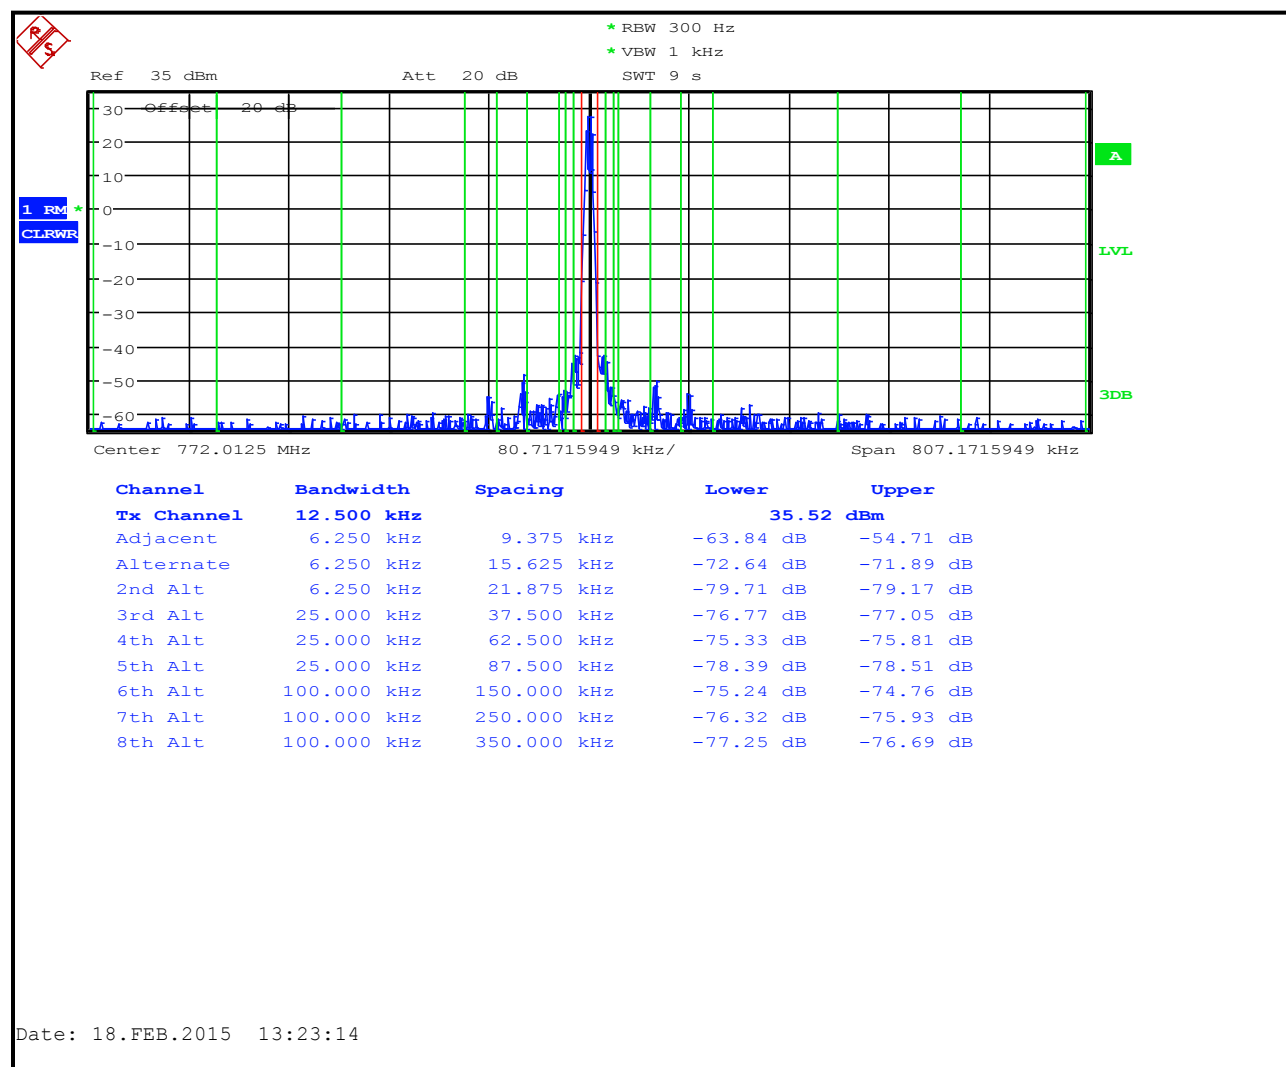


Table 6-7: Adjacent Channel Power – 772.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.1
12 MHz to receive band	30(s)	-75	-81.1
In receive band	30(s)	-100	-102.6

Plot 6-8: Adjacent Channel Power - 772.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

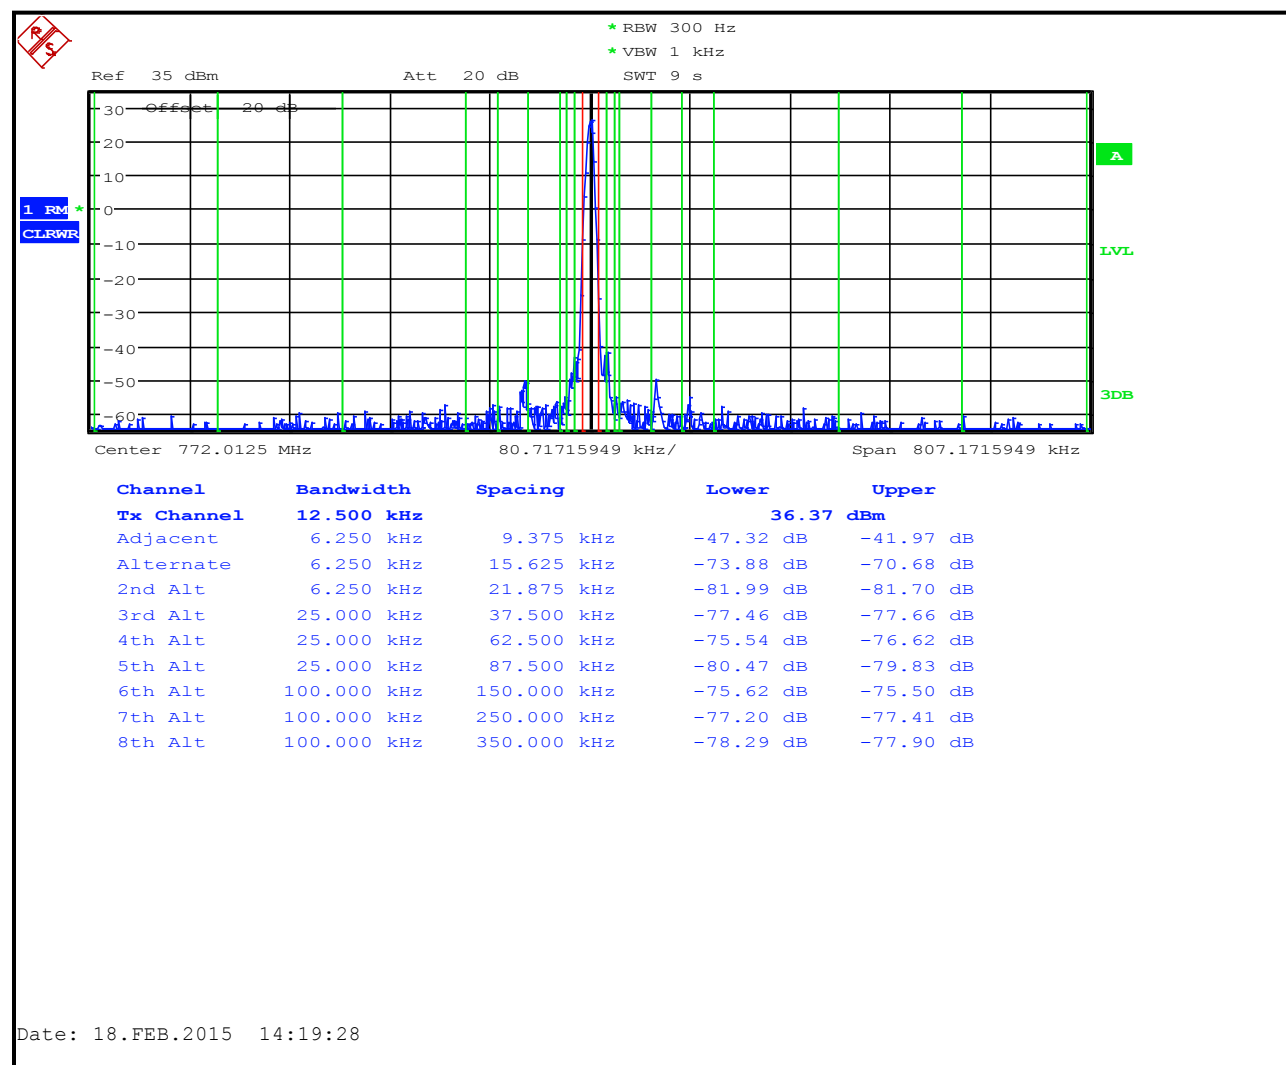


Table 6-8: Adjacent Channel Power – 772.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.0
12 MHz to receive band	30(s)	-75	-81.0
In receive band	30(s)	-100	-101.4

Plot 6-9: Adjacent Channel Power - 772.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

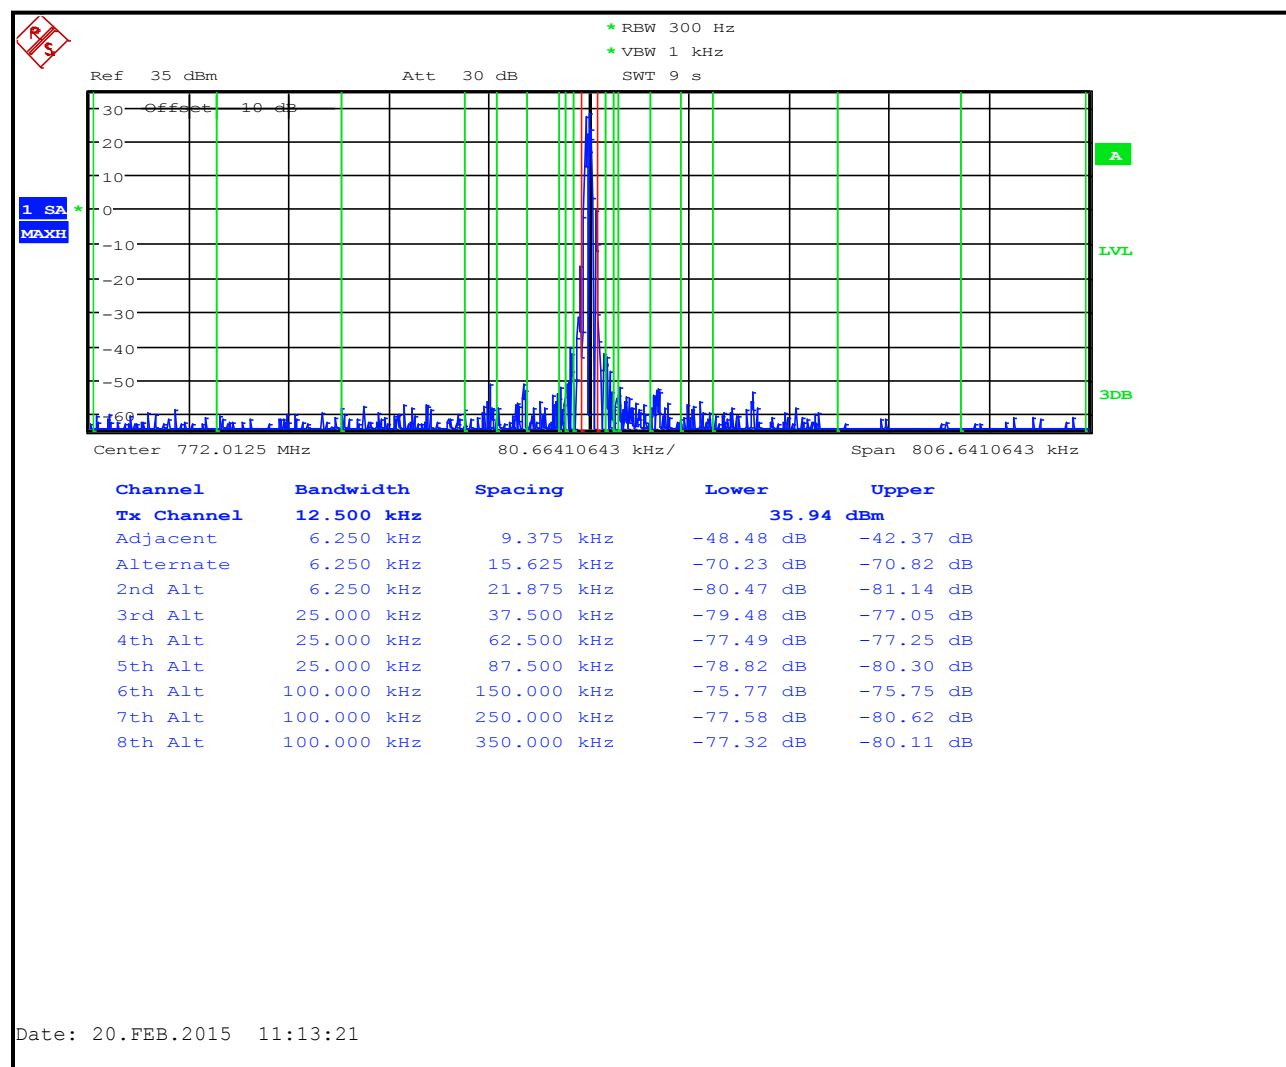


Table 6-9: Adjacent Channel Power – 772.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.3
12 MHz to receive band	30(s)	-75	-86.4
In receive band	30(s)	-100	-106.9

Plot 6-10: Adjacent Channel Power - 774.9875 MHz; Analog Mode (9.375 kHz - 350 kHz)

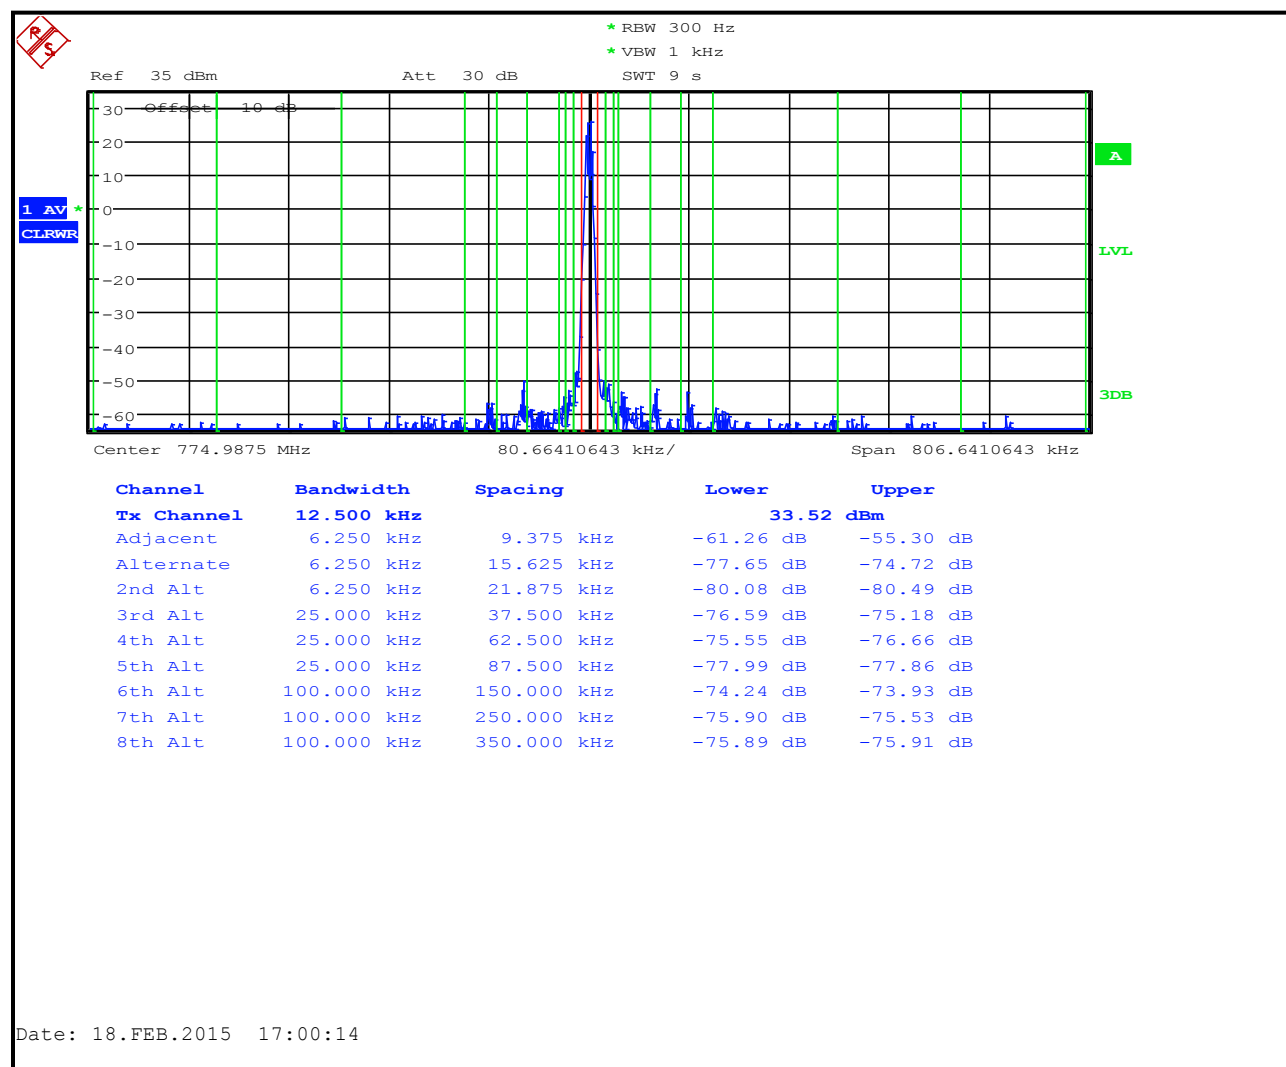


Table 6-10: Adjacent Channel Power – 774.9875 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.7
12 MHz to receive band	30(s)	-75	-79.9
In receive band	30(s)	-100	-102.9

Plot 6-11: Adjacent Channel Power - 774.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)

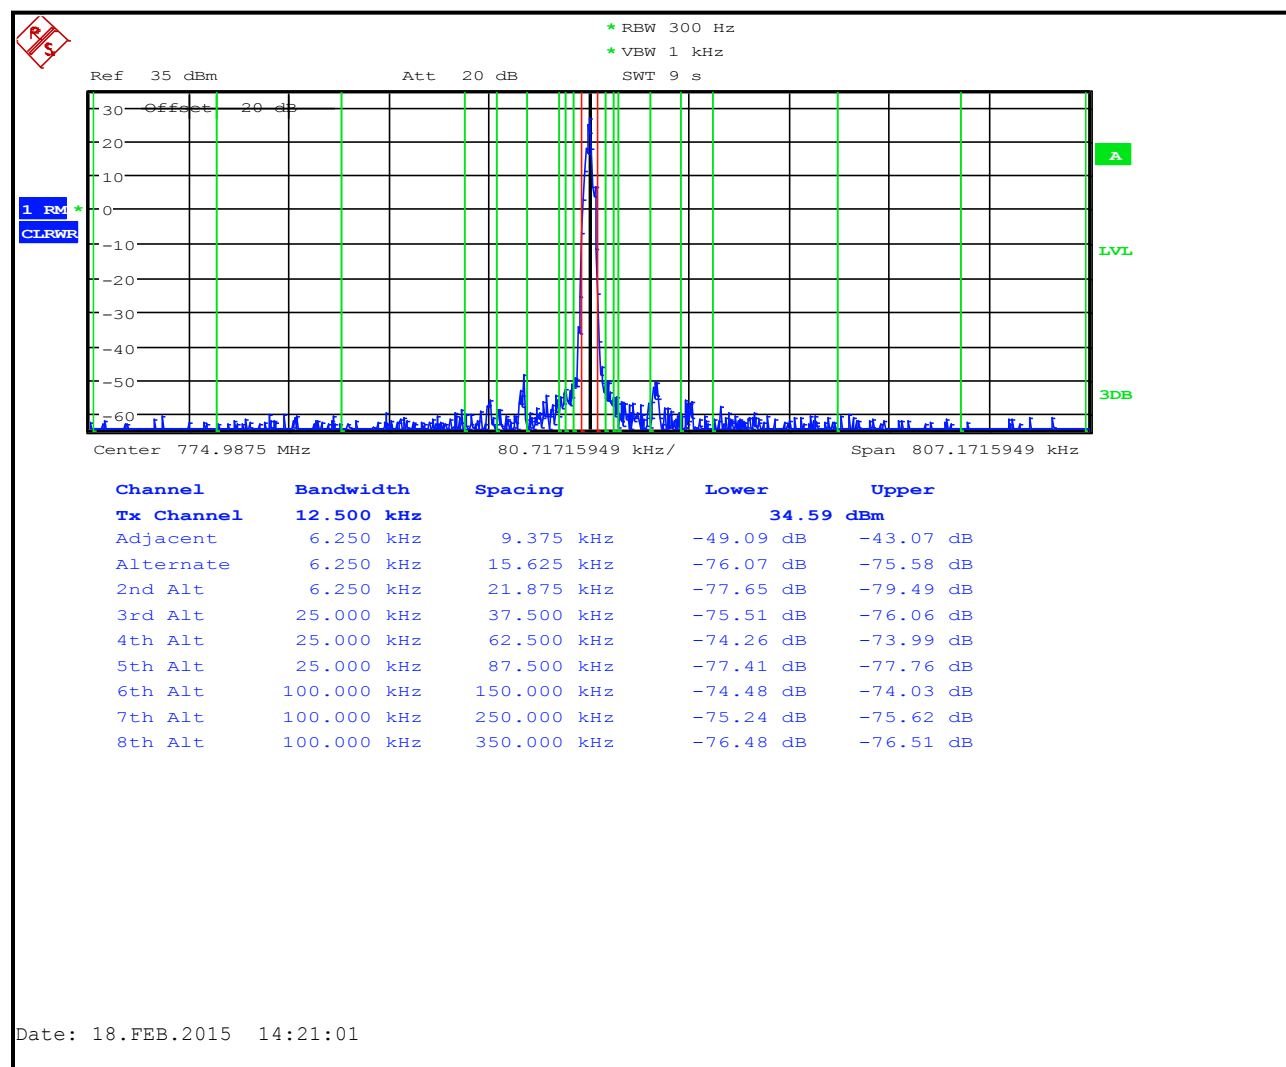


Table 6-11: Adjacent Channel Power – 774.9875 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.1
12 MHz to receive band	30(s)	-75	-80.7
In receive band	30(s)	-100	-102.0

Plot 6-12: Adjacent Channel Power - 774.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

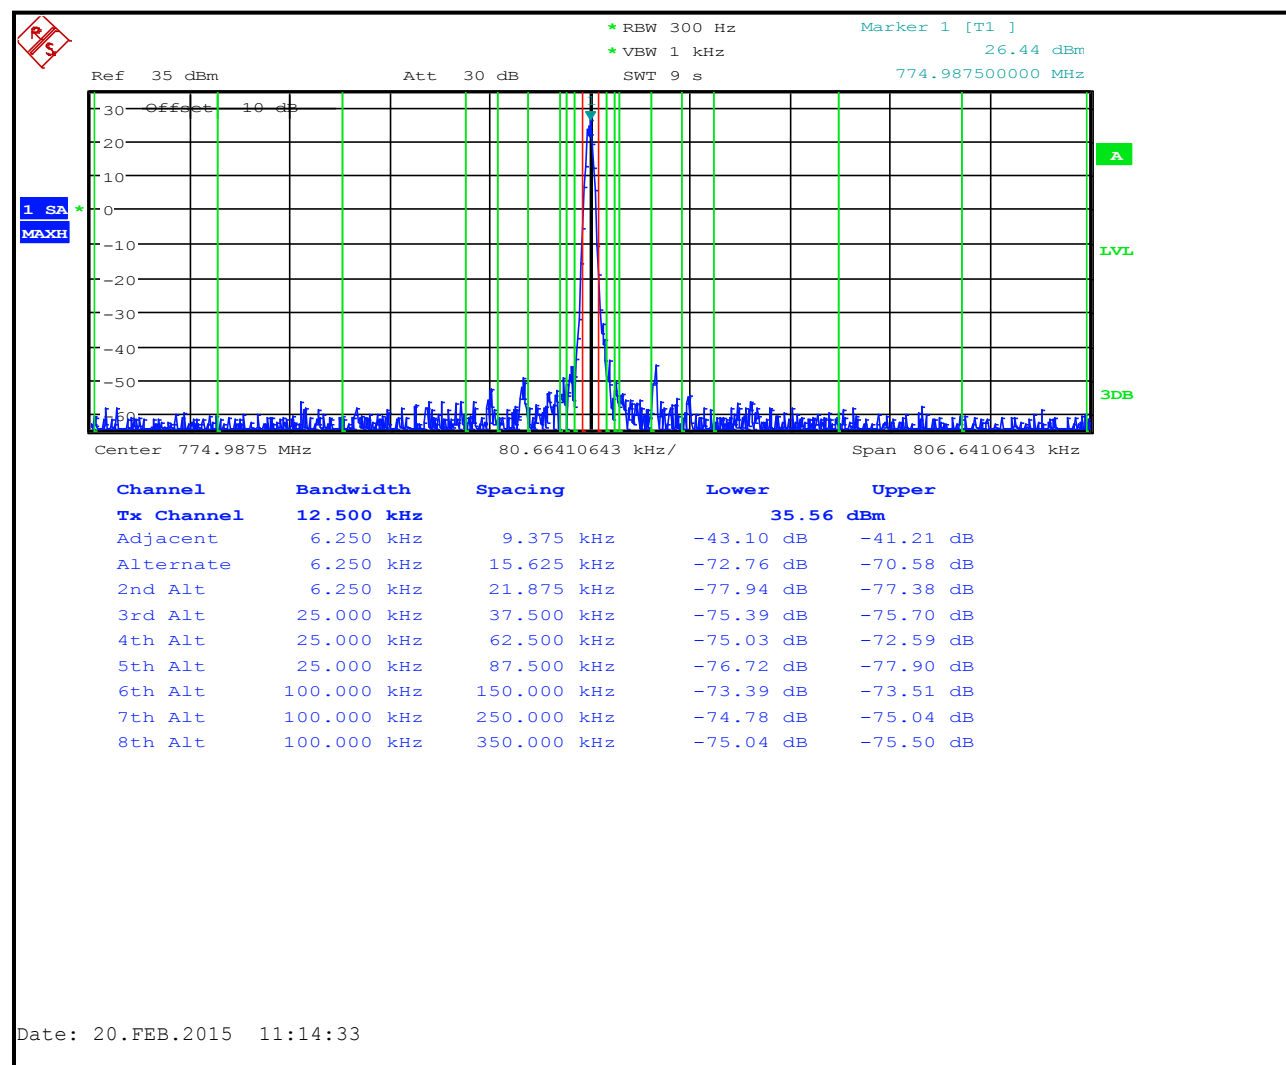


Table 6-12: Adjacent Channel Power – 774.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.3
12 MHz to receive band	30(s)	-75	-85.9
In receive band	30(s)	-100	-107.1

Plot 6-13: Adjacent Channel Power - 775.9875 MHz; Analog Mode (9.375 kHz - 350 kHz)

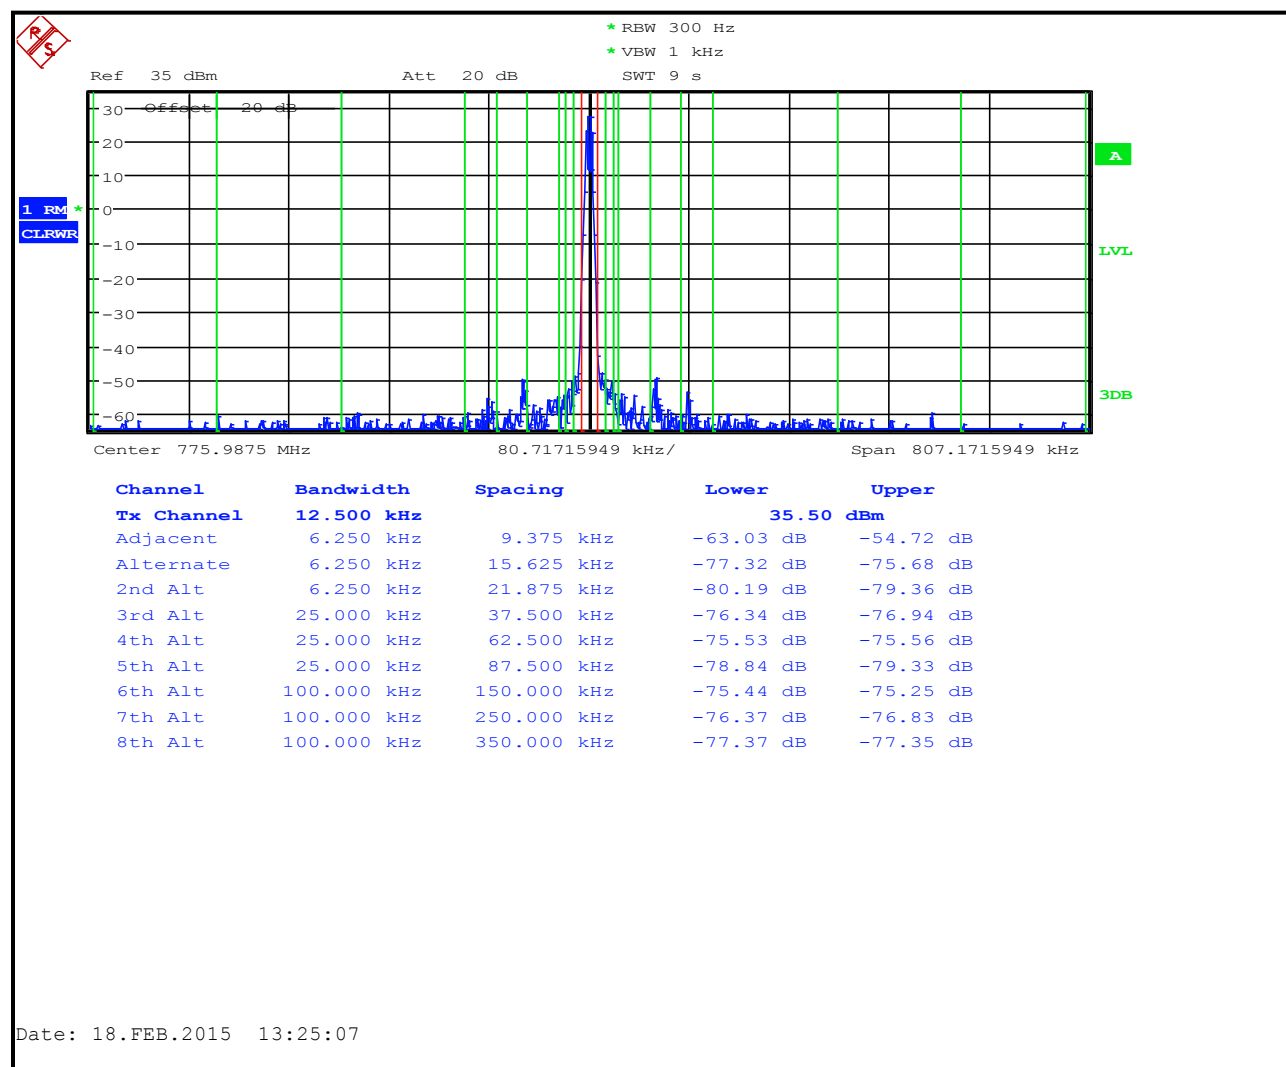


Table 6-13: Adjacent Channel Power – 775.9875 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.9
12 MHz to receive band	30(s)	-75	-81.2
In receive band	30(s)	-100	-102.9

Plot 6-14: Adjacent Channel Power - 775.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)

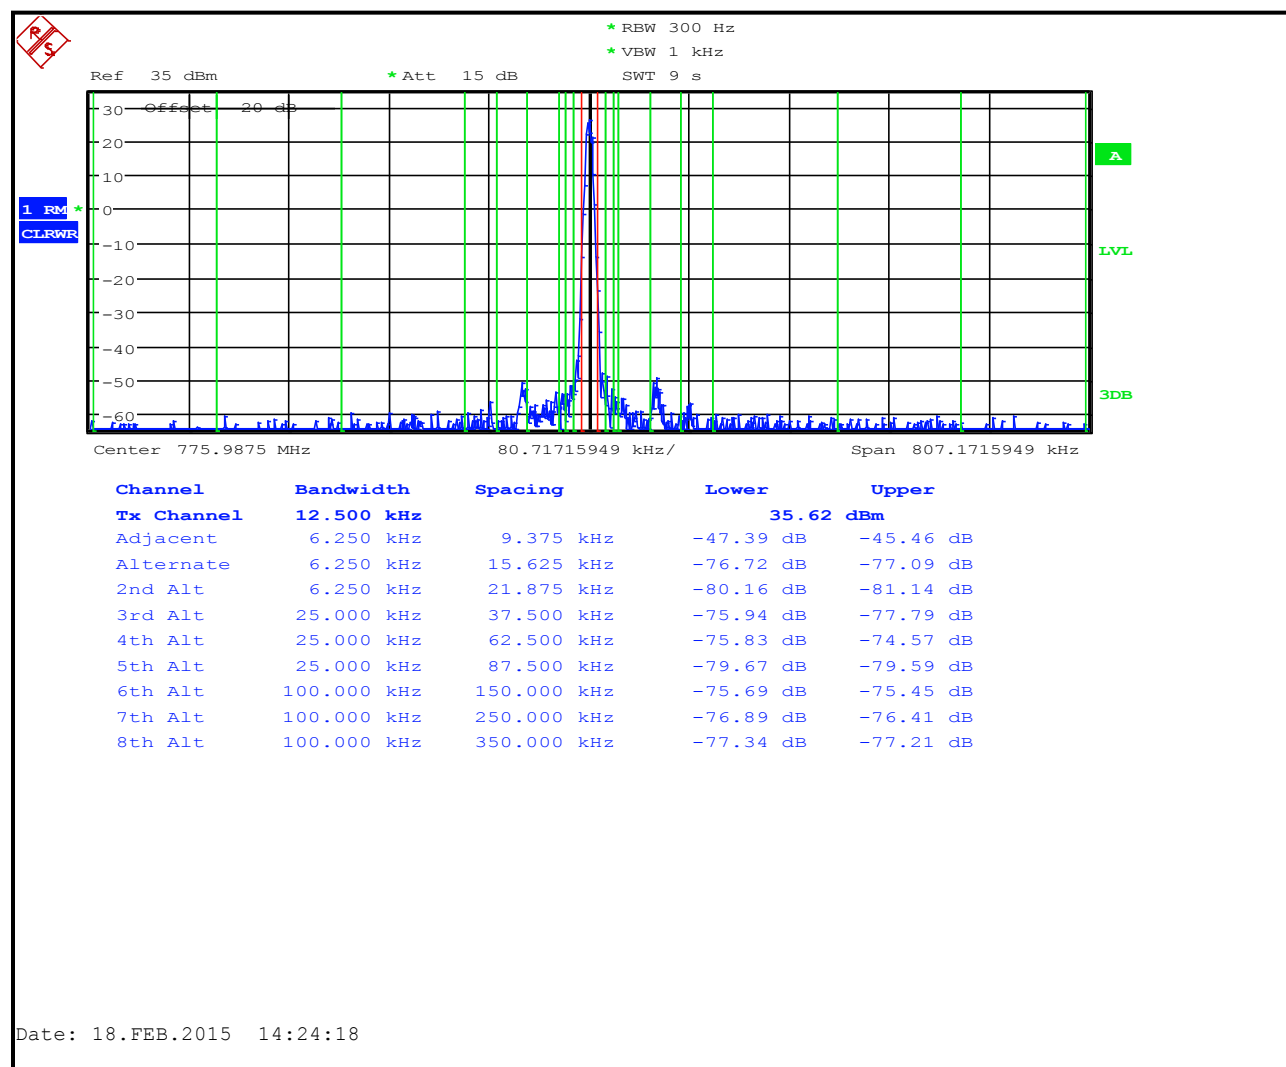


Table 6-14: Adjacent Channel Power - 775.9875 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.4
12 MHz to receive band	30(s)	-75	-81.7
In receive band	30(s)	-100	-101.1

Plot 6-15: Adjacent Channel Power - 775.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

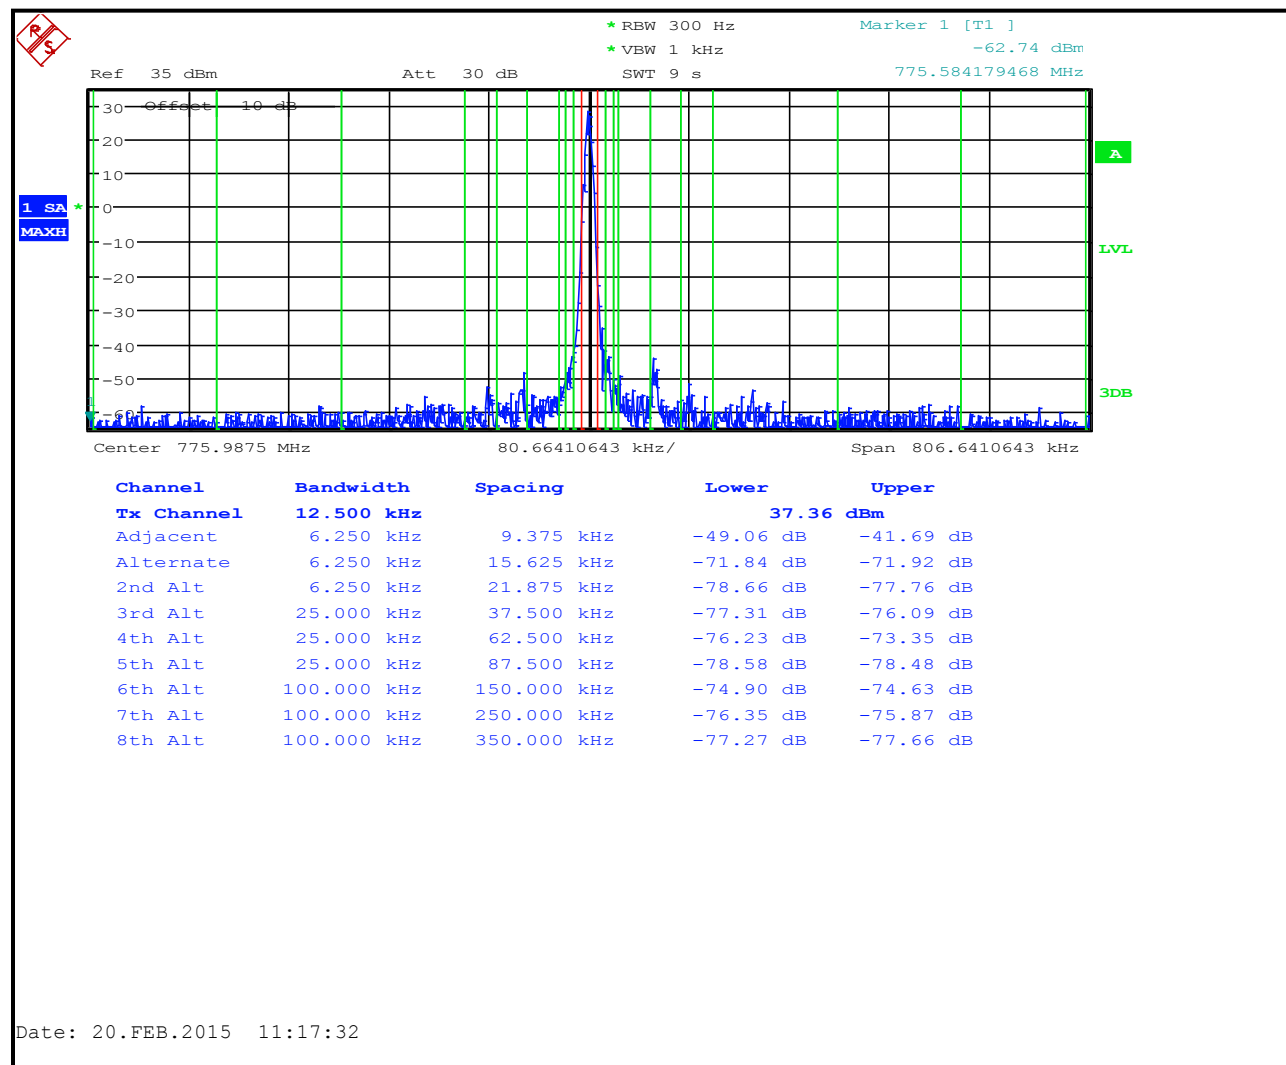


Table 6-15: Adjacent Channel Power - 775.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.5
12 MHz to receive band	30(s)	-75	-86.6
In receive band	30(s)	-100	-107.1

Plot 6-16: Adjacent Channel Power - 798.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)

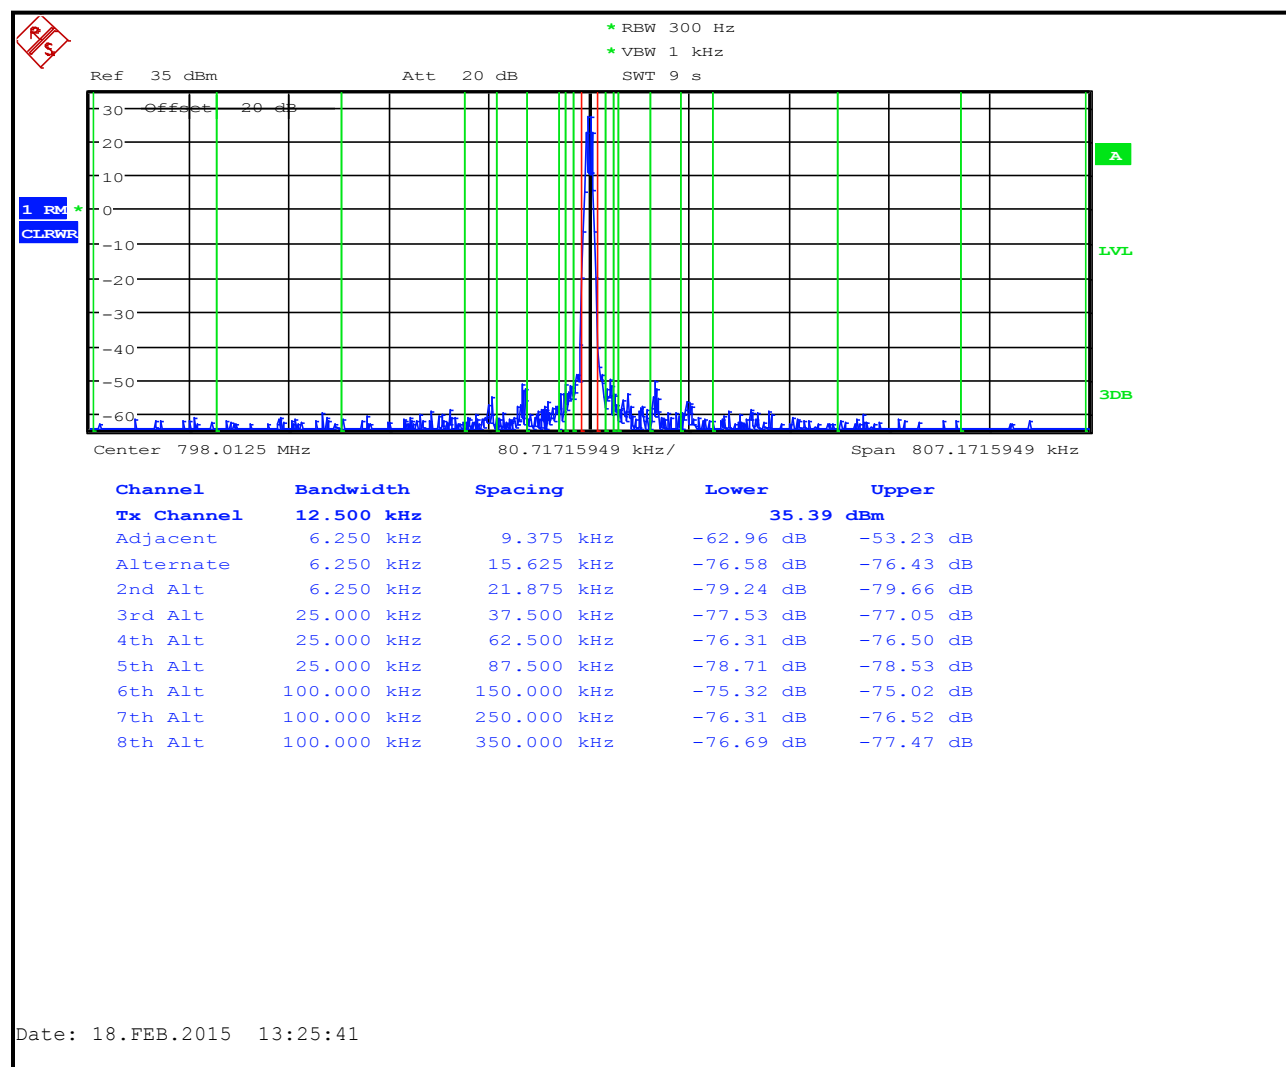


Table 6-16: Adjacent Channel Power - 798.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-85.4
12 MHz to receive band	30(s)	-75	-87.1
In receive band	30(s)	-100	-100.8

Plot 6-17: Adjacent Channel Power – 798.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

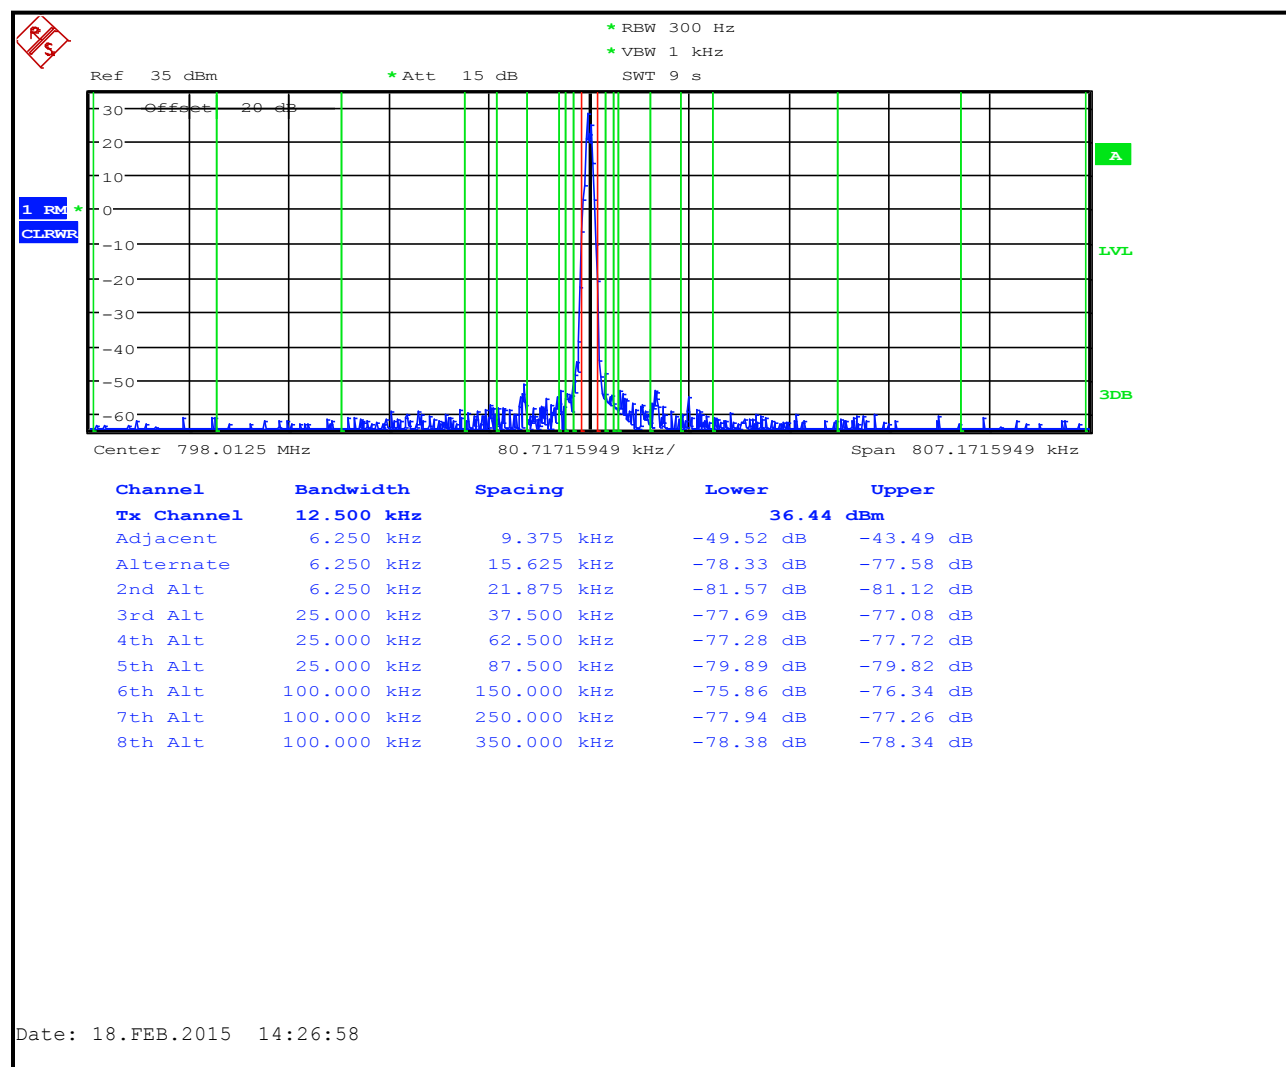


Table 6-17: Adjacent Channel Power – 798.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-85.6
12 MHz to receive band	30(s)	-75	-87.3
In receive band	30(s)	-100	-101.0

Plot 6-18: Adjacent Channel Power – 798.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

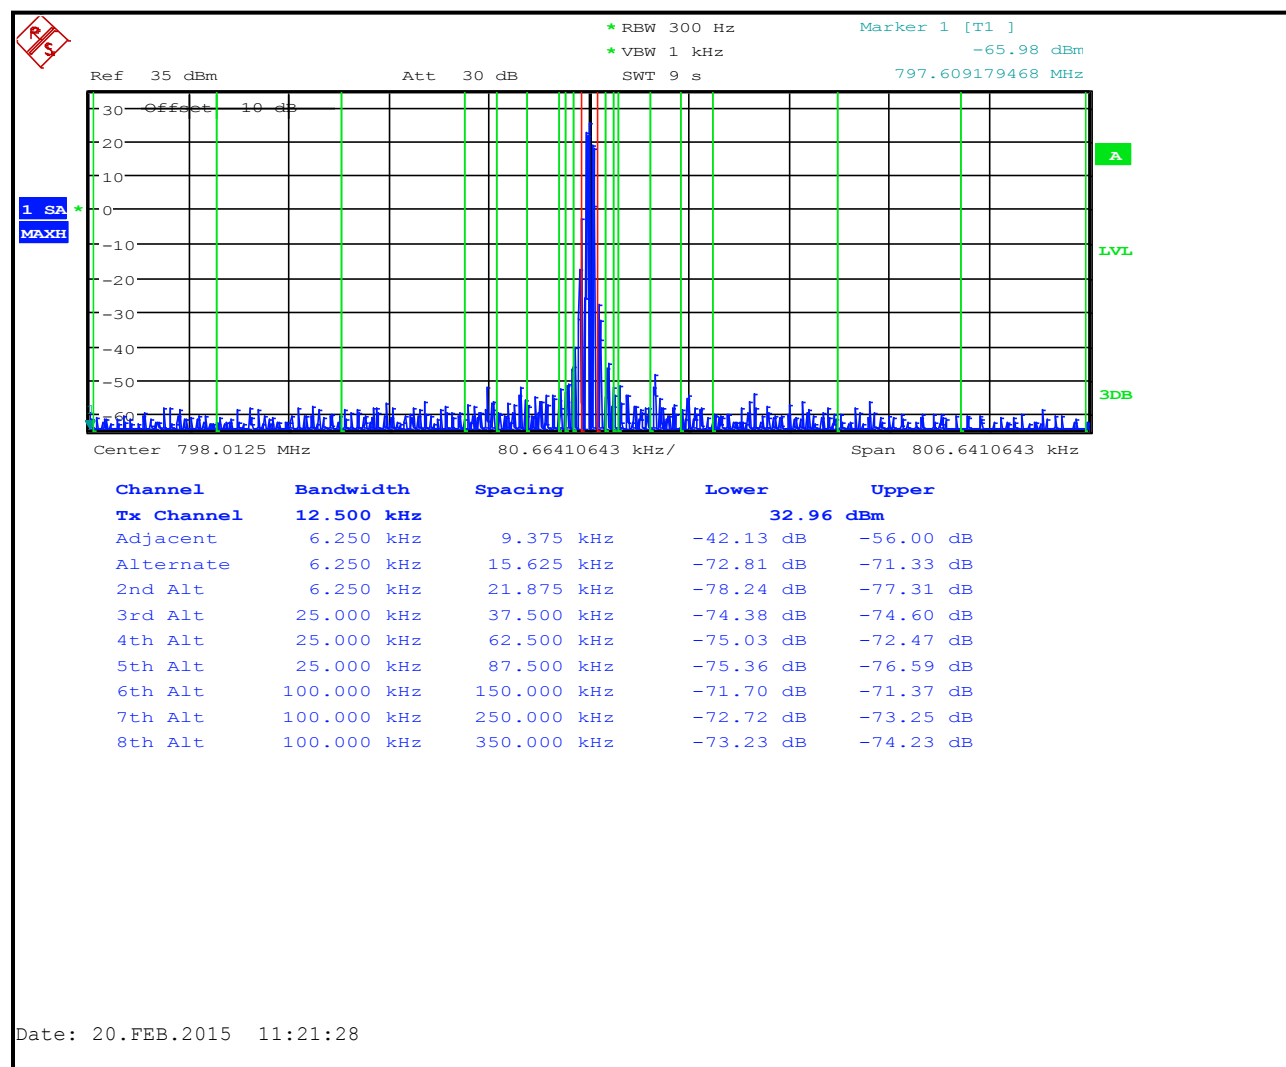


Table 6-18: Adjacent Channel Power – 798.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-77.5
12 MHz to receive band	30(s)	-75	-80.9
In receive band	30(s)	-100	-101.8

Plot 6-19: Adjacent Channel Power – 799.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)

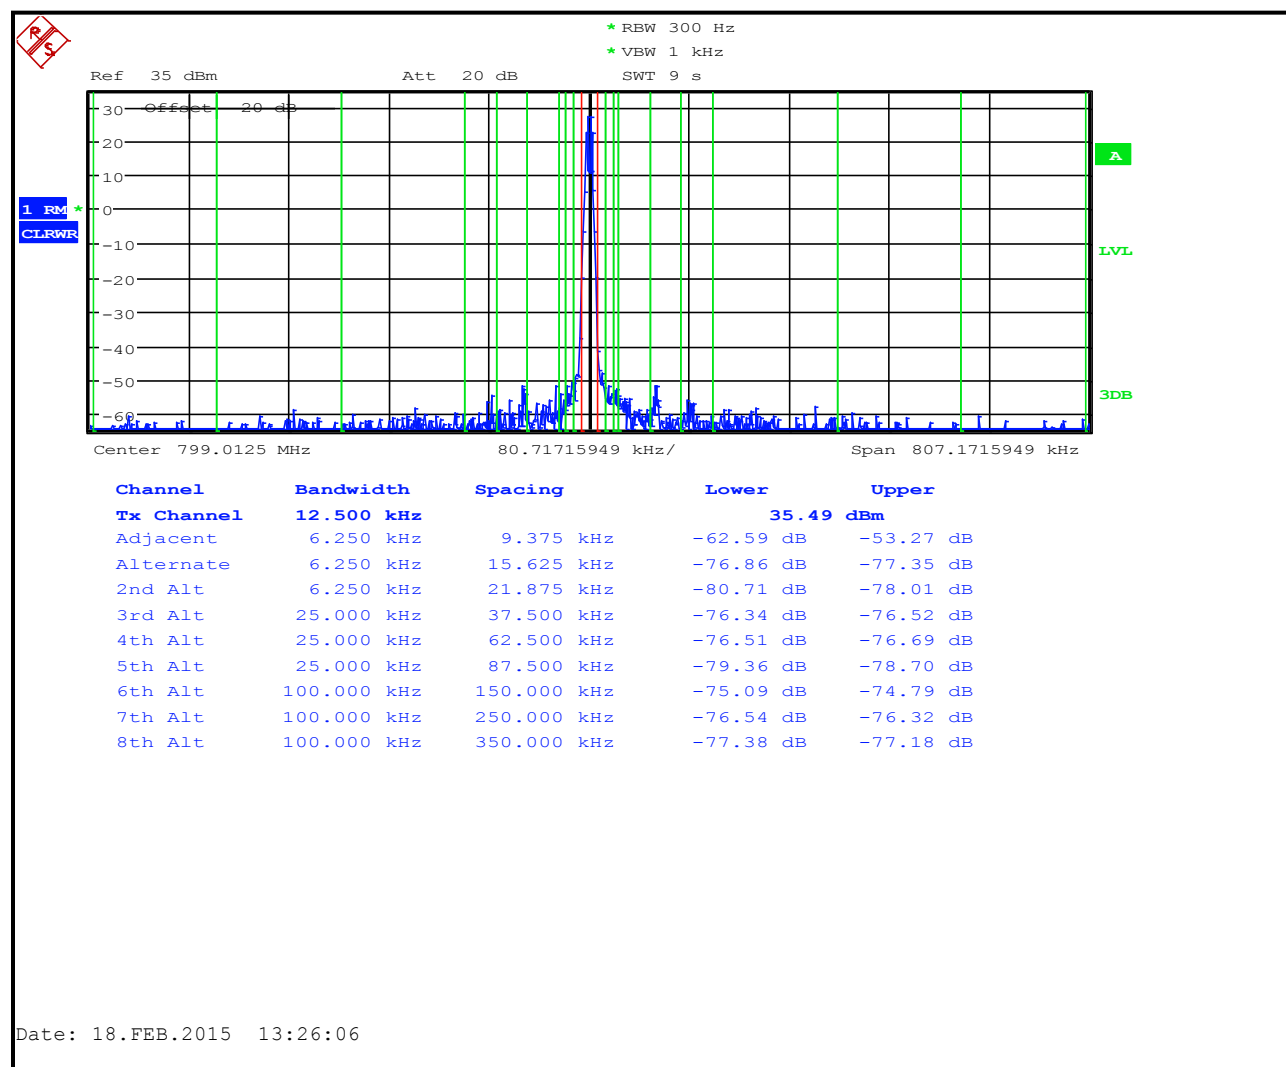


Table 6-19: Adjacent Channel Power – 799.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-85.2
12 MHz to receive band	30(s)	-75	-87.1
In receive band	30(s)	-100	-103.9

Plot 6-20: Adjacent Channel Power – 799.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

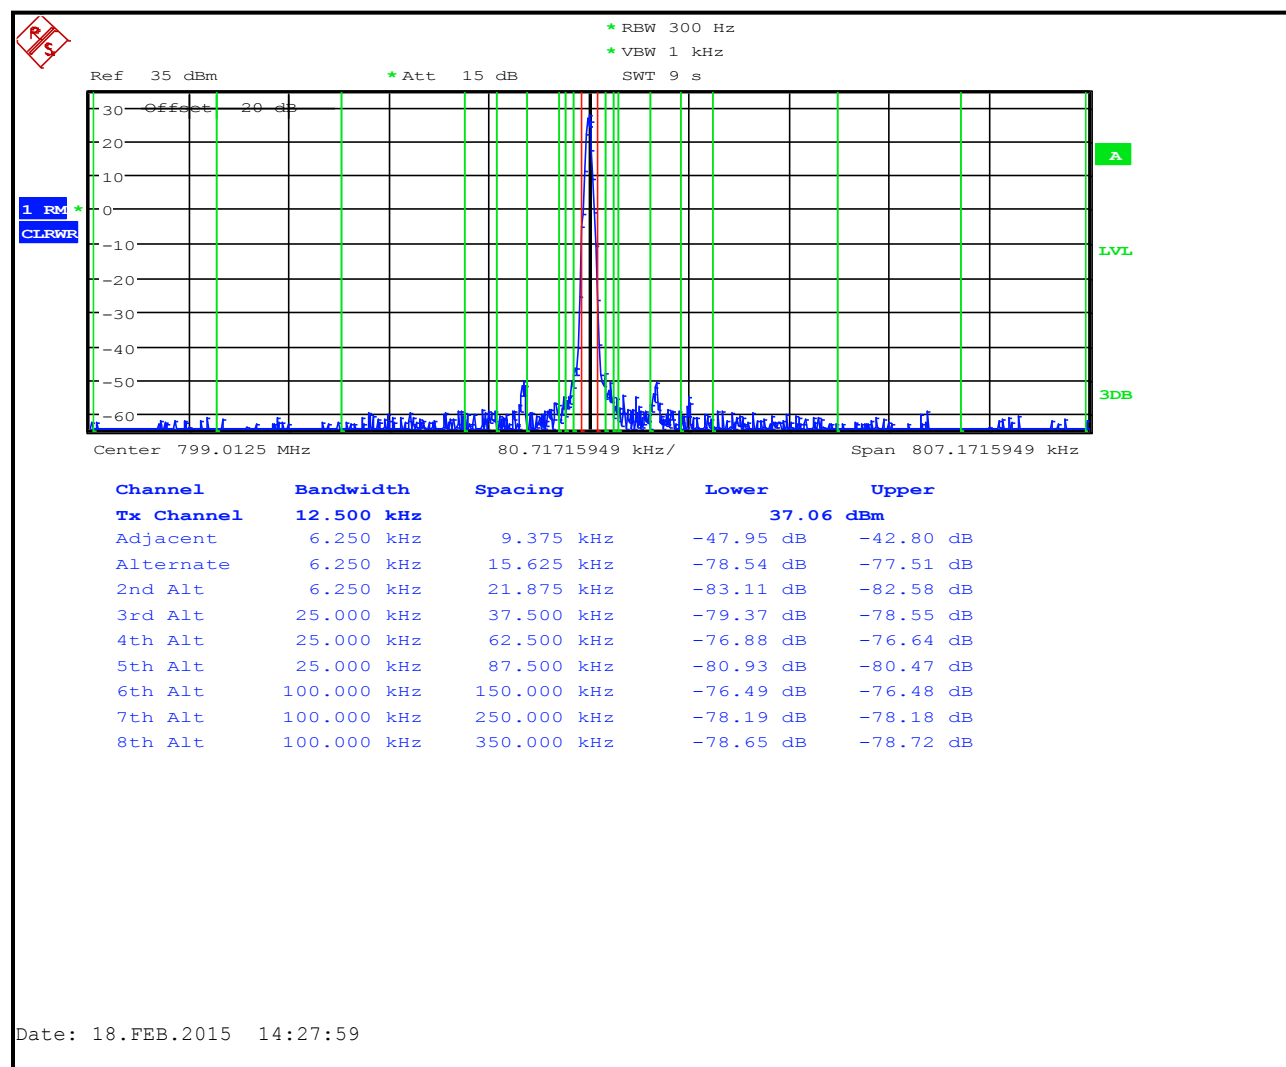


Table 6-20: Adjacent Channel Power – 799.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-84.1
12 MHz to receive band	30(s)	-75	-87.4
In receive band	30(s)	-100	-102.6

Plot 6-21: Adjacent Channel Power – 799.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

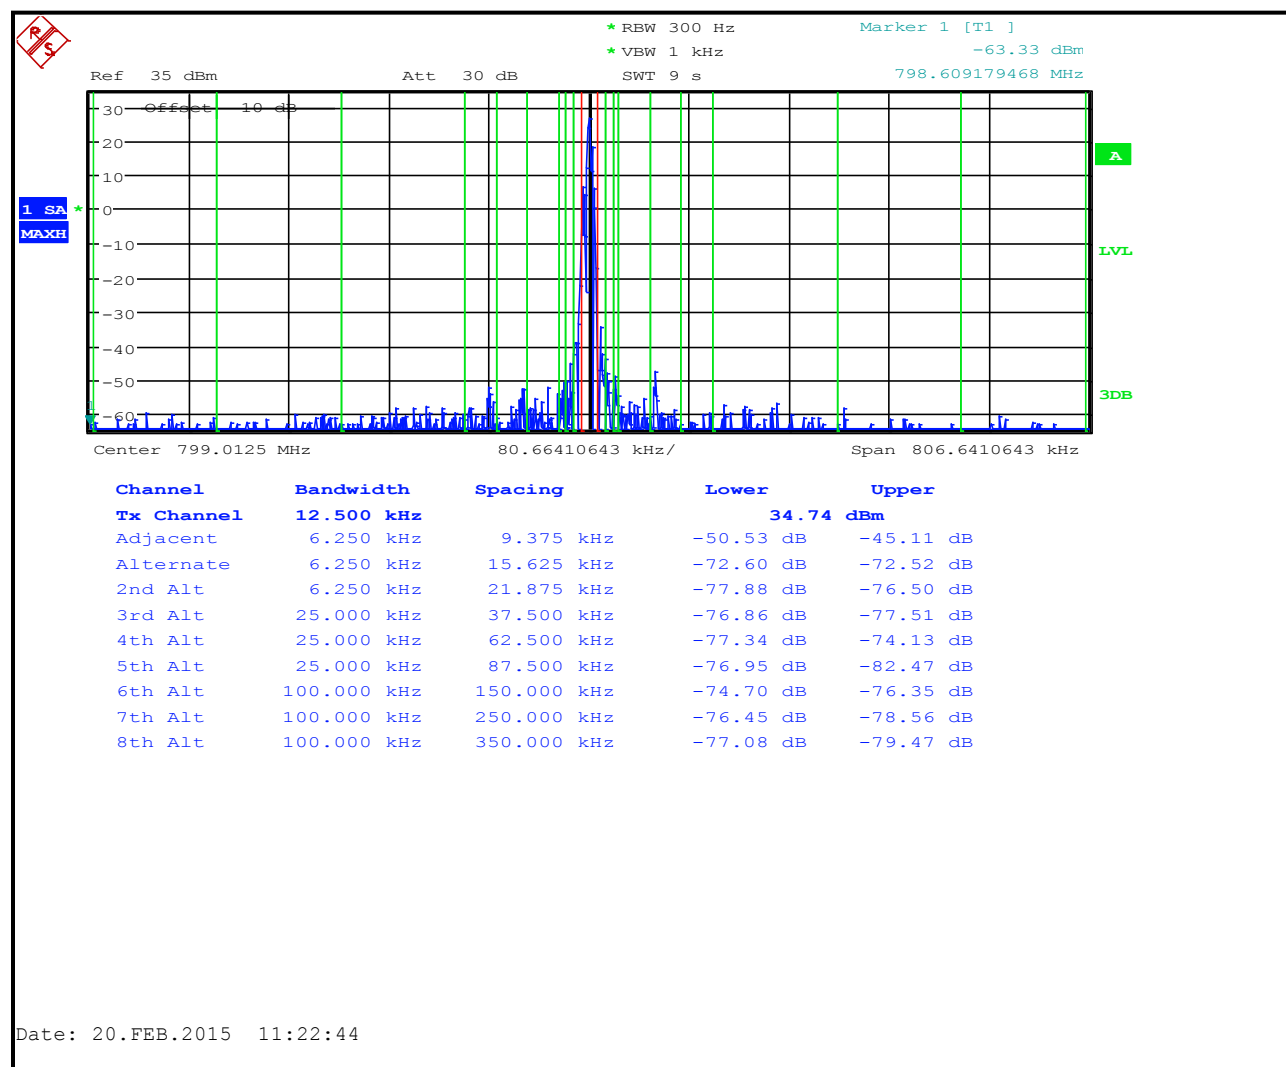


Table 6-21: Adjacent Channel Power – 799.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.8
12 MHz to receive band	30(s)	-75	-82.3
In receive band	30(s)	-100	-101.3

Plot 6-22: Adjacent Channel Power – 801.0125 MHz; Analog Mode; (9.375 kHz - 350 kHz)

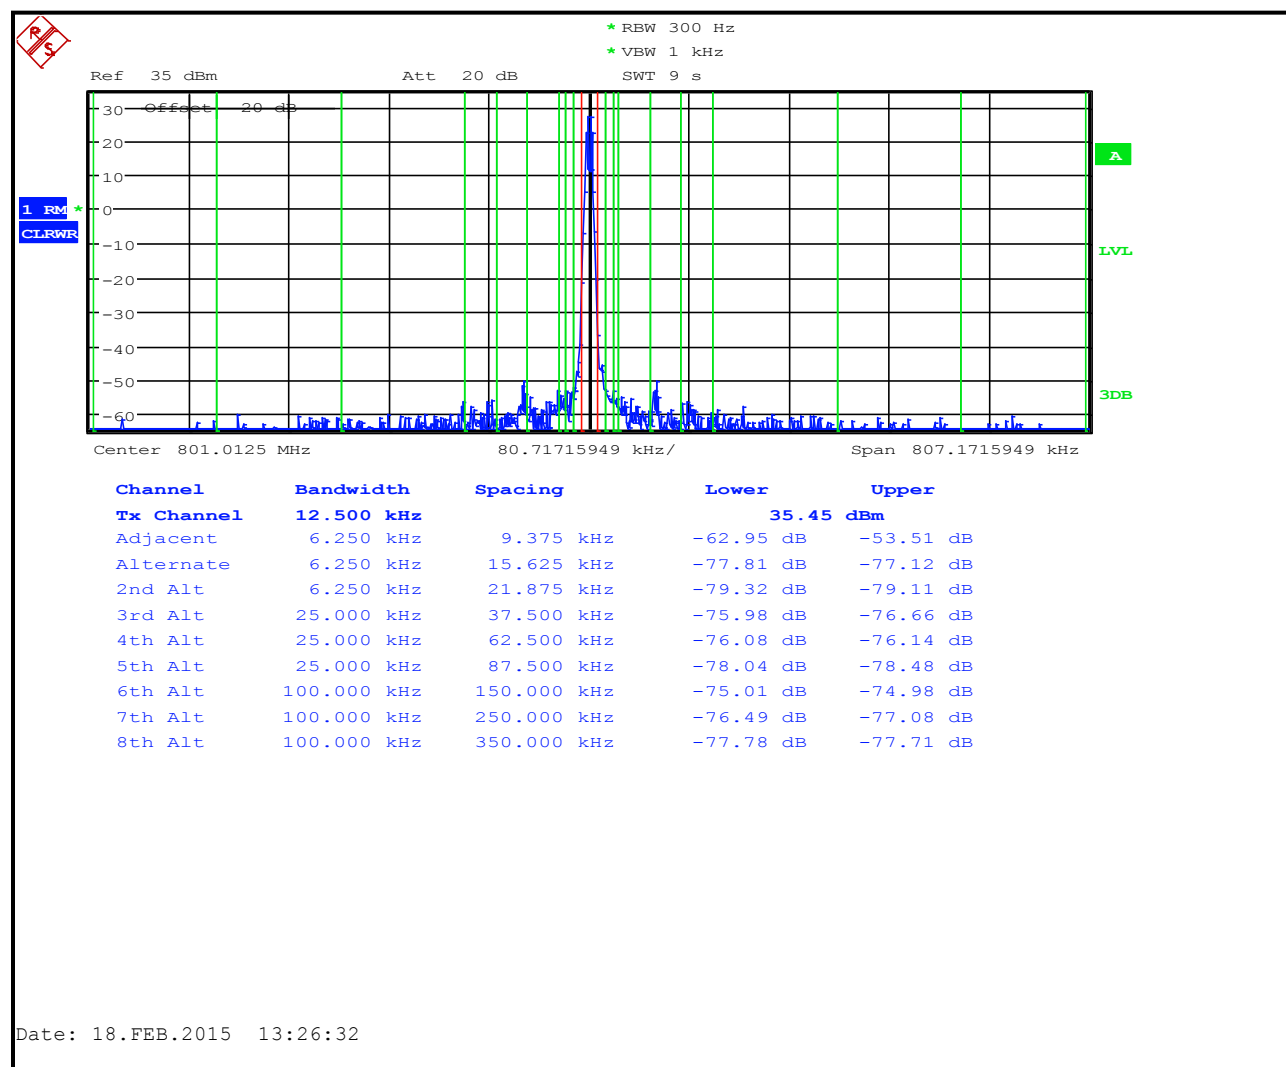


Table 6-22: Adjacent Channel Power – 801.0125 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.9
12 MHz to receive band	30(s)	-75	-88.3
In receive band	30(s)	-100	-103.1

Plot 6-23: Adjacent Channel Power – 801.0125 MHz; P25 Mode (9.375 kHz - 350 kHz)

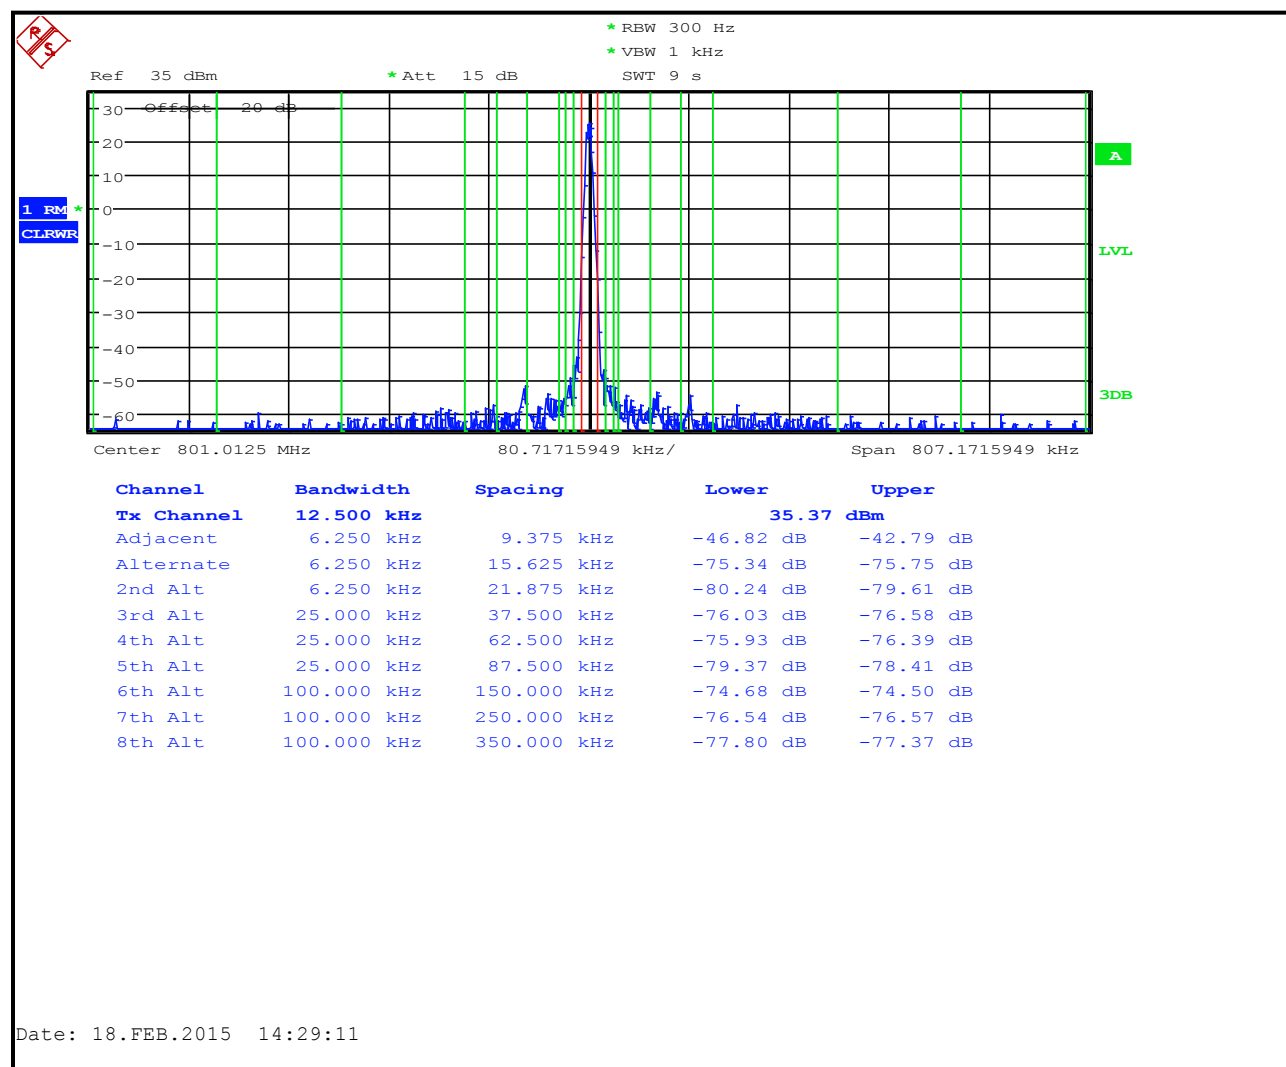


Table 6-23: Adjacent Channel Power – 801.0125 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-83.3
12 MHz to receive band	30(s)	-75	-88.5
In receive band	30(s)	-100	-103.0

Plot 6-24: Adjacent Channel Power – 801.0125 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

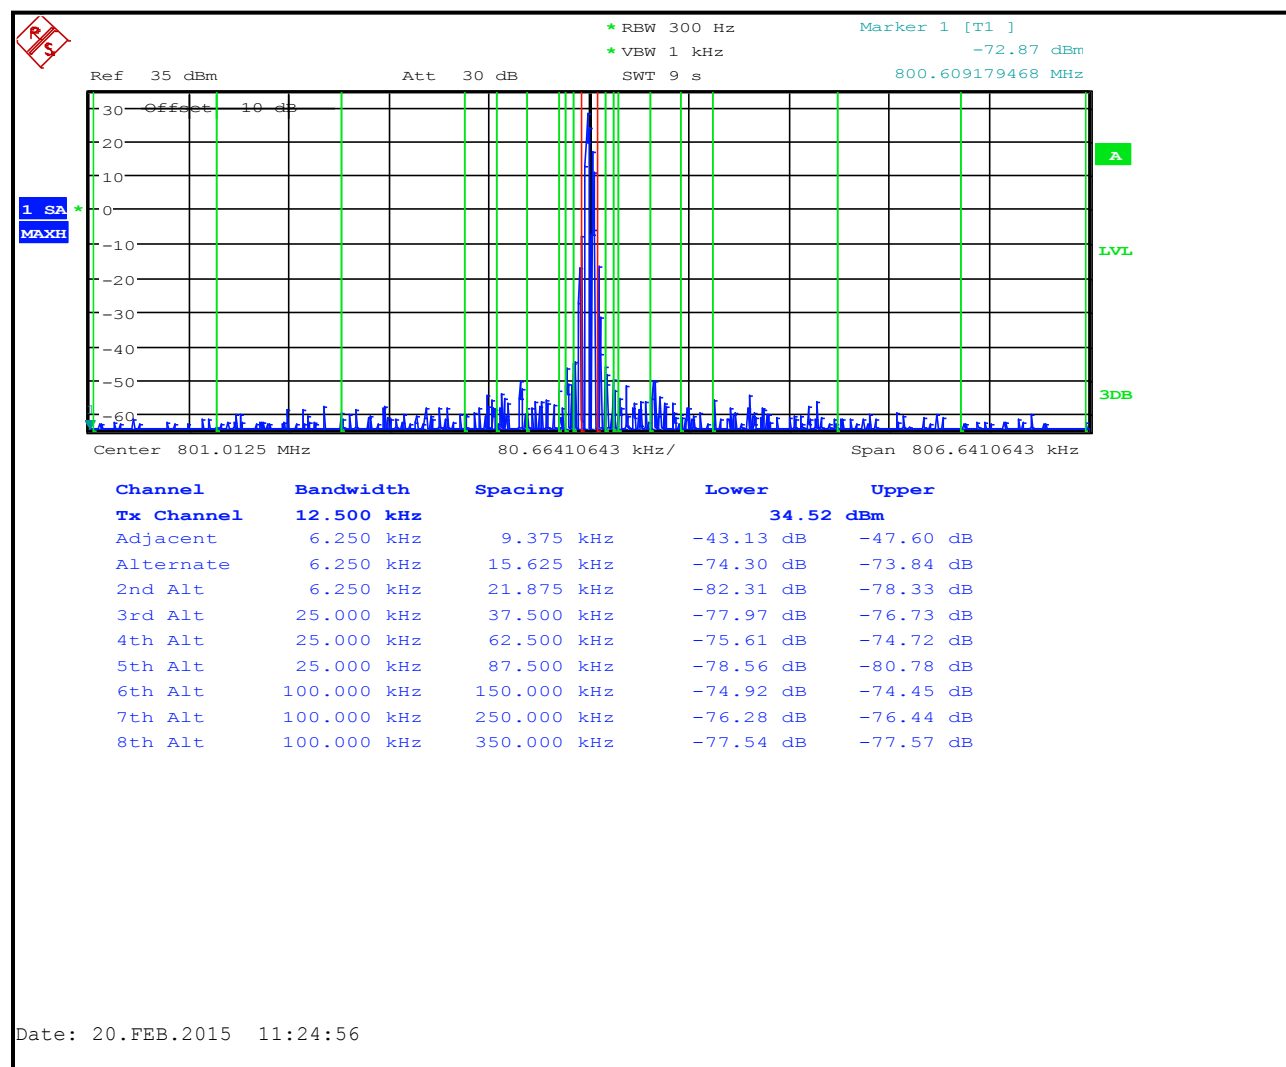


Table 6-24: Adjacent Channel Power – 801.0125 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.5
12 MHz to receive band	30(s)	-75	-80.9
In receive band	30(s)	-100	-101.1

Plot 6-25: Adjacent Channel Power - 804.9875 MHz; Analog Mode; (9.375 kHz - 350 kHz)

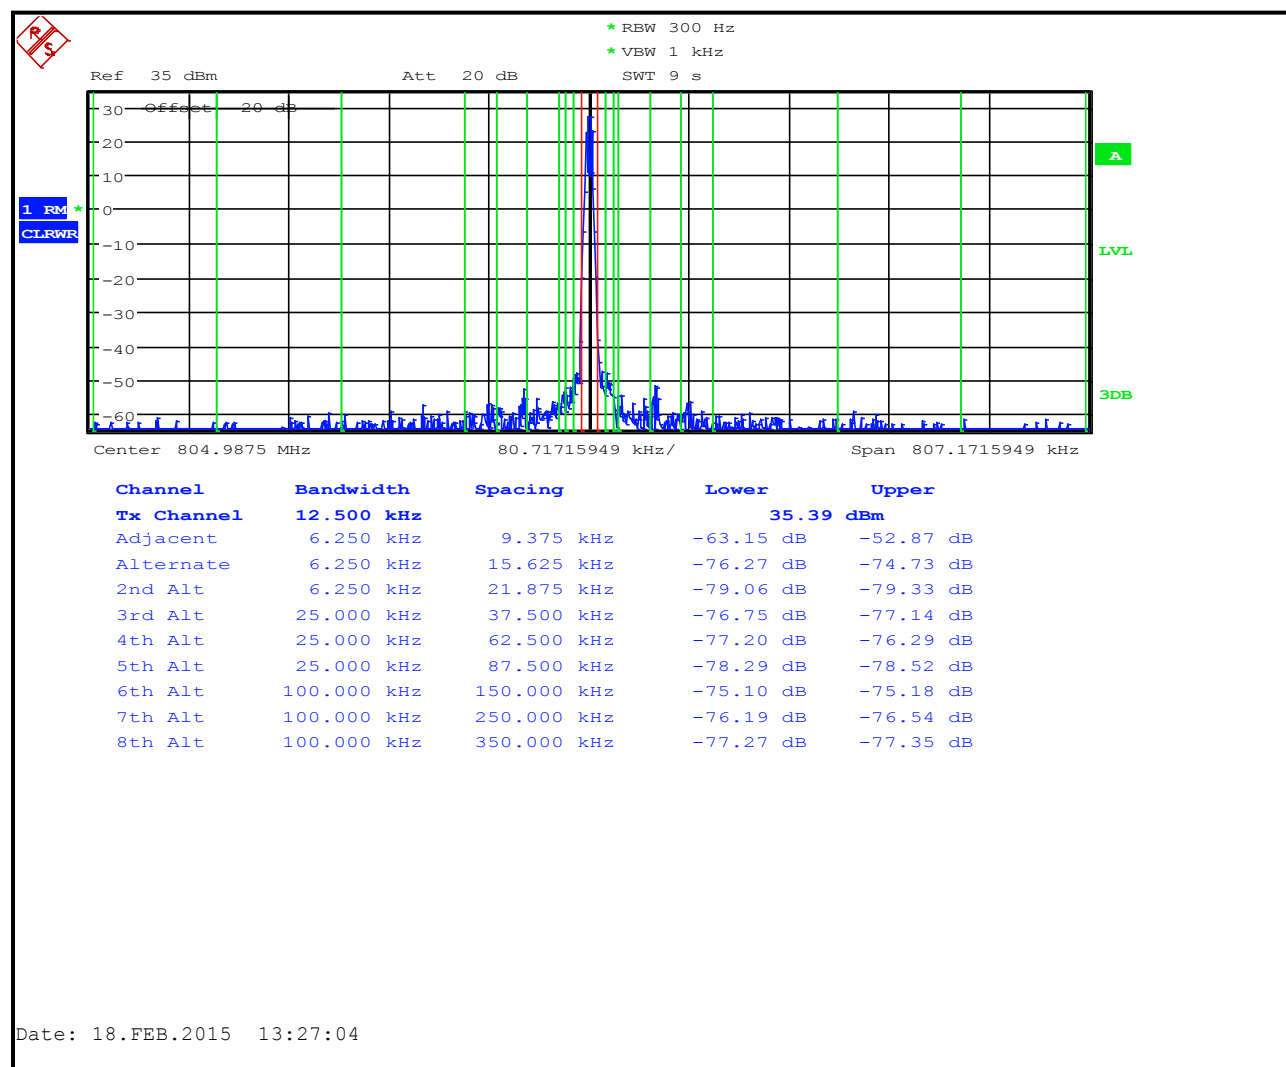


Table 6-25: Adjacent Channel Power – 804.9875 MHz; Analog Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-86.6
12 MHz to receive band	30(s)	-75	-88.3
In receive band	30(s)	-100	-102.3

Plot 6-26: Adjacent Channel Power – 804.9875 MHz; P25 Mode (9.375 kHz - 350 kHz)

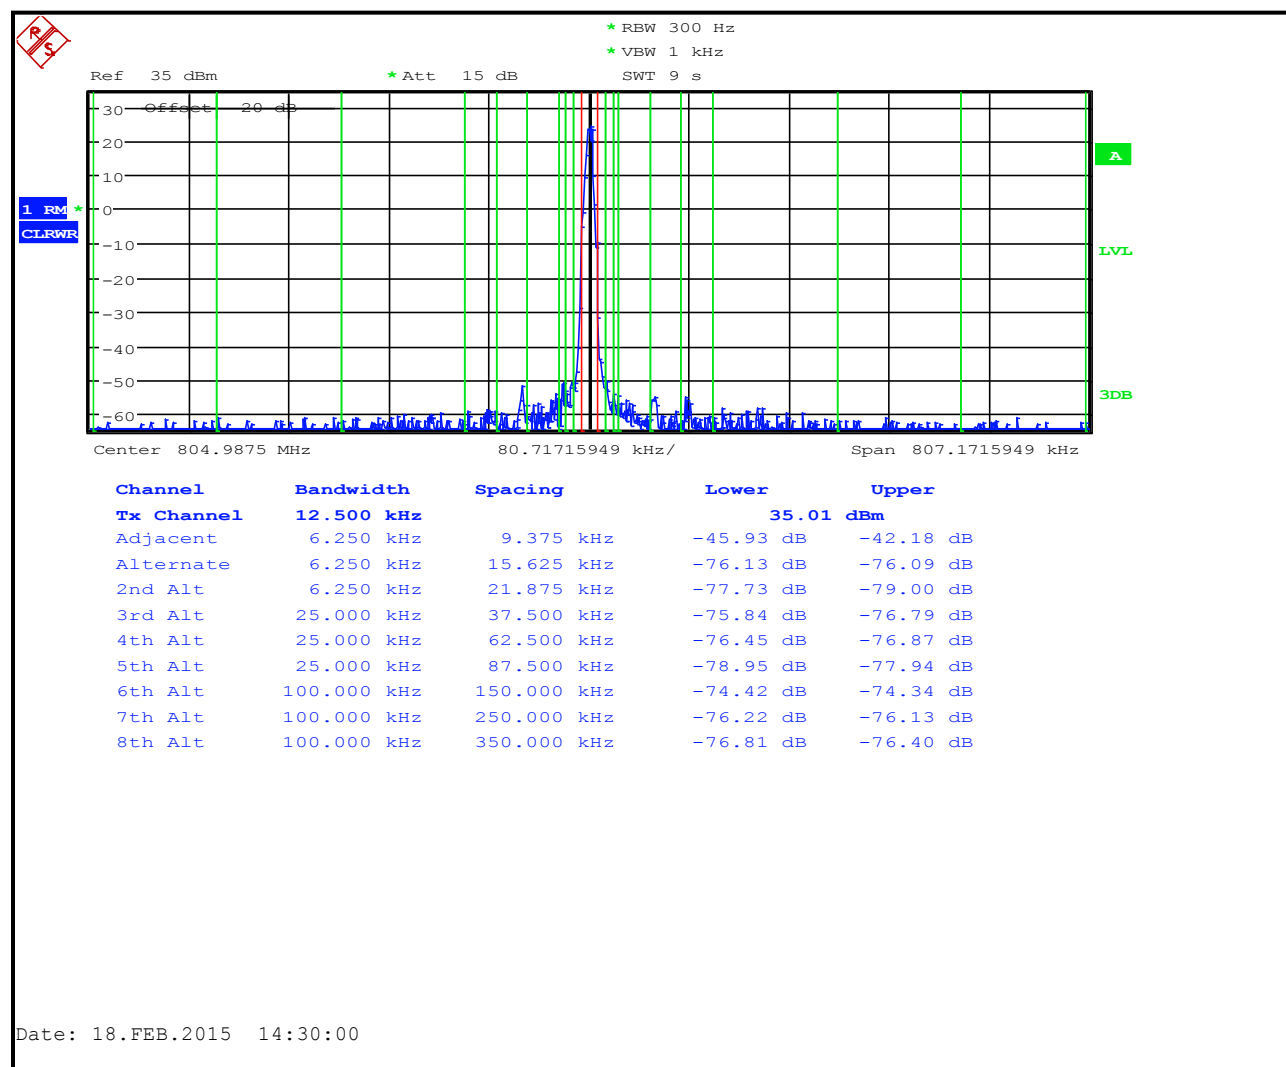


Table 6-26: Adjacent Channel Power – 804.9875 MHz; P25 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-85.9
12 MHz to receive band	30(s)	-75	-88.1
In receive band	30(s)	-100	-102.7

Plot 6-27: Adjacent Channel Power – 804.9875 MHz; P25 Phase 2 Mode (9.375 kHz - 350 kHz)

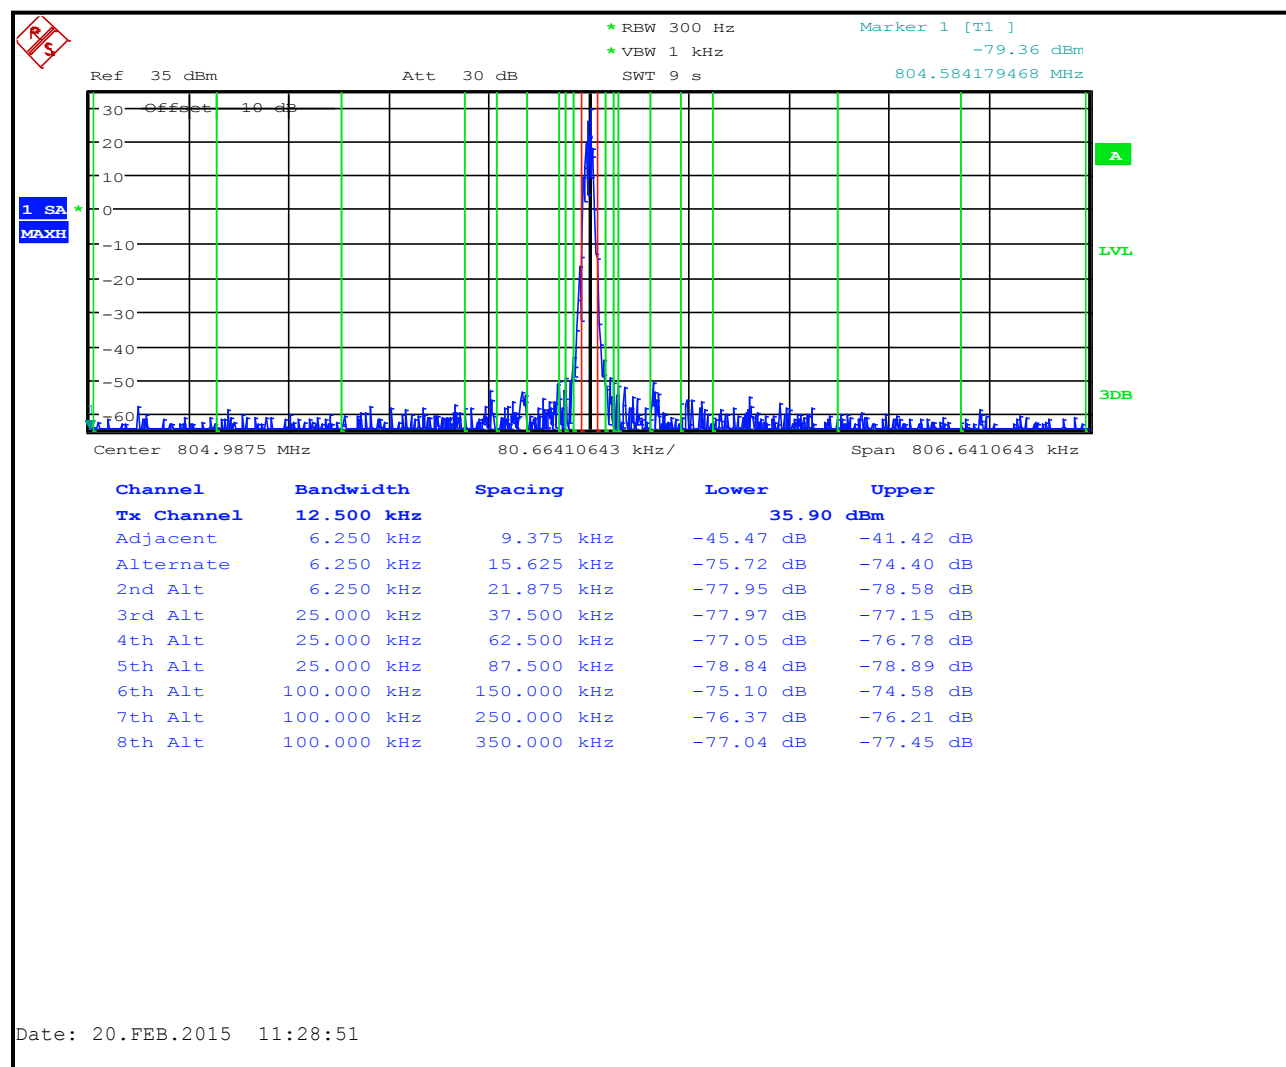


Table 6-27: Adjacent Channel Power – 804.9875 MHz; P25 Phase 2 Mode (>400 kHz - RX Band)

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Measured ACP (dBc)
>400 to 12 MHz	30(s)	-75	-81.6
12 MHz to receive band	30(s)	-75	-83.3
In receive band	30(s)	-100	-102.7

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
EUT: XG-15P 700/800 MHz
ID's: OWDTR-0134-E/3636B-0134
Standards: FCC Part 90
Report #: 2015011

Table 6-28: Test Equipment Used For Testing ACP Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	6/16/15

Test Personnel:

Daniel Baltzell		February 18-20, 2015
EMC Test Engineer	Signature	Dates of Tests

7 FCC Rules and Regulations Part 90.210(g) and Part 2.1053(a): Field Strength of Spurious Radiation; Part 90.543(f): Out of Band Emissions Limit; RSS-119 5.8.9.2 Out-of-band Emission Limit

7.1 Test Procedure

ANSI/TIA-603-2004, section 2.2.12

The device uses digital modulation modulated to its maximum extent using a pseudo-random data sequence.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBi) was added to achieve the EIRP level, then converted from the corrected signal generator level (dBm) to dBc, or dBW for 700 MHz band, and compared to the limit.

For emissions in the 1559-1610 band, Part 90.543(f) states: "For operations in the 763–775 MHz and 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation."

7.2 Test Data

Table 7-1: Field Strength of Spurious Radiation – 768.0125 MHz

Conducted Power 34.6 dBm; 2.9 W; Limit=50+10LogP=54.6 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1536.0250	36.1	-36.8	0.4	5.9	65.9	-11.3
2304.0375	43.6	-35.7	0.5	6.9	63.9	-9.3
3072.0500	27.8	-49.8	0.7	6.8	78.2	-23.6
3840.0625	17.0	-58.7	0.8	6.5	87.6	-33.0
4608.0750	7.6	-65.1	0.9	8.6	92.0	-37.4
5376.0875	-4.5	-77.6	1.0	8.2	105.1	-50.5
6144.1000	-10.2	-82.6	1.2	8.7	109.7	-55.1
6912.1125	-5.3	-76.7	1.3	9.3	103.3	-48.7
7680.1250	-8.4	-79.4	1.4	9.1	106.3	-51.7

Table 7-2: Field Strength of Spurious Radiation – 769.0125 MHz

Conducted Power 34.7 dBm; 2.9 W; Limit=50+10LogP=54.7 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1538.0250	37.8	-37.7	0.4	5.9	66.9	-12.2
2307.0375	39.7	-39.6	0.5	6.9	67.9	-13.2
3076.0500	29.8	-47.8	0.7	6.8	76.3	-21.6
3845.0625	19.9	-55.8	0.8	6.5	84.8	-30.1
4614.0750	9.7	-62.8	0.9	8.6	89.8	-35.1
5383.0875	-5.1	-77.7	1.0	8.2	105.3	-50.6
6152.1000	-10.0	-82.1	1.2	8.7	109.3	-54.6
6921.1125	-5.9	-77.3	1.3	9.3	104.0	-49.3
7690.1250	-9.9	-80.4	1.4	9.1	107.4	-52.7

Table 7-3: Field Strength of Spurious Radiation – 772.0125 MHz

Conducted Power 34.7 dBm; 3 W; Limit=50+10LogP=54.7 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1544.0250	31.4	-41.5	0.4	6.0	70.6	-15.9
2316.0375	41.2	-38.0	0.5	6.9	66.4	-11.7
3088.0500	34.4	-41.6	0.7	6.8	70.1	-15.4
3860.0625	22.0	-53.7	0.8	6.5	82.7	-28.0
4632.0750	8.8	-63.7	0.9	8.6	90.7	-36.0
5404.0875	-4.2	-76.8	1.0	8.1	104.4	-49.7
6176.1000	-8.0	-80.0	1.2	8.7	107.2	-52.5
6948.1125	-2.4	-73.8	1.3	9.4	100.4	-45.7
7720.1250	-6.8	-77.3	1.4	9.1	104.3	-49.6

Table 7-4: Field Strength of Spurious Radiation – 774.9875 MHz

Conducted Power 34.7 dBm; 3.0 W; Limit=50+10LogP=54.7 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1549.9750	29.5	-45.8	0.4	6.1	74.8	-20.1
2324.9625	39.0	-40.2	0.5	6.9	68.6	-13.9
3099.9500	32.0	-45.5	0.7	6.8	74.1	-19.4
3874.9375	22.0	-53.6	0.8	6.6	82.5	-27.8
4649.9250	9.0	-63.5	0.9	8.6	90.5	-35.8
5424.9125	-4.5	-77.1	1.1	8.1	104.7	-50.0
6199.9000	-5.5	-77.5	1.2	8.7	104.7	-50.0
6974.8875	-2.2	-73.6	1.3	9.4	100.2	-45.5
7749.8750	-7.3	-77.8	1.4	9.1	104.8	-50.1

Table 7-5: Field Strength of Spurious Radiation – 775.9875 MHz

Conducted Power 34.7 dBm; 2.9 W; Limit=50+10LogP=54.7 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1551.9750	31.6	-43.8	0.4	6.1	72.9	-18.2
2327.9625	41.5	-37.7	0.5	6.9	66.1	-11.4
3103.9500	35.5	-42.0	0.7	6.8	70.6	-15.9
3879.9375	22.2	-53.4	0.8	6.6	82.3	-27.6
4655.9250	8.4	-64.1	0.9	8.6	91.1	-36.4
5431.9125	-4.2	-76.8	1.1	8.1	104.4	-49.7
6207.9000	0.8	-71.6	1.2	8.7	98.8	-44.1
6983.8875	-1.8	-73.4	1.3	9.4	100.0	-45.3
7759.8750	-6.4	-76.9	1.4	9.1	103.9	-49.2

Table 7-6: Field Strength of Spurious Radiation – 798.0125 MHz

Conducted Power 34.7 dBm; 3.0 W; Limit=50+10LogP=54.7 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1596.0250	17.0	-58.3	0.4	6.7	86.7	-32.0
2394.0375	48.1	-32.5	0.4	6.6	61.1	-6.4
3192.0500	37.2	-41.9	0.5	6.9	70.3	-15.6
3990.0625	17.6	-59.7	0.7	6.7	88.3	-33.6
4788.0750	13.6	-60.7	0.8	7.1	89.1	-34.4
5586.0875	-0.6	-73.5	0.9	8.5	100.7	-46.0
6384.1000	4.6	-67.9	1.1	8.4	95.3	-40.6
7182.1125	2.2	-69.7	1.2	9.2	96.4	-41.7
7980.1250	4.7	-66.7	1.3	9.0	93.7	-39.0

Table 7-7: Field Strength of Spurious Radiation – 799.0125 MHz

Conducted Power 34.8 dBm; 3.0 W; Limit=50+10LogP=54.8 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1598.0250	16.5	-58.6	0.4	6.7	87.1	-32.3
2397.0375	45.3	-33.8	0.5	6.9	62.3	-7.5
3196.0500	37.5	-39.8	0.7	6.7	68.5	-13.7
3995.0625	22.2	-53.1	0.8	7.1	81.6	-26.8
4794.0750	6.8	-65.8	1.0	8.5	93.1	-38.3
5593.0875	-4.6	-77.1	1.1	8.4	104.6	-49.8
6392.1000	-10.7	-82.6	1.2	9.2	109.4	-54.6
7191.1125	-10.5	-81.9	1.3	9.0	109.1	-54.3
7990.1250	-8.0	-79.3	1.4	9.0	106.5	-51.7

Table 7-8: Field Strength of Spurious Radiation – 801.0125 MHz

Conducted Power 34.8 dBm; 3 W; Limit=50+10LogP=54.8 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1602.0250	13.3	-59.6	0.4	6.8	88.1	-33.3
2403.0375	46.9	-32.1	0.5	6.9	60.6	-5.8
3204.0500	37.9	-39.4	0.7	6.7	68.1	-13.3
4005.0625	8.2	-63.9	0.8	7.2	92.3	-37.5
4806.0750	2.8	-70.2	1.0	8.5	97.4	-42.6
5607.0875	-1.3	-74.2	1.1	8.5	101.6	-46.8
6408.1000	-11.2	-83.1	1.2	9.2	109.8	-55.0
7209.1125	-11.3	-82.7	1.3	8.9	109.9	-55.1
8010.1250	-11.3	-81.3	1.4	9.0	108.5	-53.7

Table 7-9: Field Strength of Spurious Radiation – 804.9875 MHz

Conducted Power 34.8 dBm; 3 W; Limit=20+10LogP=54.8 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1609.9750	13.9	-58.8	0.4	6.8	87.2	-32.4
2414.9625	45.9	-33.1	0.6	6.9	61.6	-6.8
3219.9500	37.2	-40.0	0.7	6.8	68.7	-13.9
4024.9375	0.4	-71.7	0.8	7.3	100.0	-45.2
4829.9250	3.1	-69.6	1.0	8.5	96.8	-42.0
5634.9125	-5.6	-78.5	1.1	8.6	105.8	-51.0
6439.9000	-8.6	-80.8	1.2	9.3	107.5	-52.7
7244.8875	-3.5	-74.9	1.3	8.7	102.3	-47.5
8049.8750	-7.1	-75.4	1.5	9.0	102.7	-47.9

Table 7-10: Field Strength of Spurious Radiation – 806.0125 MHz

Conducted Power 35.3 dBm; 3.4 W; Limit=43+10LogP=48.3 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1612.0250	38.3	-36.9	0.4	6.8	65.8	-17.5
2418.0375	51.6	-27.4	0.6	6.9	56.4	-8.1
3224.0500	40.8	-36.4	0.7	6.8	65.6	-17.3
4030.0625	27.2	-44.9	0.8	7.3	73.7	-25.4
4836.0750	29.8	-42.9	1.0	8.5	70.6	-22.3
5642.0875	21.0	-51.9	1.1	8.6	79.7	-31.4
6448.1000	22.1	-49.7	1.2	9.3	76.9	-28.6
7254.1125	13.4	-58.0	1.3	8.7	85.9	-37.6
8060.1250	5.6	-62.3	1.5	9.0	90.1	-41.8

Table 7-11: Field Strength of Spurious Radiation – 811.0125MHz

Conducted Power 35.3 dBm; 3.4 W; Limit=43+10LogP=48.3 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1622.0250	41.5	-31.1	0.4	6.9	59.9	-11.6
2433.0375	53.4	-25.6	0.6	6.9	54.6	-6.3
3244.0500	39.2	-37.9	0.7	6.8	67.1	-18.8
4055.0625	17.5	-54.3	0.8	7.5	83.0	-34.7
4866.0750	15.3	-57.4	1.0	8.5	85.1	-36.8
5677.0875	15.7	-56.7	1.1	8.7	84.4	-36.1
6488.1000	20.1	-51.7	1.2	9.4	78.8	-30.5
7299.1125	10.4	-60.9	1.3	8.5	89.0	-40.7
8110.1250	7.4	-58.4	1.5	9.0	86.2	-37.9

Table 7-12: Field Strength of Spurious Radiation – 815.9875 MHz

Conducted Power 35.2 dBm; 3.3 W; Limit=43+10LogP=48.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1631.9750	41.8	-30.8	0.4	7.0	59.5	-11.3
2447.9625	52.9	-26.0	0.6	6.9	54.9	-6.7
3263.9500	39.4	-37.7	0.7	6.8	66.8	-18.6
4079.9375	18.2	-53.6	0.8	7.6	82.1	-33.9
4895.9250	17.1	-55.7	1.0	8.5	83.3	-35.1
5711.9125	15.0	-57.4	1.1	8.8	84.9	-36.7
6527.9000	21.6	-50.2	1.2	9.4	77.2	-29.0
7343.8875	8.3	-62.6	1.3	8.5	90.6	-42.4
8159.8750	9.1	-54.7	1.5	9.0	82.3	-34.1

Table 7-13: Field Strength of Spurious Radiation – 851.0125 MHz

Conducted Power 35.2 dBm; 3.3 W; Limit=43+10LogP=48.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1702.0250	45.8	-26.7	0.4	7.4	54.9	-6.7
2553.0375	43.6	-35.2	0.6	7.0	64.0	-15.8
3404.0500	32.9	-43.9	0.7	7.1	72.7	-24.5
4255.0625	16.5	-55.6	0.9	8.3	83.3	-35.1
5106.0750	14.1	-58.7	1.0	8.3	86.6	-38.4
5957.0875	13.4	-59.2	1.1	8.9	86.6	-38.4
6808.1000	17.8	-54.0	1.3	9.2	81.2	-33.0
7659.1125	4.6	-66.4	1.4	9.0	94.0	-45.8
8510.1250	4.4	-58.6	1.5	8.9	86.4	-38.2

Table 7-14: Field Strength of Spurious Radiation – 856.0125 MHz

Conducted Power 35.2 dBm; 3.3 W; Limit=43+10LogP=48.2 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1712.0250	45.5	-27.0	0.4	7.4	55.2	-7.0
2568.0375	41.4	-37.3	0.6	7.0	66.1	-17.9
3424.0500	34.5	-42.3	0.7	7.1	71.1	-22.9
4280.0625	20.4	-51.7	0.9	8.4	79.4	-31.2
5136.0750	9.2	-63.6	1.0	8.3	91.5	-43.3
5992.0875	-0.6	-73.1	1.1	8.8	100.6	-52.4
6848.1000	7.4	-64.4	1.3	9.3	91.6	-43.4
7704.1125	2.5	-68.0	1.4	9.1	95.5	-47.3
8560.1250	4.5	-58.6	1.5	9.0	86.4	-38.2

Table 7-15: Field Strength of Spurious Radiation – 860.9875 MHz

Conducted Power 35.1 dBm; 3.2 W; Limit=43+10LogP=48.1 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1721.9750	48.9	-26.0	0.4	7.5	54.1	-6.0
2582.9625	44.4	-34.3	0.6	6.9	63.0	-14.9
3443.9500	29.3	-47.4	0.7	7.1	76.1	-28.0
4304.9375	18.7	-53.7	0.9	8.4	81.2	-33.1
5165.9250	10.2	-62.6	1.0	8.2	90.5	-42.4
6026.9125	-1.5	-74.0	1.1	8.8	101.5	-53.4
6887.9000	5.9	-65.6	1.3	9.3	92.7	-44.6
7748.8875	5.9	-65.2	1.4	9.1	92.6	-44.5
8609.8750	2.9	-60.4	1.5	9.0	88.1	-40.0

Table 7-16: Part 90.543(f): Out of Band Emissions Limit

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBW)	Limit (dBW)	Margin (dB)
1596.0250	17.0	-58.3	0.4	6.7	-82.0	-70.0	-12.0
1598.0250	16.5	-58.6	0.4	6.7	-82.3	-70.0	-12.3
1602.0250	13.3	-59.6	0.4	6.8	-83.3	-70.0	-13.3
1609.9750	13.9	-58.8	0.4	6.8	-82.4	-70.0	-12.4

Table 7-17: Test Equipment Used For Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	9/5/15
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	9/3/15
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/3/15
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/3/15
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	6/11/17
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	4/20/15
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/20/15
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866	3/20/15
901629	Teledyne Cougar	A4C2123	Amplifier	003-003	9/5/15
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/14/15

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

February 26-March 3, 2015
Dates of Tests

8 FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; RSS-119 5.5 Channel Spacing, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks

Occupied Bandwidth - Compliance with the Emission Masks

8.1 Test Procedure

ANSI/TIA/EIA-603-2004, section 2.2.11 and TIA/EIA-102.CAAA-2002 section 2.2.5

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

Applicable Emission Masks		
Frequency Band (MHz)	Mask for Equipment With Audio Low Pass Filter	Mask for Equipment Without Audio Low Pass Filter
Below 25 ¹	A or B	A or C
25–50.....	B	C
72–76.....	B	C
150–174 ²	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512 ²	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869 ³	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990 MHz	L or M	L or M
5850–5925 ⁴		
All other bands	B	C

¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.


² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.

³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691.


⁴ DSRCS Roadside Unit equipment in the 5850–5925 MHz band is governed under subpart M of this part.

8.2 Test Data


Plot 8-1: Occupied Bandwidth – 806.0125 MHz; Wideband Analog; Mask B

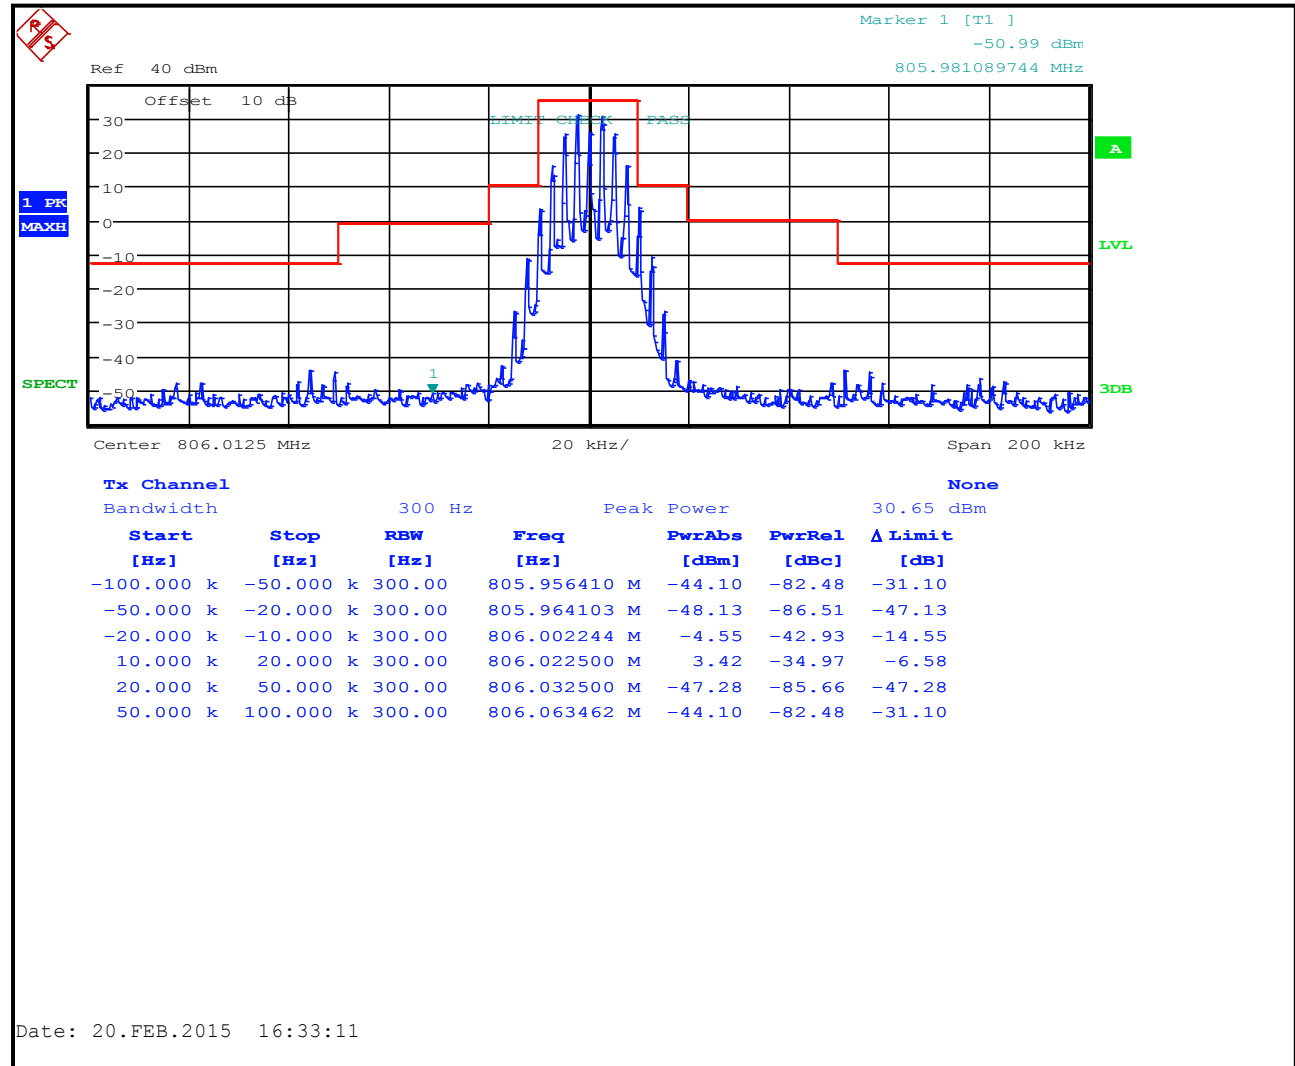


Plot 8-2: Occupied Bandwidth – 811.0125 MHz; Wideband Analog; Mask B

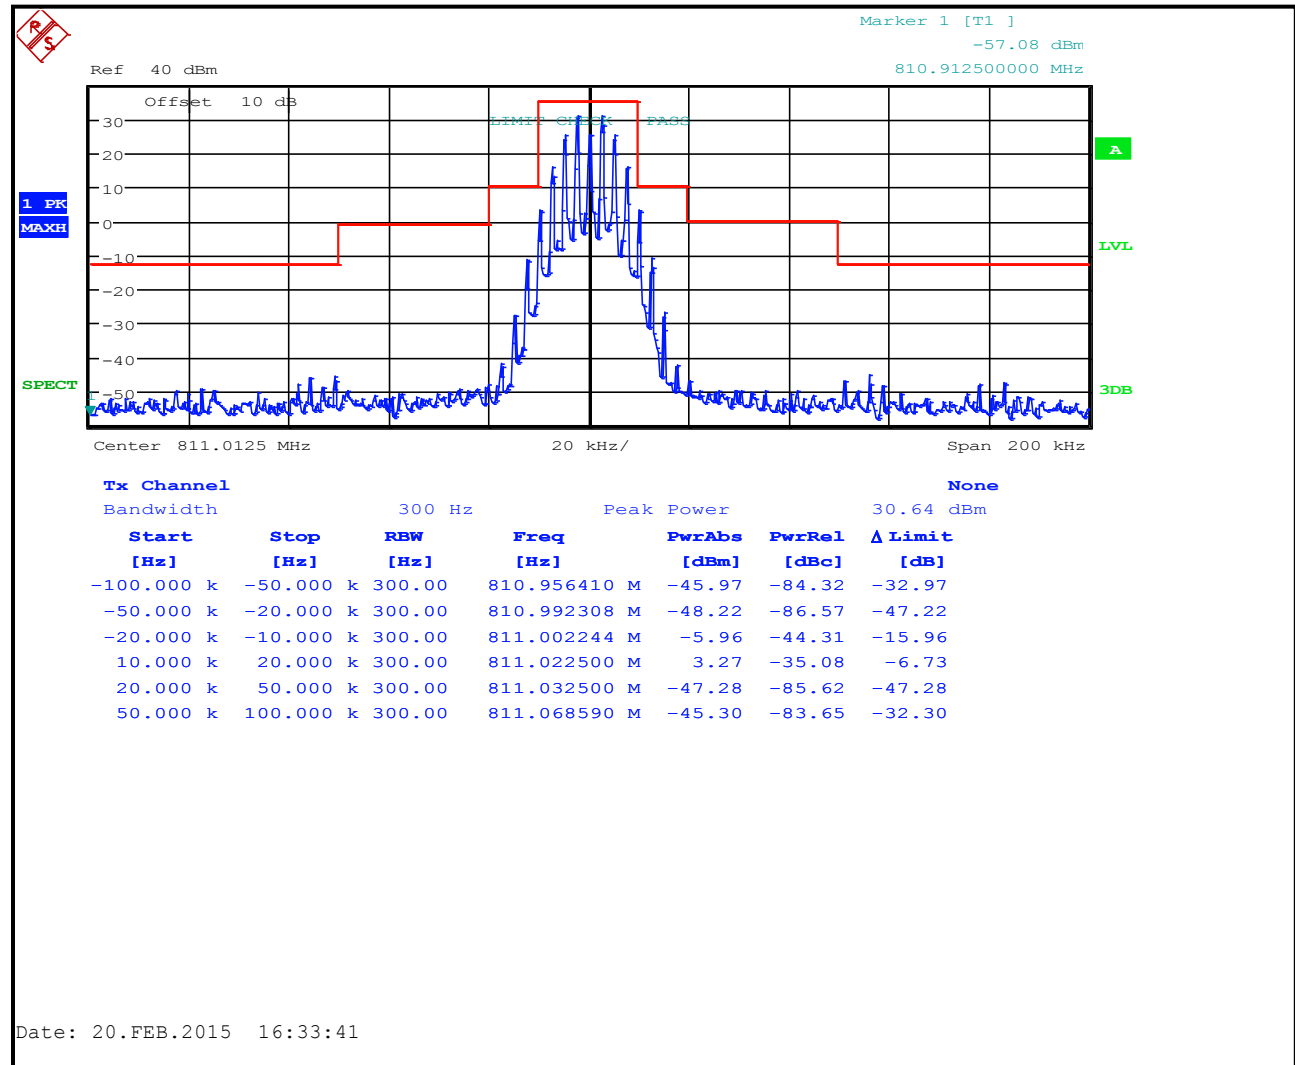


Plot 8-3: Occupied Bandwidth – 815.9875 MHz; Wideband Analog; Mask B

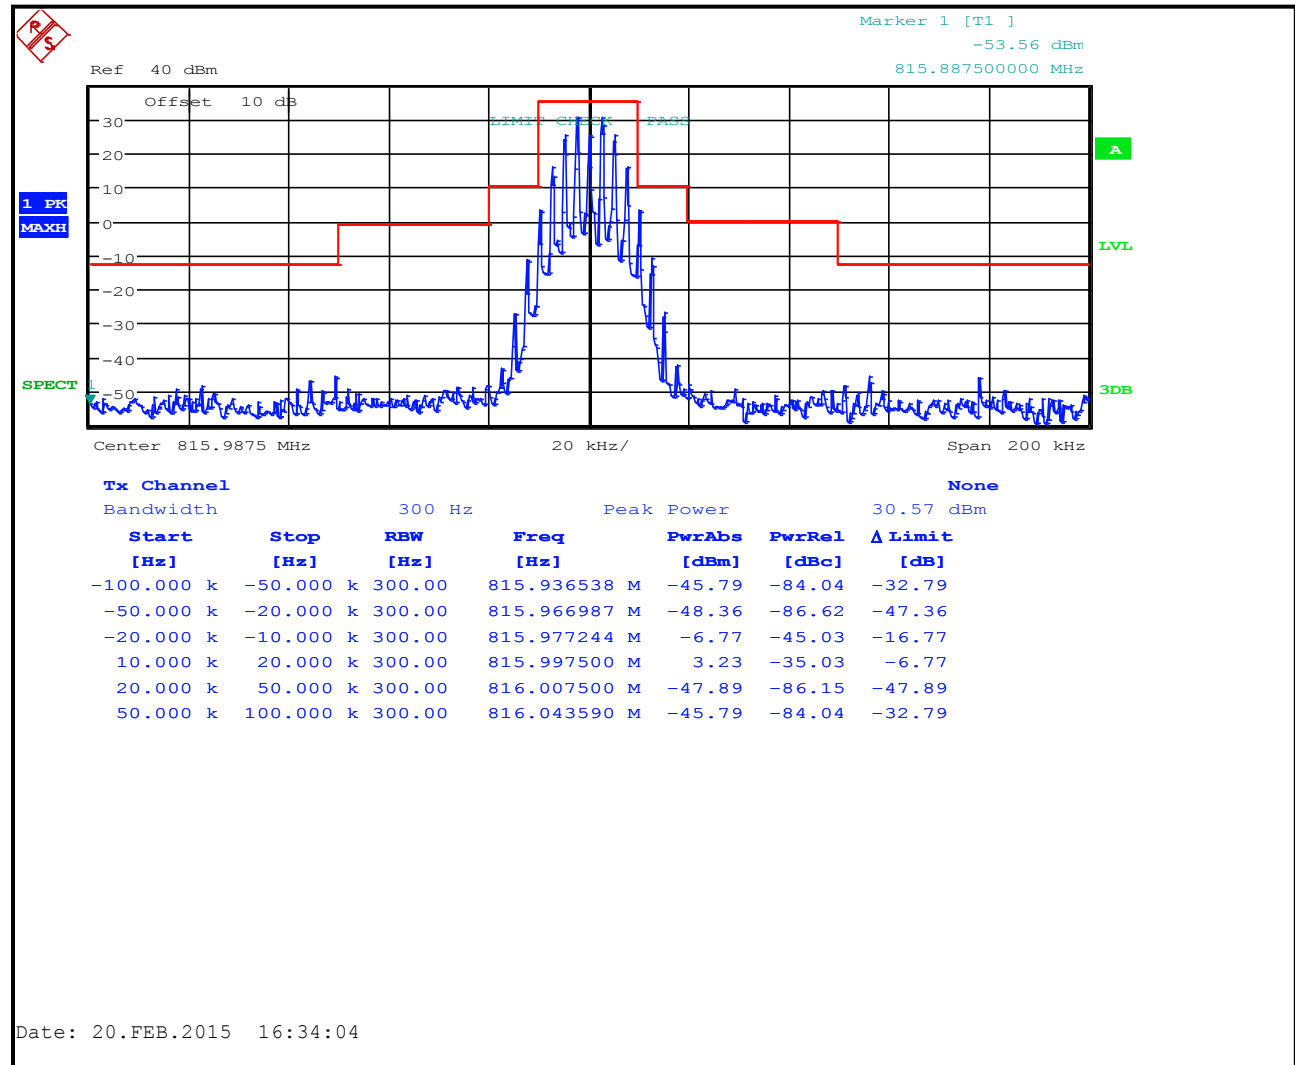


Plot 8-4: Occupied Bandwidth – 851.0125 MHz; Wideband Analog; Mask B

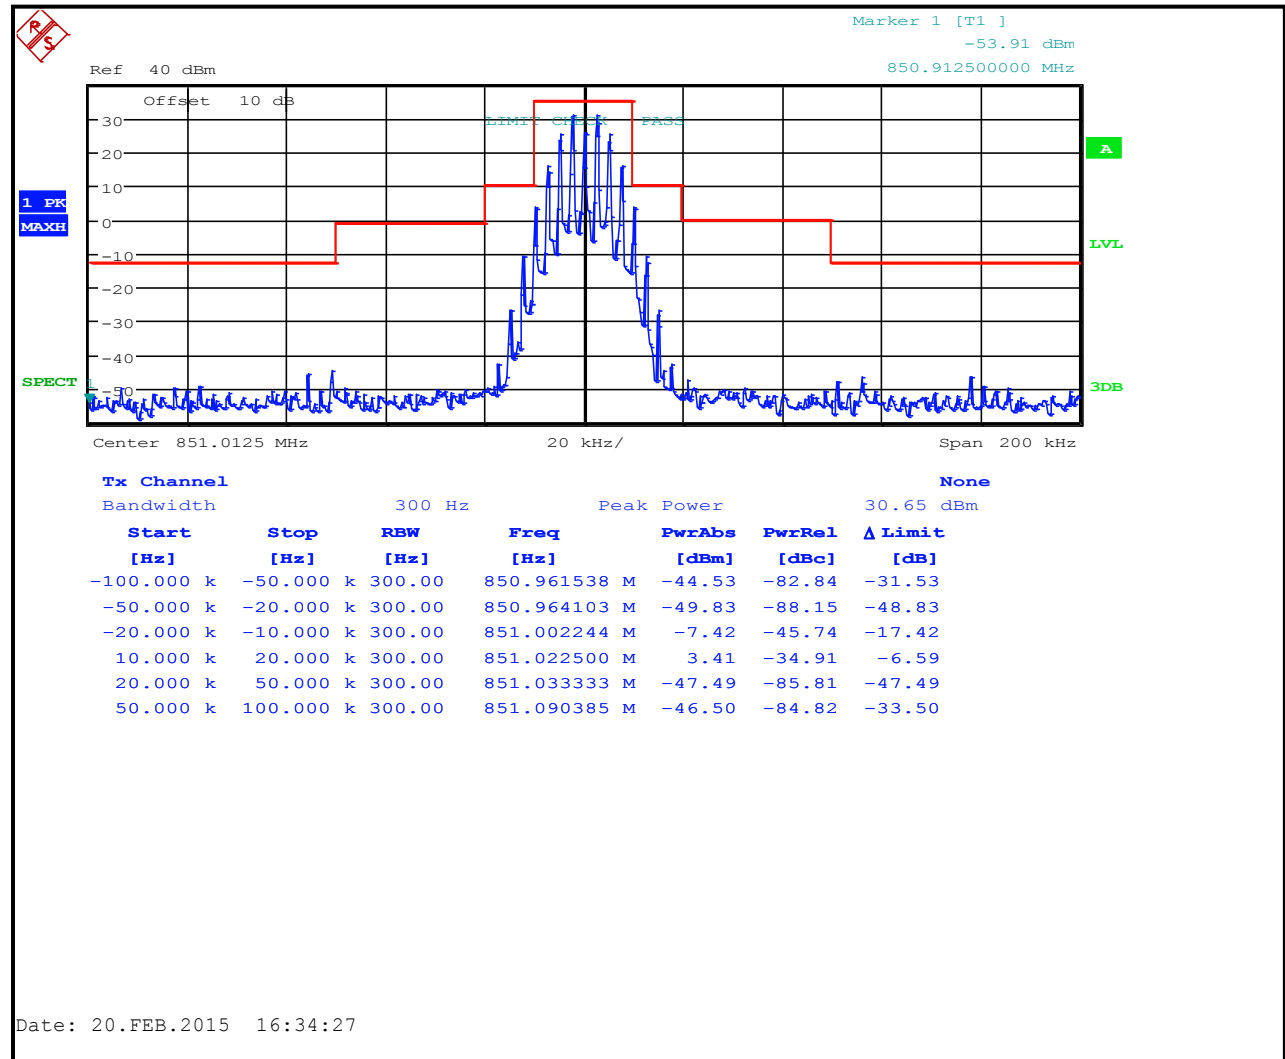


Plot 8-5: Occupied Bandwidth – 856.0125 MHz; Wideband Analog; Mask B

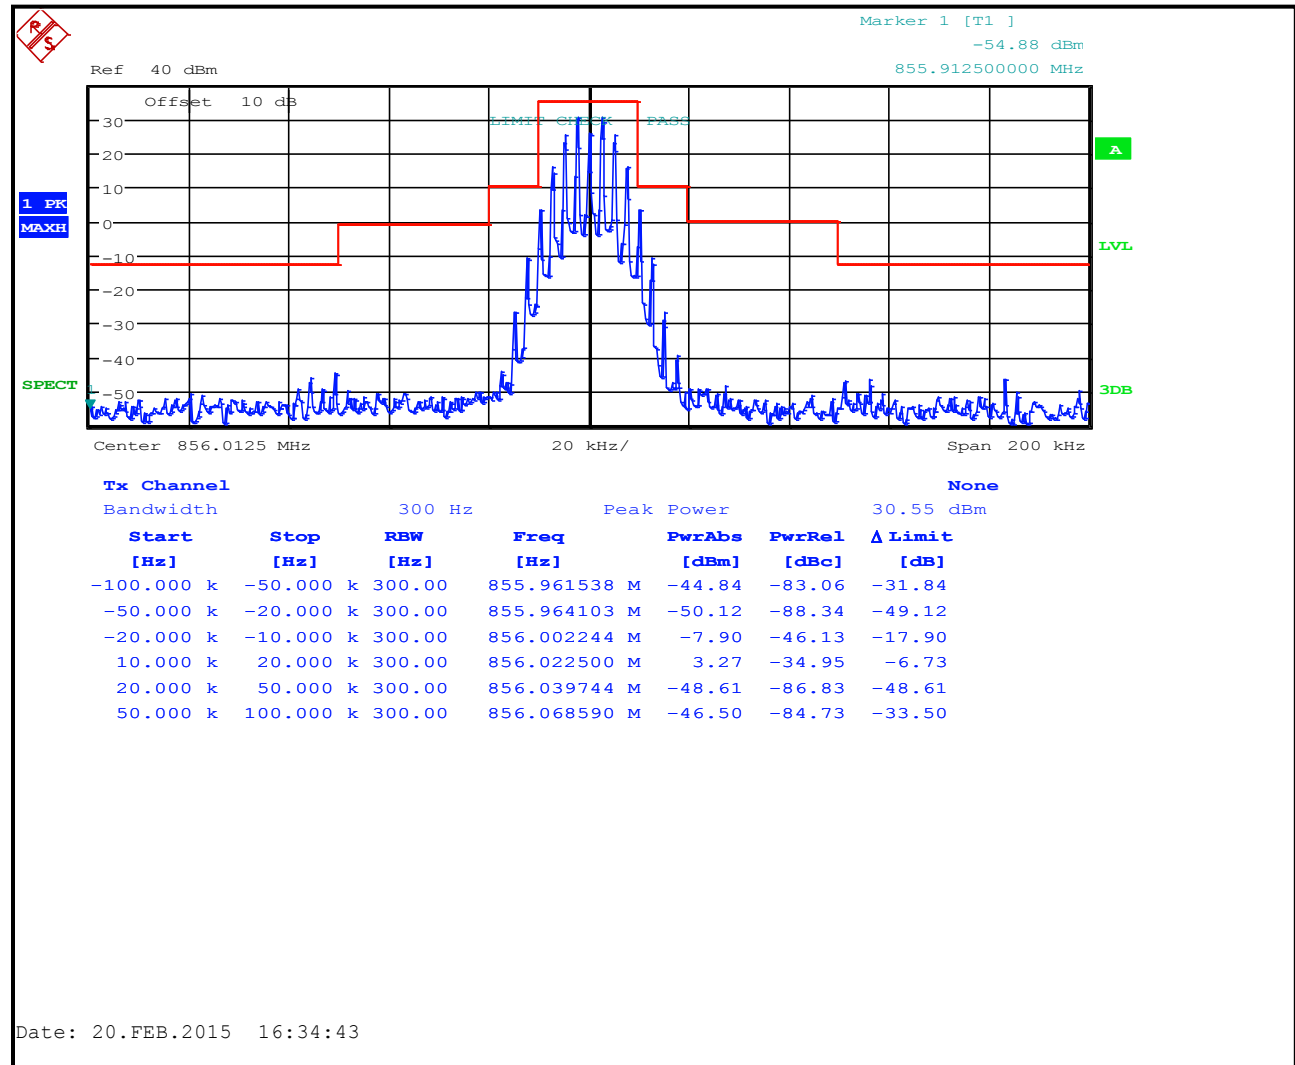


Plot 8-6: Occupied Bandwidth – 860.9875 MHz; Wideband Analog; Mask B

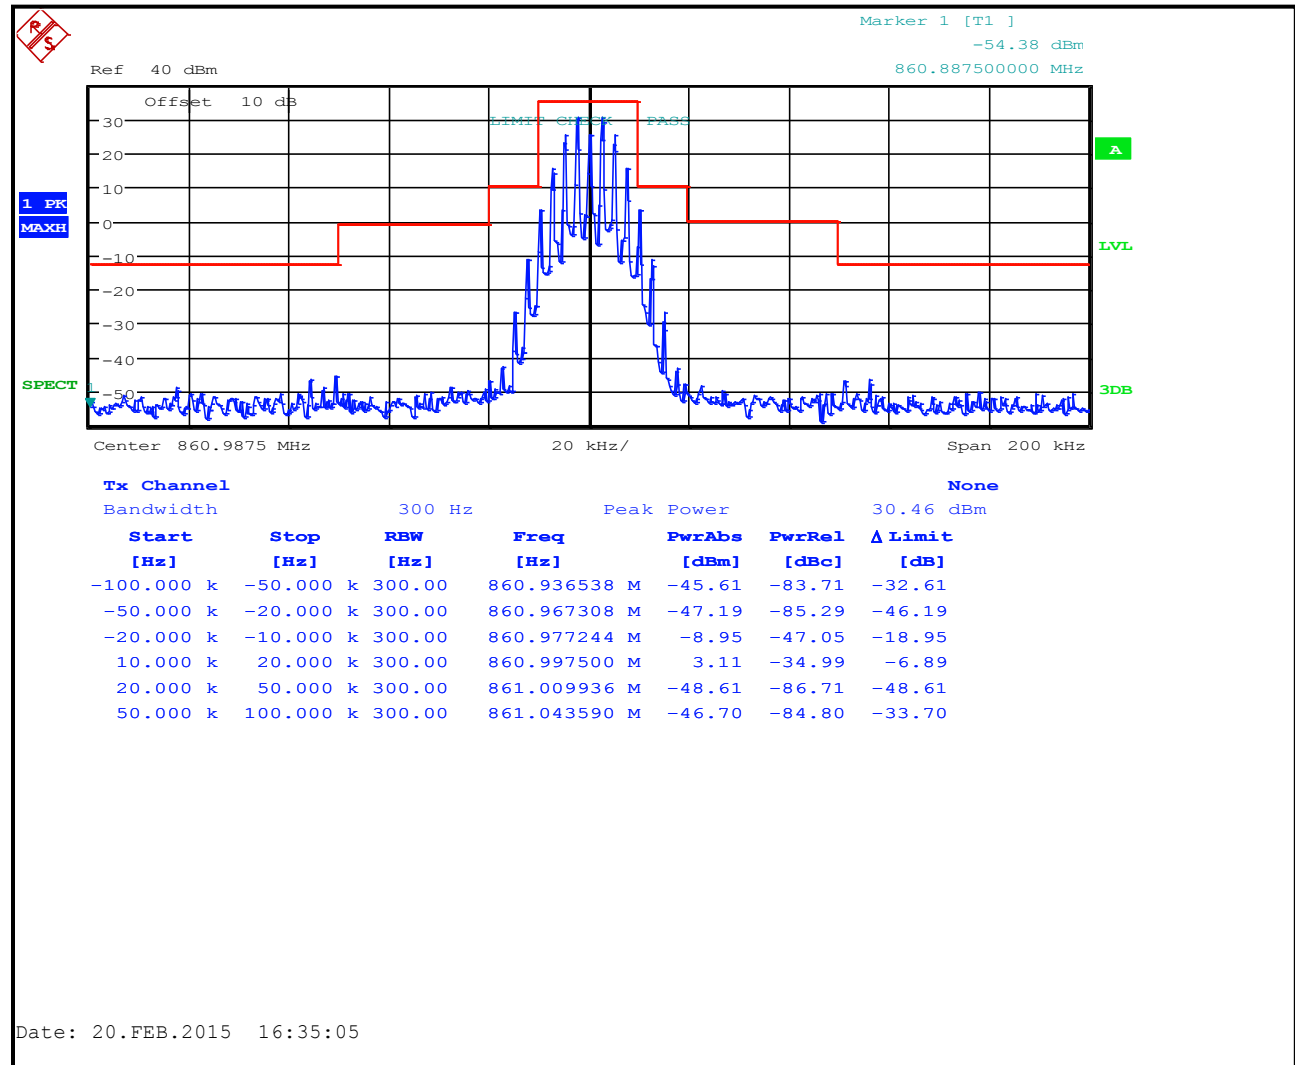


Plot 8-7: Occupied Bandwidth – 806.0125 MHz; Analog NPSPAC; Mask B

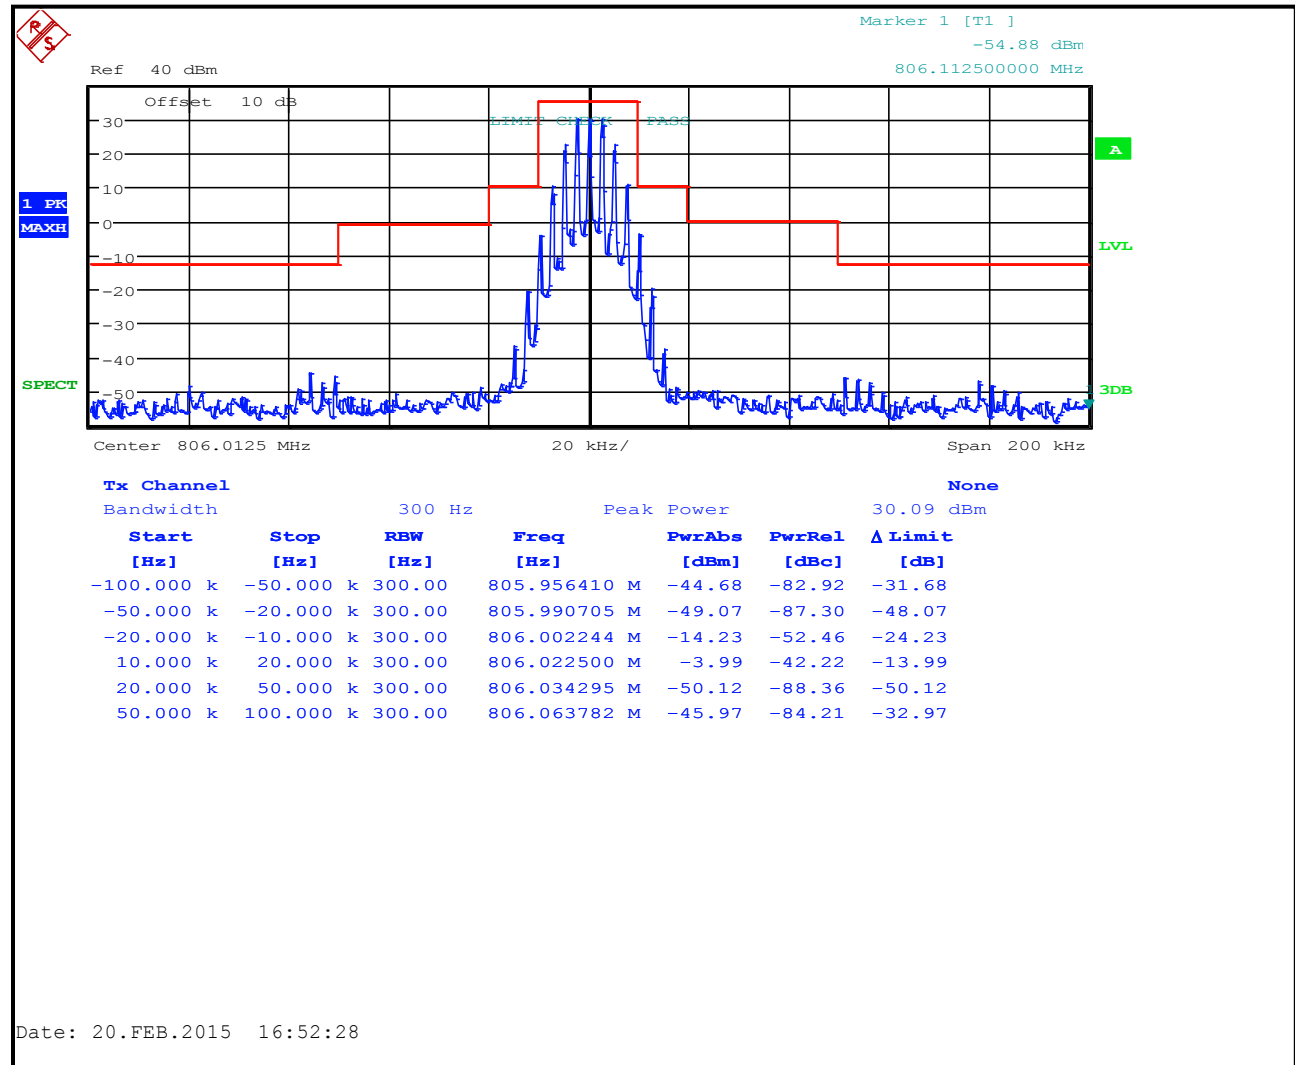


Plot 8-8: Occupied Bandwidth – 811.0125 MHz; Analog NPSPAC; Mask B

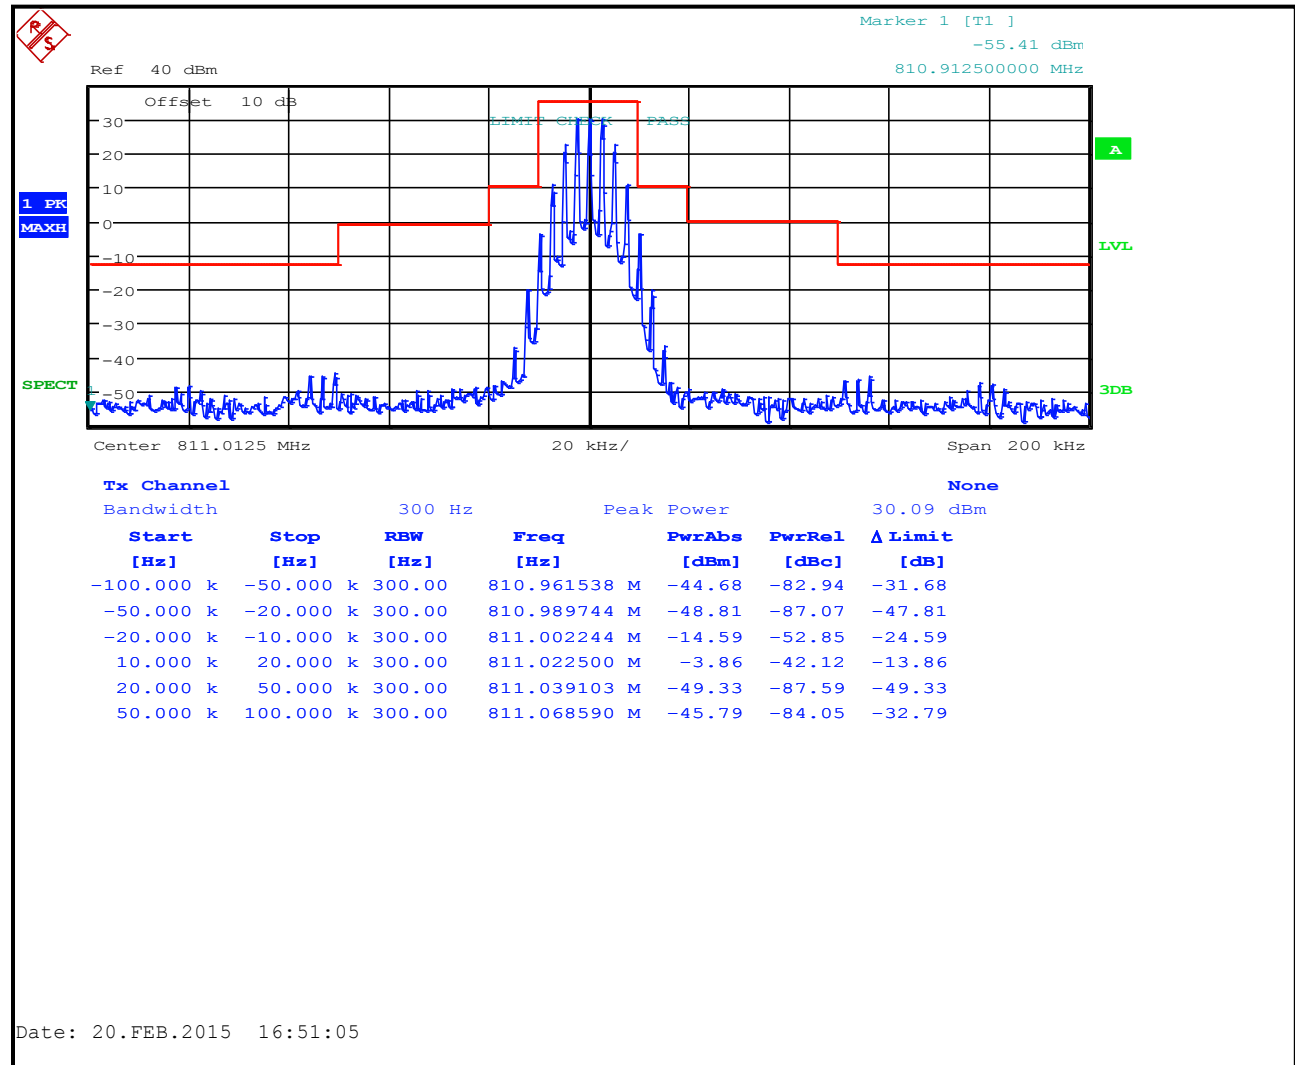


Plot 8-9: Occupied Bandwidth – 815.9875 MHz; Analog NPSPAC; Mask B

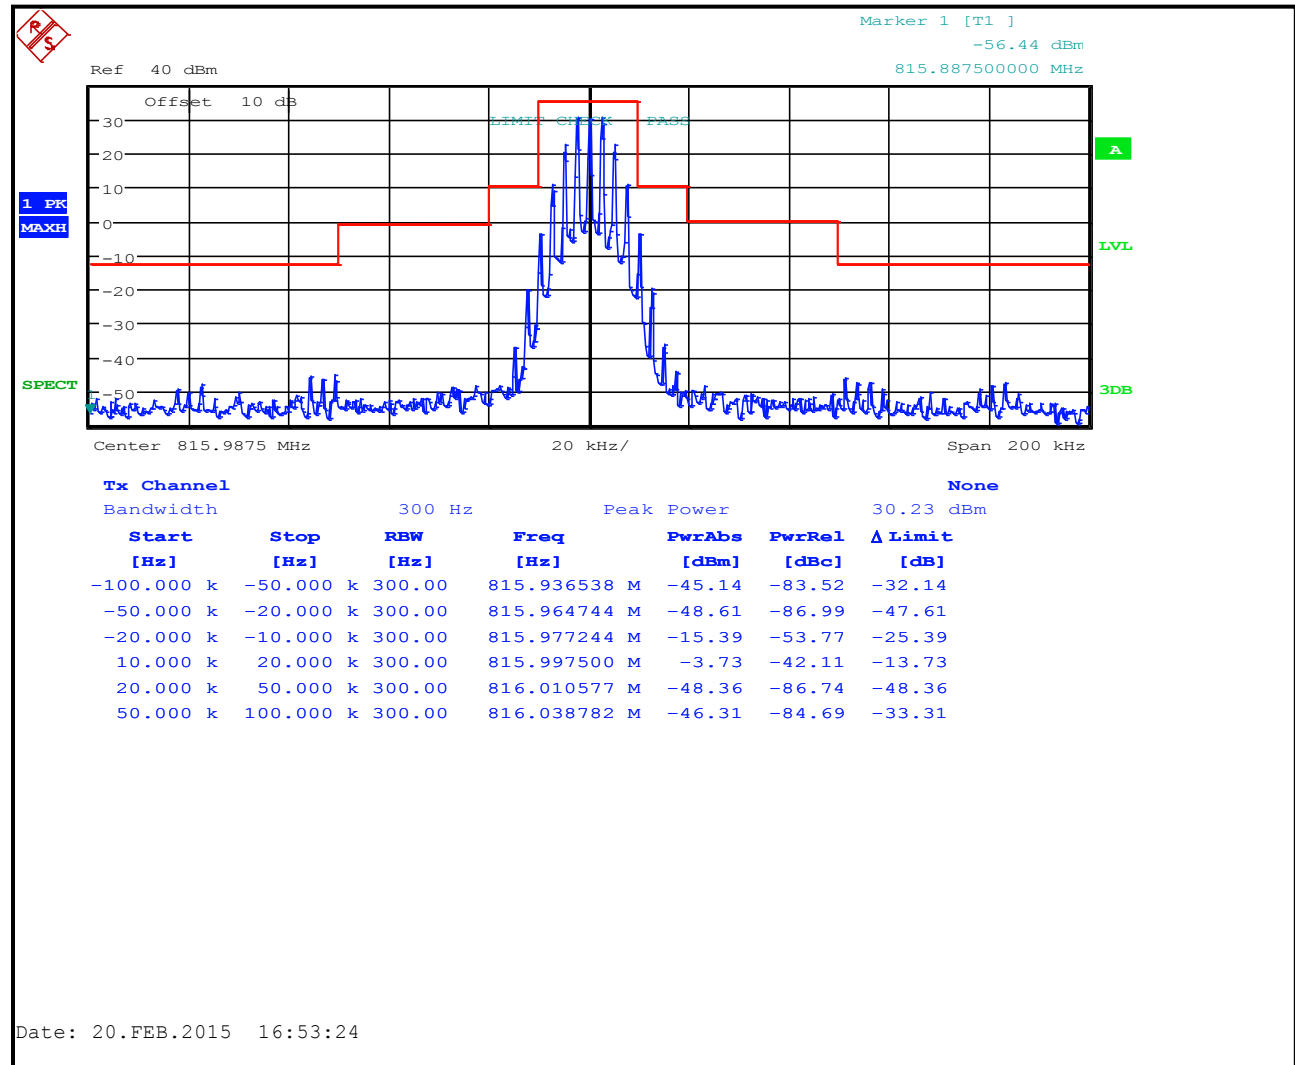


Plot 8-10: Occupied Bandwidth – 851.0125 MHz; Analog NPSPAC; Mask B

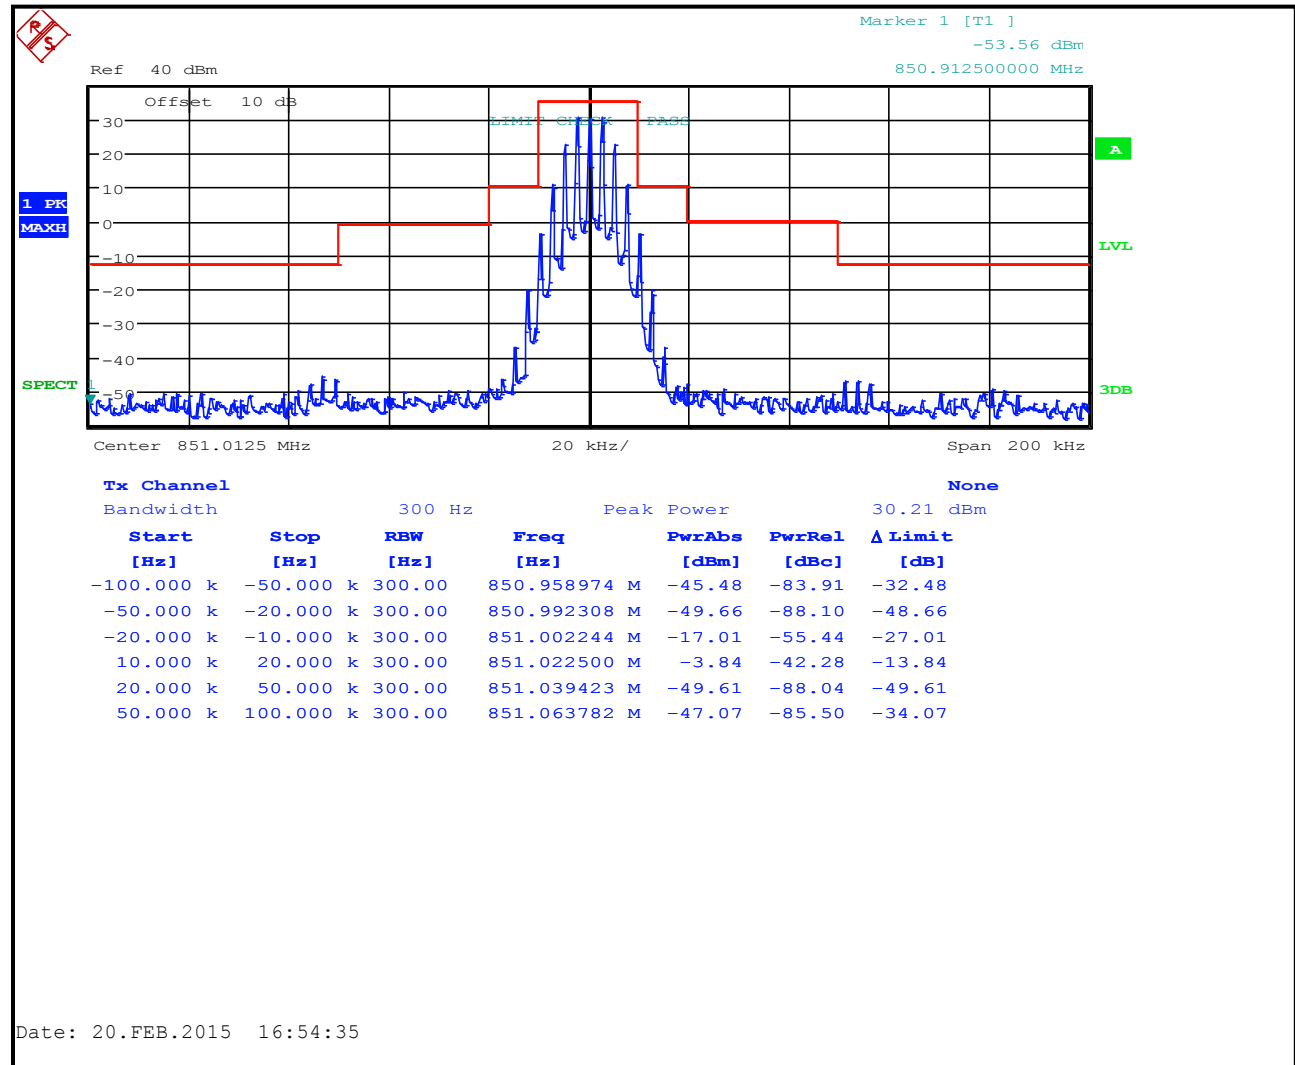


Plot 8-11: Occupied Bandwidth – 856.0125 MHz; Analog NPSPAC; Mask B

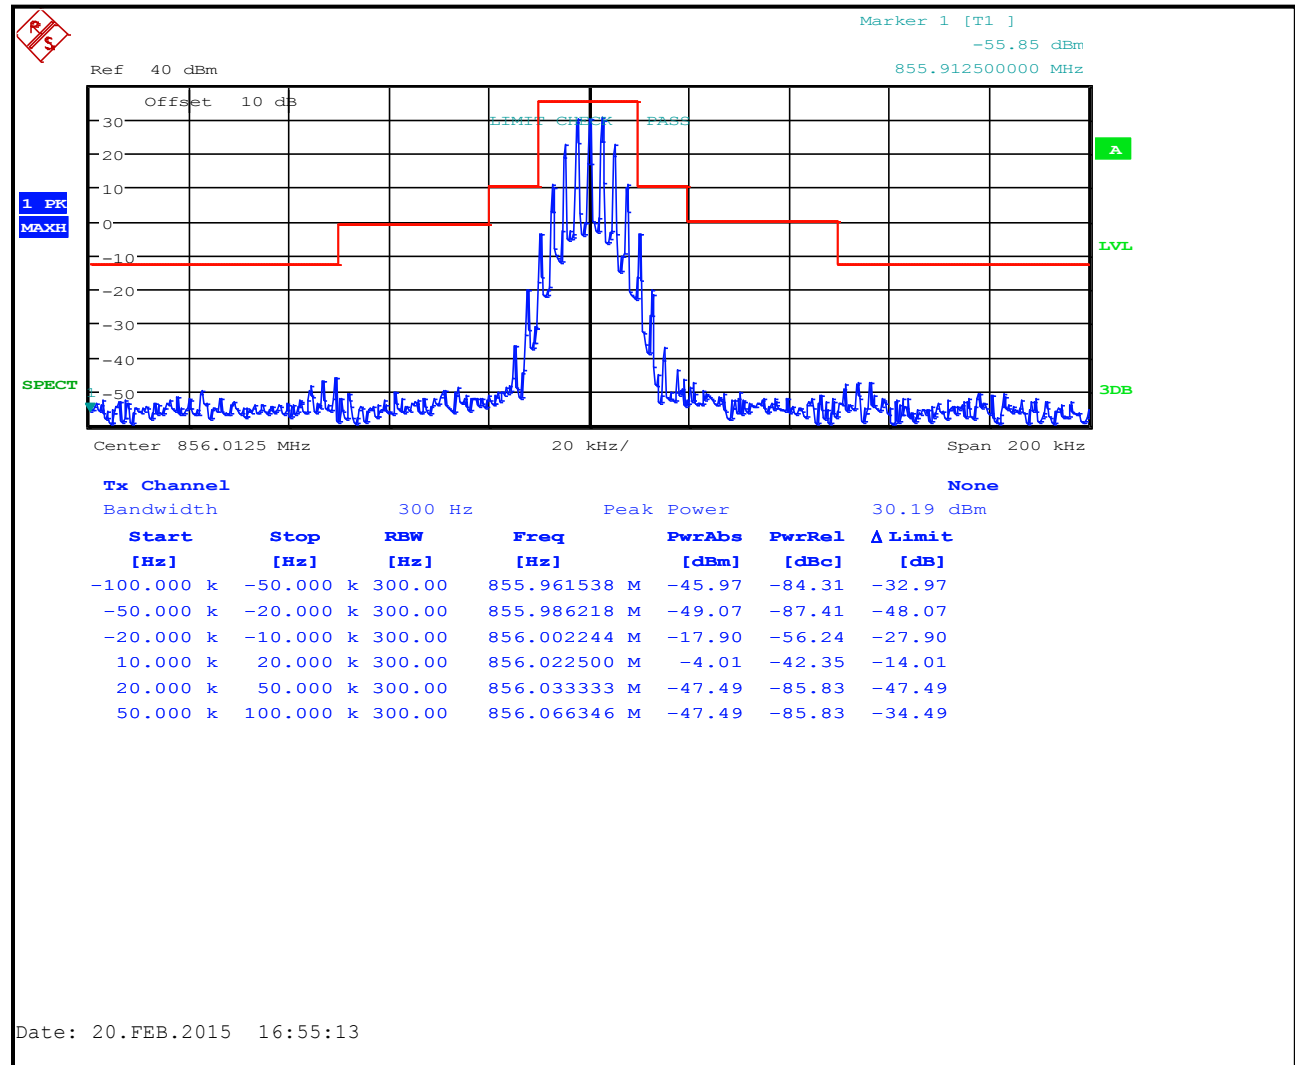


Plot 8-12: Occupied Bandwidth – 860.9875 MHz; Analog NPSPAC; Mask B

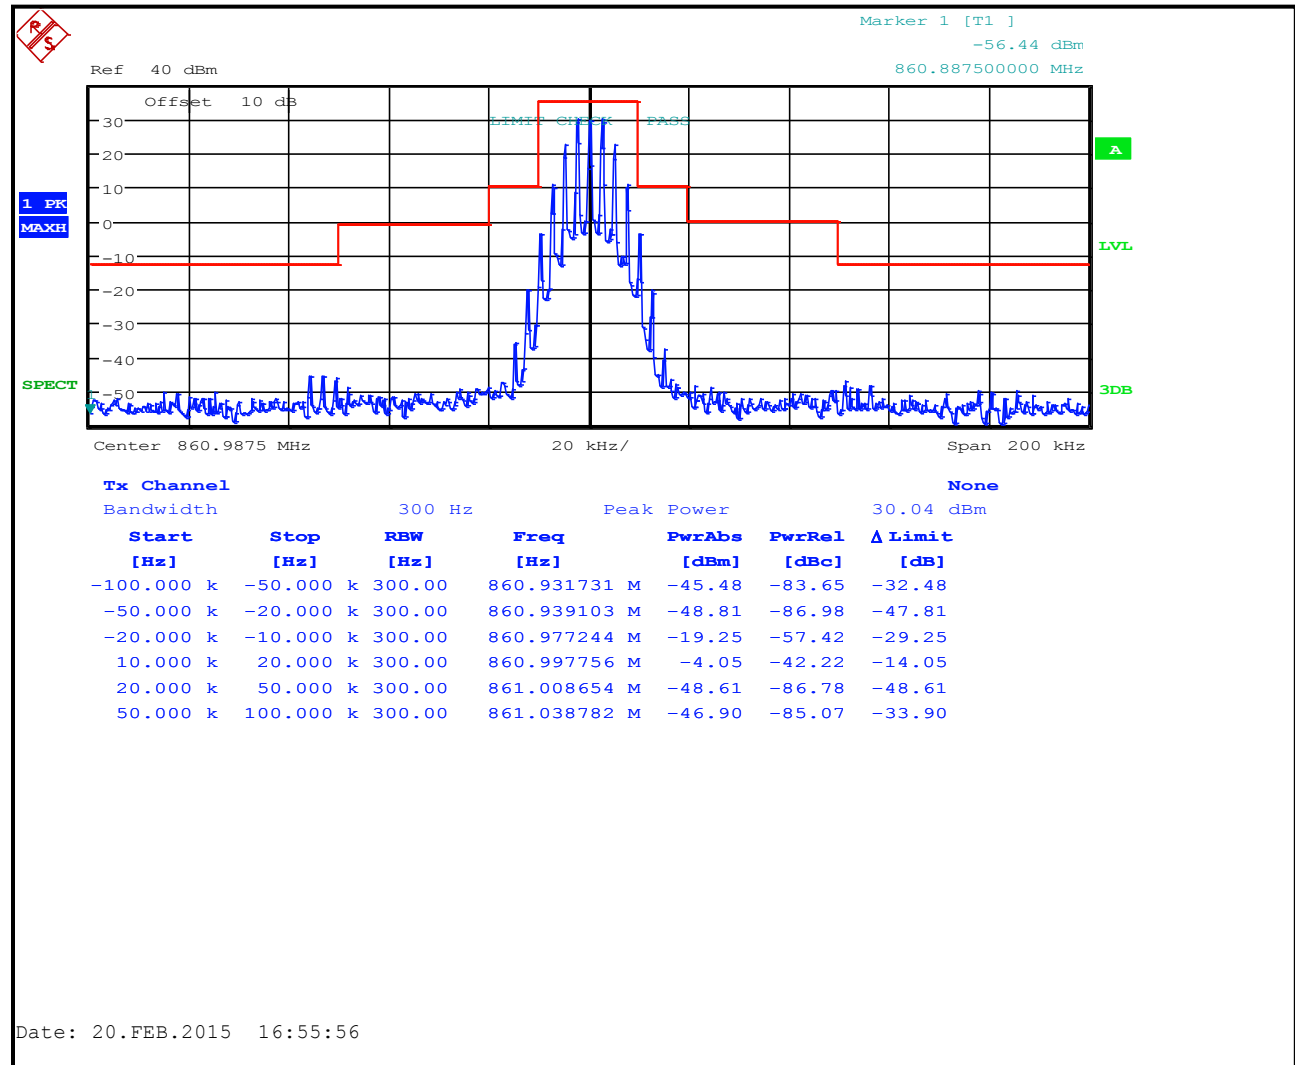


Plot 8-13: Occupied Bandwidth – 806.0125 MHz; P25; Mask D

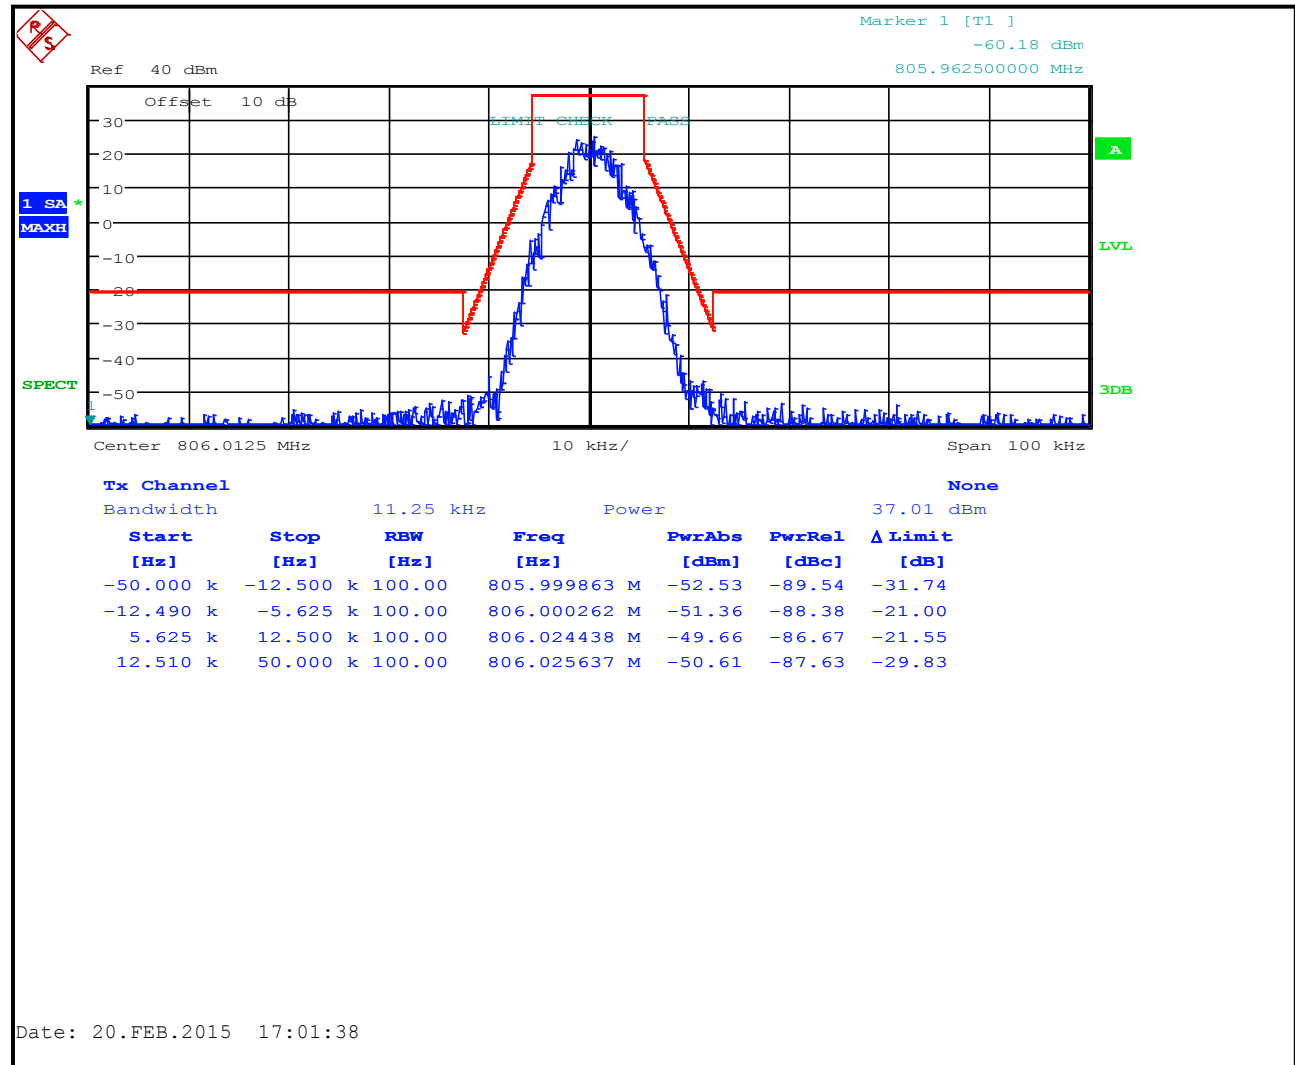


Plot 8-14: Occupied Bandwidth – 811.0125 MHz; P25; Mask D

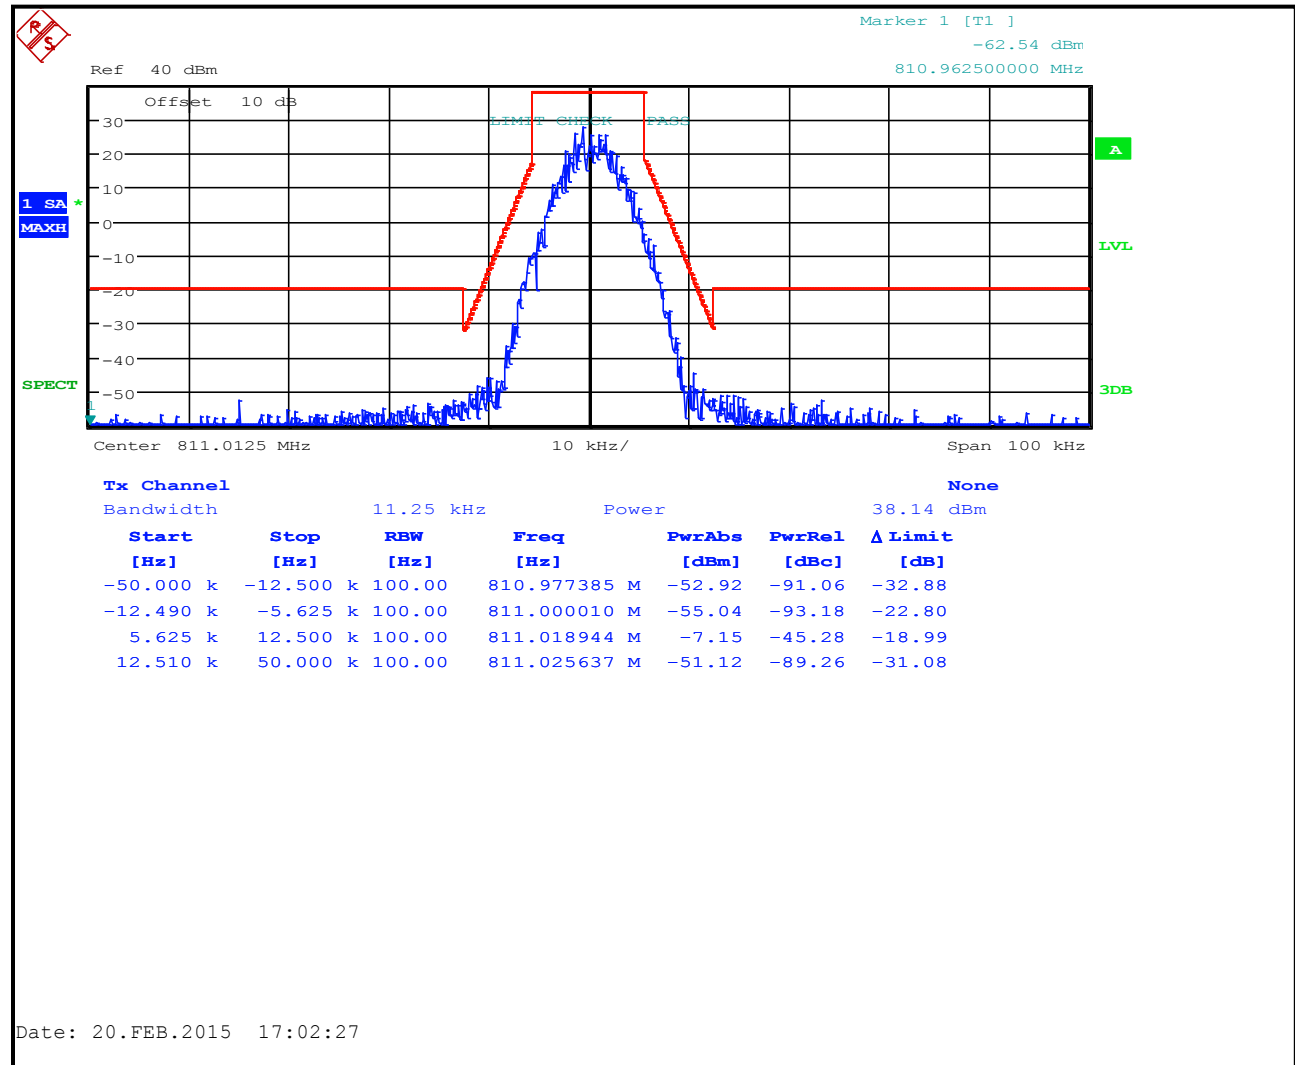


Plot 8-15: Occupied Bandwidth – 815.9875 MHz; P25; Mask D

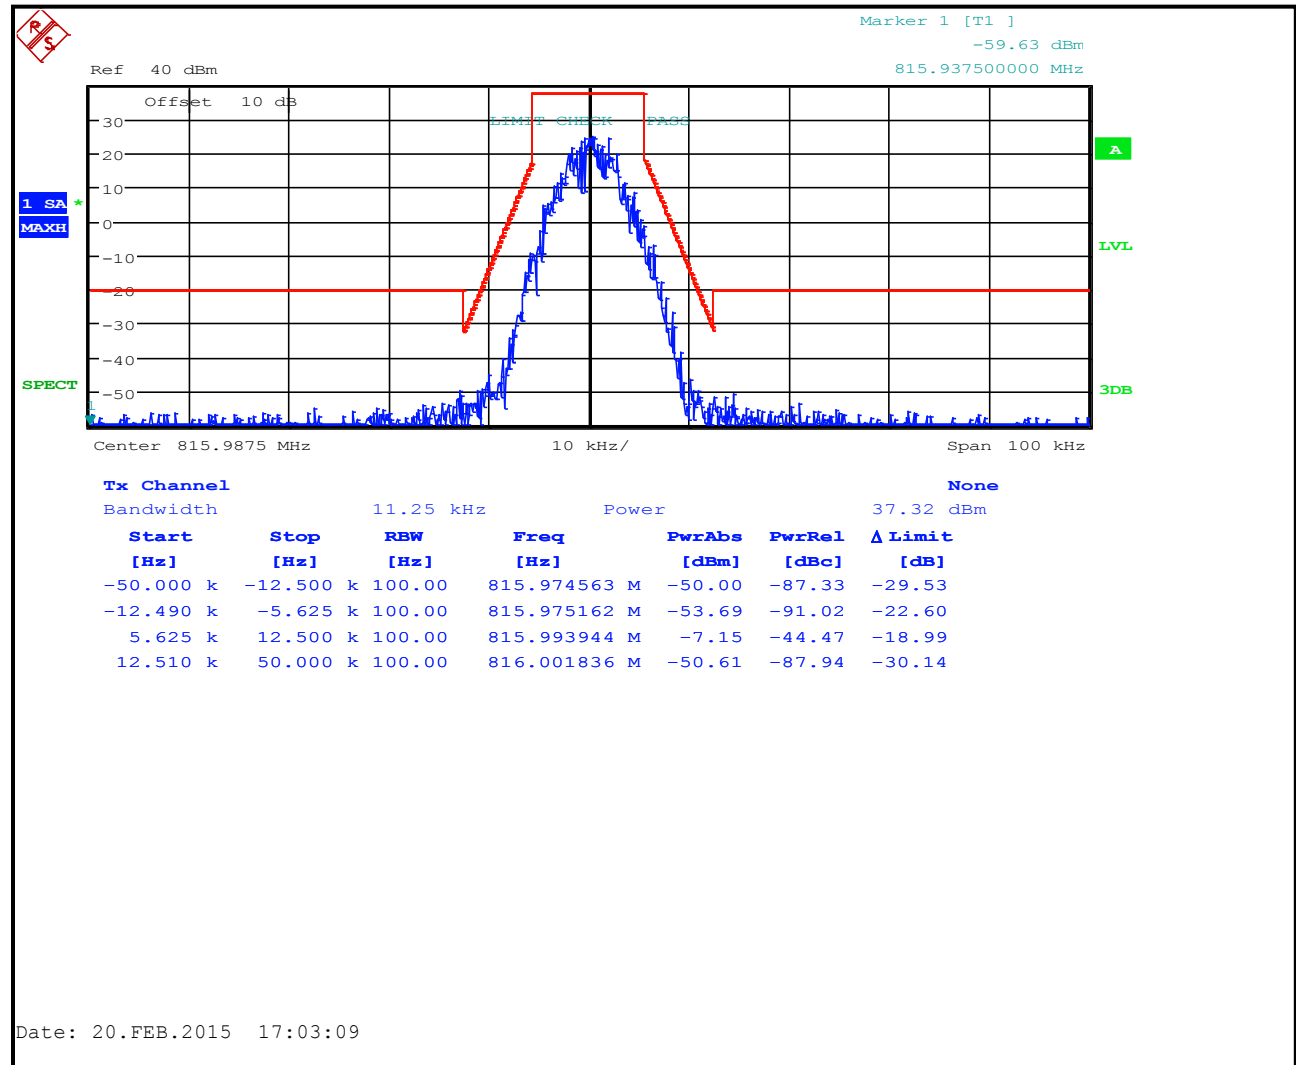


Plot 8-16: Occupied Bandwidth – 851.0125 MHz; P25; Mask D

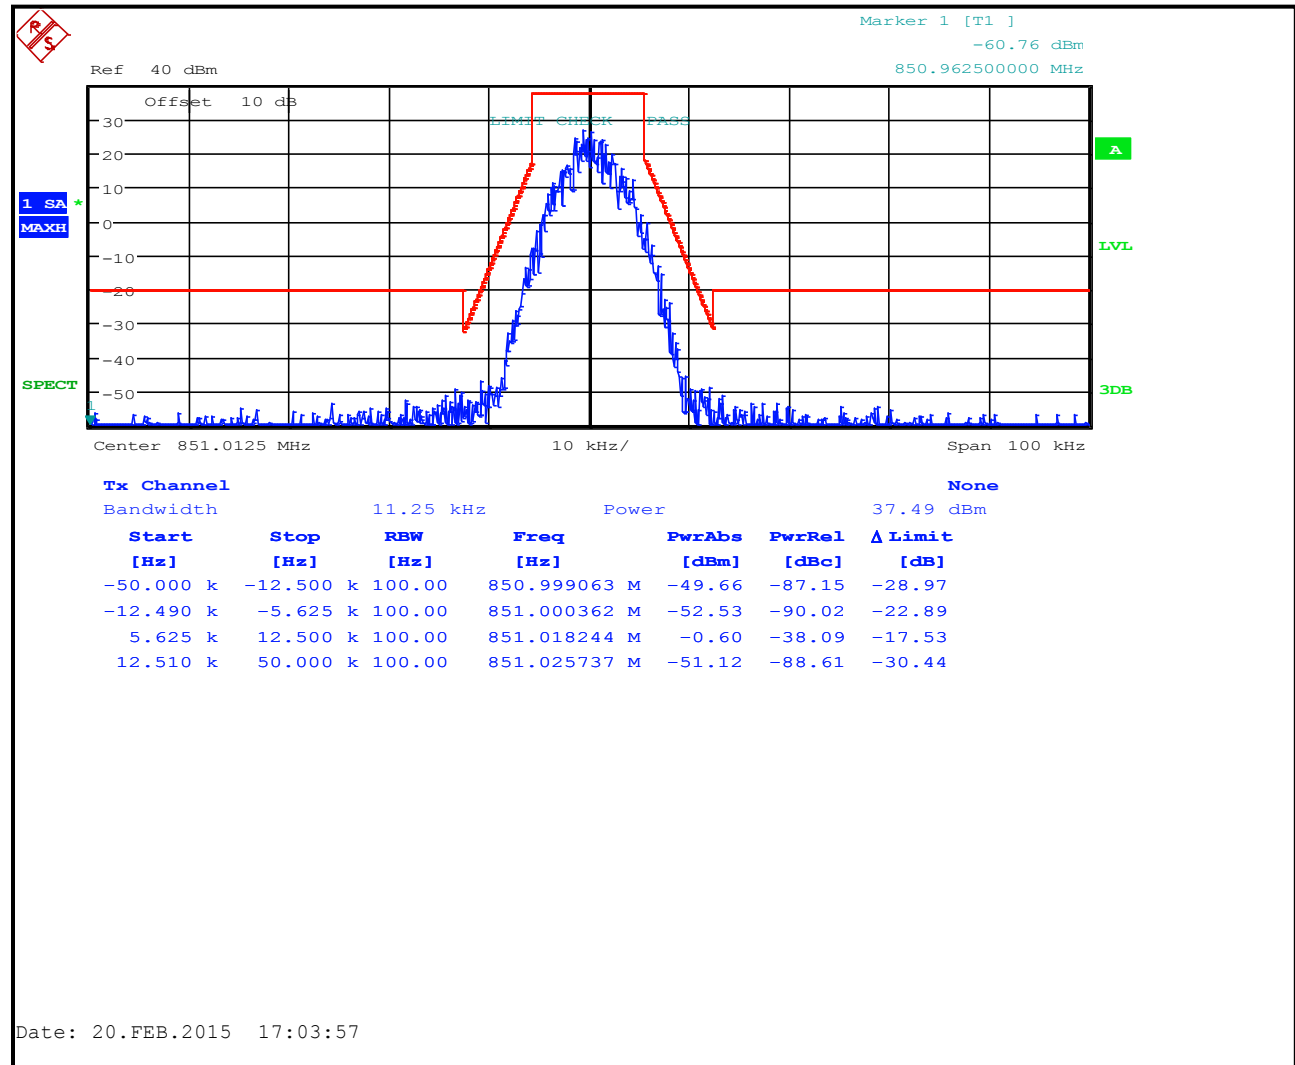


Plot 8-17: Occupied Bandwidth – 856.0125 MHz; P25; Mask D

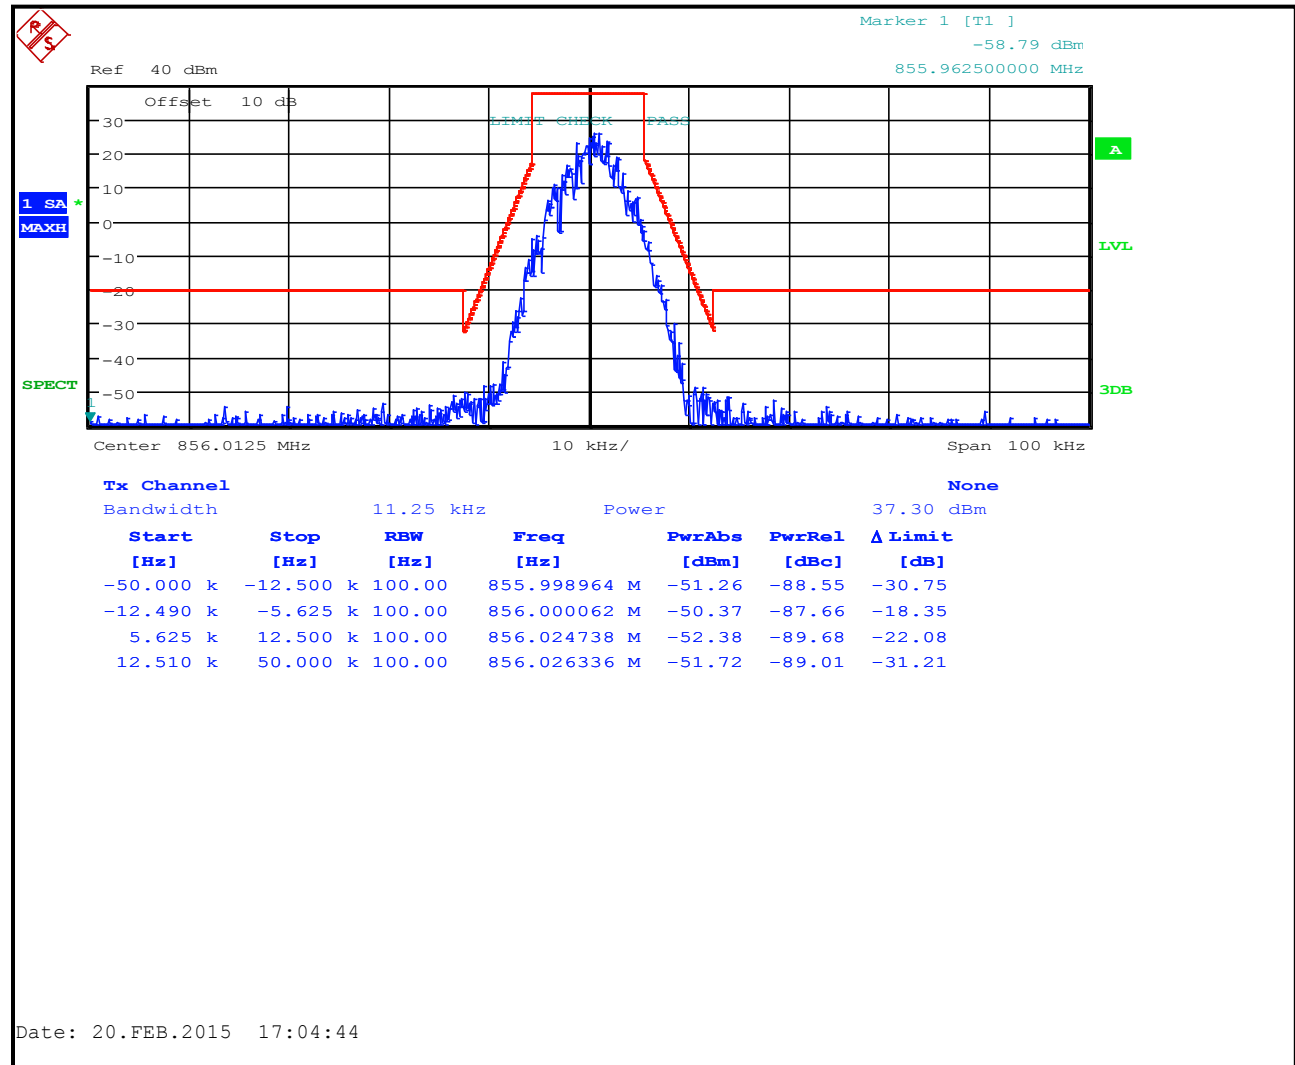


Plot 8-18: Occupied Bandwidth – 860.9875 MHz; P25; Mask D

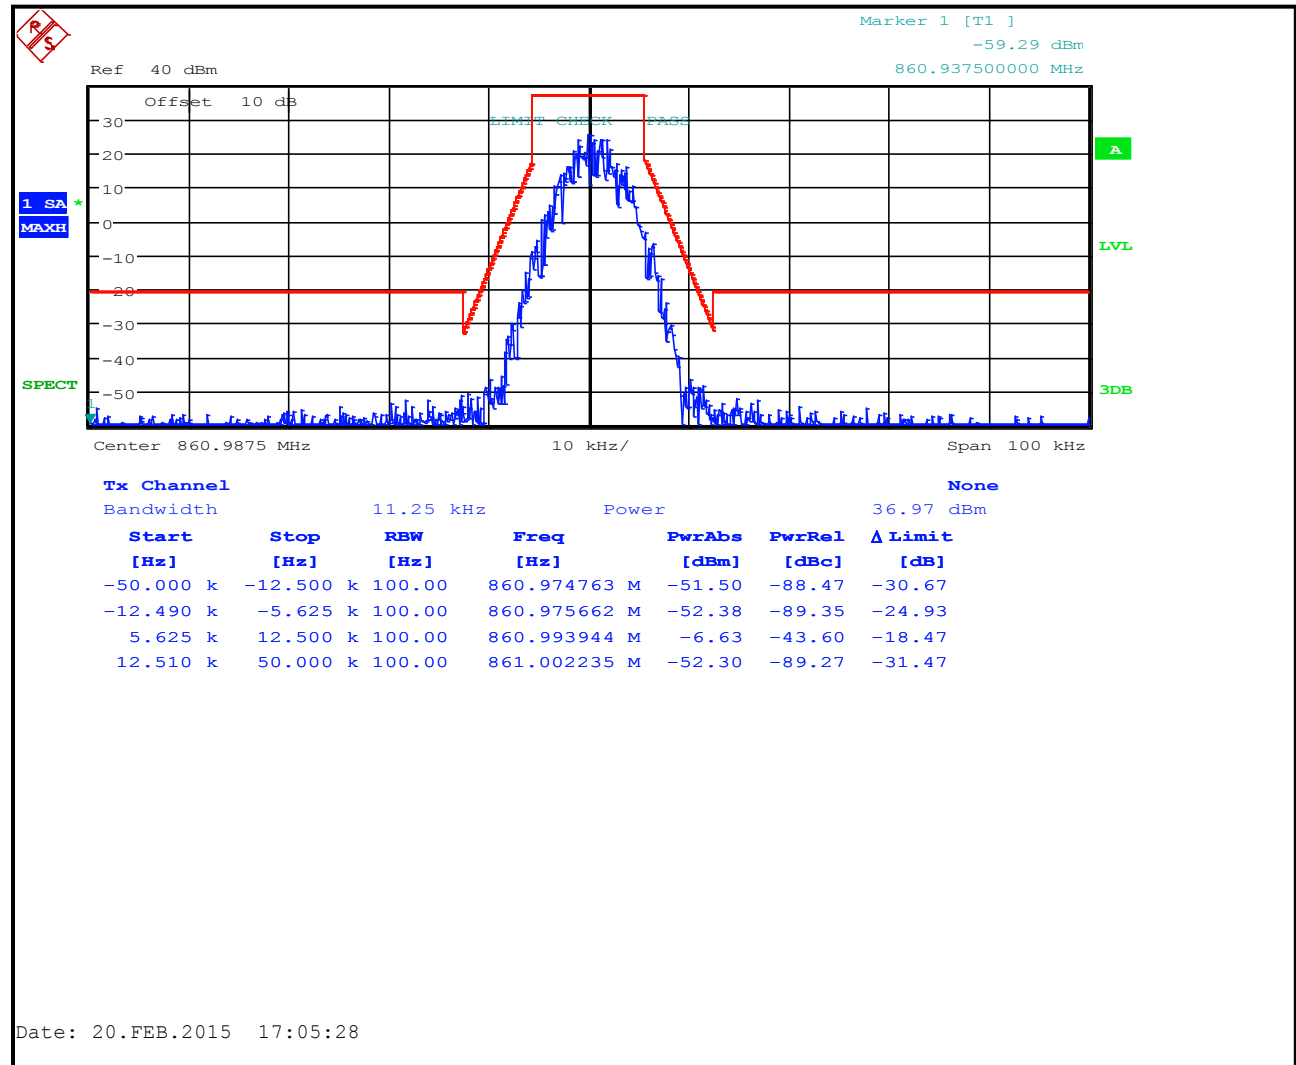


Plot 8-19: Occupied Bandwidth – 806.0125 MHz; P25; Mask H

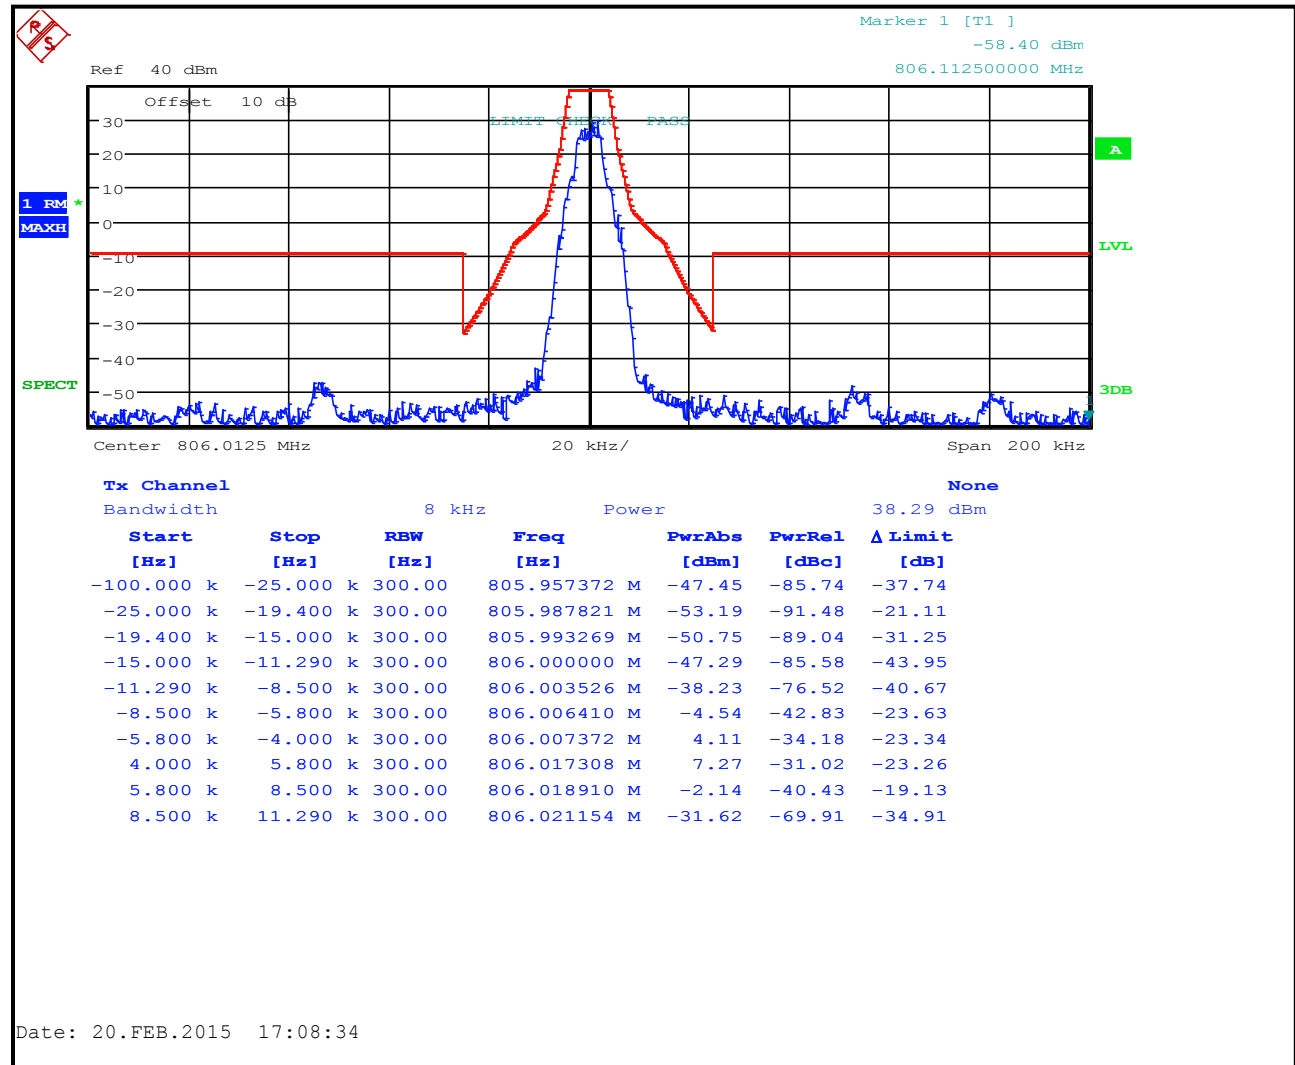

Plot 8-20: Occupied Bandwidth – 811.0125 MHz; P25; Mask G

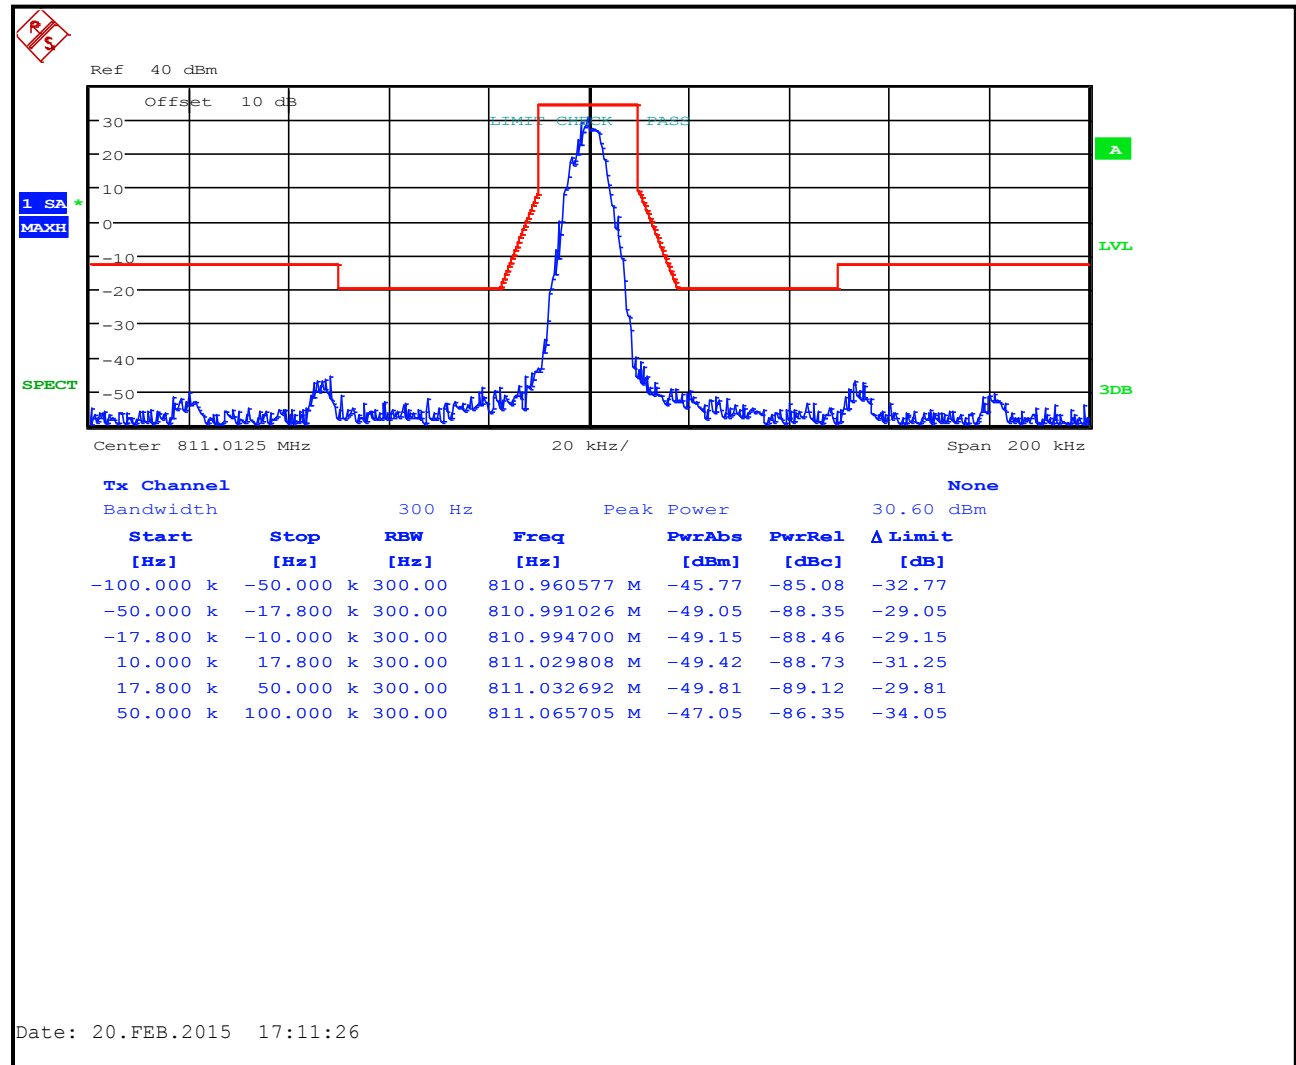

Plot 8-21: Occupied Bandwidth – 815.9875 MHz; P25; Mask G

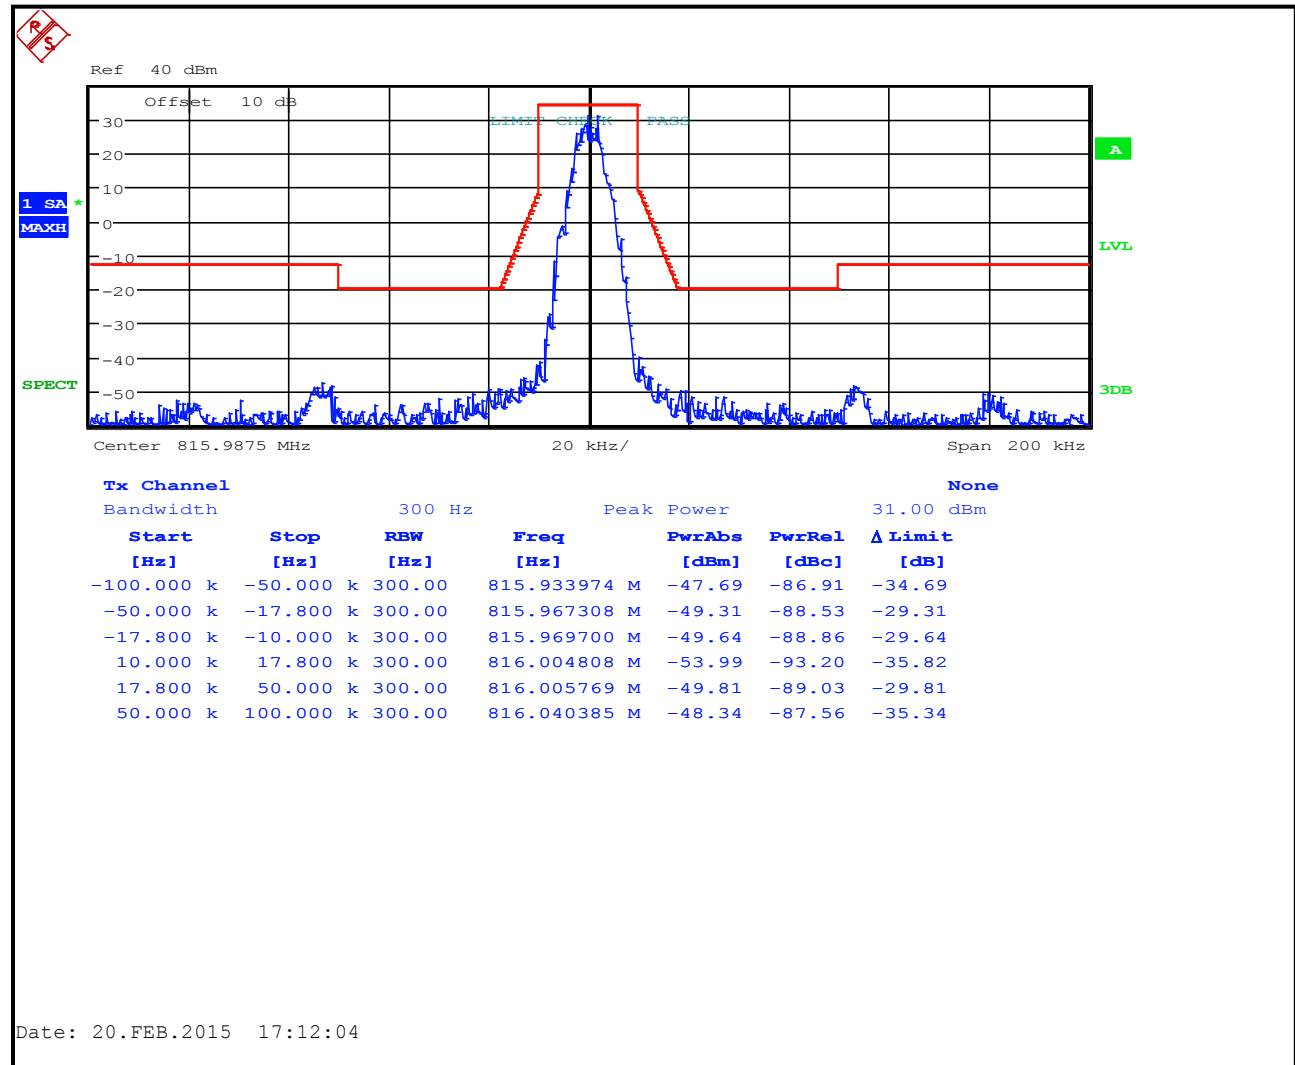

RF

Marker 1 [T1] -56.62 dBm
850.912500000 MHz

Ref 40 dBm

Offset 10 dB

1 RM
MAXH

SPECT

3dB

Center 851.0125 MHz 20 kHz/ Span 200 kHz


Tx Channel

Bandwidth 8 kHz Power 37.96 dBm


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	PwrRel [dBc]	Δ Limit [dB]
-100.000 k	-25.000 k	300.00	850.958333 M	-47.86	-85.82	-37.82
-25.000 k	-19.400 k	300.00	850.987500 M	-55.84	-93.79	-22.69
-19.400 k	-15.000 k	300.00	850.993590 M	-52.03	-89.99	-33.17
-15.000 k	-11.290 k	300.00	850.998718 M	-50.26	-88.21	-44.85
-11.290 k	-8.500 k	300.00	851.001603 M	-43.82	-81.78	-42.48
-8.500 k	-5.800 k	300.00	851.006410 M	-2.63	-40.58	-21.38
-5.800 k	-4.000 k	300.00	851.007372 M	3.88	-34.07	-23.23
4.000 k	5.800 k	300.00	851.017949 M	1.87	-36.09	-22.17
5.800 k	8.500 k	300.00	851.019551 M	-8.62	-46.58	-21.07
8.500 k	11.290 k	300.00	851.021474 M	-33.03	-70.99	-35.14

Date: 20.FEB.2015 17:09:14


Plot 8-23: Occupied Bandwidth – 856.0125 MHz; P25; Mask G

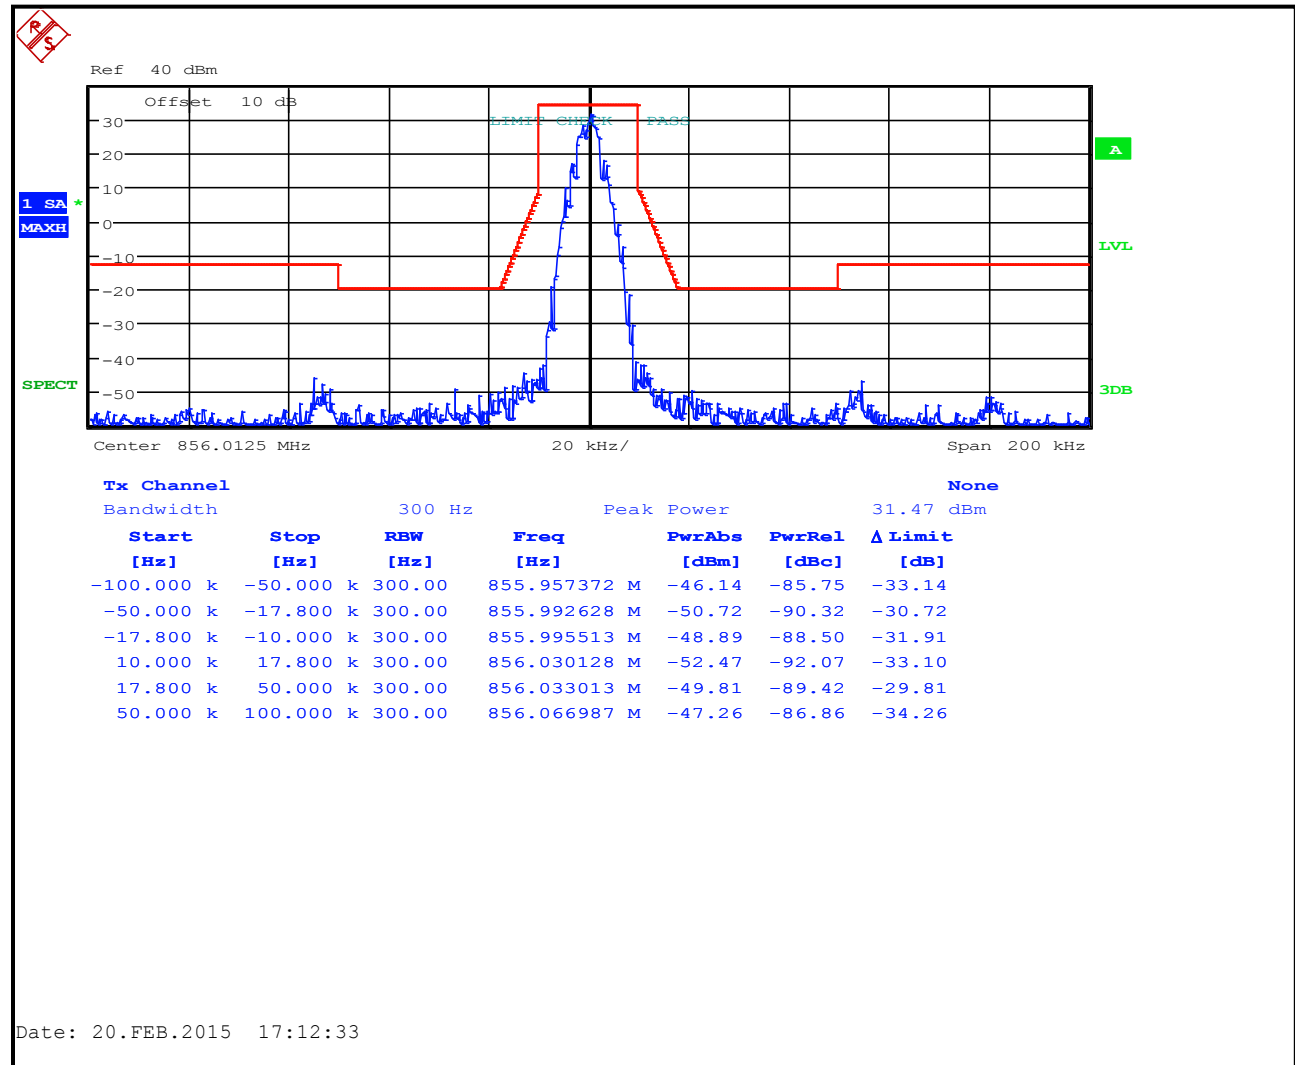


Plot 8-24: Occupied Bandwidth – 860.9875 MHz; P25; Mask G

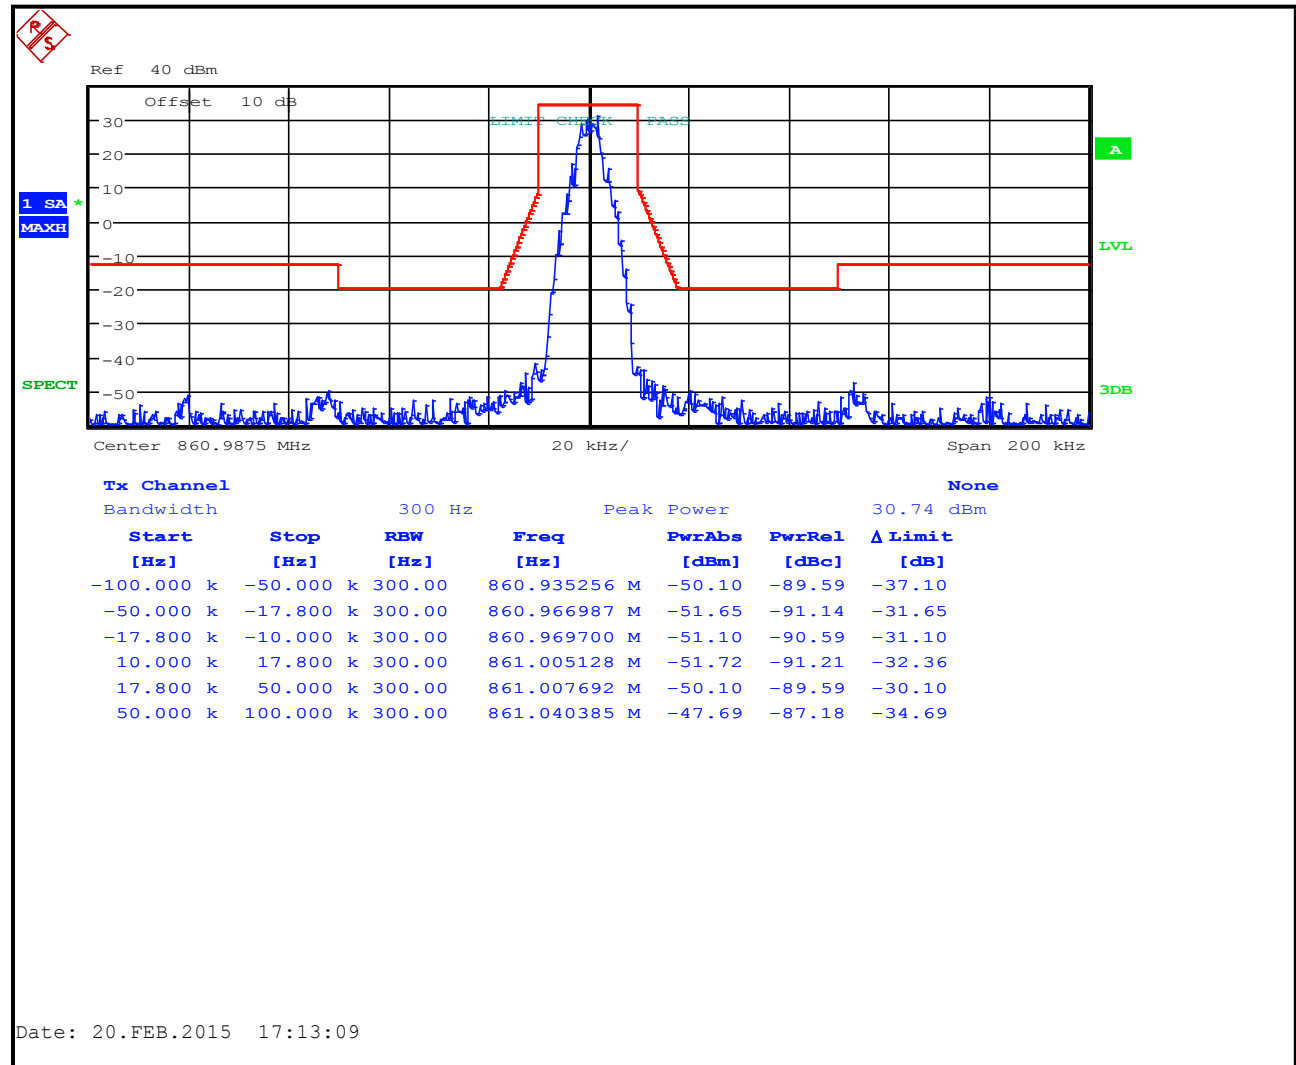


Plot 8-25: Occupied Bandwidth – 806.0125 MHz; P25 Phase 2; Mask D

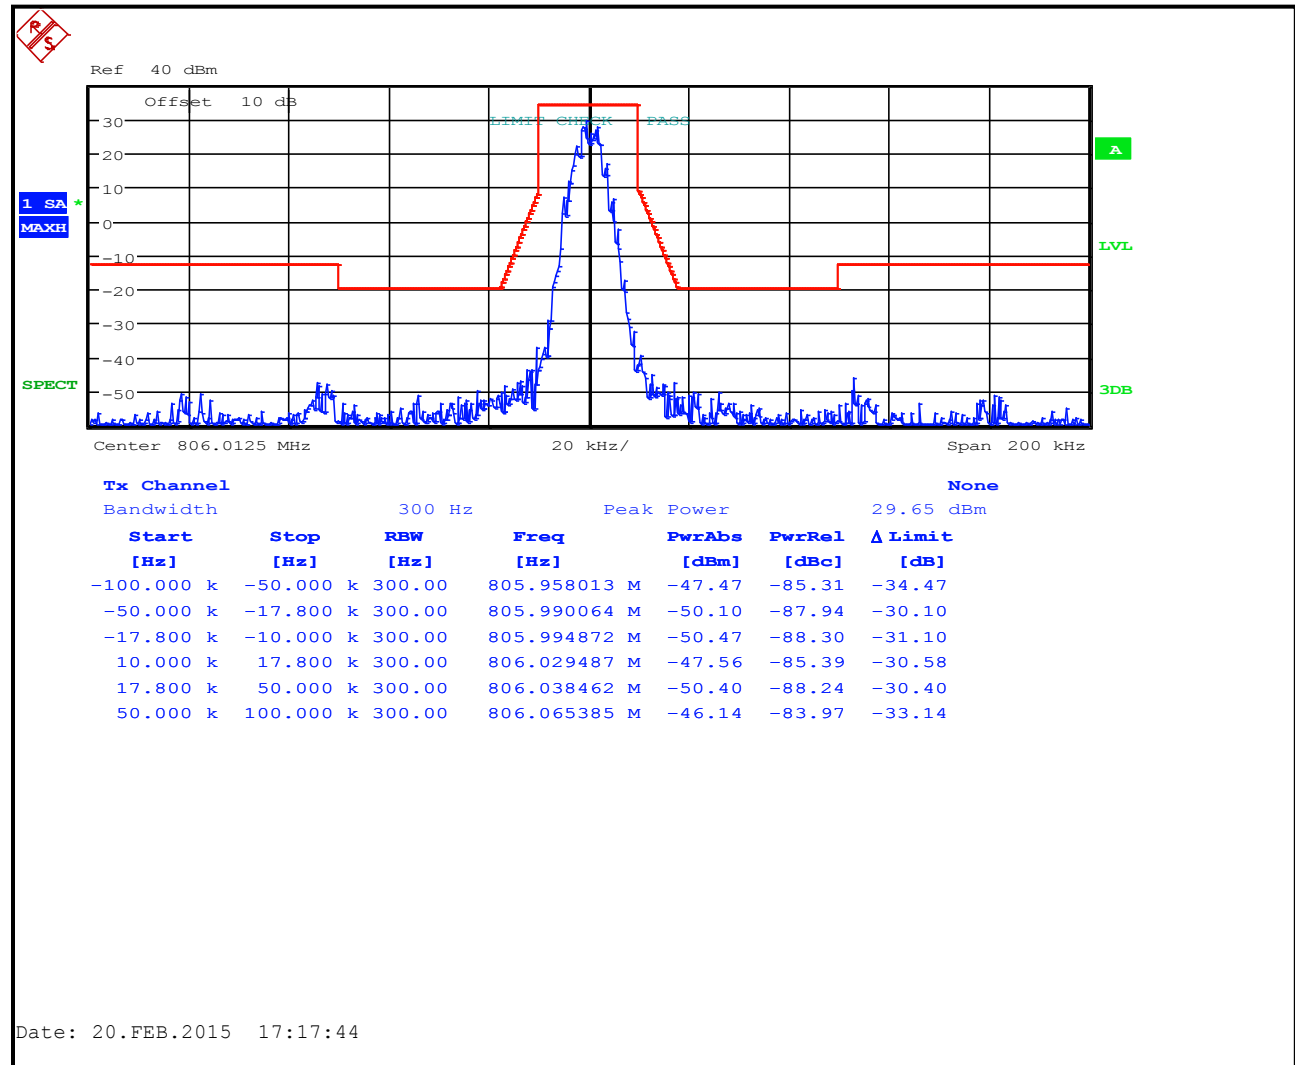


Plot 8-26: Occupied Bandwidth – 811.0125 MHz; P25 Phase 2; Mask D

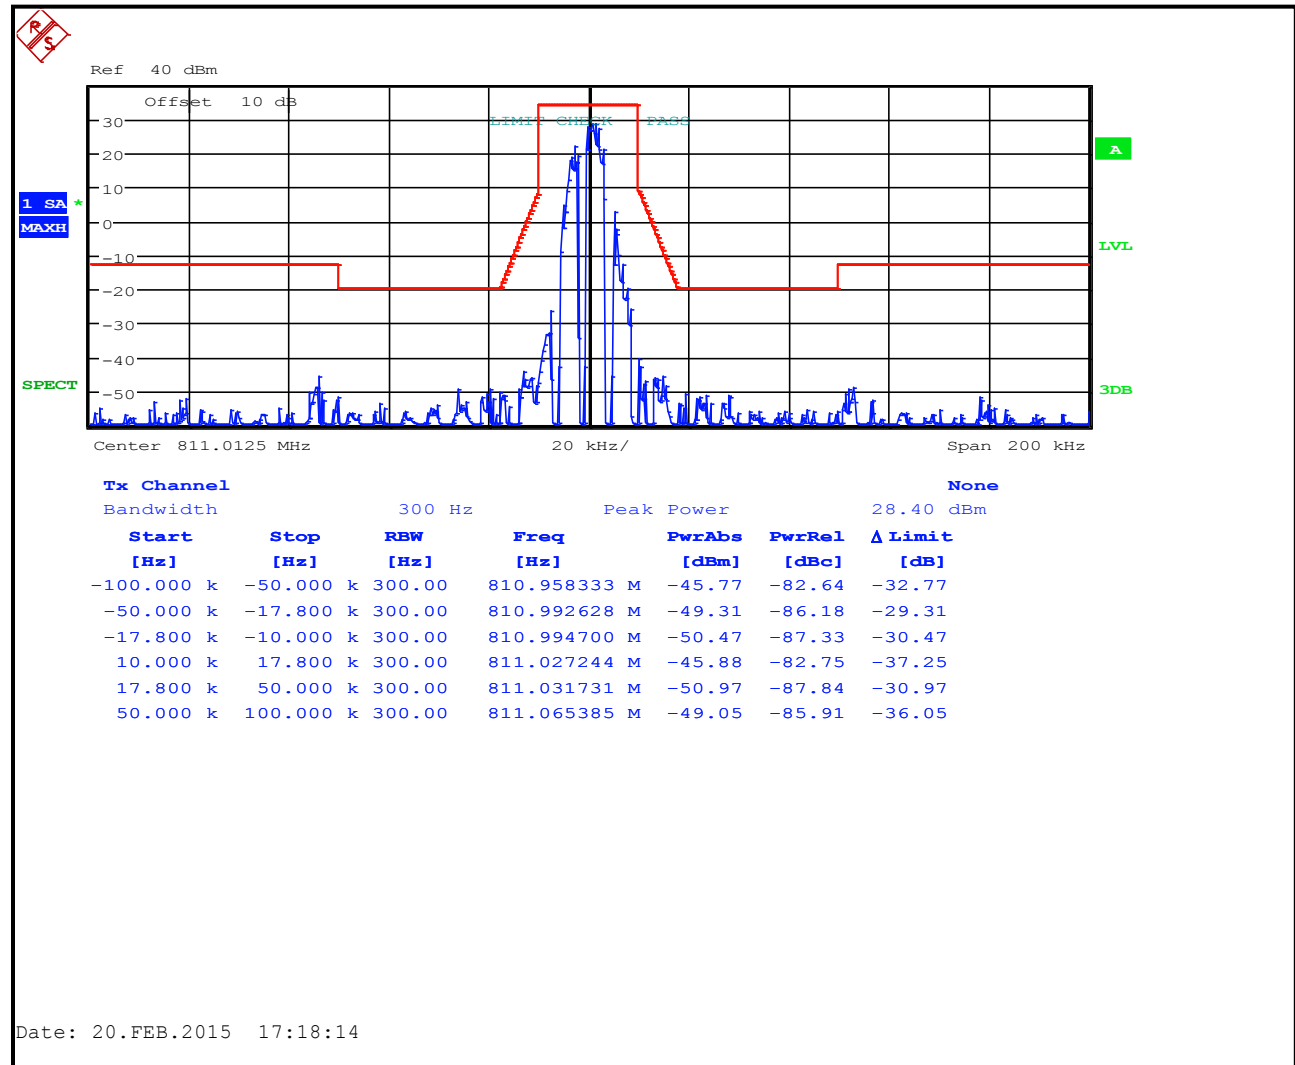


Plot 8-27: Occupied Bandwidth – 815.9875 MHz; P25 Phase 2; Mask D

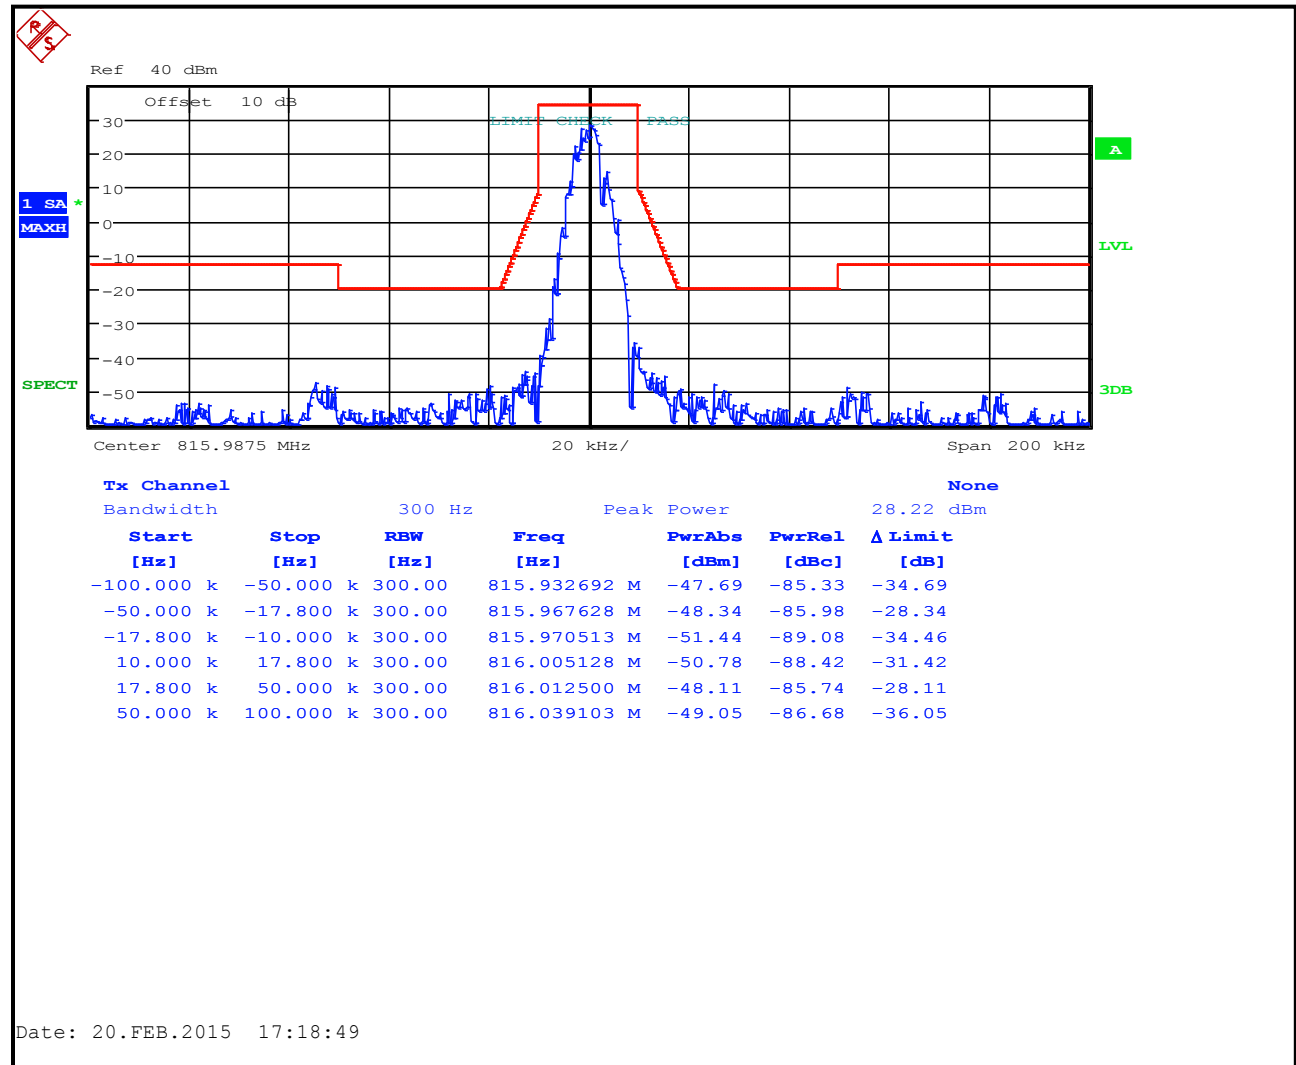


Plot 8-28: Occupied Bandwidth – 851.0125 MHz; P25 Phase 2; Mask D

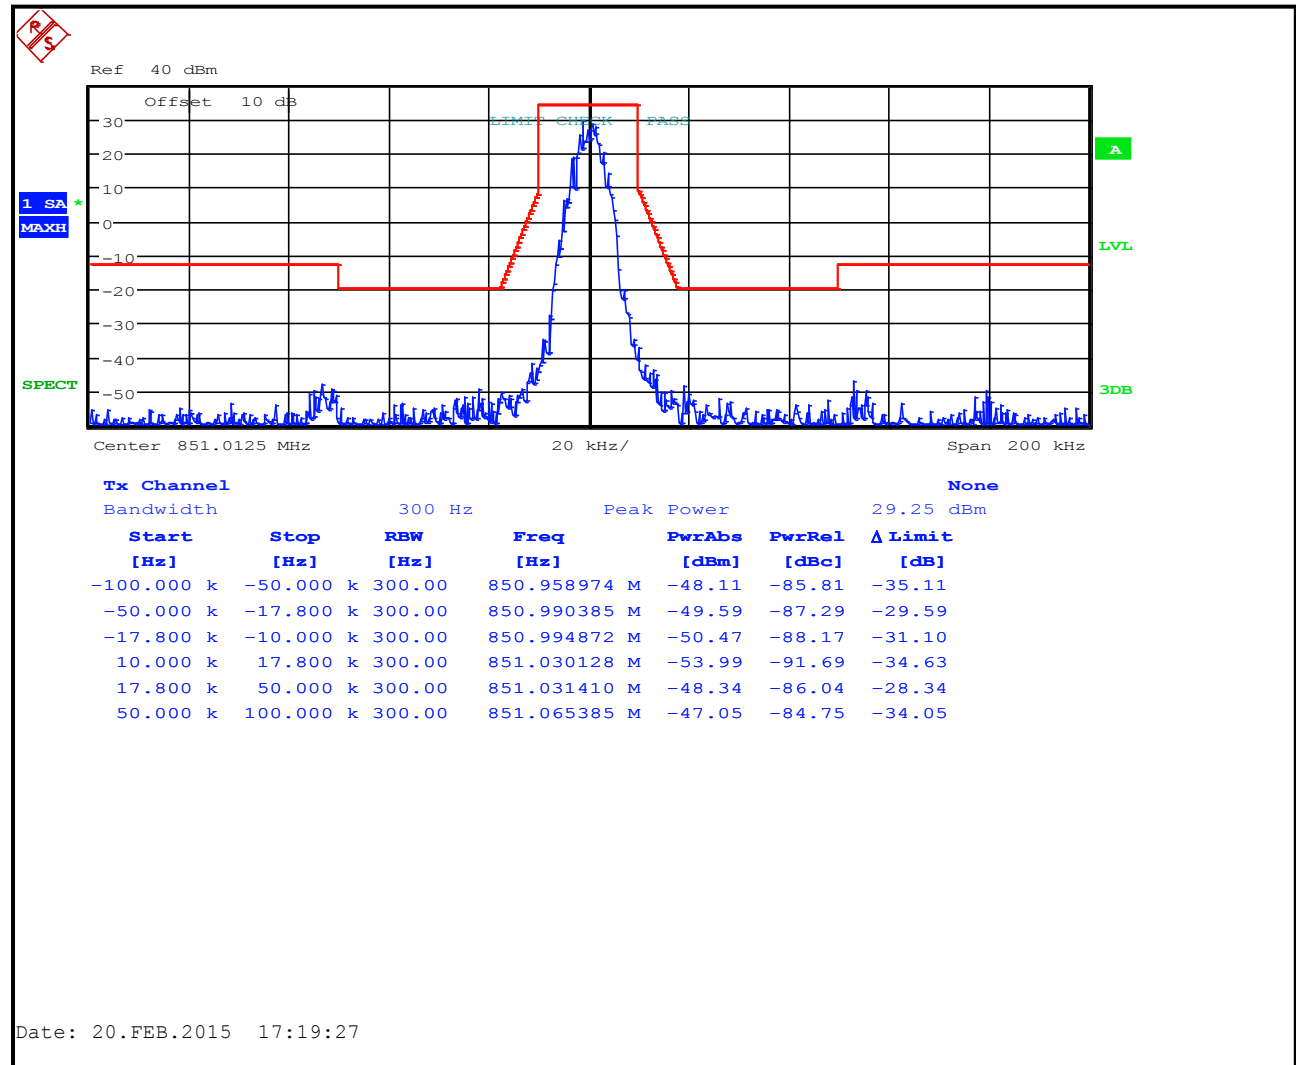


Plot 8-29: Occupied Bandwidth – 856.0125 MHz; P25 Phase 2; Mask D

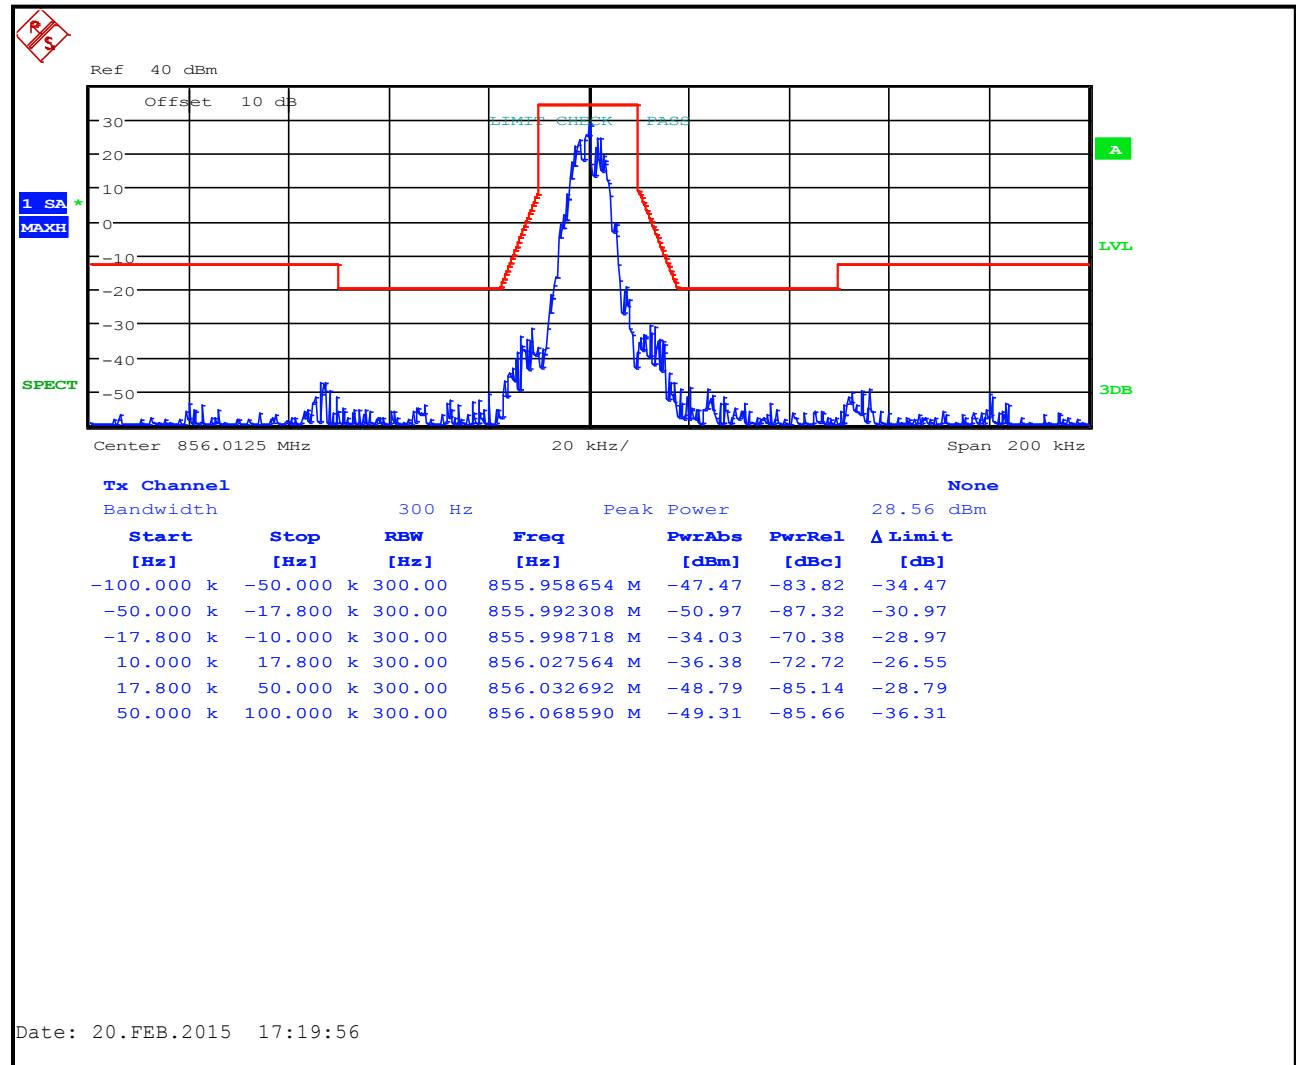


Plot 8-30: Occupied Bandwidth – 860.9875 MHz; P25 Phase 2; Mask D

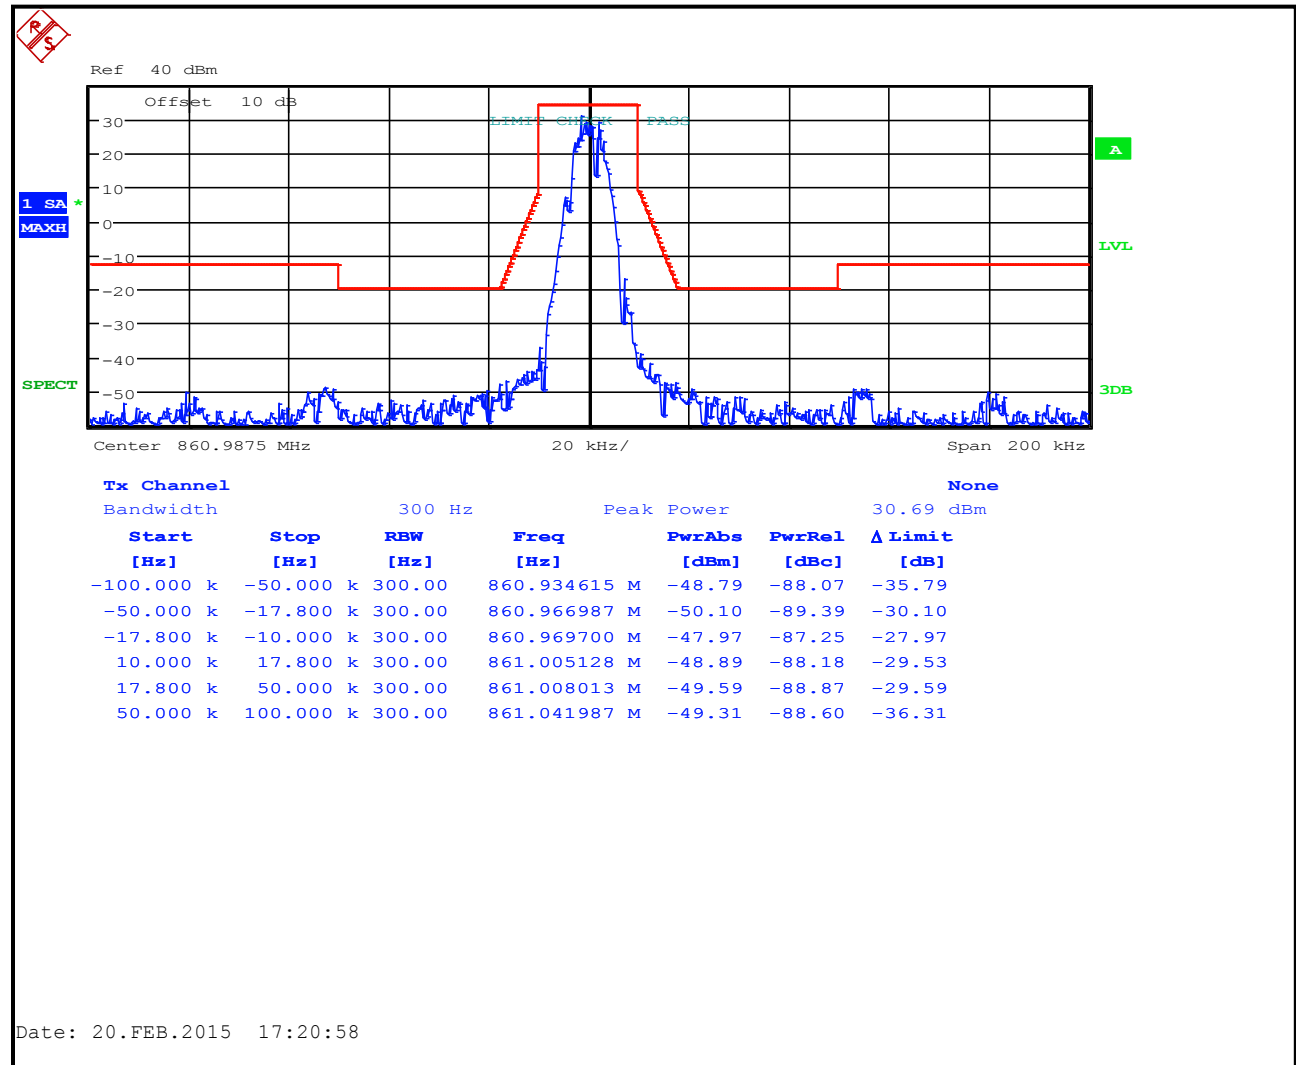


Plot 8-31: Occupied Bandwidth – 806.0125 MHz; P25 Phase 2; Mask H

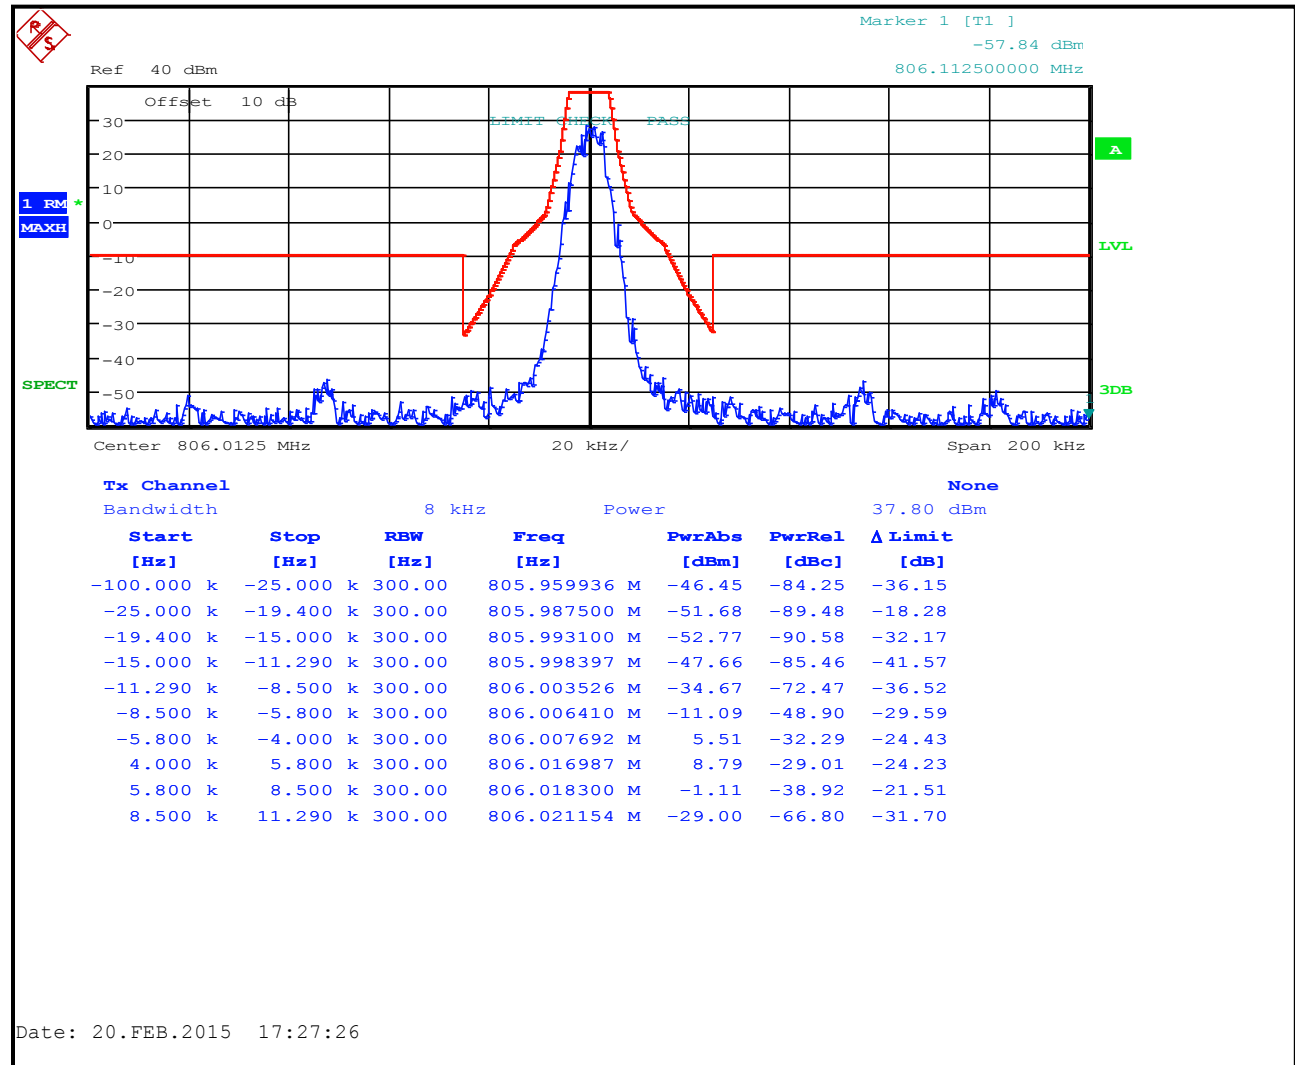


Plot 8-32: Occupied Bandwidth – 811.0125 MHz; P25 Phase 2; Mask G

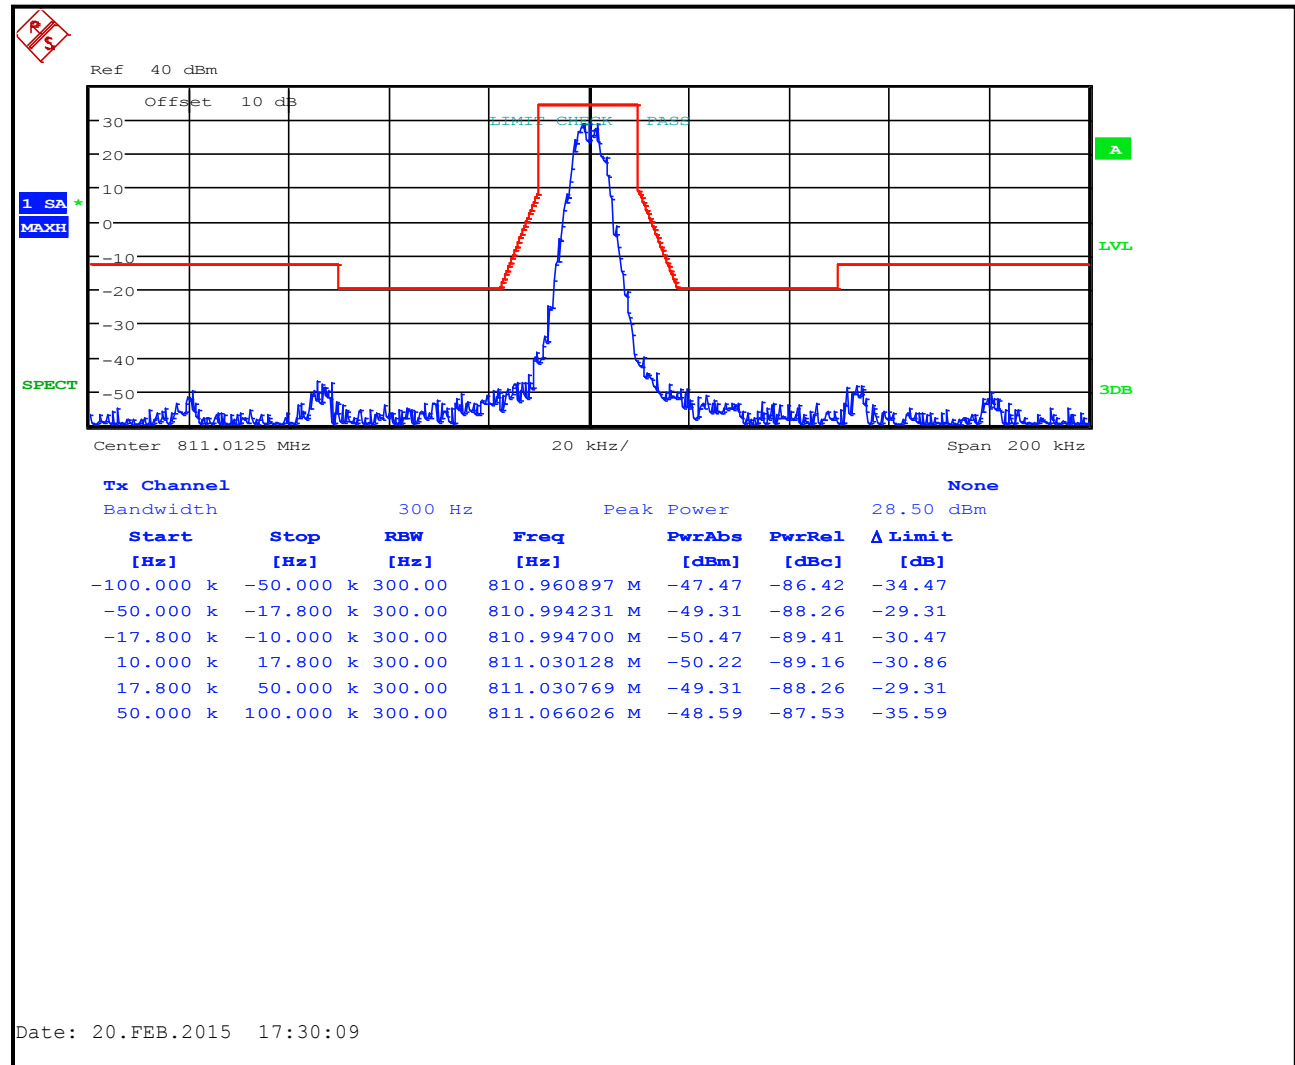


Plot 8-33: Occupied Bandwidth – 815.9875 MHz; P25 Phase 2; Mask G

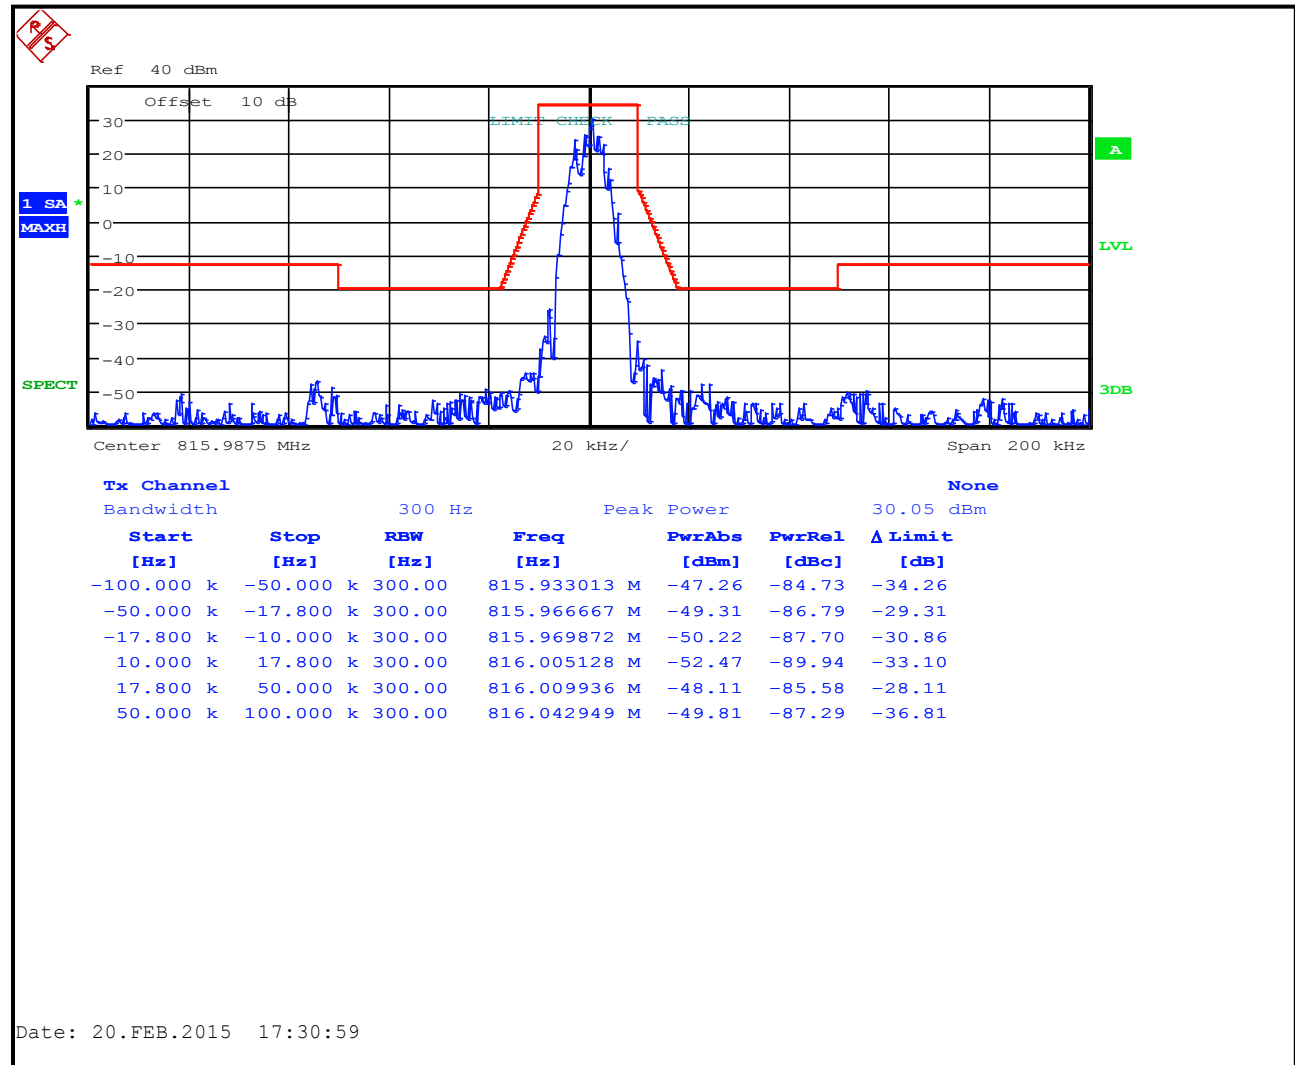


Plot 8-34: Occupied Bandwidth – 851.0125 MHz; P25 Phase 2; Mask H

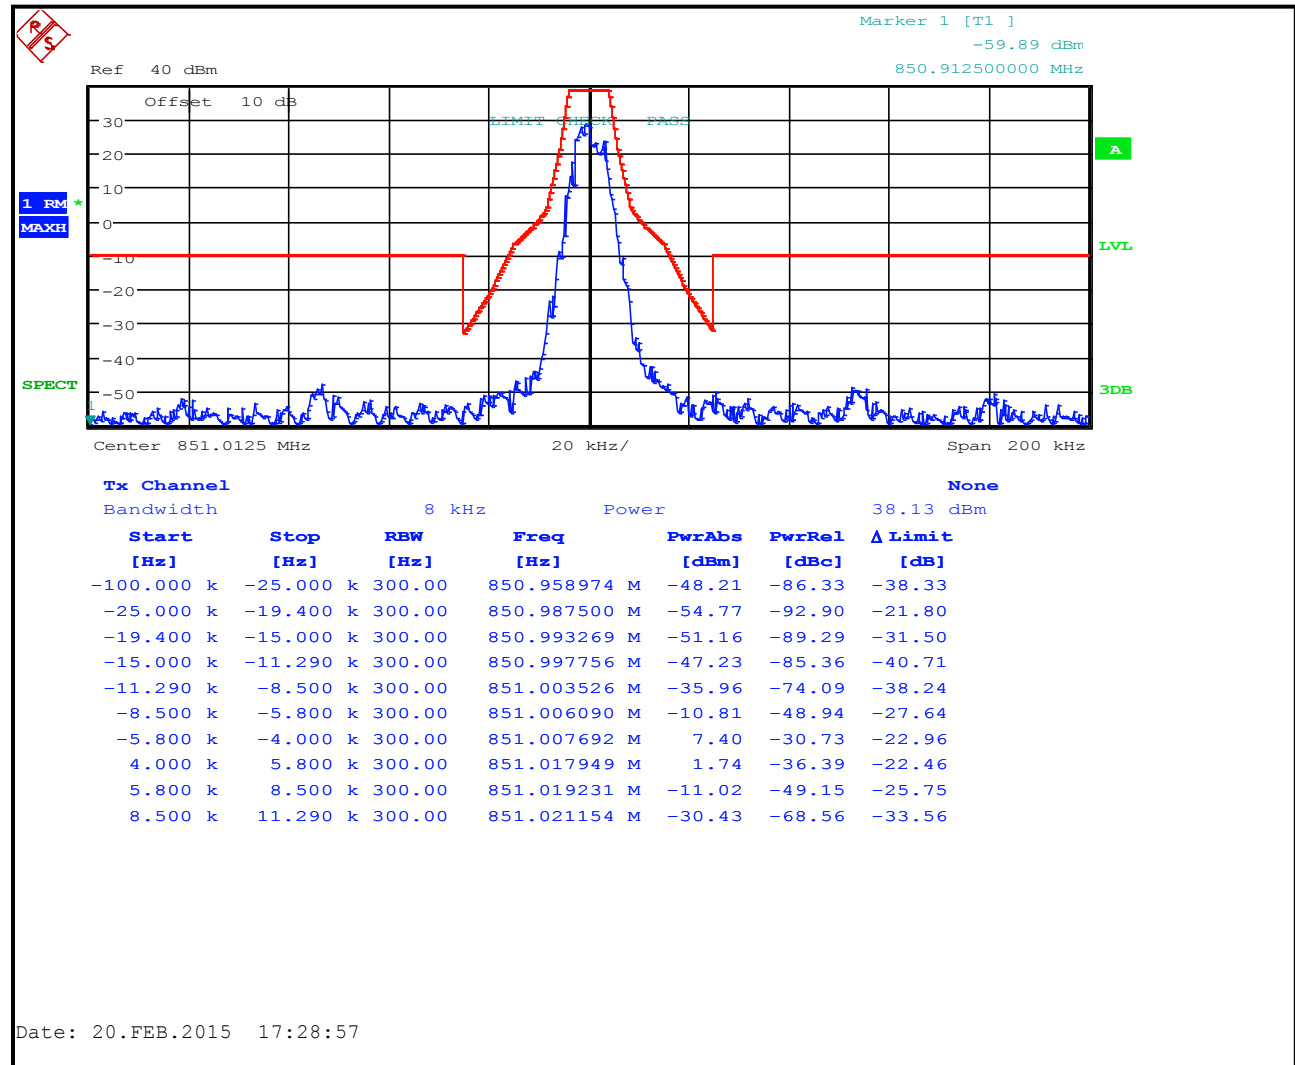

Plot 8-35: Occupied Bandwidth – 856.0125 MHz; P25 Phase 2; Mask G

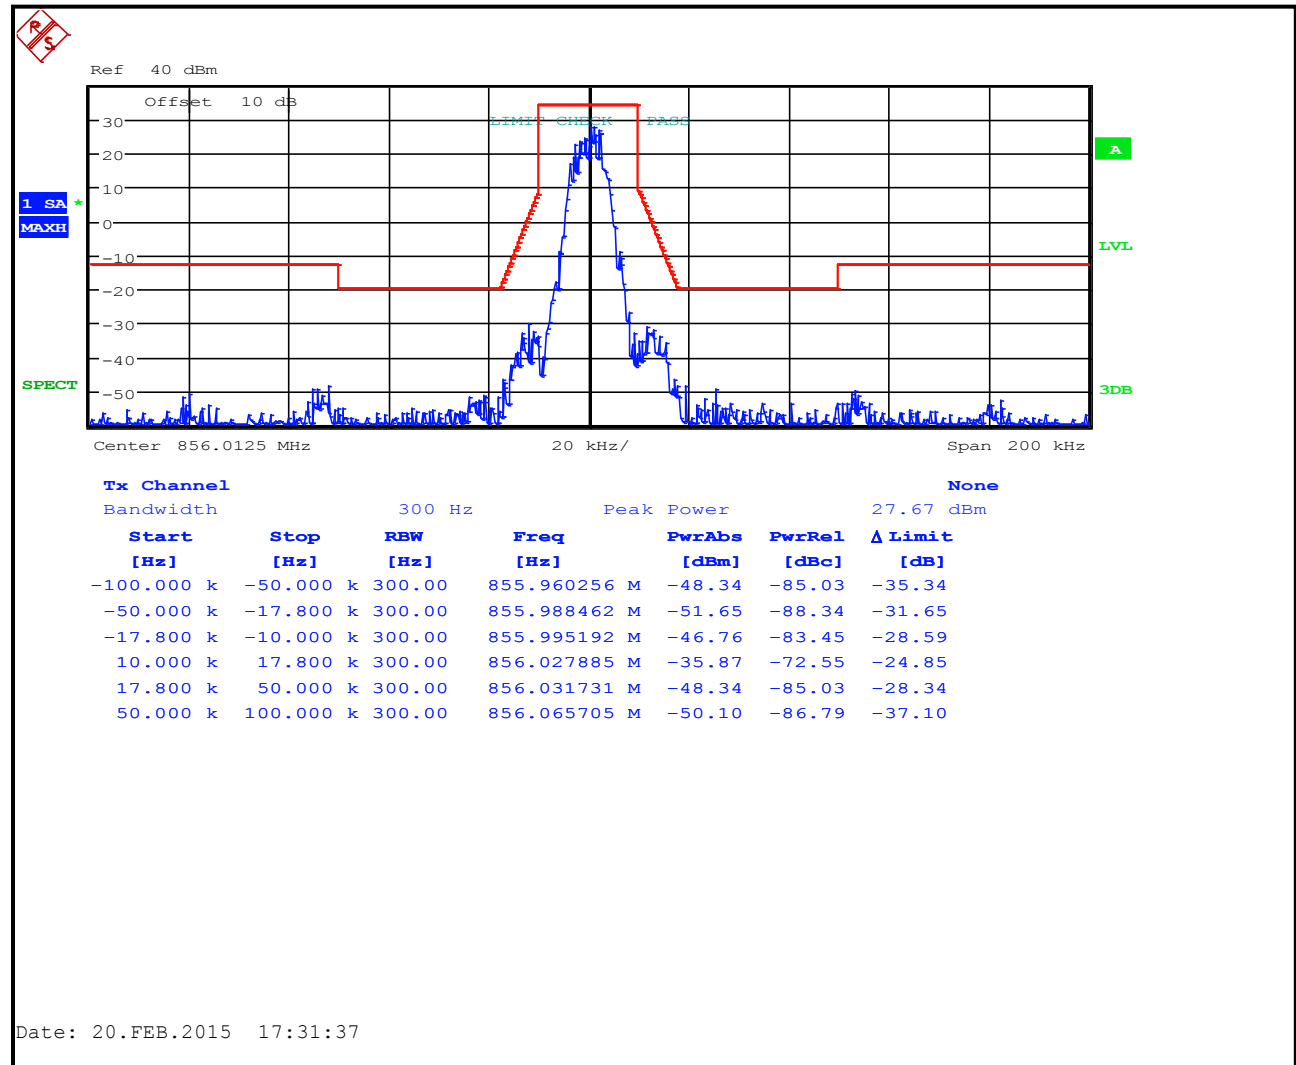

Plot 8-36: Occupied Bandwidth – 860.9875 MHz; P25 Phase 2; Mask G

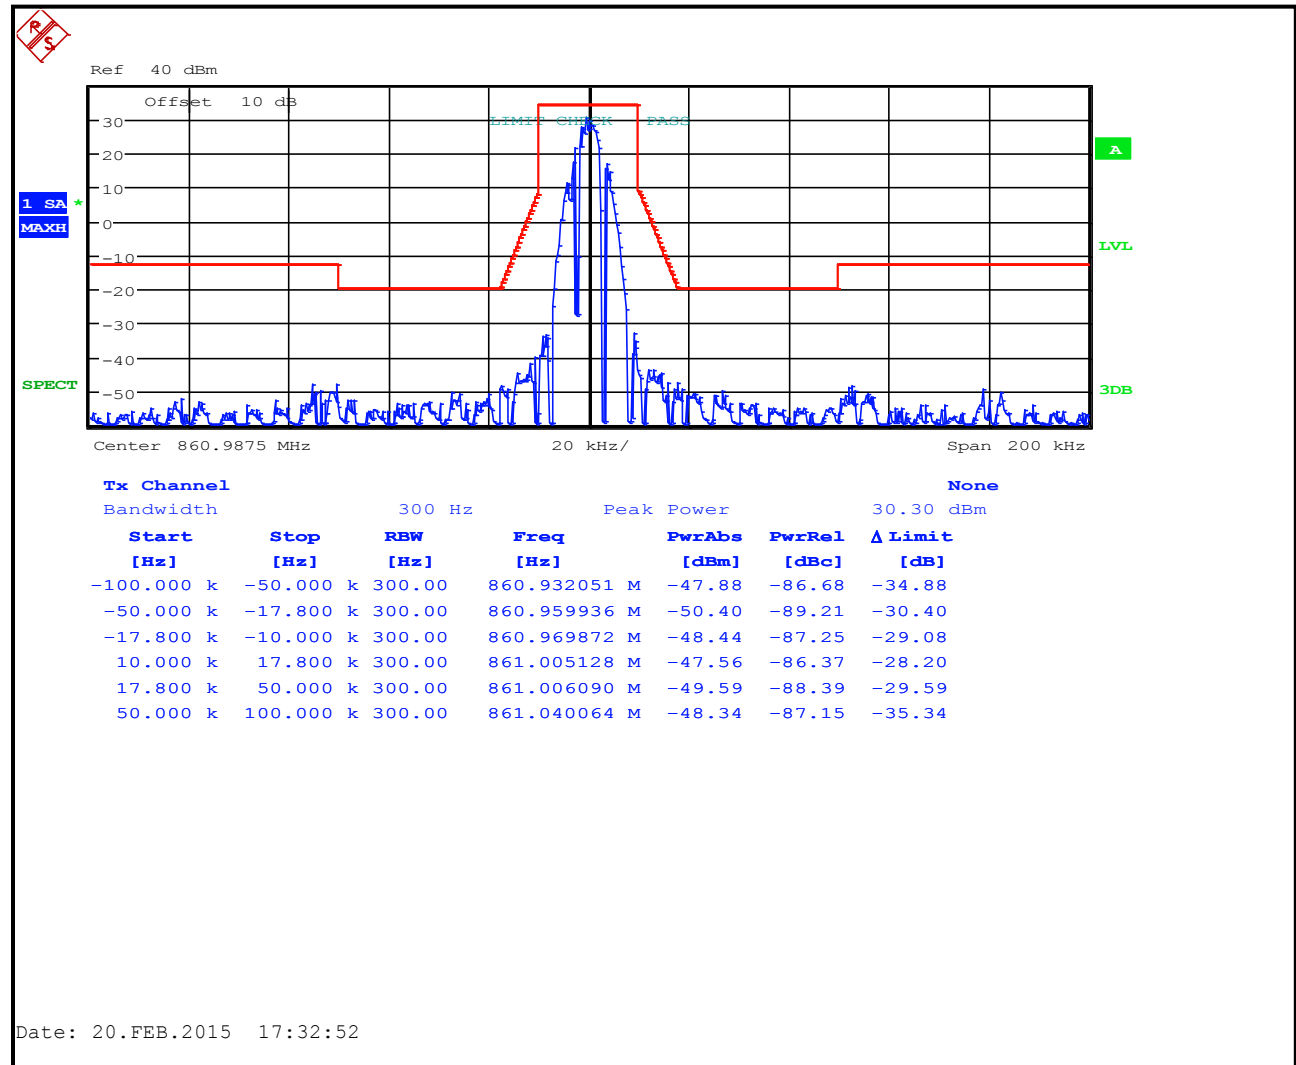

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
EUT: XG-15P 700/800 MHz
ID's: OWDTR-0134-E/3636B-0134
Standards: FCC Part 90
Report #: 2015011

Table 8-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	6/16/15
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	4/17/15

Test Personnel:

Daniel Baltzell		February 20, 2015
EMC Test Engineer	Signature	Date of Test

9 FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213, 90.539: Frequency Stability; RSS-119 5.3 Transmitter Frequency Stability

9.1 Test Procedure

ANSI/TIA/EIA-603-2004, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C. The AFC was not locked to the base station.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

Part 90.213: Mobile stations over 2 W operating power - 1.5 ppm.

Part 90.213 Frequency Stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

MINIMUM FREQUENCY STABILITY [Parts per million (ppm)]			
Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1,2,3 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5,11 5	6 5	4,6 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7,11,14 2.5	8 5	8 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁹ 300	300	300
Above 2450 ¹⁰			

Part 90.539 Frequency Stability

Transmitters designed to operate in 769–775 MHz and 799–805 MHz frequency bands must meet the frequency stability requirements in this section.

- (a) Mobile, portable and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- (b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- (c) The frequency stability of mobile, portable and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).
- (d) The frequency stability of base transmitters operating in the wideband segment must be 1 part per million or better.
- (e) The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

The EUT was tested while the AFC was not locked, therefore, the limit is 1.5 ppm. The worst-case deviation was found to be 0.2 ppm.

9.2 Test Data

Table 9-1: Temperature Frequency Stability – 768.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	768.012546	0.06
-20	768.012687	0.24
-10	768.012708	0.27
0	768.012693	0.25
10	768.012606	0.14
20 (reference)	768.012500	0.00
30	768.012467	-0.04
40	768.012463	-0.05
50	768.012488	-0.02
55	768.012506	0.01

Table 9-2: Temperature Frequency Stability – 769.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	769.012552	0.07
-20	769.012688	0.24
-10	769.012712	0.28
0	769.012696	0.25
10	769.012606	0.14
20 (reference)	769.012500	0.00
30	769.012467	-0.04
40	769.012466	-0.04
50	769.012493	-0.01
55	769.012508	0.01

Table 9-3: Temperature Frequency Stability – 772.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	772.012556	0.07
-20	772.012692	0.25
-10	772.012714	0.28
0	772.012698	0.26
10	772.012604	0.14
20 (reference)	772.012500	0.00
30	772.012468	-0.04
40	772.012468	-0.04
50	772.012493	-0.01
55	772.012509	0.01

Table 9-4: Temperature Frequency Stability – 774.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	774.987558	0.08
-20	774.987700	0.26
-10	774.987719	0.28
0	774.987697	0.25
10	774.987606	0.14
20 (reference)	774.987500	0.00
30	774.987468	-0.04
40	774.987469	-0.04
50	774.987495	-0.01
55	774.987510	0.01

Table 9-5: Temperature Frequency Stability – 775.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	775.987559	0.08
-20	775.987706	0.27
-10	775.987719	0.28
0	775.987700	0.26
10	775.987606	0.14
20 (reference)	775.987500	0.00
30	775.987467	-0.04
40	775.987468	-0.04
50	775.987495	-0.01
55	775.987511	0.01

Table 9-6: Temperature Frequency Stability – 798.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	798.012562	0.08
-20	798.012717	0.27
-10	798.012726	0.28
0	798.012705	0.26
10	798.012610	0.14
20 (reference)	798.012500	0.00
30	798.012467	-0.04
40	798.012469	-0.04
50	798.012497	0.00
55	798.012511	0.01

Table 9-7: Temperature Frequency Stability – 799.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	799.012564	0.08
-20	799.012721	0.28
-10	799.012729	0.29
0	799.012706	0.26
10	799.012610	0.14
20 (reference)	799.012500	0.00
30	799.012468	-0.04
40	799.012469	-0.04
50	799.012497	0.00
55	799.012512	0.02

Table 9-8: Temperature Frequency Stability – 801.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	801.012570	0.09
-20	801.012726	0.28
-10	801.012730	0.29
0	801.012706	0.26
10	801.012610	0.14
20 (reference)	801.012500	0.00
30	801.012468	-0.04
40	801.012469	-0.04
50	801.012498	0.00
55	801.012512	0.02

Table 9-9: Temperature Frequency Stability – 804.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	804.987567	0.08
-20	804.987729	0.28
-10	804.987732	0.29
0	804.987707	0.26
10	804.987611	0.14
20 (reference)	804.987500	0.00
30	804.987468	-0.04
40	804.987470	-0.04
50	804.987499	0.00
55	804.987513	0.02

Table 9-10: Temperature Frequency Stability – 806.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	806.012569	0.09
-20	806.012734	0.29
-10	806.012731	0.29
0	806.012708	0.26
10	806.012612	0.14
20 (reference)	806.012500	0.00
30	806.012469	-0.04
40	806.012471	-0.04
50	806.012500	0.00
55	806.012514	0.02

Table 9-11: Temperature Frequency Stability – 811.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	811.012570	0.09
-20	811.012735	0.29
-10	811.012733	0.29
0	811.012708	0.26
10	811.012613	0.14
20 (reference)	811.012500	0.00
30	811.012468	-0.04
40	811.012470	-0.04
50	811.012499	0.00
55	811.012512	0.02

Table 9-12: Temperature Frequency Stability – 815.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	815.987571	0.09
-20	815.987738	0.29
-10	815.987733	0.29
0	815.987708	0.25
10	815.987613	0.14
20 (reference)	815.987500	0.00
30	815.987468	-0.04
40	815.987470	-0.04
50	815.987499	0.00
55	815.987512	0.01

Table 9-13: Temperature Frequency Stability – 851.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	851.012581	0.09
-20	851.012749	0.29
-10	851.012744	0.29
0	851.012719	0.26
10	851.012618	0.14
20 (reference)	851.012500	0.00
30	851.012466	-0.04
40	851.012470	-0.04
50	851.012500	0.00
55	851.012513	0.02

Table 9-14: Temperature Frequency Stability – 856.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	856.0125 80	0.09
-20	856.012751	0.29
-10	856.012743	0.28
0	856.012720	0.26
10	856.012618	0.14
20 (reference)	856.0125 00	0.00
30	856.012466	-0.04
40	856.012469	-0.04
50	856.0125 00	0.00
55	856.0125 13	0.01

Table 9-15: Temperature Frequency Stability – 860.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	860.987580	0.09
-20	860.987754	0.30
-10	860.987744	0.28
0	860.987722	0.26
10	860.987620	0.14
20 (reference)	860.987500	0.00
30	860.987467	-0.04
40	860.987469	-0.04
50	860.987501	0.00
55	860.987513	0.02

Results: The EUT is compliant.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
EUT: XG-15P 700/800 MHz
ID's: OWDTR-0134-E/3636B-0134
Standards: FCC Part 90
Report #: 2015011

Table 9-16: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901350	Meterman	33XR	Multimeter	040402802	3/20/15
901300	Agilent	53131A (225 MHz)	Universal Frequency Counter	MY40001345	3/5/16
900819	Weinschel Corp	2	10 dB Attenuator; 5 W	BF0830	7/1/15

Test Personnel:

Daniel Baltzell		February 19, 2015
EMC Test Engineer	Signature	Date of Test

9.2.1 Frequency Stability/Voltage Variation

Table 9-17: Frequency Stability/Voltage Variation – 768.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	768.012483	-0.02
6.375	768.012491	-0.01
7.5 (reference)	768.012500	0.00
8.625	768.012489	-0.01

Table 9-18: Frequency Stability/Voltage Variation – 769.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	769.012478	-0.03
6.375	769.012491	-0.01
7.5 (reference)	769.012500	0.00
8.625	769.012488	-0.02

Table 9-19: Frequency Stability/Voltage Variation – 772.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	772.012484	-0.02
6.375	772.012492	-0.01
7.5 (reference)	772.012500	0.00
8.625	772.012488	-0.02

Table 9-20: Frequency Stability/Voltage Variation – 774.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	774.987483	-0.02
6.375	774.987492	-0.01
7.5 (reference)	774.987500	0.00
8.625	774.987489	-0.01

Table 9-21: Frequency Stability/Voltage Variation – 775.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	775.987483	-0.02
6.375	775.987486	-0.02
7.5 (reference)	775.987500	0.00
8.625	775.987488	-0.02

Table 9-22: Frequency Stability/Voltage Variation – 798.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	798.012223	-0.35
6.375	798.012223	-0.35
7.5 (reference)	798.012500	0.00
8.625	798.012223	-0.35

Table 9-23: Frequency Stability/Voltage Variation – 799.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	799.012223	-0.35
6.375	799.012249	-0.31
7.5 (reference)	799.012500	0.00
8.625	799.012488	-0.01

Table 9-24: Frequency Stability/Voltage Variation – 801.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	801.012483	-0.02
6.375	801.012493	-0.01
7.5 (reference)	801.012500	0.00
8.625	801.012488	-0.01

Table 9-25: Frequency Stability/Voltage Variation – 804.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	804.987483	-0.02
6.375	804.987492	-0.01
7.5 (reference)	804.987500	0.00
8.625	804.987488	-0.01

Table 9-26: Frequency Stability/Voltage Variation – 806.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	806.012484	-0.02
6.375	806.012489	-0.01
7.5 (reference)	806.012500	0.00
8.625	806.012488	-0.01

Table 9-27: Frequency Stability/Voltage Variation – 811.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	811.012484	-0.02
6.375	811.012493	-0.01
7.5 (reference)	811.012500	0.00
8.625	811.012489	-0.01

Table 9-28: Frequency Stability/Voltage Variation – 815.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	815.987482	-0.02
6.375	815.987493	-0.01
7.5 (reference)	815.987500	0.00
8.625	815.987488	-0.02

Table 9-29: Frequency Stability/Voltage Variation – 851.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	851.012483	-0.02
6.375	851.012493	-0.01
7.5 (reference)	851.012500	0.00
8.625	851.012488	-0.01

Table 9-30: Frequency Stability/Voltage Variation – 856.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	856.012265	-0.27
6.18	856.012488	-0.01
6.375	856.0125 00	0.00
7.5	856.012487	-0.02
8.625	856.012265	-0.27

Table 9-31: Frequency Stability/Voltage Variation – 860.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6 (end of battery)	860.987482	-0.02
6.18	860.987493	-0.01
6.375	860.987500	0.00
7.5	860.987497	0.00
8.625	860.987482	-0.02

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
EUT: XG-15P 700/800 MHz
ID's: OWDTR-0134-E/3636B-0134
Standards: FCC Part 90
Report #: 2015011

Table 9-32: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901350	Meterman	33XR	Multimeter	040402802	3/20/15
901300	Agilent	53131A (225 MHz)	Universal Frequency Counter	MY40001345	2/29/15
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	3/25/16

Test Personnel:

Daniel Baltzell		February 19, 2015
EMC Test Engineer	Signature	Date of Test

10 FCC Part 2.1047: Modulation Characteristics; RSS-119 5.8 Types of Modulation

10.1 Test Procedures

10.1.1 Audio Frequency Response

ANSI/TIA/EIA-603-2004, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = $20 \text{ LOG (DEVfreq/DEVref)}$

10.1.2 Audio Low Pass Filter Response

ANSI/TIA/EIA-603-2004, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

10.1.3 Modulation Limiting


ANSI/TIA/EIA-603-2004, section 2.2.3

The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.


10.2 Test Data

10.2.1 Audio Frequency Response

Plot 10-1: Modulation Characteristics - Audio Frequency Response – 772.0125 MHz (NB)

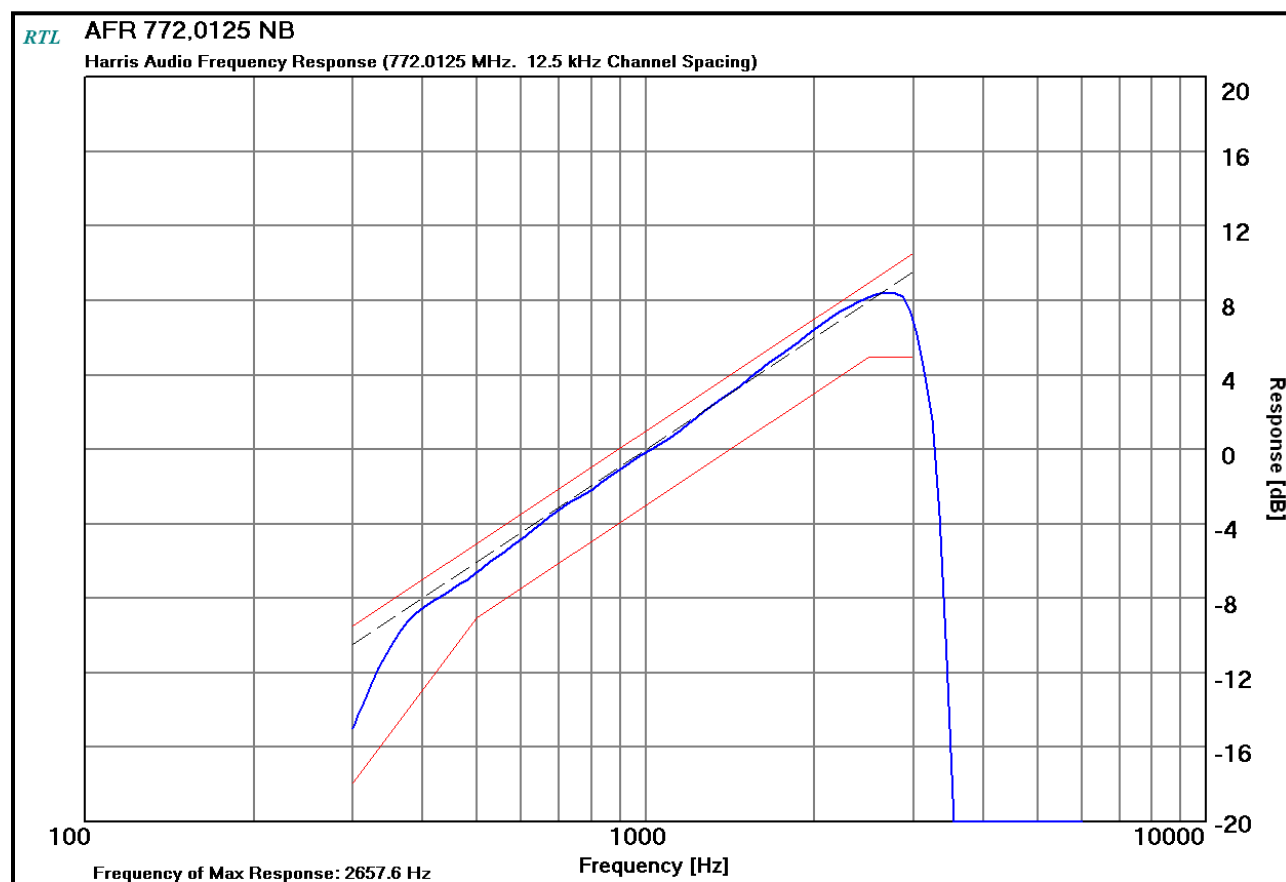


Plot 10-2: Modulation Characteristics - Audio Frequency Response – 856.0125 MHz (WB)

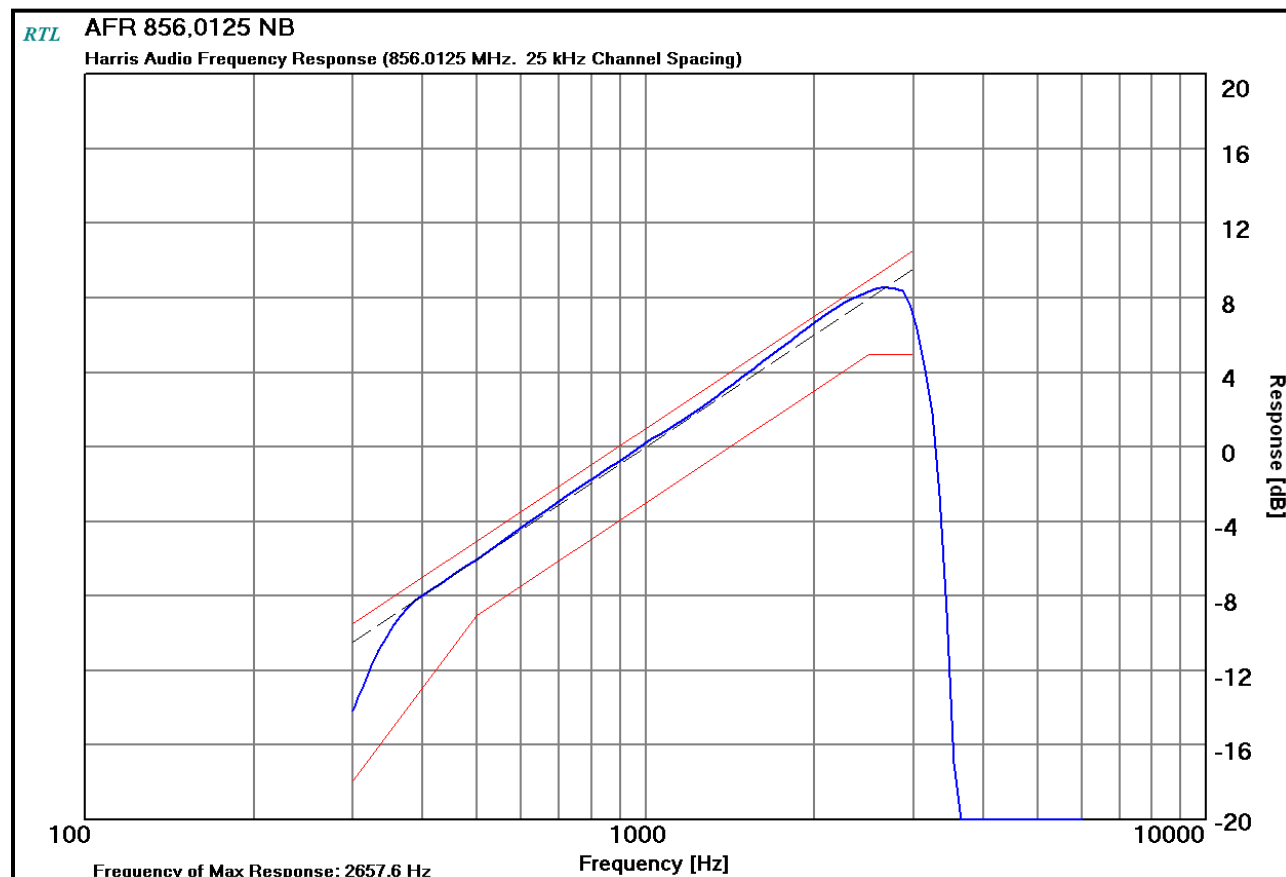


10.2.2 Audio Low Pass Filter Response

Plot 10-3: Modulation Characteristics – Audio Low Pass Filter – 772.0125 MHz (NB)

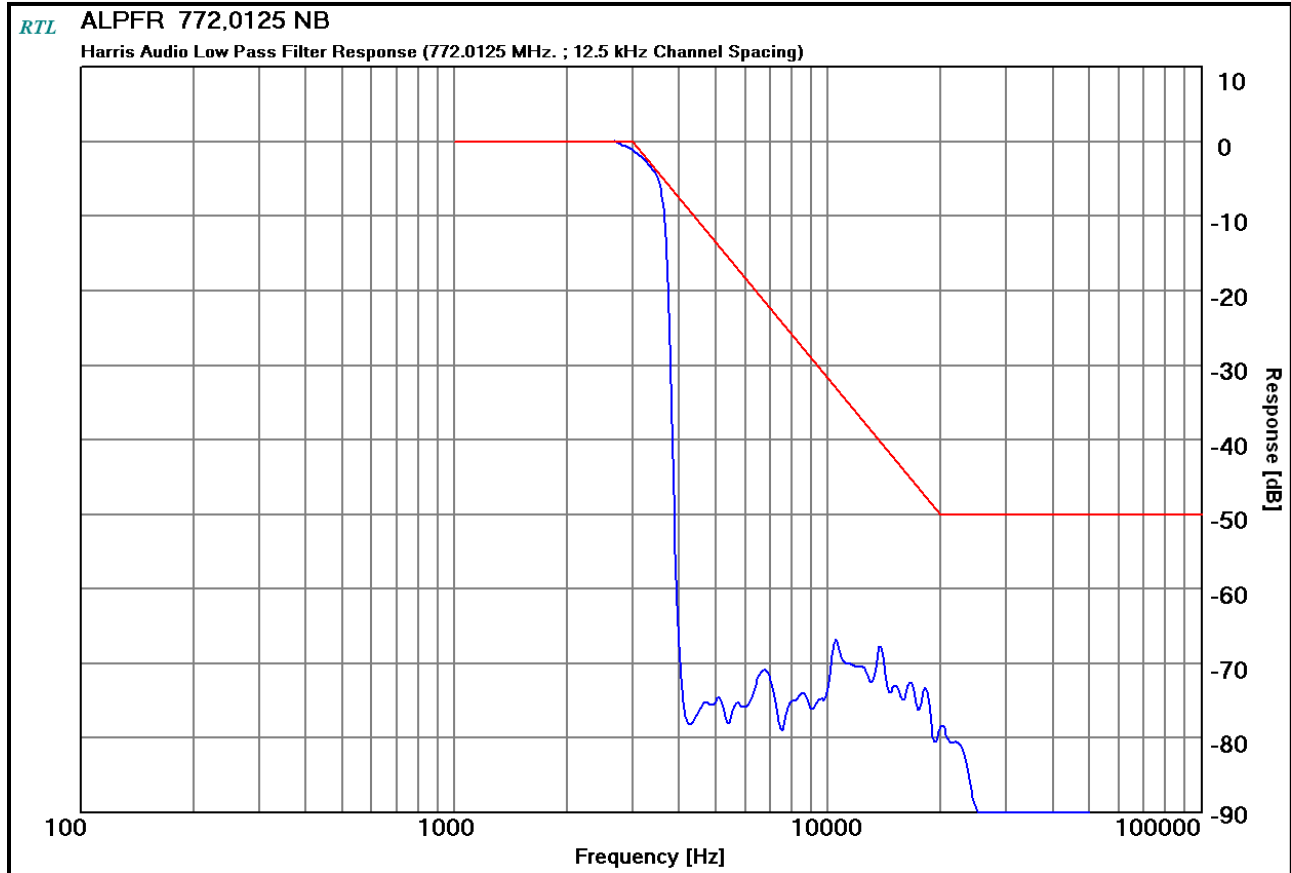


Plot 10-4: Modulation Characteristics – Audio Low Pass Filter – 856.0125 MHz (WB)

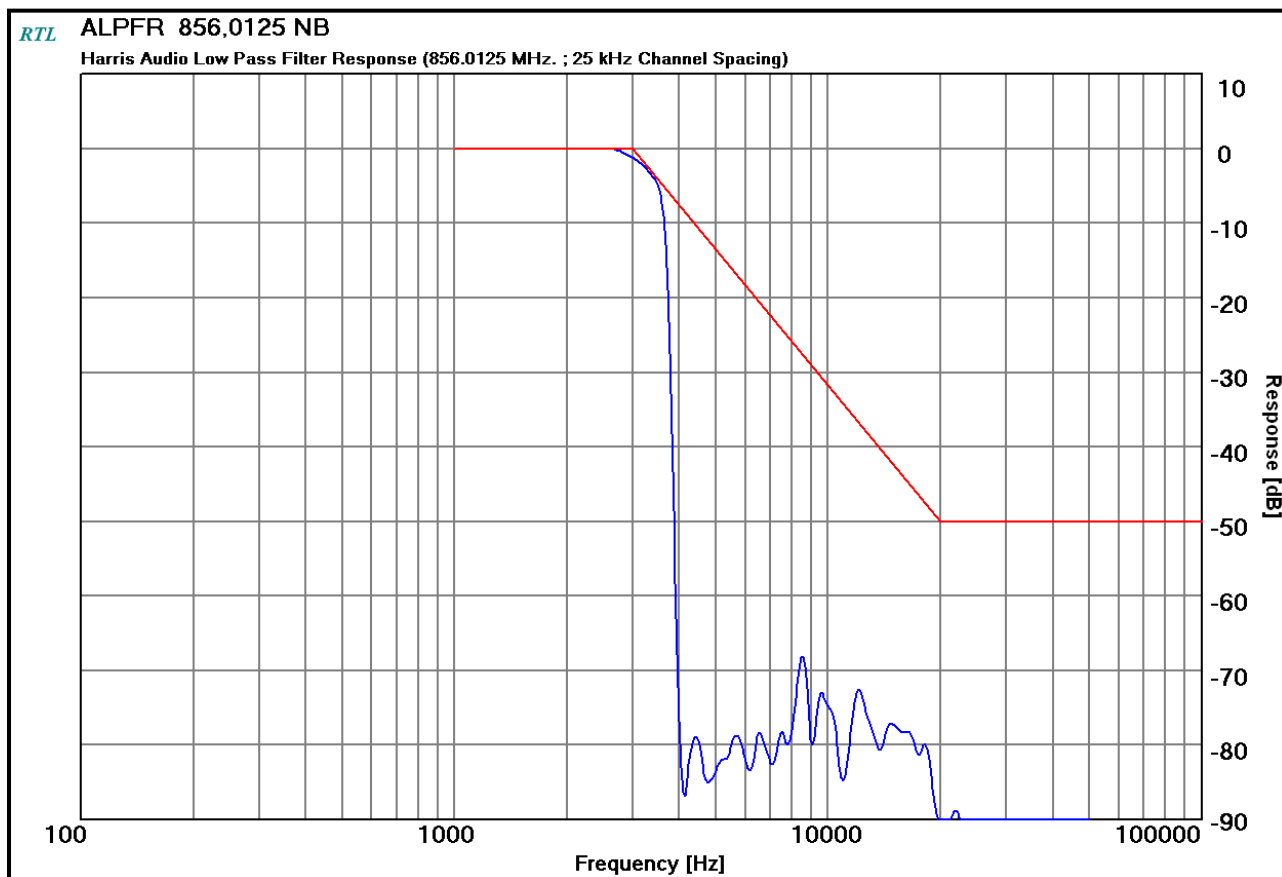


10.2.3 Modulation Limiting


Plot 10-5: Modulation Characteristics – Modulation Limiting – 772.0125 MHz; NB; Positive Peak

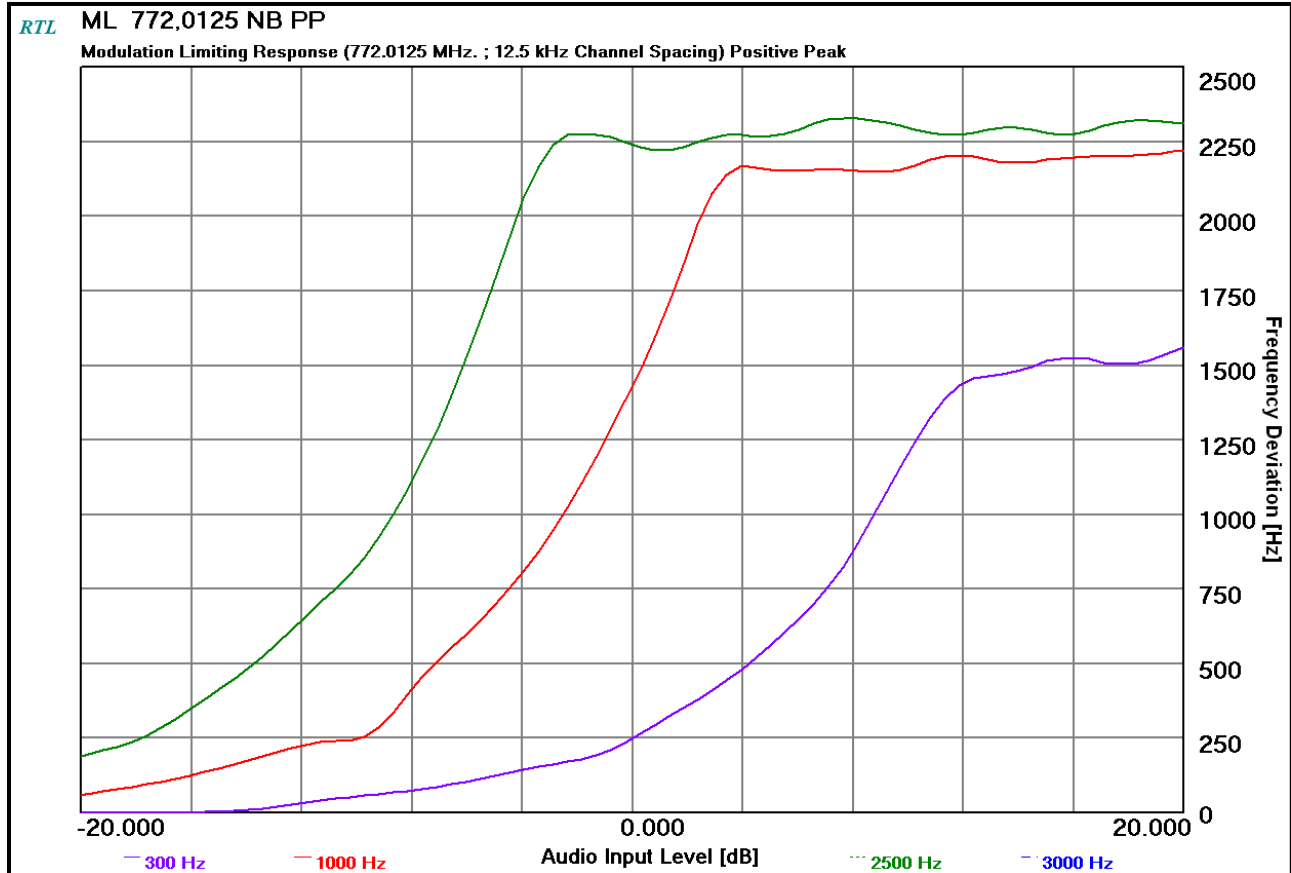


Plot 10-6: Modulation Characteristics – Modulation Limiting - 772.0125 MHz; (NB) Negative Peak

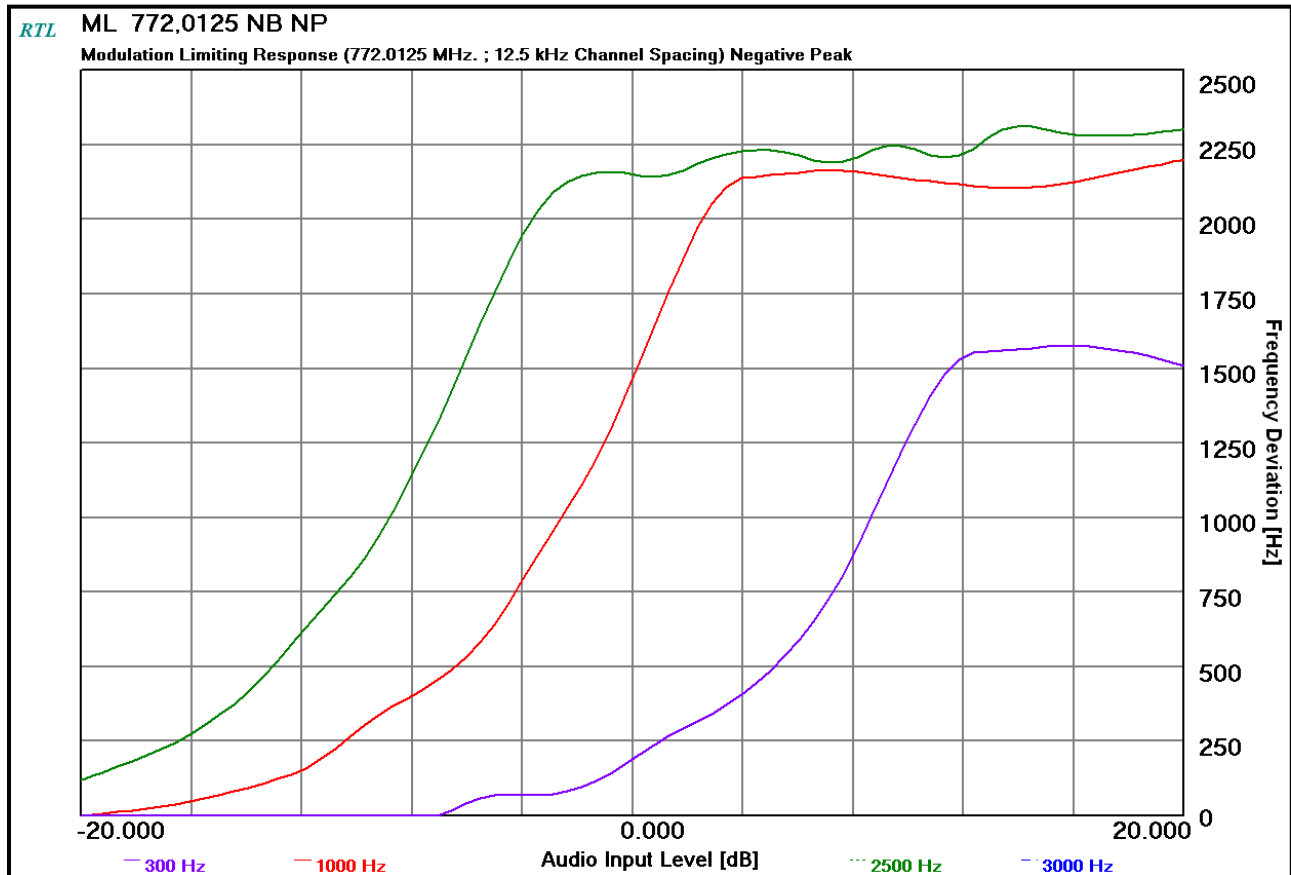


Plot 10-7: Modulation Characteristics – Modulation Limiting – 856.0125 MHz, WB, Positive Peak

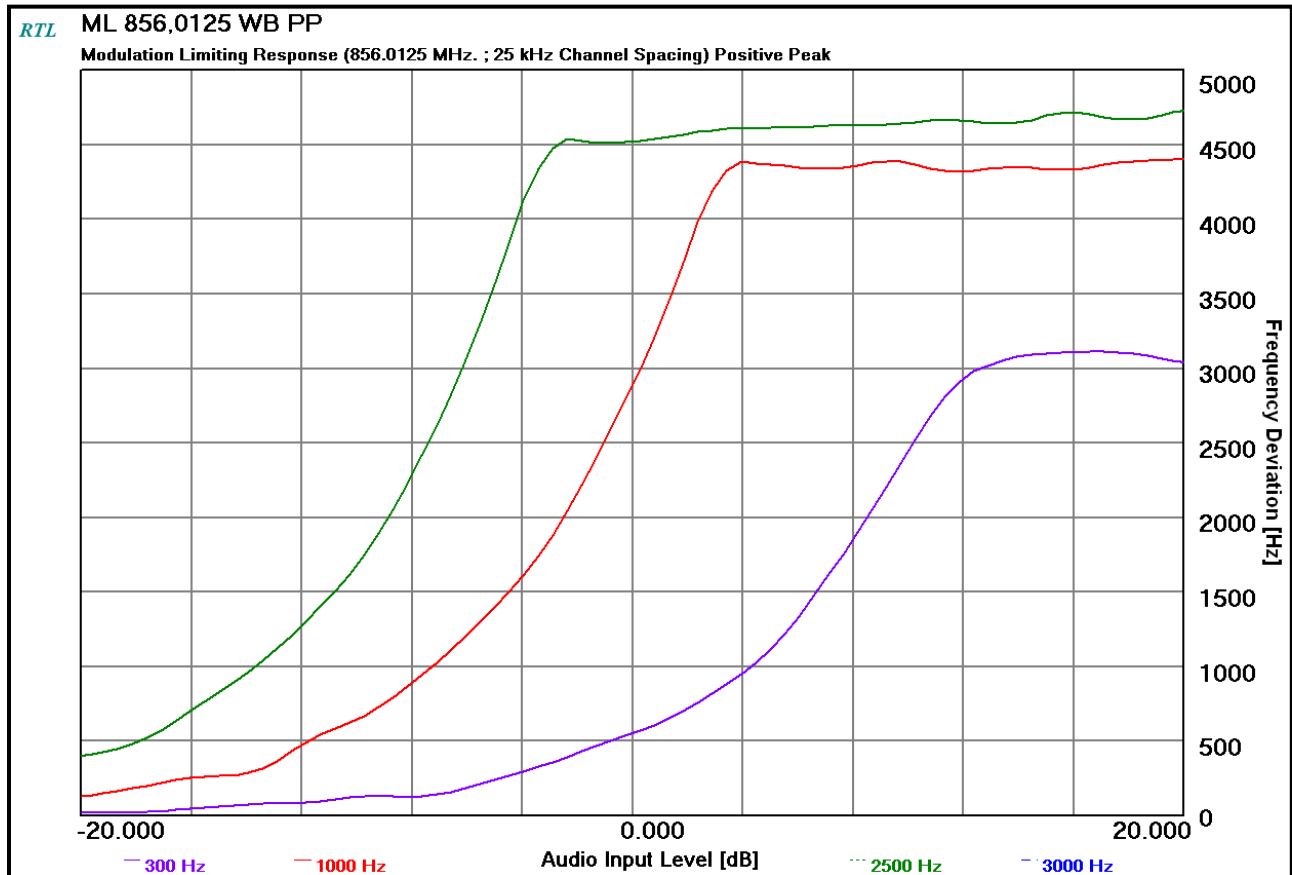

Plot 10-8: Modulation Characteristics – Modulation Limiting – 856.0125 MHz, WB, Negative Peak

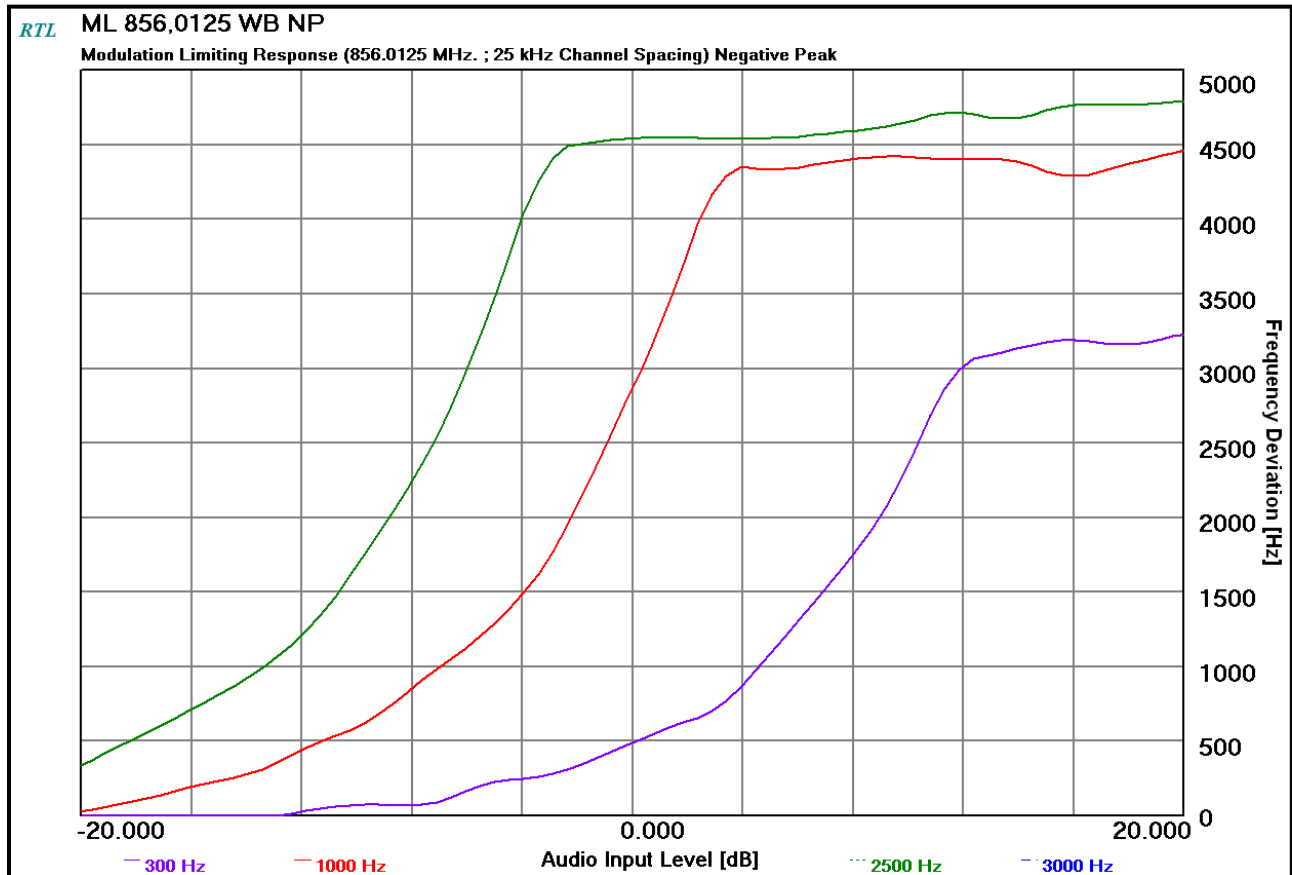

Plot 10-9: Modulation Characteristics – Modulation Limiting – 806.0125 MHz, WB (NPSPAC), Positive Peak

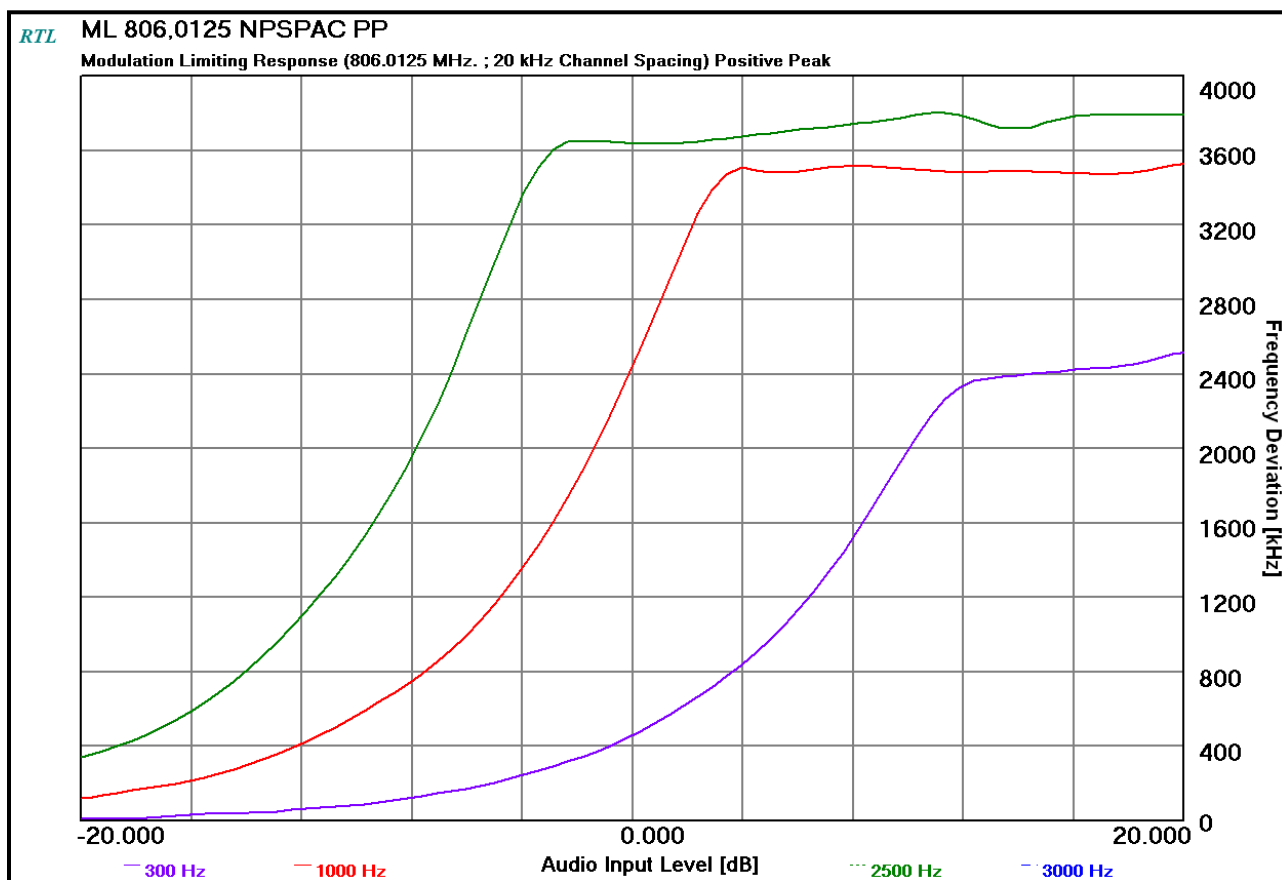

Plot 10-10: Modulation Characteristics – Modulation Limiting – 806.0125 MHz, WB (NPSPAC), Negative Peak

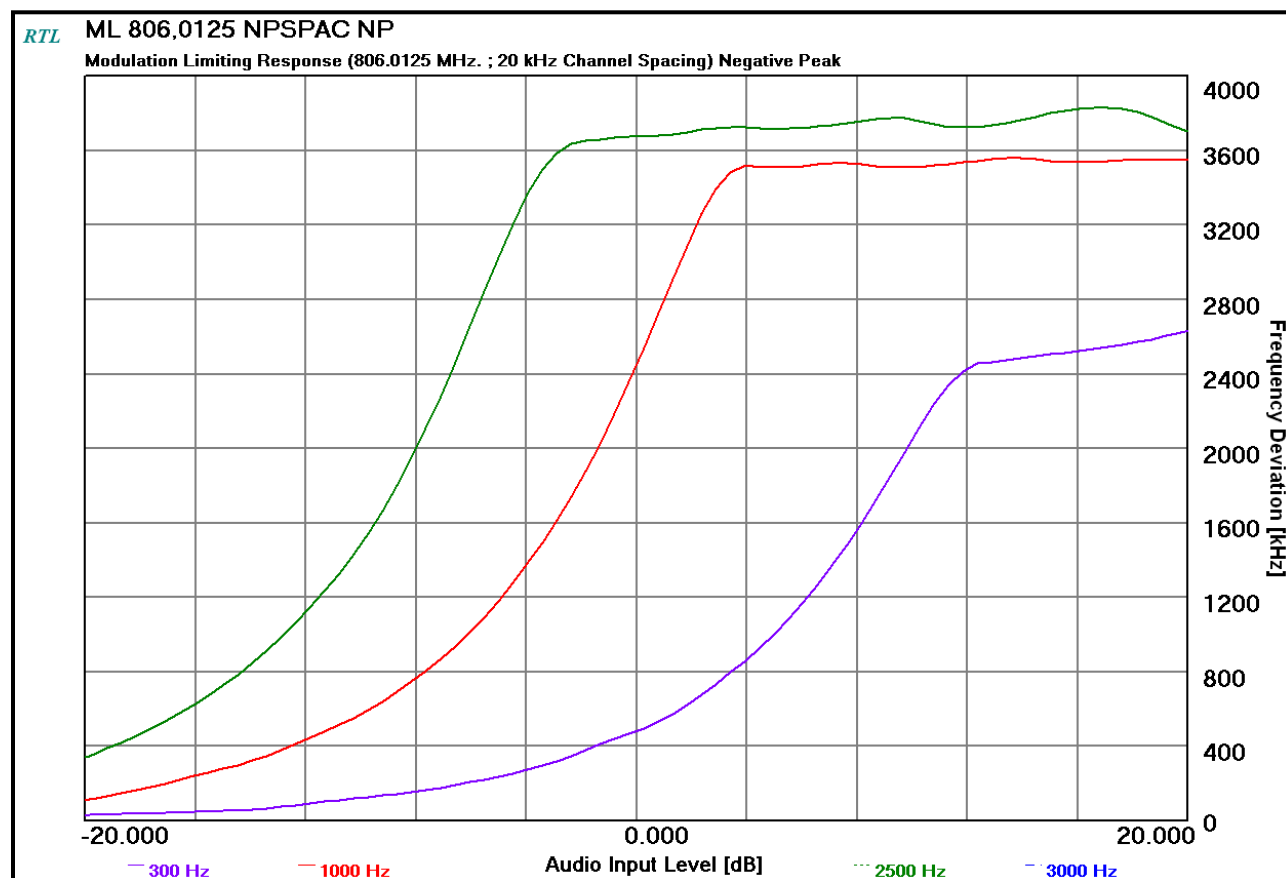


Table 10-1: Test Equipment Used For Testing Modulation Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	4/17/15
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	4/1/15
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	6/16/15

Test Personnel:

Daniel Baltzell
EMC Test Engineer

Signature

February 25-26, 2015
Dates of Test

11 FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

Voice – 12.5 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times DK = 11.0 \text{ kHz}$

Emission designator: 11K0F3E

Voice – 25 kHz channel separation (NPSPAC)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times DK = 14.0 \text{ kHz}$

Emission designator: 14K0F3E

Voice – 25 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times DK = 16.0 \text{ kHz}$

Emission designator: 16K0F3E

P25 – 9600 bps

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = \lceil 9600 / \log_2(4) \rceil + 2 (1800) (1) = 8.400 \text{ kHz}$

Emission designator: 8K40F1D, 8K40F1E

P25 Phase 2 Data/Voice (H-CPM TDMA) (12.5 kHz)

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 1050

$B_n = \lceil 12000 / \log_2(4) \rceil + 2 (1050) (1) = 8.1 \text{ kHz}$

Emission designator: 8K10DXW

12 Conclusion

The data in this measurement report shows that the Harris Corporation XG-15P 700/800 MHz Portable Radio, Model XR-PF78B, FCC ID: OWDTR-0134-E, IC: 3636B-0134, complies with all the applicable requirements of Parts 90 and 2 of the FCC Rules and Industry Canada RSS-119.