



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Contact: Paresh Chauhan
pchauhan@harris.com

XL-200P C1D1 Non-Rebanded

FCC ID: OWDTR-0146-E
IC: 3636B-0146

June 27, 2017

Standards Referenced for this Report	
Part 2: 2016	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 22: 2016	Public Mobile Services
Part 74: 2016	Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services
Part 80: 2016	Stations in the Maritime Services
Part 90: 2016	Private Land Mobile Radio Services
RSS-119 Issue 12	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz
ANSI C63.26: 2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Report Prepared By: Daniel W. Baltzell

Document Number: 2017007TNF

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB. Refer to certificate and scope of accreditation AT-1445.

Frequency Range (MHz)	Rated Conducted Output Power (W)	Frequency Tolerance (ppm)	Transmit Mode	Emission Designator
136 – 174	1 - 6	0.9	2-level FSK 4800 Data / Digital Voice (XNarrowband) / EDACS	7K10F1D/E
400 – 470	1 - 5	0.6	2-level FSK 4800 Data/Digital Voice (XNarrowband) / EDACS	7K10F1D/E
136 – 174	1 - 6	0.9	C4FM Data/Voice / P25 Phase 1	8K40F1D/E
378 – 522	1 - 5	0.6	C4FM Data/Voice / P25 Phase 1	8K40F1D/E
769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	C4FM Data/Voice / P25 Phase 1	8K40F1D/E
136 – 174	1 - 6	0.9	H-CPM (TDMA) Data/Voice / P25 Phase 2	8K10DXW
378 – 522	1 - 5	0.6	H-CPM (TDMA) Data/Voice / P25 Phase 2	8K10DXW
769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	H-CPM (TDMA) Data/Voice / P25 Phase 2	8K10DXW
136 – 174	1 - 6	0.9	Analog FM (Wideband) / EDACS/CONV	16K0F3E
378 – 522	1 - 5	0.6	Analog FM (Wideband) / EDACS/CONV	16K0F3E
806 – 824 851 – 869	0.5 - 3	0.2	Analog FM (Wideband) / EDACS/CONV	16K0F3E
136 – 174	1 - 6	0.9	2-level FSK 9600 Data/Digital Voice (Wideband) / EDACS	16K0F1D/E
378 – 522	1 - 5	0.6	2-level FSK 9600 Data/Digital Voice (Wideband) / EDACS	16K0F1D/E
806 – 824 851 – 869	0.5 - 3	0.2	2-level FSK 9600 Data/Digital Voice (Wideband) / EDACS	16K0F1D/E
136 – 174	1 - 6	0.9	Analog FM (Narrowband) / EDACS/CONV	11K0F3E
378 – 522	1 - 5	0.6	Analog FM (Narrowband) / EDACS/CONV	11K0F3E
769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	Analog FM (Narrowband) / EDACS/CONV	11K0F3E
136 – 174	1 - 6	0.9	2-level FSK 9600 Data/Digital Voice (Narrowband) / EDACS	11K7F1D/E
378 – 522	1 - 5	0.6	2-level FSK 9600 Data/Digital Voice (Narrowband) / EDACS	11K7F1D/E
769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	2-level FSK 9600 Data/Digital Voice (Narrowband) / EDACS	11K7F1D/E

769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	4-level FSK Data/Voice (Narrowband) / OpenSky	8K40F9W
769 – 775 (FCC) 768 – 776 (ISED) 799 – 805 (FCC) 798 – 806 (ISED) 806 – 824 851 – 869	0.5 - 3	0.2	4-level FSK Data/Voice (SMR) / OpenSky	15K4F9W
806 – 809 851 – 854	0.5 - 3	0.2	Analog FM (NPSPAC) / EDACS	14K0F3E
806 – 809 851 – 854	0.5 - 3	0.2	2-level FSK 9600 Data/Digital Voice (NPSPAC) / EDACS	14K0F1D/E
806 – 809 851 – 854	0.5 - 3	0.2	4-level FSK Data/Voice (NPSPAC) / OpenSky	12K1F9W

Note: As this is a combined FCC and ISED test report, there is test data between 768 – and 769 MHz, 775 – 776 MHz, 798 – 799 MHz and 805 – 806 MHz for frequencies that are only authorized for use in Canada; that is, any test data in the aforementioned frequency ranges is not applicable for the FCC, nor authorized for use in the United States.

Table of Contents

1	Test Result Summary	13
2	General Information	13
2.1	Test Facility	13
2.2	Related Submittal(s)/Grant(s)	13
2.3	Grant Notes	13
2.4	Tested System Details	14
3	FCC §2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage	15
4	FCC §2.1046(a): RF Power Output: Conducted, §90.541: Transmitting Power Limits; §80.215: Transmitter Power; §22.659: Effective Radiated Power Limits; §74.461: Transmitter Power; RSS-119 5.4: Transmitter Power	15
4.1	Test Procedure	15
4.2	Test Data	16
5	FCC §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emission Limitations; §80.217: Suppression of Interference Aboard Ships; §22.359: Emission Limitations; RSS-119 5.8.9.2: Out-of-band Emission Limit	18
5.1	Test Procedure	18
5.2	Test Data	19
6	FCC §90.543(a): Emission Limitations: ACP Requirements; RSS-119 4.3: Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 768-776 MHz and 798-806 MHz	20
6.1	Test Procedure	20
6.2	Test Data	22
7	FCC §90.210(g) and §2.1053(a): Field Strength of Spurious Radiation; §90.210, §90.543(f)(3): Out of Band Emissions Limit; RSS-119 5.8.9.2: Out-of-band Emission Limit	35
7.1	Test Procedure	35
7.2	Test Data	35
7.2.1	§90.210 Requirements	35
7.2.2	§90.543(f) Requirements	40
8	FCC §2.1049(c)(1): Occupied Bandwidth; §90.543(d), §90.210 Authorized Bandwidth; §74.462: Authorized Bandwidth and Emissions; §80.205: Bandwidths; §80.211: Emission Limitations; RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks	42
8.1	Test Procedure	42
8.2	Test Data	44
9	FCC §2.1055: Frequency Stability; §22.355: Frequency Tolerance; §74.464: Frequency Tolerance; §80.209: Frequency Stability; §90.213, §90.539: Frequency Stability; RSS-119 5.3 Transmitter Frequency Stability	174
9.1	Test Procedure	174
9.2	Test Data	175
9.2.1	Frequency Stability/Voltage Variation	178
10	FCC §2.1047(a)(b): Modulation Characteristics; §74.463: Modulation Requirements; §80.213: Modulation Requirements; RSS-119 5.2: Types of Modulation	180
10.1	Test Procedures	180
10.1.1	Audio Frequency Response	180
10.1.2	Audio Low Pass Filter Response	180
10.1.3	Modulation Limiting	180
10.2	Test Data	181
10.2.1	Audio Frequency Response	181
10.2.2	Audio Low Pass Filter Response	188
10.2.3	Modulation Limiting	198

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: XL-200P C1D1 Non-Rebanded
ID's: OWDTR-0146-E/3636B-0146
Standards: FCC §22, 74, 80, 90/IC RSS-119
Report #: 2017007TNF

11	FCC §74.462(c): Authorized Bandwidth and Emissions; §90.214: Transient Frequency Response; RSS-	
119	5.9: Transient Frequency Behavior.....	230
11.1	Test Procedure	230
11.2	Test Data	231
12	FCC §2.202: Necessary Bandwidth and Emission Bandwidth	240
13	Conclusion	242

Table of Figures

Figure 2-1: Configuration of Tested System.....	14
---	----

Table of Tables

Table 2-1: Equipment Under Test (EUT).....	14
Table 4-1: RF Conducted Output Power - Measured.....	16
Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted	17
Table 5-1: Test Equipment Used For Testing Spurious Emissions	19
Table 6-1: Adjacent Channel Power - 775.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing	22
Table 6-2: Adjacent Channel Power - 804.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing	23
Table 6-3: Adjacent Channel Power - 775.9875MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing	24
Table 6-4: Adjacent Channel Power - 804.9875 MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing	25
Table 6-5: Adjacent Channel Power - 775.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing	26
Table 6-6: Adjacent Channel Power - 804.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing	27
Table 6-7: Adjacent Channel Power - 775.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing	28
Table 6-8: Adjacent Channel Power - 804.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing	29
Table 6-9: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing	30
Table 6-10: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing	31
Table 6-11: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing	32
Table 6-12: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing	33
Table 6-13: Test Equipment Used For Testing ACP Requirements	34
Table 7-1: Field Strength of Spurious Radiation; 136 MHz	35
Table 7-2: Field Strength of Spurious Radiation; 138 MHz	35
Table 7-3: Field Strength of Spurious Radiation; 141 MHz	36
Table 7-4: Field Strength of Spurious Radiation; 144 MHz	36
Table 7-5: Field Strength of Spurious Radiation; 156.8 MHz	36
Table 7-6: Field Strength of Spurious Radiation; 162 MHz	36
Table 7-7: Field Strength of Spurious Radiation; 174 MHz	36
Table 7-8: Field Strength of Spurious Radiation; 378 MHz	37
Table 7-9: Field Strength of Spurious Radiation; 406.1 MHz	37
Table 7-10: Field Strength of Spurious Radiation; 418 MHz	37
Table 7-11: Field Strength of Spurious Radiation; 430 MHz	37
Table 7-12: Field Strength of Spurious Radiation; 450 MHz	37
Table 7-13: Field Strength of Spurious Radiation; 454 MHz	38
Table 7-14: Field Strength of Spurious Radiation; 456 MHz	38
Table 7-15: Field Strength of Spurious Radiation; 459.025 MHz	38
Table 7-16: Field Strength of Spurious Radiation; 459.975 MHz	38
Table 7-17: Field Strength of Spurious Radiation; 470 MHz	38
Table 7-18: Field Strength of Spurious Radiation; 512 MHz	39
Table 7-19: Field Strength of Spurious Radiation; 522 MHz	39
Table 7-20: Field Strength of Spurious Radiation; 768 MHz	39
Table 7-21: Field Strength of Spurious Radiation; 769 MHz	39
Table 7-22: Field Strength of Spurious Radiation; 771 MHz	39

Table 7-23:	Field Strength of Spurious Radiation.....	40
Table 7-24:	Test Equipment Used For Testing Field Strength of Spurious Radiation.....	40
Table 8-1:	Test Equipment Used For Testing Occupied Bandwidth.....	173
Table 9-1:	Temperature Frequency Stability – 162 MHz.....	175
Table 9-2:	Temperature Frequency Stability – 418 MHz.....	176
Table 9-3:	Temperature Frequency Stability – 470 MHz.....	176
Table 9-4:	Temperature Frequency Stability – 768 MHz.....	176
Table 9-5:	Temperature Frequency Stability – 798 MHz.....	177
Table 9-6:	Temperature Frequency Stability – 815 MHz.....	177
Table 9-7:	Temperature Frequency Stability – 860 MHz.....	177
Table 9-8:	Frequency Stability/Voltage Variation – 162 MHz.....	178
Table 9-9:	Frequency Stability/Voltage Variation – 418 MHz.....	178
Table 9-10:	Frequency Stability/Voltage Variation – 470 MHz.....	178
Table 9-11:	Frequency Stability/Voltage Variation – 768 MHz.....	178
Table 9-12:	Frequency Stability/Voltage Variation – 798 MHz.....	178
Table 9-13:	Frequency Stability/Voltage Variation – 815 MHz.....	179
Table 9-14:	Frequency Stability/Voltage Variation – 860 MHz.....	179
Table 9-15:	Test Equipment Used For Testing Frequency Stability.....	179
Table 10-1:	Test Equipment Used For Modulation Requirements.....	229
Table 11-1:	Test Equipment Used For Testing Transient Frequency Behavior.....	239

Table of Plots

Plot 6-1:	Adjacent Channel Power - 775.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing.....	22
Plot 6-2:	Adjacent Channel Power - 804.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing.....	23
Plot 6-3:	Adjacent Channel Power - 775.9875MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing.....	24
Plot 6-4:	Adjacent Channel Power - 804.9875 MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing.....	25
Plot 6-5:	Adjacent Channel Power - 775.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing.....	26
Plot 6-6:	Adjacent Channel Power - 804.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing.....	27
Plot 6-7:	Adjacent Channel Power - 775.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing.....	28
Plot 6-8:	Adjacent Channel Power - 804.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing.....	29
Plot 6-9:	Adjacent Channel Power - 775.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing.....	30
Plot 6-10:	Adjacent Channel Power - 804.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing.....	31
Plot 6-11:	Adjacent Channel Power - 775.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing.....	32
Plot 6-12:	Adjacent Channel Power - 804.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing.....	33
Plot 8-1:	Occupied Bandwidth – 150 MHz; Analog WB (Mask B).....	44
Plot 8-2:	Occupied Bandwidth – 156.8 MHz; Analog WB (Mask B).....	45
Plot 8-3:	Occupied Bandwidth – 162 MHz; Analog WB (Mask B).....	46
Plot 8-4:	Occupied Bandwidth – 174 MHz; Analog WB (Mask B).....	47
Plot 8-5:	Occupied Bandwidth – 150 MHz; Analog NB (Mask D).....	48
Plot 8-6:	Occupied Bandwidth – 156.8 MHz; Analog NB (Mask D).....	49
Plot 8-7:	Occupied Bandwidth – 162 MHz; Analog NB (Mask D).....	50
Plot 8-8:	Occupied Bandwidth – 174 MHz; Analog NB (Mask D).....	51
Plot 8-9:	Occupied Bandwidth – 150 MHz; P25; (Mask D).....	52
Plot 8-10:	Occupied Bandwidth – 156.8 MHz; P25; (Mask D).....	53
Plot 8-11:	Occupied Bandwidth – 162 MHz; P25; (Mask D).....	54

Plot 8-12:	Occupied Bandwidth – 174 MHz; P25; (Mask D).....	55
Plot 8-13:	Occupied Bandwidth – 150 MHz; CPM TDMA TDMA; (Mask D).....	56
Plot 8-14:	Occupied Bandwidth – 156.8 MHz; CPM TDMA TDMA; (Mask D).....	57
Plot 8-15:	Occupied Bandwidth – 162 MHz; CPM TDMA TDMA; (Mask D).....	58
Plot 8-16:	Occupied Bandwidth – 174 MHz; CPM TDMA TDMA; (Mask D).....	59
Plot 8-17:	Occupied Bandwidth – 150 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D).....	60
Plot 8-18:	Occupied Bandwidth – 156.8 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D).....	61
Plot 8-19:	Occupied Bandwidth – 162 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D).....	62
Plot 8-20:	Occupied Bandwidth – 174 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D).....	63
Plot 8-21:	Occupied Bandwidth – 150 MHz; 2-Level FSK 9600; WB EDACS; (Mask B).....	64
Plot 8-22:	Occupied Bandwidth – 156.8 MHz; 2-Level FSK 9600; WB EDACS; (Mask B).....	65
Plot 8-23:	Occupied Bandwidth – 162 MHz; 2-Level FSK 9600; WB EDACS; (Mask B).....	66
Plot 8-24:	Occupied Bandwidth – 174 MHz; 2-Level FSK 9600; WB EDACS; (Mask B).....	67
Plot 8-25:	Occupied Bandwidth – 150 MHz; 2-Level FSK 9600; NB EDACS; (Mask D).....	68
Plot 8-26:	Occupied Bandwidth – 156.8 MHz; 2-Level FSK 9600; NB EDACS; (Mask D).....	69
Plot 8-27:	Occupied Bandwidth – 162 MHz; 2-Level FSK 49600; NB EDACS; (Mask D).....	70
Plot 8-28:	Occupied Bandwidth – 174 MHz; 2-Level FSK 9600; NB EDACS; (Mask D).....	71
Plot 8-29:	Occupied Bandwidth – 430 MHz; Wideband Analog; Mask B.....	72
Plot 8-30:	Occupied Bandwidth – 450 MHz; Wideband Analog; Mask B.....	73
Plot 8-31:	Occupied Bandwidth – 454 MHz; Wideband Analog; Mask B.....	74
Plot 8-32:	Occupied Bandwidth – 456 MHz; Wideband Analog; Mask B.....	75
Plot 8-33:	Occupied Bandwidth – 459.025 MHz; Wideband Analog; Mask B.....	76
Plot 8-34:	Occupied Bandwidth – 459.975MHz; Wideband Analog; Mask B.....	77
Plot 8-35:	Occupied Bandwidth – 470 MHz; Wideband Analog; Mask B.....	78
Plot 8-36:	Occupied Bandwidth – 430 MHz; Narrowband Analog; Mask D.....	79
Plot 8-37:	Occupied Bandwidth – 450 MHz; Narrowband Analog; Mask D.....	80
Plot 8-38:	Occupied Bandwidth – 454 MHz; Narrowband Analog; Mask D.....	81
Plot 8-39:	Occupied Bandwidth – 456 MHz; Narrowband Analog; Mask D.....	82
Plot 8-40:	Occupied Bandwidth – 459.025 MHz; Narrowband Analog; Mask D.....	83
Plot 8-41:	Occupied Bandwidth – 459.975 MHz; Narrowband Analog; Mask D.....	84
Plot 8-42:	Occupied Bandwidth – 470 MHz; Narrowband Analog; Mask D.....	85
Plot 8-43:	Occupied Bandwidth – 430 MHz; P25; Mask D.....	86
Plot 8-44:	Occupied Bandwidth – 450 MHz; P25; Mask D.....	87
Plot 8-45:	Occupied Bandwidth – 454 MHz; P25; Mask D.....	88
Plot 8-46:	Occupied Bandwidth – 456MHz; P25; Mask D.....	89
Plot 8-47:	Occupied Bandwidth – 459.025 MHz; P25; Mask D.....	90
Plot 8-48:	Occupied Bandwidth – 459.975 MHz; P25; Mask D.....	91
Plot 8-49:	Occupied Bandwidth – 470 MHz; P25; Mask D.....	92
Plot 8-50:	Occupied Bandwidth – 430 MHz; CPM TDMA; Mask D.....	93
Plot 8-51:	Occupied Bandwidth – 450 MHz; CPM TDMA; Mask D.....	94
Plot 8-52:	Occupied Bandwidth – 454 MHz; CPM TDMA; Mask D.....	95
Plot 8-53:	Occupied Bandwidth – 456MHz; CPM TDMA; Mask D.....	96
Plot 8-54:	Occupied Bandwidth – 459.025 MHz; CPM TDMA; Mask D.....	97
Plot 8-55:	Occupied Bandwidth – 459.975 MHz; CPM TDMA; Mask D.....	98
Plot 8-56:	Occupied Bandwidth – 470 MHz; CPM TDMA; Mask D.....	99
Plot 8-57:	Occupied Bandwidth – 430 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	100
Plot 8-58:	Occupied Bandwidth – 450 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	101
Plot 8-59:	Occupied Bandwidth – 454 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	102
Plot 8-60:	Occupied Bandwidth – 456 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	103
Plot 8-61:	Occupied Bandwidth – 459.025 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	104
Plot 8-62:	Occupied Bandwidth – 459.975 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	105
Plot 8-63:	Occupied Bandwidth – 470 MHz; (2-level FSK 9600; NB) EDACS; Mask D.....	106
Plot 8-64:	Occupied Bandwidth – 430 MHz; (2-level FSK 9600; WB) EDACS; Mask C.....	107
Plot 8-65:	Occupied Bandwidth – 450 MHz; (2-level FSK 9600; WB) EDACS; Mask C.....	108
Plot 8-66:	Occupied Bandwidth – 454 MHz; (2-level FSK 9600; WB) EDACS; Mask C.....	109

Plot 8-67:	Occupied Bandwidth – 456 MHz; (2-level FSK 9600; WB) EDACS; Mask C	110
Plot 8-68:	Occupied Bandwidth – 459.025 MHz; (2-level FSK 9600; WB) EDACS; Mask C	111
Plot 8-69:	Occupied Bandwidth – 459.975MHz; (2-level FSK 9600; WB) EDACS; Mask C	112
Plot 8-70:	Occupied Bandwidth – 470 MHz; (2-level FSK 9600; WB) EDACS; Mask C	113
Plot 8-71:	Occupied Bandwidth – 430 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	114
Plot 8-72:	Occupied Bandwidth – 450 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	115
Plot 8-73:	Occupied Bandwidth – 454 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	116
Plot 8-74:	Occupied Bandwidth – 456 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	117
Plot 8-75:	Occupied Bandwidth – 459.025 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	118
Plot 8-76:	Occupied Bandwidth – 459.975MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	119
Plot 8-77:	Occupied Bandwidth – 470 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D	120
Plot 8-78:	Occupied Bandwidth – 815 MHz; Narrowband Analog; Mask D	121
Plot 8-79:	Occupied Bandwidth – 815 MHz; Narrowband Analog; Mask B	122
Plot 8-80:	Occupied Bandwidth – 824 MHz; Narrowband Analog; Mask D	123
Plot 8-81:	Occupied Bandwidth – 824 MHz; Narrowband Analog; Mask B	124
Plot 8-82:	Occupied Bandwidth – 860 MHz; Narrowband Analog; Mask D	125
Plot 8-83:	Occupied Bandwidth – 860 MHz; Narrowband Analog; Mask B	126
Plot 8-84:	Occupied Bandwidth – 869 MHz; Narrowband Analog; Mask D	127
Plot 8-85:	Occupied Bandwidth – 869 MHz; Narrowband Analog; Mask B	128
Plot 8-86:	Occupied Bandwidth – 815 MHz; Wideband Analog; Mask B	129
Plot 8-87:	Occupied Bandwidth – 824 MHz; Wideband Analog; Mask B	130
Plot 8-88:	Occupied Bandwidth – 860 MHz; Wideband Analog; Mask B	131
Plot 8-89:	Occupied Bandwidth – 869 MHz; Wideband Analog; Mask B	132
Plot 8-90:	Occupied Bandwidth – 806 MHz; NPSPAC; Mask B	133
Plot 8-91:	Occupied Bandwidth – 816 MHz; NPSPAC; Mask B	134
Plot 8-92:	Occupied Bandwidth – 824 MHz; NPSPAC; Mask B	135
Plot 8-93:	Occupied Bandwidth – 851 MHz; NPSPAC; Mask B	136
Plot 8-94:	Occupied Bandwidth – 861 MHz; NPSPAC; Mask B	137
Plot 8-95:	Occupied Bandwidth – 869 MHz; NPSPAC; Mask B	138
Plot 8-96:	Occupied Bandwidth – 806 MHz; P25 RND; Mask H	139
Plot 8-97:	Occupied Bandwidth – 815 MHz; P25 RND; Mask G	140
Plot 8-98:	Occupied Bandwidth – 824 MHz; P25 RND; Mask G	141
Plot 8-99:	Occupied Bandwidth – 854 MHz; P25 RND; Mask H	142
Plot 8-100:	Occupied Bandwidth – 860 MHz; P25 RND; Mask G	143
Plot 8-101:	Occupied Bandwidth – 869 MHz; P25 RND; Mask G	144
Plot 8-102:	Occupied Bandwidth – 806 MHz; CPM TDMA; Mask H	145
Plot 8-103:	Occupied Bandwidth – 815 MHz; CPM TDMA; Mask G	146
Plot 8-104:	Occupied Bandwidth – 824 MHz; CPM TDMA; Mask G	147
Plot 8-105:	Occupied Bandwidth – 854 MHz; CPM TDMA; Mask H	148
Plot 8-106:	Occupied Bandwidth – 860 MHz; CPM TDMA; Mask G	149
Plot 8-107:	Occupied Bandwidth – 869 MHz; CPM TDMA; Mask G	150
Plot 8-108:	Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G	151
Plot 8-109:	Occupied Bandwidth – 824 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G	152
Plot 8-110:	Occupied Bandwidth – 860 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G	153
Plot 8-111:	Occupied Bandwidth – 869 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G	154
Plot 8-112:	Occupied Bandwidth – 815 MHz; 2-level FSK 9600; NB EDACS; Mask G	155
Plot 8-113:	Occupied Bandwidth – 824 MHz; 2-level FSK 9600; NB EDACS; Mask G	156
Plot 8-114:	Occupied Bandwidth – 860 MHz; 2-level FSK 9600; NB EDACS; Mask G	157
Plot 8-115:	Occupied Bandwidth – 869 MHz; 2-level FSK 9600; NB EDACS; Mask G	158
Plot 8-116:	Occupied Bandwidth – 815 MHz; 2-level FSK 9600; WB EDACS; Mask G	159
Plot 8-117:	Occupied Bandwidth – 824 MHz; 2-level FSK 9600; WB EDACS; Mask G	160
Plot 8-118:	Occupied Bandwidth – 860 MHz; 2-level FSK 9600; WB EDACS; Mask G	161
Plot 8-119:	Occupied Bandwidth – 869 MHz; 2-level FSK 9600; WB EDACS; Mask G	162
Plot 8-120:	Occupied Bandwidth – 806 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask H ..	163
Plot 8-121:	Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask G ..	164

Plot 8-122:	Occupied Bandwidth – 824 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask G .	165
Plot 8-123:	Occupied Bandwidth – 851 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask H..	166
Plot 8-124:	Occupied Bandwidth – 869 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask G .	167
Plot 8-125:	Occupied Bandwidth – 806 MHz; 4-level FSK Data/Voice; NPSPAC OpenSky; Mask H	168
Plot 8-126:	Occupied Bandwidth – 851 MHz; 4-level FSK Data/Voice; NPSPAC OpenSky; Mask H	169
Plot 8-127:	Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G	170
Plot 8-128:	Occupied Bandwidth – 824 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G	171
Plot 8-129:	Occupied Bandwidth – 860 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G	172
Plot 8-130:	Occupied Bandwidth – 869 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G	173
Plot 10-1:	Modulation Characteristics - Audio Frequency Response - 136 MHz	181
Plot 10-2:	Modulation Characteristics - Audio Frequency Response - 418 MHz	182
Plot 10-3:	Modulation Characteristics - Audio Frequency Response - 470 MHz	183
Plot 10-4:	Modulation Characteristics - Audio Frequency Response - 768 MHz	184
Plot 10-5:	Modulation Characteristics - Audio Frequency Response - 798 MHz	185
Plot 10-6:	Modulation Characteristics - Audio Frequency Response - 815 MHz	186
Plot 10-7:	Modulation Characteristics - Audio Frequency Response - 860 MHz	187
Plot 10-8:	Modulation Characteristics – Audio Low Pass Filter - 162 MHz (WB)	188
Plot 10-9:	Modulation Characteristics – Audio Low Pass Filter - 162 MHz (NB)	189
Plot 10-10:	Modulation Characteristics – Audio Low Pass Filter - 418 MHz (WB)	190
Plot 10-11:	Modulation Characteristics – Audio Low Pass Filter - 418 MHz (NB)	191
Plot 10-12:	Modulation Characteristics – Audio Low Pass Filter - 470 MHz (WB)	192
Plot 10-13:	Modulation Characteristics – Audio Low Pass Filter - 470 MHz (NB)	193
Plot 10-14:	Modulation Characteristics – Audio Low Pass Filter – 768 MHz	194
Plot 10-15:	Modulation Characteristics – Audio Low Pass Filter - 798 MHz	195
Plot 10-16:	Modulation Characteristics – Audio Low Pass Filter - 815 MHz	196
Plot 10-17:	Modulation Characteristics – Audio Low Pass Filter - 860 MHz	197
Plot 10-18:	Modulation Characteristics – Modulation Limiting - 136 MHz; Positive Peak; NB	198
Plot 10-19:	Modulation Characteristics – Modulation Limiting - 136 MHz; Negative Peak; NB.....	199
Plot 10-20:	Modulation Characteristics – Modulation Limiting - 136 MHz; Positive Peak; WB.....	200
Plot 10-21:	Modulation Characteristics – Modulation Limiting - 136 MHz; Negative Peak; WB.....	201
Plot 10-22:	Modulation Characteristics – Modulation Limiting - 162 MHz; Positive Peak; NB	202
Plot 10-23:	Modulation Characteristics – Modulation Limiting - 162 MHz; Negative Peak; NB.....	203
Plot 10-24:	Modulation Characteristics – Modulation Limiting - 162 MHz; Positive Peak; WB.....	204
Plot 10-25:	Modulation Characteristics – Modulation Limiting - 162 MHz; Negative Peak; WB.....	205
Plot 10-26:	Modulation Characteristics – Modulation Limiting - 418 MHz; Positive Peak; NB	206
Plot 10-27:	Modulation Characteristics – Modulation Limiting - 418 MHz; Negative Peak; NB.....	207
Plot 10-28:	Modulation Characteristics – Modulation Limiting - 418 MHz; Positive Peak; WB.....	208
Plot 10-29:	Modulation Characteristics – Modulation Limiting - 418 MHz; Negative Peak; WB.....	209
Plot 10-30:	Modulation Characteristics – Modulation Limiting - 470 MHz; Positive Peak; NB	210
Plot 10-31:	Modulation Characteristics – Modulation Limiting - 470 MHz; Negative Peak; NB.....	211
Plot 10-32:	Modulation Characteristics – Modulation Limiting - 470 MHz; Positive Peak; WB.....	212
Plot 10-33:	Modulation Characteristics – Modulation Limiting - 470 MHz; Negative Peak; WB.....	213
Plot 10-34:	Modulation Characteristics – Modulation Limiting - 768 MHz; Positive Peak; NB	214
Plot 10-35:	Modulation Characteristics – Modulation Limiting - 768 MHz; Negative Peak; NB.....	215
Plot 10-36:	Modulation Characteristics – Modulation Limiting - 798 MHz; Positive Peak; NB	216
Plot 10-37:	Modulation Characteristics – Modulation Limiting - 798 MHz; Negative Peak; NB.....	217
Plot 10-38:	Modulation Characteristics – Modulation Limiting - 815 MHz; Positive Peak; NB	218
Plot 10-39:	Modulation Characteristics – Modulation Limiting - 815 MHz; Negative Peak; NB.....	219
Plot 10-40:	Modulation Characteristics – Modulation Limiting - 815 MHz; Positive Peak; WB.....	220
Plot 10-41:	Modulation Characteristics – Modulation Limiting - 815 MHz; Negative Peak; WB.....	221
Plot 10-42:	Modulation Characteristics – Modulation Limiting - 816 MHz; Positive Peak; NPSPAC.....	222
Plot 10-43:	Modulation Characteristics – Modulation Limiting - 816 MHz; Negative Peak; NPSPAC	223
Plot 10-44:	Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; NB	224
Plot 10-45:	Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; NB.....	225
Plot 10-46:	Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; WB.....	226

Plot 10-47:	Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; WB.....	227
Plot 10-48:	Modulation Characteristics – Modulation Limiting - 861 MHz; Positive Peak; NPSPAC.....	228
Plot 10-49:	Modulation Characteristics – Modulation Limiting - 861 MHz; Negative Peak; NPSPAC	229
Plot 11-1:	Transient Frequency Behavior – 150 MHz; High Power; Narrowband; Carrier ON Time	231
Plot 11-2:	Transient Frequency Behavior – 162 MHz; High Power; Narrowband; Carrier OFF Time.....	232
Plot 11-3:	Transient Frequency Behavior – 174 MHz; High Power; Wideband; Carrier ON Time.....	233
Plot 11-4:	Transient Frequency Behavior – 174 MHz; High Power; Wideband; Carrier OFF Time.....	234
Plot 11-5:	Transient Frequency Behavior – 430 MHz; High Power; Narrowband; Carrier ON Time	235
Plot 11-6:	Transient Frequency Behavior – 430 MHz; High Power; Narrowband; Carrier OFF Time.....	236
Plot 11-7:	Transient Frequency Behavior – 512 MHz; High Power; Wideband; Carrier ON Time.....	237
Plot 11-8:	Transient Frequency Behavior – 512 MHz; High Power; Wideband; Carrier OFF Time.....	238

Table of Appendixes

Appendix A:	FCC §1.1307, §1.1310, §2.1091, §2.1093: RF Exposure	243
Appendix B:	Agency Authorization.....	244
Appendix C:	FCC and IC Confidentiality Request Letter.....	245
Appendix D:	IC Letters.....	246
Appendix E:	Canadian Representative	247
Appendix F:	AFC Attestation	248
Appendix G:	§90 Subpart R Application Review.....	249
Appendix H:	Extended Frequency Attestation	250
Appendix I:	ID Label.....	251
Appendix J:	Operational Description	252
Appendix K:	Parts List	253
Appendix L:	Test / Tune Procedure	254
Appendix M:	Schematics.....	255
Appendix N:	Block Diagram	256
Appendix O:	Manual	257
Appendix P:	Test Configuration Photographs.....	258
Appendix Q:	External Photographs	262
Appendix R:	Internal Photographs	263

Table of Photographs

Photograph 1:	Radiated Emissions – Front View, <1 GHz.....	258
Photograph 2:	Radiated Emissions – Back View, <1GHz.....	259
Photograph 3:	Radiated Emissions – Front View, >1 GHz.....	260
Photograph 4:	Radiated Emissions – Back View, >1GHz.....	261

1 Test Result Summary

Test	IC Reference	FCC Reference	Result
RF Power Output	RSS-119 5.4	2.1046(a), 22.659, 74.461, 80.215, 90.541	Complies
Spurious Emissions at Antenna Terminals	RSS-119 5.8	2.1051, 22.359, 80.217, 90.210	Complies
Field Strength of Spurious Radiation	RSS-119 5.8	2.1053(a), 22.359, 80.211(f)(3), 90.210, 90.543(c)	Complies
Occupied Bandwidth/ Emission Masks	RSS-119 5.5	2.1049(c)(1), 22.359(b), 74.462, 80.205, 80.211, 90.210, 90.543(d),	Complies
Adjacent Channel Power	RSS-119 4.3	90.543	Complies
Frequency Stability vs. Temperature and Voltage	RSS-119 5.3	2.1055, 22.355, 74.464, 80.209, 90.213, 90.539	Complies
Modulation Characteristics	RSS-119 5.2	2.1047(a)(b), 74.463, 80.213	Complies
Transient Frequency Behavior	RSS-119 5.9	74.462(c), 90.214	Complies

2 General Information

The following Certification Report is prepared on behalf of **Harris Corporation** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **XL-200P C1D1 Non-Rebanded; FCC ID: OWDTR-0146-E, IC: 3636B-0146**.

The radio is subject to FCC DoC. DoC testing was performed and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2, 22, 74, 80 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

N/A

2.3 Grant Notes

Power is continuously variable from 1 – 6 W for VHF, 1 – 5 W for UHF, 0.5 – 3 W for 700 and 800 MHz Bands. EF grant note is requested.

2.4 Tested System Details


The test sample was received on May 4, 2017. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple modes of operation and modulation types.

Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Radio	Harris Corporation	XL-200P C1D1 Non-Rebanded	C1D1/E00009	OWDTR-0146-E	22518
Speaker/Microphone	Harris Corporation	EM105	N/A	N/A	21563
Full-Spectrum Multiband Antenna	Harris Corporation	14035-4000-01	N/A	N/A	22519
Li-Ion Rechargeable Battery	Harris Corporation	N/A	BAT-L-CASE-R-HR003	N/A	21552

Figure 2-1: Configuration of Tested System

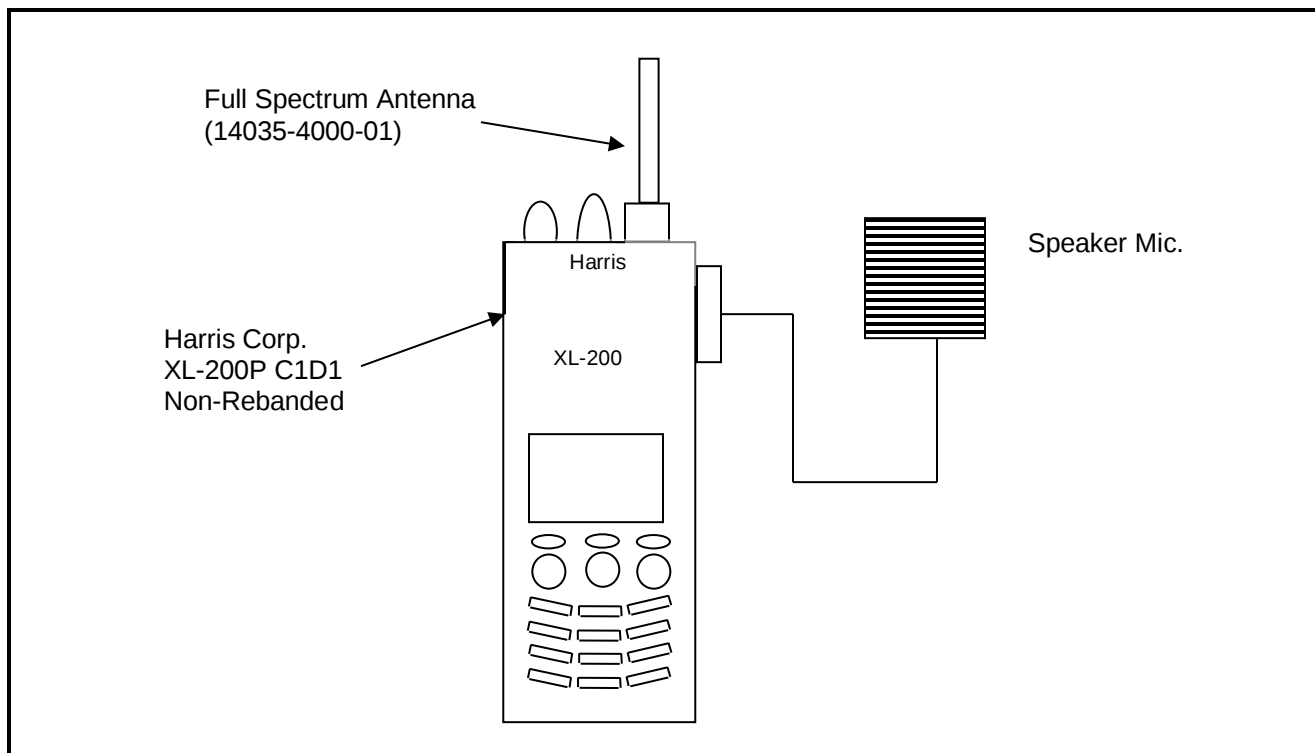

3 FCC §2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage

7.4 V / 1.2 A VHF
7.4 V / 1.4 A UHF
7.4 V / 2.7 A 700 MHz
7.4 V / 2.3 A 800 MHz

4 FCC §2.1046(a): RF Power Output: Conducted, §90.541: Transmitting Power Limits; §80.215: Transmitter Power; §22.659: Effective Radiated Power Limits; §74.461: Transmitter Power; RSS-119 5.4: Transmitter Power

4.1 Test Procedure

ANSI C63-26, section 5.2

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

§80.215 Transmitter Power

(a) Transmitter power shown on the radio station authorization is the maximum power the licensee is authorized to use. Power is expressed in the following terms:

(5) For all other emissions: the carrier power multiplied by 1.67.

(e) Ship stations frequencies above 27500 kHz:

The maximum power must not exceed the values listed below.

(1) Ship stations 156–162 MHz: 25W

(2) Marine utility stations and hand-held portable transmitters: 156–162 MHz: 10W

Maximum Power Authorized to Use: 10.02W for VHF, 8.35W for UHF

Manufacturer's Rated Power: 6.0 W for VHF, 5.0 W for UHF, 3.0 W for 700 Band, and 3.0 W for 800 Band

4.2 Test Data

Table 4-1: RF Conducted Output Power - Measured

Frequency (MHz)	Power (dBm)	Power (W)
136	38.1	6.4
138	38.0	6.4
141	38.0	6.3
144	38.0	6.3
148	37.9	6.1
150	37.8	6.0
156.8	37.8	6.0
162	38.0	6.3
174	38.1	6.4
378	37.1	5.1
406.1	37.2	5.3
418	37.2	5.2
430	37.2	5.2
450	37.1	5.2
454	37.2	5.2
456	37.2	5.3
459.025	37.2	5.2
459.975	37.1	5.2
470	37.2	5.3
512	37.2	5.2
522	37.1	5.1
768	34.2	2.7
769	34.3	2.7
771	34.1	2.6
774.9875	34.4	2.7
776	34.4	2.7
798	34.1	2.6
801	34.1	2.5
805.9875	34.0	2.5
806	34.8	3.0
815	34.8	3.0
824	34.8	3.0
851	35.0	3.2
860	35.0	3.2
869	35.1	3.2

Notes: Data presented is for analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: XL-200P C1D1 Non-Rebanded
ID's: OWDTR-0146-E/3636B-0146
Standards: FCC §22, 74, 80, 90/IC RSS-119
Report #: 2017007TNF

Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901139	MCE Weinschel	48-20-34	Attenuator, 20 dB, DC-18 GHz, 100 W	BK5859	3/30/18

Test Personnel:

	
Daniel W. Baltzell	May 5, 2017
EMC Test Engineer	Date of Test

Signature

Date of Test

5 FCC §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emission Limitations; §80.217: Suppression of Interference Aboard Ships; §22.359: Emission Limitations; RSS-119 5.8.9.2: Out-of-band Emission Limit

5.1 Test Procedure

ANSI C63-26, section 5.7

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

§80.217 Suppression of Interference Aboard Ships

(a) A voluntarily equipped ship station receiver must not cause harmful interference to any receiver required by statute or treaty.

(b) The electromagnetic field from receivers required by statute or treaty must not exceed the following value at a distance over sea water of one nautical mile from the receiver:

Frequency of Interfering Emissions	Power to Artificial Antenna in Microwatts
Below 30 MHz	0.1
30 to 100 MHz	3
100 to 300 MHz	1.0
Over 300 MHz	3.0

or

Deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:

Frequency of Interfering Emissions	Power to Artificial Antenna in Microwatts
Below 30 MHz	400 (4 dBm)
30 to 100 MHz	4,000 (6 dBm)
100 to 300 MHz	40,000 (16 dBm)
Over 300 MHz	400,000 (26 dBm)

5.2 Test Data

Frequency range of measurement per §2.1057: 9 kHz to $10 \times F_c$

Limits: $(43 + 10 \text{ LOG } P(W))$ for wideband and $50 + 10 \text{ LOG } P(W)$ for narrowband

The following channels (in MHz) were investigated:

VHF: 136, 138, 141, 144, 148, 150, 156.8, 162, and 174

UHF: 378, 406.1, 418, 430, 450, 454, 456, 459.025, 459.975, 470, 512, and 522

700 MHz: 768, 769, 771, 774.9875, 776, 798, 801, and 805.9875

800 MHz: 806, 815, 824, 851, 860, and 869

Both high and low power settings were checked; high power was found to be worst case. All modes were investigated and analog mode is presented as representative data.

All frequencies were found to be greater than 20 dB below the limit, no data is shown.

Table 5-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
900948	Weinschel Corp	47-10-43	10 dB Attenuator; 50 W	BH1481	9/1/18
901129	Par Electronics	188-174 (25W)	VHF Notch Filters	N/A	9/26/17
901135	Par Electronics	400-512 (25W)	UHF Notch Filter	N/A	9/26/17
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	9/26/17

Test Personnel:

Daniel W. Baltzell		May 9, 2017
EMC Test Engineer	Signature	Date of Test

6 FCC §90.543(a): Emission Limitations: ACP Requirements; RSS-119 4.3: Adjacent Channel Power (ACP) Measurement for Equipment in the Bands 768-776 MHz and 798-806 MHz

Effective October 23, 2007, transmitters designed to operate in the 769–774.9875 MHz and 799–805.9875 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in the 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

6.1 Test Procedure

ANSI C63-26, section 6.5.2.4

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

For a Portable transmitter designed to operate with a 12.5 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)9.375	6.25	-40
(+/-)15.625	6.25	-60
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

For a Portable transmitter designed to operate with a 25 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)15.625	6.25	-40
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

FCC Rules and Regulations §90.543(b)

Setting Reference Level - §90.543(b)(1): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth to the channel size. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset <600 kHz - §90.543(b)(2): Using a spectrum analyzer capable of adjacent channel power (ACP) measurements, set the measurement bandwidth as shown in table. Measure ACP in dBm. These measurements are made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >600 kHz - §90.543(b)(3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample detection mode. Sweep +/-6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

6.2 Test Data

Plot 6-1: Adjacent Channel Power - 775.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing

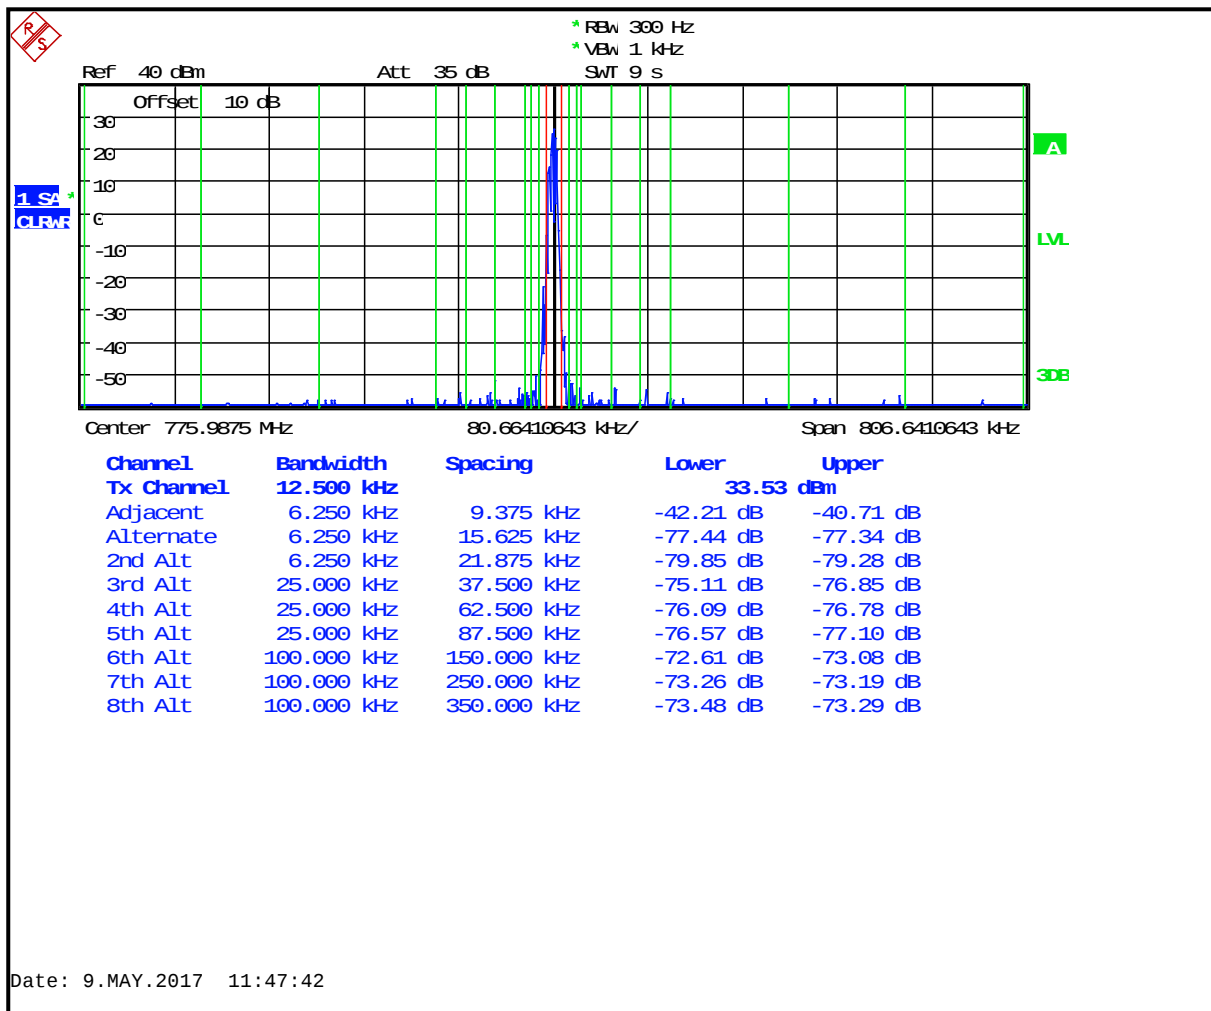


Table 6-1: Adjacent Channel Power - 775.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-100.2
12 MHz to receive band	30(s)	-75	-96.9
In receive band	30(s)	-100	-121.0

Plot 6-2: Adjacent Channel Power - 804.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing

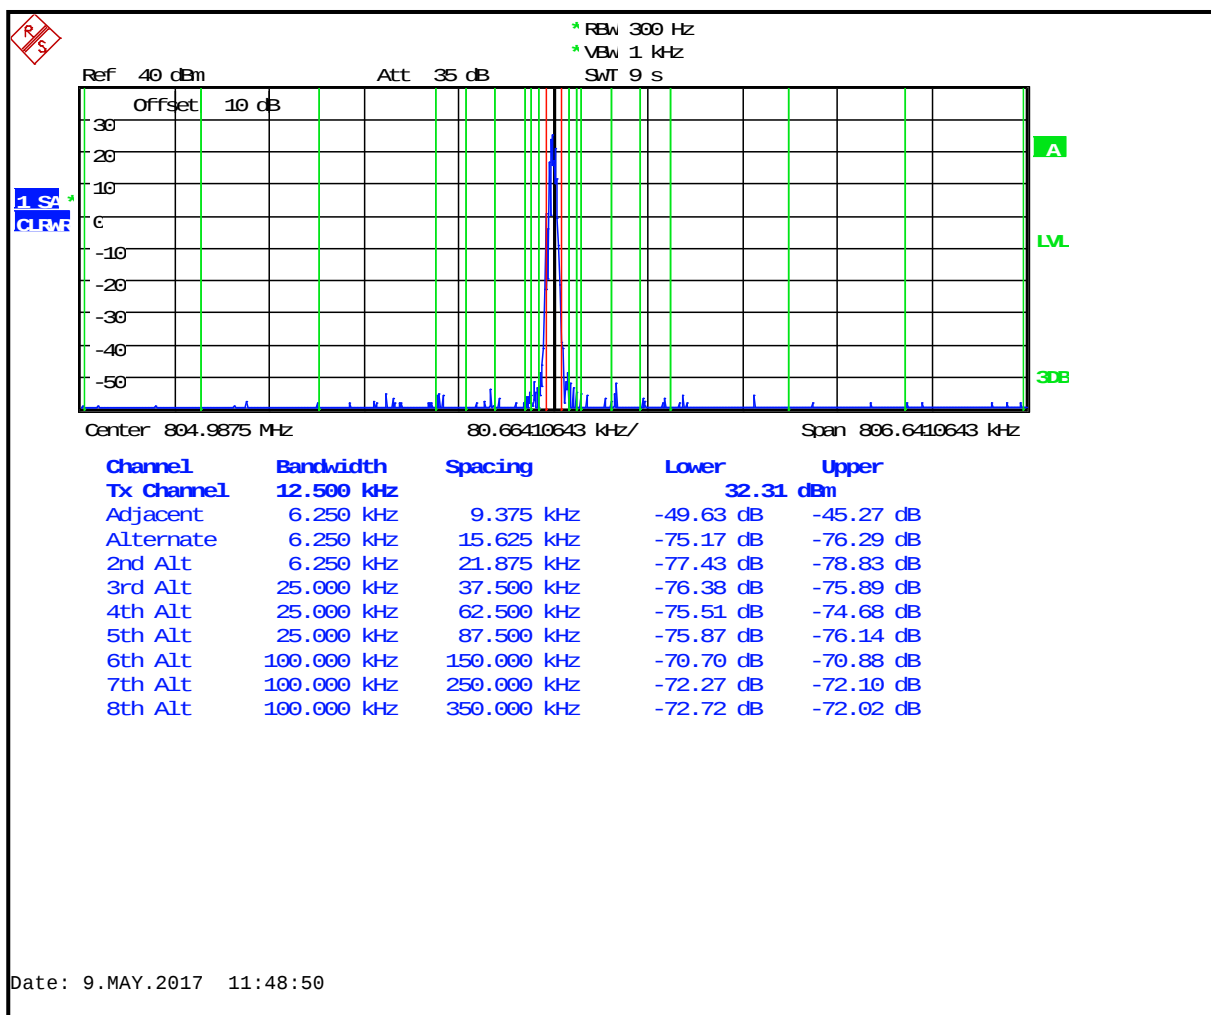


Table 6-2: Adjacent Channel Power - 804.9875 MHz; P25 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-103.6
12 MHz to receive band	30(s)	-75	-102.8
In receive band	30(s)	-100	-120.8

Plot 6-3: Adjacent Channel Power - 775.9875MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing

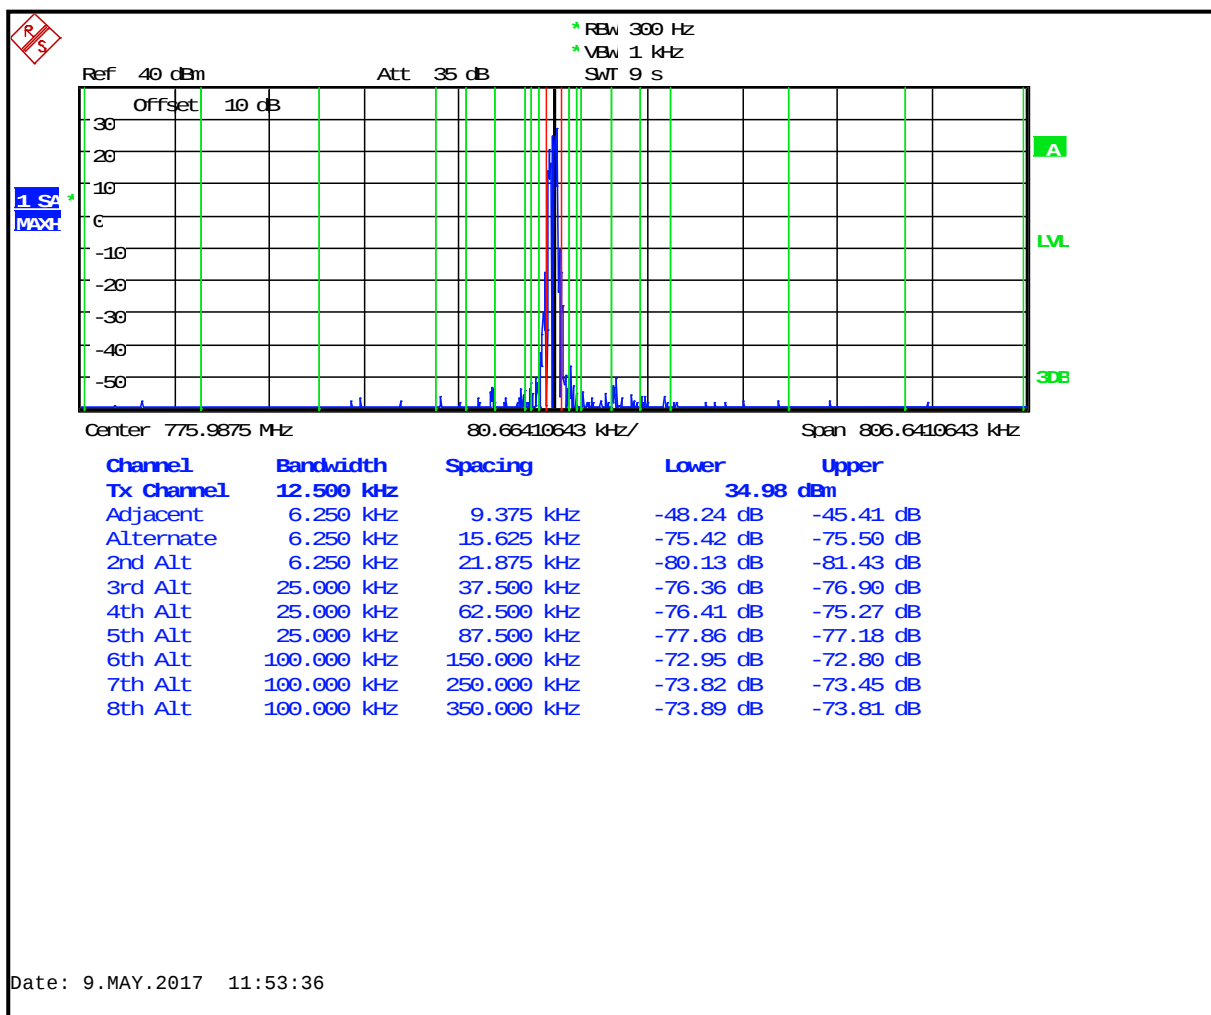


Table 6-3: Adjacent Channel Power - 775.9875MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-99.4
12 MHz to receive band	30(s)	-75	-101.9
In receive band	30(s)	-100	-103.2

Plot 6-4: Adjacent Channel Power - 804.9875 MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing

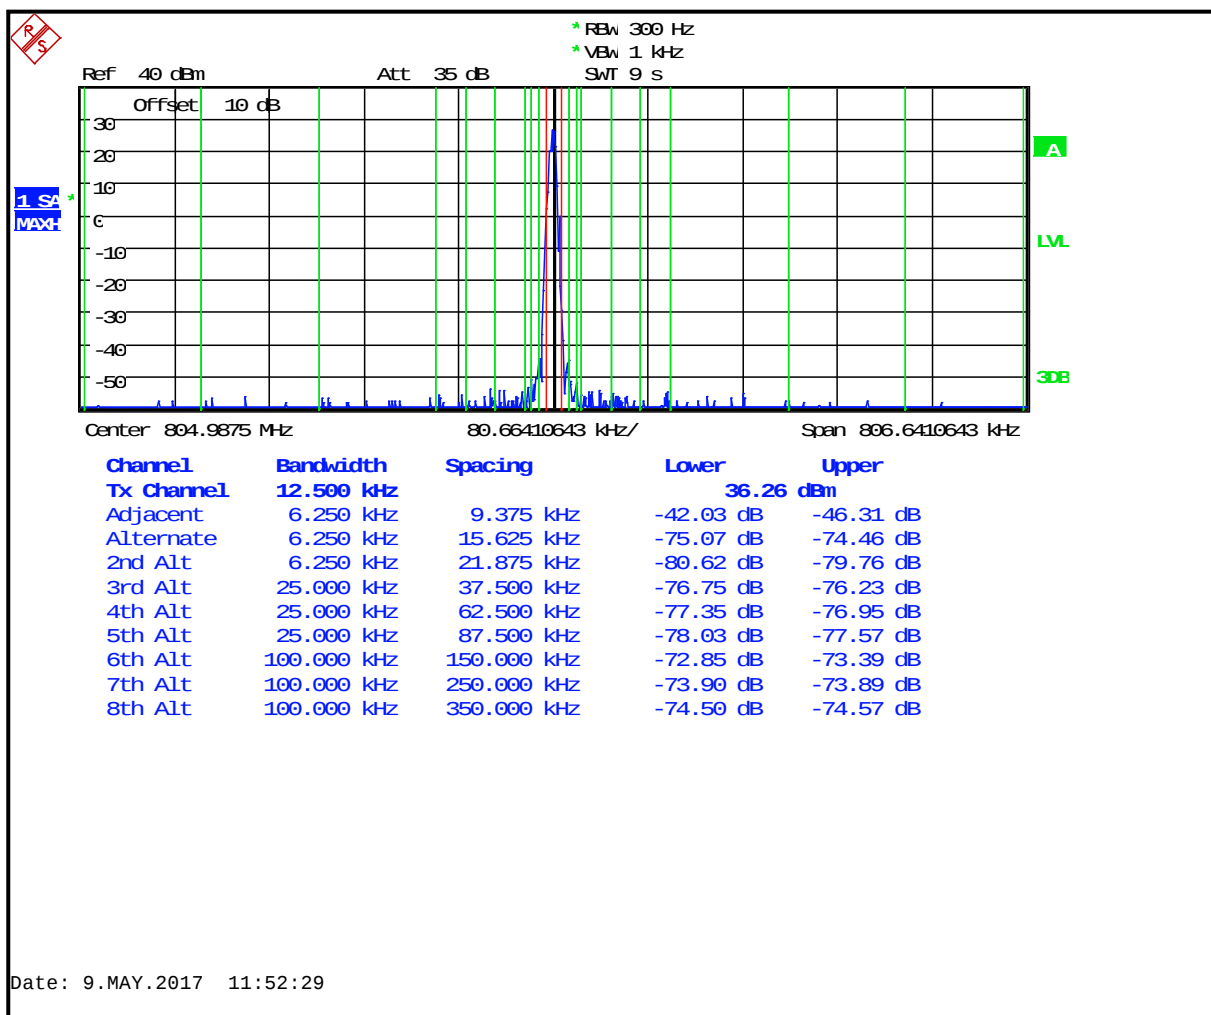


Table 6-4: Adjacent Channel Power - 804.9875 MHz; C4FM TDMA Phase 2 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-101.9
12 MHz to receive band	30(s)	-75	-103.8
In receive band	30(s)	-100	-102.8

Plot 6-5: Adjacent Channel Power - 775.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing

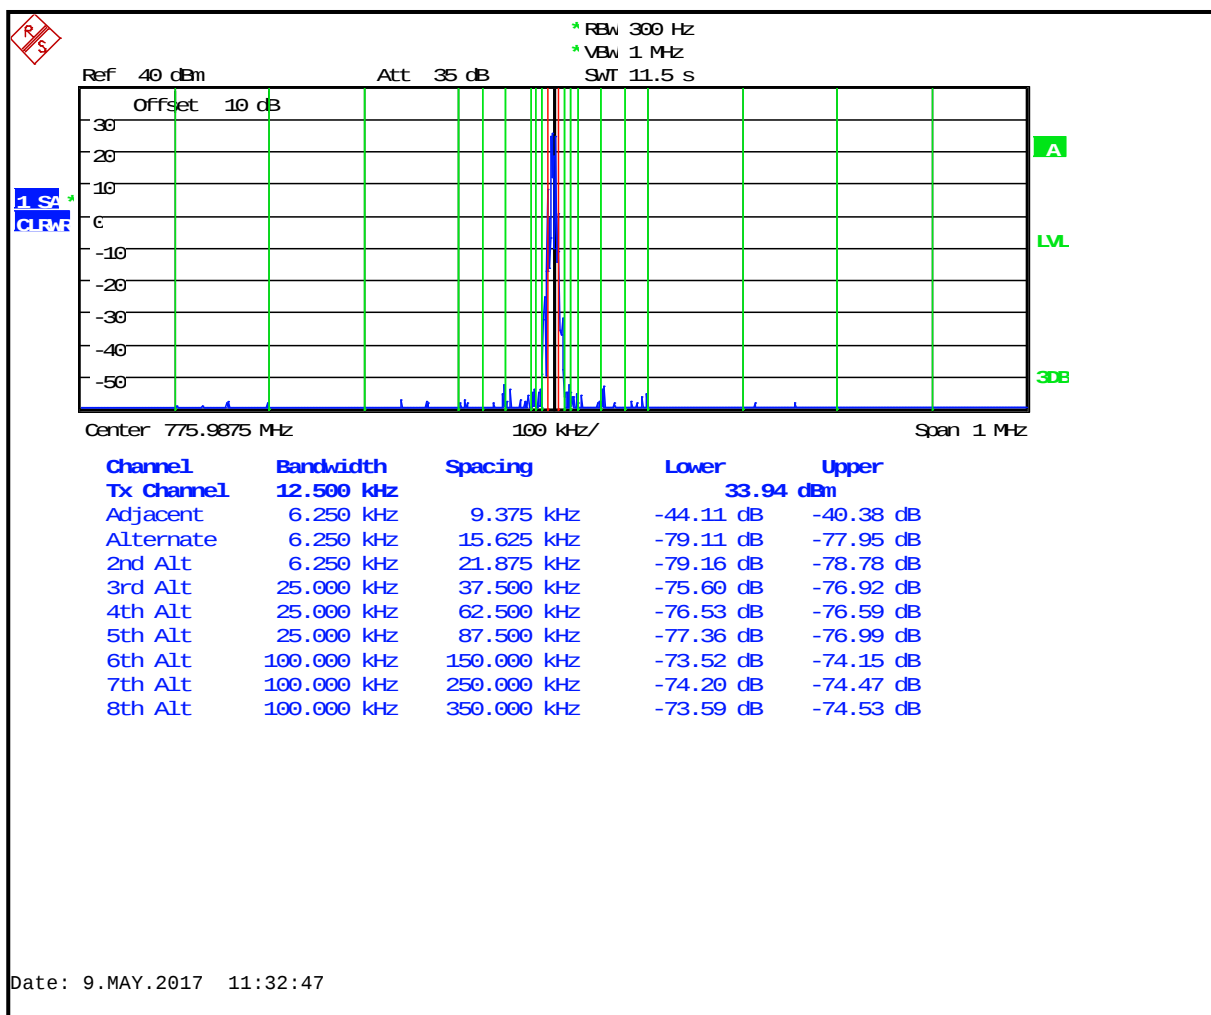


Table 6-5: Adjacent Channel Power - 775.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-101.5
12 MHz to receive band	30(s)	-75	-102.7
In receive band	30(s)	-100	-102.0

Plot 6-6: Adjacent Channel Power - 804.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing

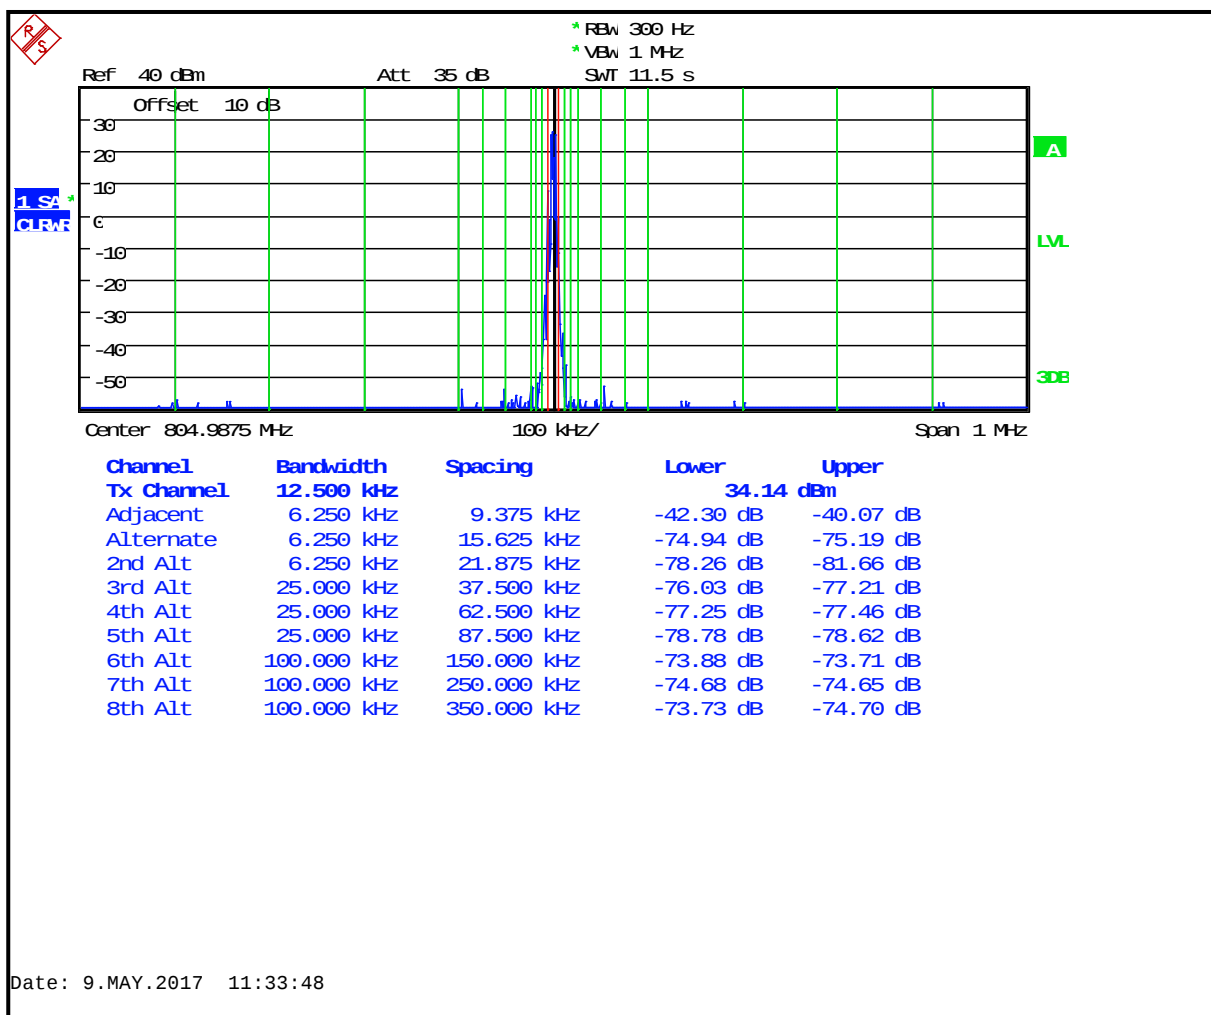


Table 6-6: Adjacent Channel Power - 804.9875 MHz; Analog Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-100.8
12 MHz to receive band	30(s)	-75	-103.1
In receive band	30(s)	-100	-102.0

Plot 6-7: Adjacent Channel Power - 775.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing

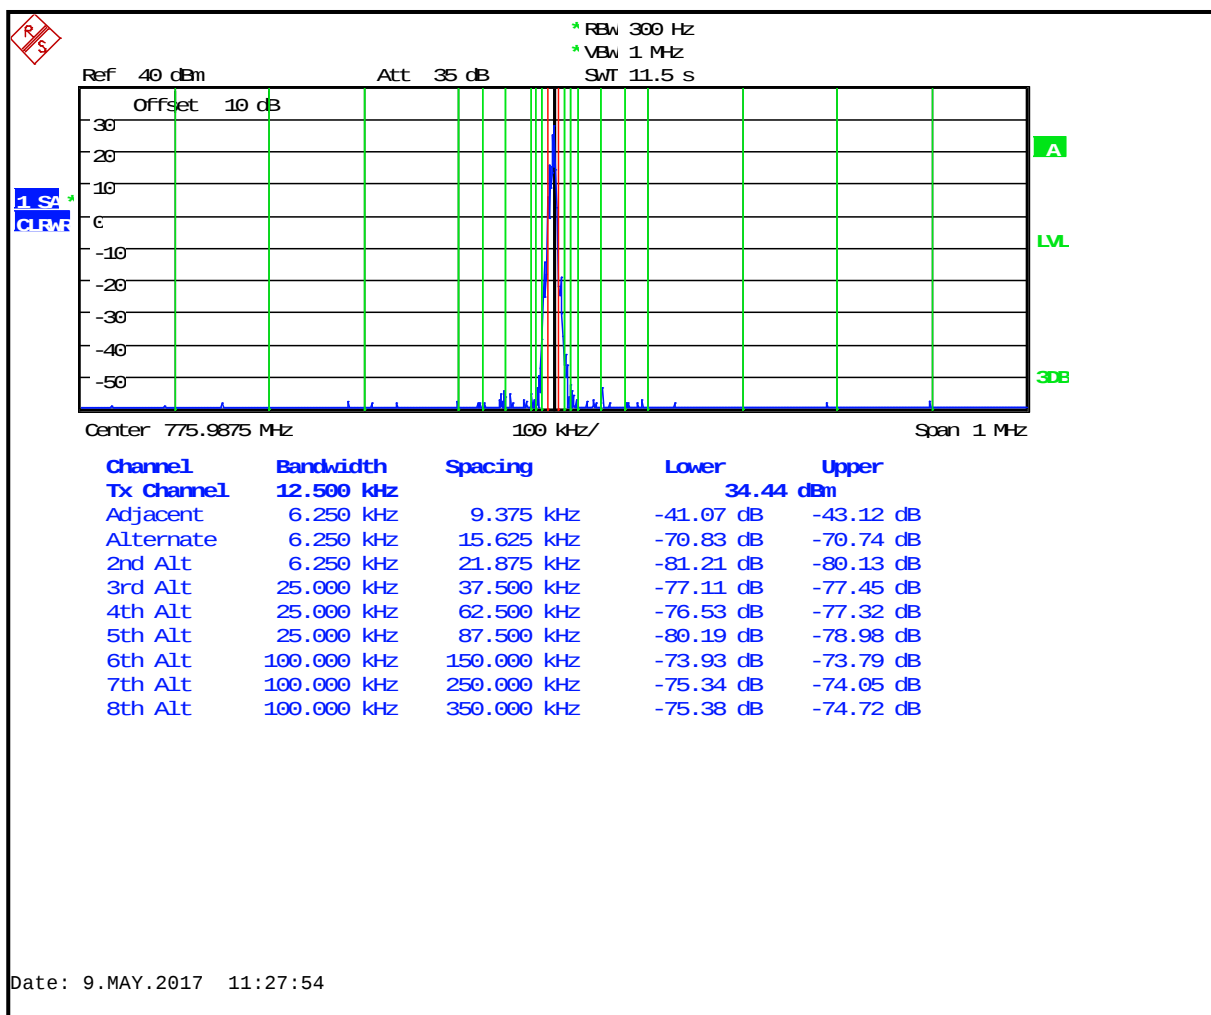


Table 6-7: Adjacent Channel Power - 775.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-83.4
12 MHz to receive band	30(s)	-75	-102.3
In receive band	30(s)	-100	-121.0

Plot 6-8: Adjacent Channel Power - 804.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing

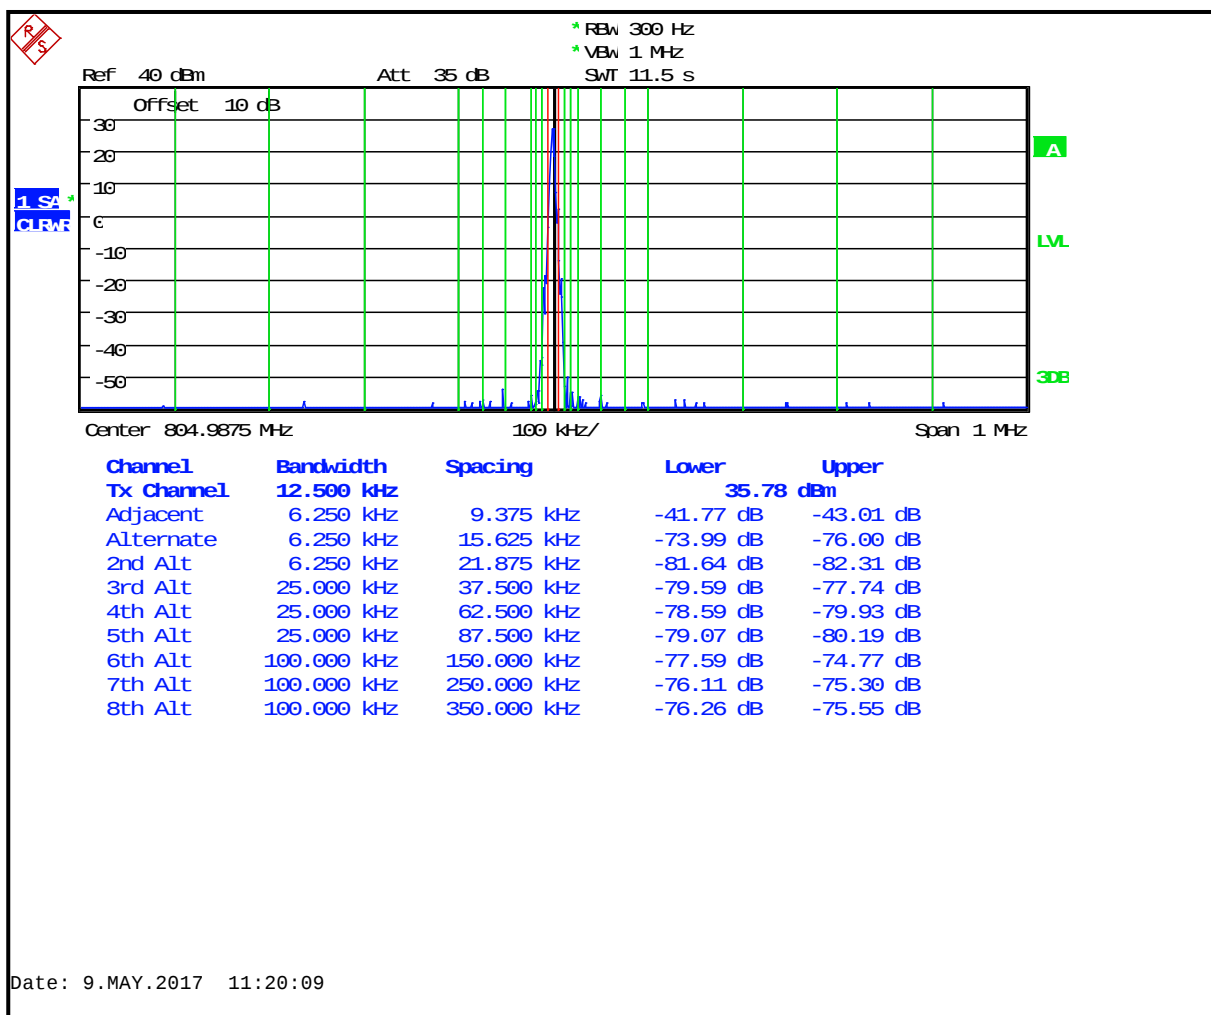


Table 6-8: Adjacent Channel Power - 804.9875 MHz; 2 Level FSK 9600 Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-101.6
12 MHz to receive band	30(s)	-75	-104.6
In receive band	30(s)	-100	-119.7

Plot 6-9: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing

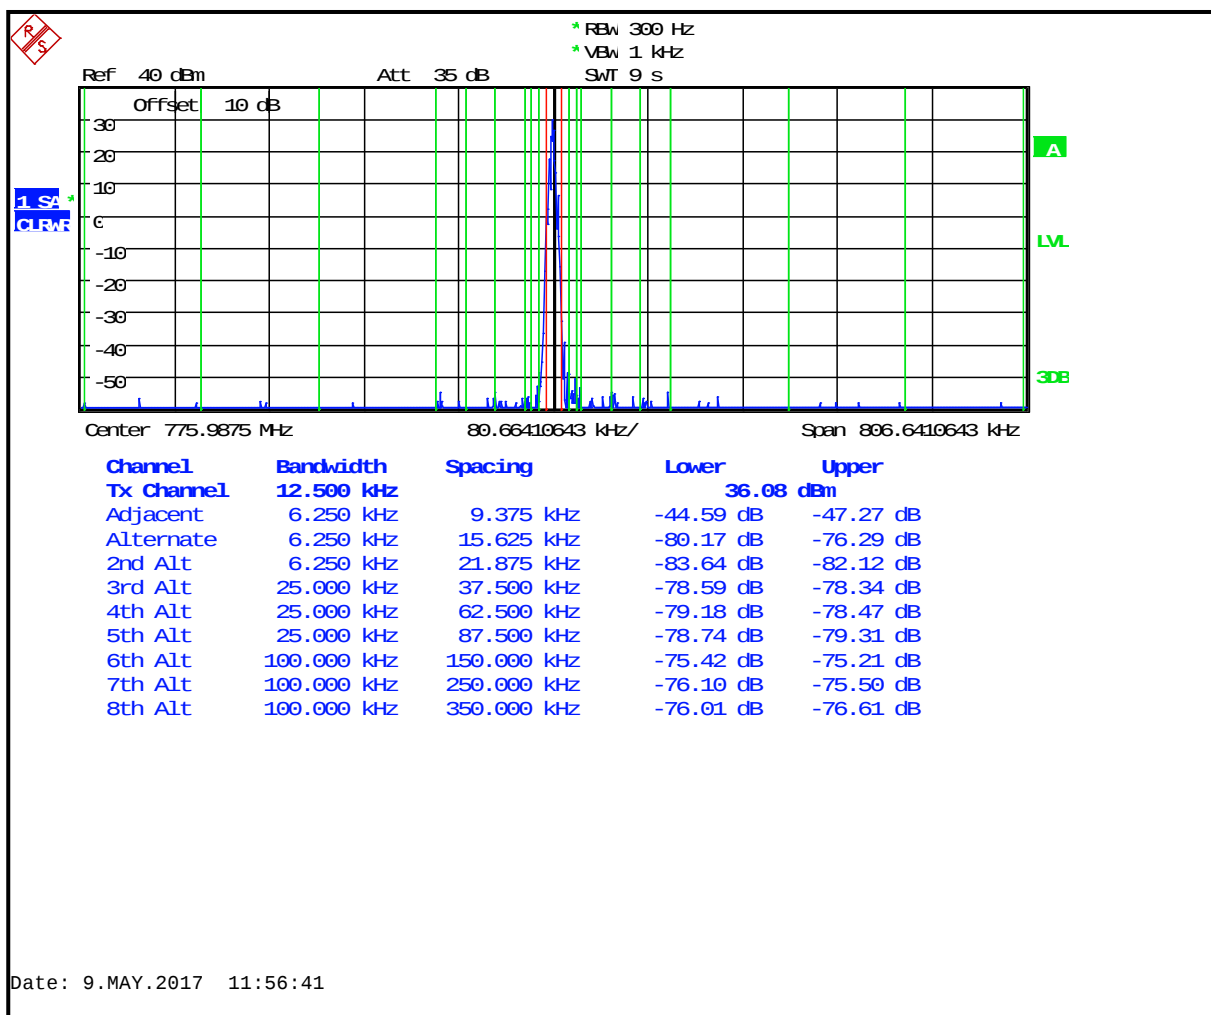


Table 6-9: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-82.7
12 MHz to receive band	30(s)	-75	-104.8
In receive band	30(s)	-100	-121.2

Plot 6-10: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing

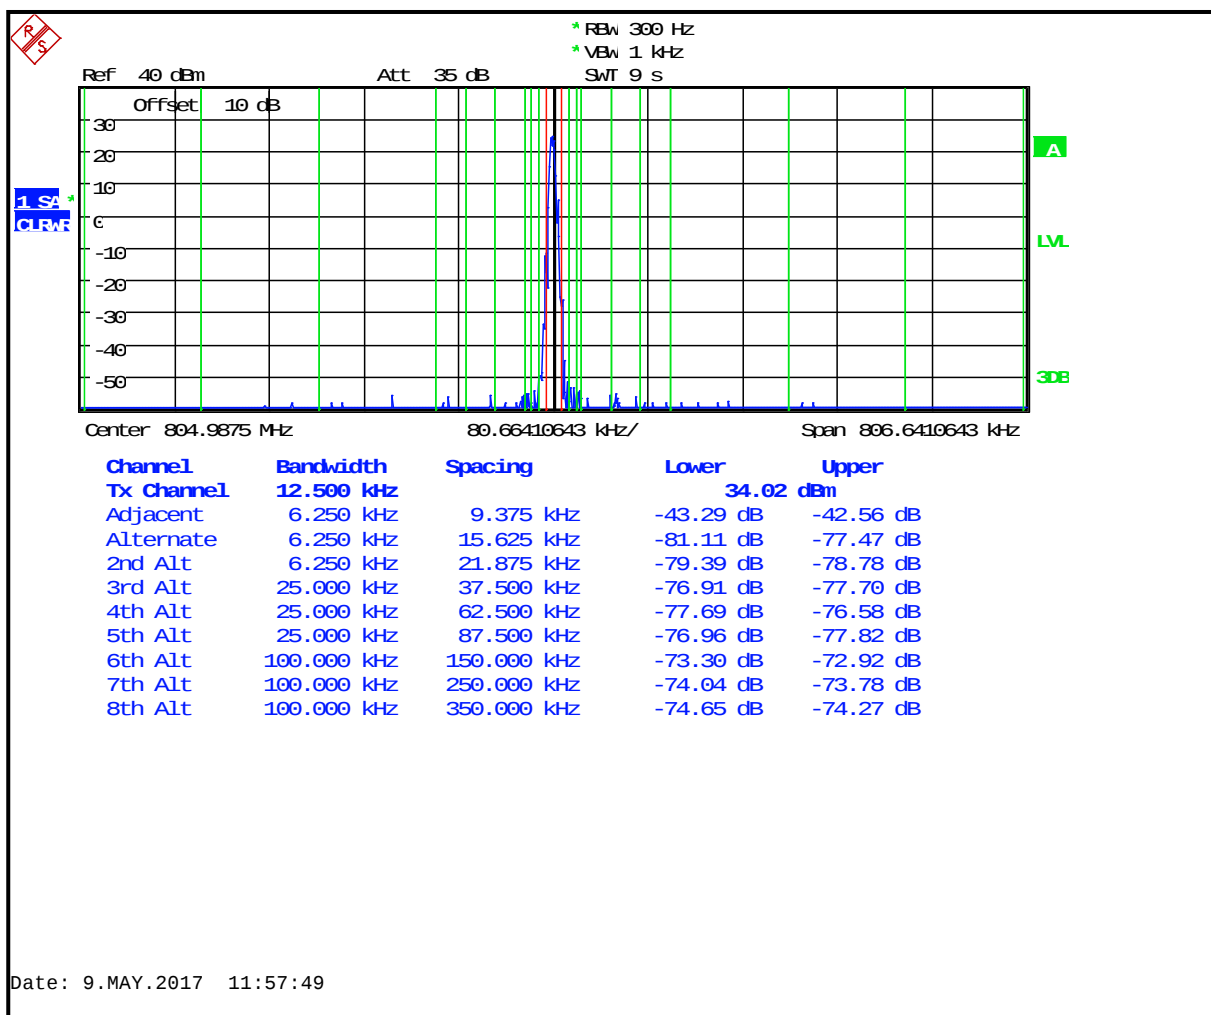


Table 6-10: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK OTP Mode; 12.5 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-103.8
12 MHz to receive band	30(s)	-75	-102.4
In receive band	30(s)	-100	-121.5

Plot 6-11: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing

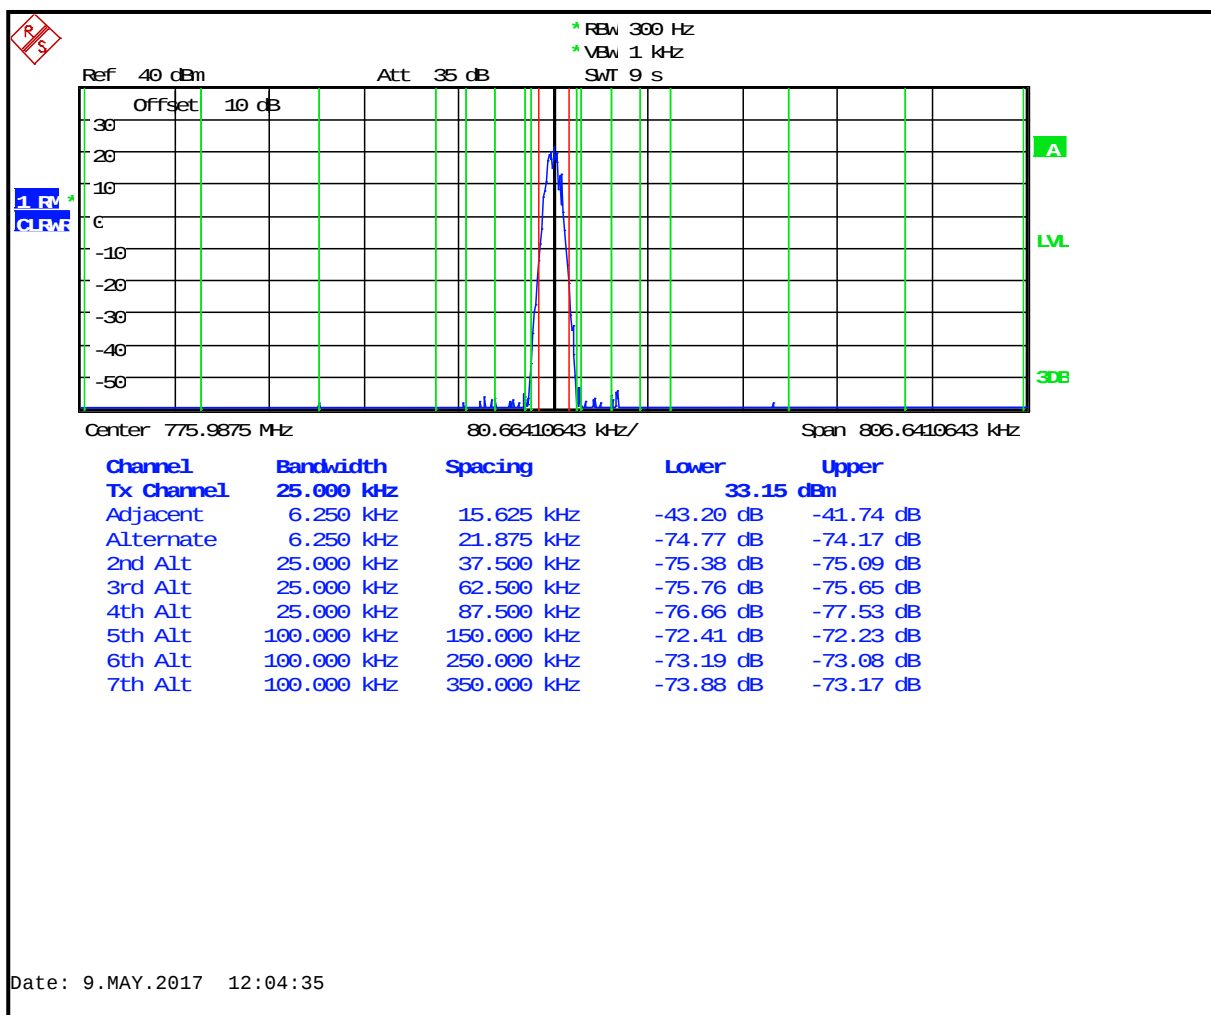


Table 6-11: Adjacent Channel Power - 775.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-83.7
12 MHz to receive band	30(s)	-75	-104.7
In receive band	30(s)	-100	-121.1

Plot 6-12: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing

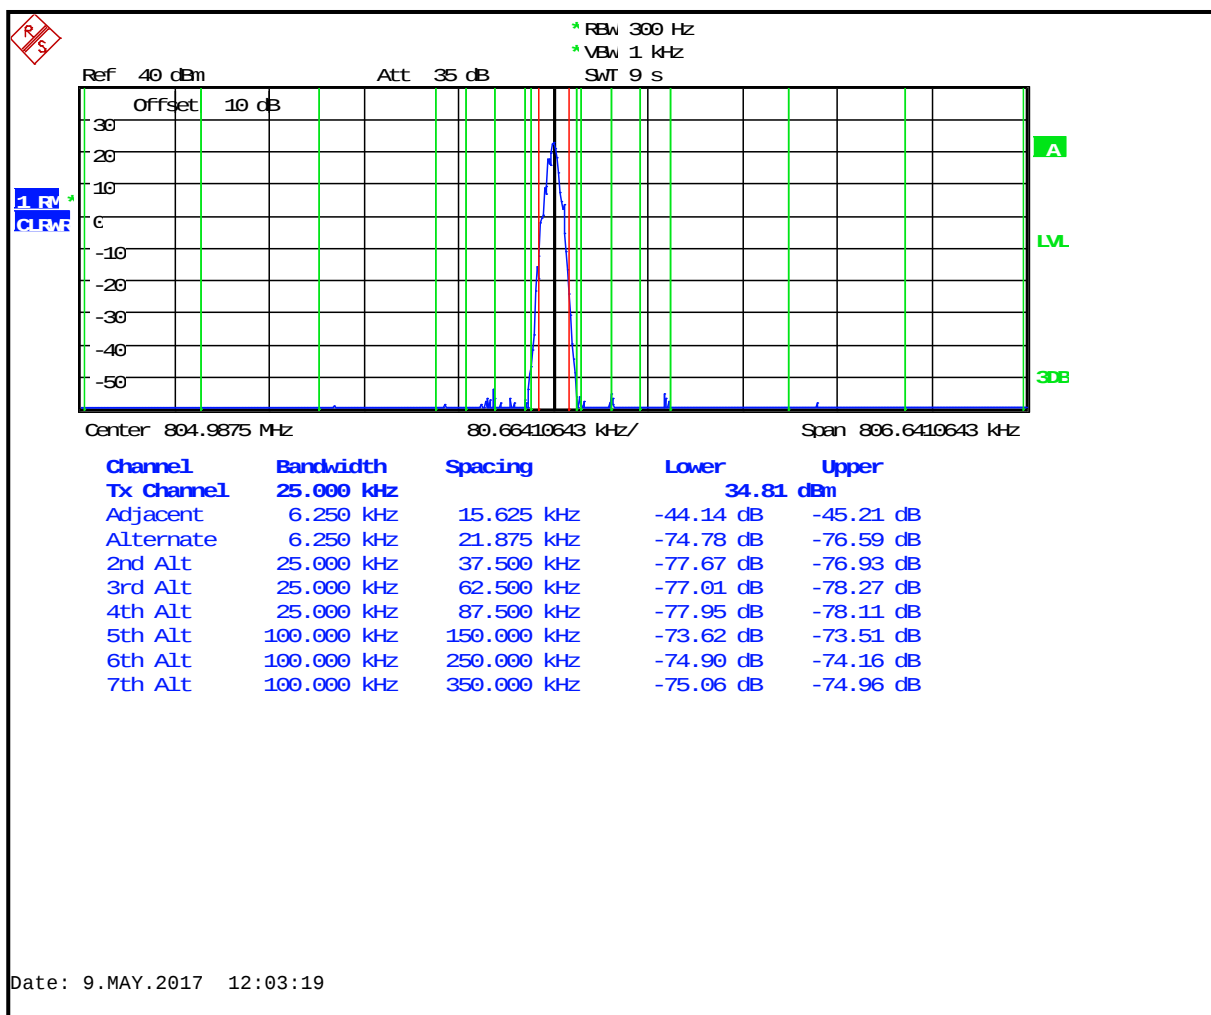


Table 6-12: Adjacent Channel Power - 804.9875 MHz; 4 Level FSK SMR Mode; 25 kHz Channel Spacing

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-103.7
12 MHz to receive band	30(s)	-75	-104.3
In receive band	30(s)	-100	-114.8

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: XL-200P C1D1 Non-Rebanded
ID's: OWDTR-0146-E/3636B-0146
Standards: FCC §22, 74, 80, 90/IC RSS-119
Report #: 2017007TNF

Table 6-13: Test Equipment Used For Testing ACP Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
900948	Weinschel Corp	47-10-43	10 dB Attenuator; 50 W	BH1481	9/1/18

Test Personnel:

Daniel W. Baltzell		May 9, 2017
EMC Test Engineer	Signature	Date of Tests

7 FCC §90.210(g) and §2.1053(a): Field Strength of Spurious Radiation; §90.210, §90.543(f)(3): Out of Band Emissions Limit; RSS-119 5.8.9.2: Out-of-band Emission Limit

7.1 Test Procedure

ANSI C63-26, section 5.5.3

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBi) was added to achieve the EIRP level, then converted from the corrected signal generator level (dBm) to dBW and compared to the limit.

For emissions in the 1559-1610 band, §15.543(f) states: “For operations in the 763–774.9875 MHz and 793–805.9875 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.”

7.2 Test Data

7.2.1 §90.210 Requirements

The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded. The following measurements were attenuated less than 20 dB below the FCC limit and presented as worst case measurements, all others were More than 20 dB below the FCC narrowband limit.

Table 7-1: Field Strength of Spurious Radiation; 136 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
272.000	49.4	-37.0	0.2	-0.5	75.7	-17.6

Table 7-2: Field Strength of Spurious Radiation; 138 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
276.000	60.3	-26.0	0.2	-0.5	64.7	-6.7
414.000	43.2	-36.8	0.2	-0.4	75.4	-17.4

Table 7-3: Field Strength of Spurious Radiation; 141 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
282.000	51.1	-35.0	0.2	-0.6	73.7	-15.7

Table 7-4: Field Strength of Spurious Radiation; 144 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
288.000	46.7	-38.9	0.2	-0.6	77.7	-19.7

Table 7-5: Field Strength of Spurious Radiation; 156.8 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
313.600	47.6	-37.3	0.2	-0.6	75.9	-18.1

Table 7-6: Field Strength of Spurious Radiation; 162 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
324.000	46.2	-38.2	0.2	-0.6	76.9	-19.0

Table 7-7: Field Strength of Spurious Radiation; 174 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
348.000	45.5	-38.2	0.2	-0.5	76.9	-18.8

Table 7-8: Field Strength of Spurious Radiation; 378 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
756.000	37.2	-37.1	0.2	-1.3	75.7	-18.6
1134.000	34.1	-39.5	0.3	4.8	72.1	-15.0

Table 7-9: Field Strength of Spurious Radiation; 406.1 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
812.200	38.8	-35.3	0.3	-1.5	74.3	-17.0
1218.300	37.8	-35.7	0.3	4.9	68.3	-11.1

Table 7-10: Field Strength of Spurious Radiation; 418 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
836.000	40.0	-34.6	0.3	-1.4	73.5	-16.3

Table 7-11: Field Strength of Spurious Radiation; 430 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1290.000	29.2	-44.4	0.3	5.3	76.6	-19.4

Table 7-12: Field Strength of Spurious Radiation; 450 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
900.000	37.1	-37.0	0.3	-1.2	75.6	-18.5
1350.000	32.8	-40.8	0.4	5.9	72.4	-15.3

Table 7-13: Field Strength of Spurious Radiation; 454 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
908.000	41.0	-32.9	0.3	-1.2	71.5	-14.4
1362.000	27.8	-45.6	0.4	6.0	77.1	-19.9

Table 7-14: Field Strength of Spurious Radiation; 456 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
912.000	37.2	-34.4	0.3	-1.2	73.1	-15.9
1368.000	32.6	-43.4	0.4	6.1	74.9	-17.7

Table 7-15: Field Strength of Spurious Radiation; 459.025 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
918.050	40.6	-33.4	0.3	-1.2	72.0	-14.8

Table 7-16: Field Strength of Spurious Radiation; 459.975 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
919.950	38.6	-35.5	0.3	-1.2	74.1	-16.9

Table 7-17: Field Strength of Spurious Radiation; 470 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1410.000	34.8	-38.6	0.4	6.5	69.6	-12.4

Table 7-18: Field Strength of Spurious Radiation; 512 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1024.000	30.0	-43.8	0.3	4.5	76.7	-19.6
1536.000	33.3	-39.5	0.4	7.4	69.7	-12.5

Table 7-19: Field Strength of Spurious Radiation; 522 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1044.000	32.6	-41.3	0.3	4.6	74.1	-17.0
1566.000	26.4	-46.6	0.4	7.6	76.5	-19.4

Table 7-20: Field Strength of Spurious Radiation; 768 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
6144.000	19.2	-51.9	1.2	13.5	73.8	-19.5

Table 7-21: Field Strength of Spurious Radiation; 769 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
6152.000	20.0	-51.0	1.2	13.5	72.9	-18.7

Table 7-22: Field Strength of Spurious Radiation; 771 MHz

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
6168.000	19.3	-51.7	1.2	13.4	73.6	-19.5

7.2.2 §90.543(f) Requirements

The worst-case emissions test data are shown.

Limit: -70 dBW EIRP

Table 7-23: Field Strength of Spurious Radiation

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBW)	Margin (dB)
1586.0	46.8	-49.8	0.4	7.7	-72.5	-2.5
1596.0	33.1	-54.7	0.4	7.7	-77.4	-7.4
1598.0	38.6	-60.3	0.4	7.7	-83.0	-13.0
1602.0	42.5	-51.4	0.4	7.7	-74.1	-4.1
1610.0	45.1	-48.9	0.4	7.7	-71.6	-1.6
1586.0	46.8	-49.8	0.4	7.7	-72.5	-2.5

Table 7-24: Test Equipment Used For Testing Field Strength of Spurious Radiation


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/3/17
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/1/17
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901582	Rohde & Schwarz	1167.0000.02	Signal Generator	101903	3/20/18
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	6/11/17
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	4/9/18
900323	EMCO	3160-07	Horn Antennas (8.2 – 12 GHz)	9605-1054	4/9/18
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/9/18
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	9/26/17
901129	Par Electronics	188-174 (25W)	VHF Notch Filters	N/A	9/26/17
901135	Par Electronics	400-512 (25W)	UHF Notch Filter	N/A	9/26/17

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: XL-200P C1D1 Non-Rebanded
ID's: OWDTR-0146-E/3636B-0146
Standards: FCC §22, 74, 80, 90/IC RSS-119
Report #: 2017007TNF

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

May 5-23, 2017
Dates of Tests

8 FCC §2.1049(c)(1): Occupied Bandwidth; §90.543(d), §90.210 Authorized Bandwidth; §74.462: Authorized Bandwidth and Emissions; §80.205: Bandwidths; §80.211: Emission Limitations; RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks

Occupied Bandwidth - Compliance with the Emission Masks

8.1 Test Procedure

ANSI C63.26 5.4

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

Applicable FCC Emission Masks		
Frequency Band (MHz)	Mask for Equipment with Audio Low Pass Filter	Mask for Equipment Without Audio Low Pass Filter
Below 25 ¹	A or B	A or C
25–50.....	B	C
72–76.....	B	C
150–174 ²	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512 ²	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869 ³	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990 MHz	L or M	L or M
5850–5925 ⁴		
All other bands	B	C
1 Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable. 2 Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E. 3 Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of § 90.691. 4 DSRCS Roadside Units equipment in the 5850–5925 MHz band is governed under subpart M of this part.		


Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
 Model: XL-200P C1D1 Non-Rebanded
 ID's: OWDTR-0146-E/3636B-0146
 Standards: FCC §22, 74, 80, 90/IC RSS-119
 Report #: 2017007TNF


Applicable IC Emission Masks					
Frequency Band (MHz)	Related SRSP for Channeling Plan and ERP	Channel Bandwidth (kHz)	Authorized Bandwidth (kHz)	Masks for Equipment With Audio Filter	Masks for Equipment Without Audio Filter
138-144, 148-149.9, 150.05-174	SRSP-500	30	20	B	C
		15	11.25	D	D
		7.5	6	E	E
406.1-430, 450-470	SRSP-501	25	20 22	B Y	C (G for paging systems) Y
		12.5	11.25	D	D
		6.25	6	E	E
806-821/851-866, 821-824/866-869	SRSP-502	25	20 22	B Y	G Y
		12.5	11.25	D	D
		6.25	6	E	E

8.2 Test Data


Plot 8-1: Occupied Bandwidth – 150 MHz; Analog WB (Mask B)

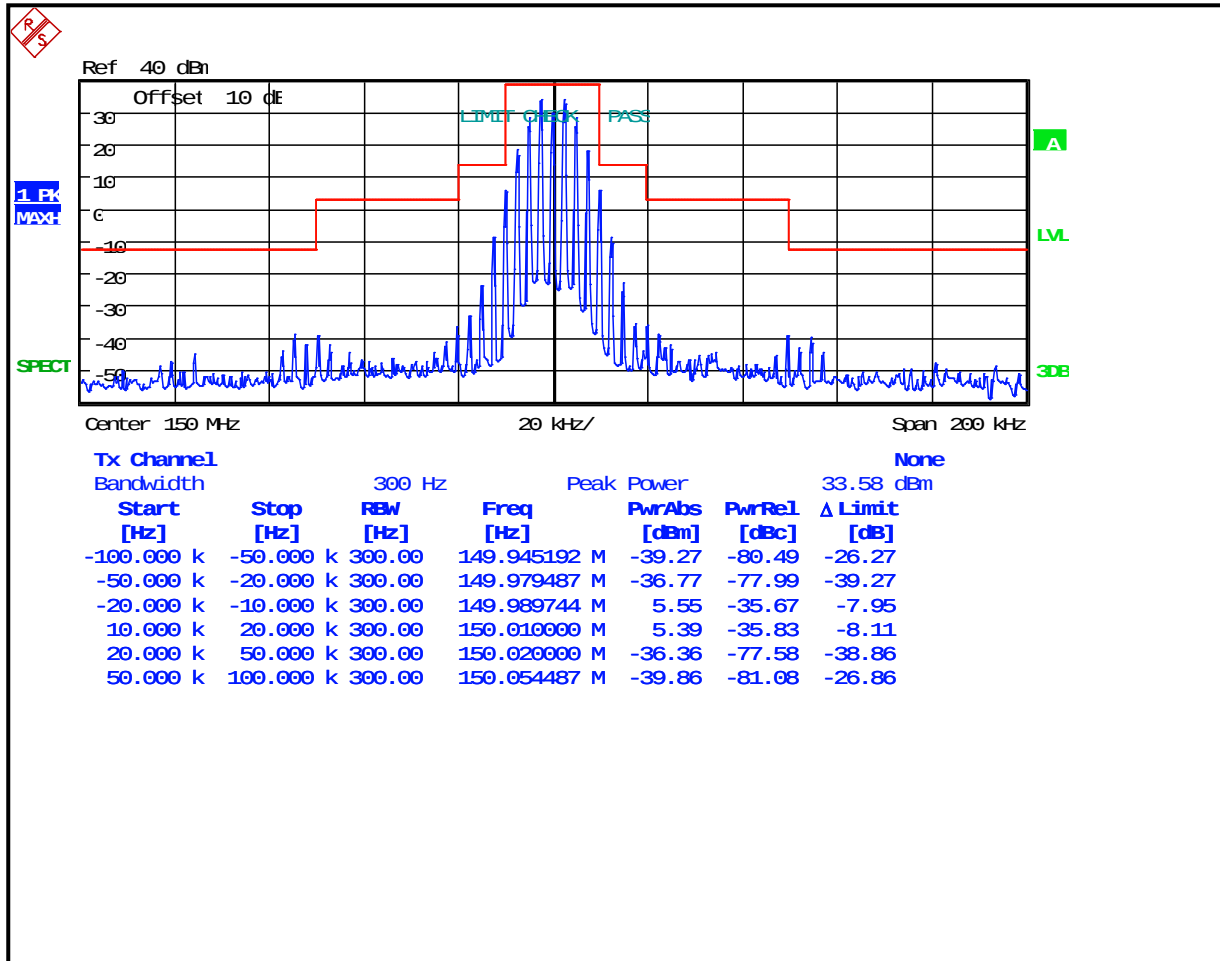


Plot 8-2: Occupied Bandwidth – 156.8 MHz; Analog WB (Mask B)

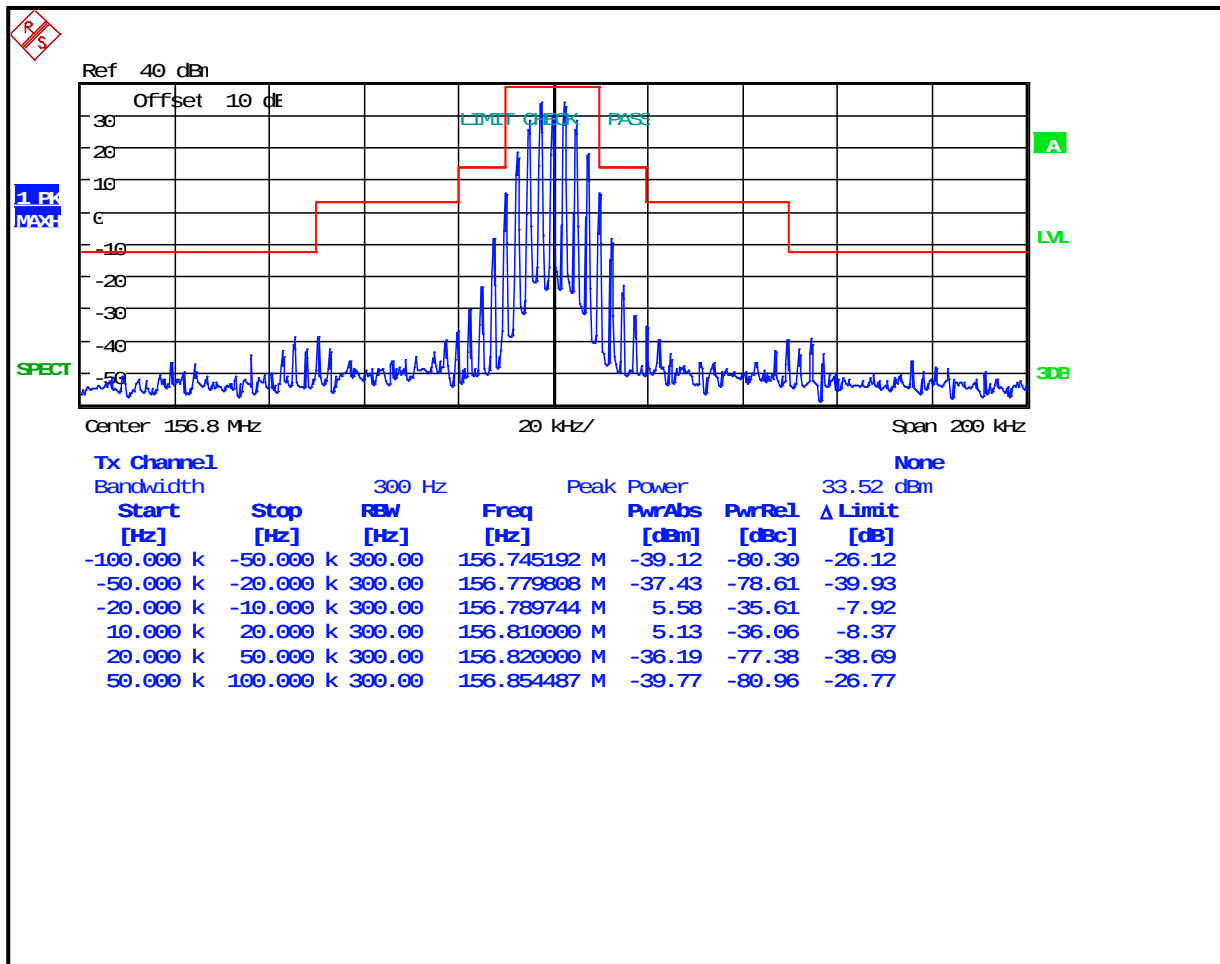


Plot 8-3: Occupied Bandwidth – 162 MHz; Analog WB (Mask B)

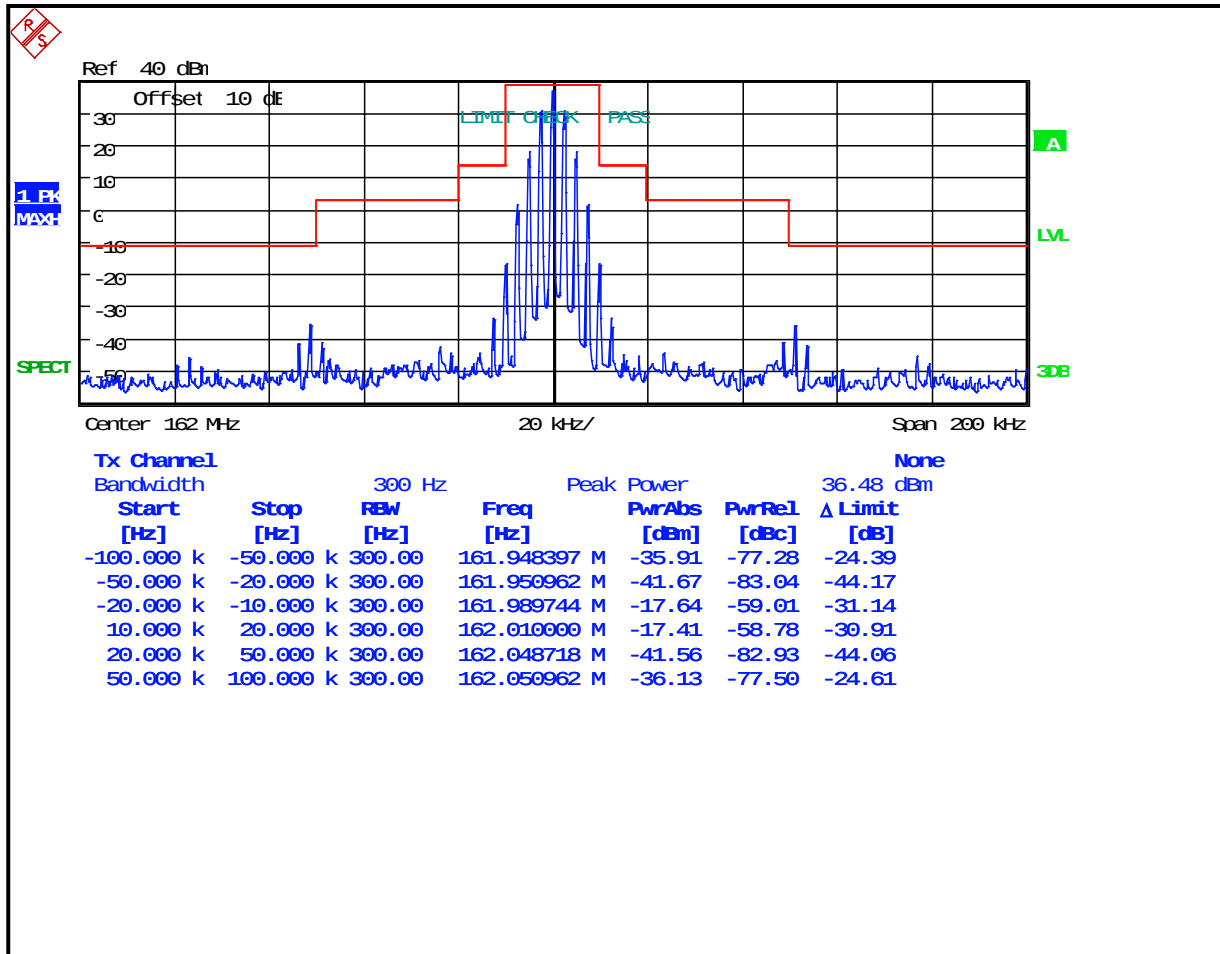


Plot 8-4: Occupied Bandwidth – 174 MHz; Analog WB (Mask B)

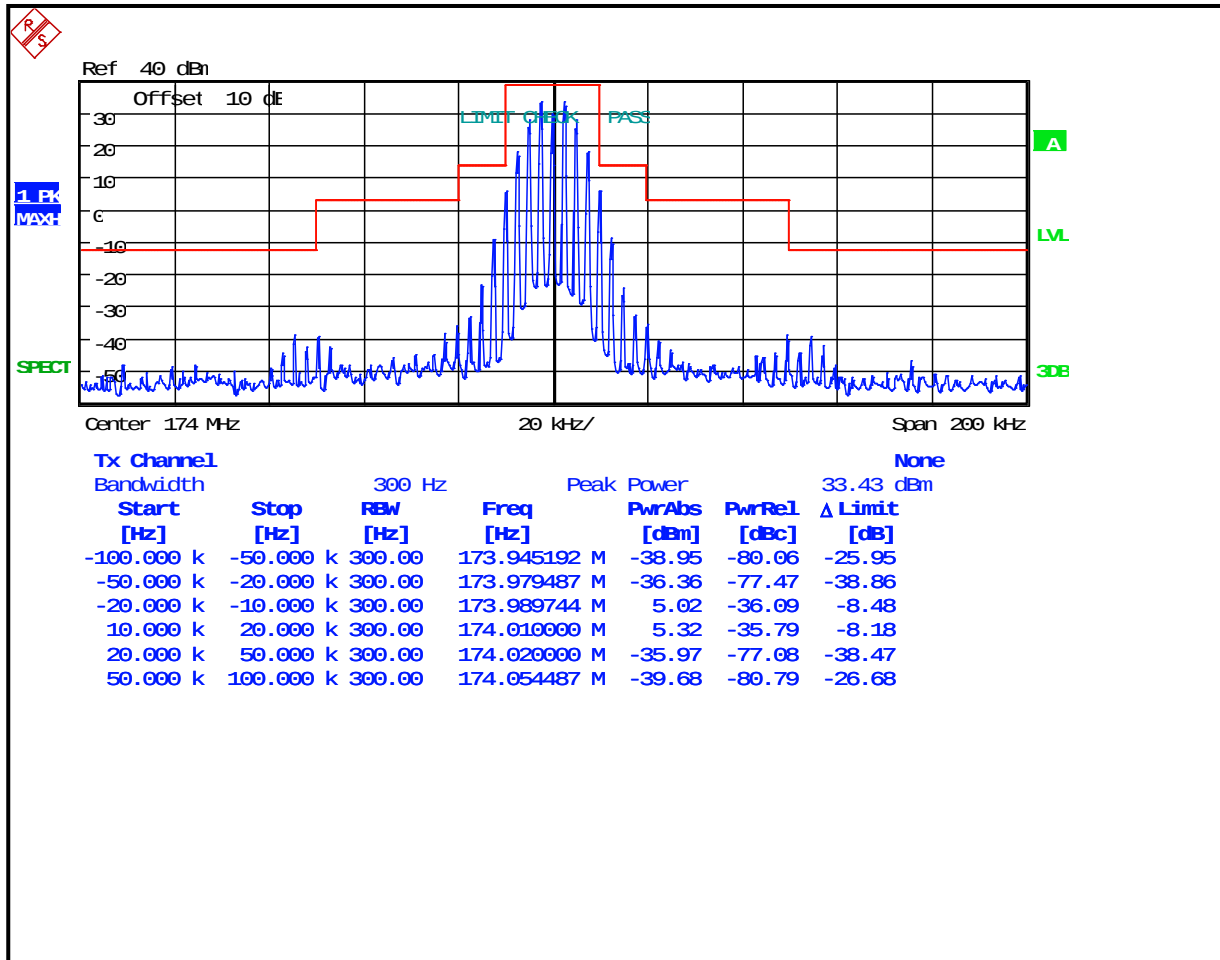


Plot 8-5: Occupied Bandwidth – 150 MHz; Analog NB (Mask D)

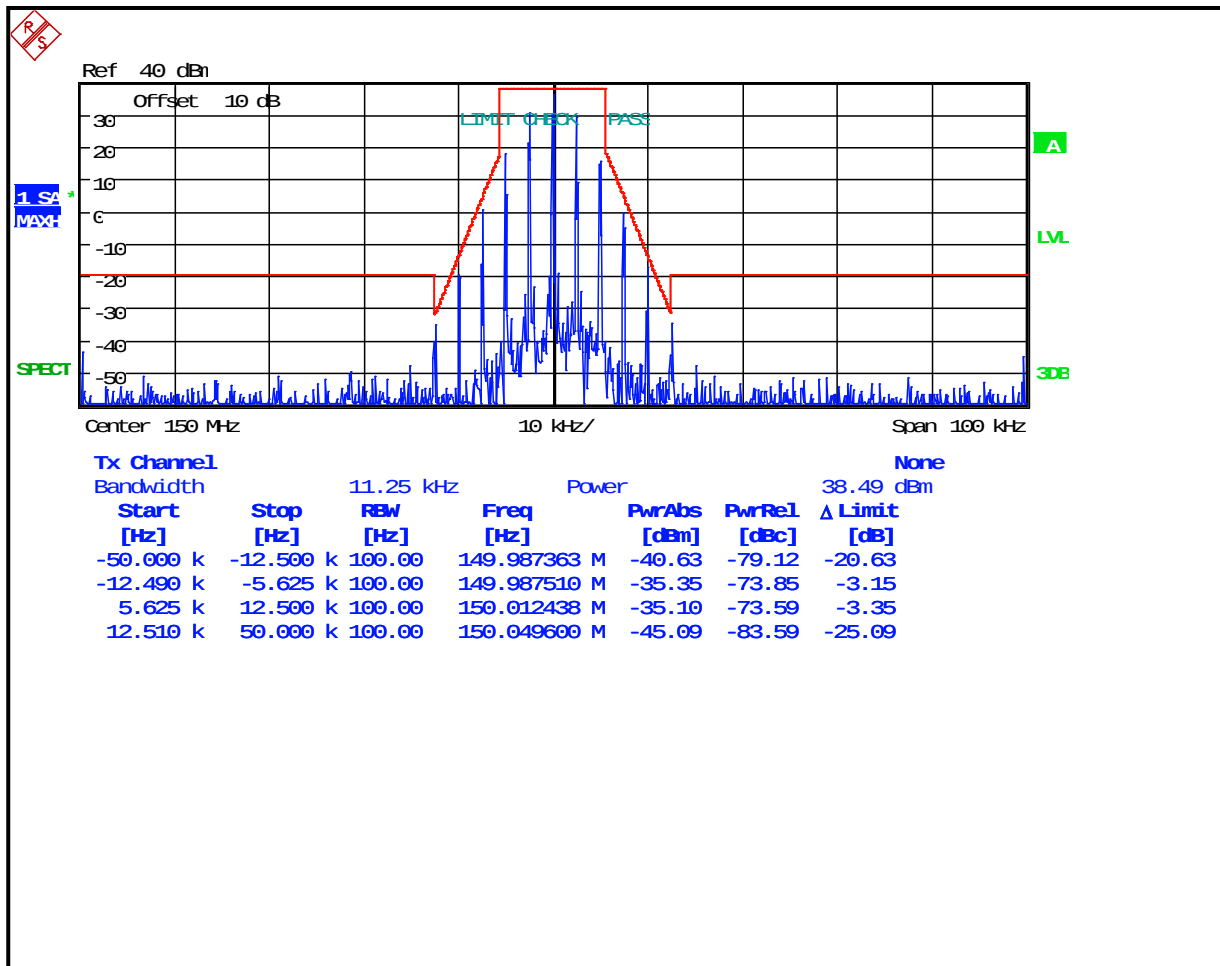


Plot 8-6: Occupied Bandwidth – 156.8 MHz; Analog NB (Mask D)

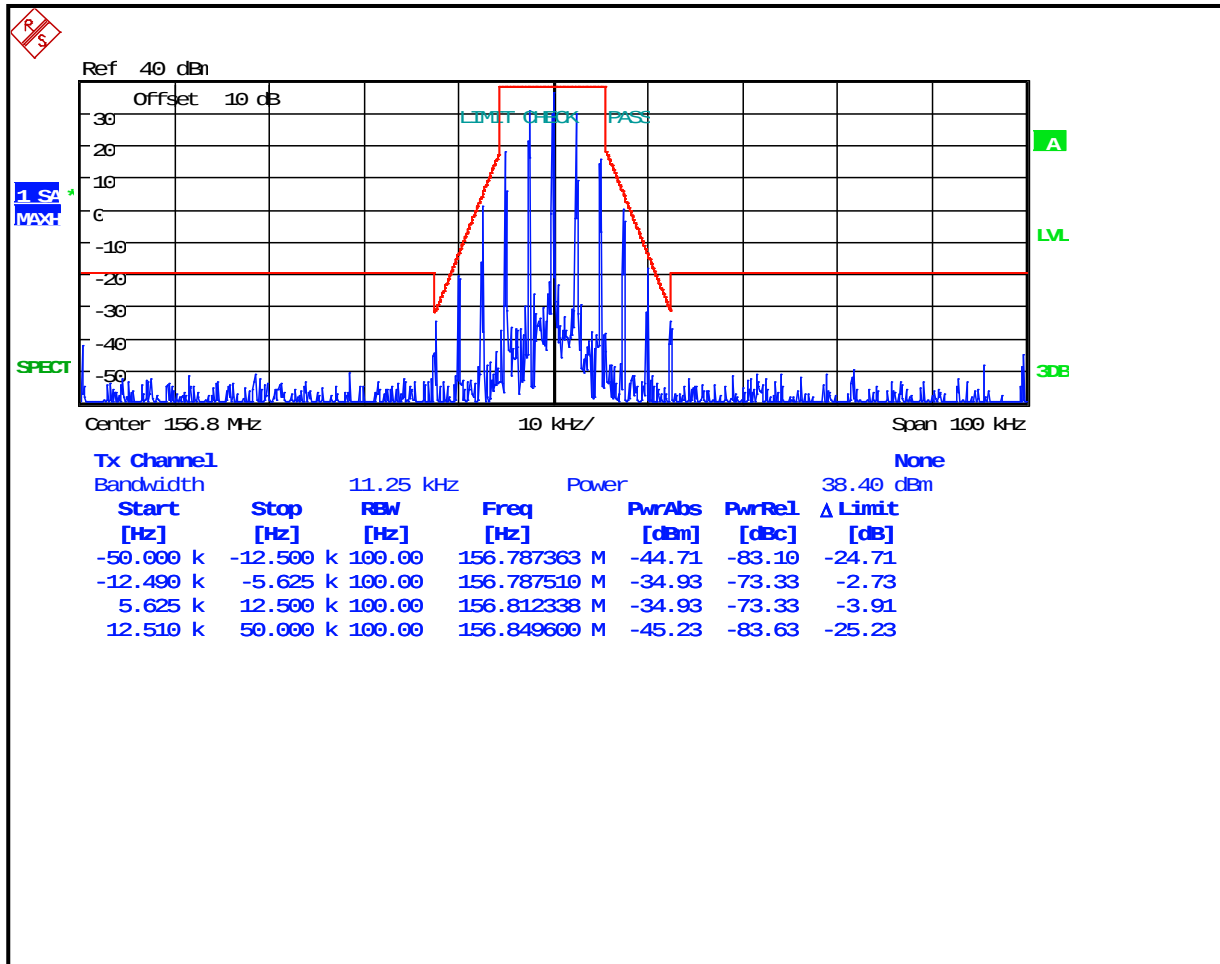


Plot 8-7: Occupied Bandwidth – 162 MHz; Analog NB (Mask D)

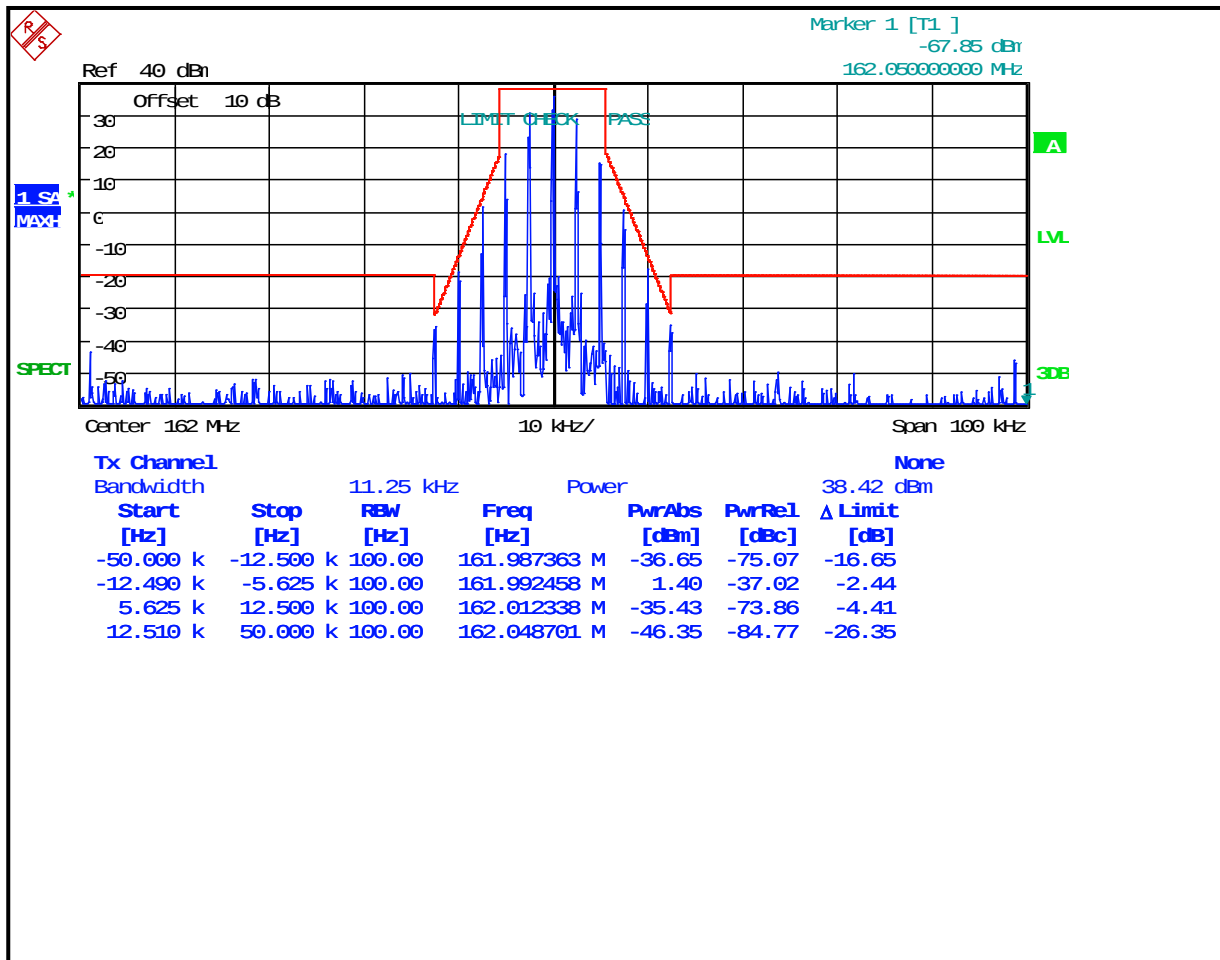


Plot 8-8: Occupied Bandwidth – 174 MHz; Analog NB (Mask D)

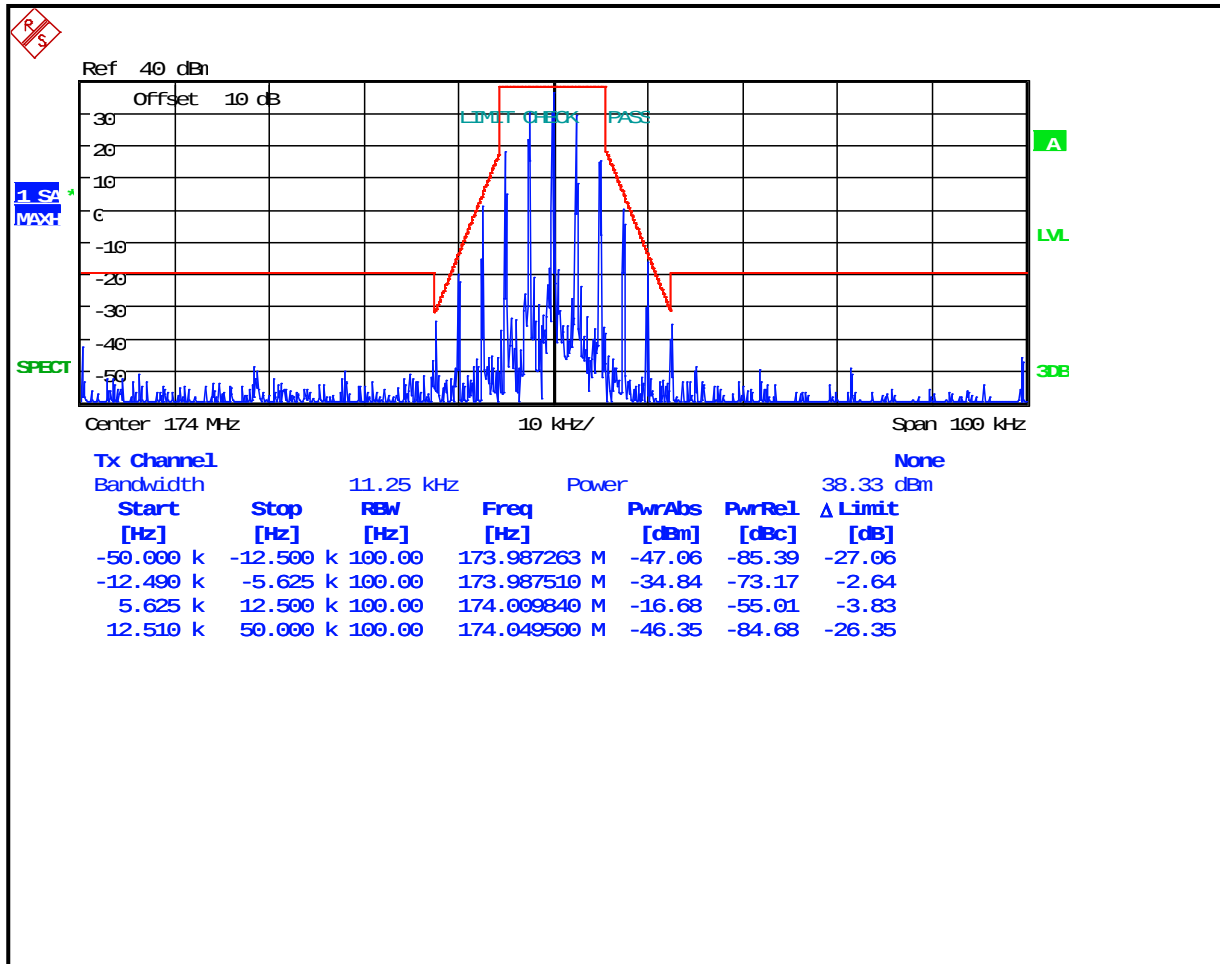


Plot 8-9: Occupied Bandwidth – 150 MHz; P25; (Mask D)

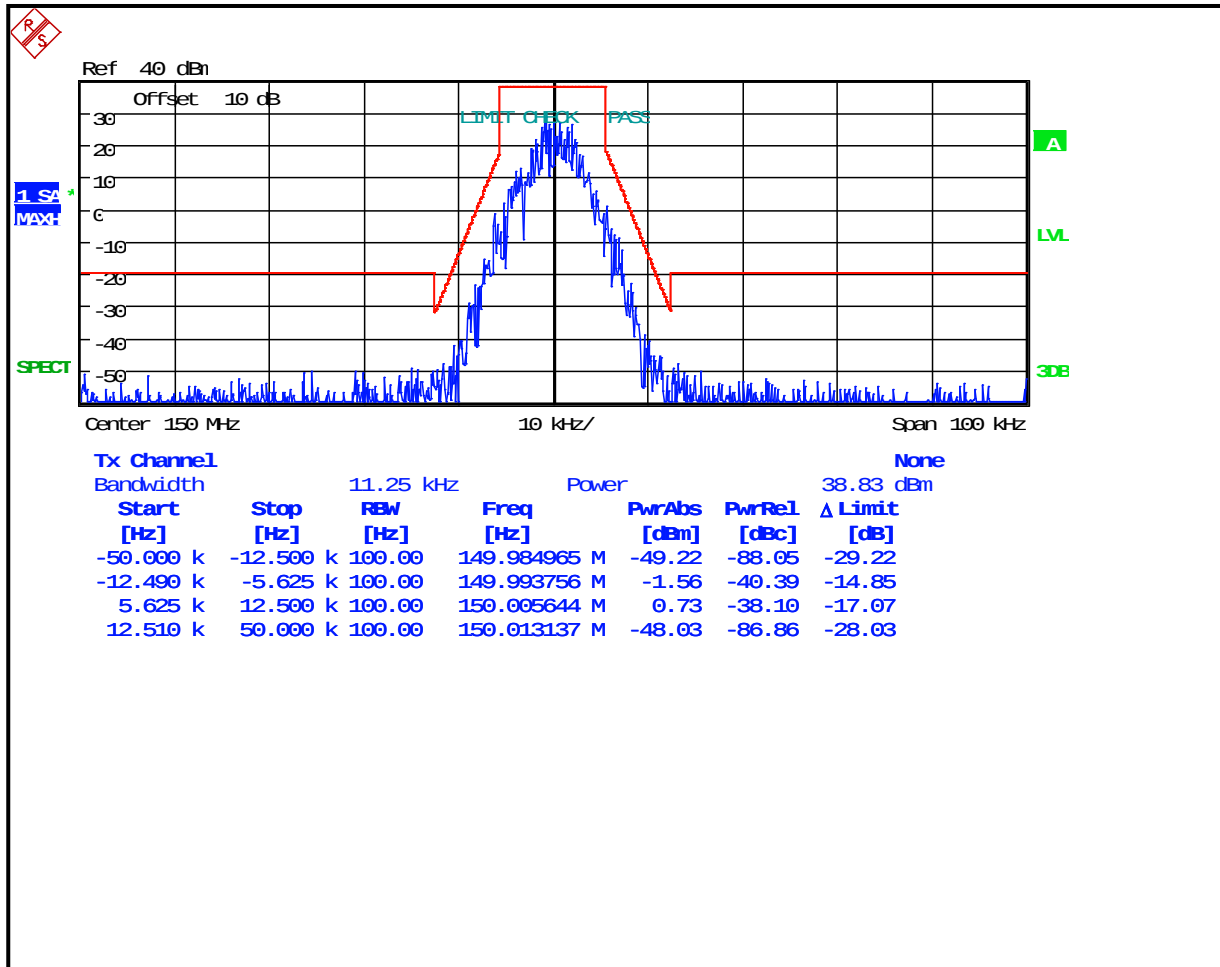


Plot 8-10: Occupied Bandwidth – 156.8 MHz; P25; (Mask D)

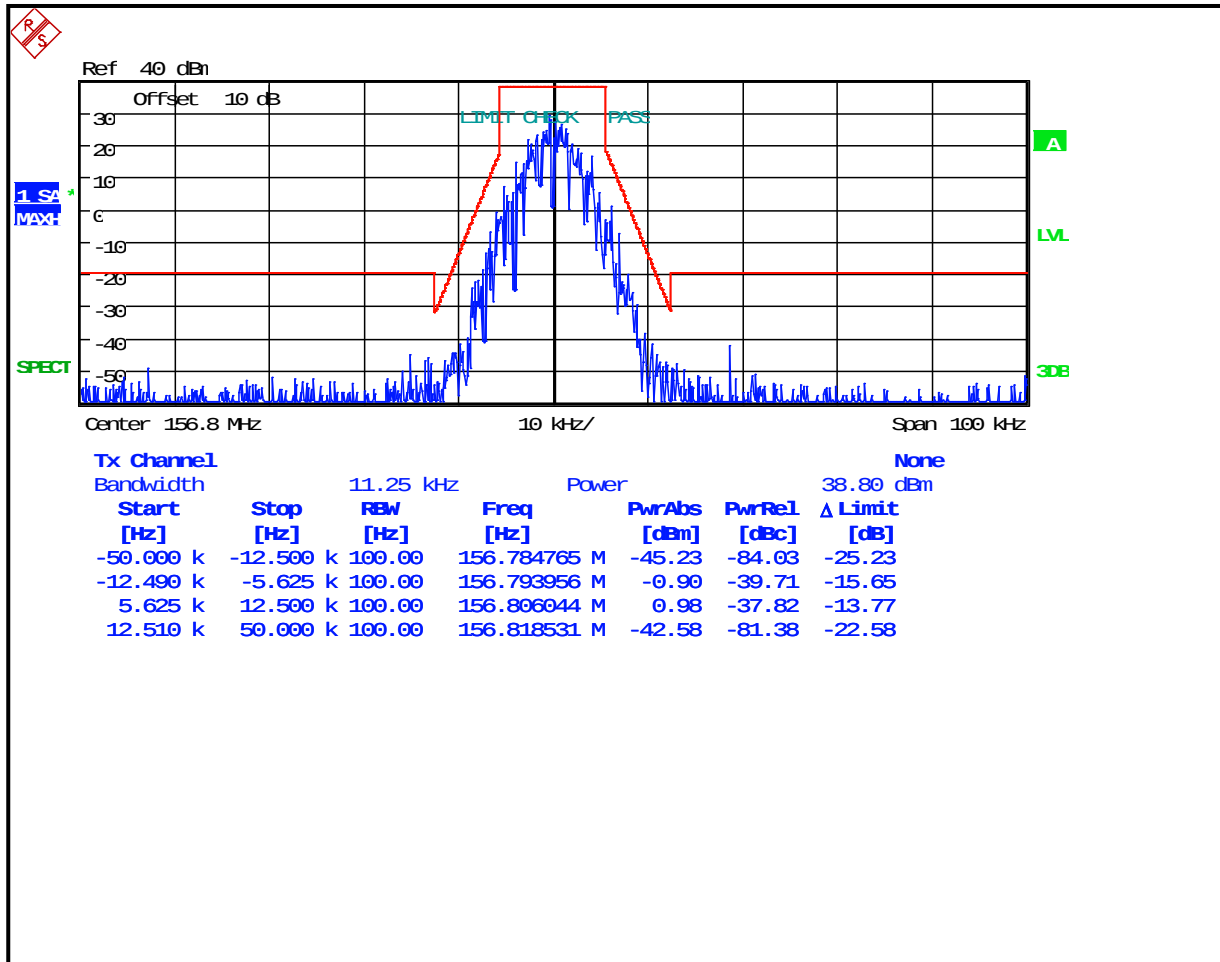


Plot 8-11: Occupied Bandwidth – 162 MHz; P25; (Mask D)

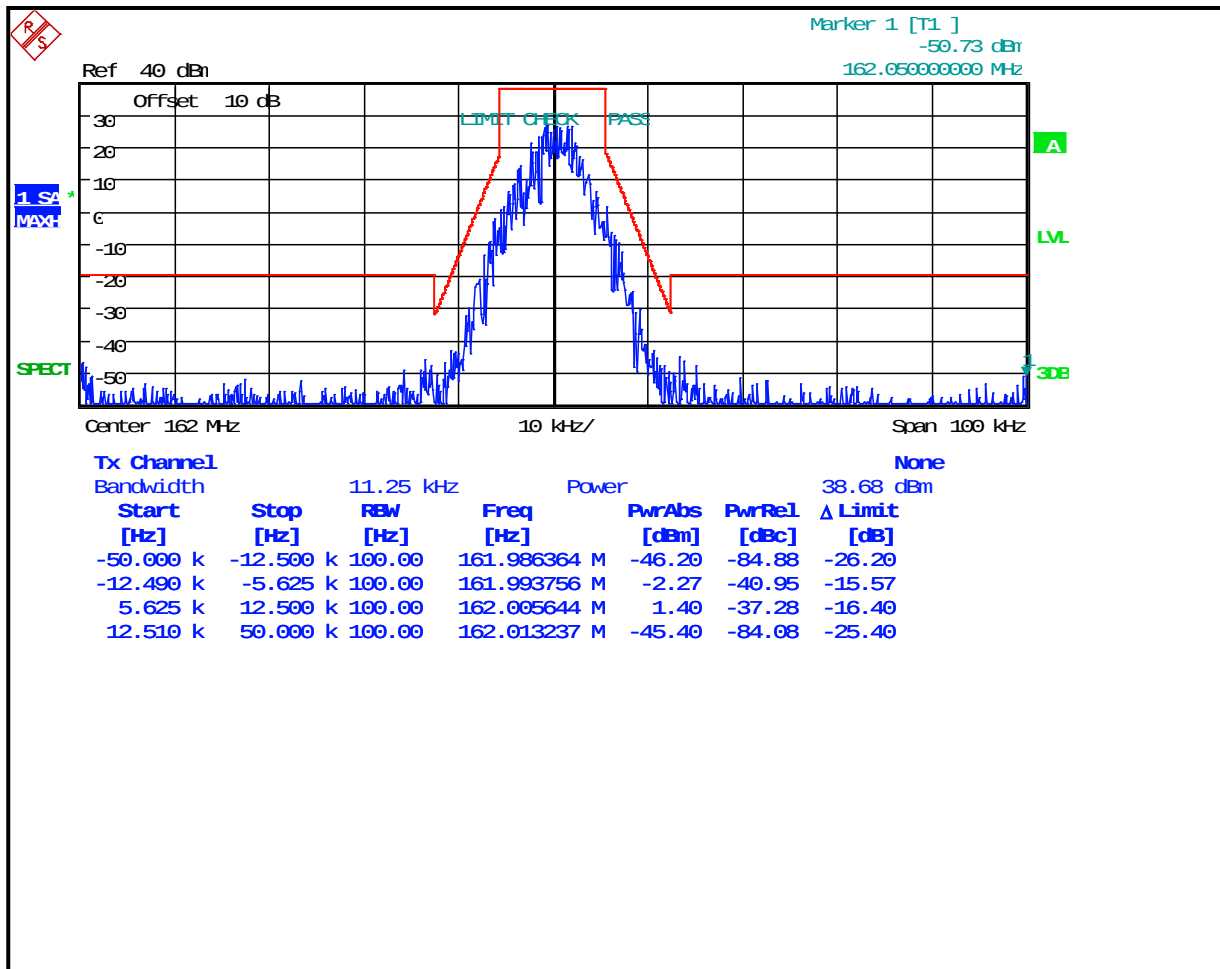


Plot 8-12: Occupied Bandwidth – 174 MHz; P25; (Mask D)

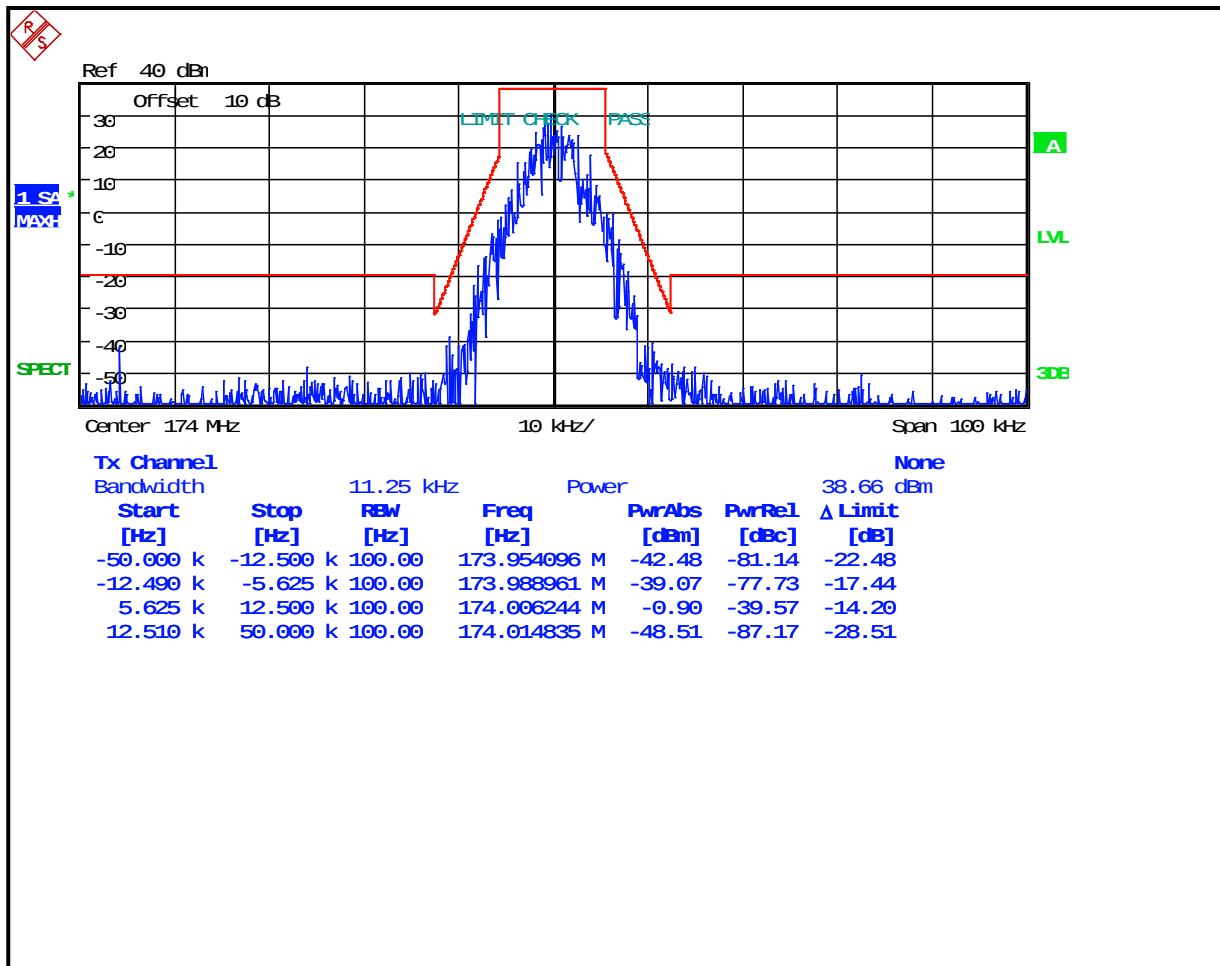


Plot 8-13: Occupied Bandwidth – 150 MHz; CPM TDMA TDMA; (Mask D)

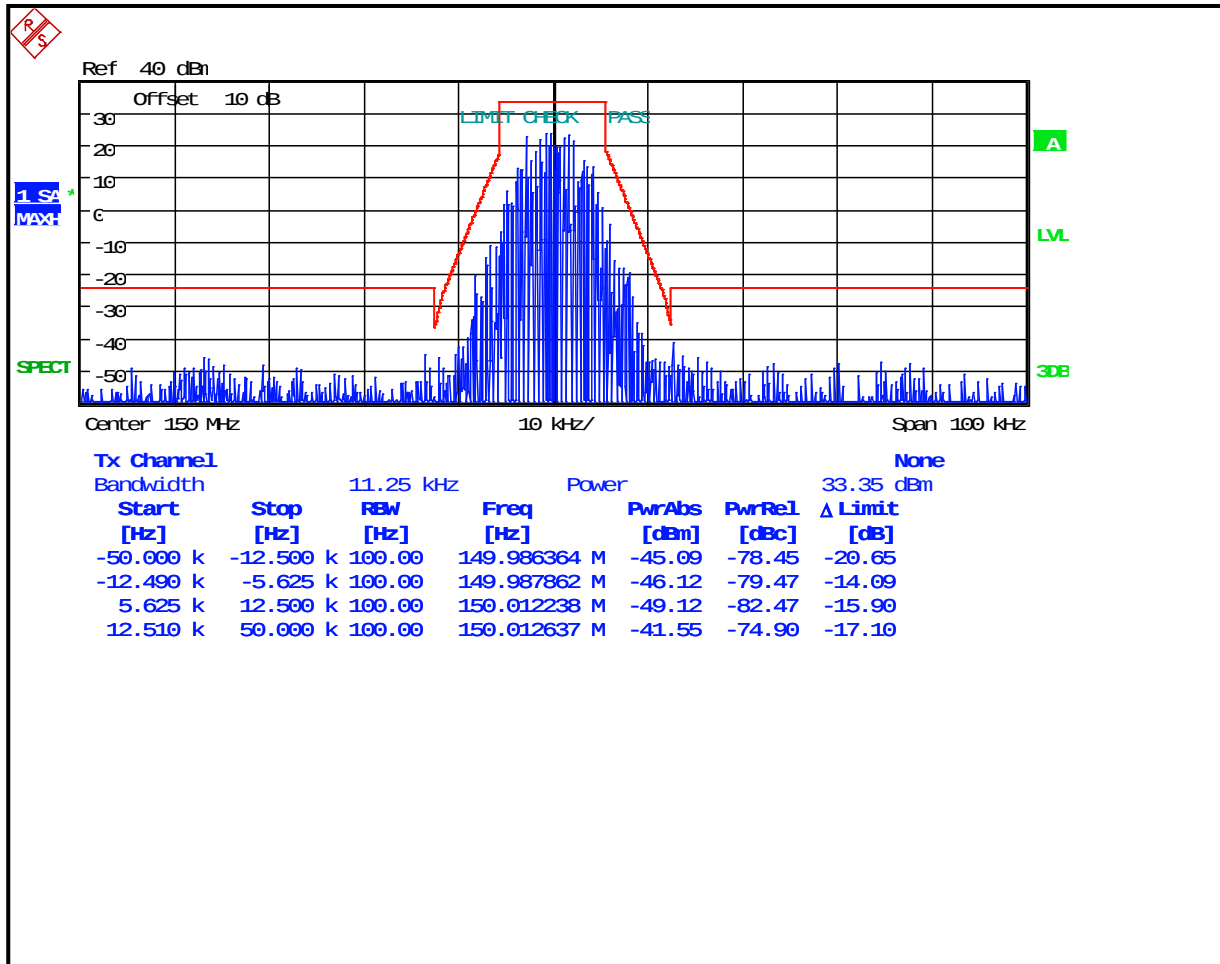


Plot 8-14: Occupied Bandwidth – 156.8 MHz; CPM TDMA TDMA; (Mask D)

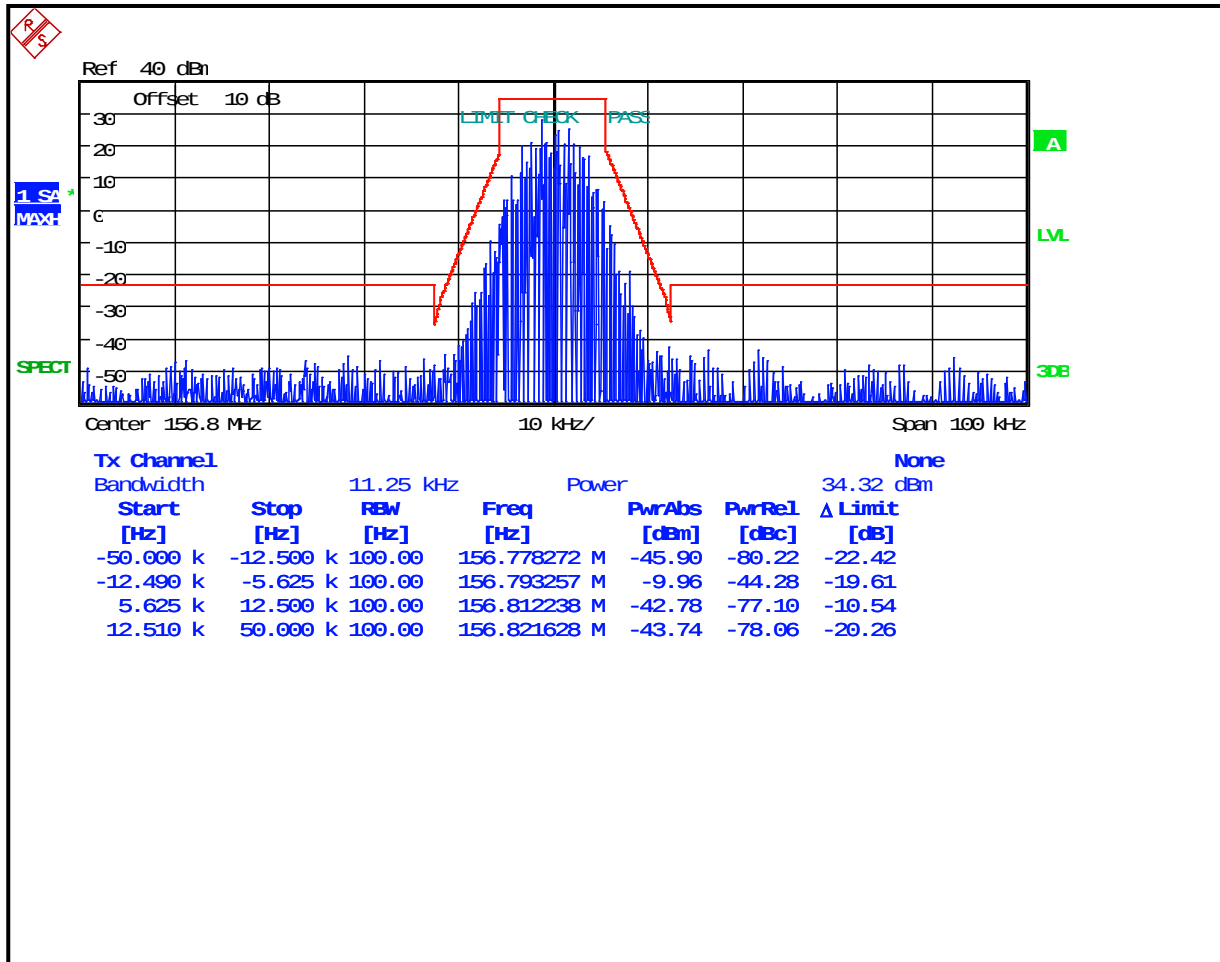


Plot 8-15: Occupied Bandwidth – 162 MHz; CPM TDMA TDMA; (Mask D)

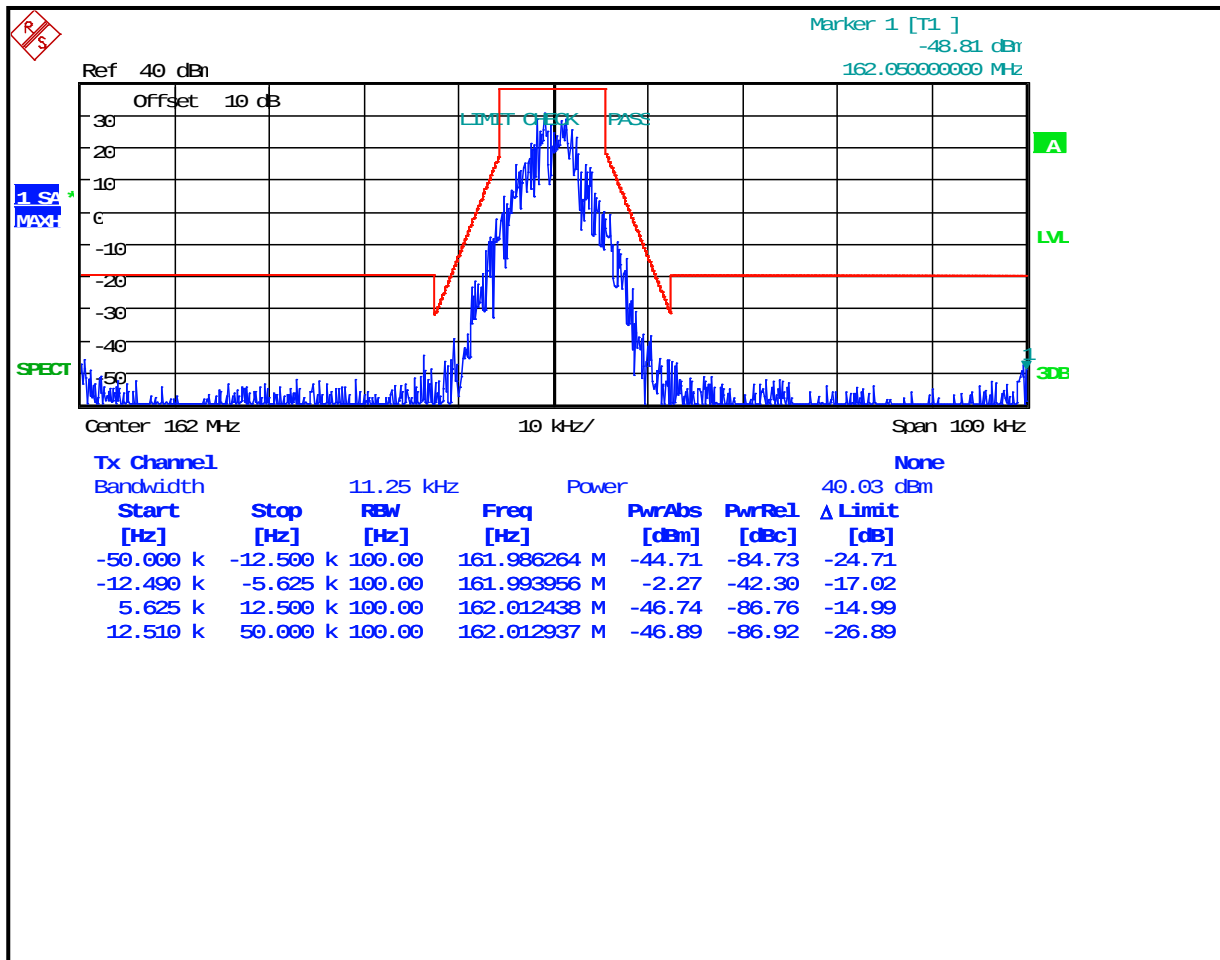


Plot 8-16: Occupied Bandwidth – 174 MHz; CPM TDMA TDMA; (Mask D)

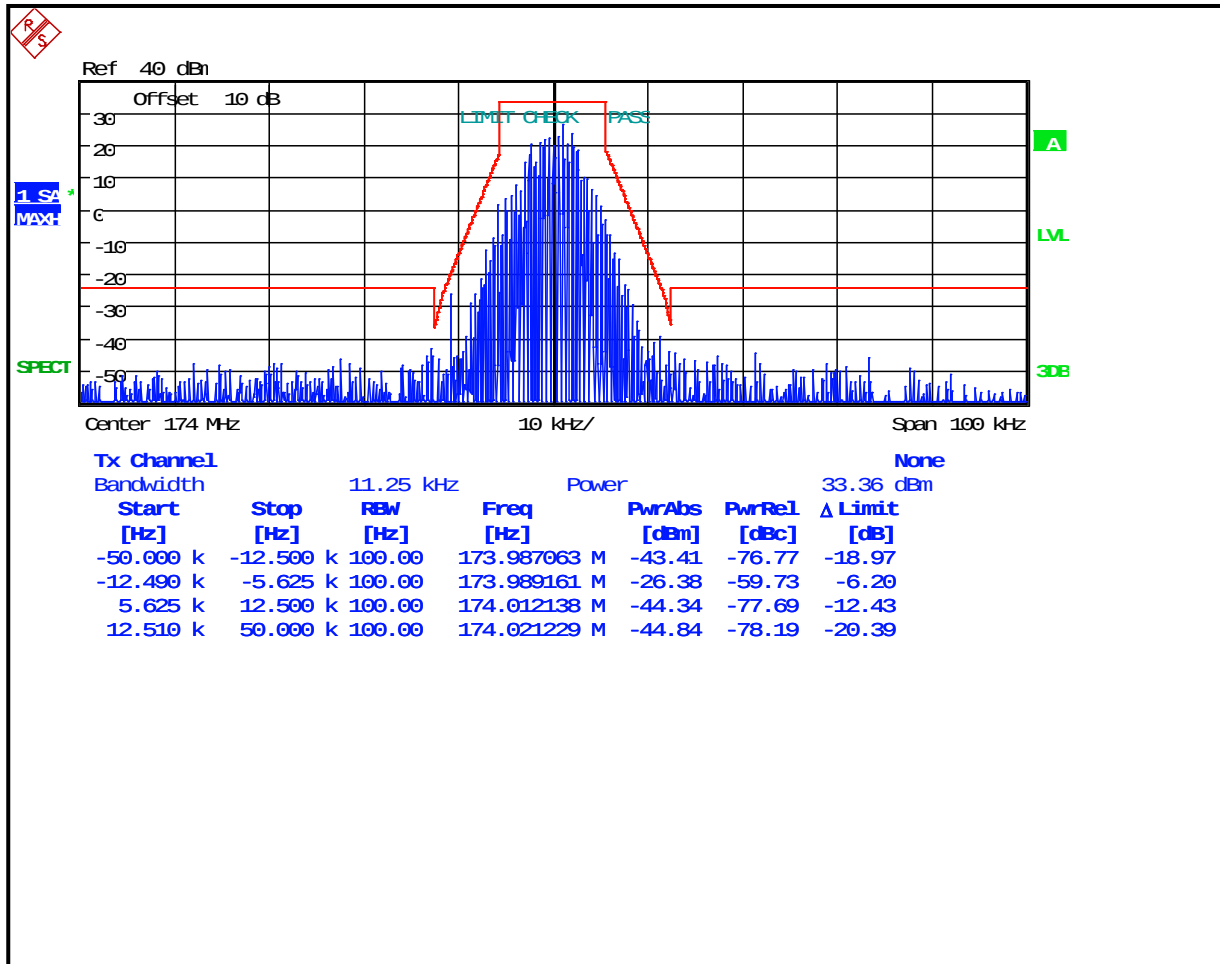


Plot 8-17: Occupied Bandwidth – 150 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D)

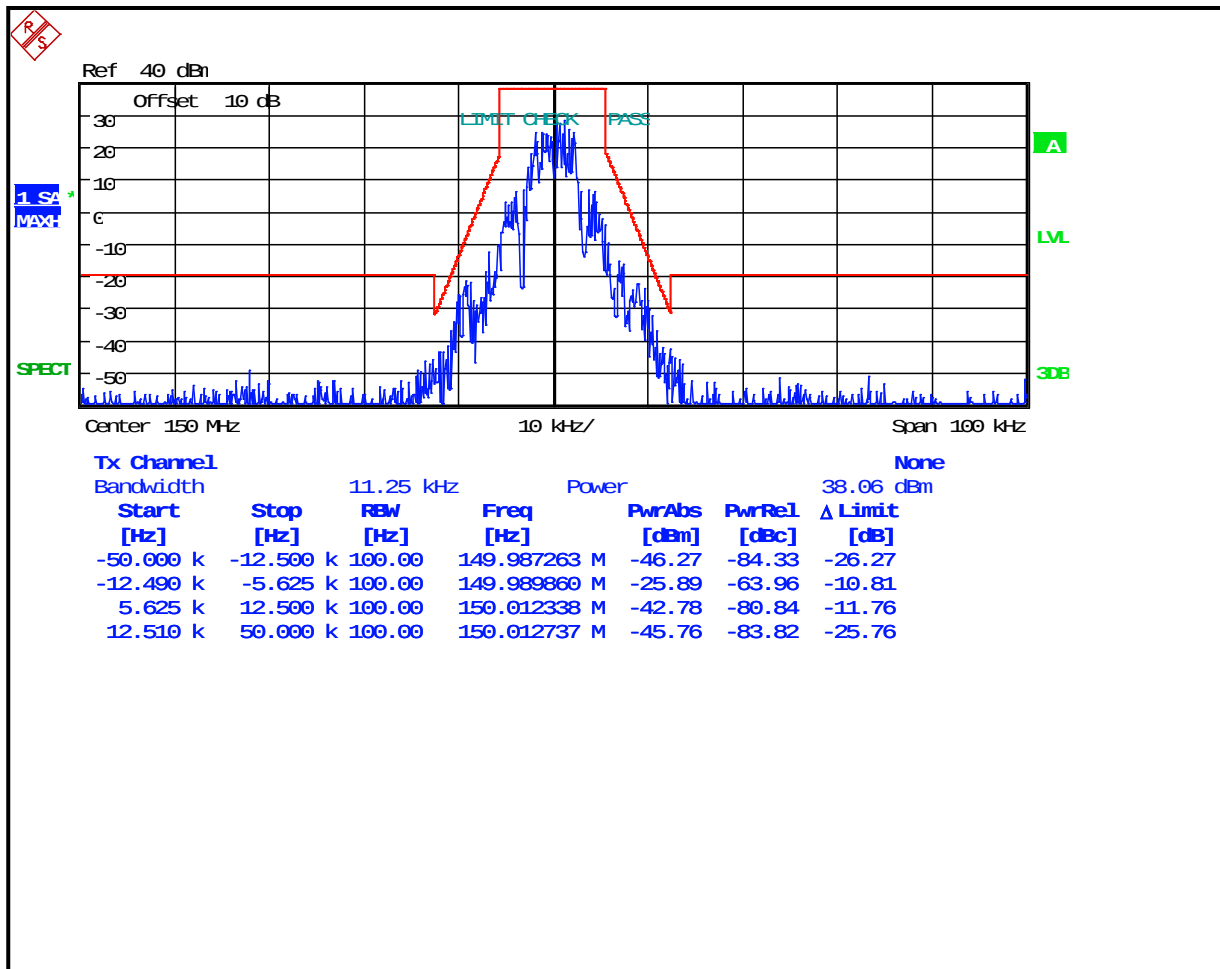


Plot 8-18: Occupied Bandwidth – 156.8 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D)

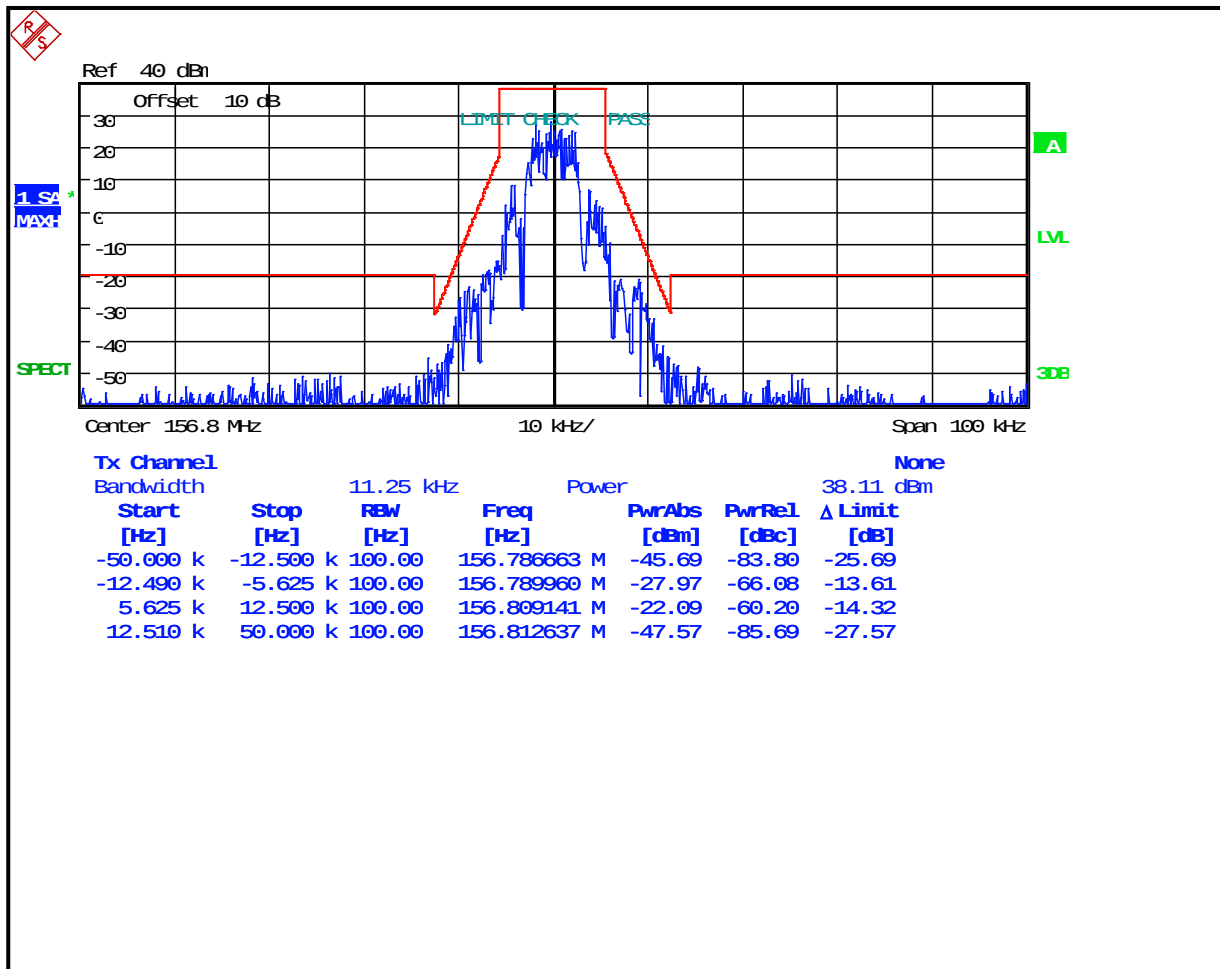


Plot 8-19: Occupied Bandwidth – 162 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D)

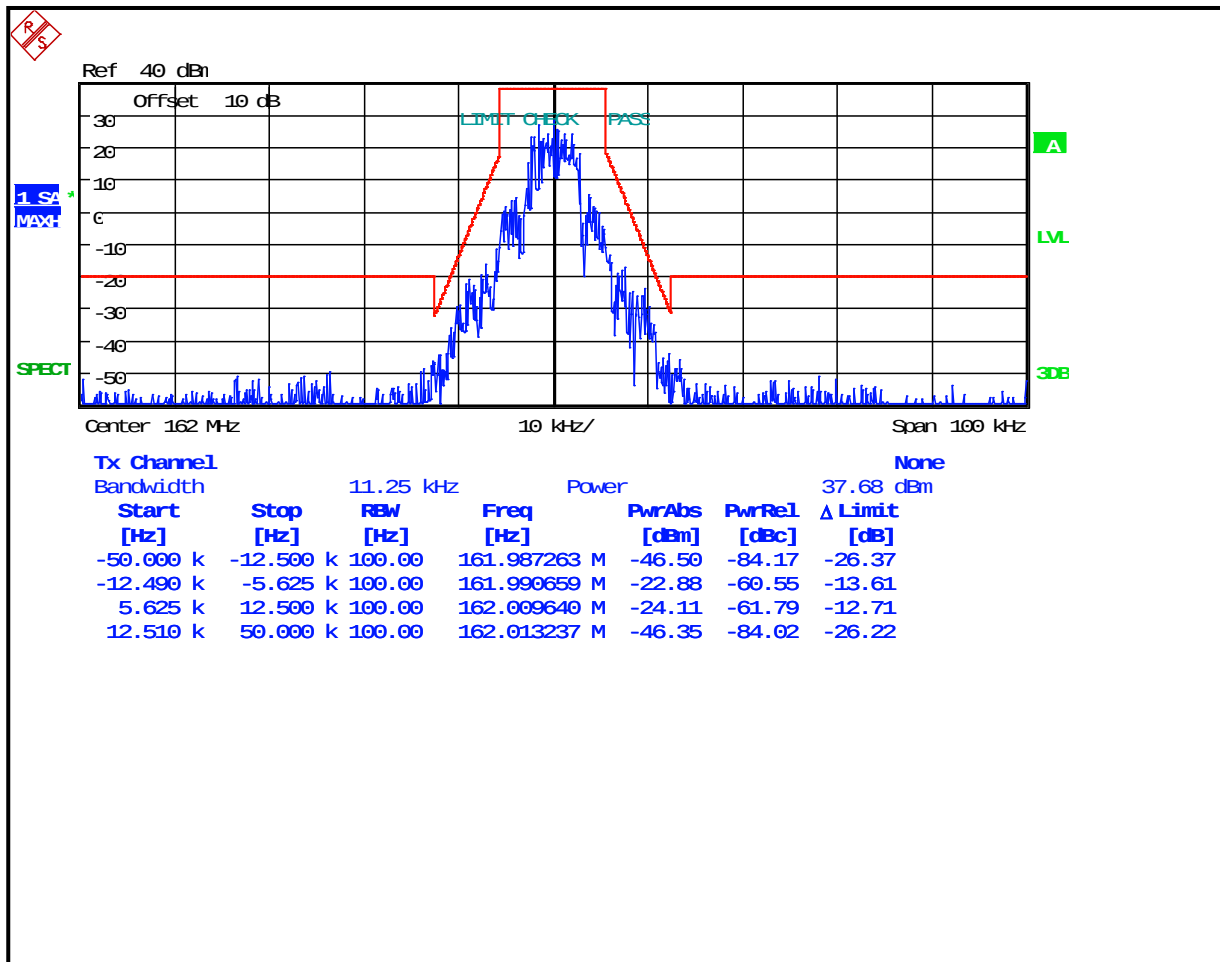


Plot 8-20: Occupied Bandwidth – 174 MHz; 2-Level FSK 4800; XNB EDACS; (Mask D)

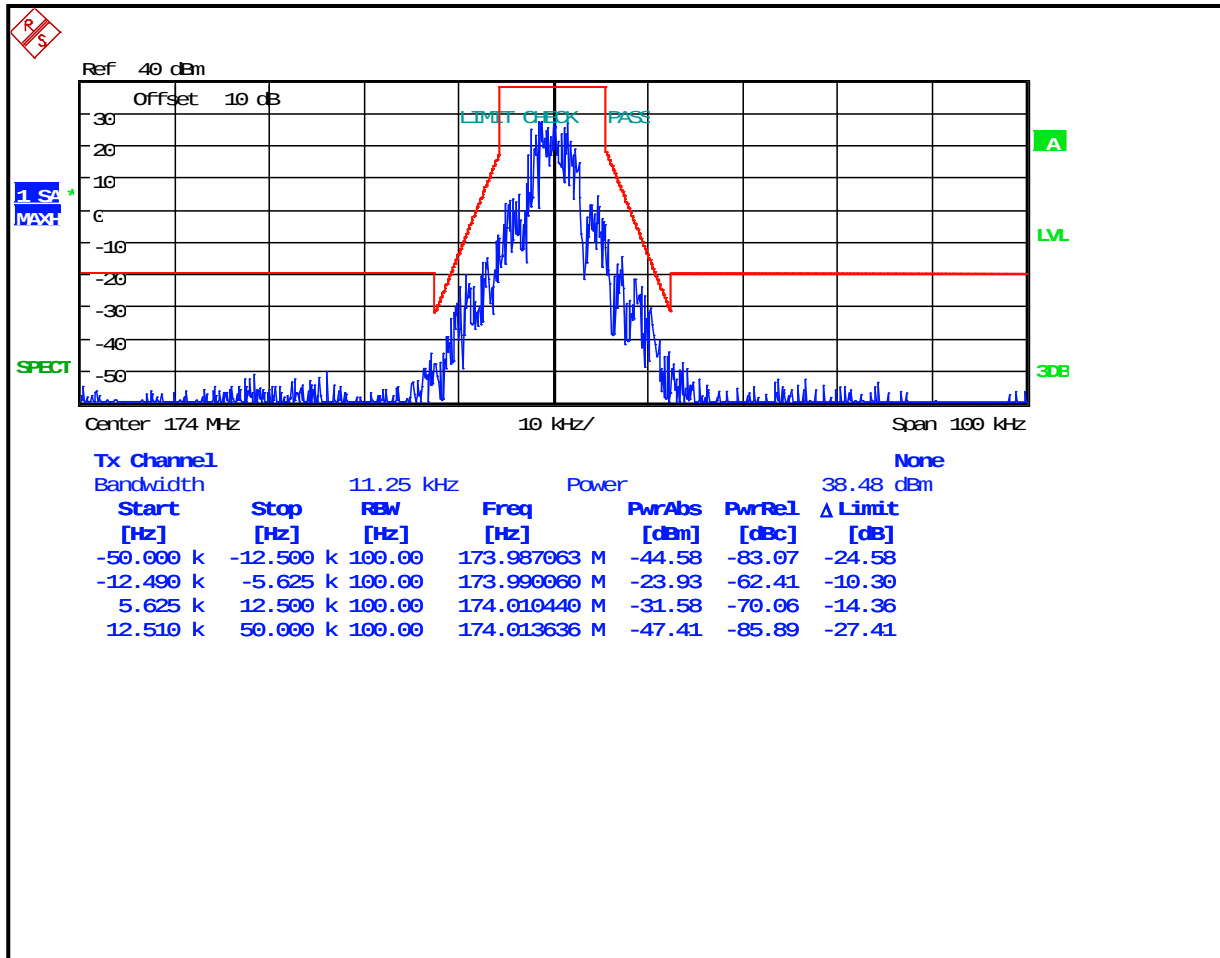


Plot 8-21: Occupied Bandwidth – 150 MHz; 2-Level FSK 9600; WB EDACS; (Mask B)

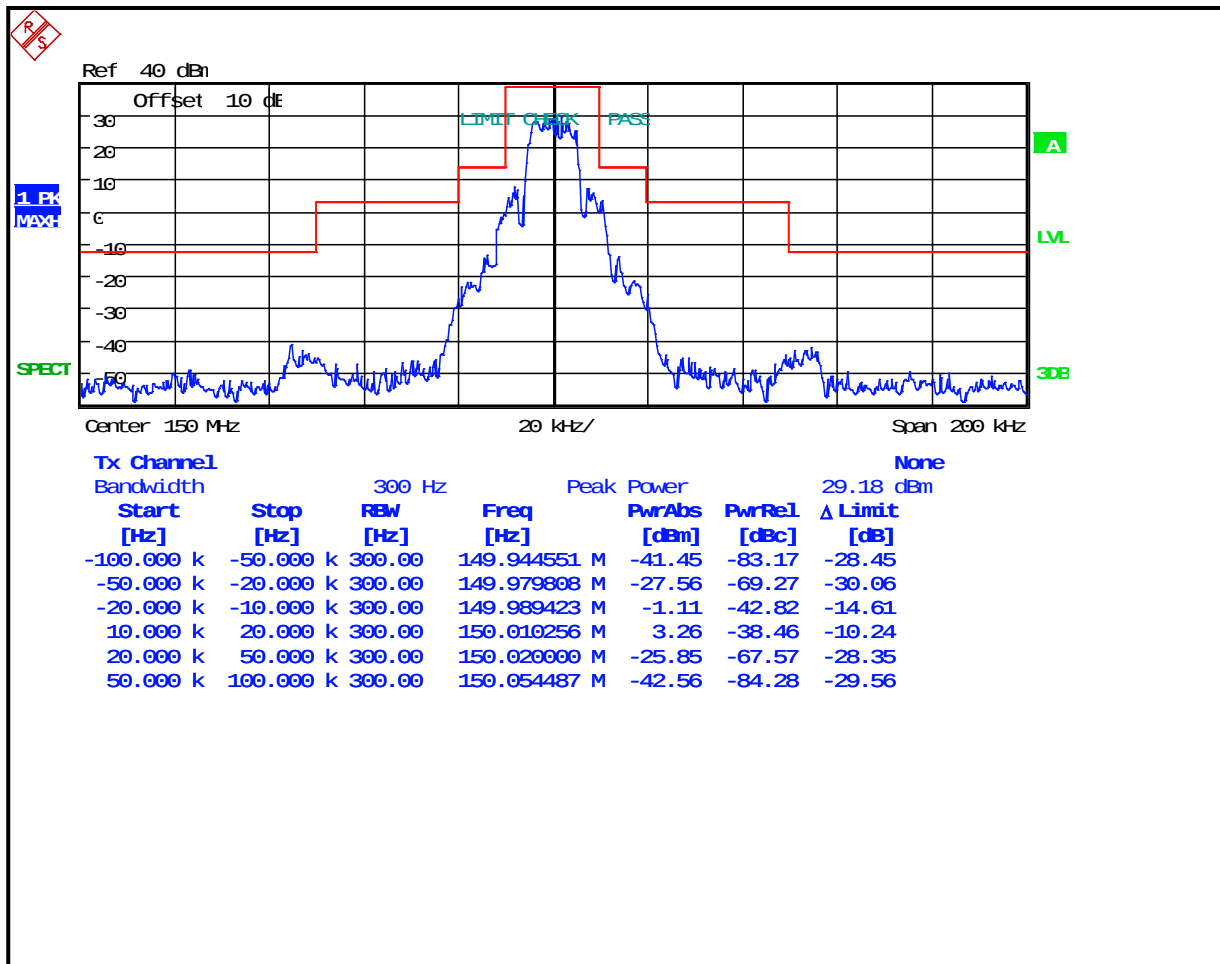


Plot 8-22: Occupied Bandwidth – 156.8 MHz; 2-Level FSK 9600; WB EDACS; (Mask B)

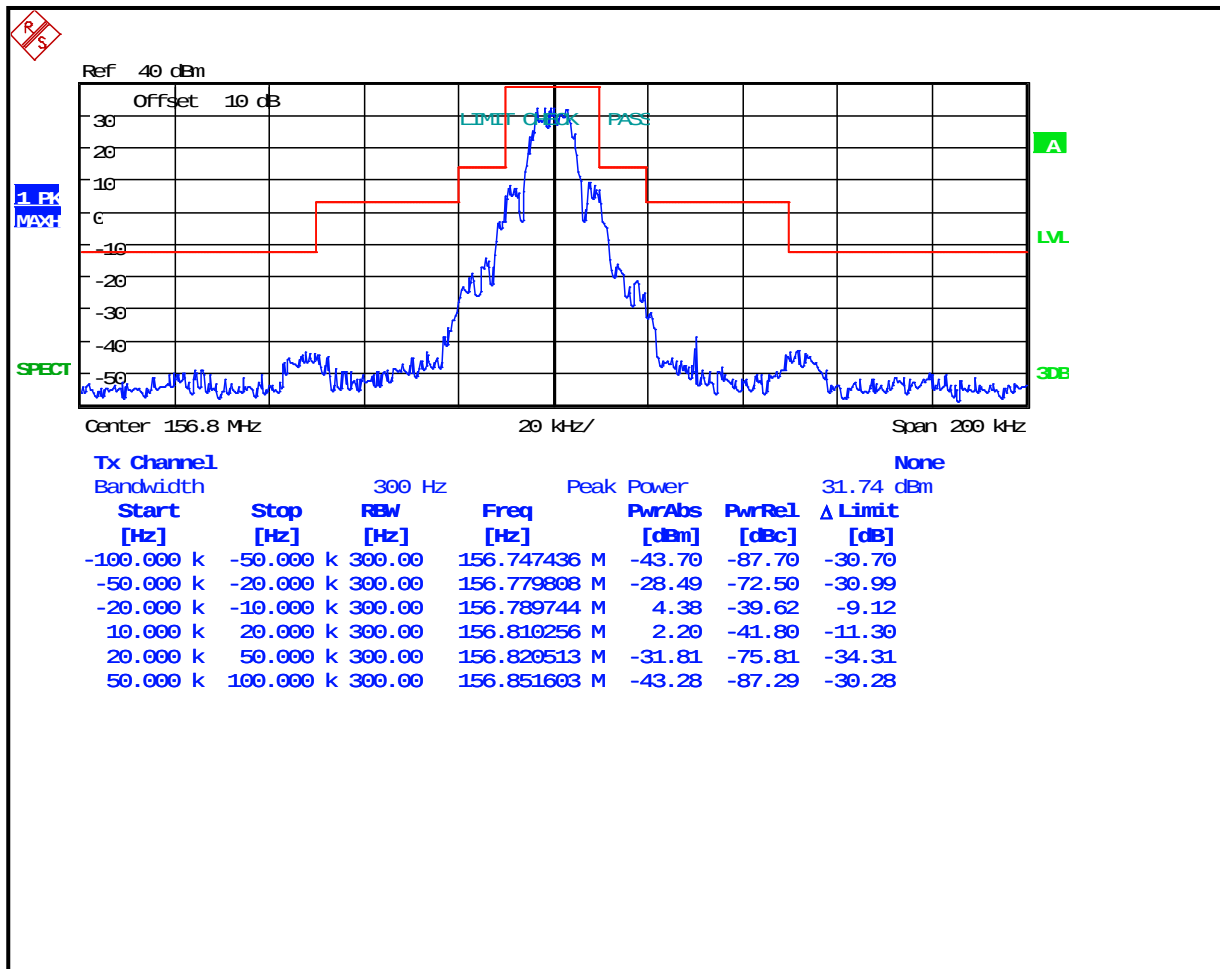


Plot 8-23: Occupied Bandwidth – 162 MHz; 2-Level FSK 9600; WB EDACS; (Mask B)

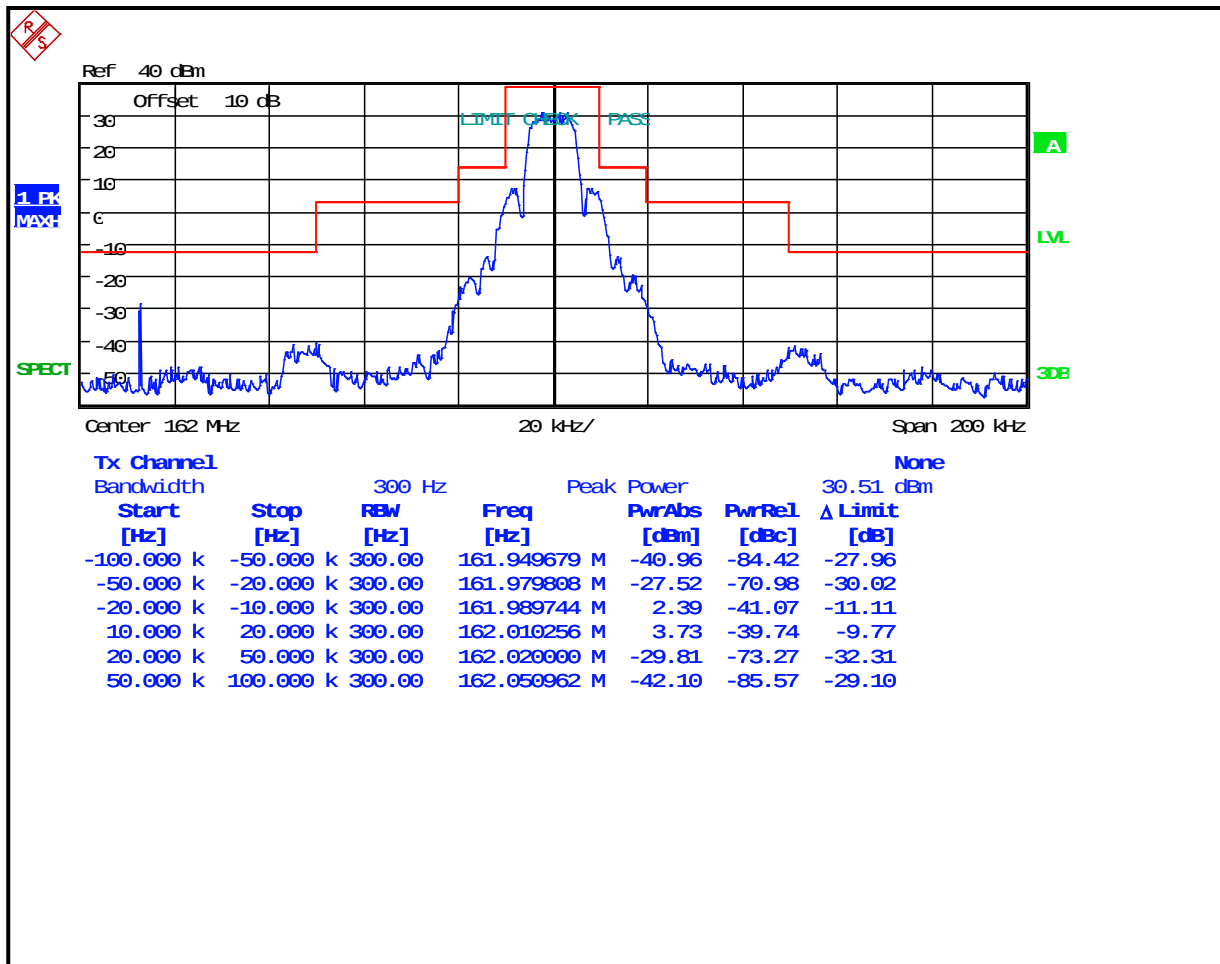


Plot 8-24: Occupied Bandwidth – 174 MHz; 2-Level FSK 9600; WB EDACS; (Mask B)

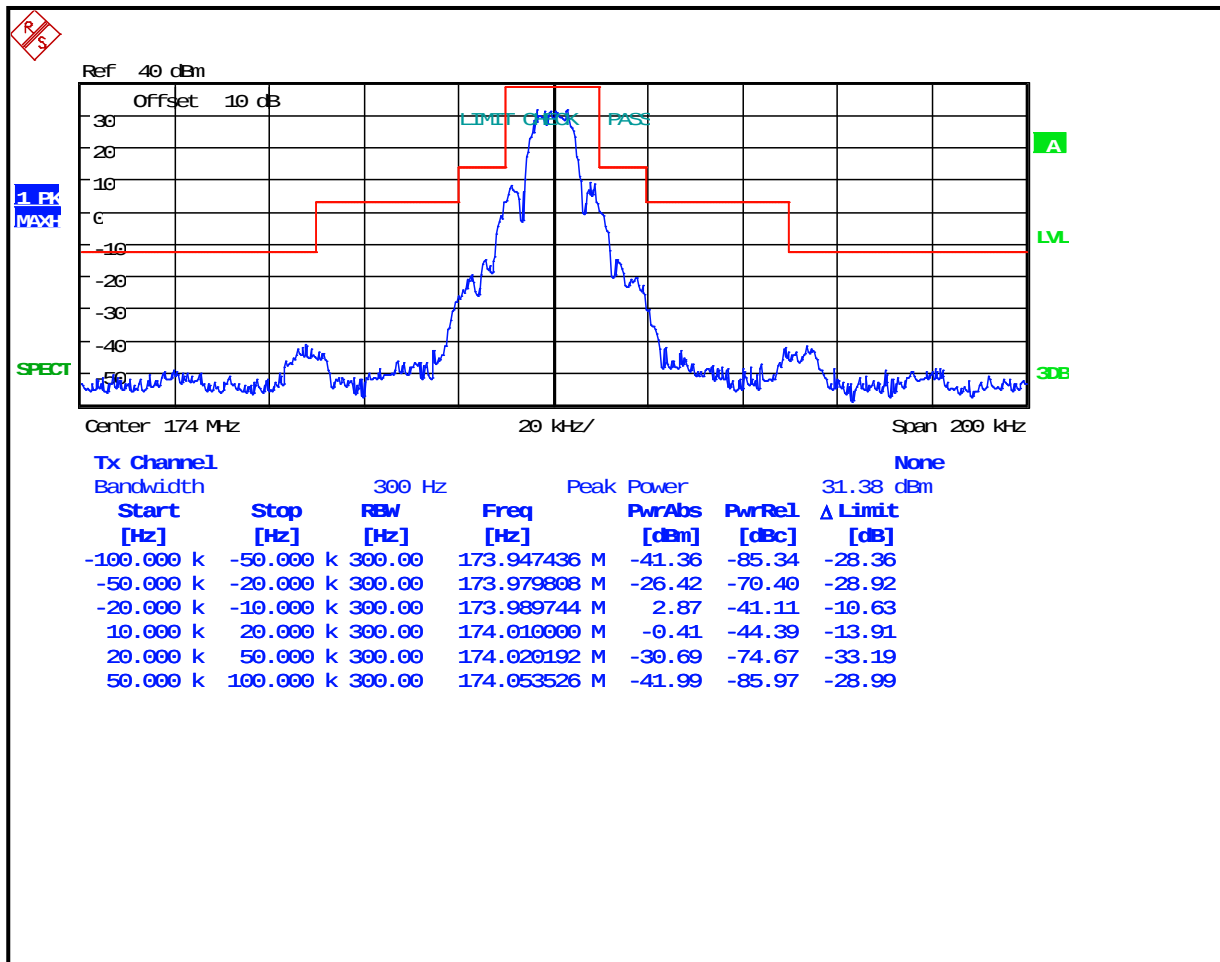


Plot 8-25: Occupied Bandwidth – 150 MHz; 2-Level FSK 9600; NB EDACS; (Mask D)

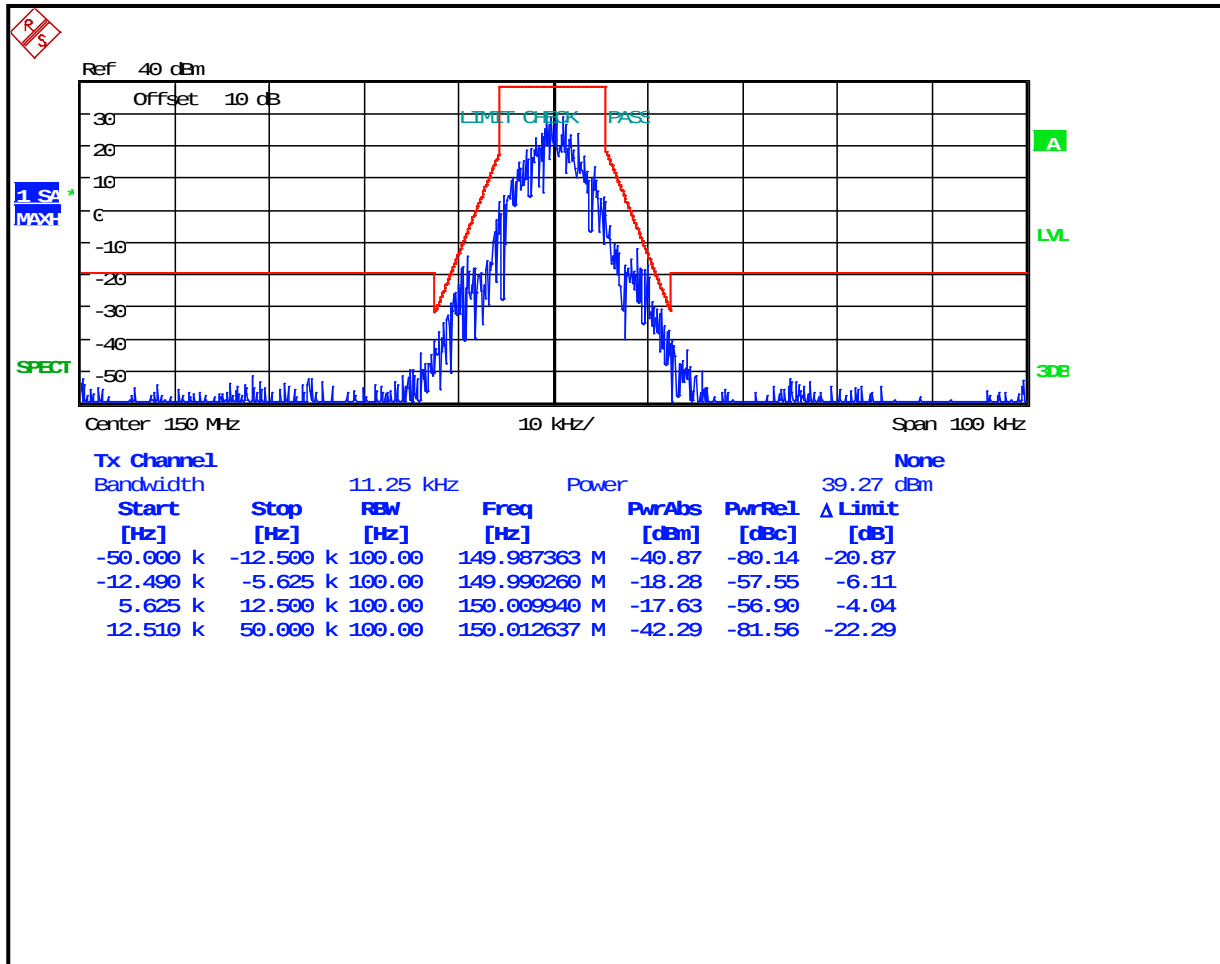


Plot 8-26: Occupied Bandwidth – 156.8 MHz; 2-Level FSK 9600; NB EDACS; (Mask D)

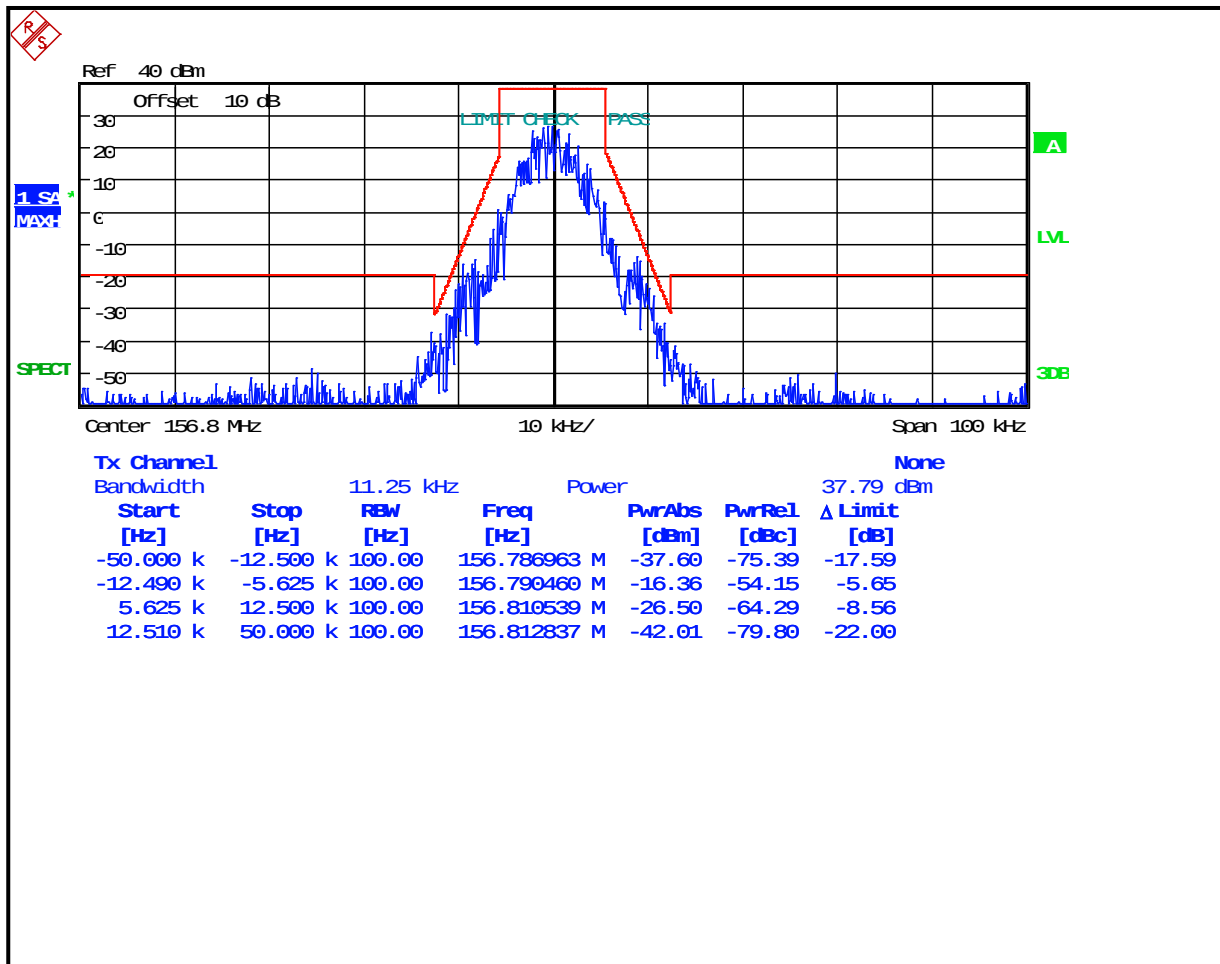


Plot 8-27: Occupied Bandwidth – 162 MHz; 2-Level FSK 49600; NB EDACS; (Mask D)

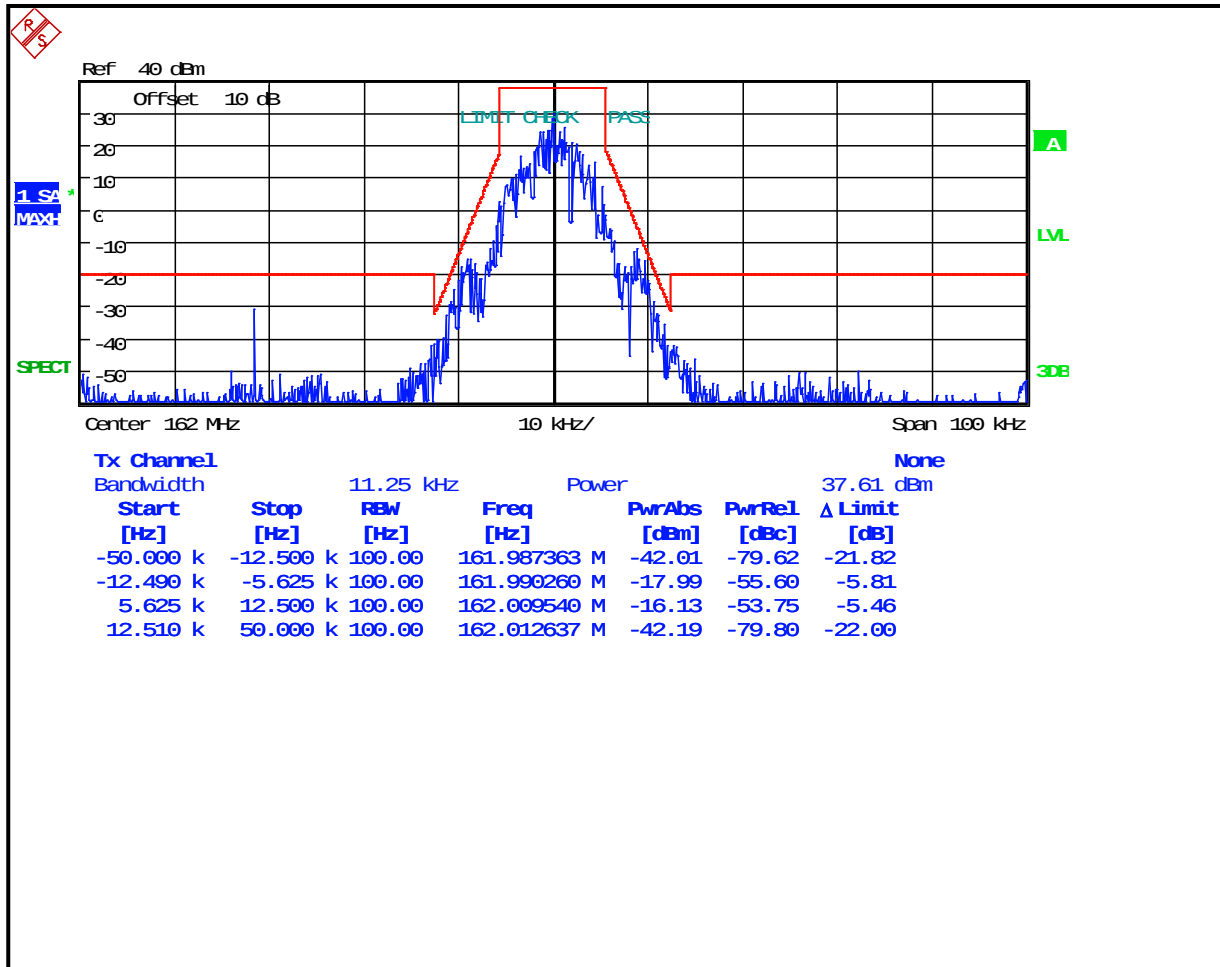


Plot 8-28: Occupied Bandwidth – 174 MHz; 2-Level FSK 9600; NB EDACS; (Mask D)

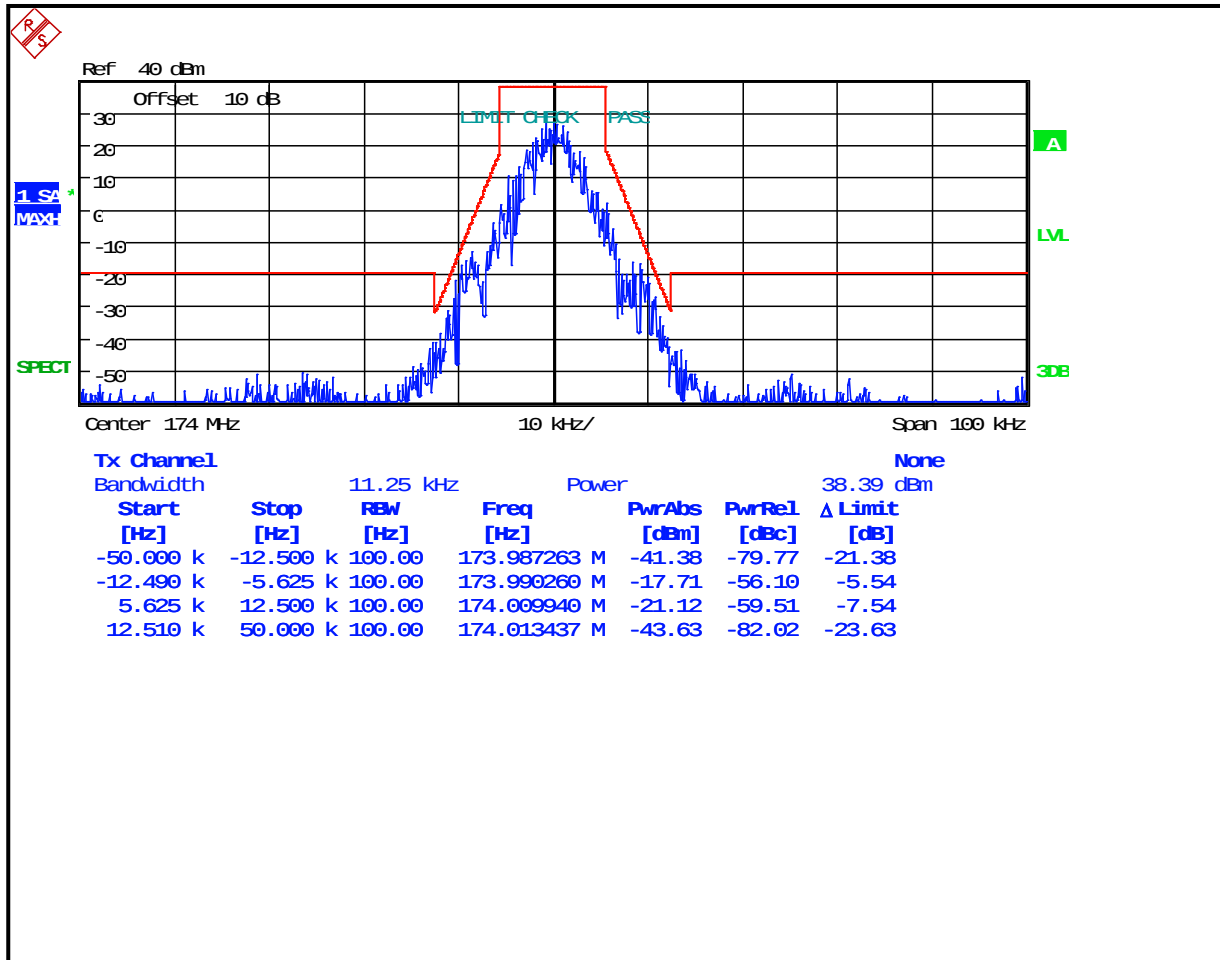


Plot 8-29: Occupied Bandwidth – 430 MHz; Wideband Analog; Mask B

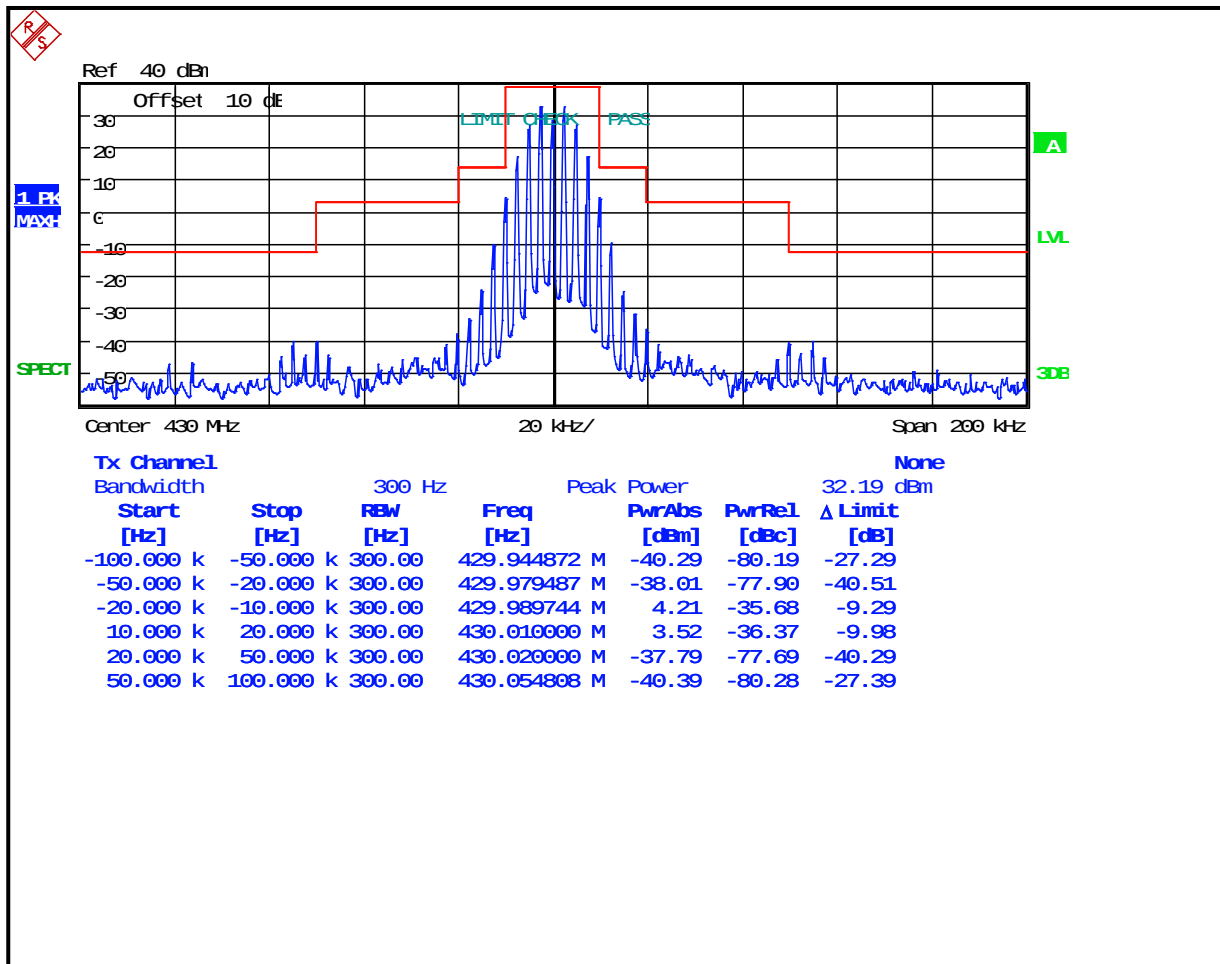


Plot 8-30: Occupied Bandwidth – 450 MHz; Wideband Analog; Mask B

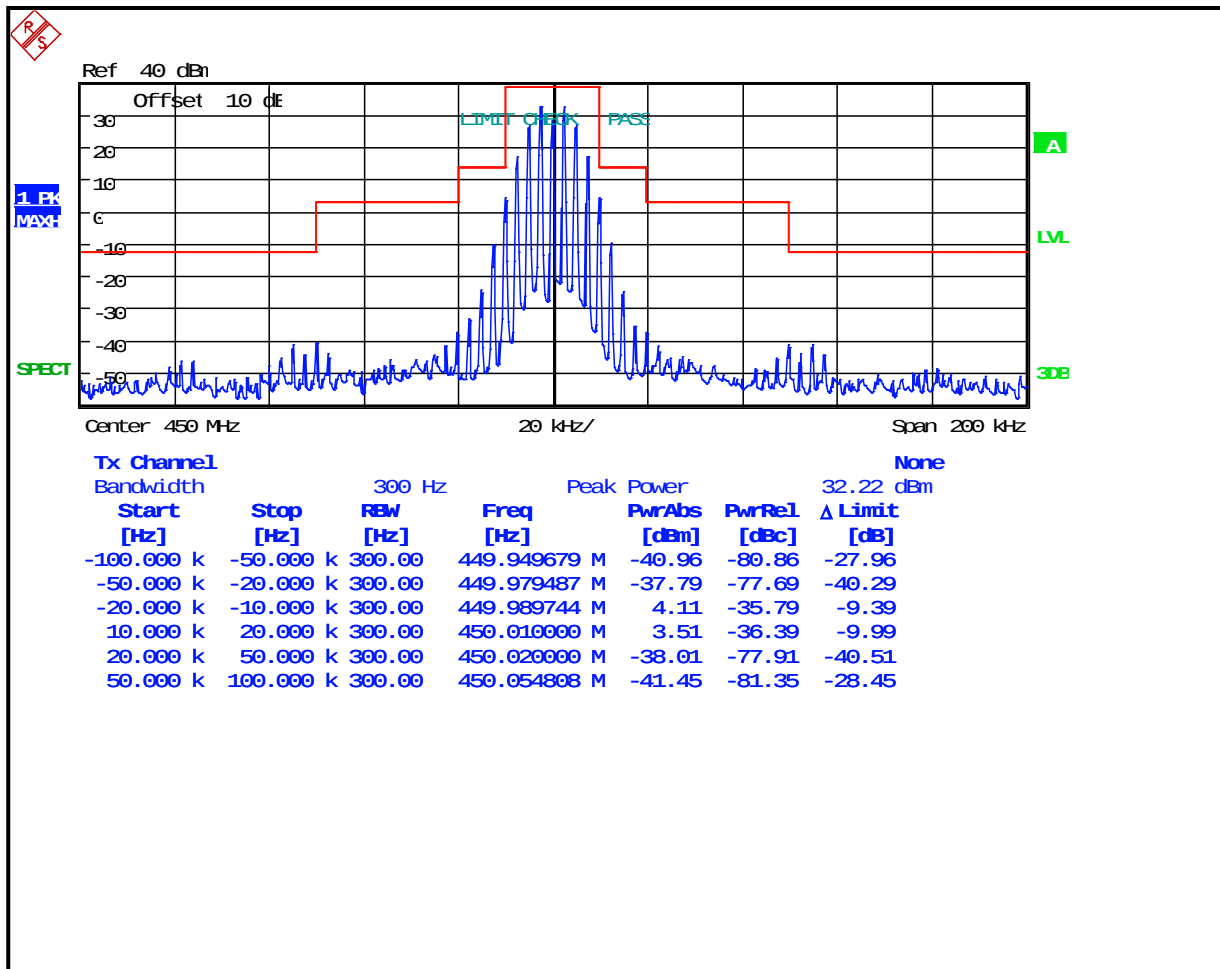


Plot 8-31: Occupied Bandwidth – 454 MHz; Wideband Analog; Mask B

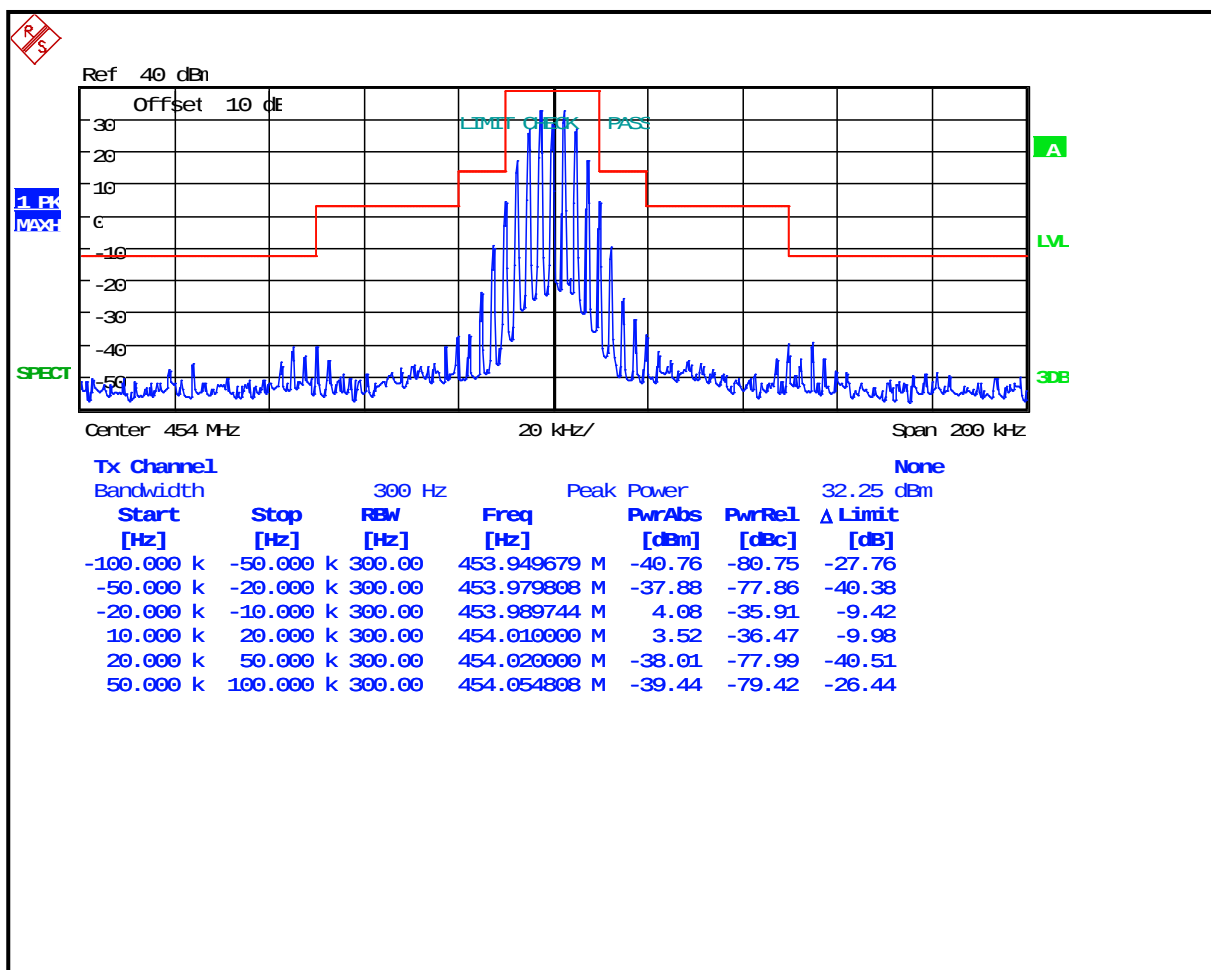


Plot 8-32: Occupied Bandwidth – 456 MHz; Wideband Analog; Mask B

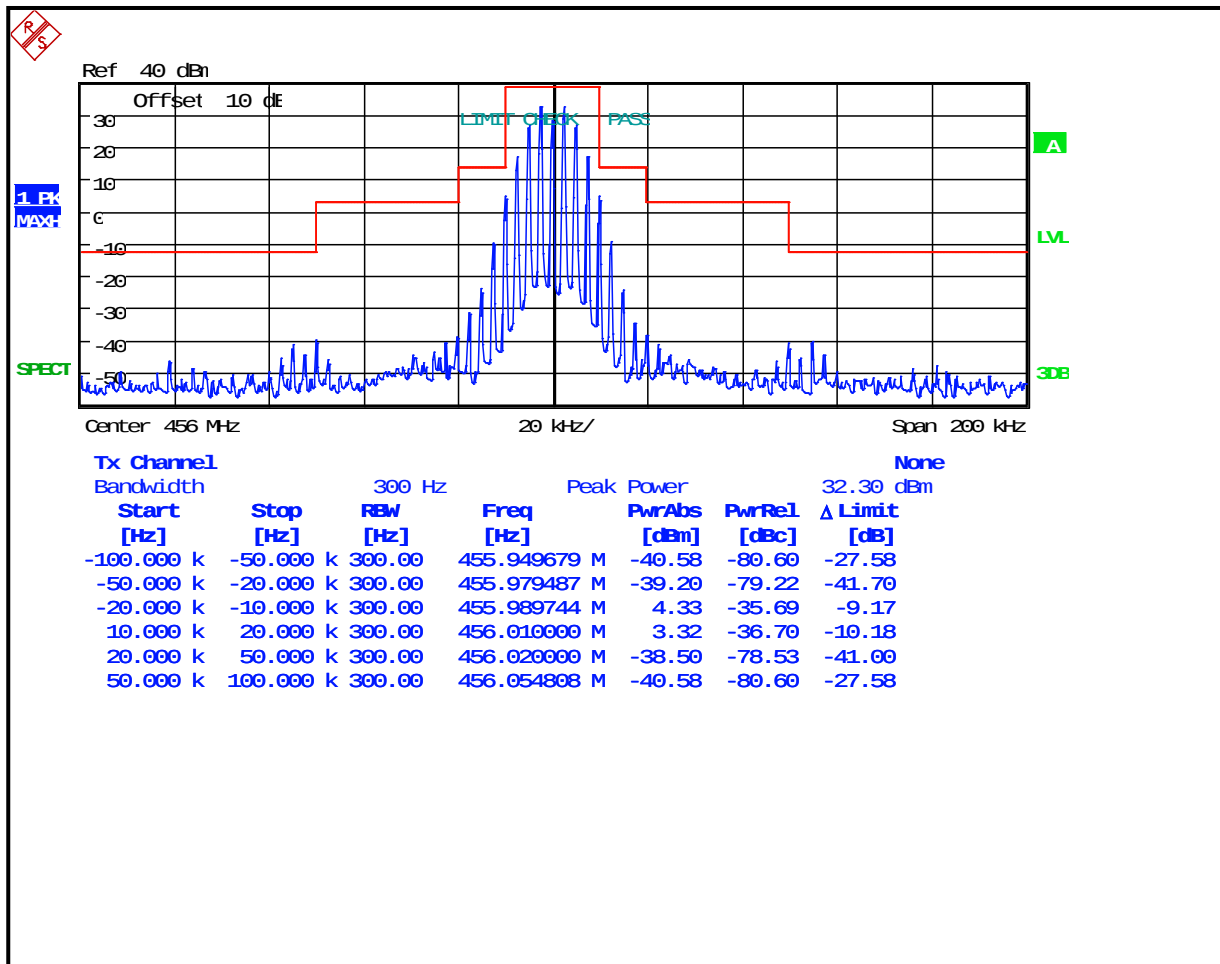


Plot 8-33: Occupied Bandwidth – 459.025 MHz; Wideband Analog; Mask B

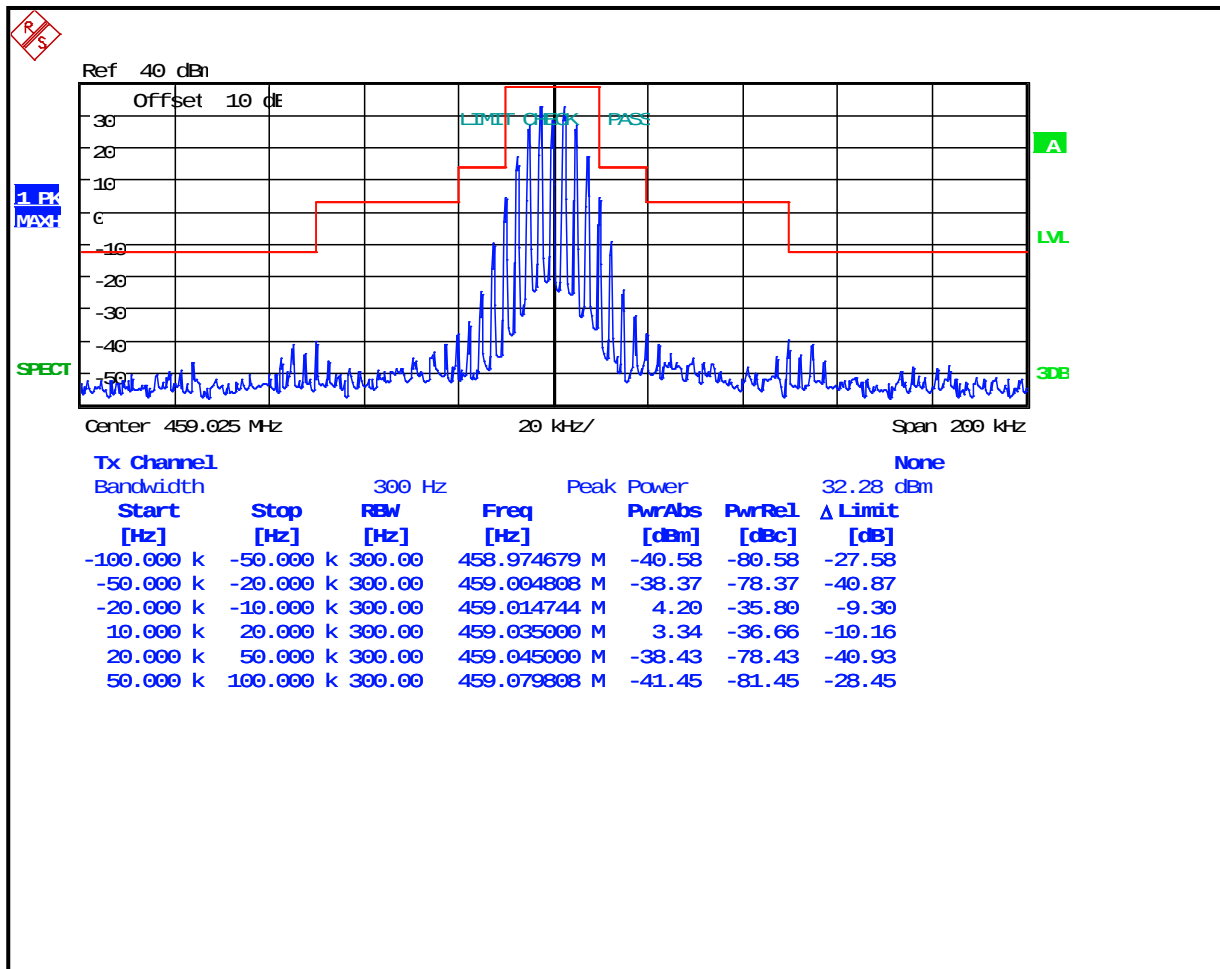


Plot 8-34: Occupied Bandwidth – 459.975MHz; Wideband Analog; Mask B

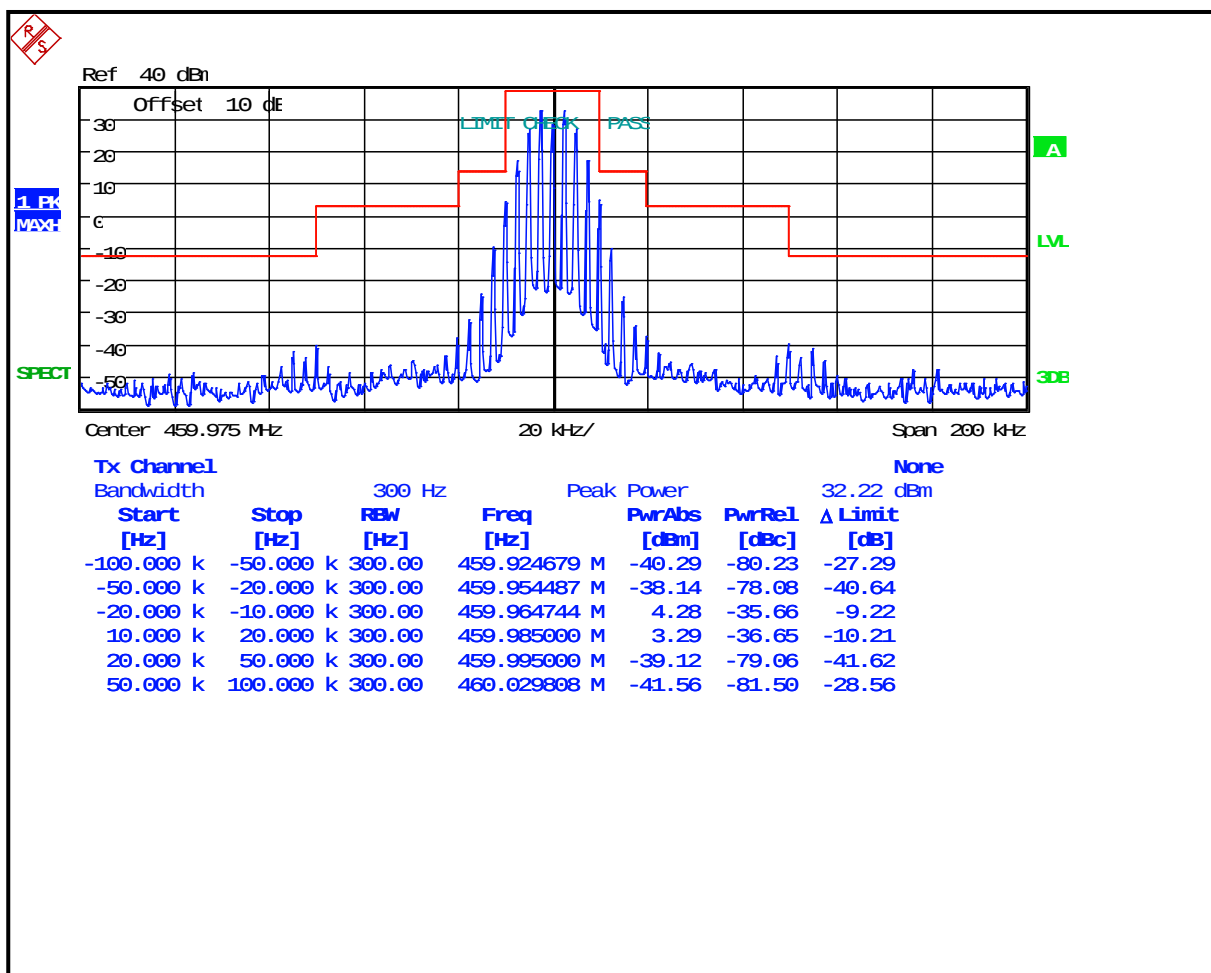


Plot 8-35: Occupied Bandwidth – 470 MHz; Wideband Analog; Mask B

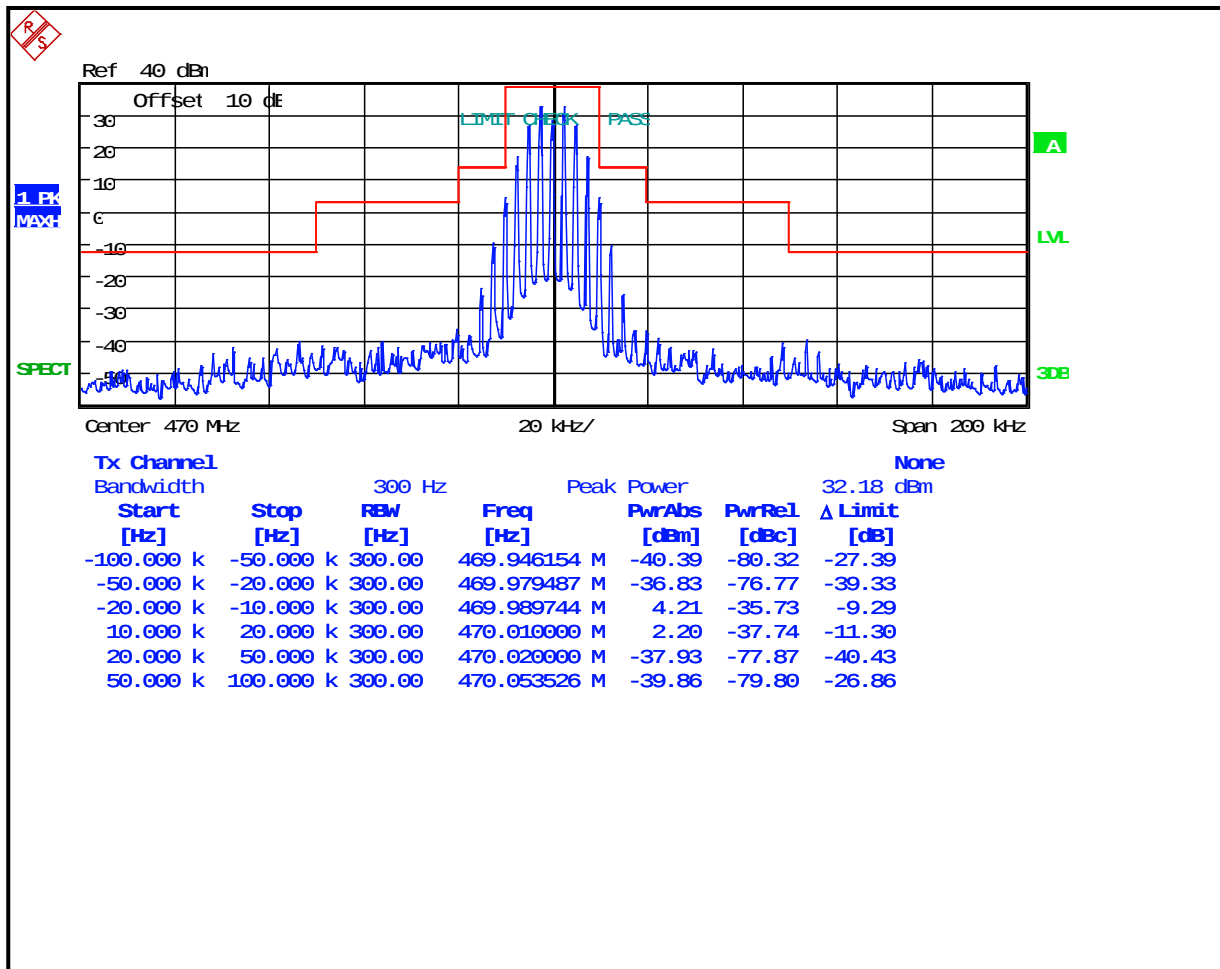


Plot 8-36: Occupied Bandwidth – 430 MHz; Narrowband Analog; Mask D

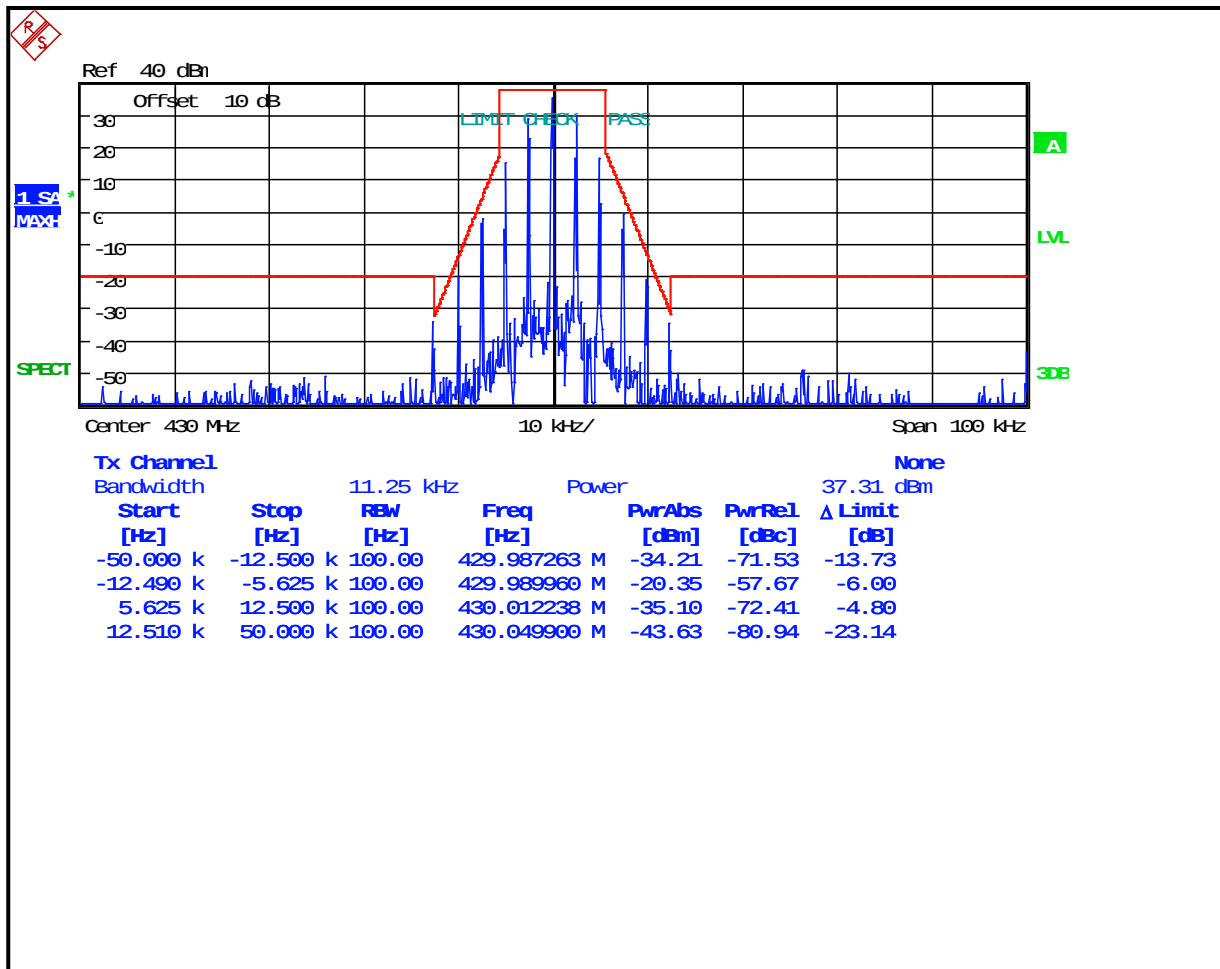


Plot 8-37: Occupied Bandwidth – 450 MHz; Narrowband Analog; Mask D

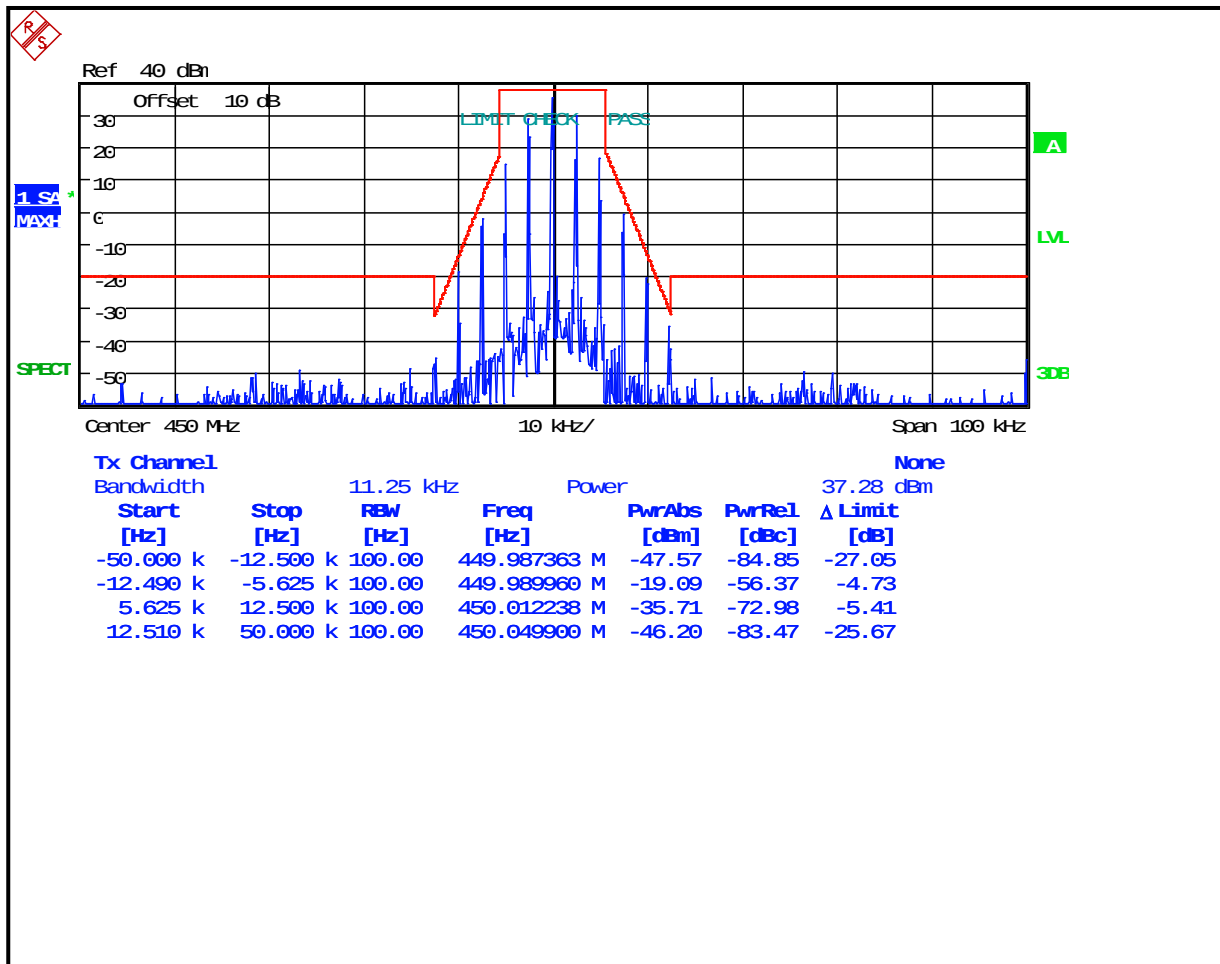


Plot 8-38: Occupied Bandwidth – 454 MHz; Narrowband Analog; Mask D

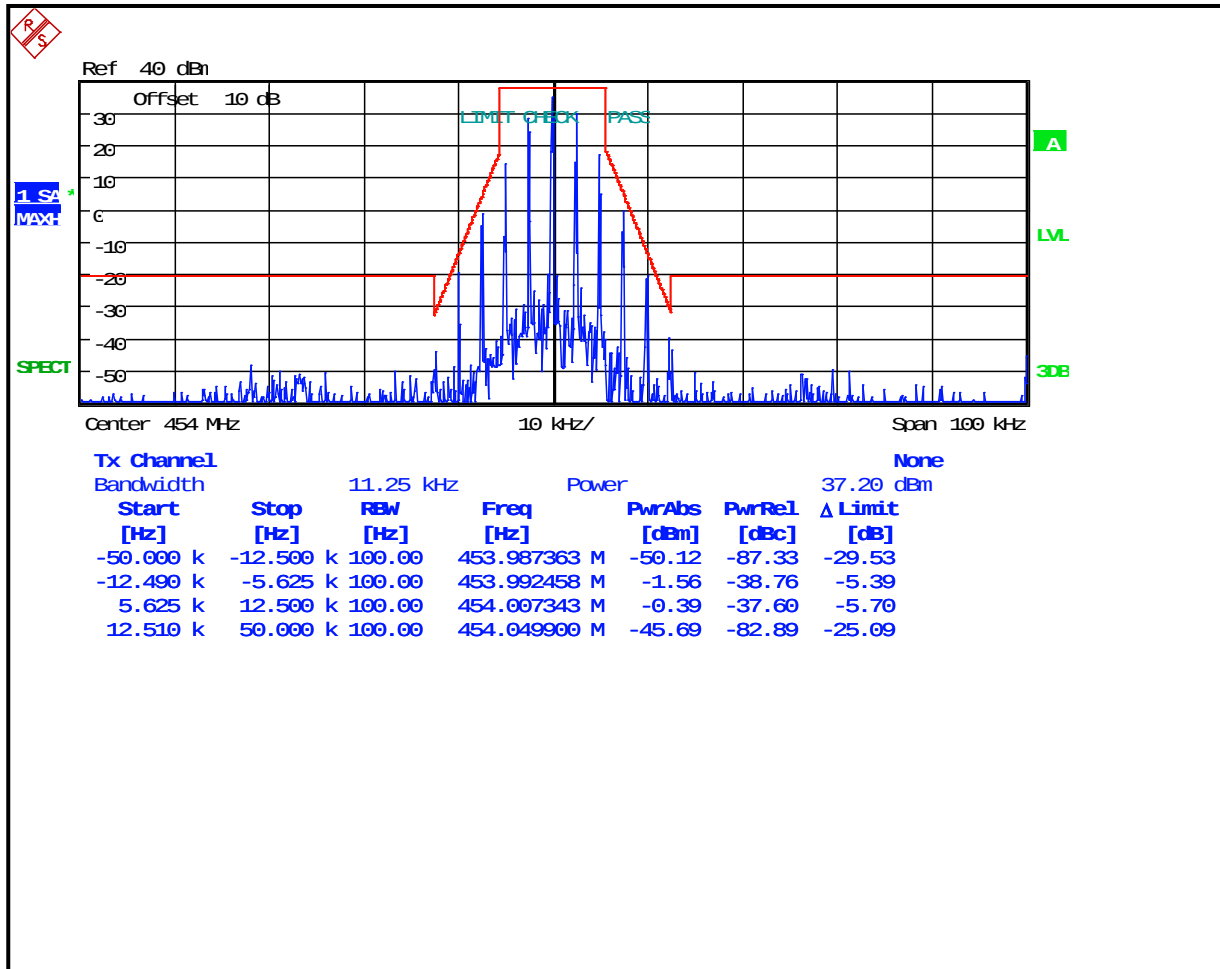


Plot 8-39: Occupied Bandwidth – 456 MHz; Narrowband Analog; Mask D

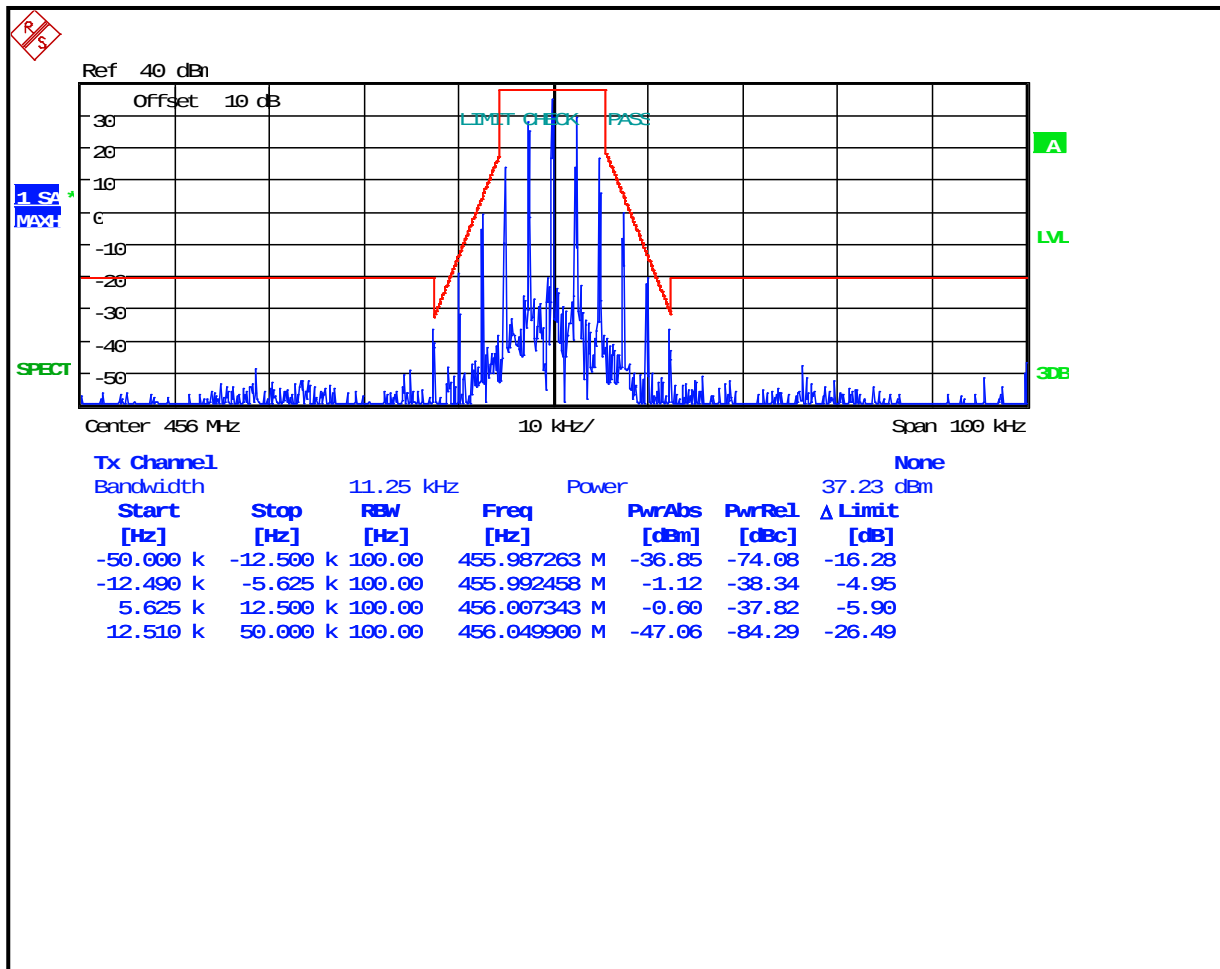


Plot 8-40: Occupied Bandwidth – 459.025 MHz; Narrowband Analog; Mask D

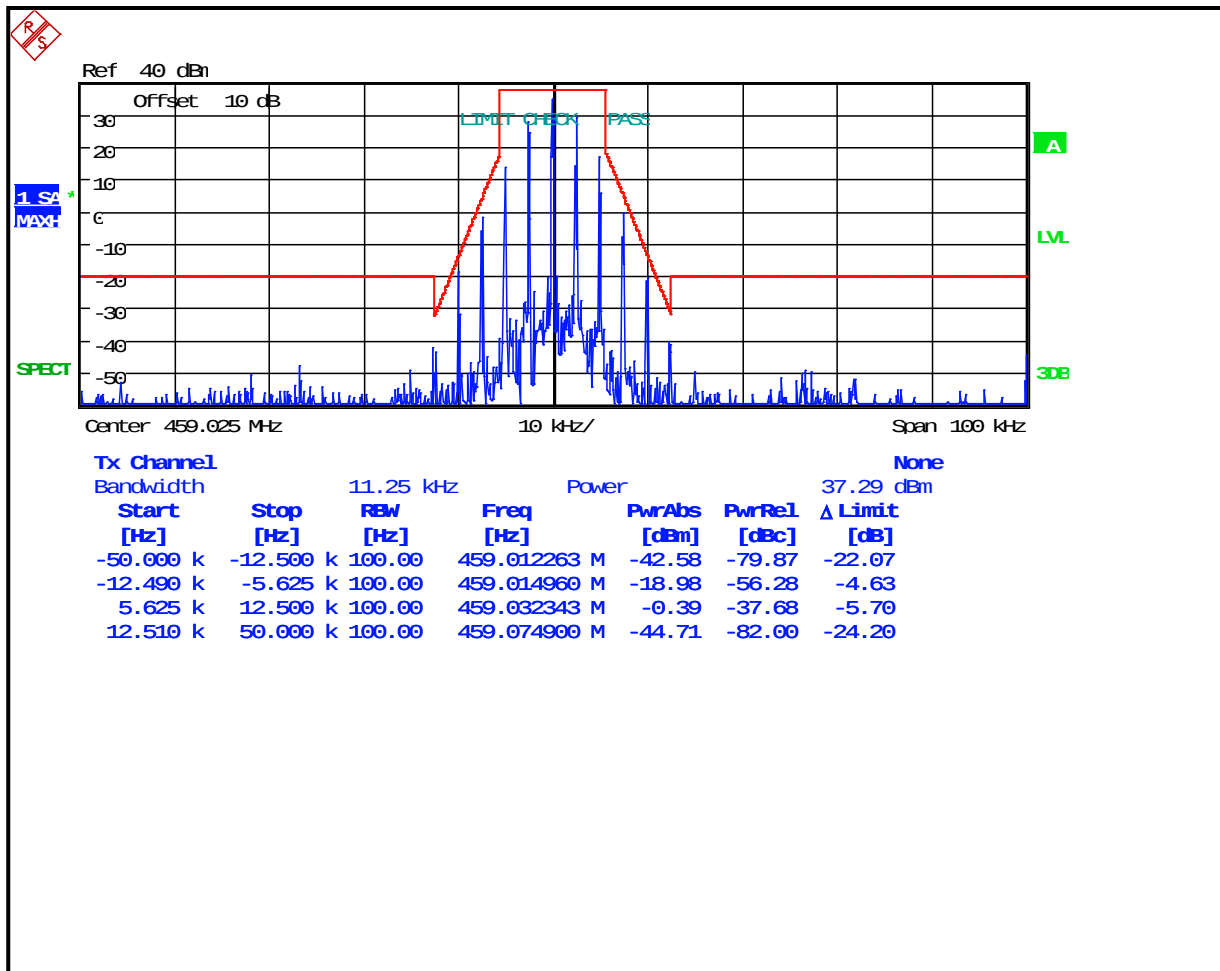


Plot 8-41: Occupied Bandwidth – 459.975 MHz; Narrowband Analog; Mask D

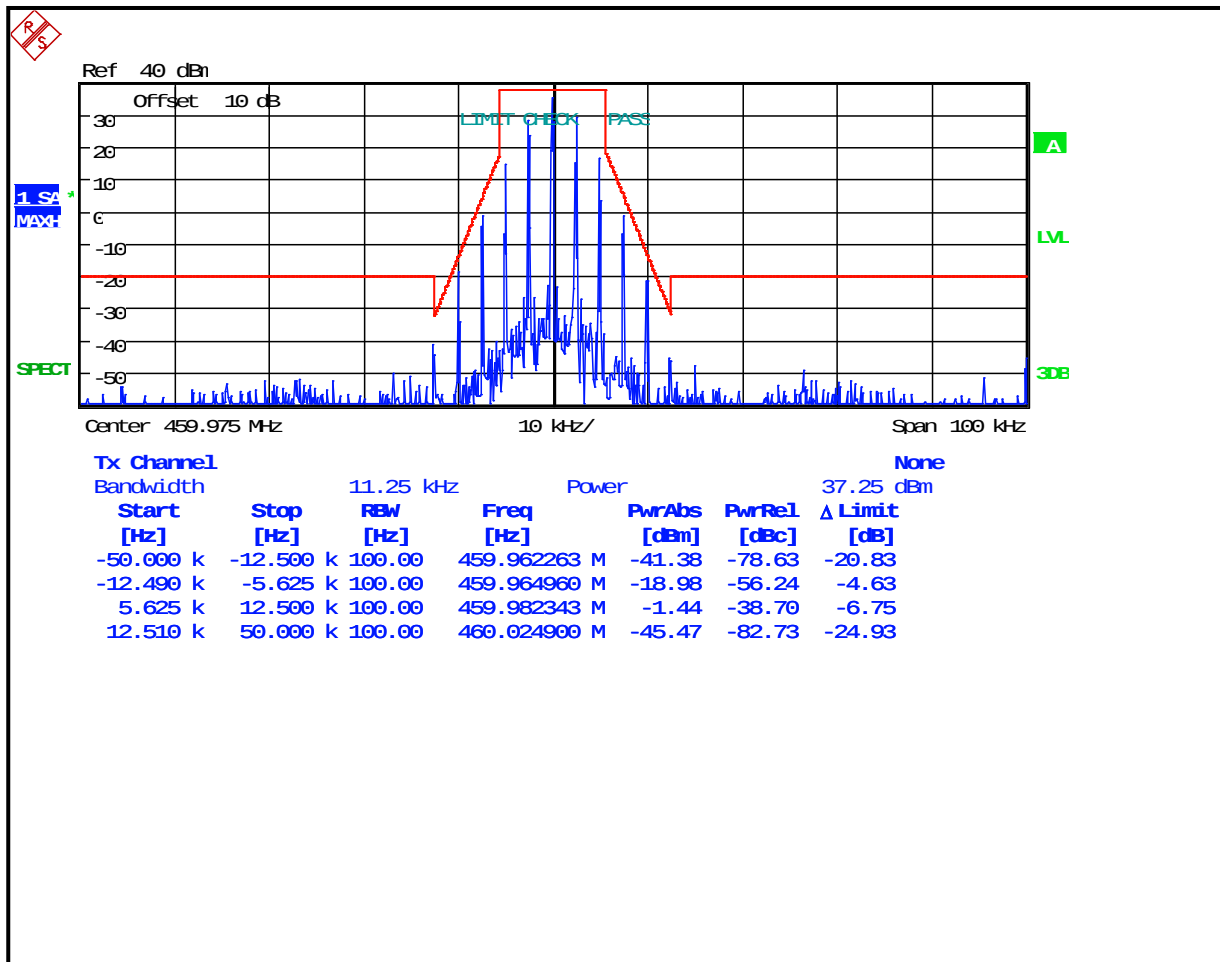


Plot 8-42: Occupied Bandwidth – 470 MHz; Narrowband Analog; Mask D

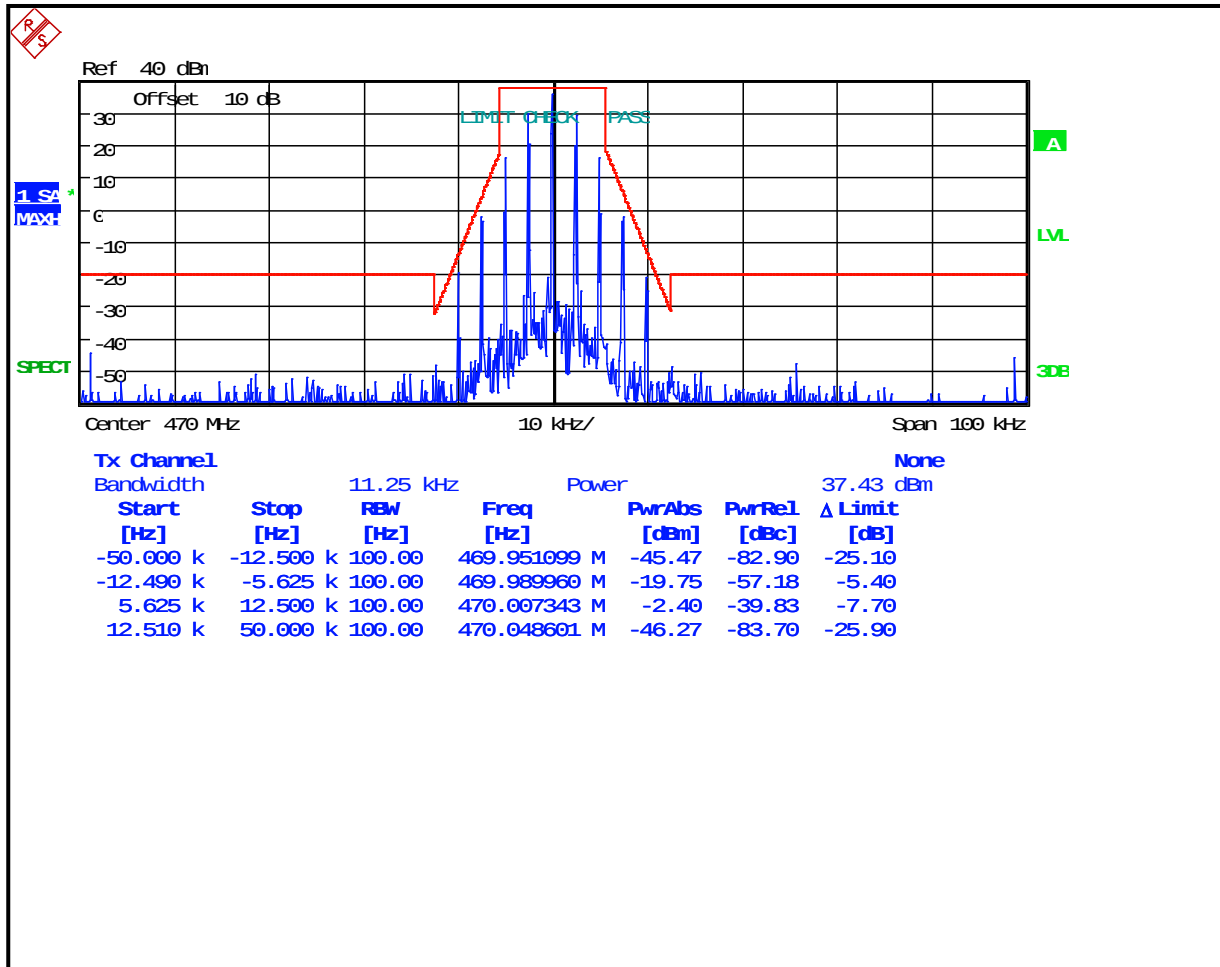


Plot 8-43: Occupied Bandwidth – 430 MHz; P25; Mask D

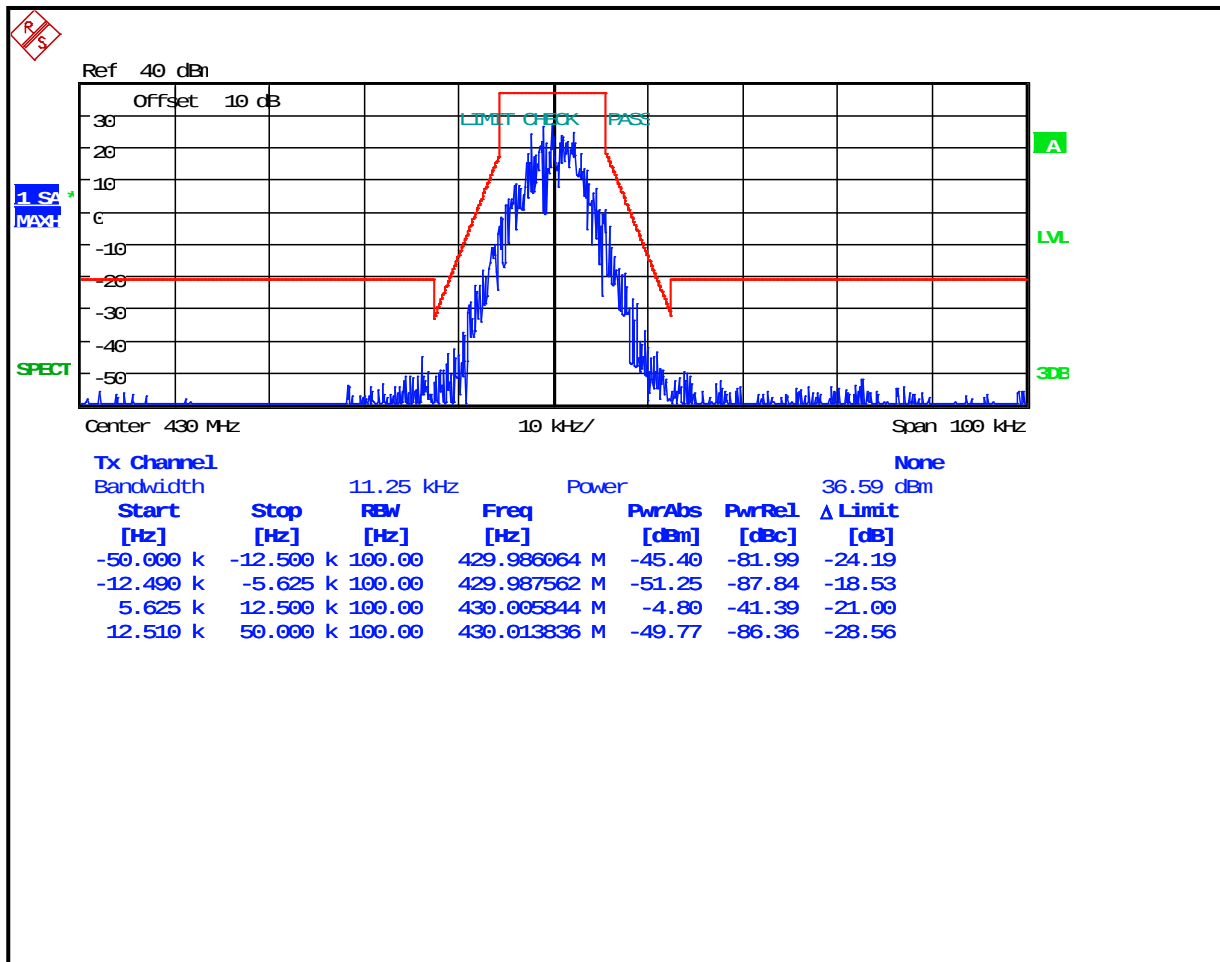


Plot 8-44: Occupied Bandwidth – 450 MHz; P25; Mask D

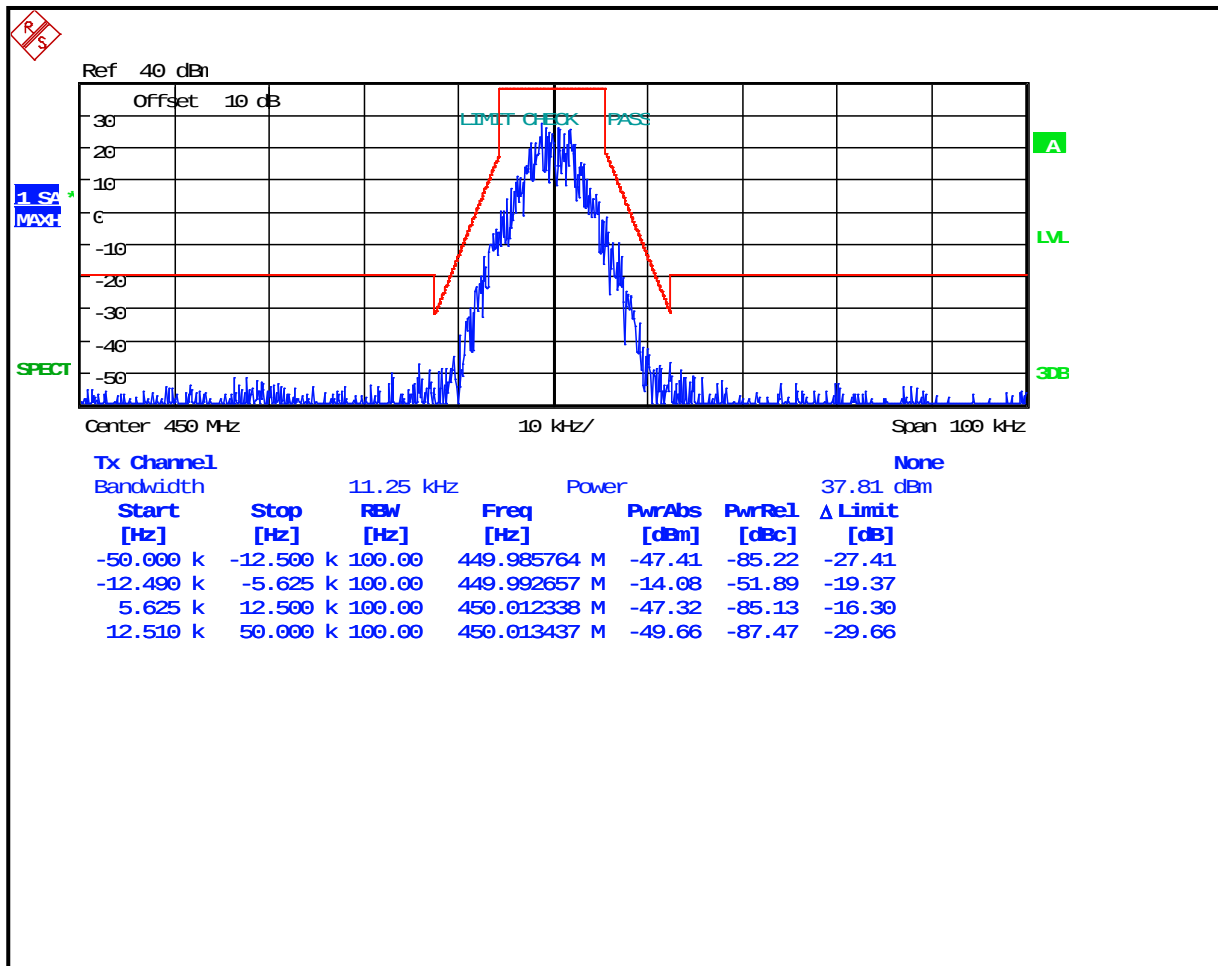


Plot 8-45: Occupied Bandwidth – 454 MHz; P25; Mask D

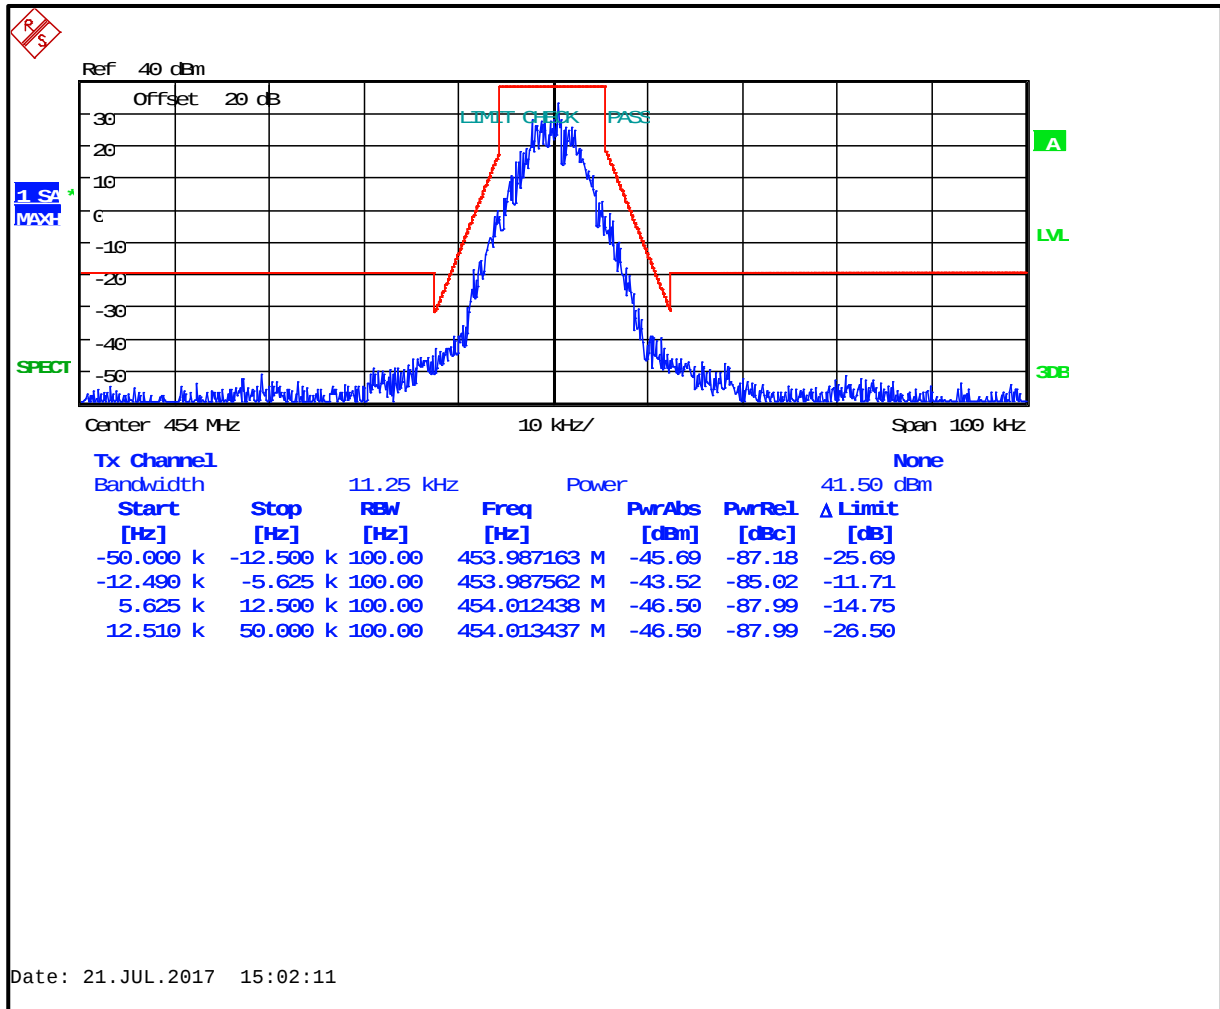


Plot 8-46: Occupied Bandwidth – 456MHz; P25; Mask D

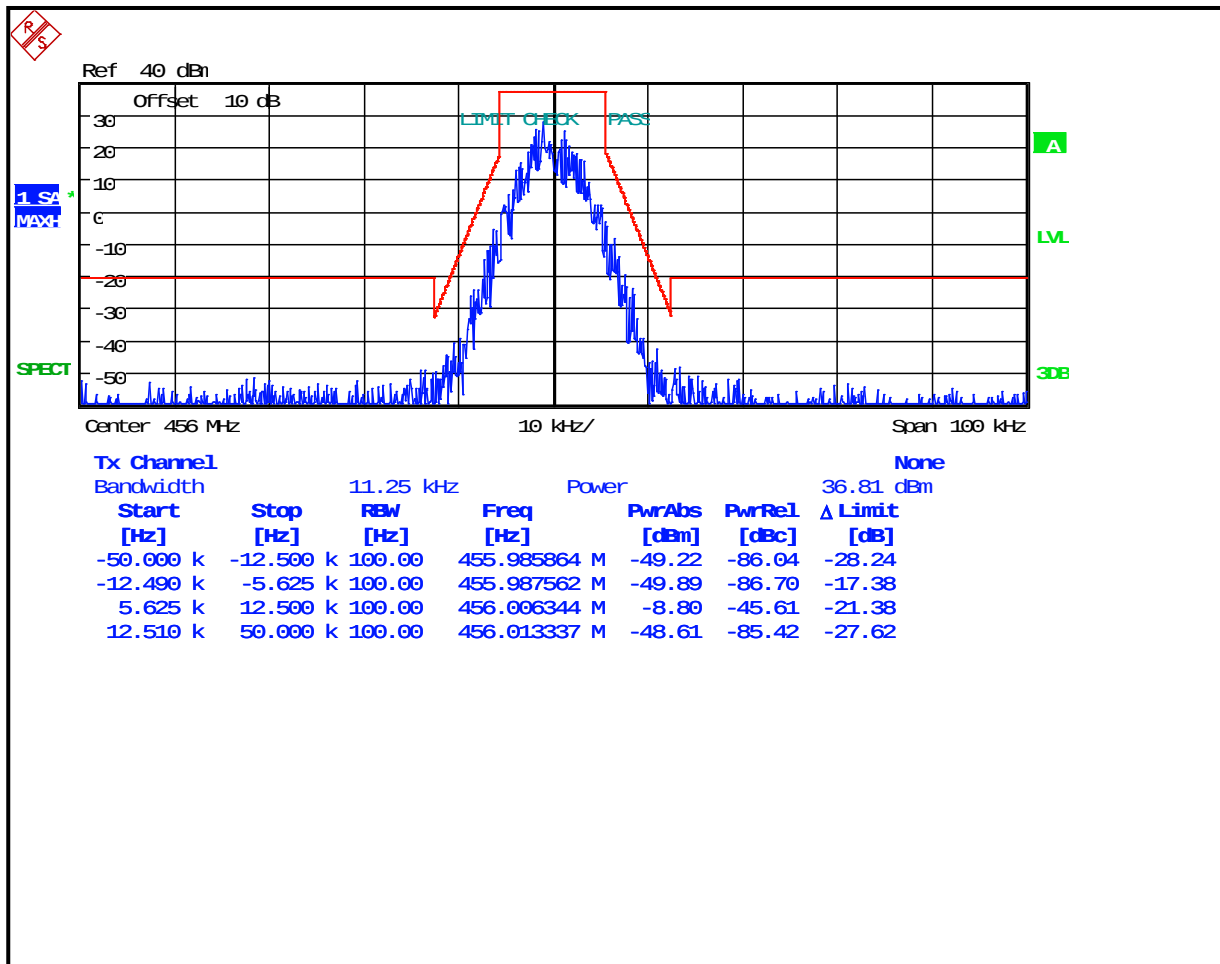


Plot 8-47: Occupied Bandwidth – 459.025 MHz; P25; Mask D

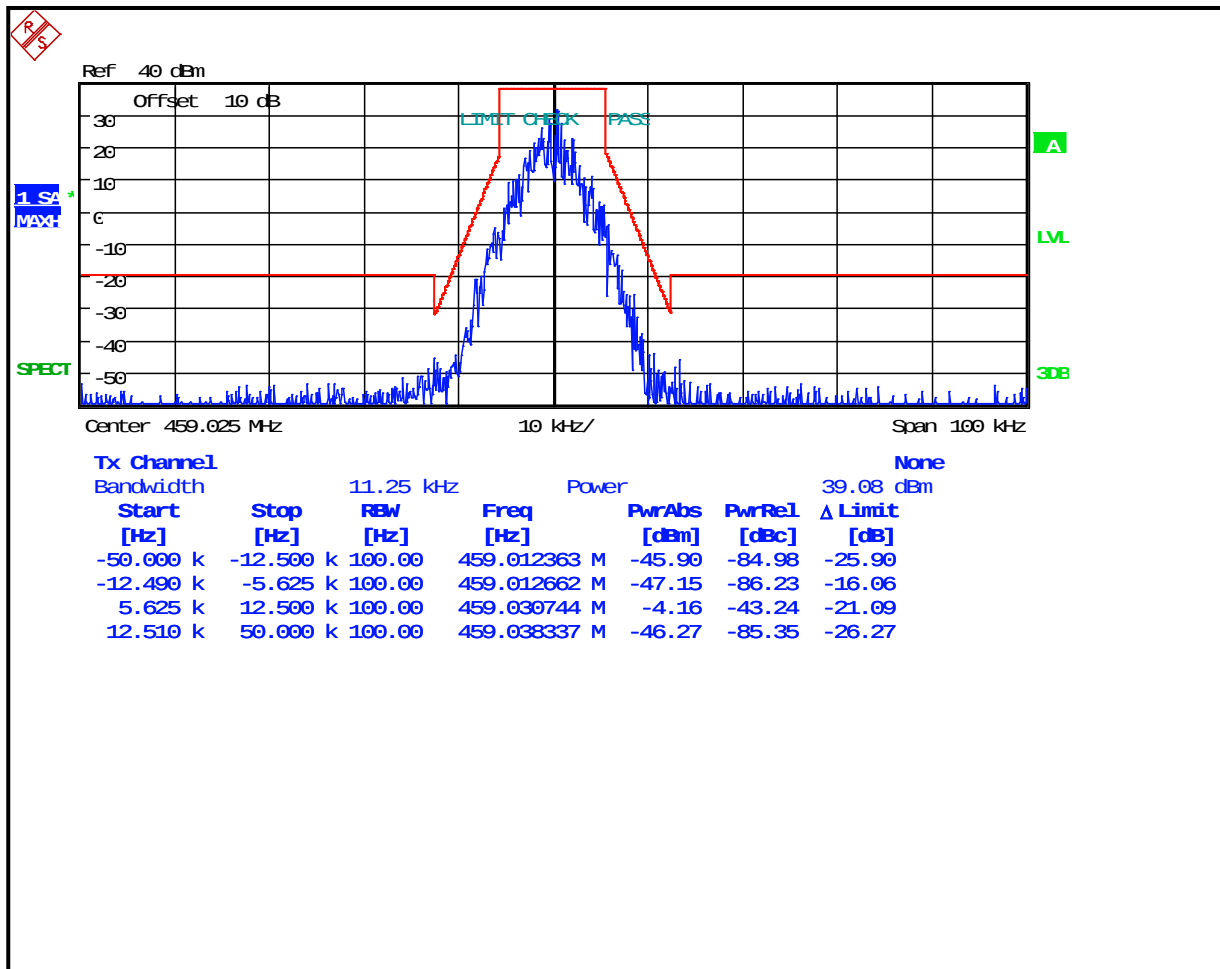


Plot 8-48: Occupied Bandwidth – 459.975 MHz; P25; Mask D

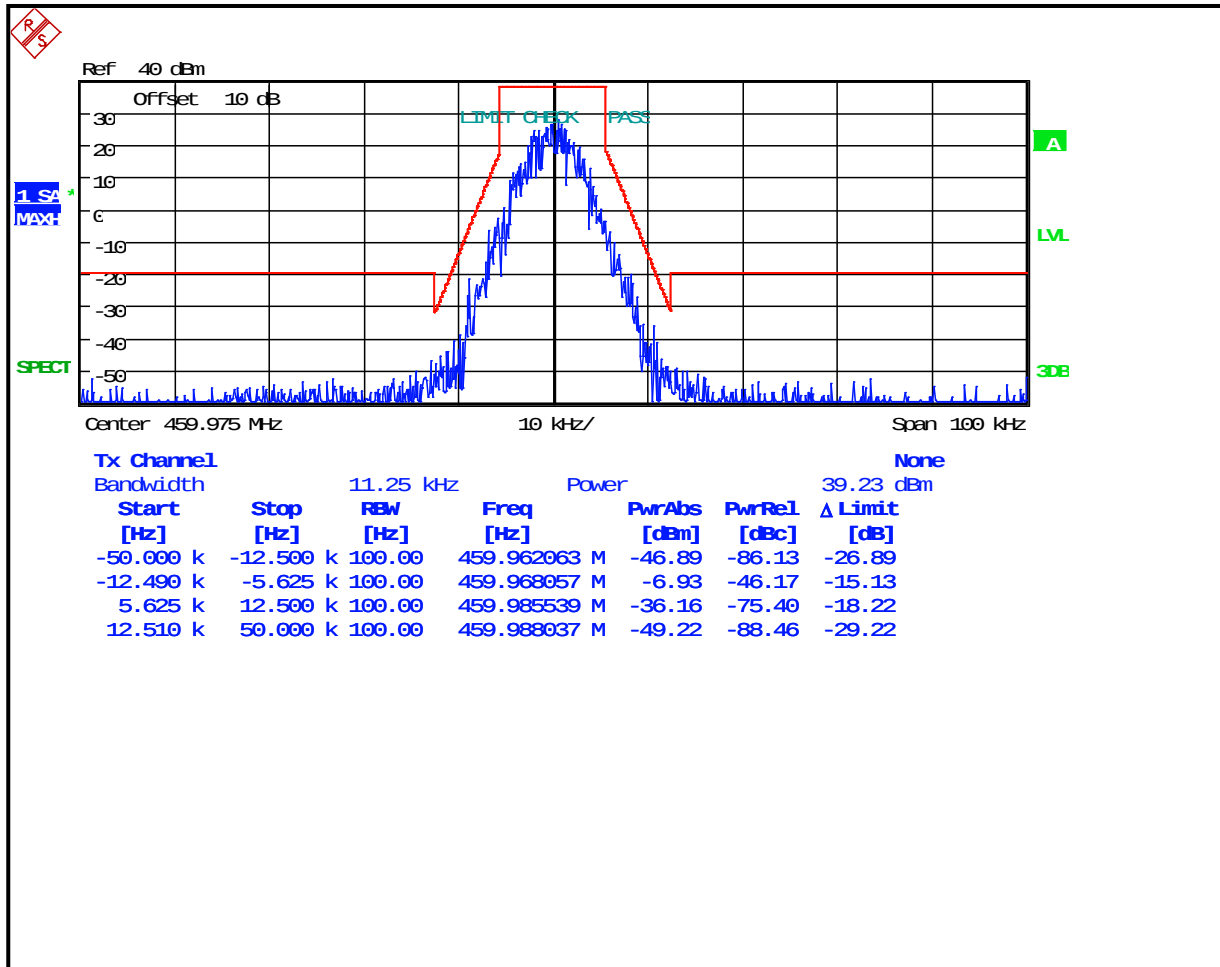


Plot 8-49: Occupied Bandwidth – 470 MHz; P25; Mask D

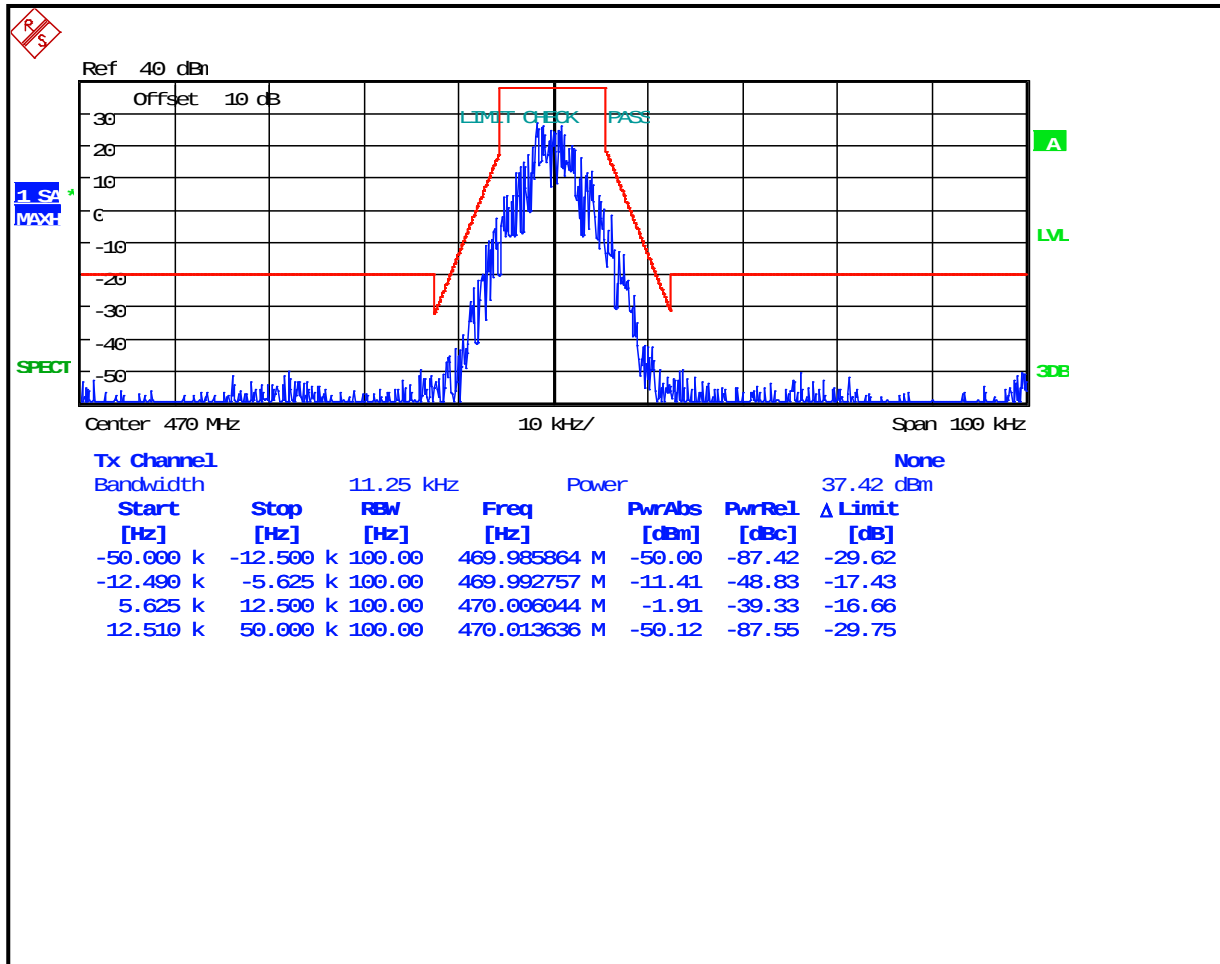


Plot 8-50: Occupied Bandwidth – 430 MHz; CPM TDMA; Mask D

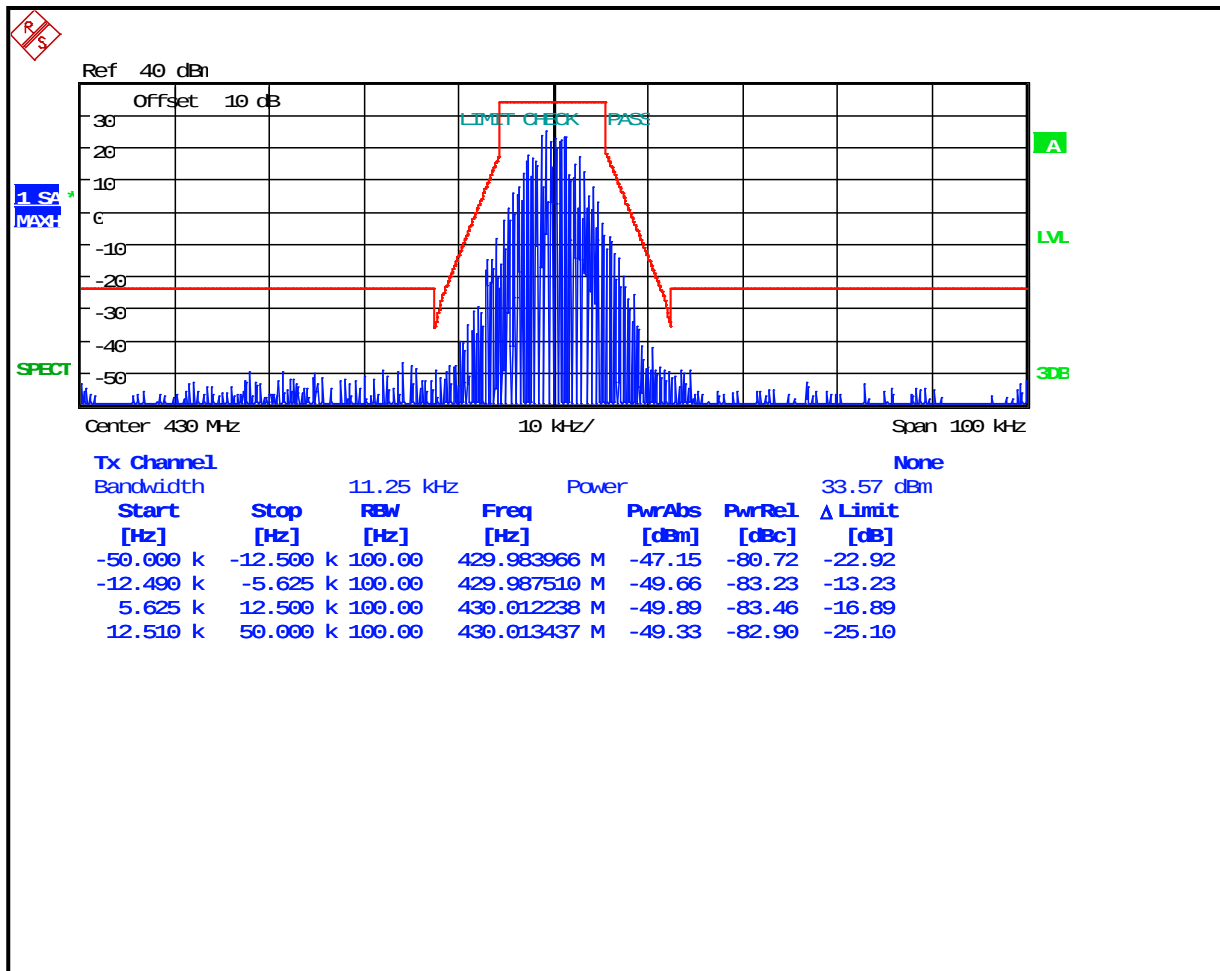


Plot 8-51: Occupied Bandwidth – 450 MHz; CPM TDMA; Mask D

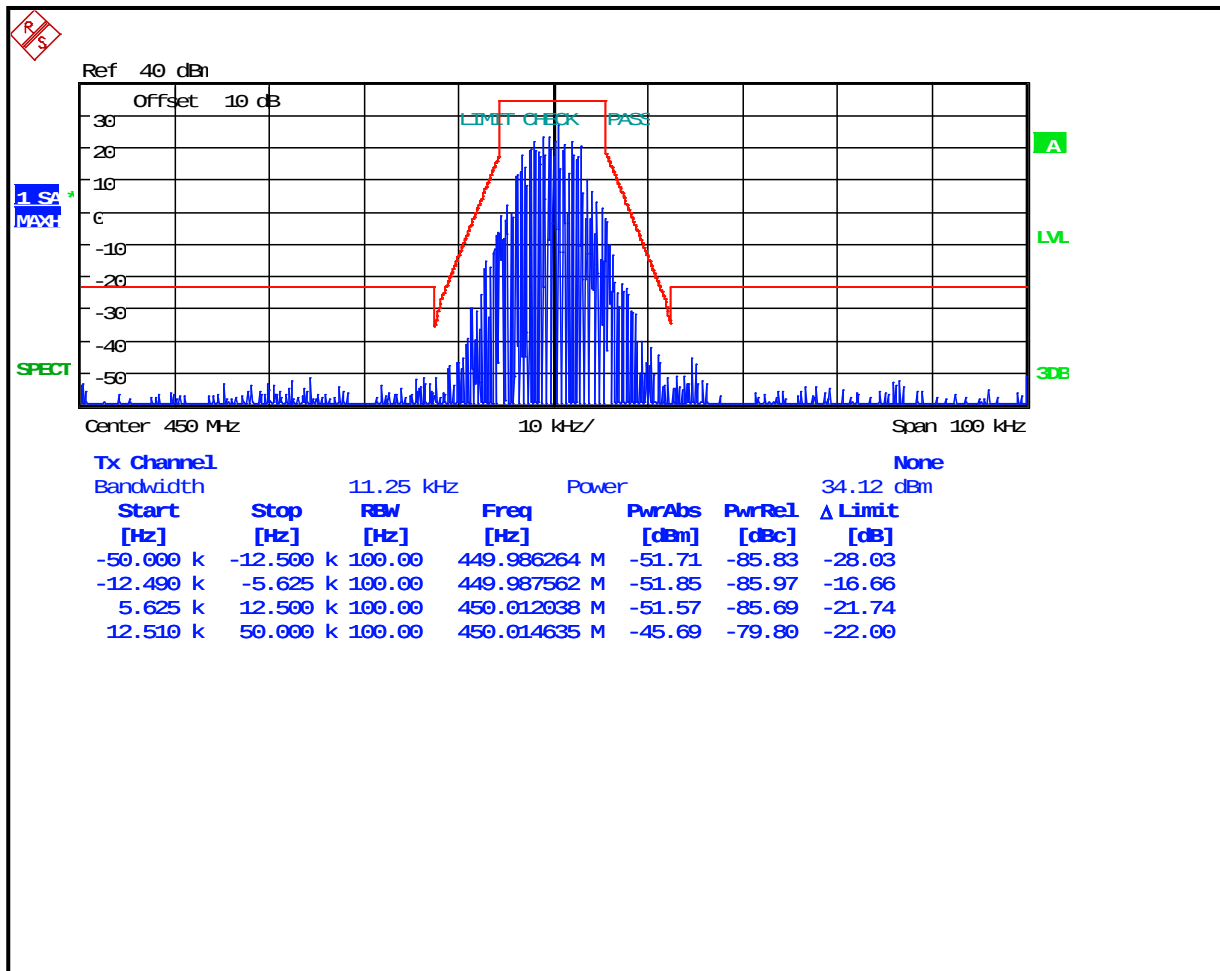

Plot 8-52: Occupied Bandwidth – 454 MHz; CPM TDMA; Mask D

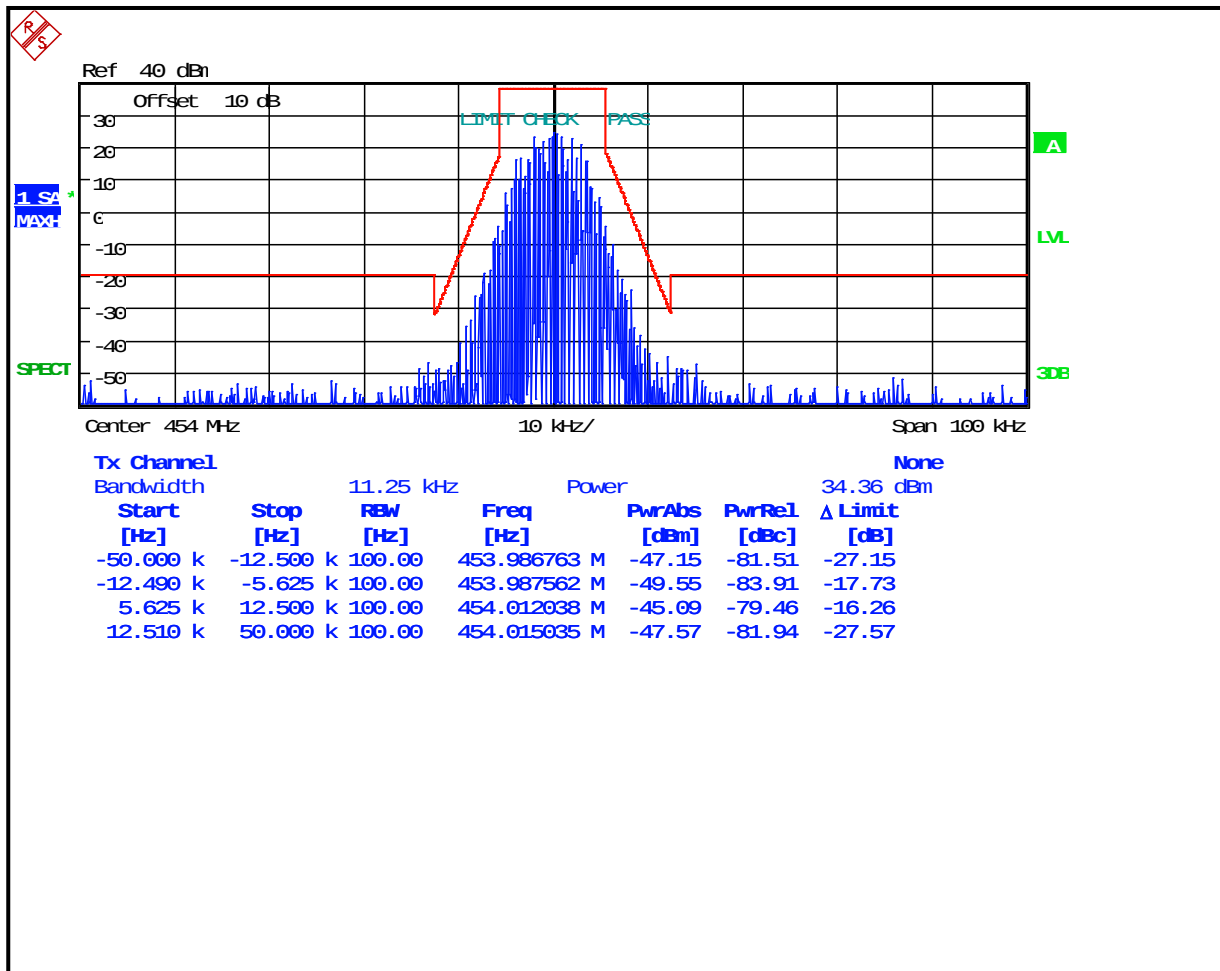


Plot 8-53: Occupied Bandwidth – 456MHz; CPM TDMA; Mask D

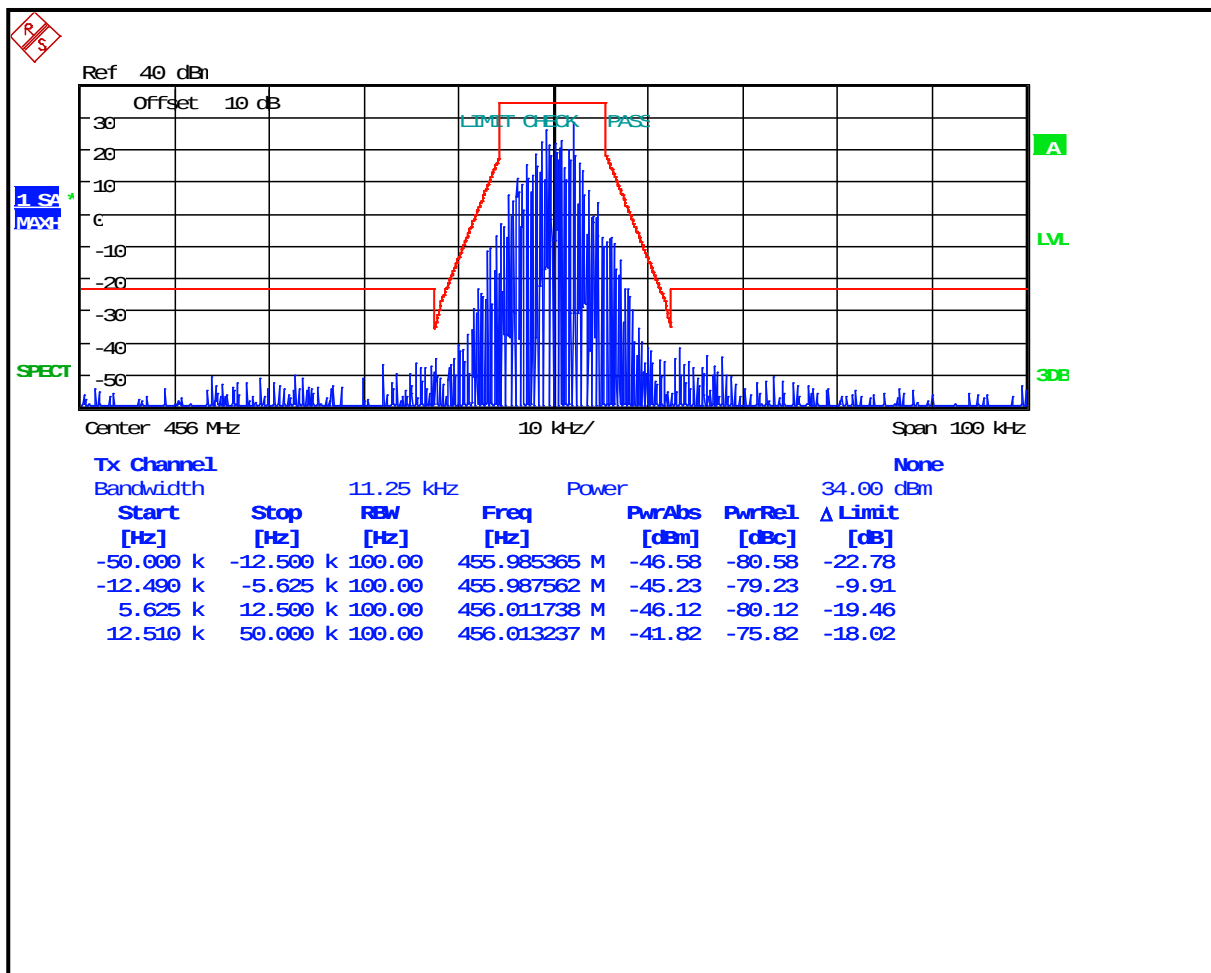


Tx Channel1				None			
Bandwidth		11.25 kHz	Power			35.26 dBm	
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	PwrRel [dBc]	Δ Limit [dB]	
-50.000 k	-12.500 k	100.00	458.996179 M	-49.01	-84.27	-26.47	
-12.490 k	-5.625 k	100.00	459.012510 M	-46.98	-82.24	-12.24	
5.625 k	12.500 k	100.00	459.037438 M	-52.30	-87.56	-18.37	
12.510 k	50.000 k	100.00	459.040335 M	-50.12	-85.39	-27.59	


Plot 8-55: Occupied Bandwidth – 459.975 MHz; CPM TDMA; Mask D

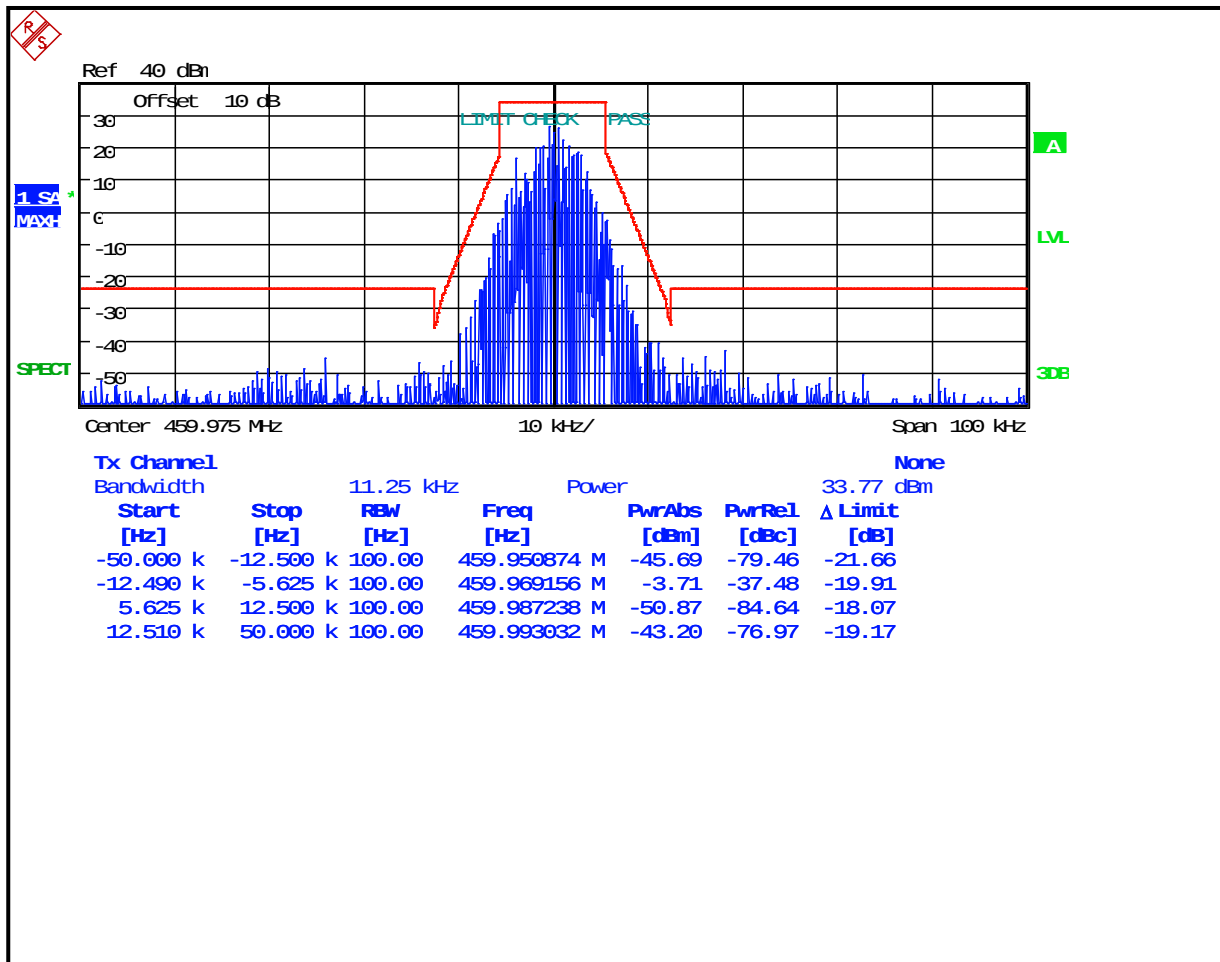


Plot 8-56: Occupied Bandwidth – 470 MHz; CPM TDMA; Mask D

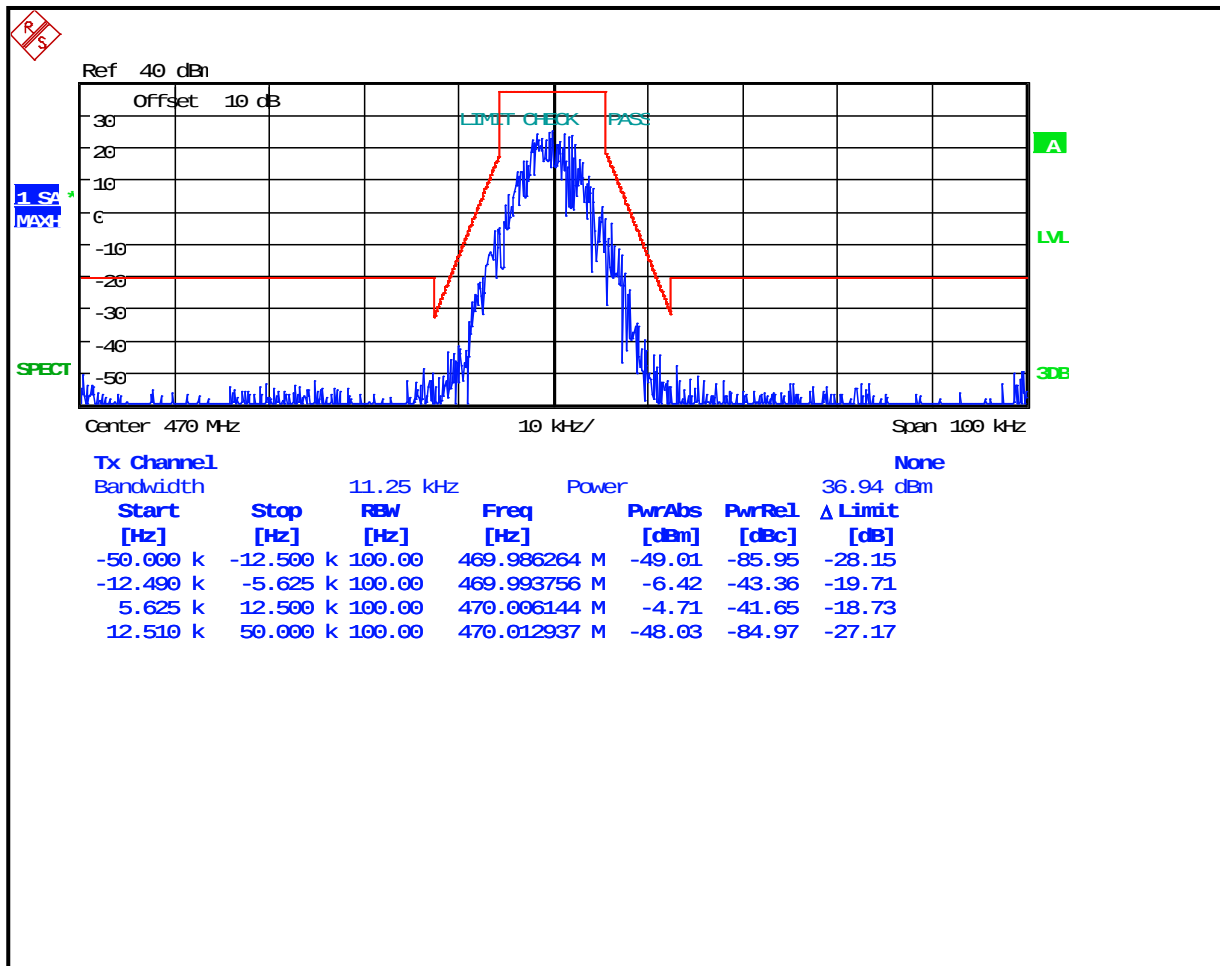


Plot 8-57: Occupied Bandwidth – 430 MHz; (2-level FSK 9600; NB) EDACS; Mask D

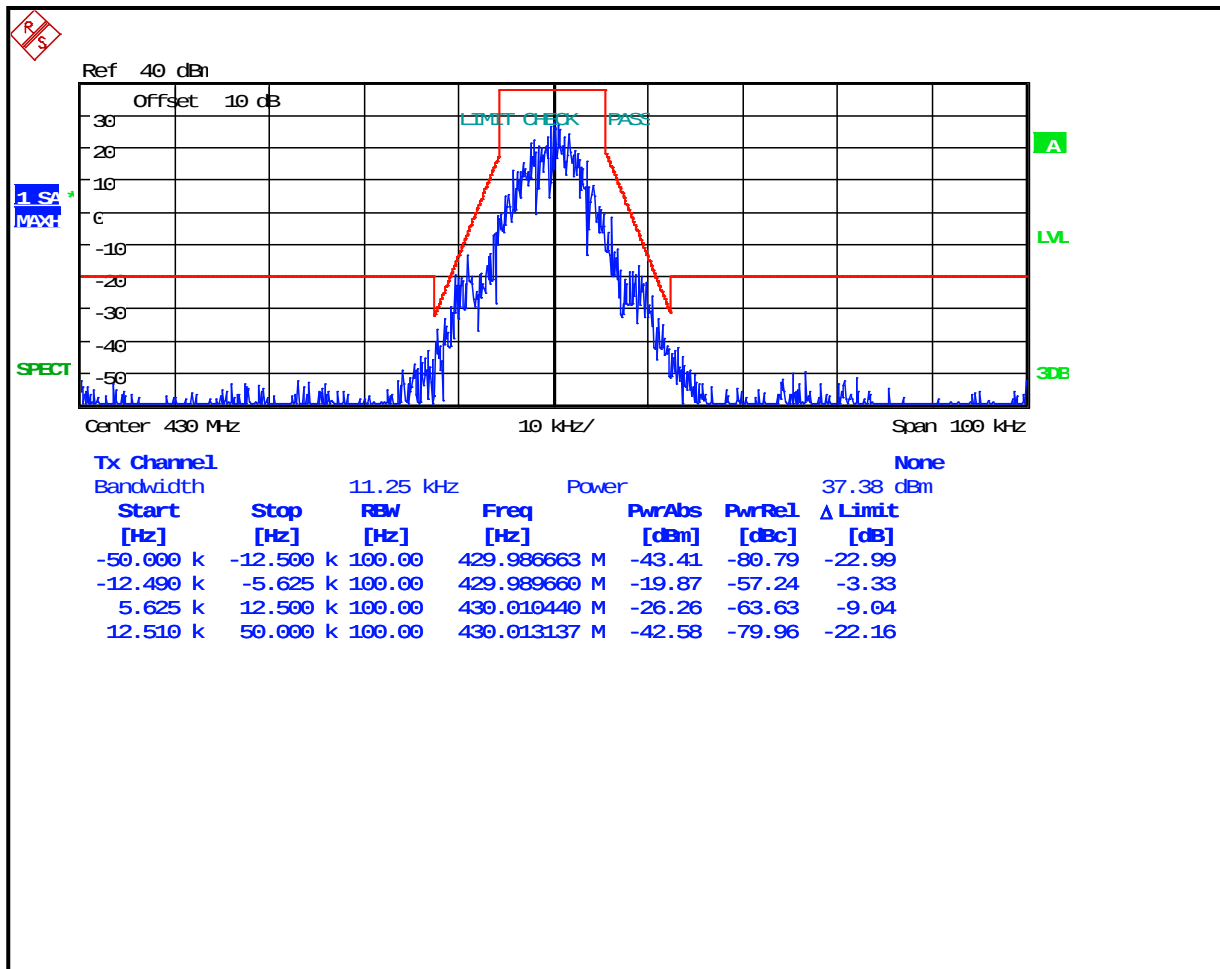


Plot 8-58: Occupied Bandwidth – 450 MHz; (2-level FSK 9600; NB) EDACS; Mask D

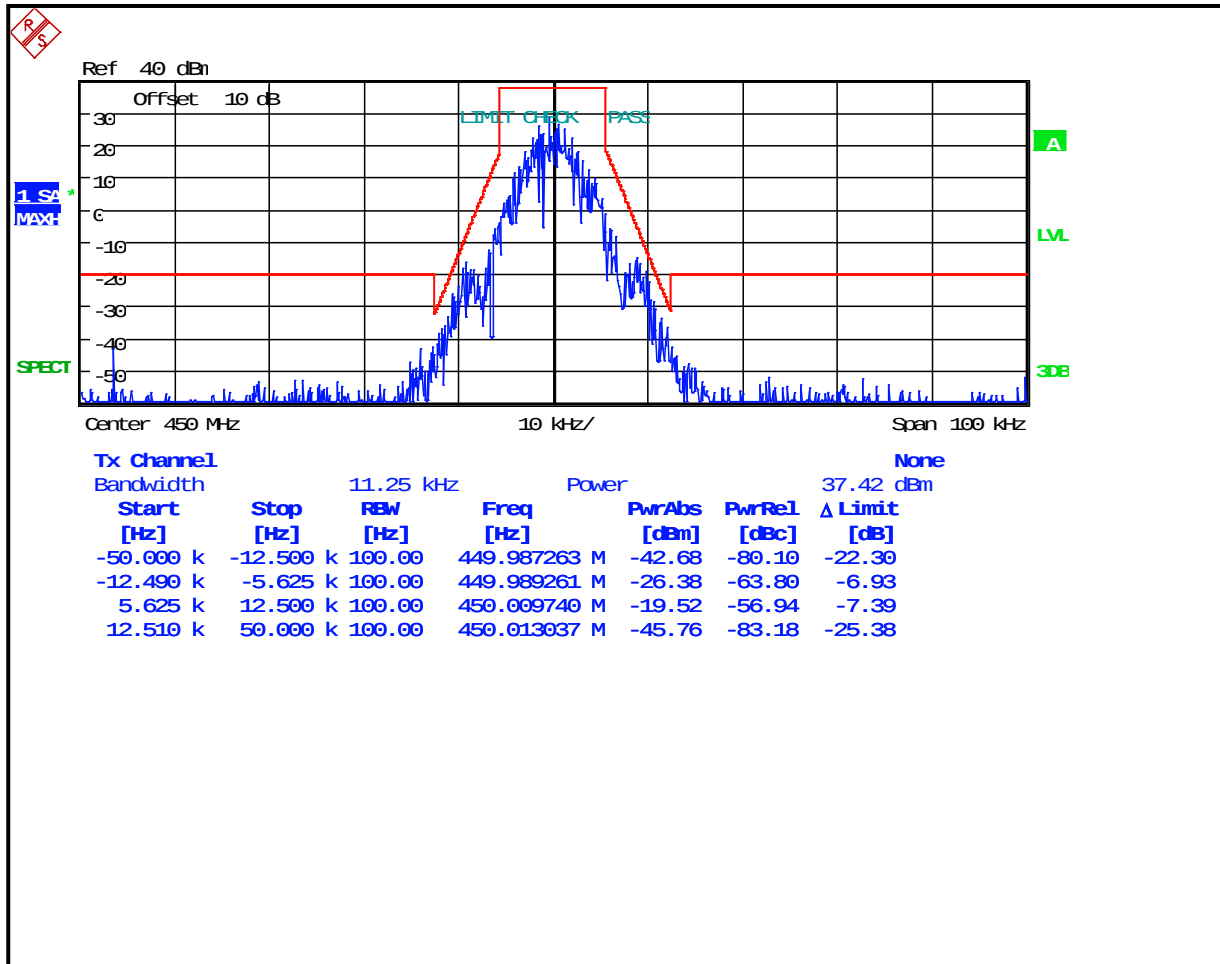


Plot 8-59: Occupied Bandwidth – 454 MHz; (2-level FSK 9600; NB) EDACS; Mask D

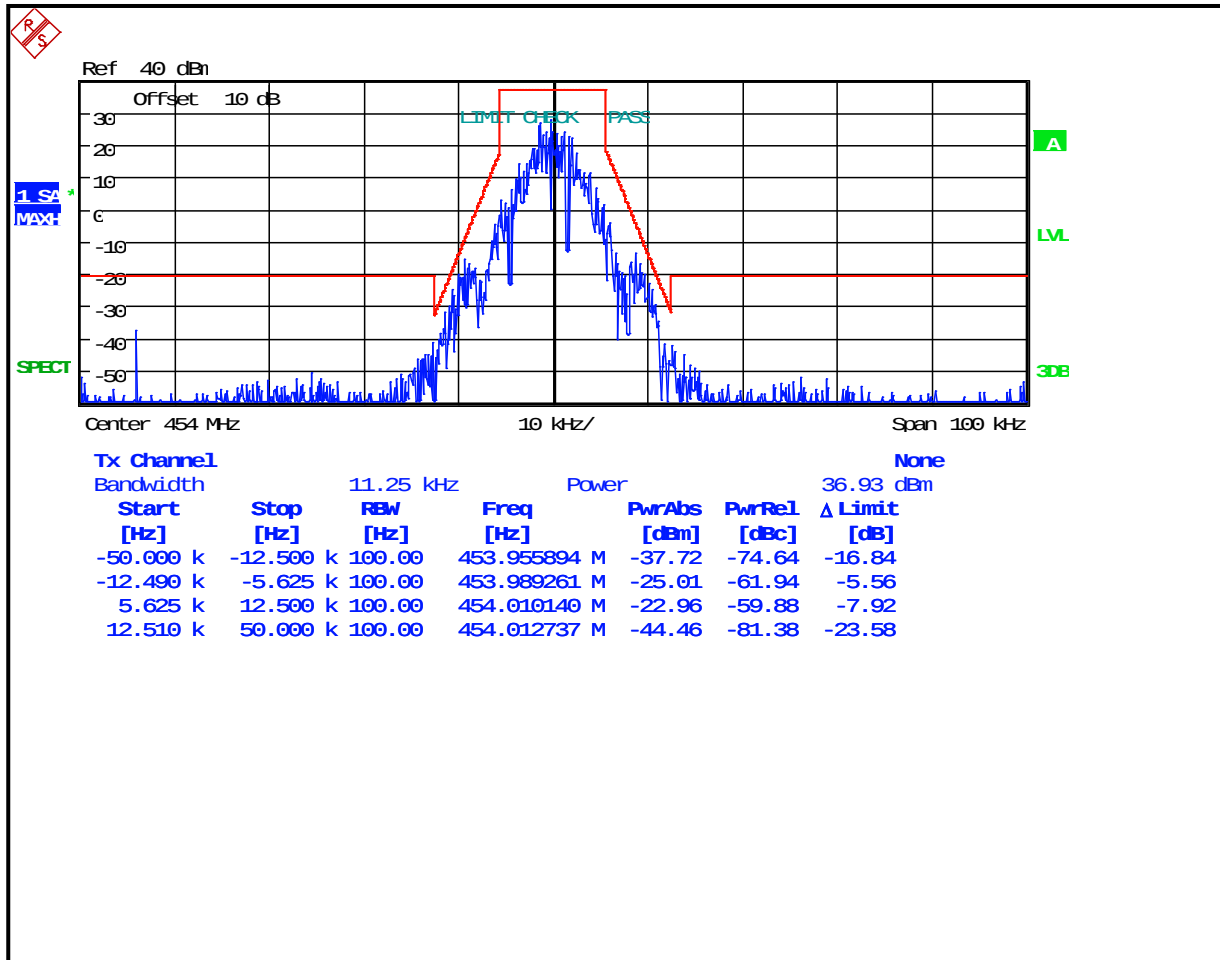


Plot 8-60: Occupied Bandwidth – 456 MHz; (2-level FSK 9600; NB) EDACS; Mask D

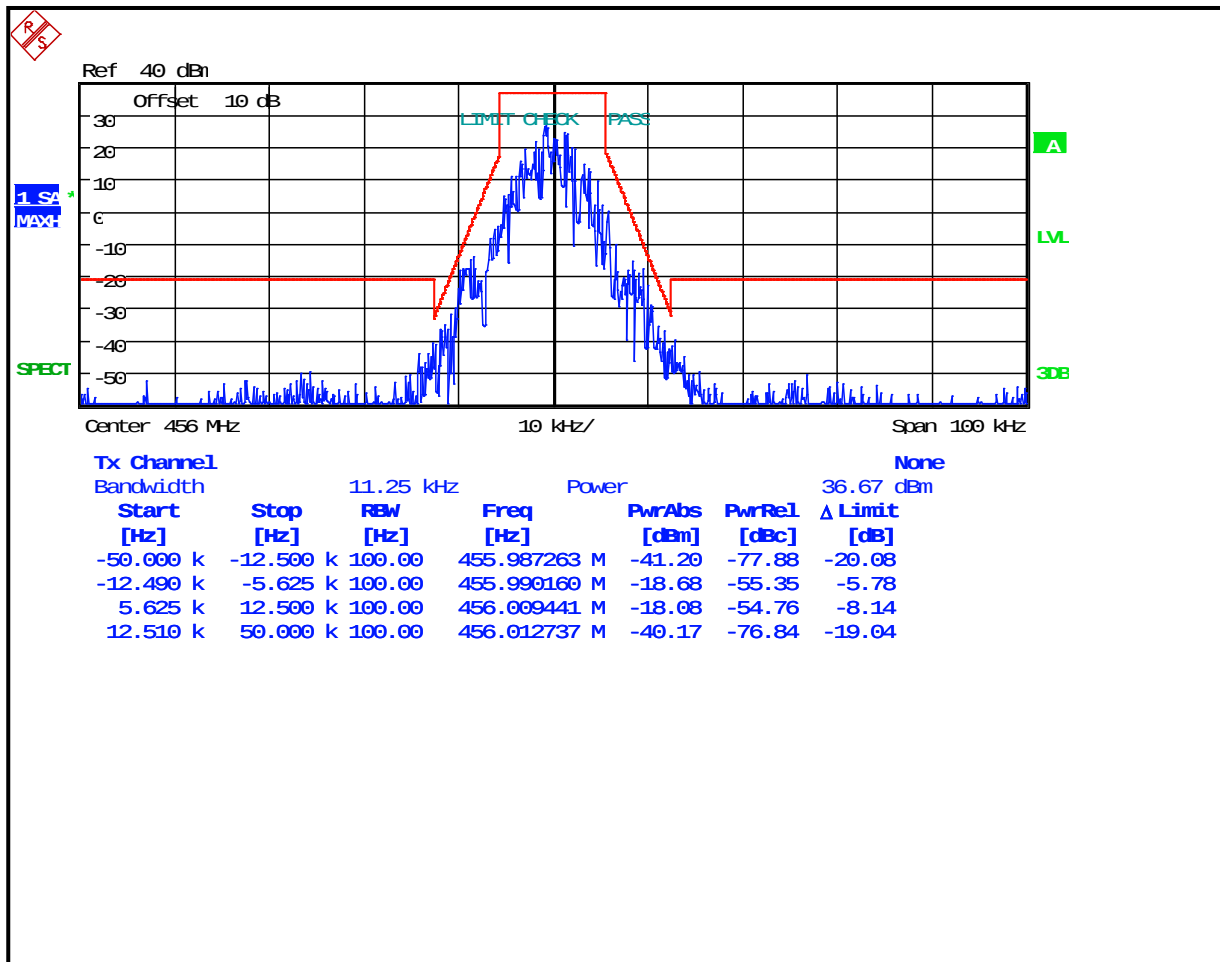


Plot 8-61: Occupied Bandwidth – 459.025 MHz; (2-level FSK 9600; NB) EDACS; Mask D

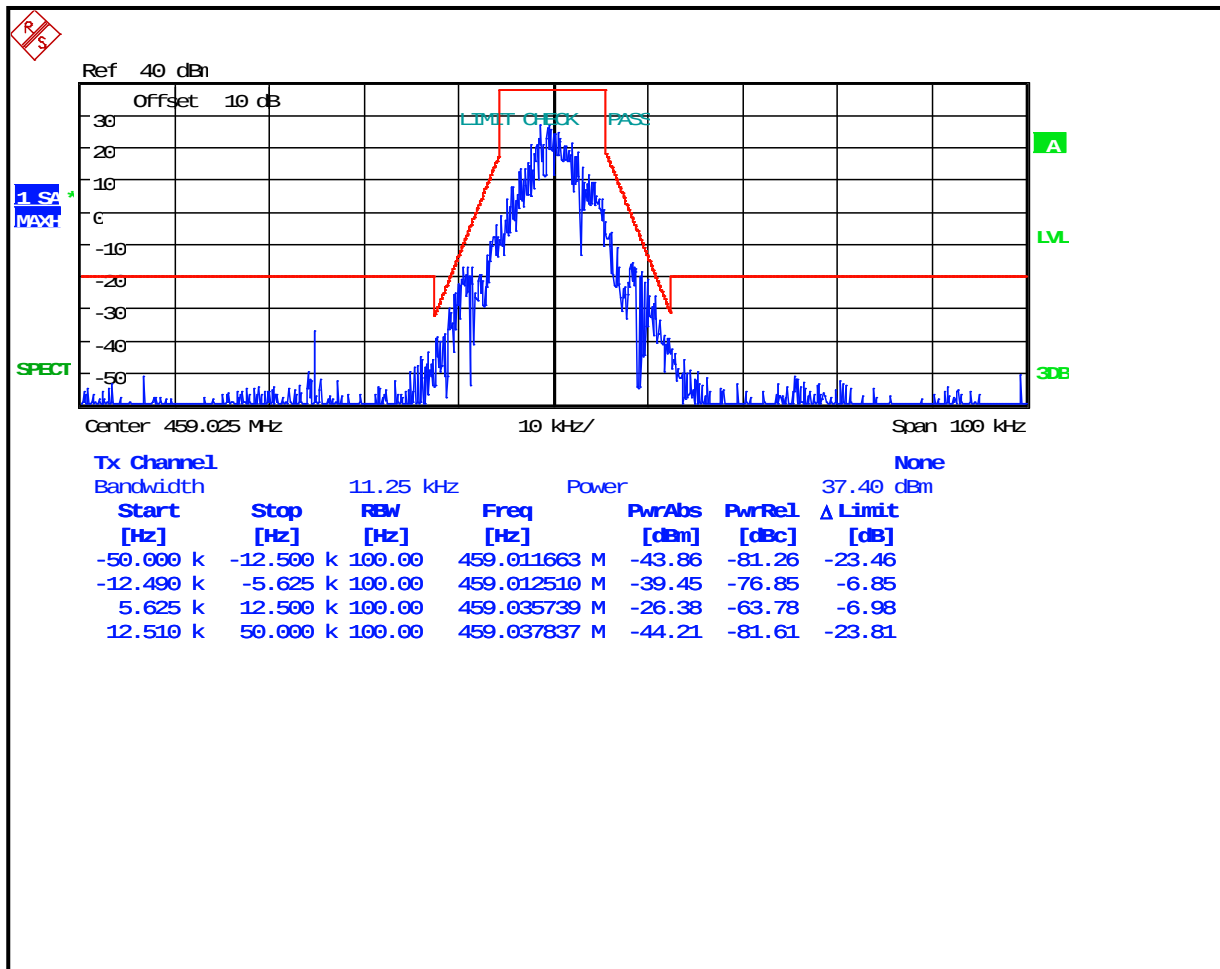


Plot 8-62: Occupied Bandwidth – 459.975 MHz; (2-level FSK 9600; NB) EDACS; Mask D

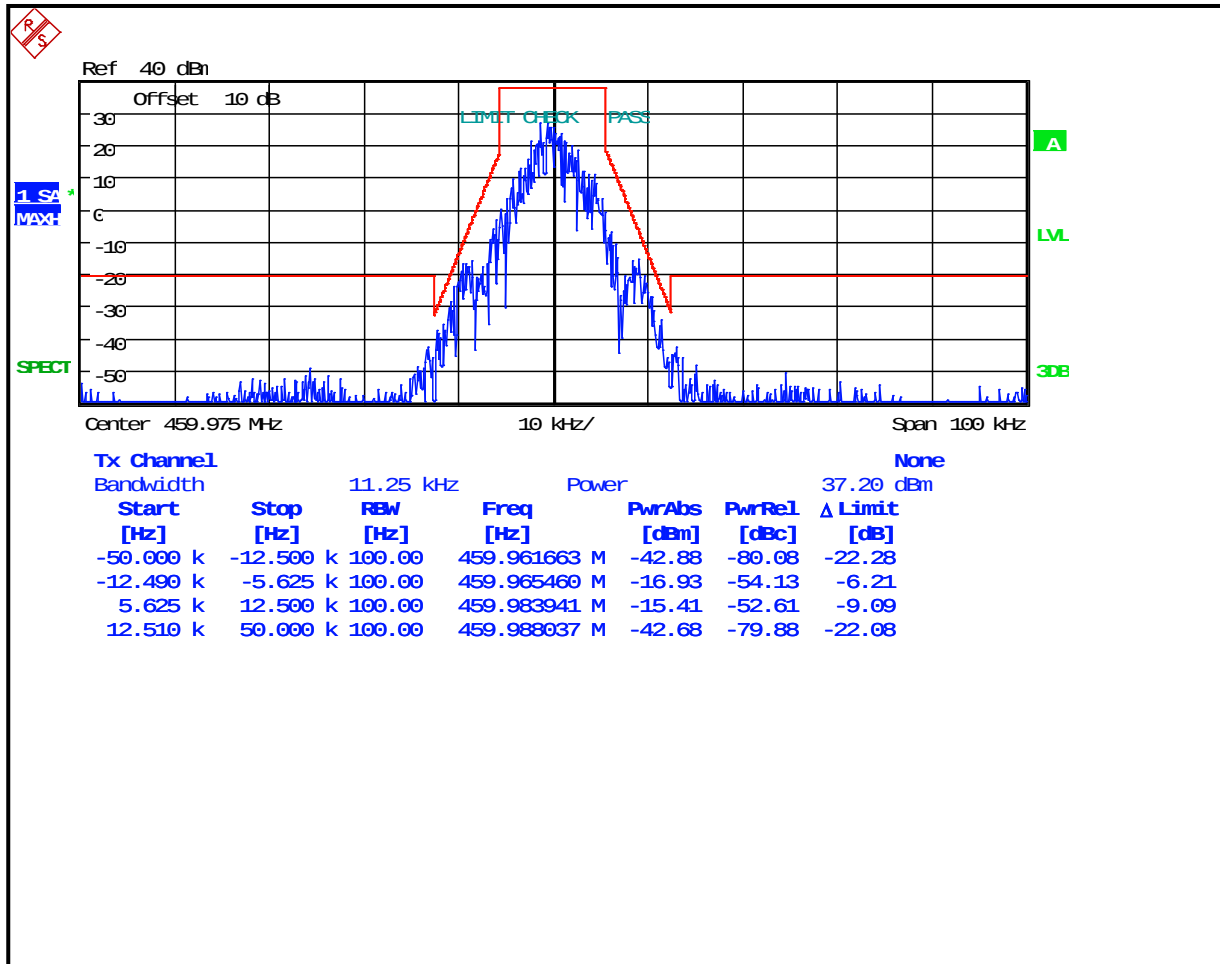


Plot 8-63: Occupied Bandwidth – 470 MHz; (2-level FSK 9600; NB) EDACS; Mask D

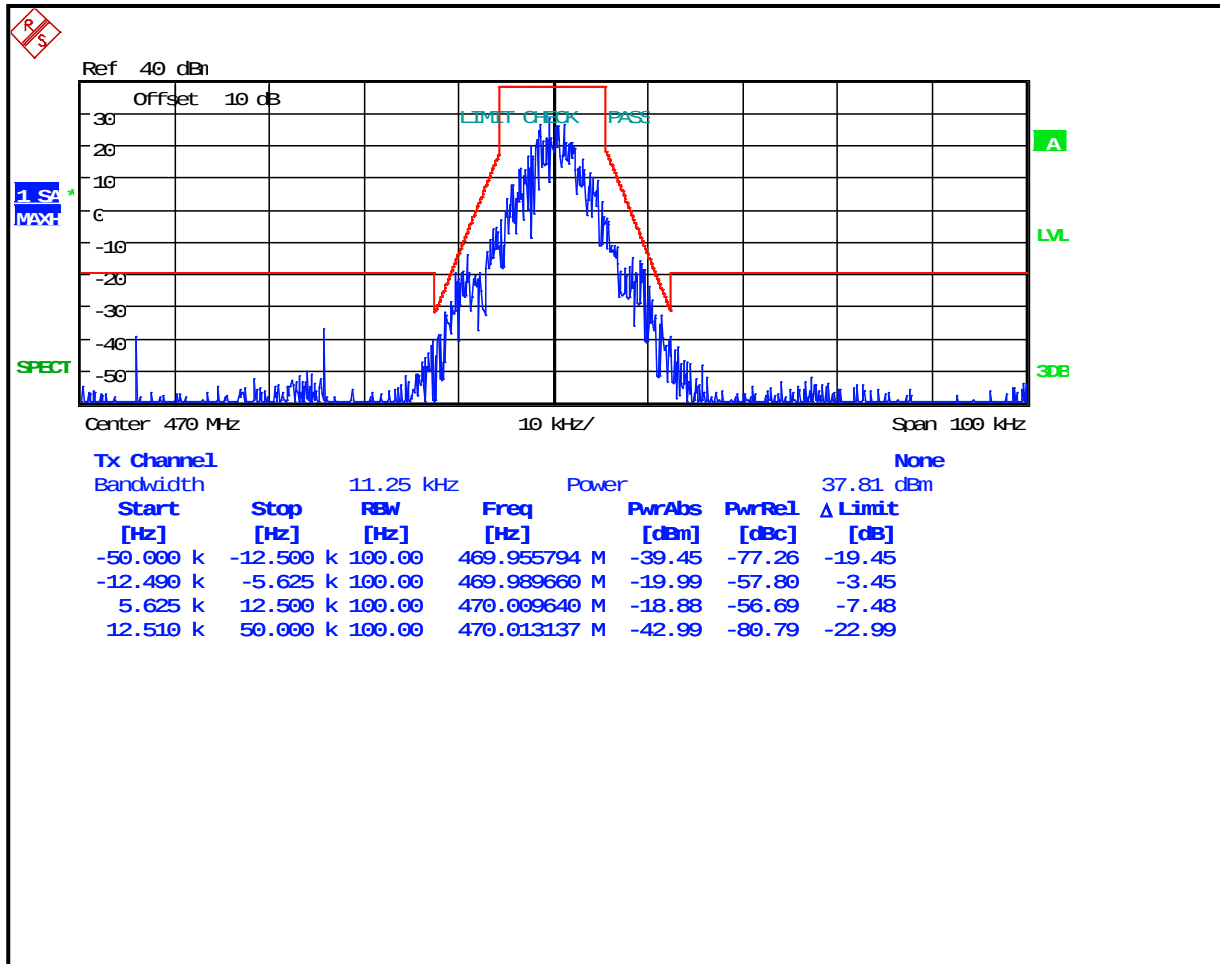


Plot 8-64: Occupied Bandwidth – 430 MHz; (2-level FSK 9600; WB) EDACS; Mask C

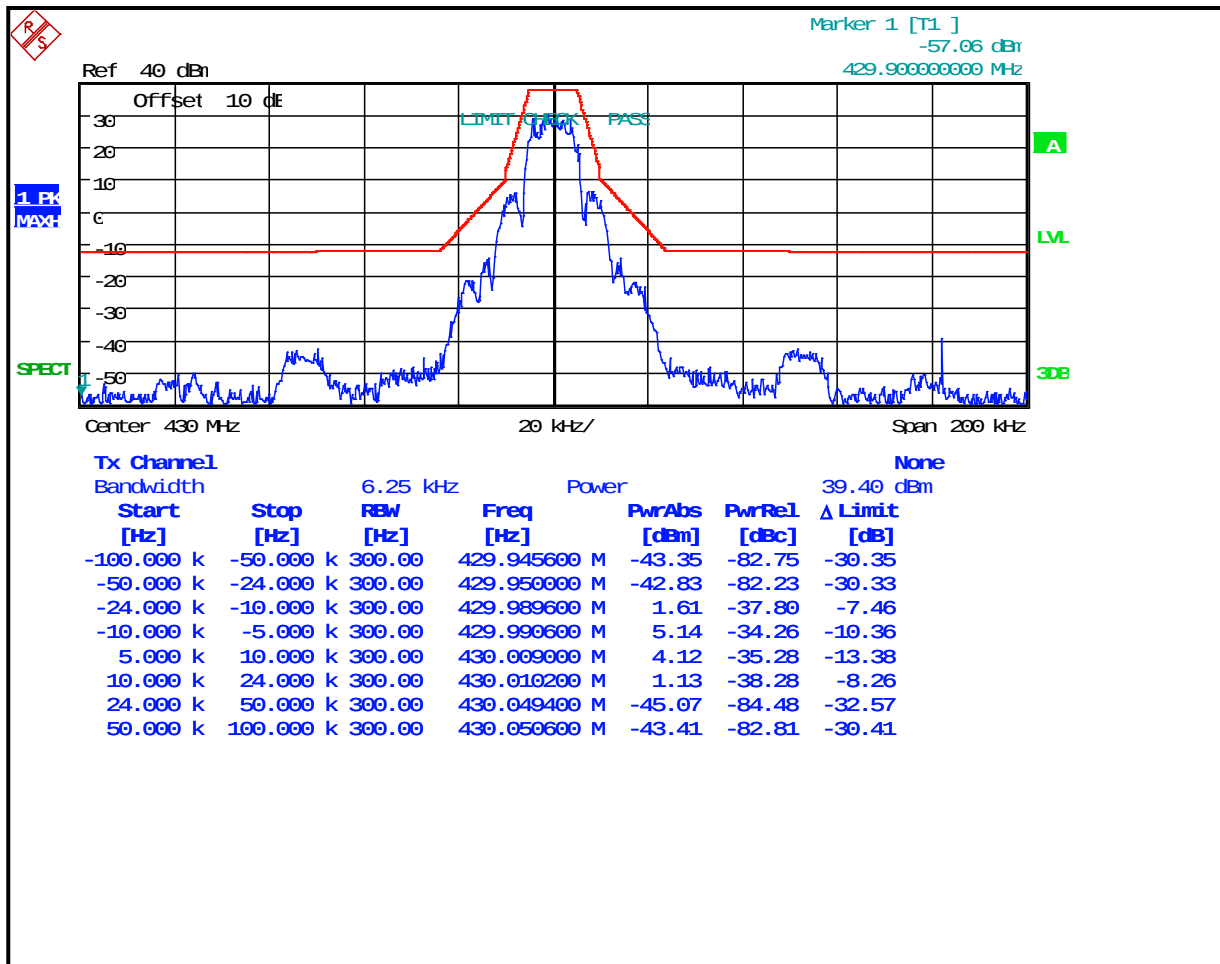


Plot 8-65: Occupied Bandwidth – 450 MHz; (2-level FSK 9600; WB) EDACS; Mask C

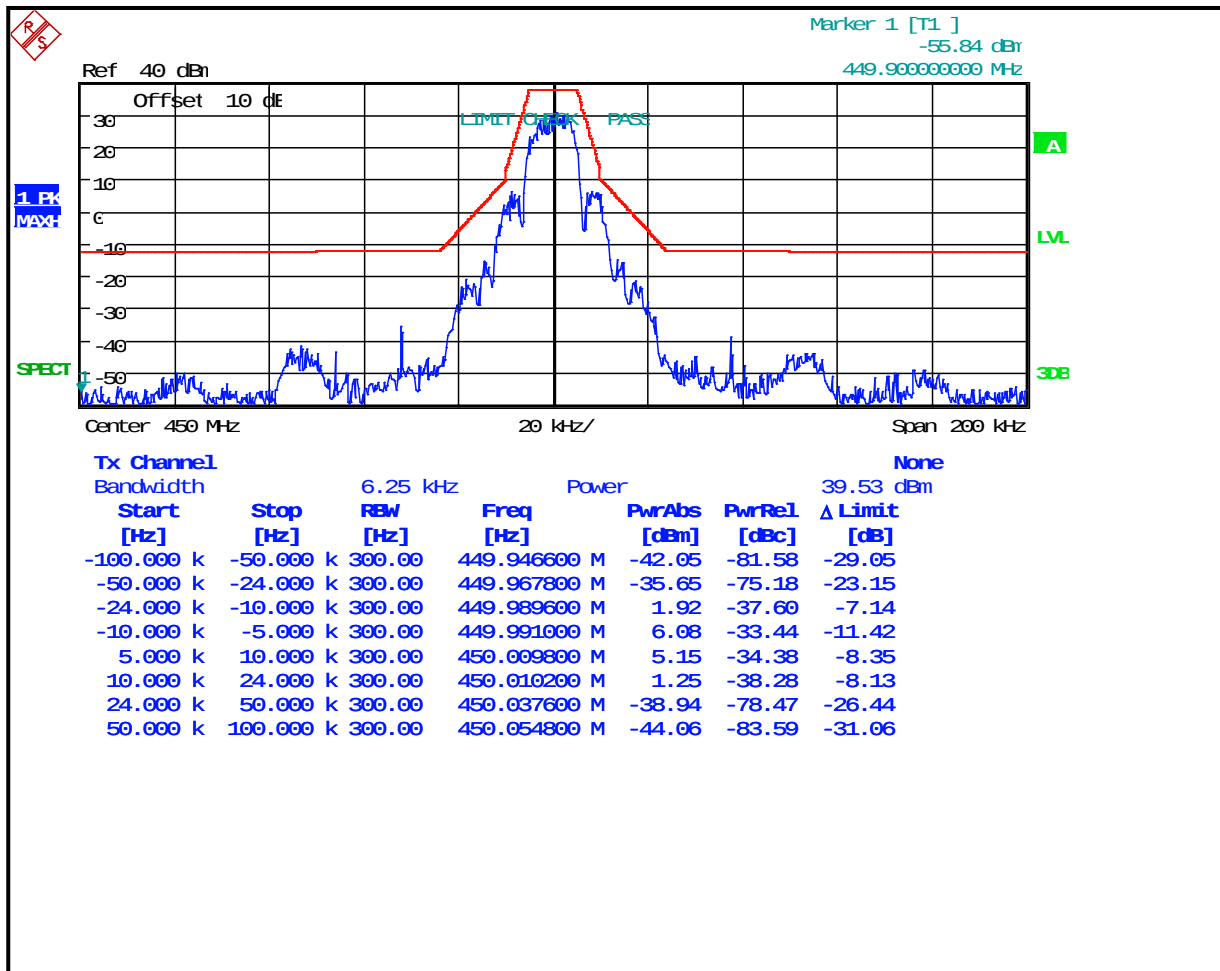


Plot 8-66: Occupied Bandwidth – 454 MHz; (2-level FSK 9600; WB) EDACS; Mask C

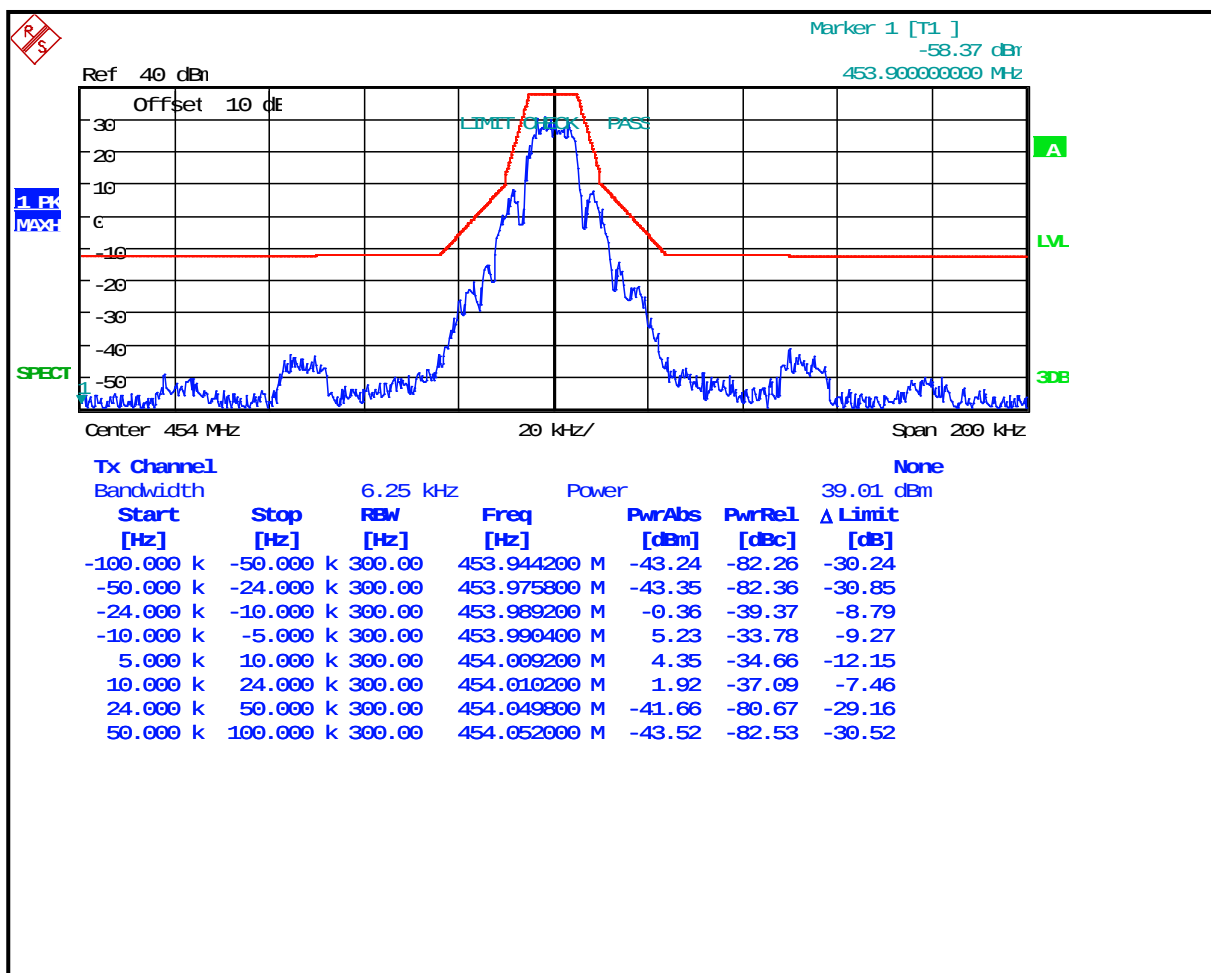


Plot 8-67: Occupied Bandwidth – 456 MHz; (2-level FSK 9600; WB) EDACS; Mask C

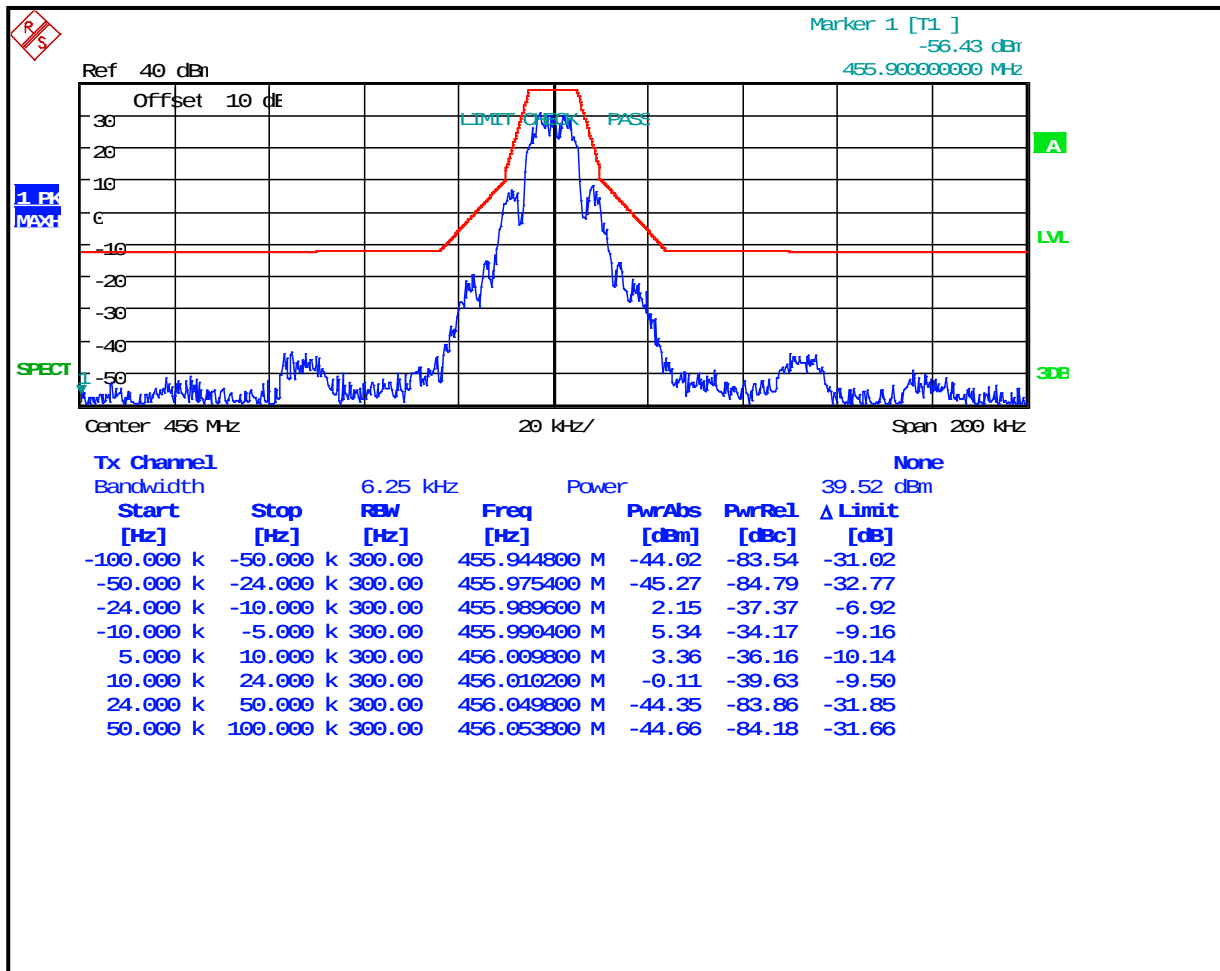


Plot 8-68: Occupied Bandwidth – 459.025 MHz; (2-level FSK 9600; WB) EDACS; Mask C

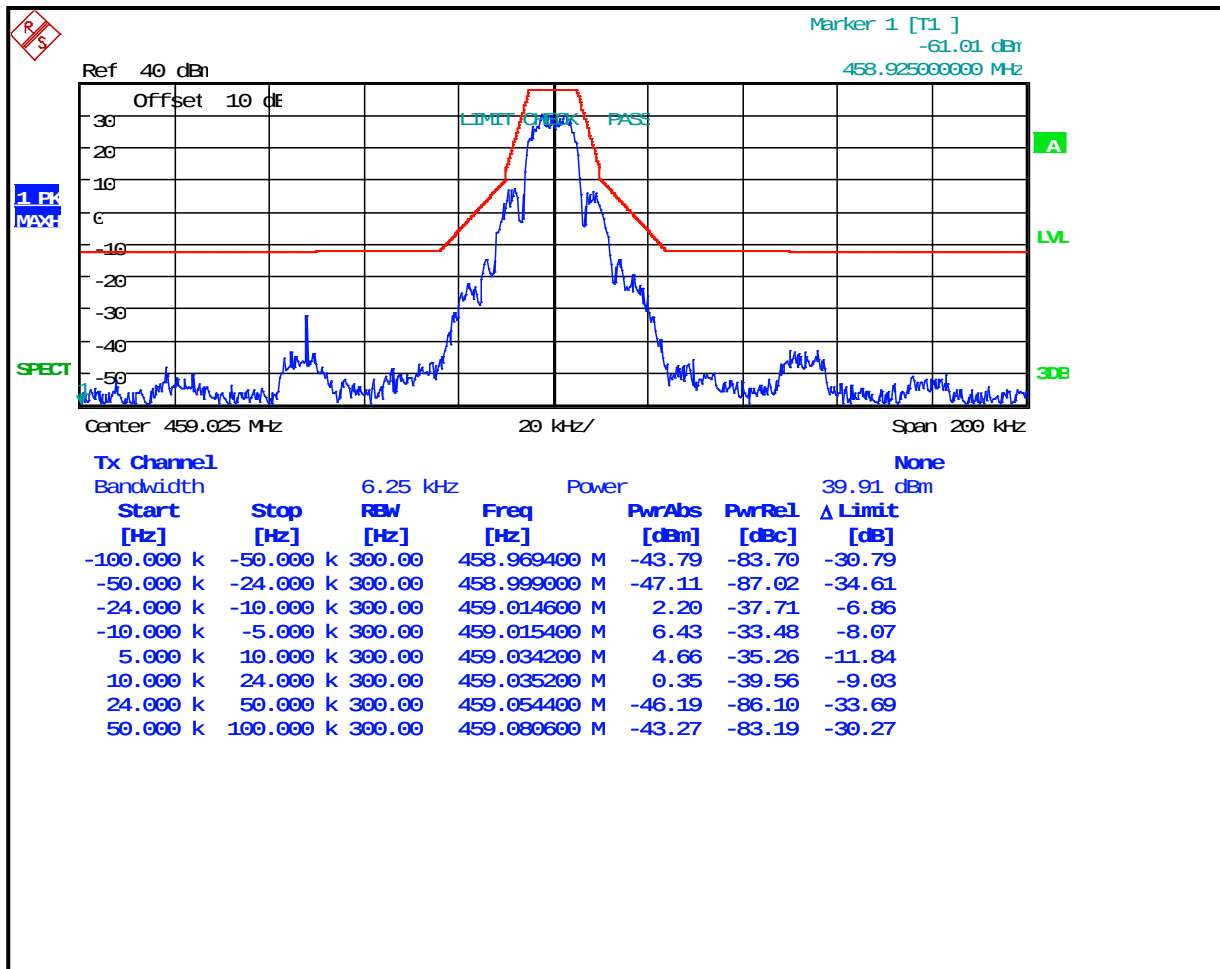


Plot 8-69: Occupied Bandwidth – 459.975MHz; (2-level FSK 9600; WB) EDACS; Mask C

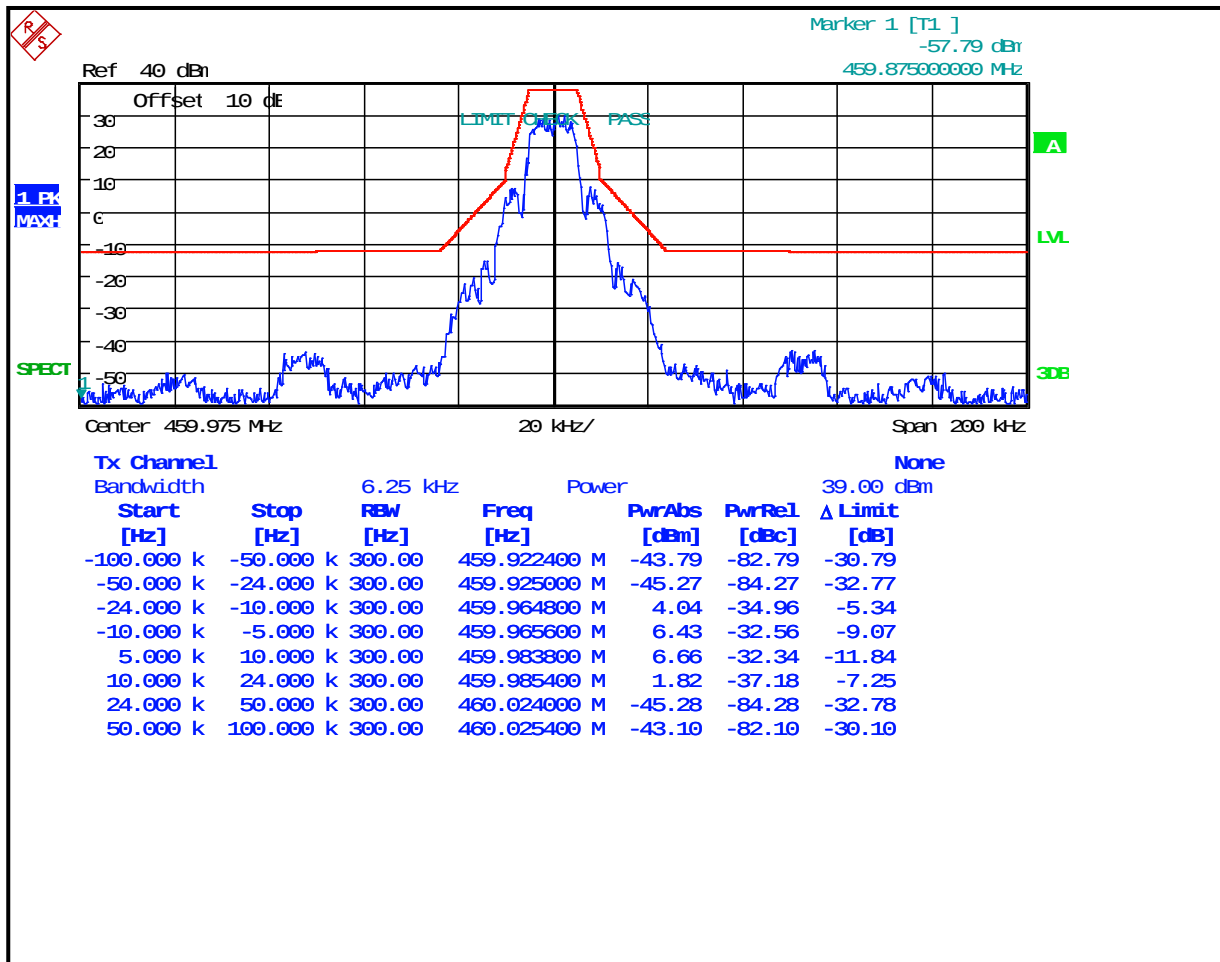


Plot 8-70: Occupied Bandwidth – 470 MHz; (2-level FSK 9600; WB) EDACS; Mask C

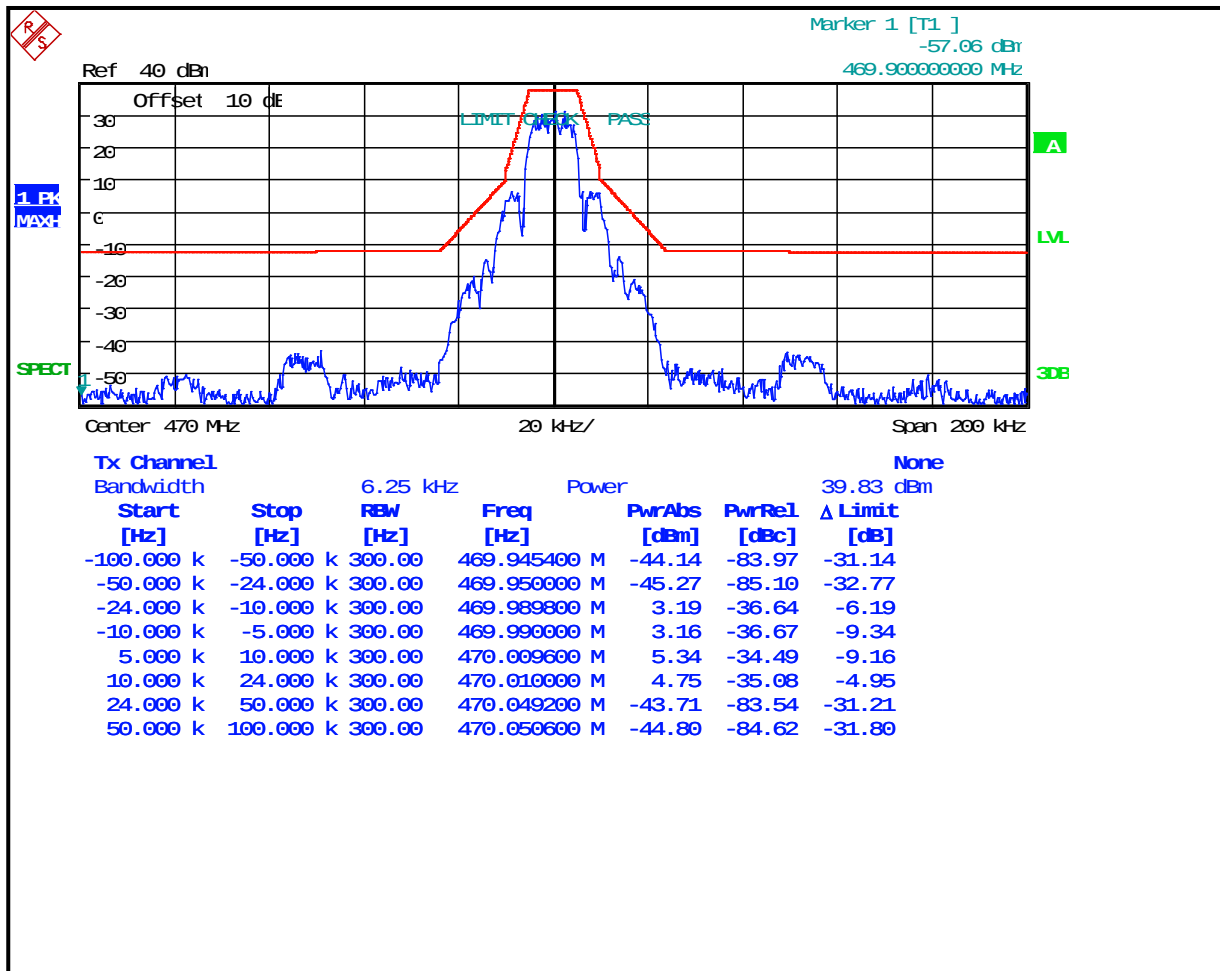


Plot 8-71: Occupied Bandwidth – 430 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

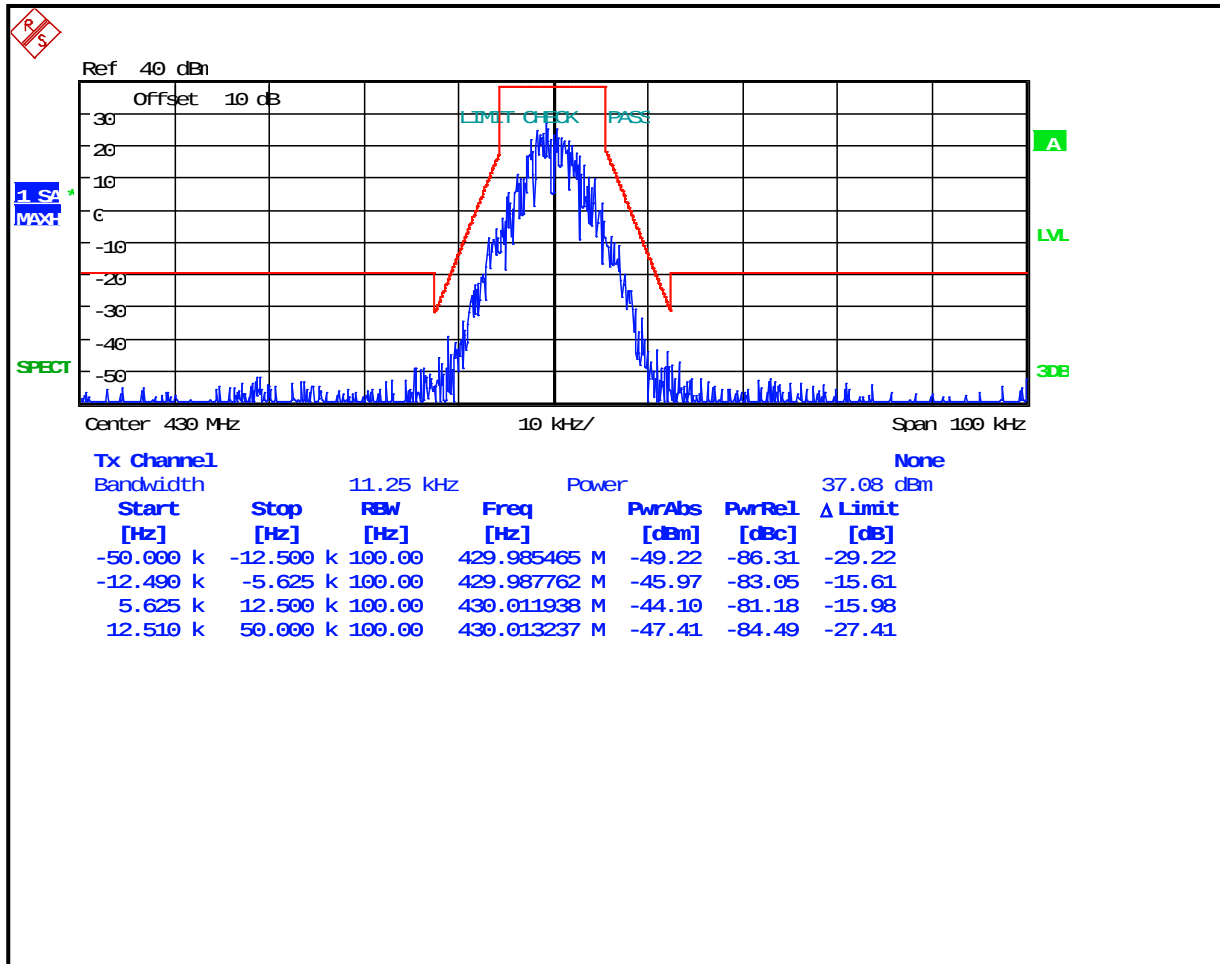


Plot 8-72: Occupied Bandwidth – 450 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

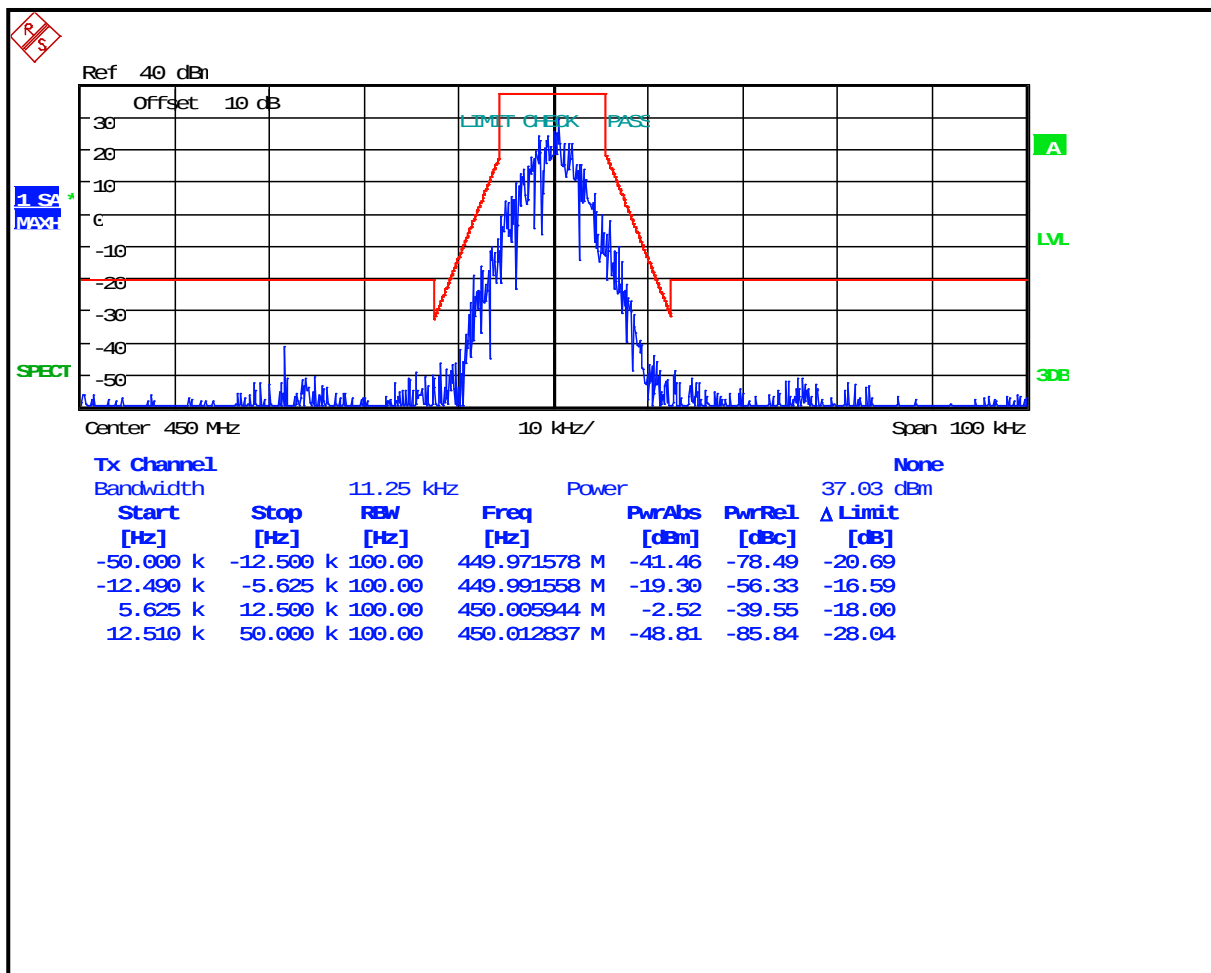


Plot 8-73: Occupied Bandwidth – 454 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

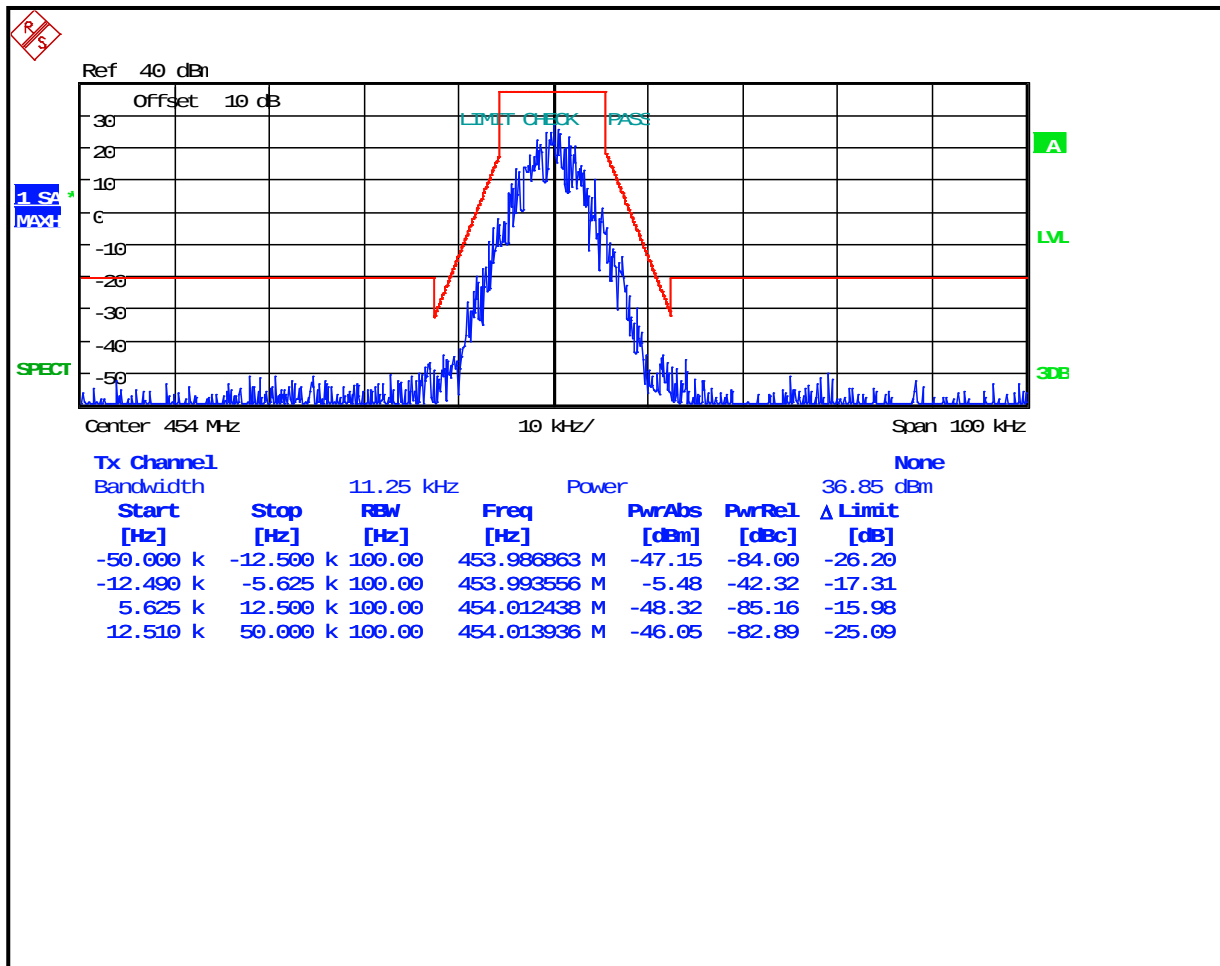


Plot 8-74: Occupied Bandwidth – 456 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

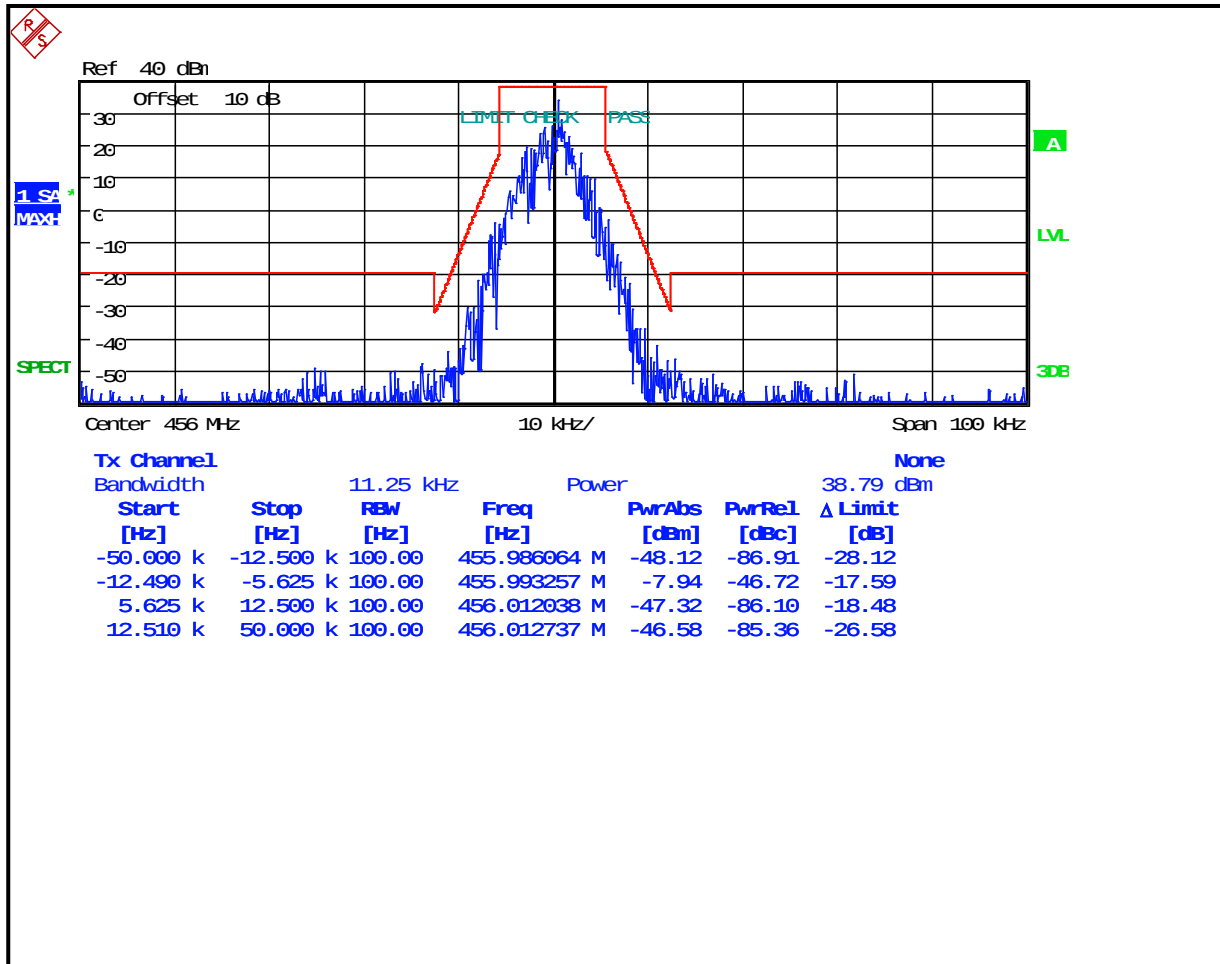


Plot 8-75: Occupied Bandwidth – 459.025 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

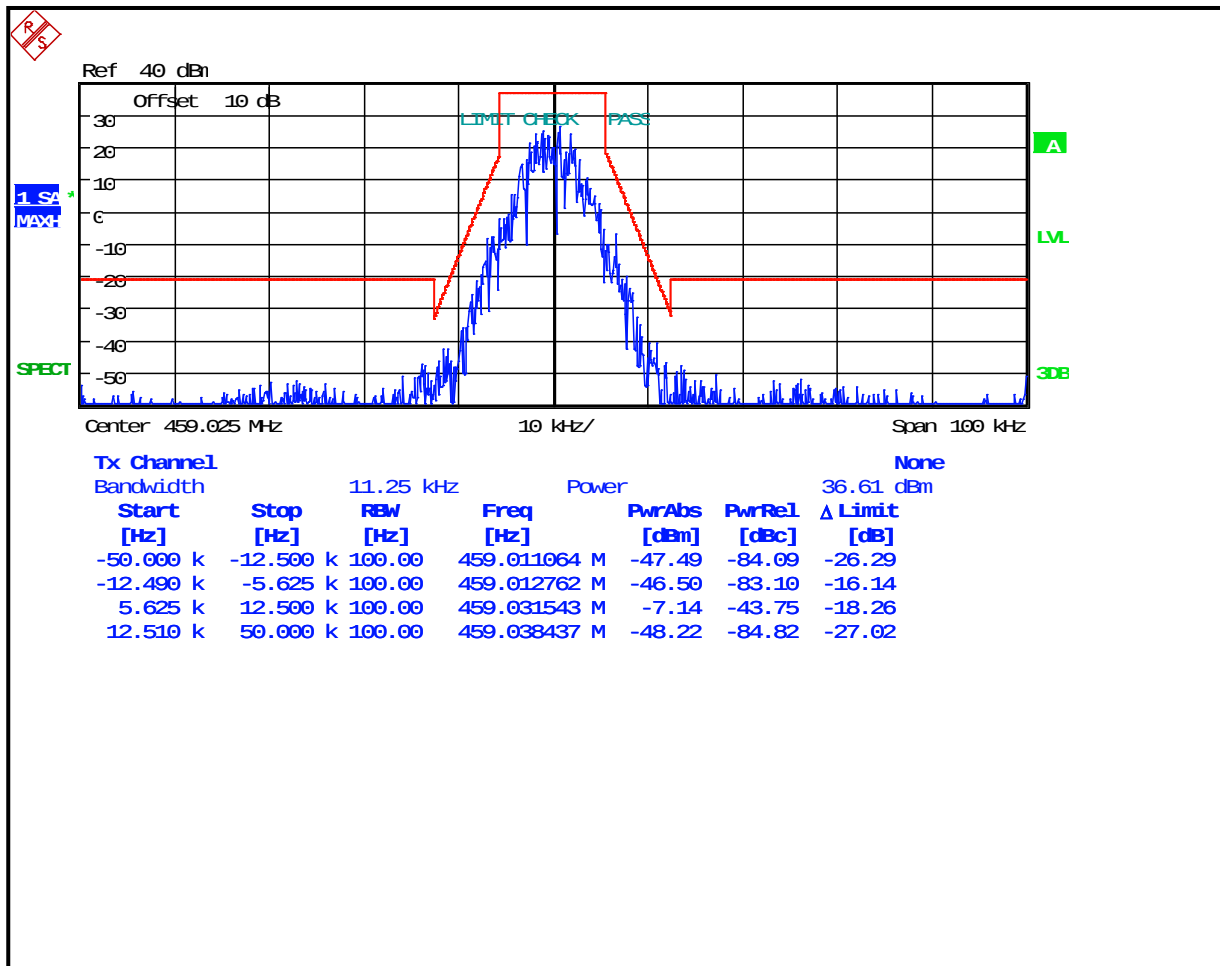

Plot 8-76: Occupied Bandwidth – 459.975MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

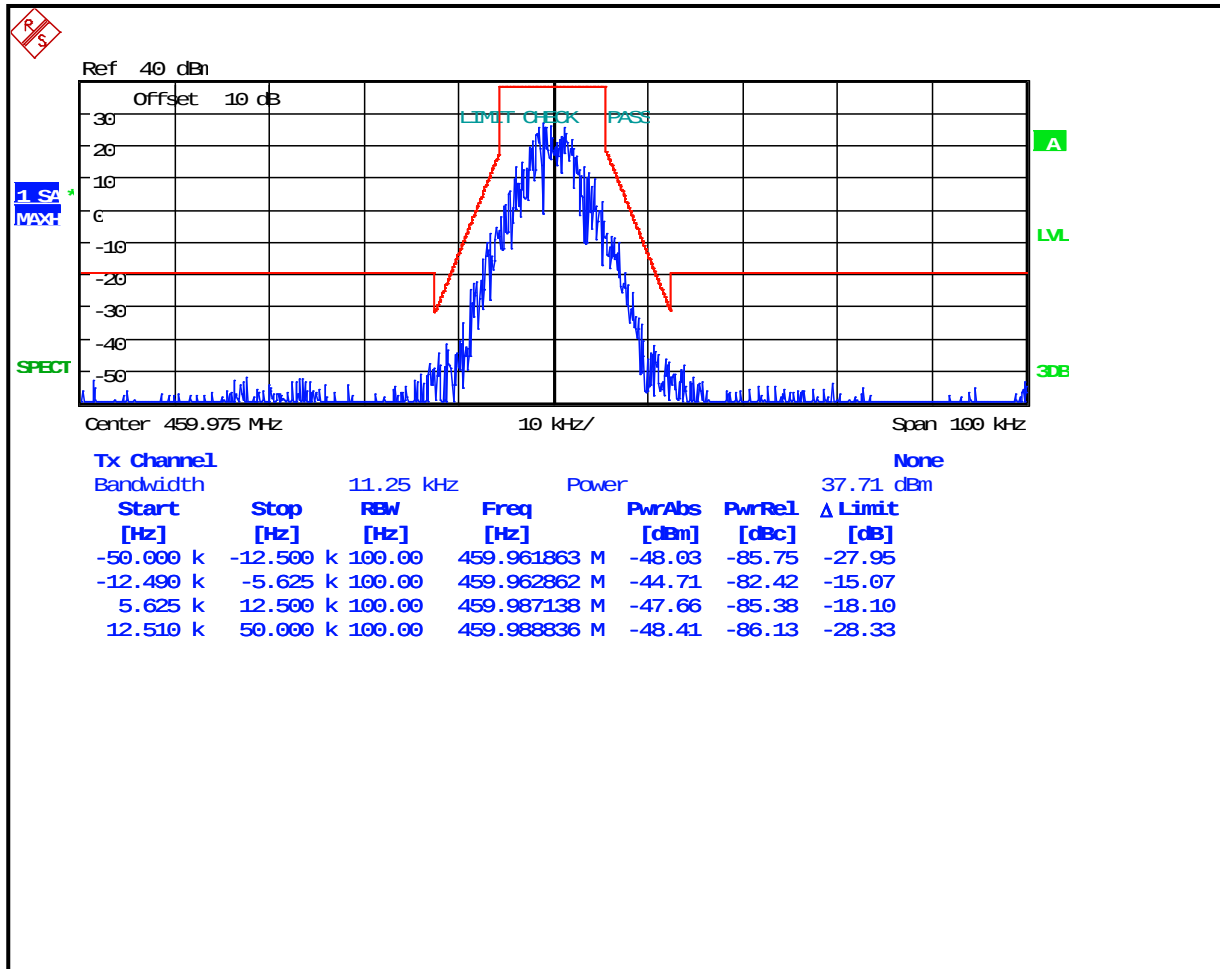

Plot 8-77: Occupied Bandwidth – 470 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D

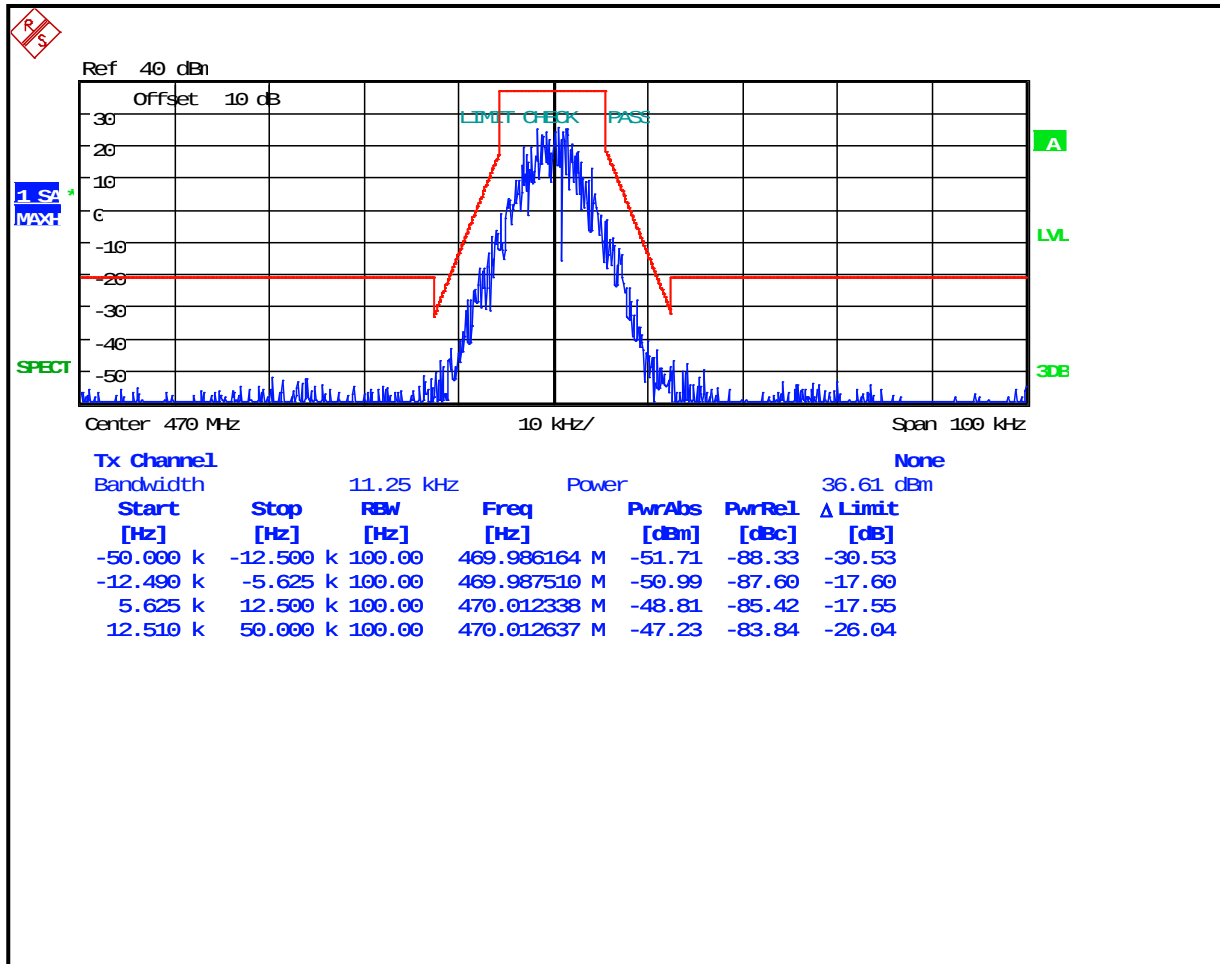

Plot 8-78: Occupied Bandwidth – 815 MHz; Narrowband Analog; Mask D

