




Engineering Solutions & Electromagnetic Compatibility Services

Unlicensed National Information Infrastructure (U-NII) Transmitter Report

Test Lab: Rhein Tech Laboratories, Inc. 360 Herndon Parkway Suite 1400 www.rheintech.com Herndon, VA 20170		Applicant: Harris Corporation 221 Jefferson Ridge Parkway Lynchburg, VA 24501 Tel: 434-455-9290	
FCC ID/ IC	OWDTR-0149-E 3636B-0149	Test Report Date:	August 10, 2017
Platform	N/A	RTL Work Order #	2017071
Model	XL-185P C1D2	RTL Quote #	QRTL17-069B
American National Standard Institute	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
FCC Classification	DTS – Part 15 Digital Transmission System		
FCC Rule Part(s)/Guidance	FCC Rules Part 15.407 (Subpart E): Unlicensed National Information Infrastructure Devices (2016)		
Industry Canada	RSS-247 Issue 2: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices		
Frequency Range (MHz)	Output Power (W)*	Frequency Tolerance	Emission Designator
5180-5250	0.015	N/A	44M2G7D
5745-5825	0.008	N/A	48M7G7D

* power is conducted

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, Industry Canada RSS-247, RSS-Gen, and ANSI C63.10.

Signature: 

Date: August 10, 2017

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These test(s) are accredited under Rhein Tech Laboratories, Inc. ISO/IEC 17025 accreditation issued by ANAB. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	General Information.....	6
1.1	Scope	6
1.2	Description of EUT.....	6
1.3	Test Facility.....	6
1.4	Related Submittal(s)/Grant(s).....	6
1.5	Modifications.....	6
2	Test Information	7
2.1	Description of Test Modes.....	7
2.2	Exercising the EUT	7
2.3	Test Result Summary.....	8
2.4	Test System Details.....	8
2.5	Configuration of Tested System	9
3	Transmit Power Measurement – FCC 15.407(a/1/2/3); RSS-247 6.2.....	10
3.1	Power Output Test Procedure	10
3.2	Power Output Test Data.....	10
3.3	Limits of Maximum Transmit Power Measurement.....	10
4	Peak Power Spectral Density Measurement – FCC 15.407(a) 1-5; RSS-247 6.2.....	11
4.1	Limits of Peak Power Spectral Density	11
4.2	Peak Power Spectral Density Measurement Test Procedure	11
4.3	Peak Power Spectral Density Test Data.....	11
5	Frequency Stability Measurement – FCC 15.407(g).....	34
5.1	Limits of Frequency Stability.....	34
5.2	Frequency Stability Measurement Test Procedure.....	34
5.3	Frequency Stability Test Data.....	34
6	Compliance with the Band Edge – FCC 15.407(b); RSS-247 6.2	36
6.1	Limits of Band Edge Measurement.....	36
6.2	Band Edge Test Procedure	36
6.3	Band Edge Test Results.....	37
6.3.1	5150 – 5350 MHz Band Edges – 802.11a and 802.11n	37
6.3.2	5725 – 5850 MHz Band Edges – 802.11a and 802.11n	45
7	Undesirable Emissions - 15.407(b); RSS-247 6.2	61
7.1	Undesirable Emissions Test Procedures	61
7.2	Undesirable Emissions Test Results	62
7.3	Limits of Undesirable Emissions.....	71
8	Bandwidth – FCC 15.407(a) and (e); RSS-247 6.2.....	72
8.1	Bandwidth Test Procedure	72
9	Radiated Emissions – FCC 15.209; RSS-247 6.2, RSS-Gen 6.13/7.1.....	107
9.1	Limits of Radiated Emissions Measurement	107
9.2	Radiated Emissions Measurement Test Procedure	107
9.3	Radiated Emissions Harmonics/Spurious Test Results.....	109
10	Conducted Emissions - FCC Rules and Regulations Part 15.207; RSS-Gen 8.8	111
11	Conclusion	111

Figure Index

Figure 2-1:	Configuration of System Under Test	9
-------------	--	---

Table Index

Table 2-1:	Channels Tested - 802.11a/n.....	7
Table 2-2:	Test Result Summary – FCC Part 15, Subpart E (Section 15.407)	8
Table 2-3:	Equipment Under Test.....	8
Table 2-4:	Support Equipment.....	8
Table 3-1:	Power Output Test Equipment.....	10
Table 3-2:	Power Output Test Data	10
Table 4-1:	Peak Power Spectral Density Measurement Test Equipment.....	11
Table 4-2:	Peak Power Spectral Density Test Data - 802.11a 54 Mbps.....	11
Table 4-3:	Power Spectral Density Test Data – 802.11n (65 Mbps).....	12
Table 4-4:	Power Spectral Density Test Data – 802.11n (40 MHz BW)	12
Table 5-1:	Frequency Stability Measurement Test Equipment.....	34
Table 5-2:	Frequency Stability/Temperature Variation; Channel 56 – 5280 MHz (36 Mbps).....	34
Table 5-3:	Frequency Stability/Voltage Variation; Channel 56 – 5280 MHz (36 Mbps).....	35
Table 6-1:	Band Edge Test Equipment.....	36
Table 7-1:	Undesirable Emissions Test Equipment.....	61
Table 8-1:	26 dB Bandwidth Test Equipment	72
Table 8-2:	26 dB Bandwidth Test Data – 802.11a (36 Mbps)	72
Table 8-3:	26 dB Bandwidth Test Data – 802.11n (39 Mbps)	72
Table 8-4:	26 dB Bandwidth Test Data – 802.11a (40 MHz BW, 36 Mbps)	72
Table 8-5:	26 dB Bandwidth Test Data – 802.11n (40 MHz BW, 39 Mbps)	73
Table 8-6:	6 dB Bandwidth Test Data – 802.11a (36 Mbps)	73
Table 8-7:	6 dB Bandwidth Test Data – 802.11n (39 Mbps)	73
Table 9-1:	Radiated Emissions Test Equipment.....	108
Table 9-2:	Radiated Emissions Harmonics/Spurious Channel 36 (TX Frequency: 5180 MHz)	109
Table 9-3:	Radiated Emissions Harmonics/Spurious Channel 40 (TX Frequency: 5200 MHz)	109
Table 9-4:	Radiated Emissions Harmonics/Spurious Channel 44 (TX Frequency: 5220 MHz)	109
Table 9-5:	Radiated Emissions Harmonics/Spurious Channel 48 (TX Frequency: 5240 MHz)	109
Table 9-6:	Radiated Emissions Harmonics/Spurious Channel 149 (TX Frequency: 5745 MHz)	110
Table 9-7:	Radiated Emissions Harmonics/Spurious Channel 157 (TX Frequency: 5785 MHz)	110
Table 9-8:	Radiated Emissions Harmonics/Spurious Channel 165 (TX Frequency: 5825 MHz)	110

Plot Index

Plot 4-1:	Peak Power Spectral Density: Channel 36 (5180 MHz) 802.11a 54 Mbps.....	13
Plot 4-2:	Peak Power Spectral Density: Channel 40 (5200 MHz) 802.11a 54 Mbps.....	14
Plot 4-3:	Peak Power Spectral Density: Channel 44 (5220 MHz) 802.11a 54 Mbps.....	15
Plot 4-4:	Peak Power Spectral Density: Channel 48 (5240 MHz) 802.11a 54 Mbps.....	16
Plot 4-5:	Power Spectral Density: Channel 149 (5745 MHz) 802.11a 54 Mbps.....	17
Plot 4-6:	Power Spectral Density: Channel 157 (5785 MHz) 802.11a 54 Mbps.....	18
Plot 4-7:	Power Spectral Density: Channel 165 (5825 MHz) 802.11a 54 Mbps.....	19
Plot 4-8:	Peak Power Spectral Density: Channel 36 (5180 MHz) 802.11n 65 Mbps.....	20
Plot 4-9:	Peak Power Spectral Density: Channel 40 (5200 MHz) 802.11n 65 Mbps.....	21
Plot 4-10:	Peak Power Spectral Density: Channel 44 (5220 MHz) 802.11n 65 Mbps.....	22
Plot 4-11:	Peak Power Spectral Density: Channel 48 (5240 MHz) 802.11n 65 Mbps.....	23
Plot 4-12:	Power Spectral Density: Channel 149 (5745 MHz) 802.11n 65 Mbps.....	24
Plot 4-13:	Power Spectral Density: Channel 157 (5785 MHz) 802.11n 65 Mbps.....	25
Plot 4-14:	Power Spectral Density: Channel 165 (5825 MHz) 802.11n 65 Mbps.....	26
Plot 4-15:	Peak Power Spectral Density: Channel 36 (5180 MHz, lower) 802.11n 40 MHz.....	27
Plot 4-16:	Peak Power Spectral Density: Channel 40 (5200 MHz, lower) 802.11n 40 MHz.....	28
Plot 4-17:	Peak Power Spectral Density: Channel 44 (5220 MHz, lower) 802.11n 40 MHz.....	29
Plot 4-18:	Peak Power Spectral Density: Channel 48 (5240 MHz, upper) 802.11n 40 MHz.....	30
Plot 4-19:	Power Spectral Density: Channel 149 (5745 MHz, lower) 802.11n 40 MHz.....	31
Plot 4-20:	Power Spectral Density: Channel 157 (5785 MHz, lower) 802.11n 40 MHz.....	32
Plot 4-21:	Power Spectral Density: Channel 165 (5825 MHz, upper) 802.11n 40 MHz.....	33
Plot 6-1:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11a, Peak).....	37
Plot 6-2:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11a, Average).....	38
Plot 6-3:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11n, Peak).....	39
Plot 6-4:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11n, Average).....	40
Plot 6-5:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11a, Peak)....	41
Plot 6-6:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11a, Average)42	42
Plot 6-7:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11n, Peak)....	43
Plot 6-8:	Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11n, Average)44	44
Plot 6-9:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11a, Peak).....	45
Plot 6-10:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11a, Average).....	46
Plot 6-11:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11n, Peak).....	47
Plot 6-12:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11n, Average).....	48
Plot 6-13:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11a, Peak) ..	49
Plot 6-14:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11a, Average) .	50
Plot 6-15:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11n, Peak) ..	51
Plot 6-16:	Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11n, Average) .	52
Plot 6-17:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11a, Peak).....	53
Plot 6-18:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11a, Average).....	54
Plot 6-19:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11n, Peak).....	55
Plot 6-20:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11n, Average).....	56
Plot 6-21:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11a, Peak) ..	57
Plot 6-22:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11a, Average) .	58
Plot 6-23:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11n, Peak) ..	59
Plot 6-24:	Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11n, Average) .	60
Plot 7-1:	Undesirable Emissions Channel 36 (5180 MHz); 9 kHz – 150 kHz.....	62

Plot 7-2:	Undesirable Emissions Channel 36 (5180 MHz); 150 kHz – 30 MHz	63
Plot 7-3:	Undesirable Emissions Channel 36 (5180 MHz);	64
Plot 7-4:	Undesirable Emissions Channel 40 (5200 MHz)	65
Plot 7-5:	Undesirable Emissions Channel 44 (5220 MHz)	66
Plot 7-6:	Undesirable Emissions Channel 48 (5240 MHz)	67
Plot 7-7:	Undesirable Emissions Channel 149 (5745 MHz)	68
Plot 7-8:	Undesirable Emissions Channel 157(5785 MHz)	69
Plot 7-9:	Undesirable Emissions Channel 165 (5825 MHz)	70
Plot 8-1:	26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11a	74
Plot 8-2:	26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11a	75
Plot 8-3:	26 dB Bandwidth Channel 44(TX Frequency 5220 MHz) - 802.11a	76
Plot 8-4:	26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11a	77
Plot 8-5:	26 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11a	78
Plot 8-6:	26 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11a	79
Plot 8-7:	26 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11a	80
Plot 8-8:	26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11n	81
Plot 8-9:	26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11n	82
Plot 8-10:	26 dB Bandwidth Channel 44 (TX Frequency 5220 MHz) - 802.11n	83
Plot 8-11:	26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11n	84
Plot 8-12:	26 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11n	85
Plot 8-13:	26 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11n	86
Plot 8-14:	26 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11n	87
Plot 8-15:	26 dB Bandwidth (Frequency 5190 MHz) - 802.11a (40 MHz BW, 36 Mbps)	88
Plot 8-16:	26 dB Bandwidth (Frequency 5210 MHz) - 802.11a (40 MHz BW, 36 Mbps)	89
Plot 8-17:	26 dB Bandwidth (Frequency 5230 MHz) - 802.11a (40 MHz BW, 36 Mbps)	90
Plot 8-18:	26 dB Bandwidth (Frequency 5755 MHz) - 802.11a (40 MHz BW, 36 Mbps)	91
Plot 8-19:	26 dB Bandwidth (Frequency 5795 MHz) - 802.11a (40 MHz BW, 36 Mbps)	92
Plot 8-20:	26 dB Bandwidth (Frequency 5815 MHz) - 802.11a (40 MHz BW, 36 Mbps)	93
Plot 8-21:	26 dB Bandwidth (Frequency 5190 MHz) - 802.11n (40 MHz BW)	94
Plot 8-22:	26 dB Bandwidth (Frequency 5210 MHz) - 802.11n (40 MHz BW)	95
Plot 8-23:	26 dB Bandwidth (Frequency 5230 MHz) - 802.11n (40 MHz BW)	96
Plot 8-24:	26 dB Bandwidth (Frequency 5250 MHz) - 802.11n (40 MHz BW)	97
Plot 8-25:	26 dB Bandwidth (Frequency 5755 MHz) - 802.11n (40 MHz BW)	98
Plot 8-26:	26 dB Bandwidth (Frequency 5795 MHz) - 802.11n (40 MHz BW)	99
Plot 8-27:	26 dB Bandwidth (Frequency 5815 MHz) - 802.11n (40 MHz BW)	100
Plot 8-28:	6 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11a	101
Plot 8-29:	6 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11a	102
Plot 8-30:	6 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11a	103
Plot 8-31:	6 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11n	104
Plot 8-32:	6 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11n	105
Plot 8-33:	6 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11n	106

Appendix Index

Appendix A: Test Configuration Photographs	112
--	-----

Photograph Index

Photograph 1: Radiated Emissions Testing – Front View	112
Photograph 2: Radiated Emissions Testing – Back View	113

1 General Information

1.1 Scope

Applicable Standards:

- FCC Rules Part 15E: Unlicensed National Information Infrastructure Devices
- Industry Canada RSS-247 Issue 2: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.2 Description of EUT

The EUT is a slave/client device with no ad-hoc capabilities.

Equipment Under Test	XL-185P C1D2
Power Supply	7.4 VDC LI-ion Battery
Modulation Type	DSSS
Transfer Rate	1, 2, 5.5, 6, 6.5, 9, 11,12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 81, 108, 121.5, 135
Frequency Range	5180 – 5250 MHz; 5745 - 5825 MHz
Antenna Connector Type	N/A
Antenna Type	Internal chip (-1 to 1 dBi gain)

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

1.4 Related Submittal(s)/Grant(s)

This report supports a certification application for Harris Corporation Model XL-185P C1D2, FCC ID: OWDTR-0149-E, IC: 3636B-0149.

1.5 Modifications

No modifications were required for compliance.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested - 802.11a/n

Channel	Frequency (MHz)
36	5180
40	5200
44	5220
48	5240
149	5745
157	5785
165	5825

2.2 Exercising the EUT

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart E (Section 15.407)

Test	FCC Reference	IC Reference	Result
Maximum Conducted Output Power	FCC 15.407(a/1/2/3)	RSS-247 6.2 RSS-Gen 6.12	Pass
Peak Power Spectral Density Measurement	FCC 15.407(a/1/2/3)	RSS-247 6.2	Pass
Frequency Stability Measurement	FCC 15.407(g)	RSS-Gen 6.11	Pass
Compliance With the Band Edge	FCC 15.407(7), 15.205	RSS-247 6.2	Pass
Antenna Conducted Spurious Emissions	FCC 15.407(6)	RSS-247 6.2	Pass
26 dB and 6dB Bandwidth	FCC 15.407(a) and (e)	RSS-247 6.2	Pass
Radiated Emissions	FCC 15.209	RSS-247 6.2 RSS-Gen 6.13/7.1	Pass
Conducted AC Emissions	FCC 15.207	RSS-Gen 8.8	N/A

2.4 Test System Details

The test sample was received on December 16, 2014. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Portable Transceiver	Harris Corporation	XL-185P C1D2	1Y1D-E00067	OWDTR-0149-E	N/A	21269
Portable Transceiver with connector	Harris Corporation	XL-185P C1D2	0WXD-E00239	OWDTR-0149-E	N/A	21269

Table 2-4: Support Equipment

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Battery Eliminator	Harris Corporation	14035-4300-01	N/A	N/A	1m unshielded	21553
Breakout Box	Harris Corporation	12082-7980-01	N/A	N/A	2m USB, 1m serial radio interface	20599

2.5 Configuration of Tested System

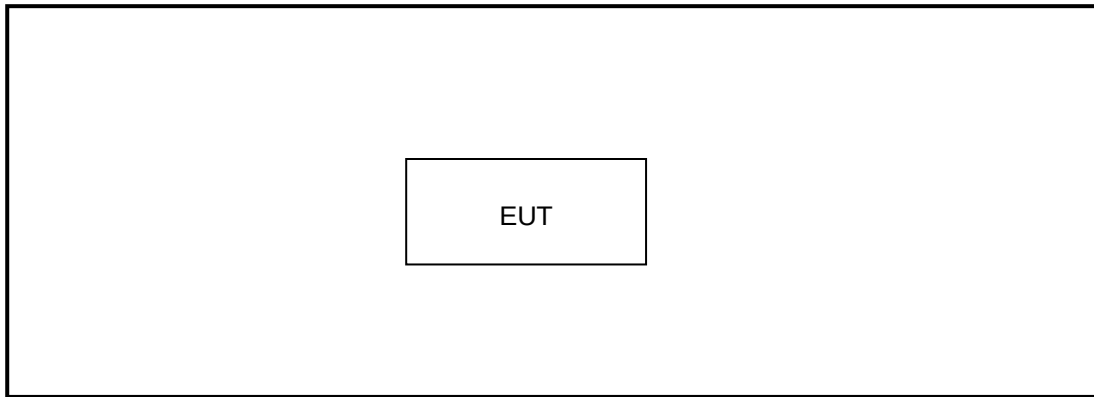


Figure 2-1: Configuration of System Under Test

3 Transmit Power Measurement – FCC 15.407(a/1/2/3); RSS-247 6.2

3.1 Power Output Test Procedure

Method SA-1 789033 D02 General UNII Test Procedures v01

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15

3.2 Power Output Test Data

Table 3-2: Power Output Test Data

Channel	Frequency (MHz)	Maximum Conducted Output Power (dBm)
36	5180	11.8
40	5200	11.2
44	5220	11.2
48	5240	11.1
149	5745	9.1
157	5785	9.2
165	5825	9.2

3.3 Limits of Maximum Transmit Power Measurement

Frequency Band	Limit
5.15-5.25 GHz	250 mW (24 dBm)
5.25-5.35 GHz	The lesser of 250 mW (24 dBm) or 11 dBm+10logB
5.725-5.825 GHz	1 W (30 dBm)

Test Personnel:

Daniel W. Baltzell		June 2, 2015
Test Engineer	Signature	Date of Test

4 Peak Power Spectral Density Measurement – FCC 15.407(a) 1-5; RSS-247 6.2

4.1 Limits of Peak Power Spectral Density

Frequency Band	Limit
5.15-5.725 GHz (1 MHz BW)	11 dBm
5.725-5.85 GHz (500 kHz BW)	30 dBm

4.2 Peak Power Spectral Density Measurement Test Procedure

FCC 789033 D02 II.F. Maximum Power Spectral Density (PSD)

The transmitter output was connected to a spectrum analyzer; for 5150-5725 MHz the RBW was set to 1 MHz and the VBW was set to 5 MHz, and for 5725-5850 MHz the RBW was set to 500 kHz. Method SA-1: RMS detector, 100 traces in power averaging, video trigger set to trigger on full power pulses, and auto sweep time were used. The highest level PPSD was measured across the emission.

Table 4-1: Peak Power Spectral Density Measurement Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15

4.3 Peak Power Spectral Density Test Data

Table 4-2: Peak Power Spectral Density Test Data - 802.11a 54 Mbps

Channel	Frequency (MHz)	RF Power Level in 1 MHz BW (dBm)	Maximum Limit (dBm)	Pass/Fail
36	5180	3.7	11	Pass
40	5200	3.8	11	Pass
44	5220	4.1	11	Pass
48	5240	3.7	11	Pass
Channel	Frequency (MHz)	RF Power Level in 500 kHz (dBm)	Maximum Limit (dBm)	Pass/Fail
149	5745	-1.2	30	Pass
157	5785	-1.4	30	Pass
165	5825	-1.6	30	Pass


Table 4-3: Power Spectral Density Test Data – 802.11n (65 Mbps)

Channel	Frequency (MHz)	RF Power Level in 1MHz BW (dBm)	Maximum Limit (dBm)	Pass/Fail
36	5180	0.1	11	Pass
40	5200	1.5	11	Pass
44	5220	1.7	11	Pass
48	5240	1.3	11	Pass
Channel	Frequency (MHz)	RF Power Level in 500 kHz (dBm)	Maximum Limit (dBm)	Pass/Fail
149	5745	-1.5	30	Pass
157	5785	-2.4	30	Pass
165	5825	-2.3	30	Pass


Table 4-4: Power Spectral Density Test Data – 802.11n (40 MHz BW)

Channel	Frequency (MHz)	RF Power Level in 1 MHz BW (dBm)	Maximum Limit (dBm)	Pass/Fail
36	5180	1.5	11	Pass
40	5200	1.2	11	Pass
44	5220	1.4	11	Pass
48	5240	1.0	11	Pass
Channel	Frequency (MHz)	RF Power Level in 500 kHz (dBm)	Maximum Limit (dBm)	Pass/Fail
149	5745	-2.6	30	Pass
157	5785	-2.1	30	Pass
165	5825	-2.5	30	Pass


Plot 4-1: Peak Power Spectral Density: Channel 36 (5180 MHz) 802.11a 54 Mbps

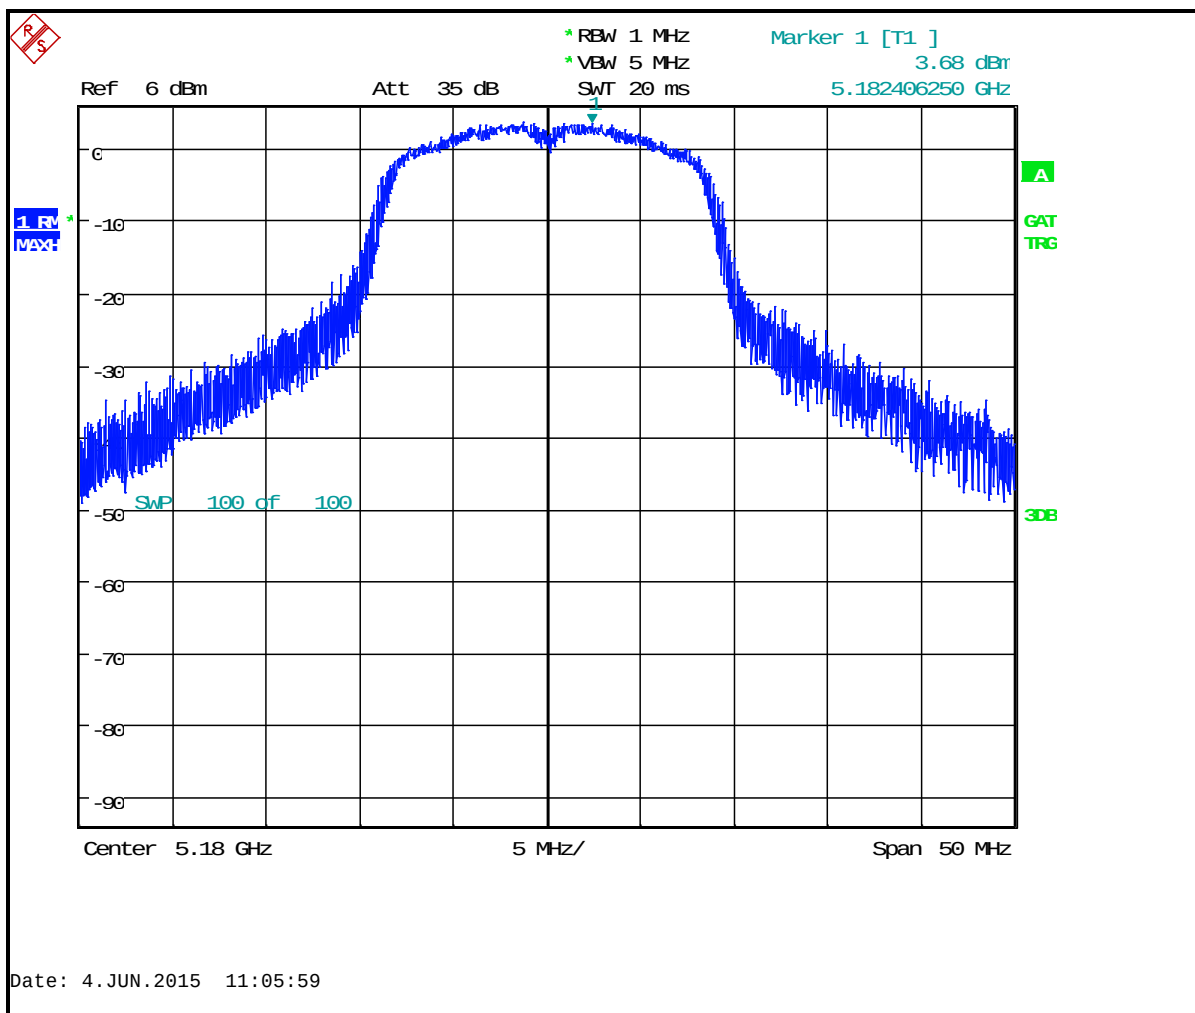


Plot 4-2: Peak Power Spectral Density: Channel 40 (5200 MHz) 802.11a 54 Mbps

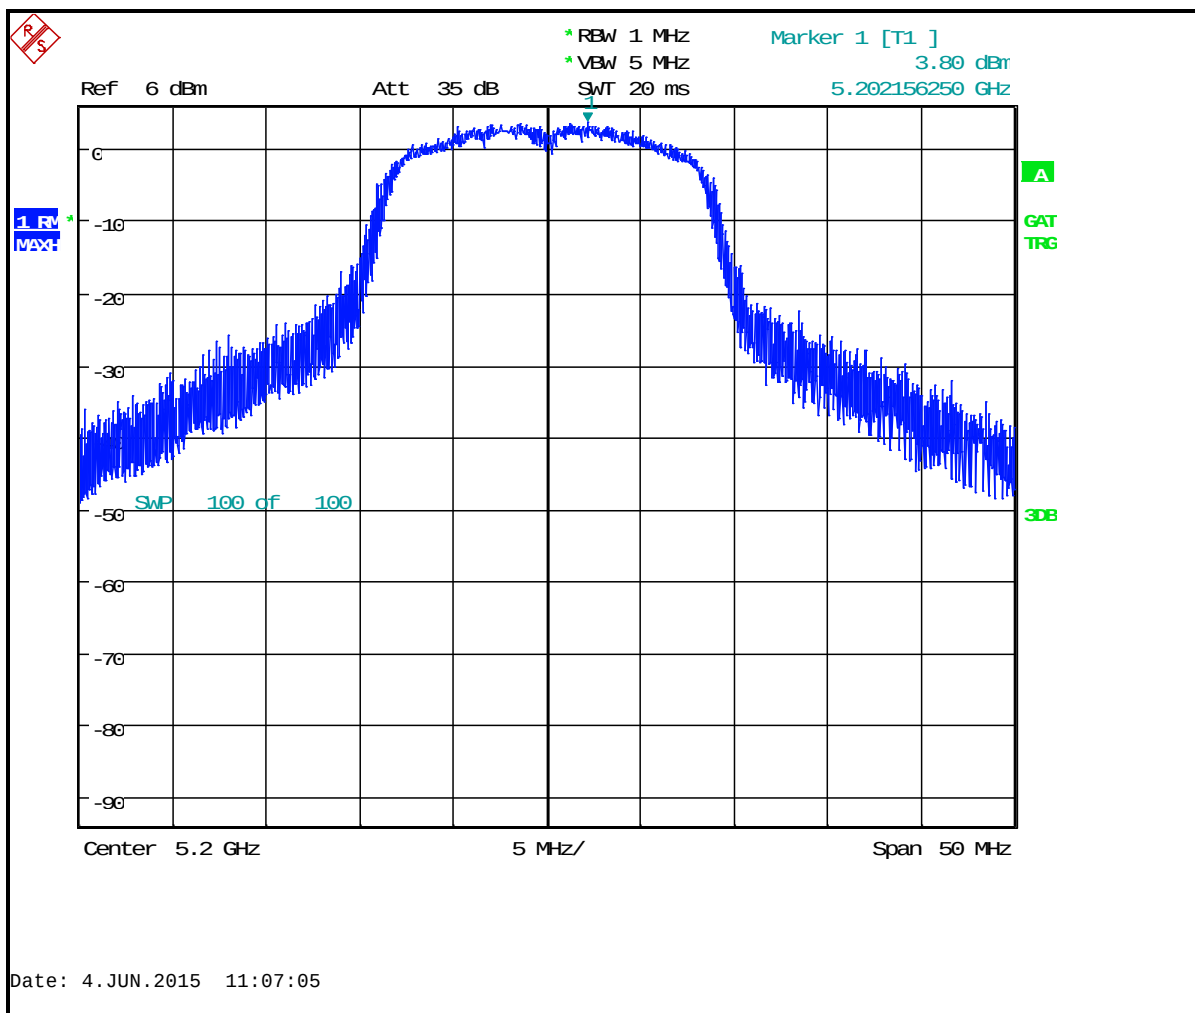


Plot 4-3: Peak Power Spectral Density: Channel 44 (5220 MHz) 802.11a 54 Mbps

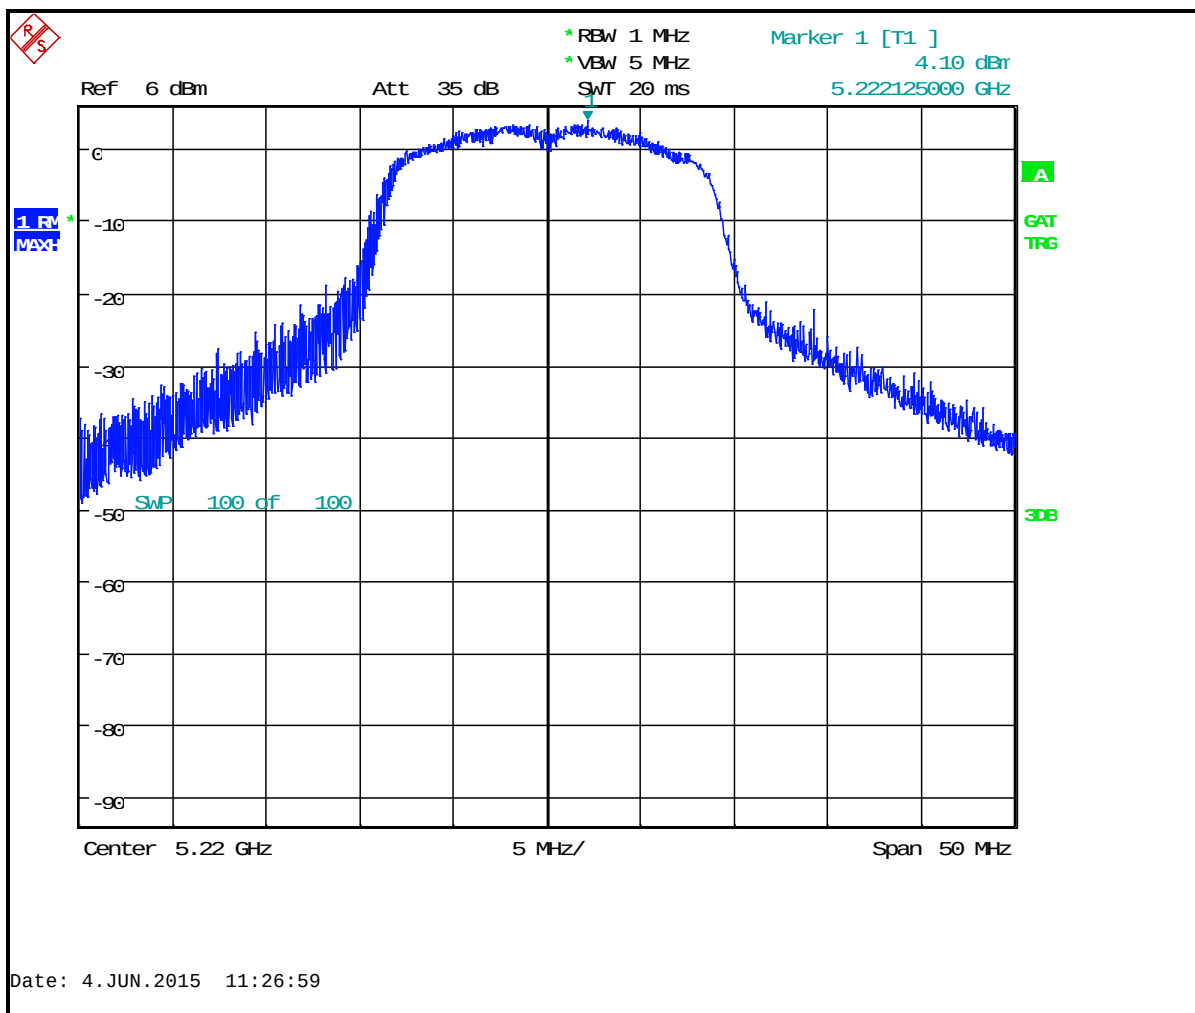


Plot 4-4: Peak Power Spectral Density: Channel 48 (5240 MHz) 802.11a 54 Mbps

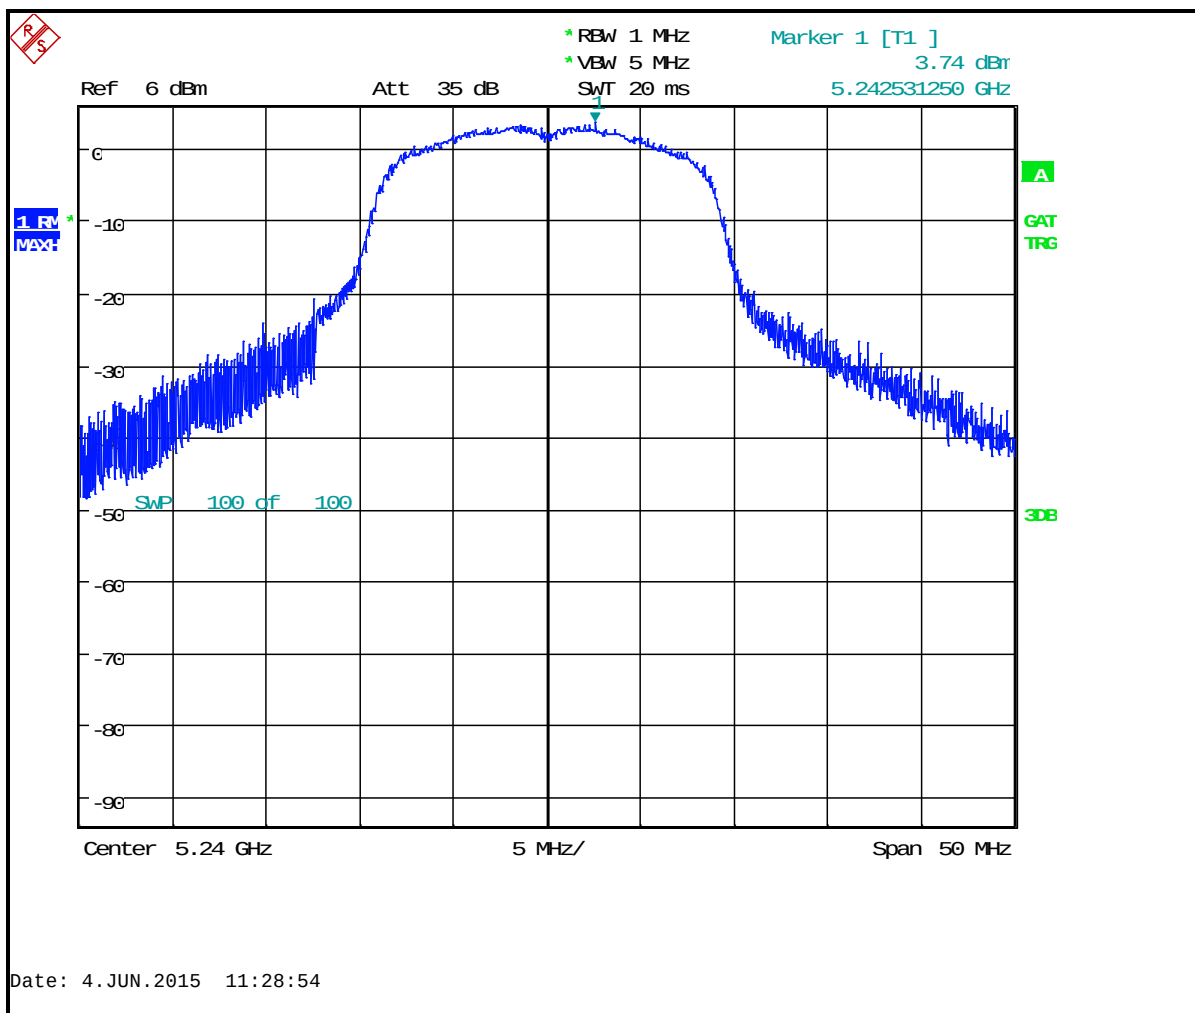


Plot 4-5: Power Spectral Density: Channel 149 (5745 MHz) 802.11a 54 Mbps

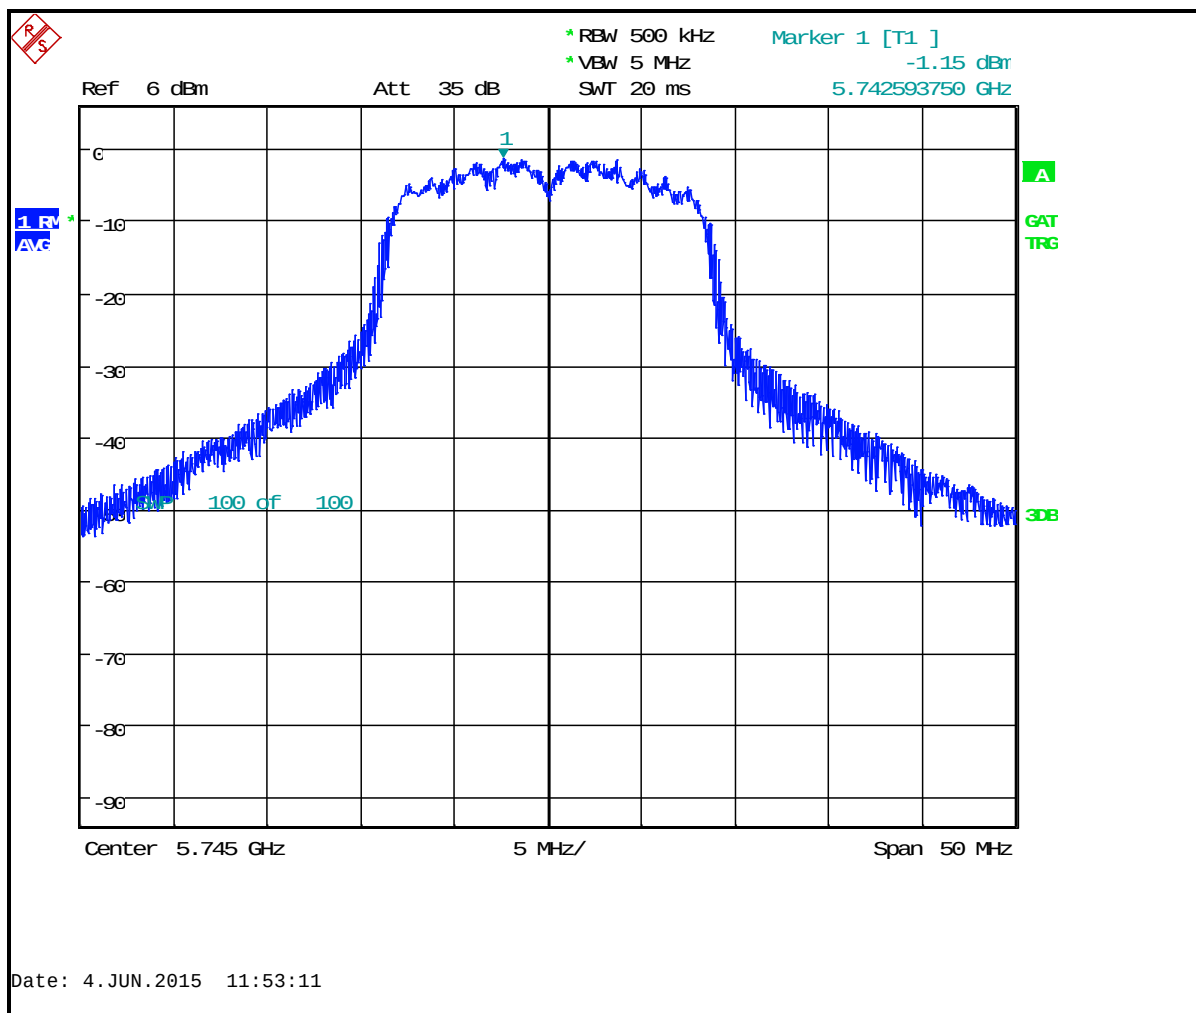


Plot 4-6: Power Spectral Density: Channel 157 (5785 MHz) 802.11a 54 Mbps

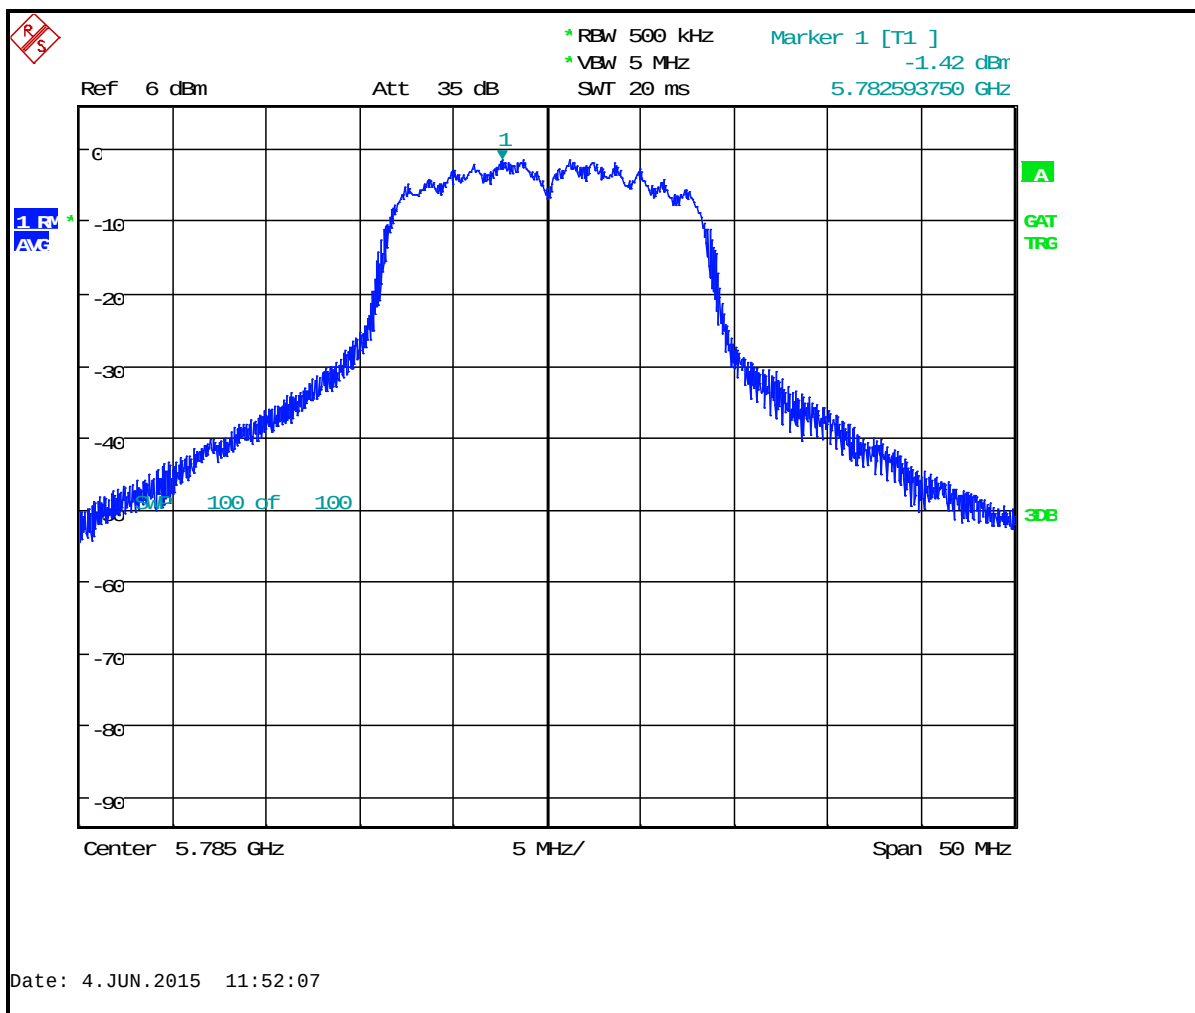


Plot 4-7: Power Spectral Density: Channel 165 (5825 MHz) 802.11a 54 Mbps

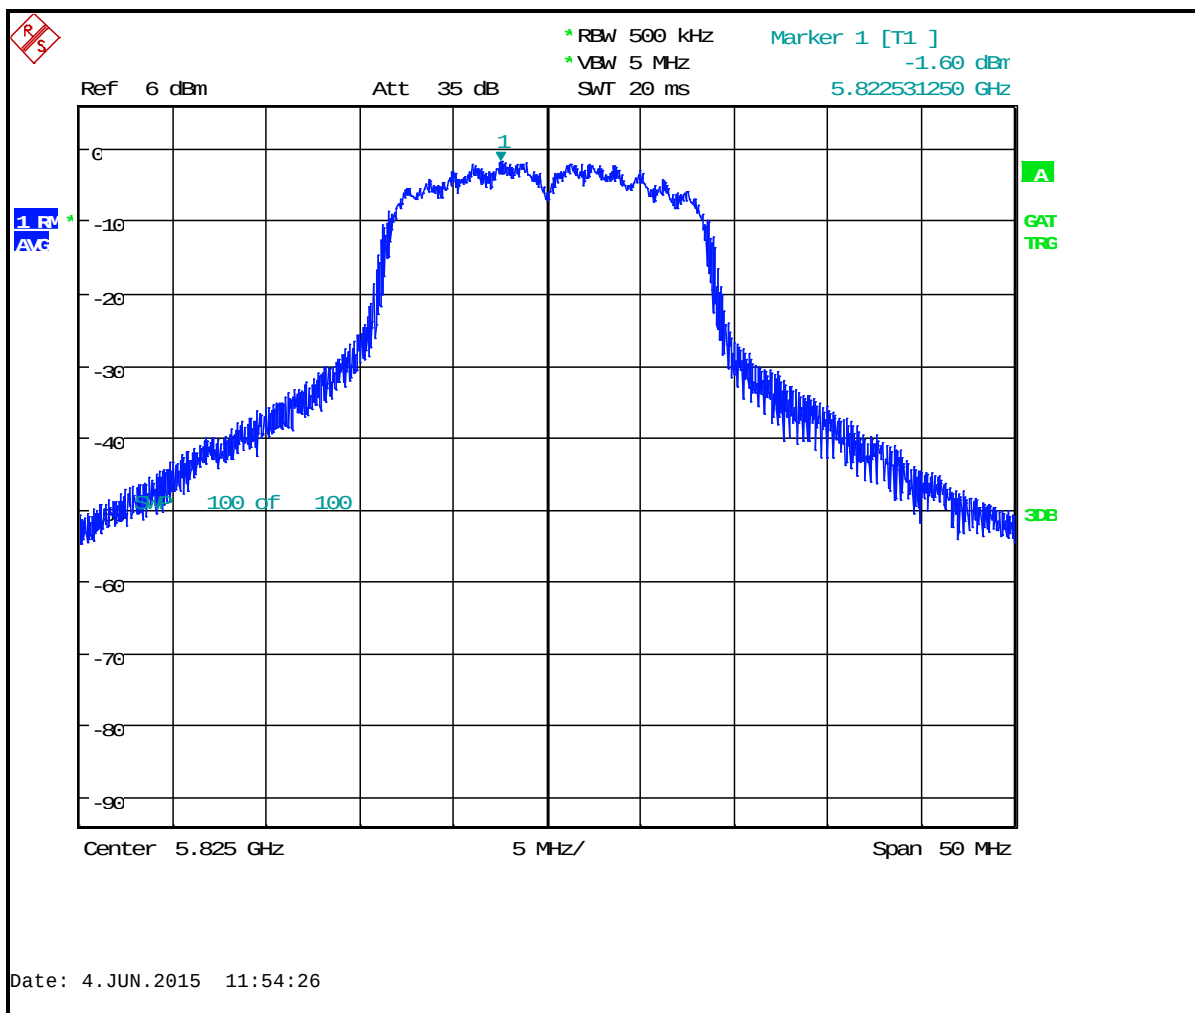


Plot 4-8: Peak Power Spectral Density: Channel 36 (5180 MHz) 802.11n 65 Mbps

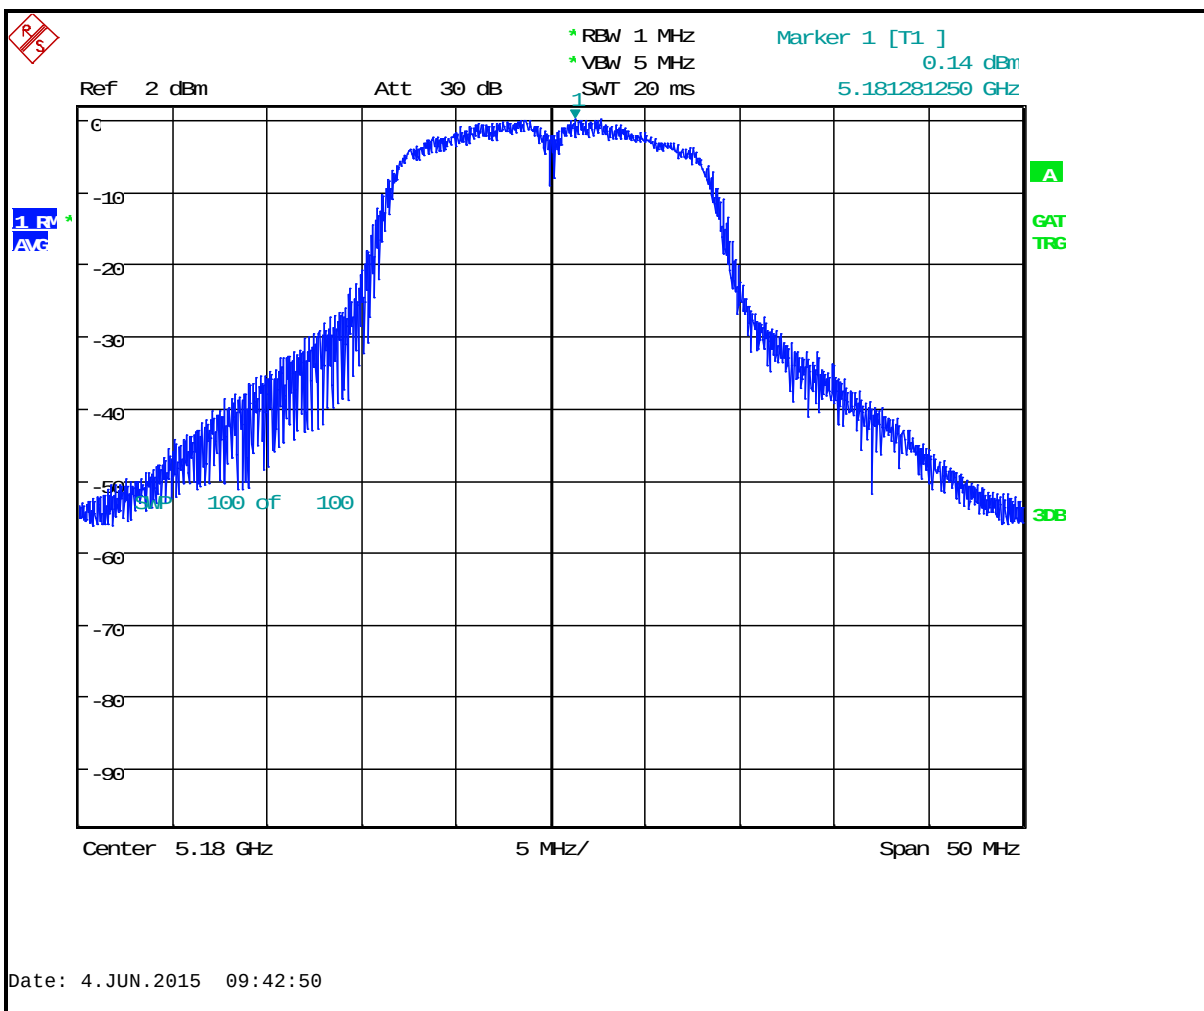


Plot 4-9: Peak Power Spectral Density: Channel 40 (5200 MHz) 802.11n 65 Mbps

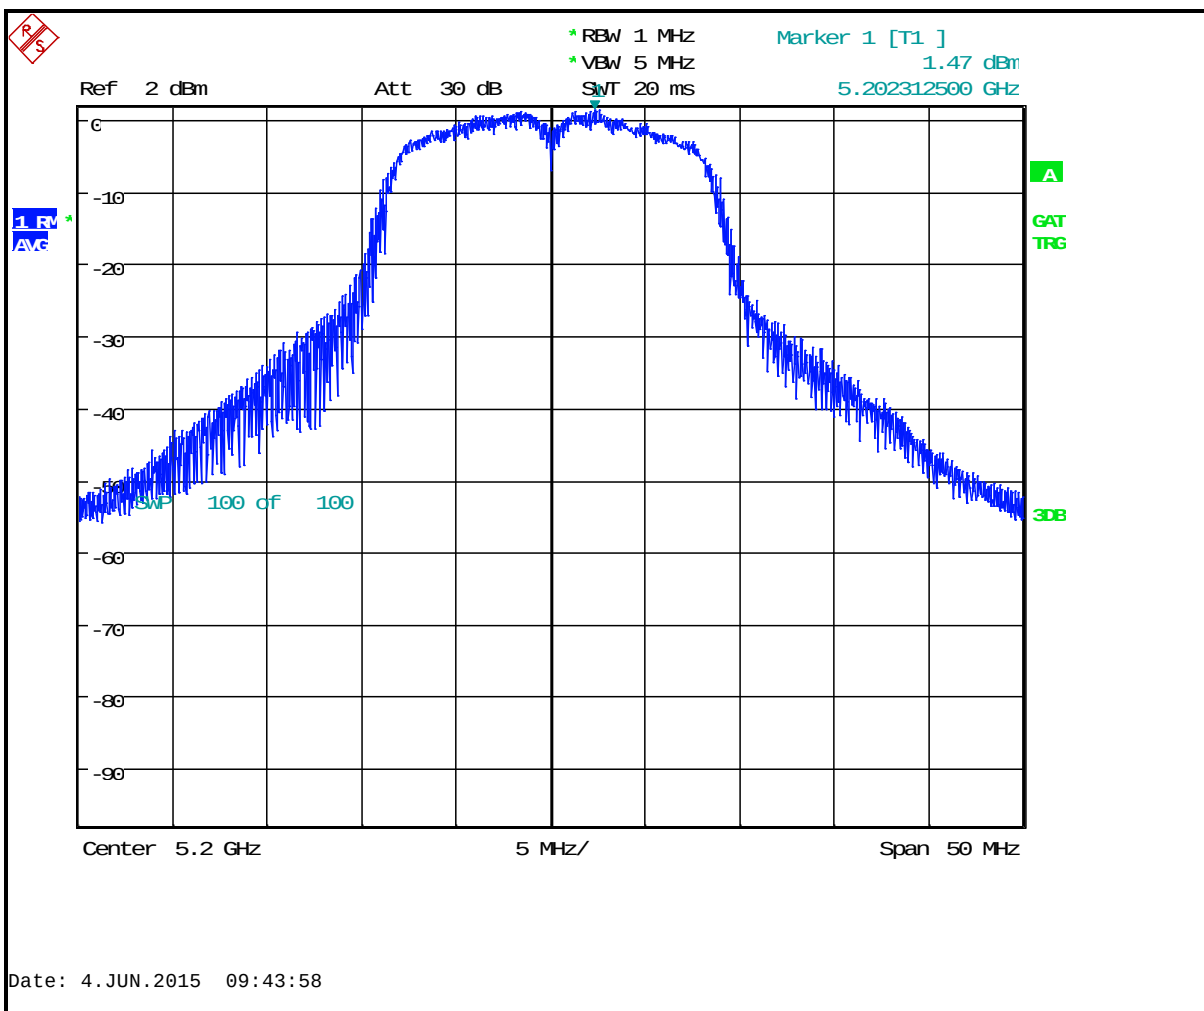


Plot 4-10: Peak Power Spectral Density: Channel 44 (5220 MHz) 802.11n 65 Mbps

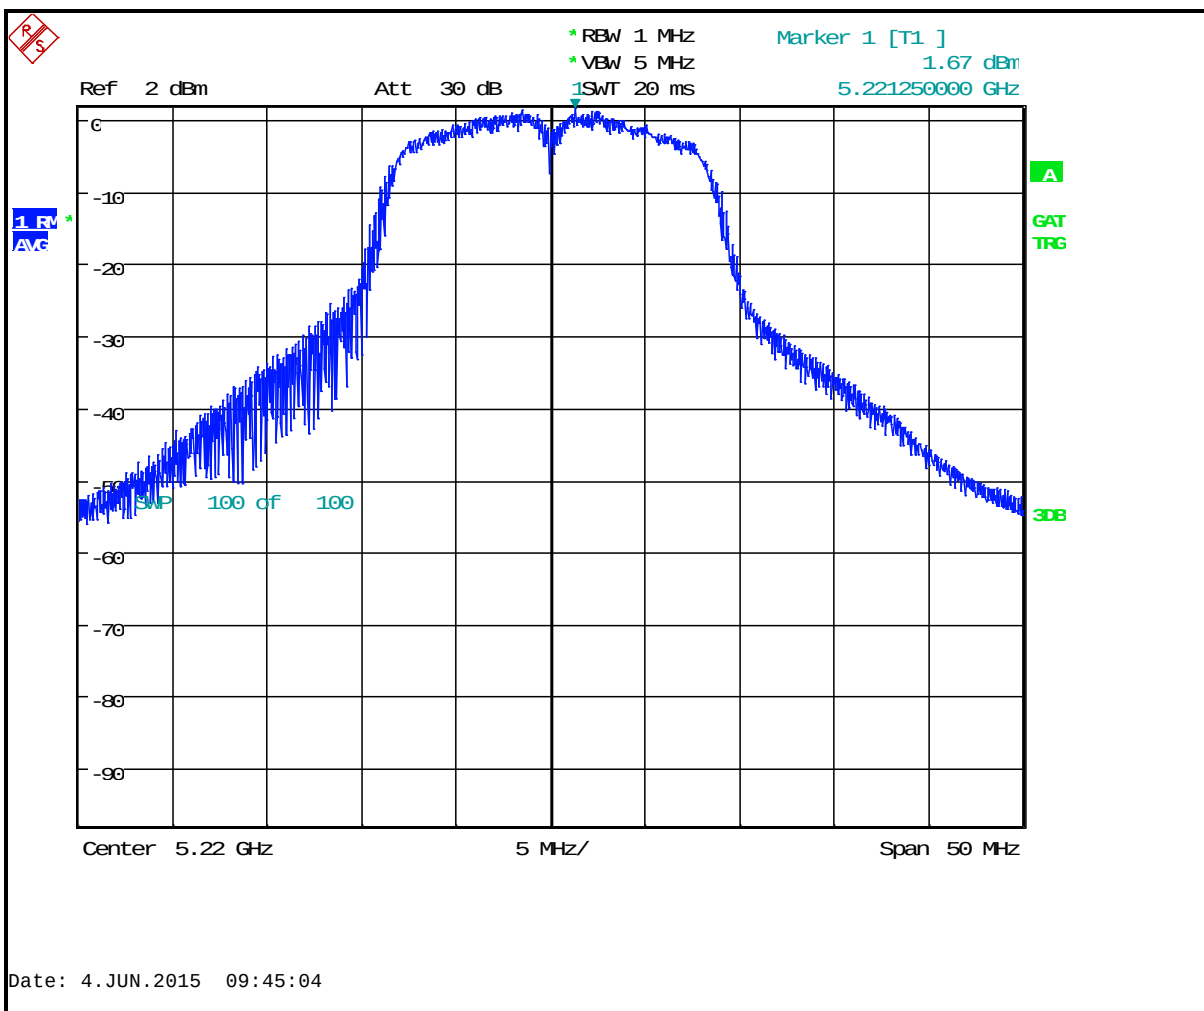


Plot 4-11: Peak Power Spectral Density: Channel 48 (5240 MHz) 802.11n 65 Mbps

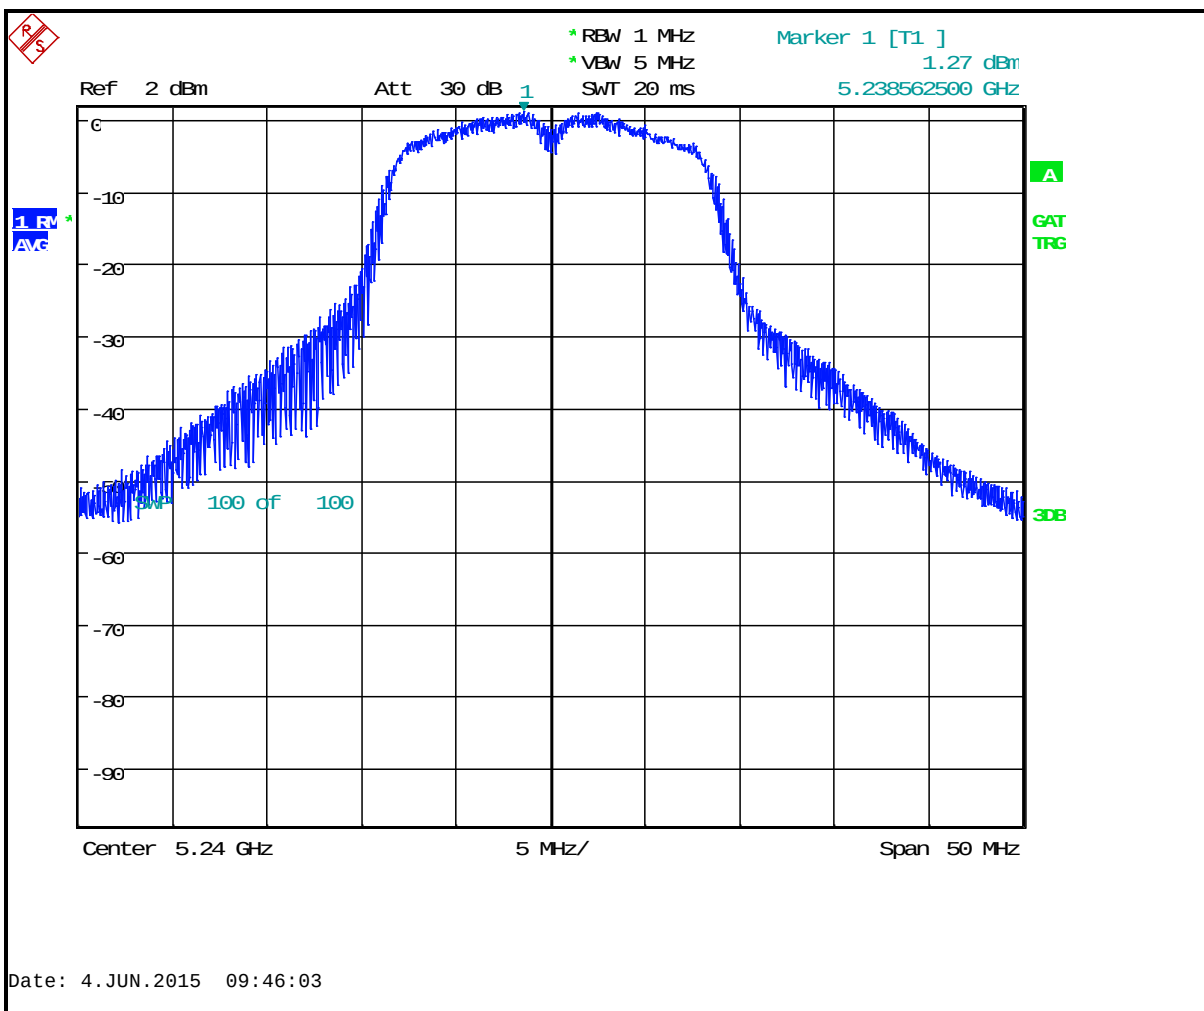


Plot 4-12: Power Spectral Density: Channel 149 (5745 MHz) 802.11n 65 Mbps

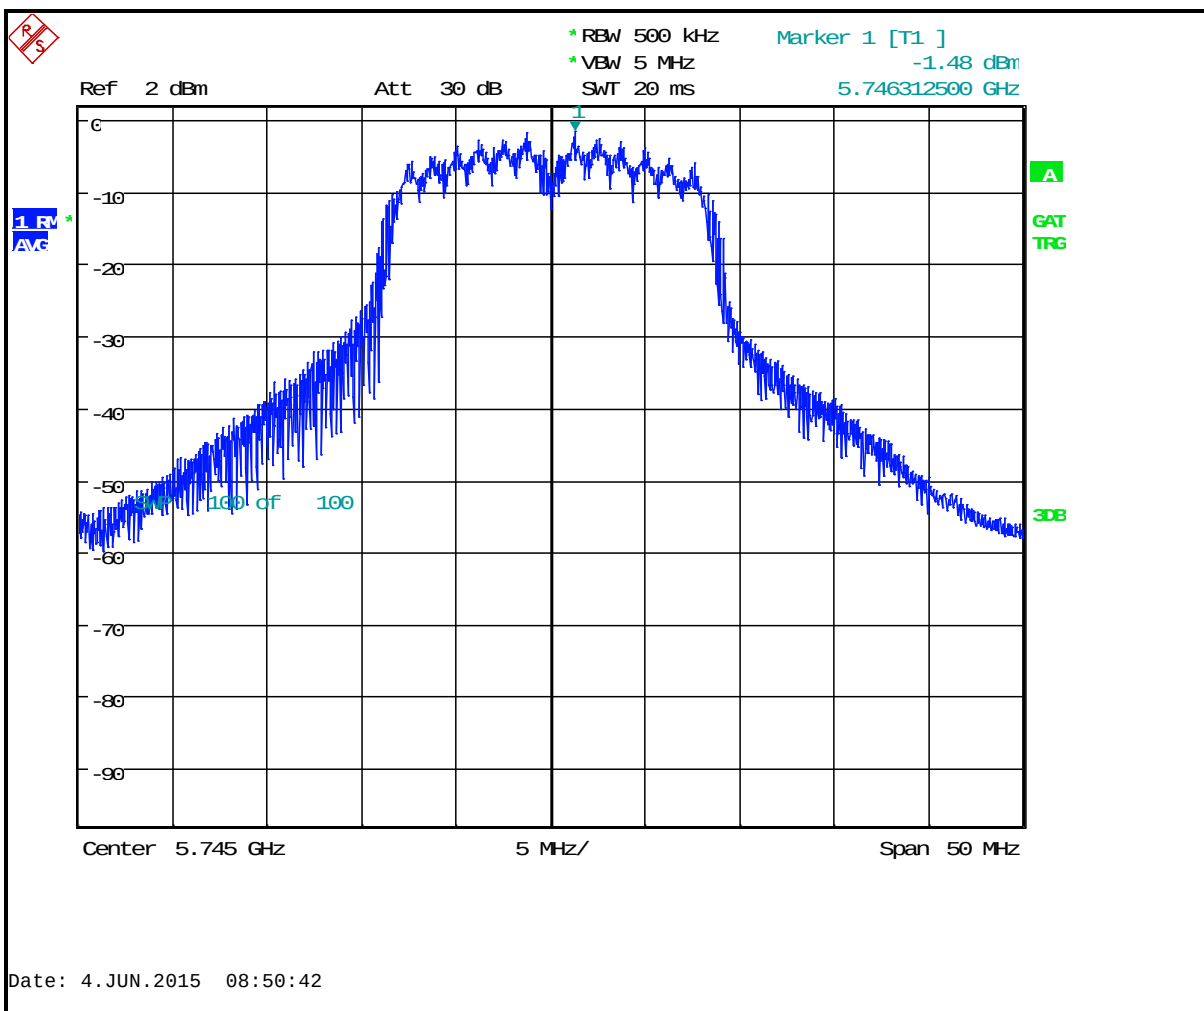


Plot 4-13: Power Spectral Density: Channel 157 (5785 MHz) 802.11n 65 Mbps

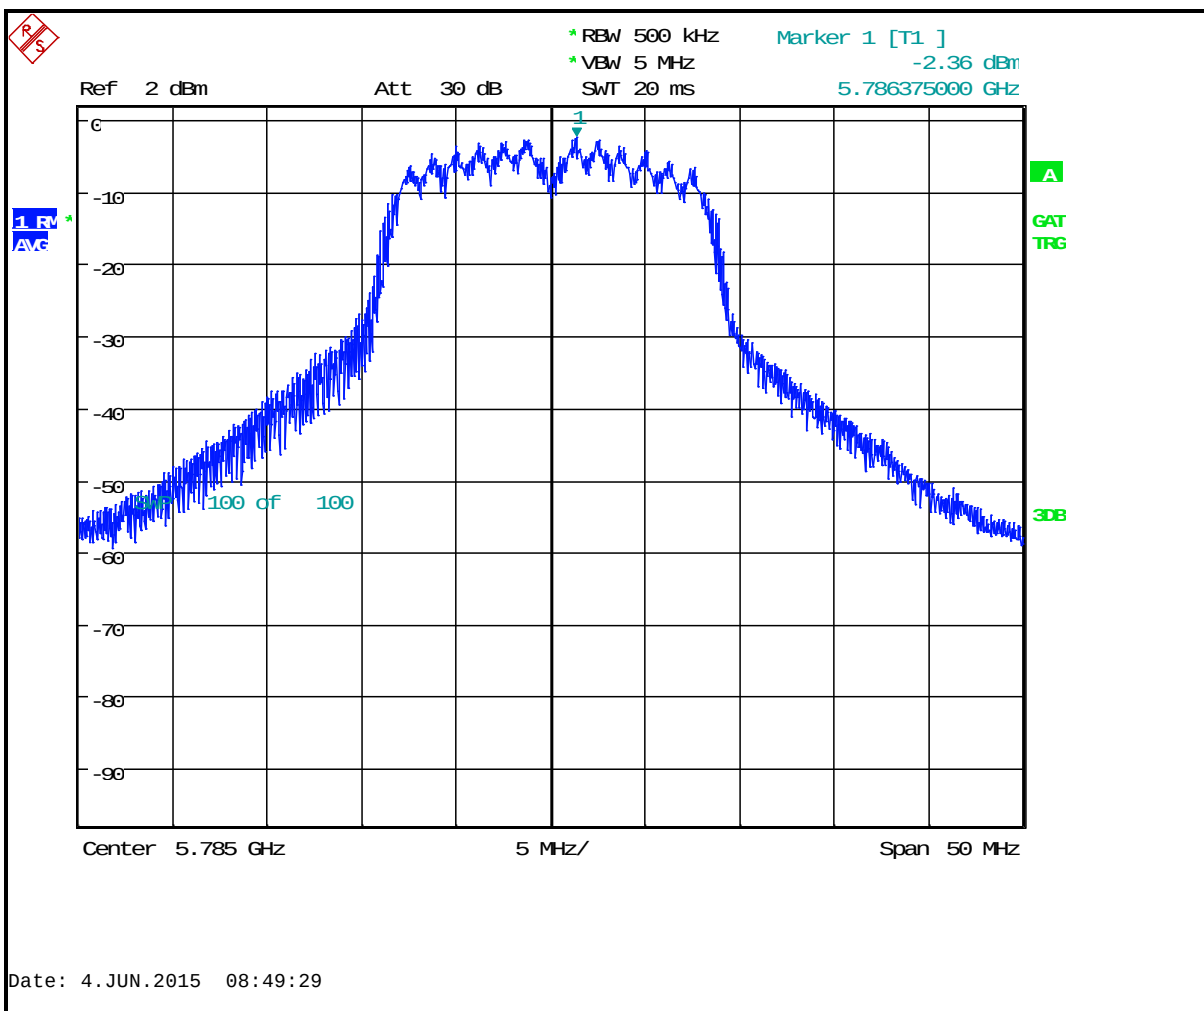


Plot 4-14: Power Spectral Density: Channel 165 (5825 MHz) 802.11n 65 Mbps

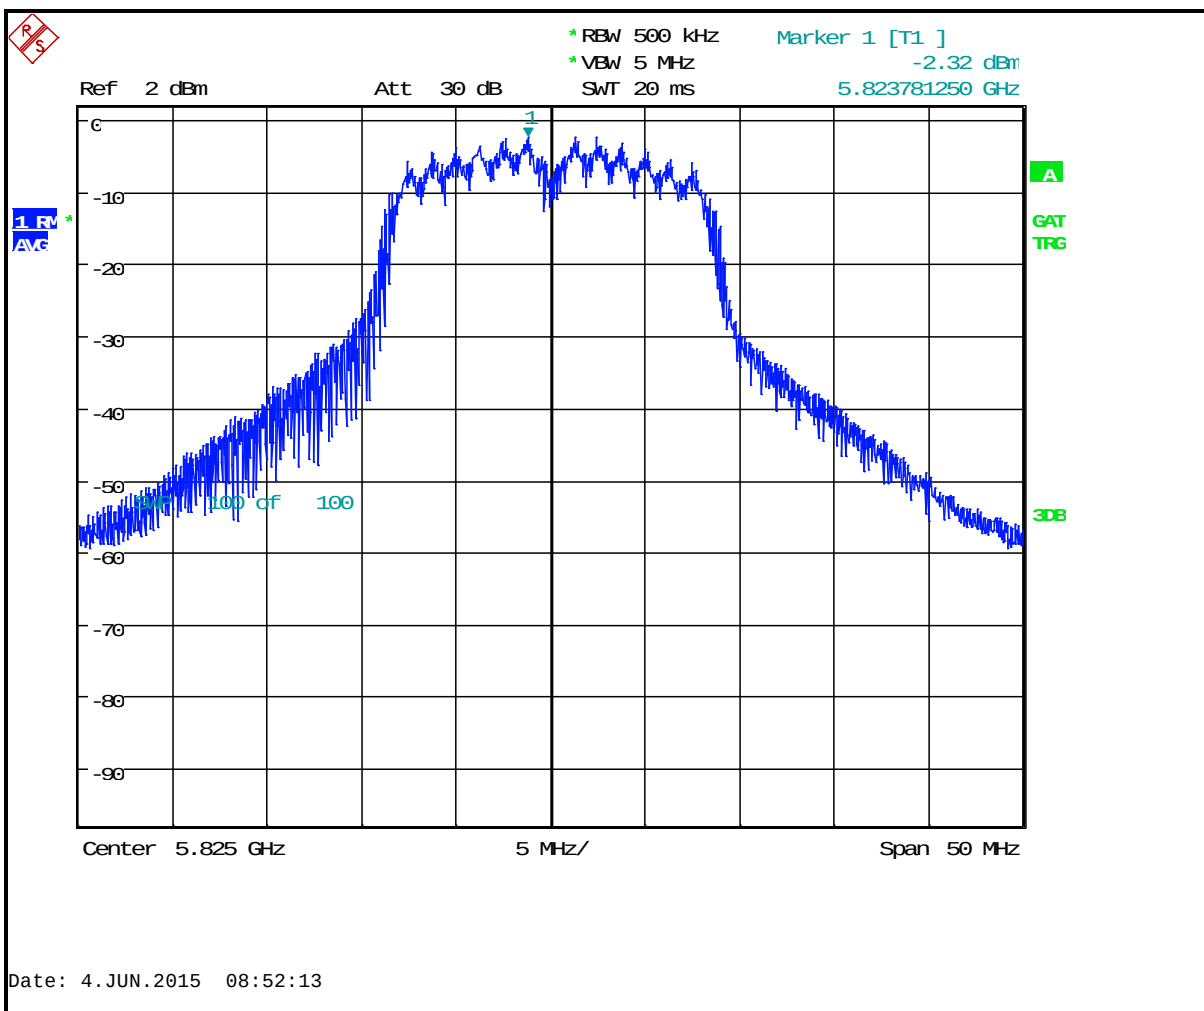


Plot 4-15: Peak Power Spectral Density: Channel 36 (5180 MHz, lower) 802.11n 40 MHz

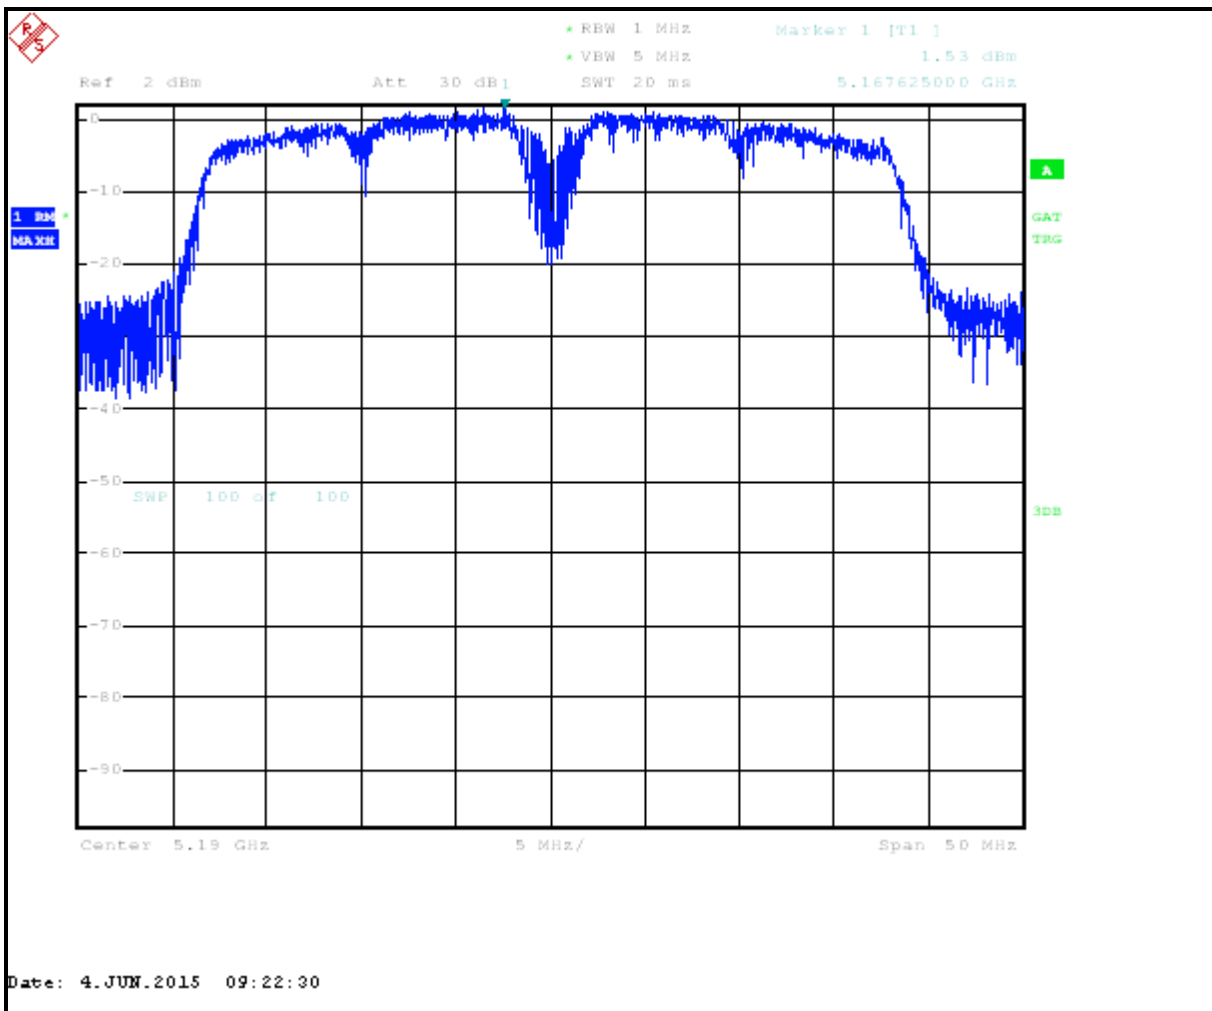


Plot 4-16: Peak Power Spectral Density: Channel 40 (5200 MHz, lower) 802.11n 40 MHz

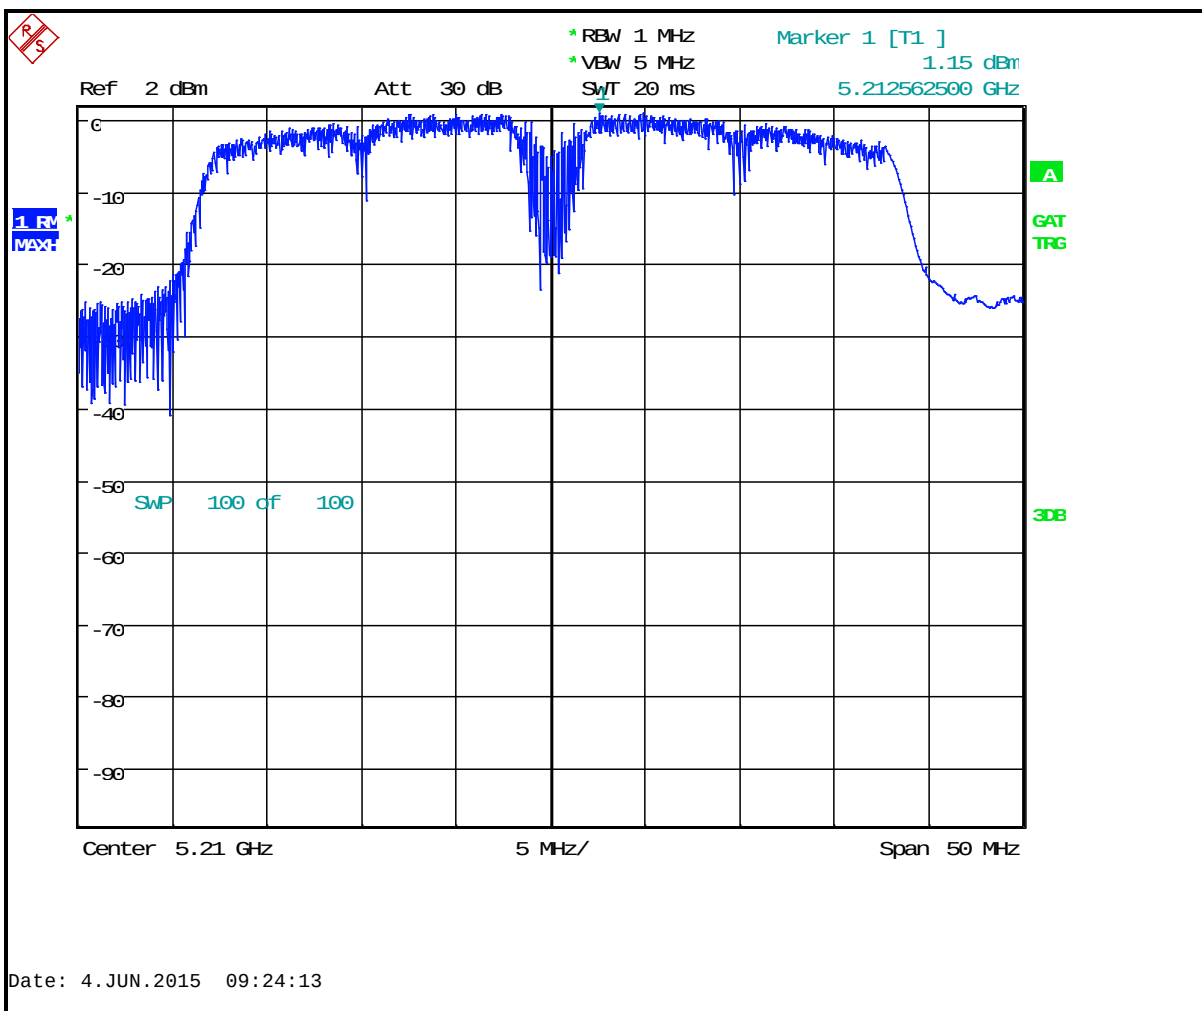


Plot 4-17: Peak Power Spectral Density: Channel 44 (5220 MHz, lower) 802.11n 40 MHz

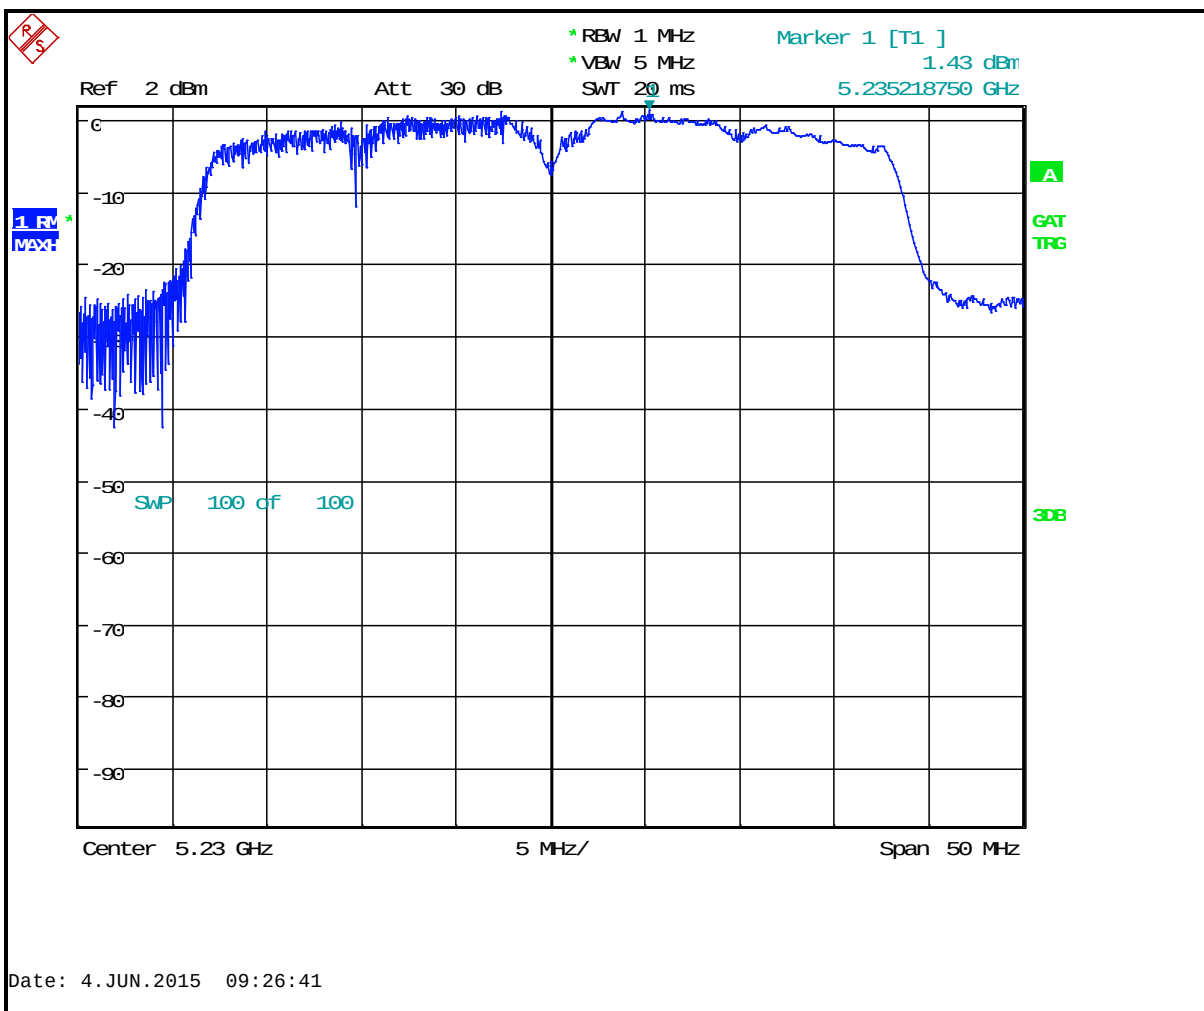


Plot 4-18: Peak Power Spectral Density: Channel 48 (5240 MHz, upper) 802.11n 40 MHz

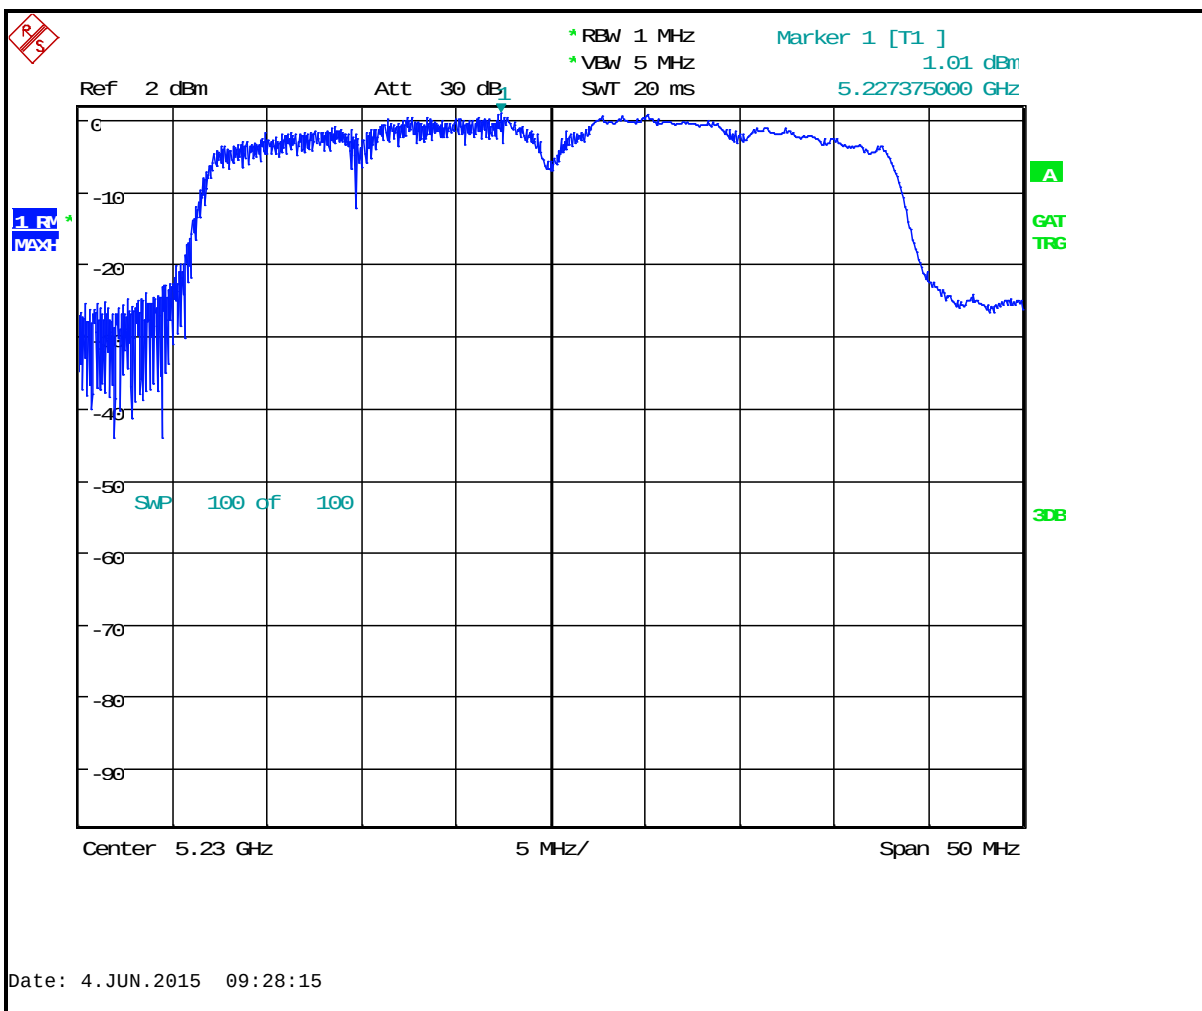


Plot 4-19: Power Spectral Density: Channel 149 (5745 MHz, lower) 802.11n 40 MHz

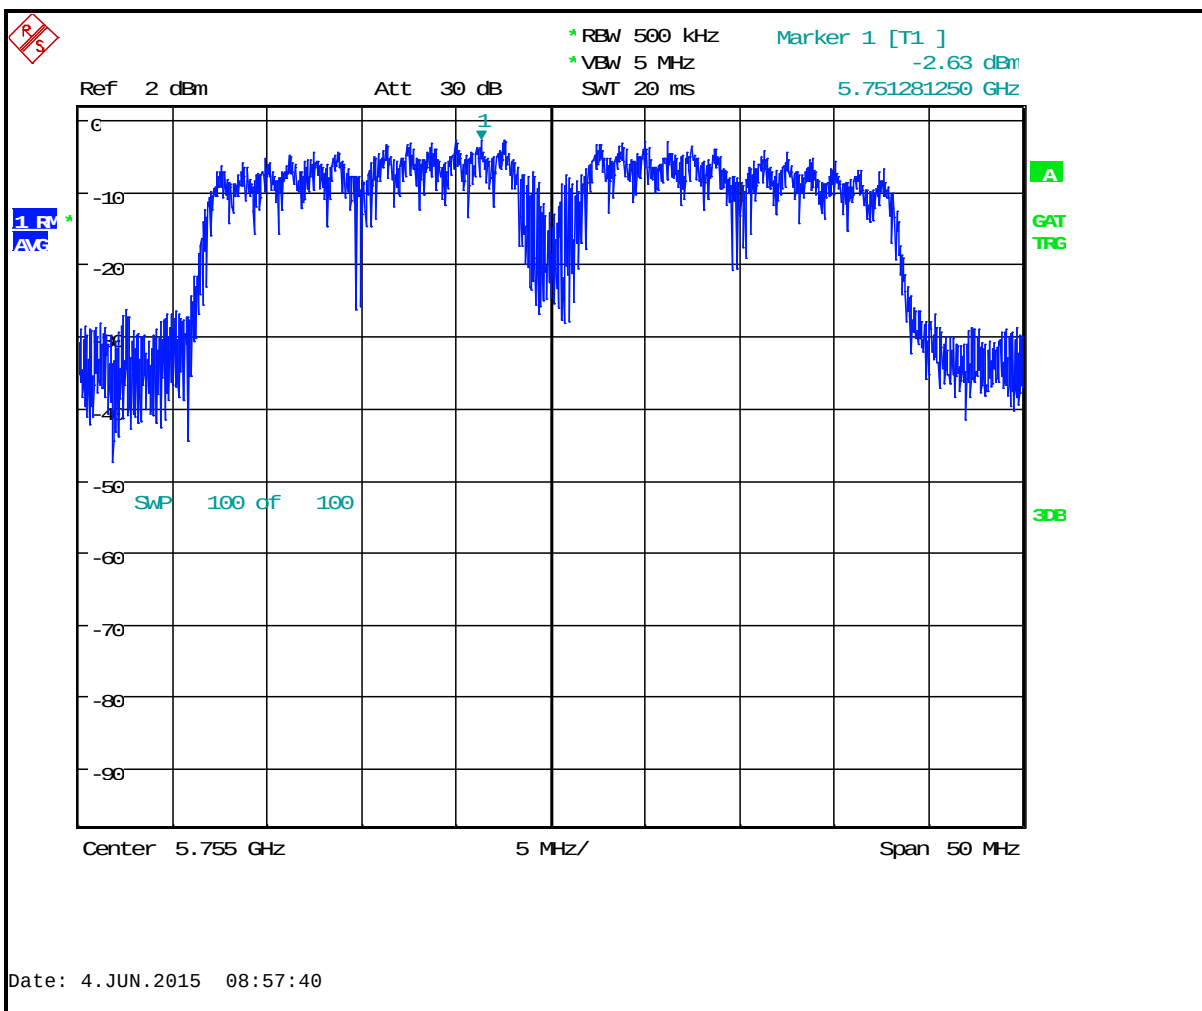


Plot 4-20: Power Spectral Density: Channel 157 (5785 MHz, lower) 802.11n 40 MHz

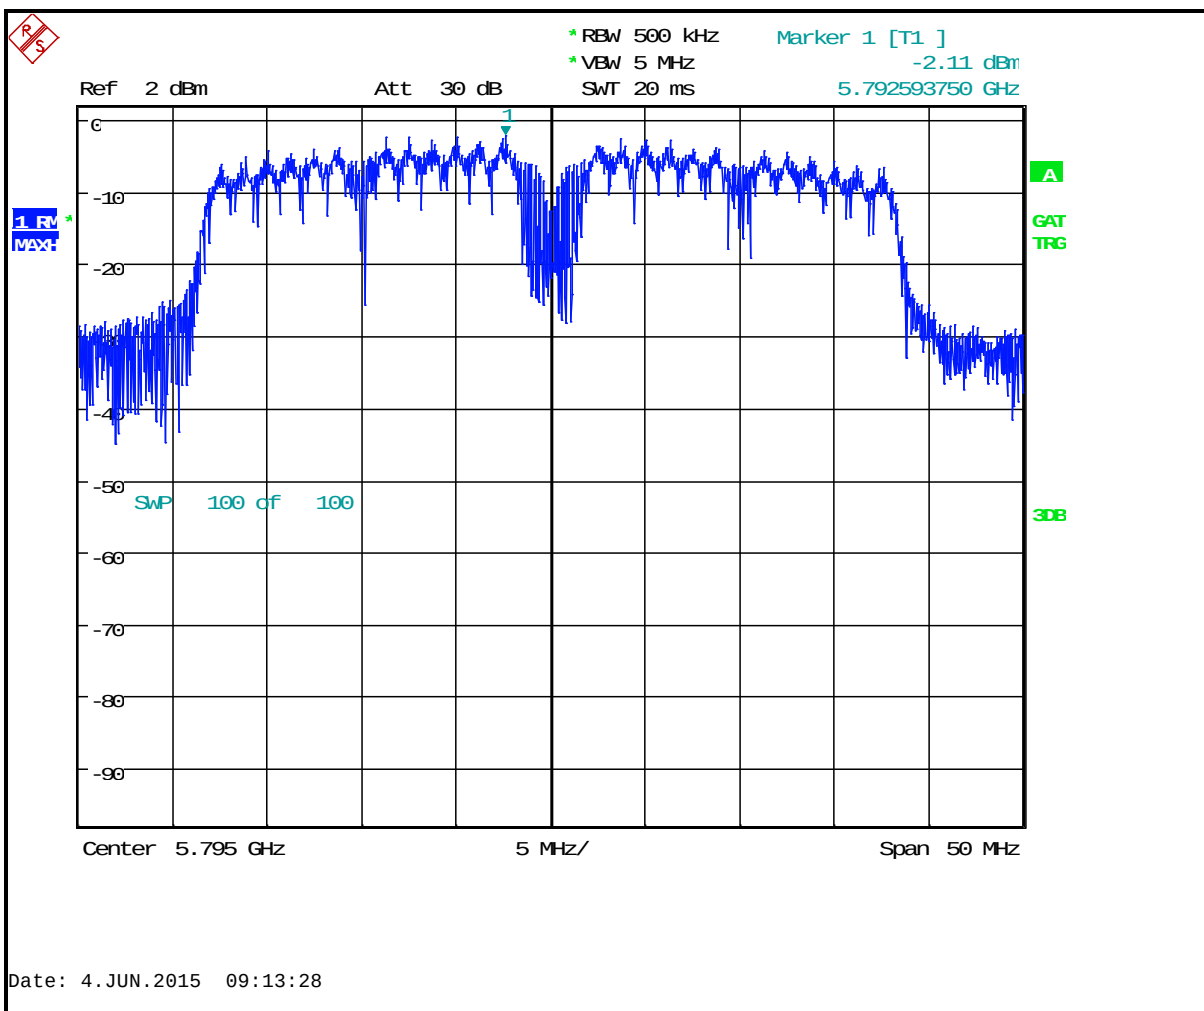

Plot 4-21: Power Spectral Density: Channel 165 (5825 MHz, upper) 802.11n 40 MHz

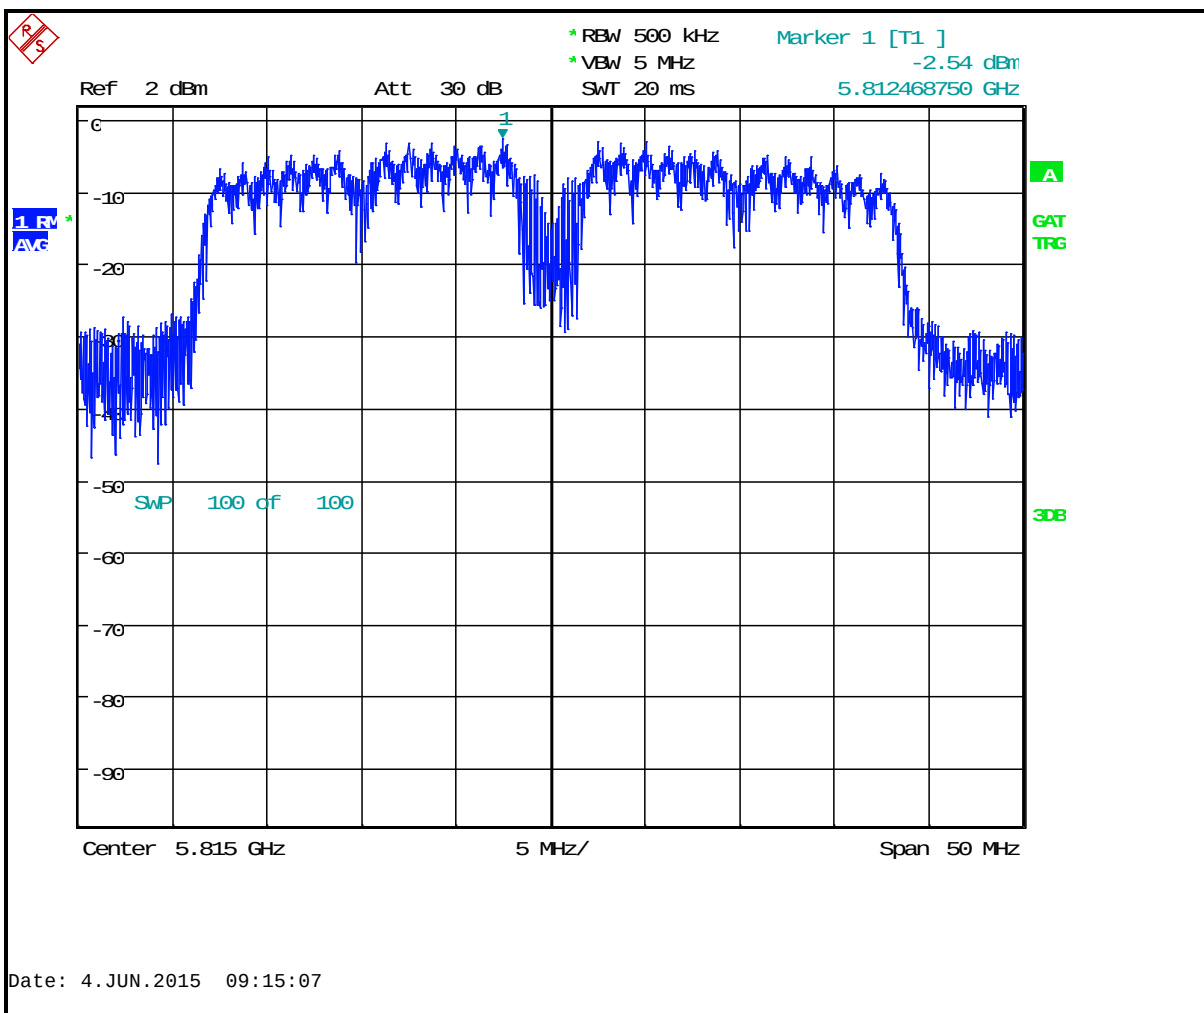

Test Personnel:

Daniel W. Baltzell		June 4, 2013
Test Engineer	Signature	Date of Test

5 Frequency Stability Measurement – FCC 15.407(g)

5.1 Limits of Frequency Stability

The frequency tolerance shall be maintained within +/-0.02% of the operating frequency over a temperature variation of -30°C to 50°C at normal supply voltage, and for a variation in the primary supply voltage from 85%-115% of the rated supply voltage at a temperature of 20°C.

$$5280 \text{ MHz} \times 0.02\% = 1.056 \text{ MHz} = 200 \text{ ppm}$$

5.2 Frequency Stability Measurement Test Procedure

The EUT was placed inside the temperature chamber and supplied by nominal 7.4 VDC. The EUT was connected to an analyzer which was located outside of the chamber. The temperature was set to the lowest level and the EUT was allowed to stabilize with power off for a period of 1 hour. The EUT was then powered up and the frequency was measured. This was continued in 10 degree steps until the highest temperature level of 50°C was measured. The chamber was allowed to stabilize between measurements for approximately 30 minutes. At 20°C, the EUT supply voltage was adjusted to 85% and 115% of nominal voltage and the frequency was recorded.

Table 5-1: Frequency Stability Measurement Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
901350	Meterman	33XR	Multimeter	040402802	4/14/17
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	9/3/15
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	3/28/16
1724	Hewlett Packard	6024A	DC Power Supply	1912A00331	N/A

5.3 Frequency Stability Test Data

Table 5-2: Frequency Stability/Temperature Variation; Channel 56 – 5280 MHz (36 Mbps)

Temperature (°C)	Measured Frequency (MHz)	ppm
-30	5280.001747	0.33
-20	5280.001939	0.37
-10	5280.002083	0.39
0	5280.001507	0.29
10	5280.000914	0.17
20	5280.000000	0.00
30	5280.001939	0.37
40	5280.000521	0.10
50	5280.000521	0.10


Table 5-3: Frequency Stability/Voltage Variation; Channel 56 – 5280 MHz (36 Mbps)

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.29	5279.999760	-0.05
7.4	5280.000000	0.00
8.51	5279.999616	-0.07

Highest deviation noted: 0.39 ppm

Pass limit of 200 ppm.

Test Personnel:

Daniel W. Baltzell		June 10, 2015
Test Engineer	Signature	Date of Test

6 Compliance with the Band Edge – FCC 15.407(b); RSS-247 6.2

6.1 Limits of Band Edge Measurement

For transmitters operating in the 5.15 - 5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band:

The limits of FCC 15.407 have changed from the 10-01-15 version originally tested, from “All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz..”

To the 2016 version, section (a)(4) which states the difference “For transmitters operating in the 5.725–5.85 GHz band:”, in section (i): “All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.”

This 2016 version of the limit is less stringent than the -27 dBm/MHz or -17 dBm/MHz which is shown in the following plots, and which may be considered worst case.

6.2 Band Edge Test Procedure

789033 D02 General UNII Test Procedures New Rules v01 II.G.3.d)(ii)

Integration Method


Table 6-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	4/9/18
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	9/3/15


6.3 Band Edge Test Results

6.3.1 5150 – 5350 MHz Band Edges – 802.11a and 802.11n


Plot 6-1: Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11a, Peak)

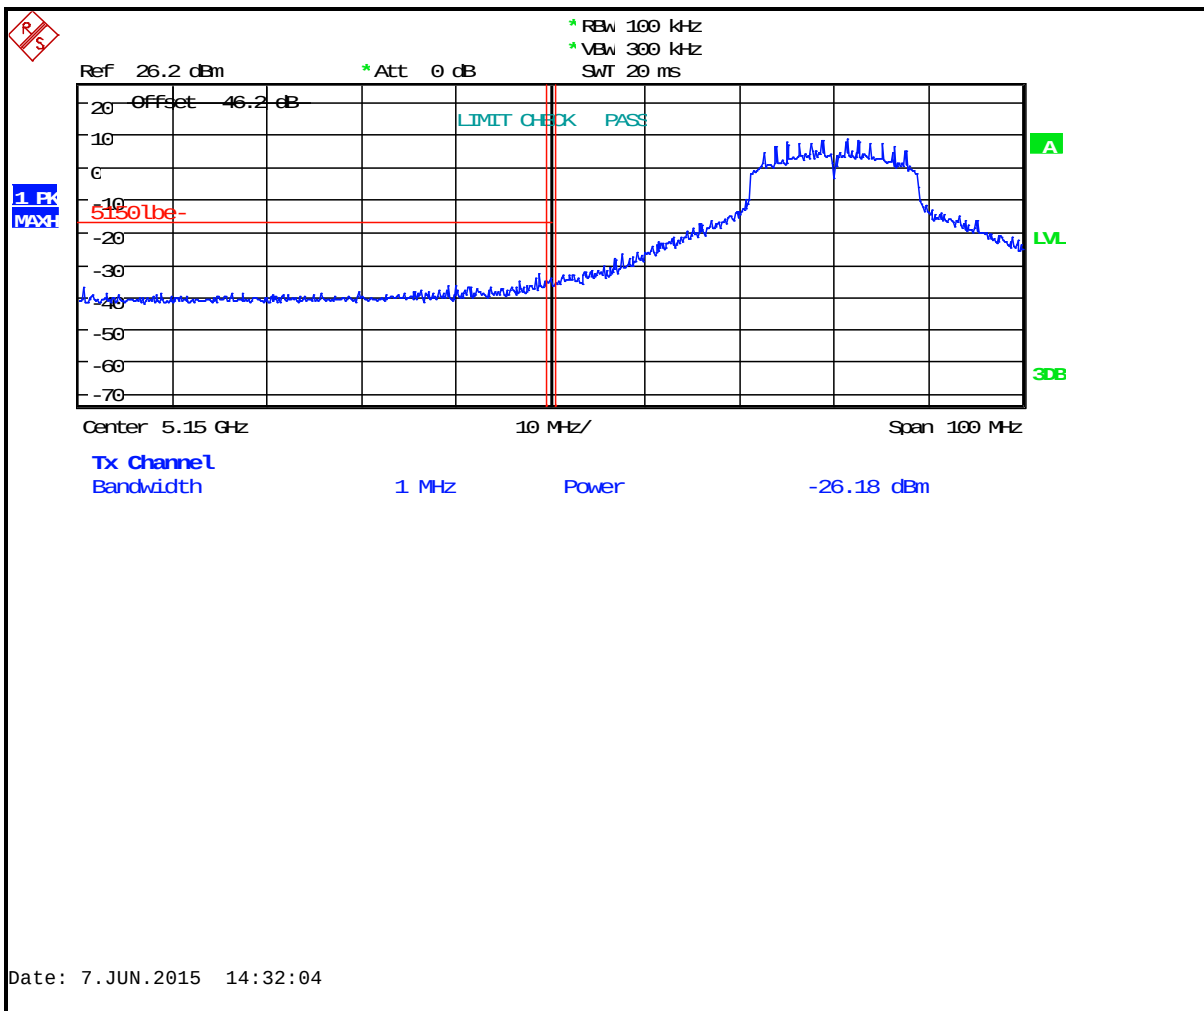


Plot 6-2: Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11a, Average)

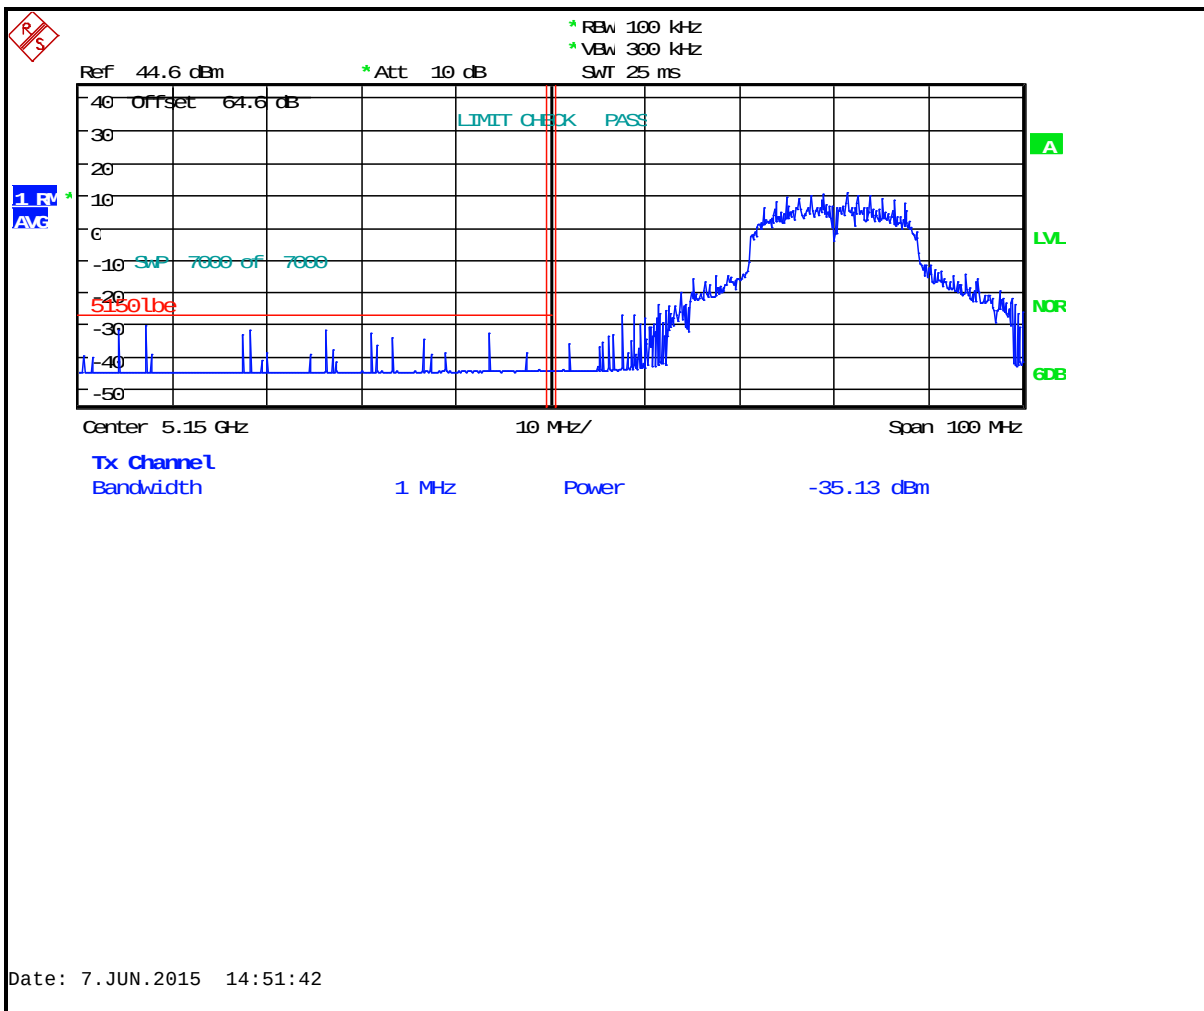


Plot 6-3: Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11n, Peak)

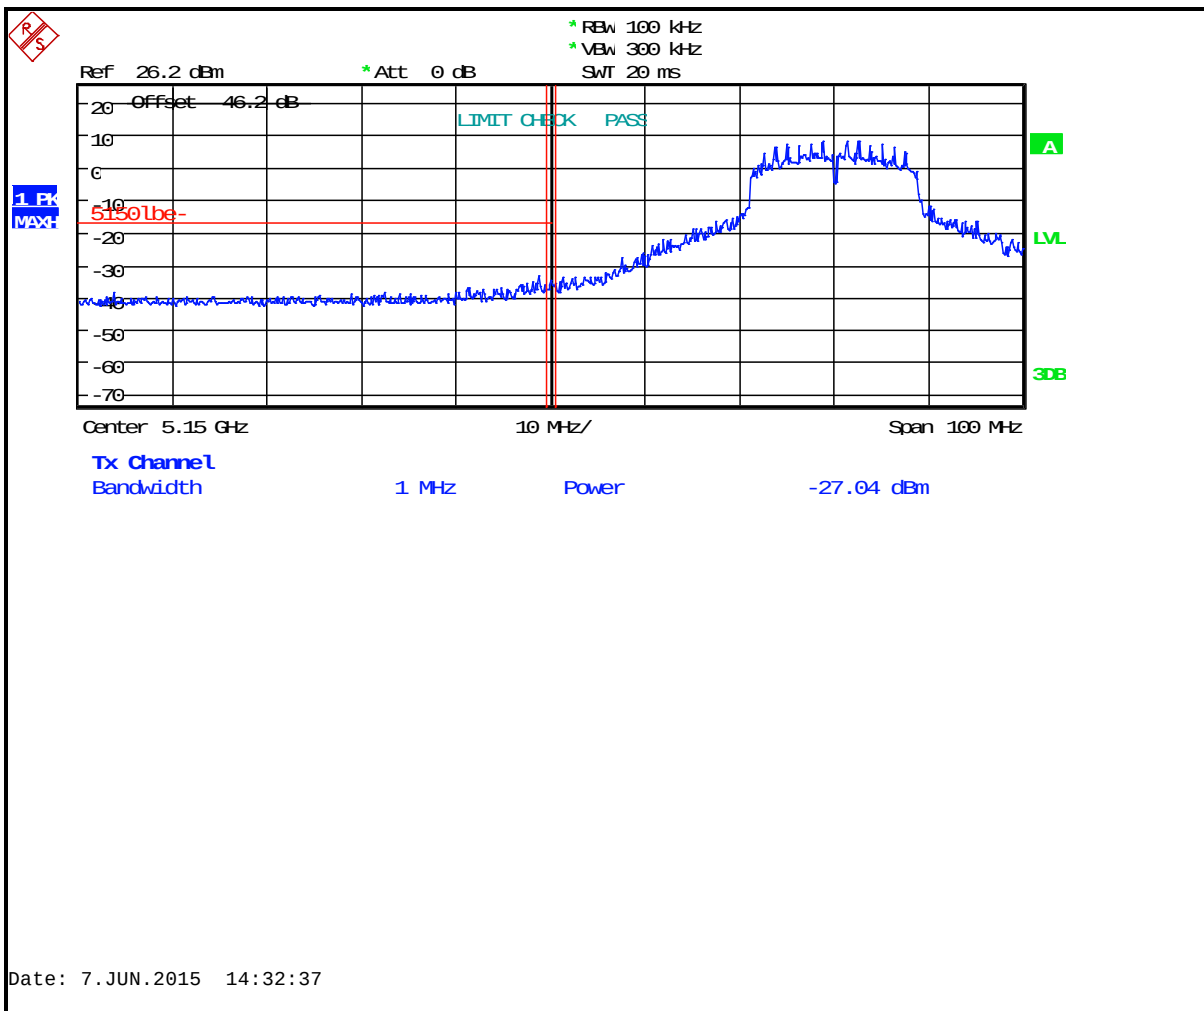


Plot 6-4: Lower Band Edge: Measurement Channel 36 (5180 MHz, 802.11n, Average)

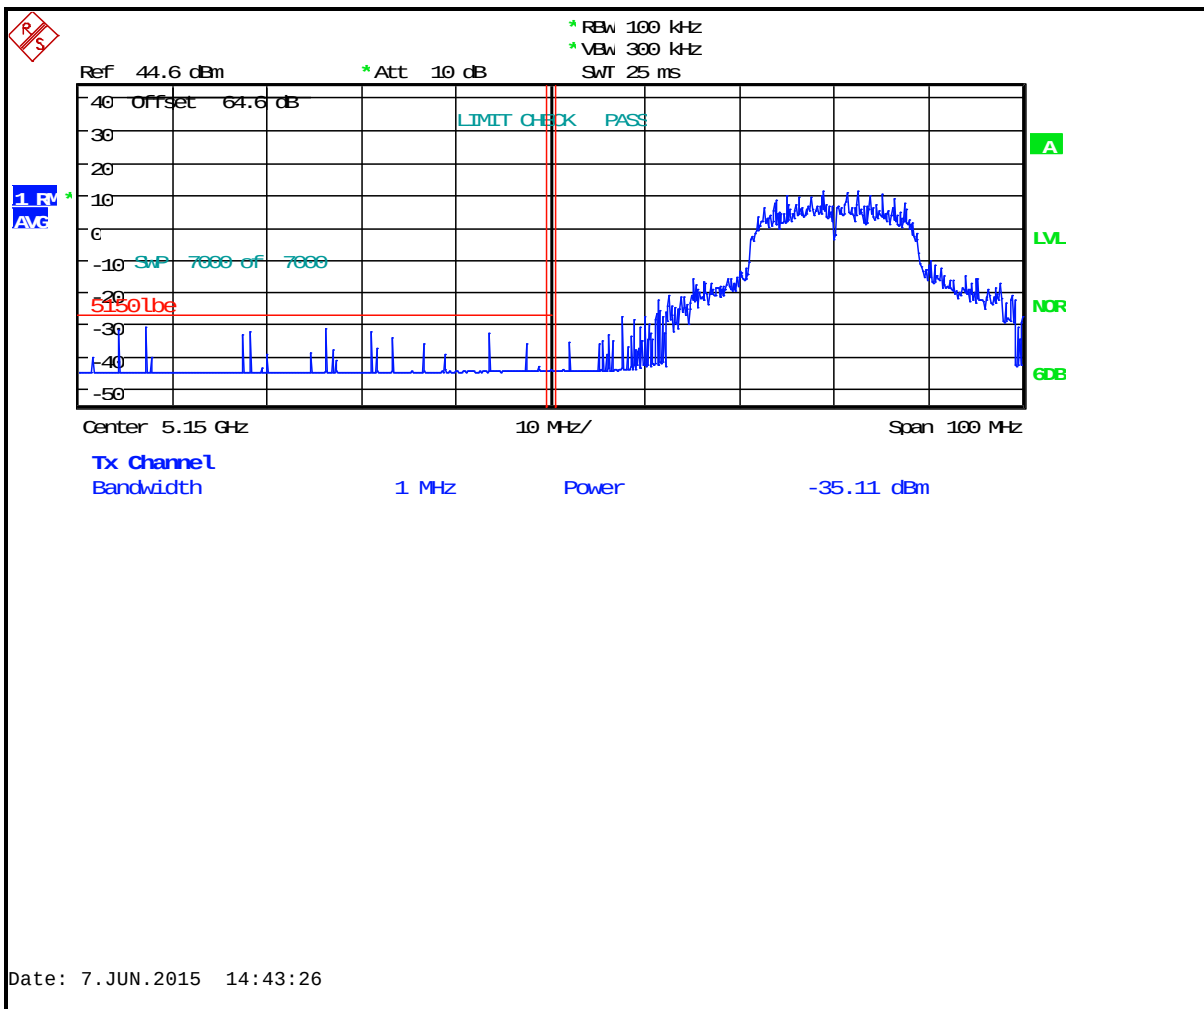


Plot 6-5: Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11a, Peak)

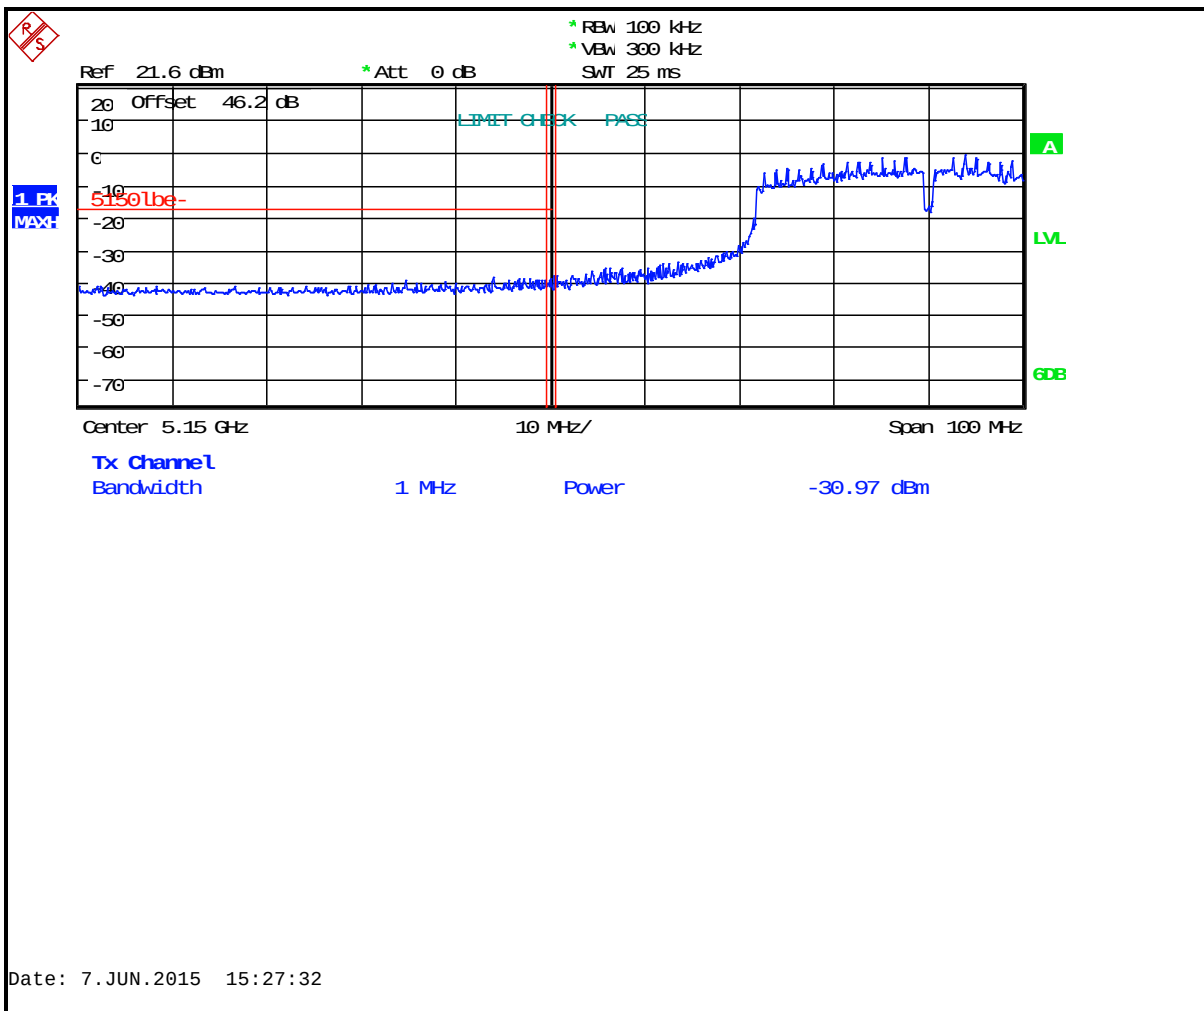


Plot 6-6: Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11a, Average)

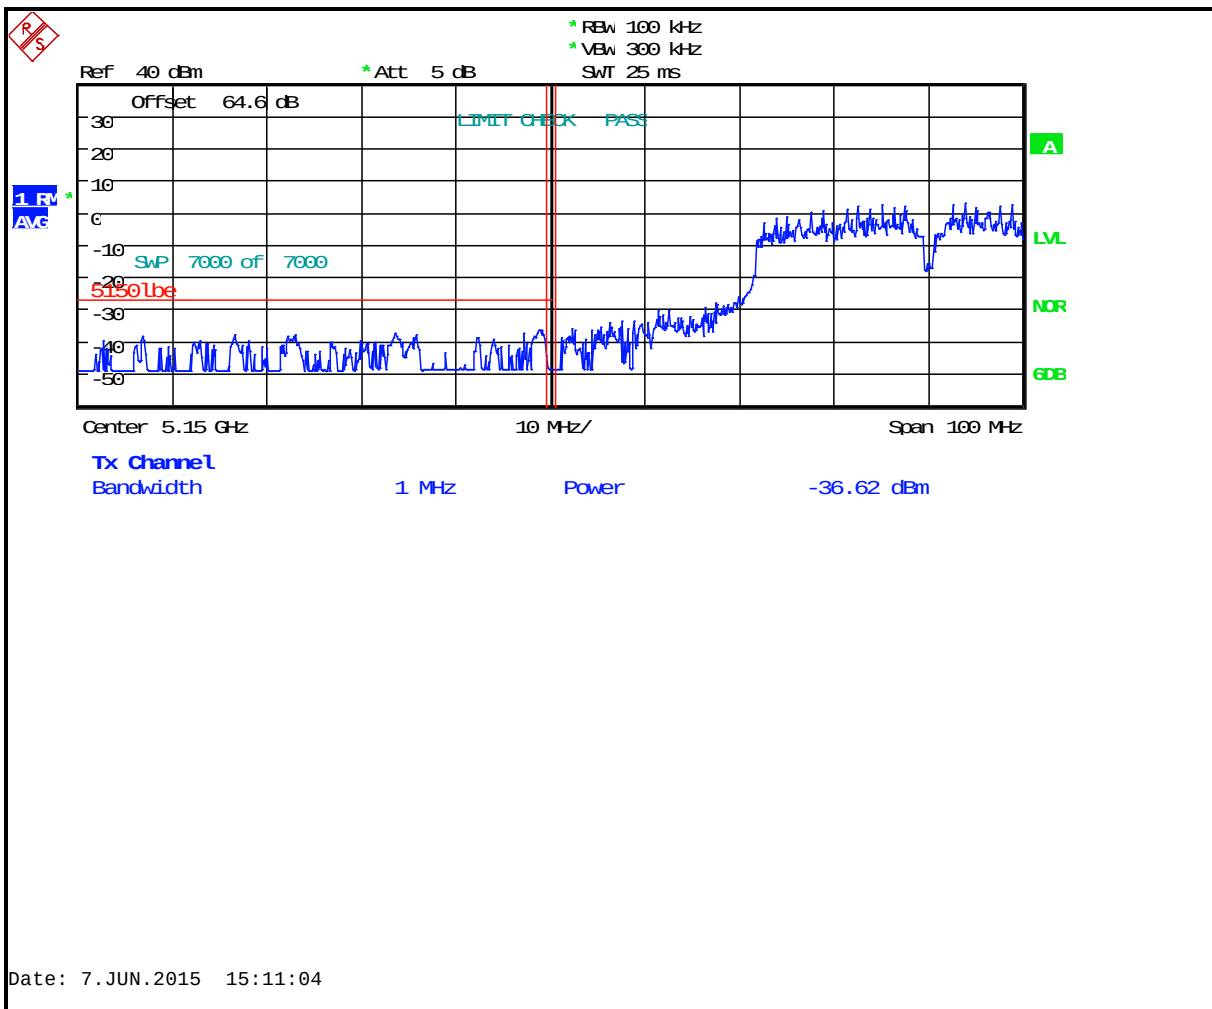

Plot 6-7: Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11n, Peak)

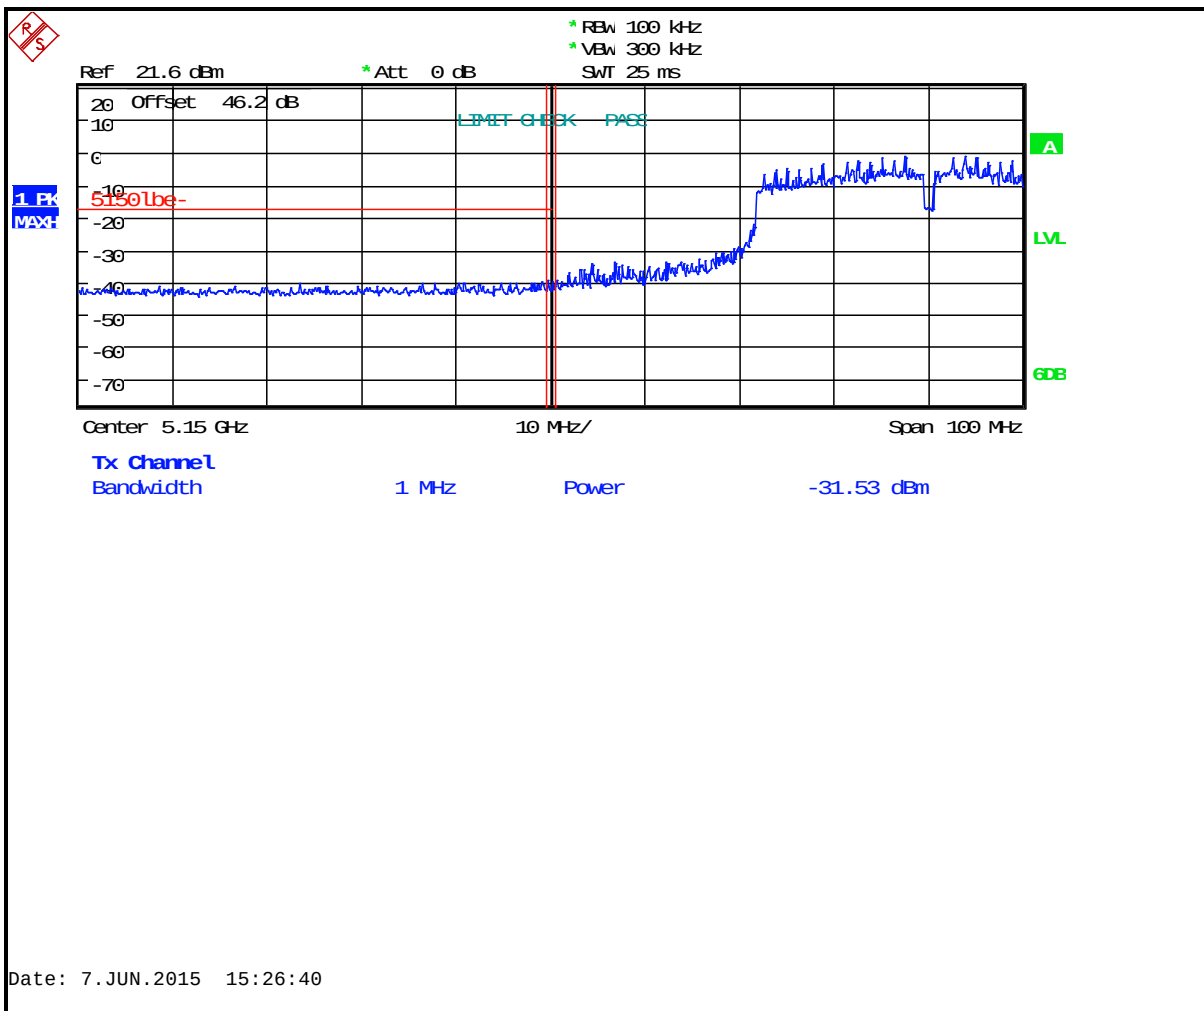


Plot 6-8: Lower Band Edge: Measurement Channel 36 (5180 MHz, 40 MHz BW, 802.11n, Average)

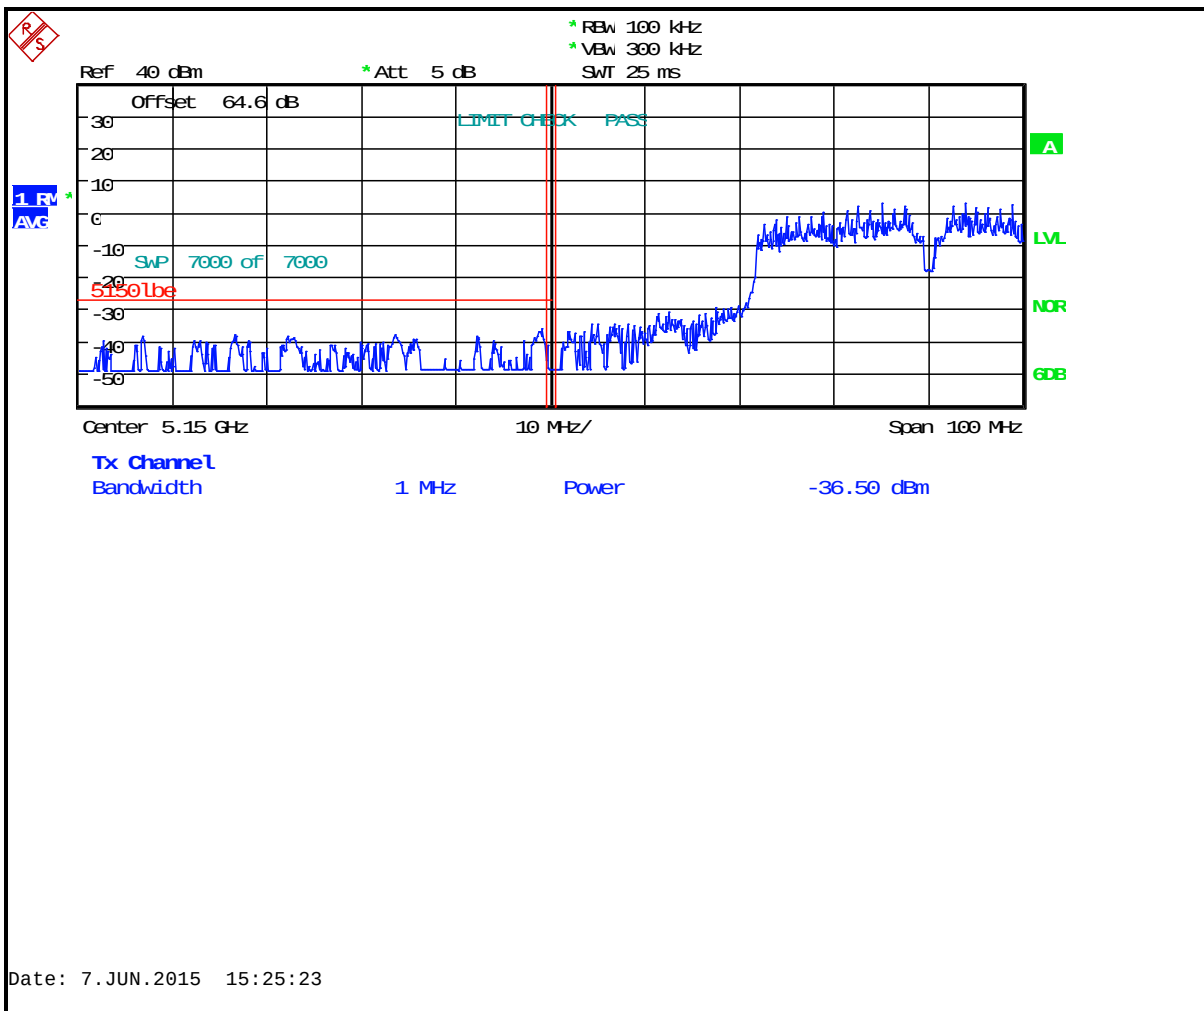


6.3.2 5725 – 5850 MHz Band Edges – 802.11a and 802.11n


Plot 6-9: Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11a, Peak)

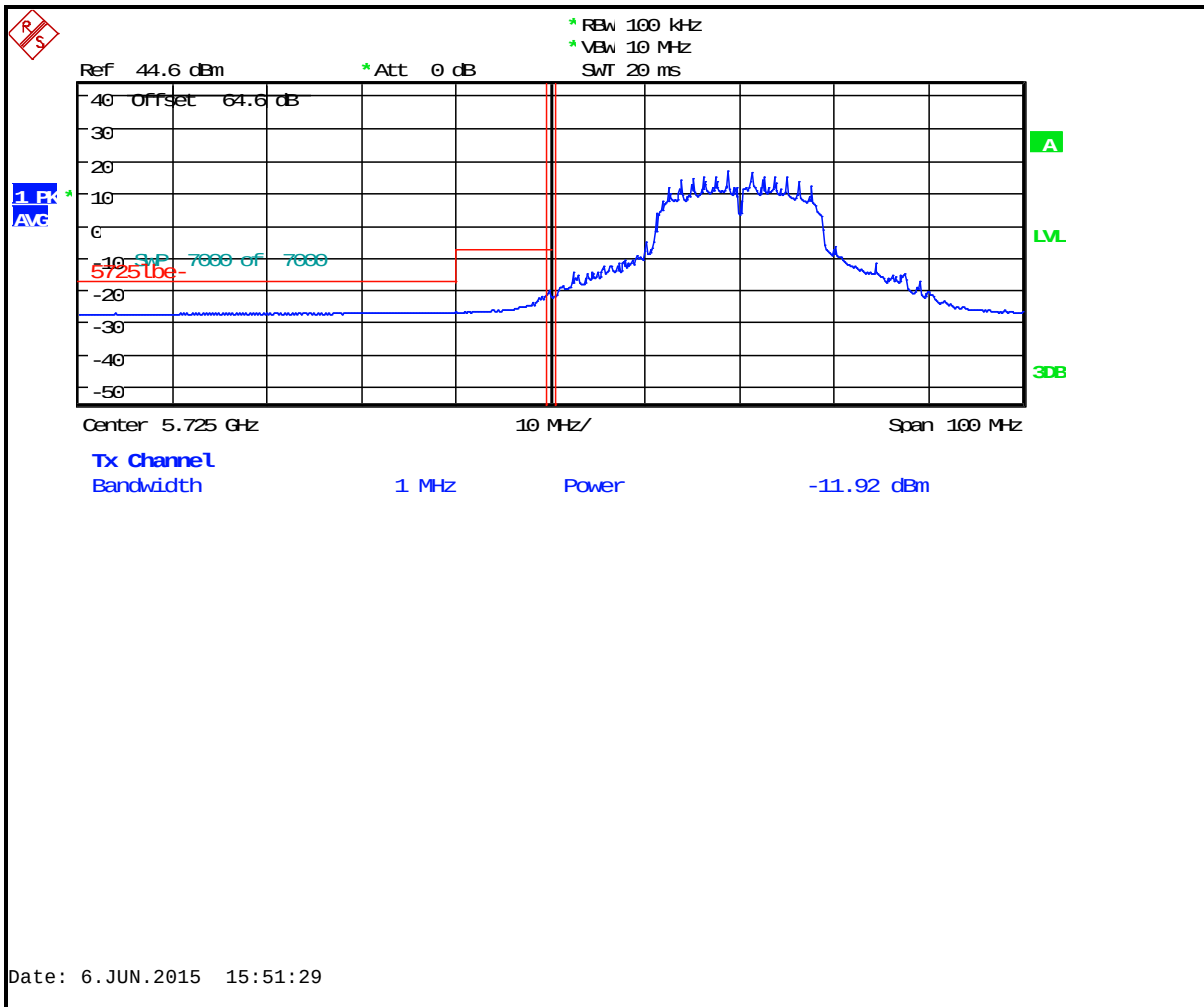


Plot 6-11: Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11n, Peak)

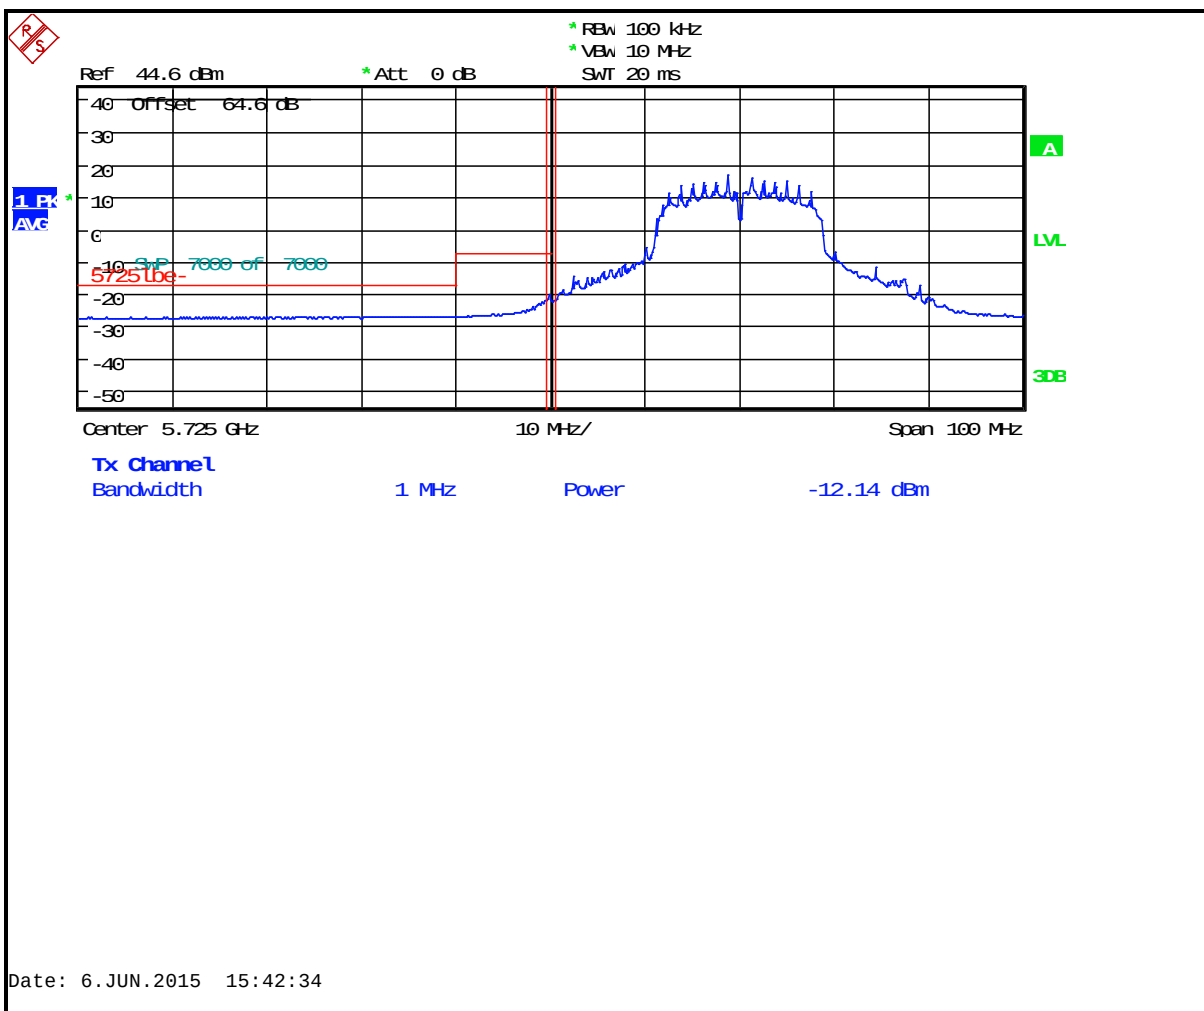


Plot 6-12: Lower Band Edge: Measurement Channel 149 (5745 MHz, 802.11n, Average)

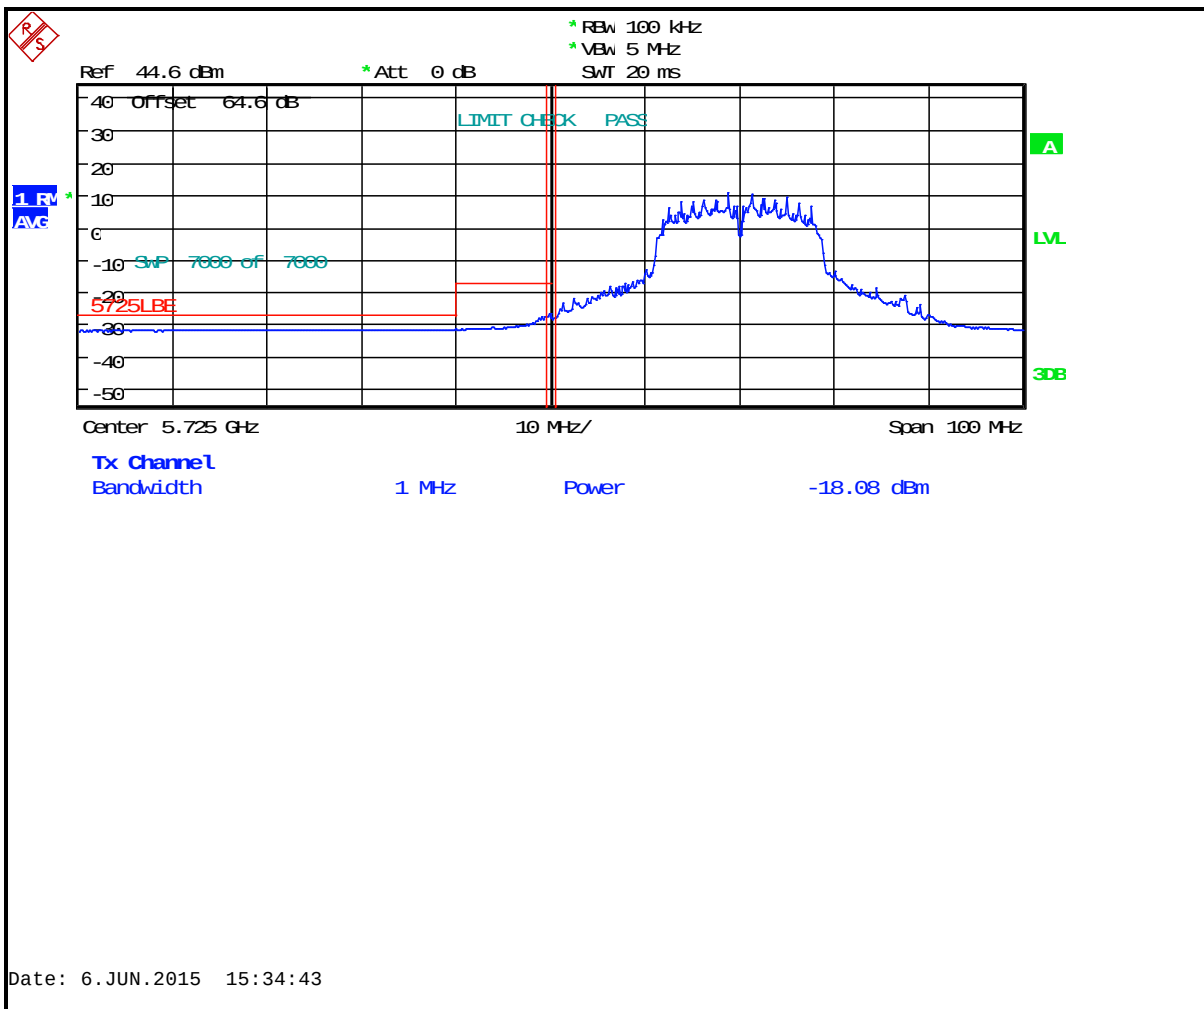


Plot 6-13: Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11a, Peak)

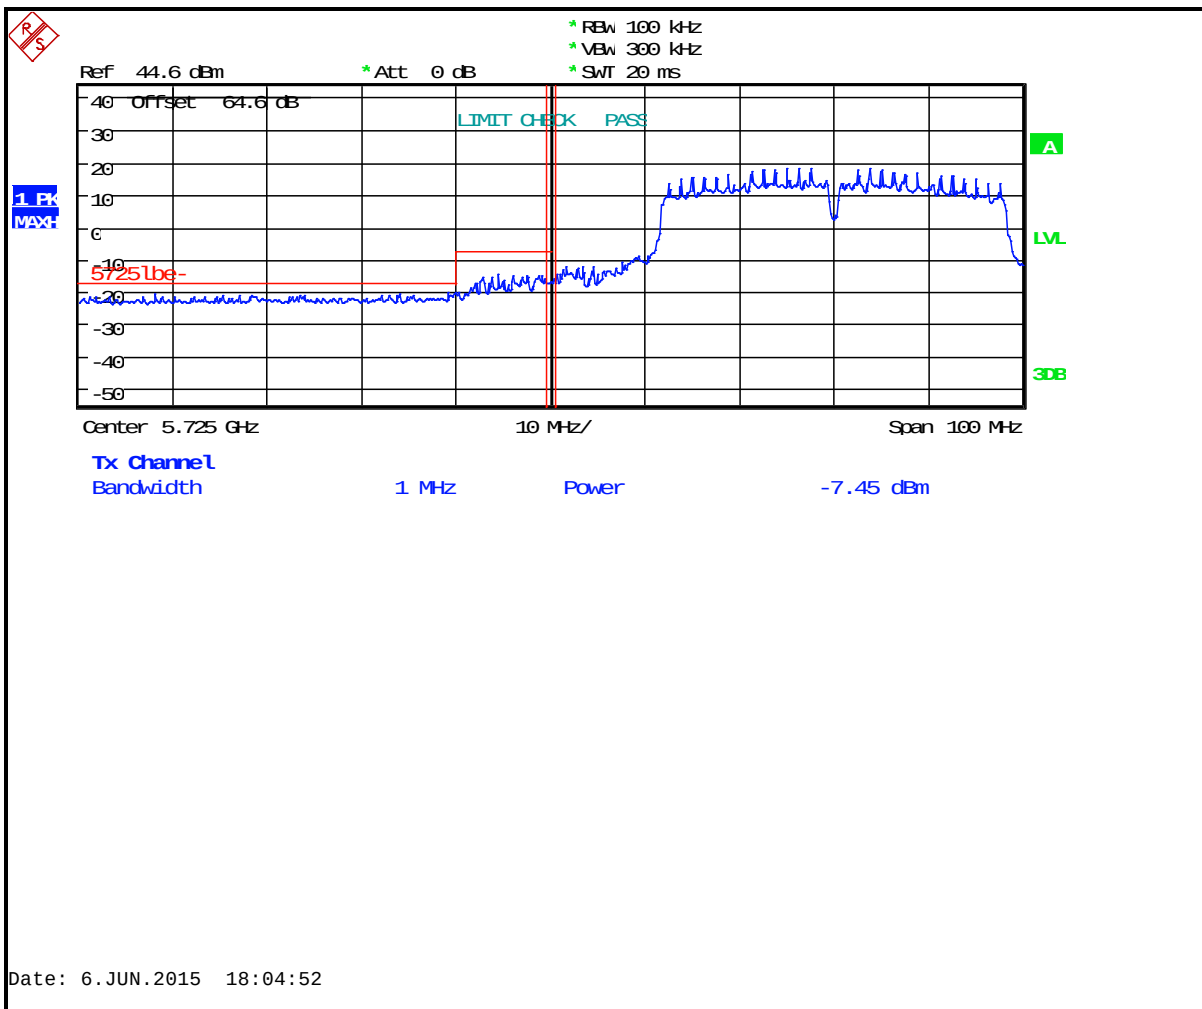


Plot 6-14: Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11a, Average)

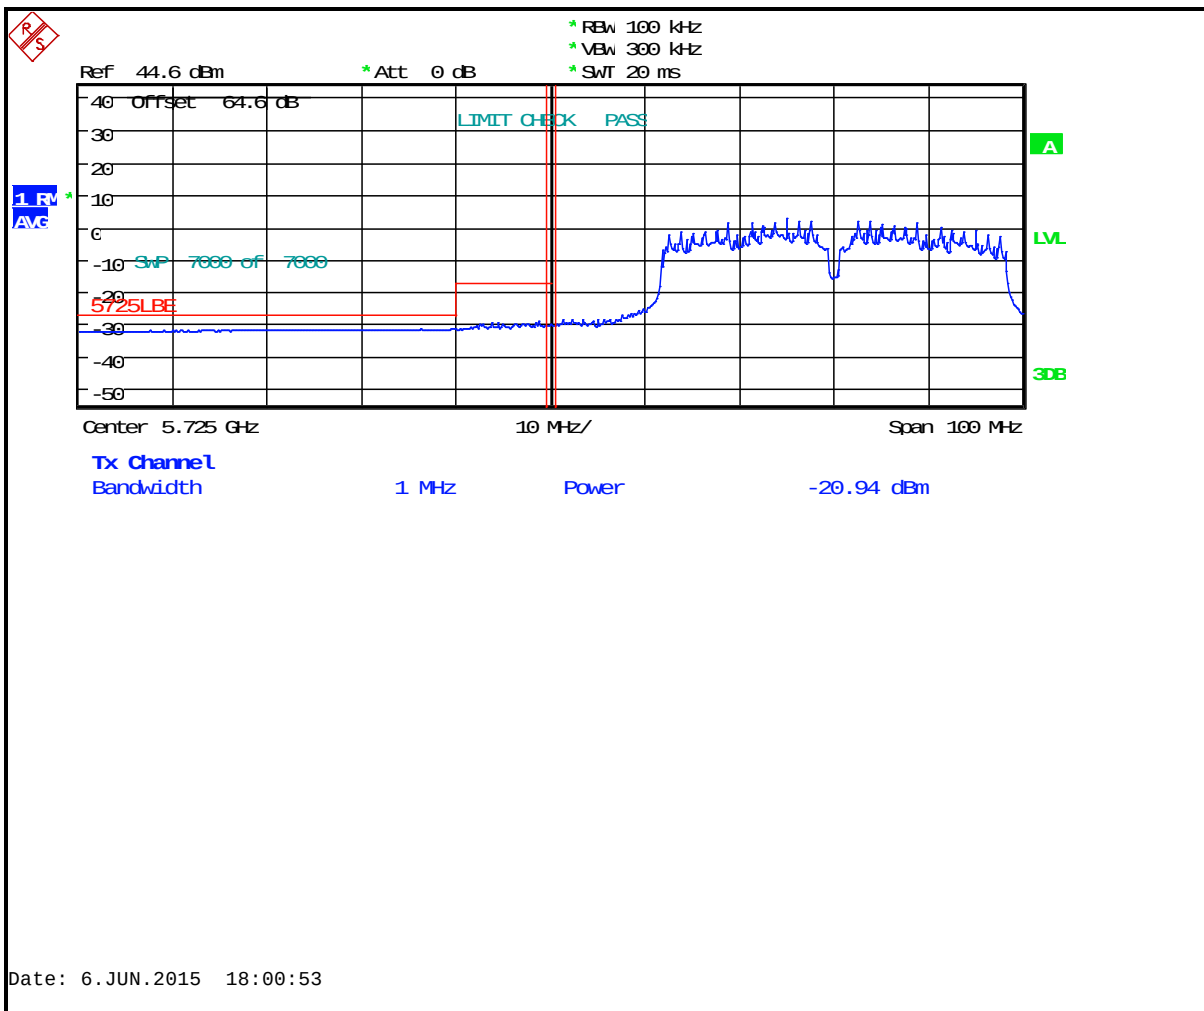


Plot 6-15: Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11n, Peak)

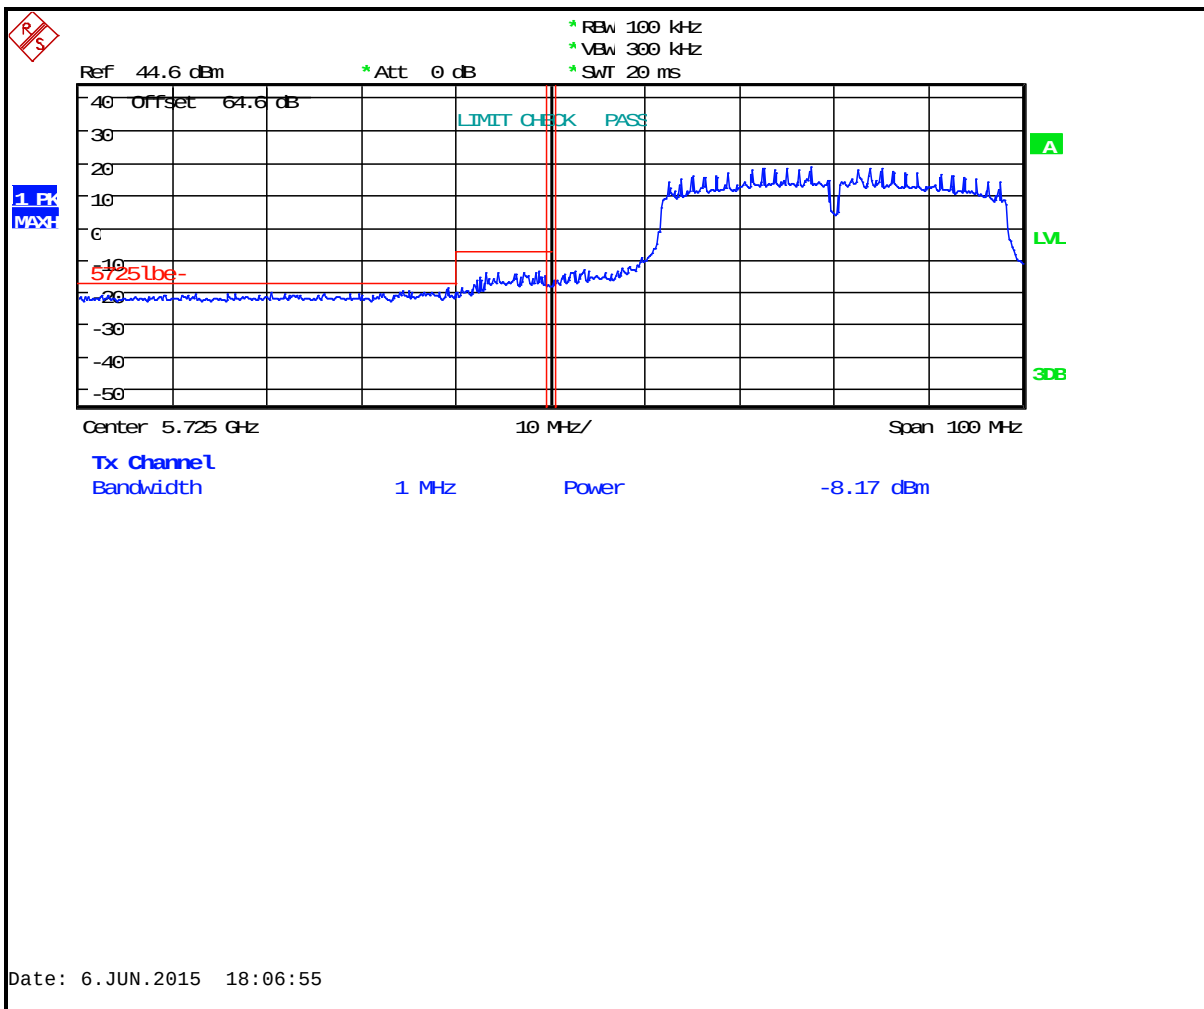


Plot 6-16: Lower Band Edge: Measurement Channel 149 (5745 MHz, 40 MHz BW, 802.11n, Average)

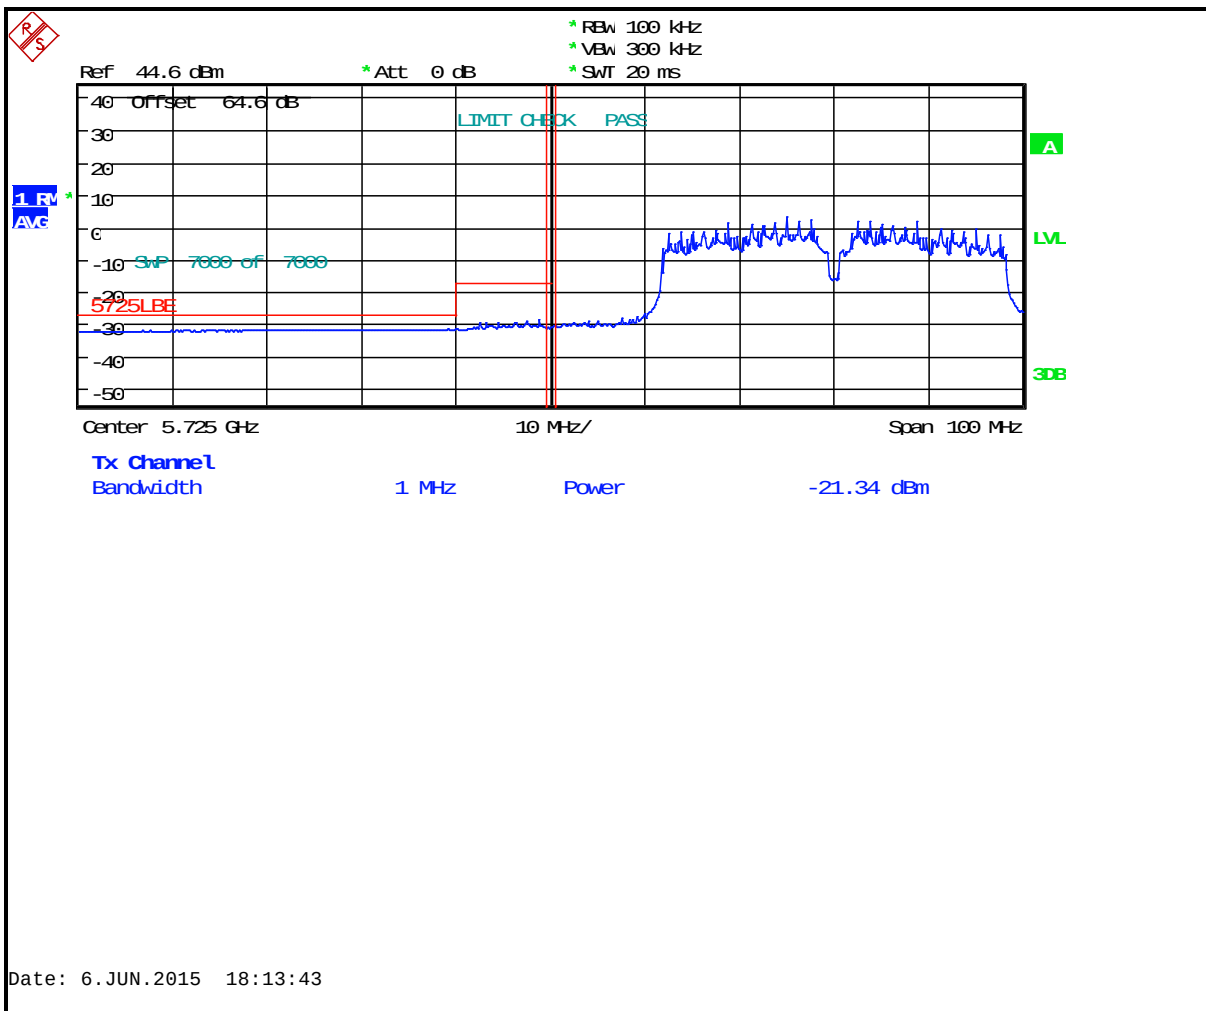


Plot 6-17: Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11a, Peak)

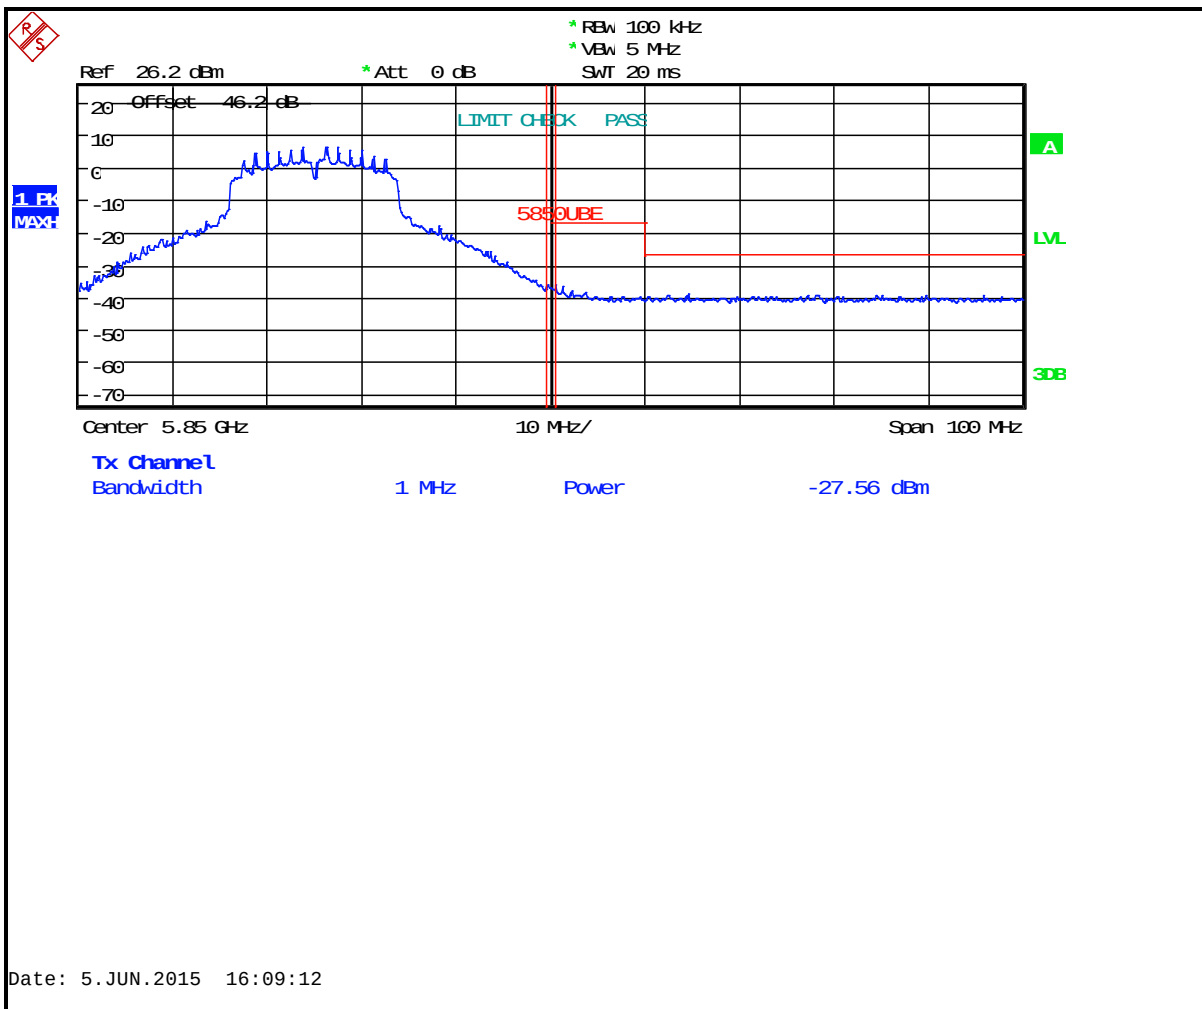

Plot 6-18: Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11a, Average)

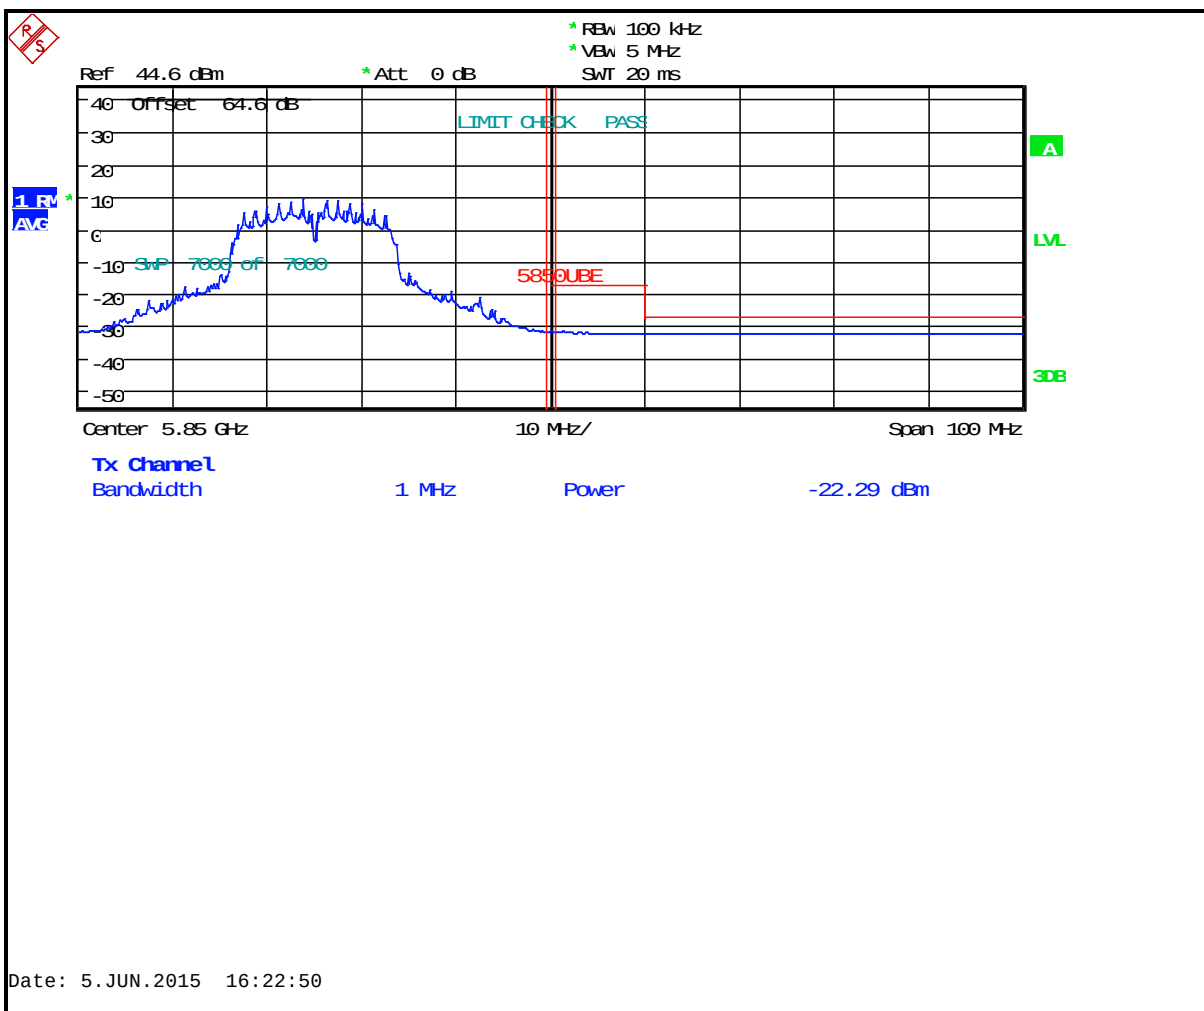


Plot 6-19: Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11n, Peak)

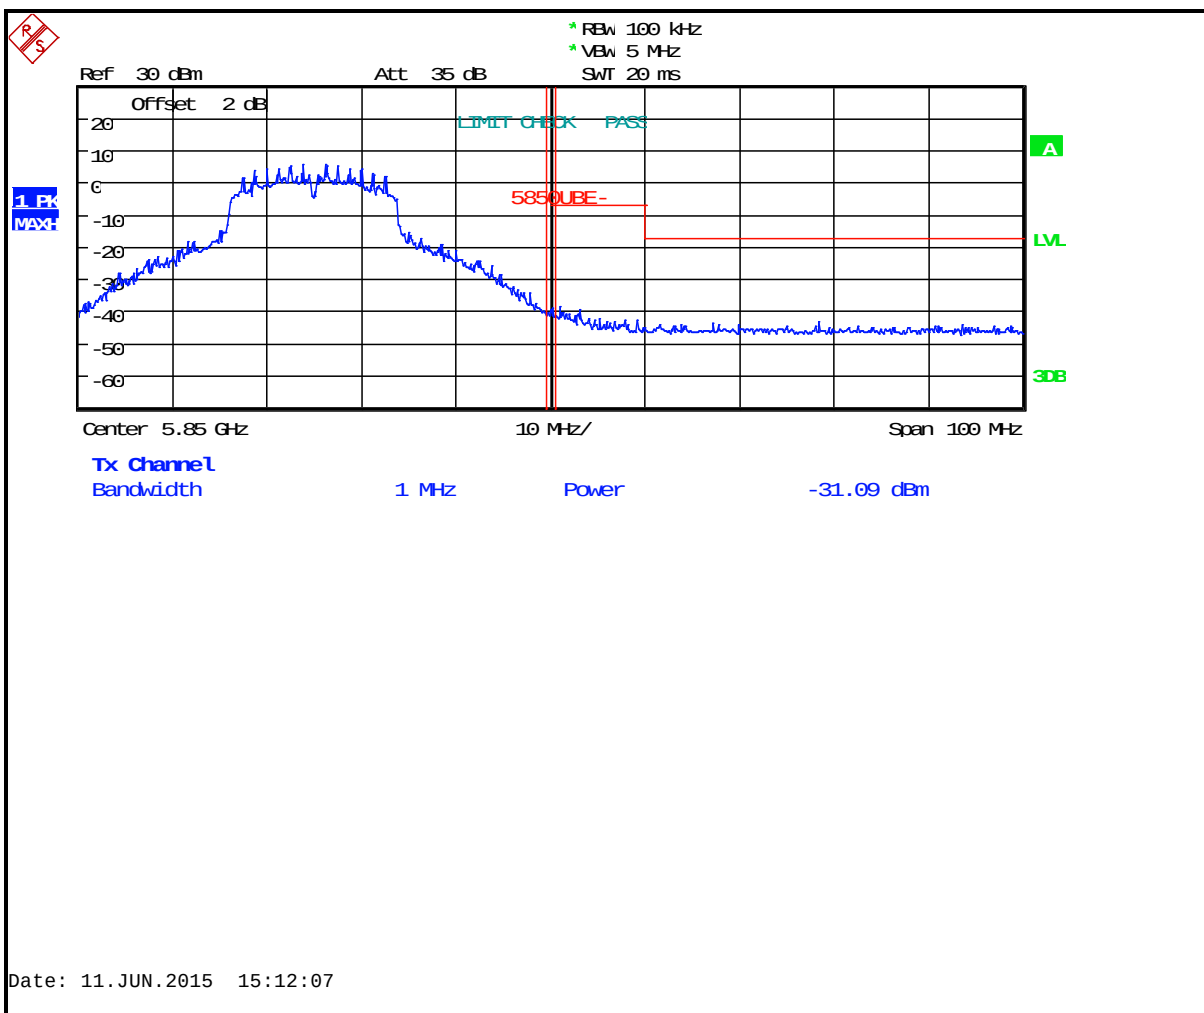


Note: Conducted antenna port measurement

Plot 6-20: Upper Band Edge: Measurement Channel 165 (5825 MHz, 802.11n, Average)

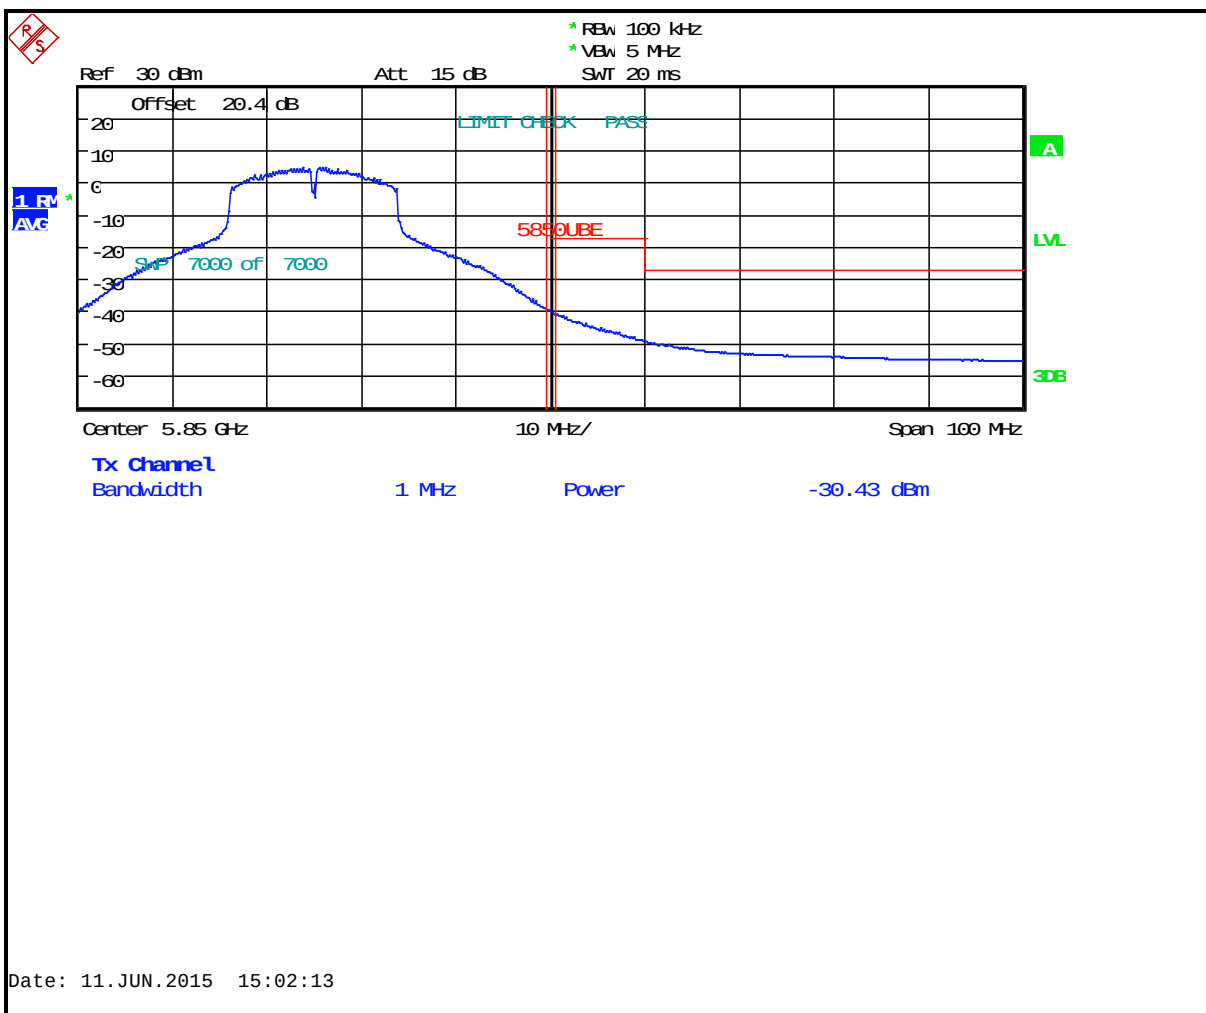


Note: Conducted antenna port measurement


Plot 6-21: Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11a, Peak)

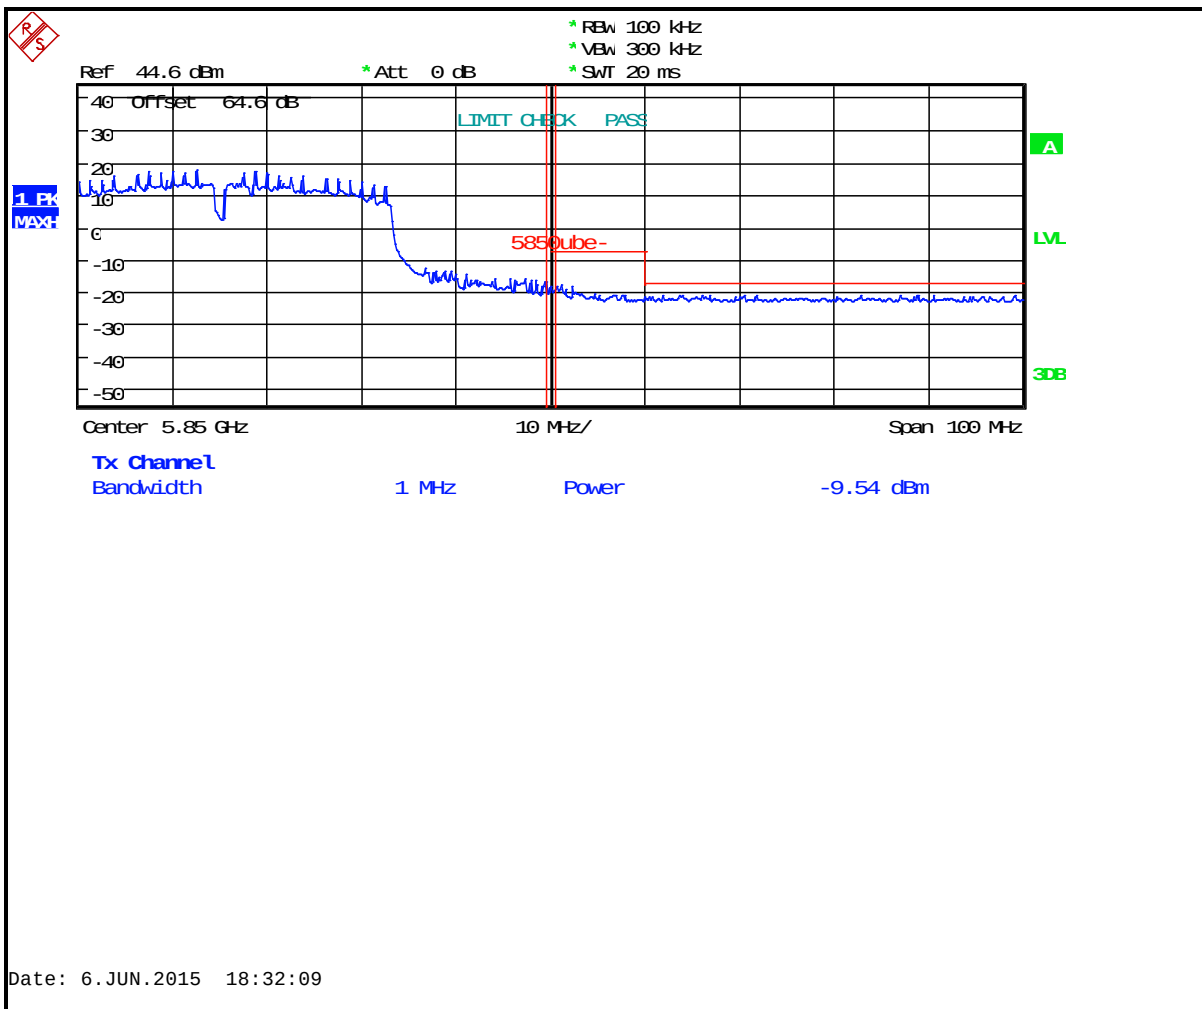

Plot 6-23: Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11n, Peak)

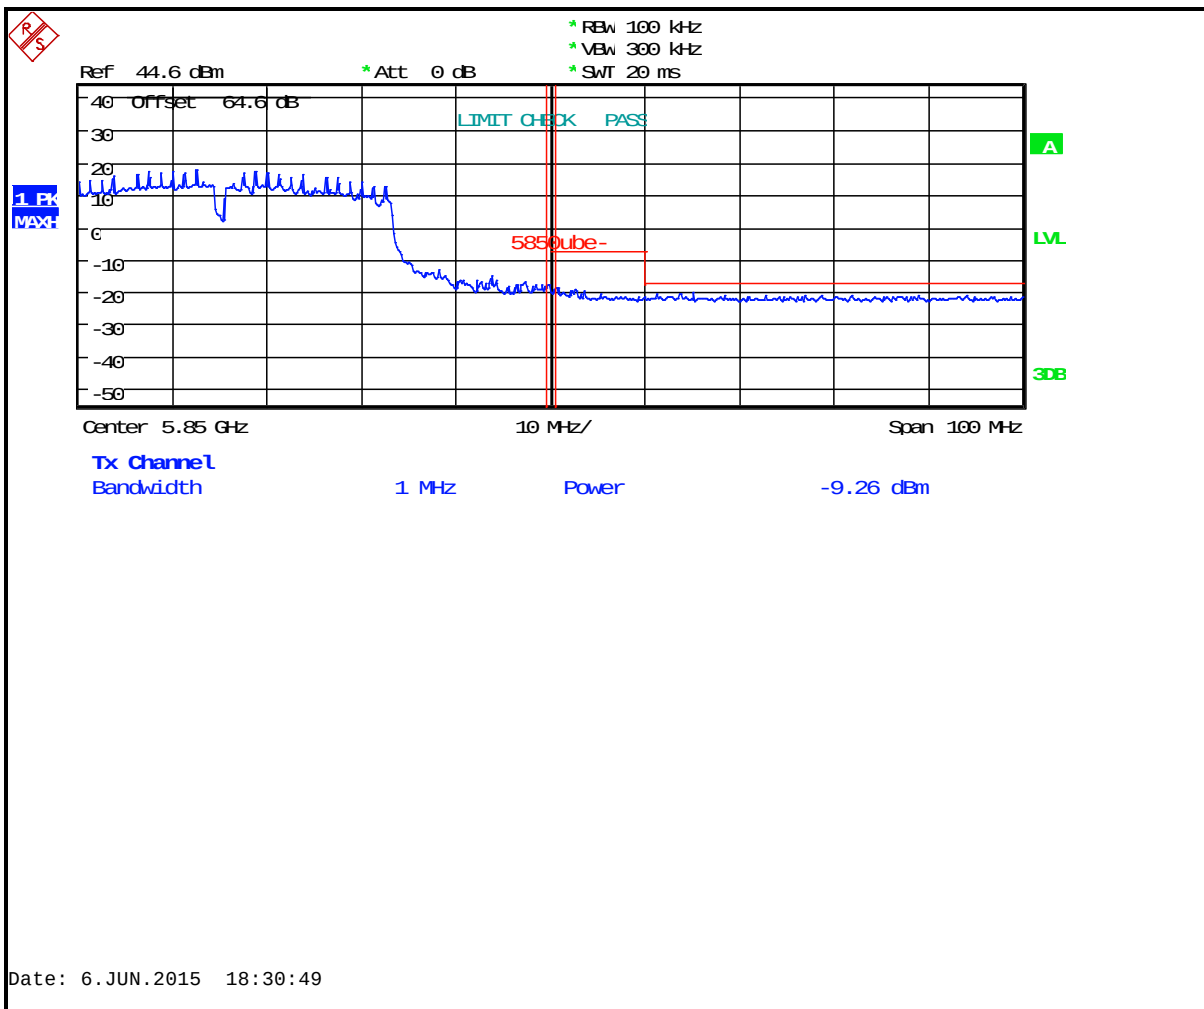

Plot 6-24: Upper Band Edge: Measurement Channel 165 (5825 MHz, 40 MHz BW, 802.11n, Average)

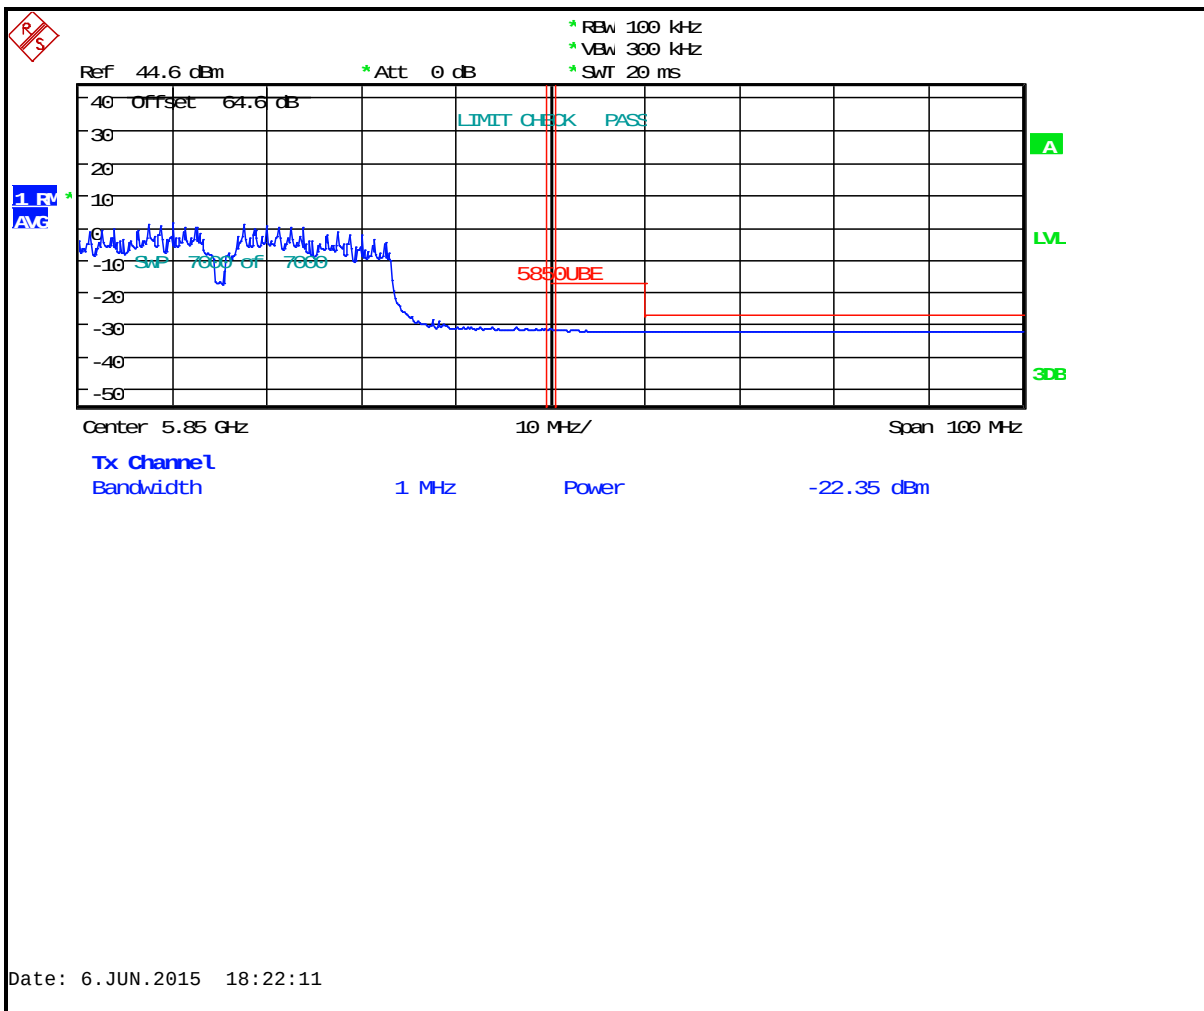

Test Personnel:

Daniel W. Baltzell
 Test Engineer

Daniel W. Baltzell
 Signature

June 6-11, 2015
 Dates of Test

7 Undesirable Emissions - 15.407(b); RSS-247 6.2

7.1 Undesirable Emissions Test Procedures

Antenna spurious emissions were measured from the EUT antenna port using a 50-ohm spectrum analyzer.


NOTE: Offset is 2 dB antenna gain added for EIRP comparison to limit since manufacturer's maximum gain is 1 dB, with duty cycle addition.

Table 7-1: Undesirable Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15


7.2 Undesirable Emissions Test Results

Plot 7-1: Undesirable Emissions Channel 36 (5180 MHz); 9 kHz – 150 kHz

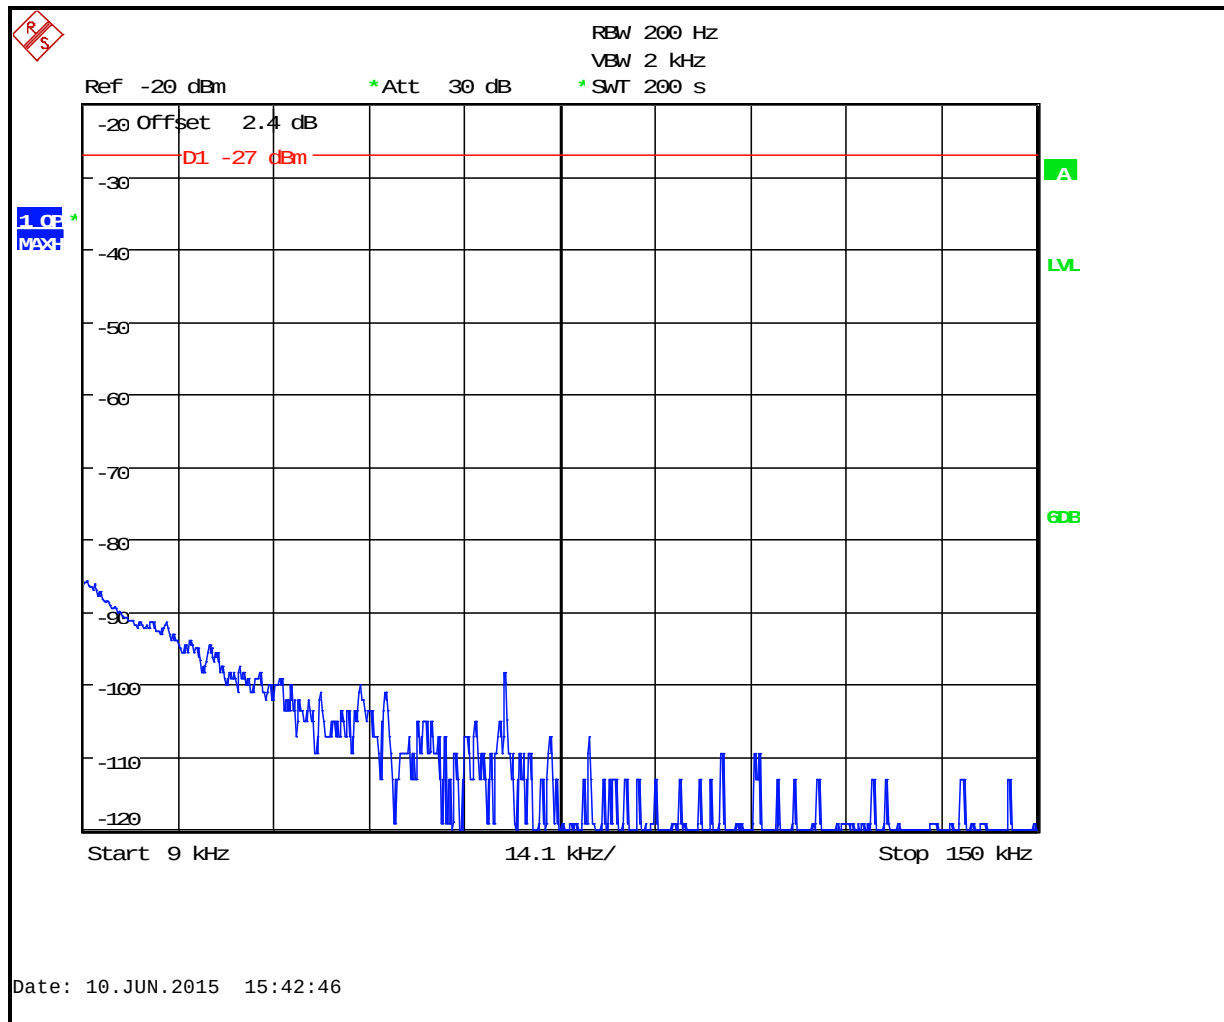


NOTE: Displayed as representative of all channels


Plot 7-3: Undesirable Emissions Channel 36 (5180 MHz);

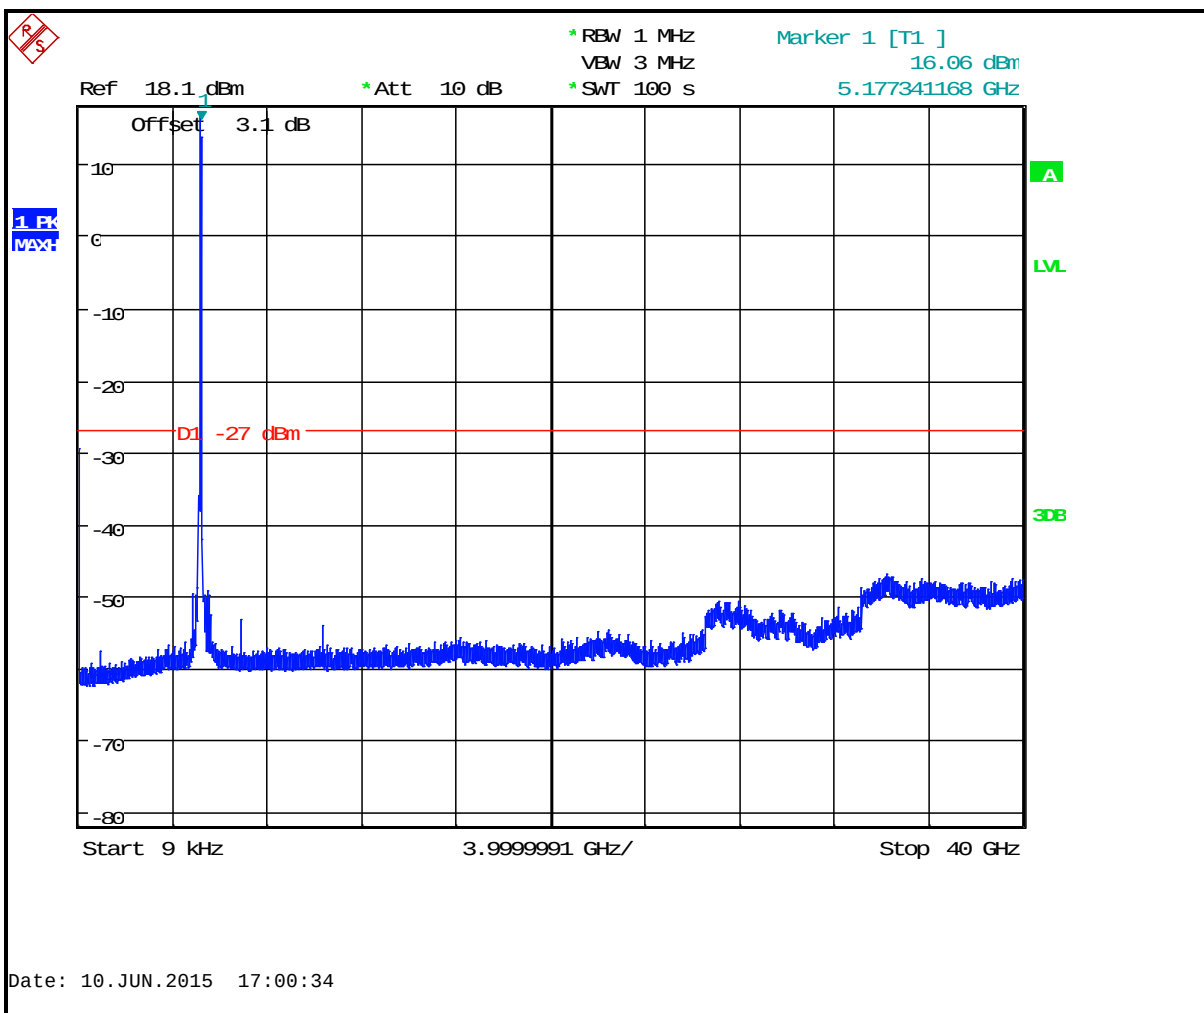


Plot 7-4: Undesirable Emissions Channel 40 (5200 MHz)

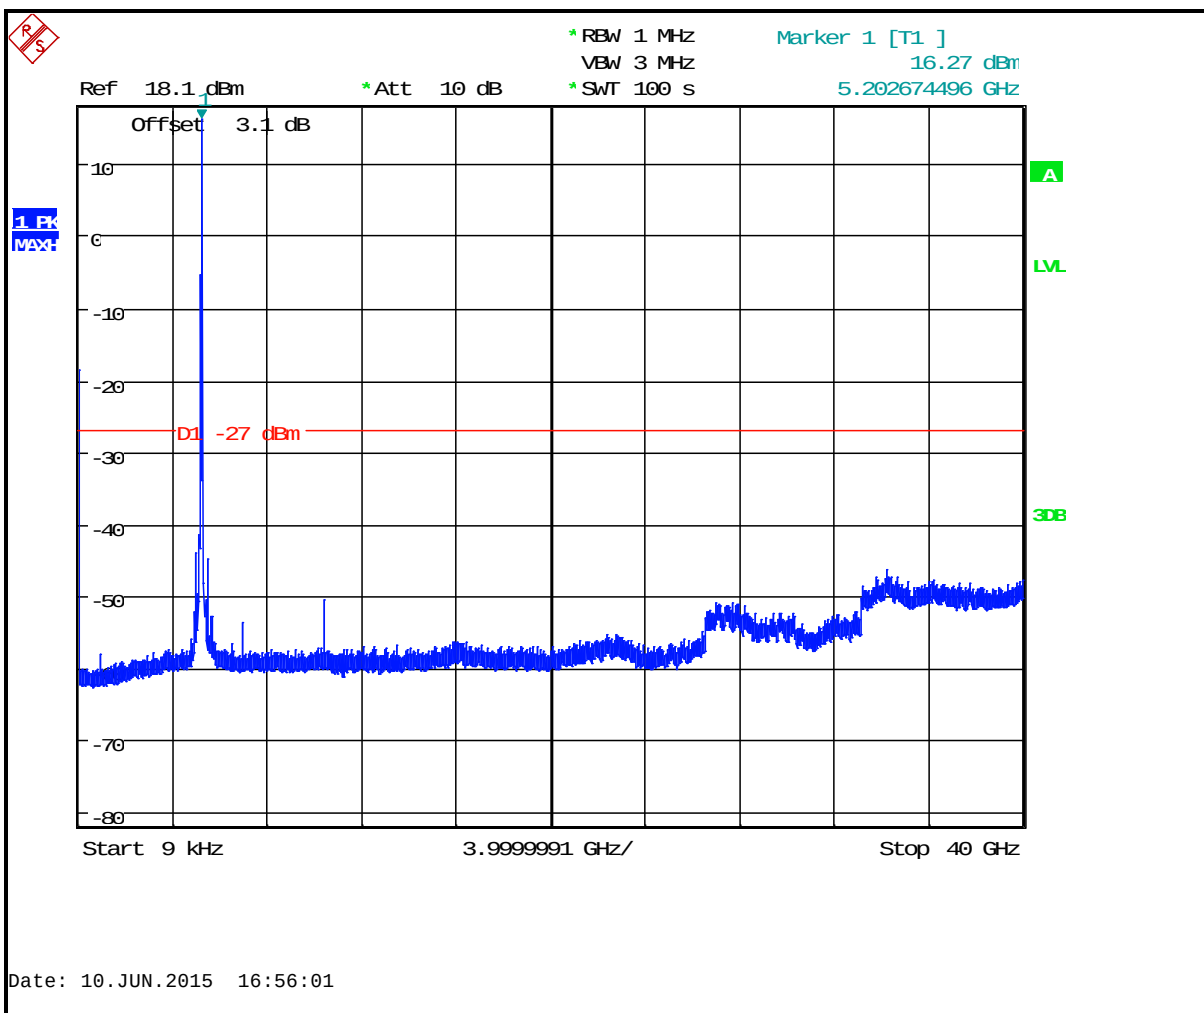


Plot 7-5: Undesirable Emissions Channel 44 (5220 MHz)

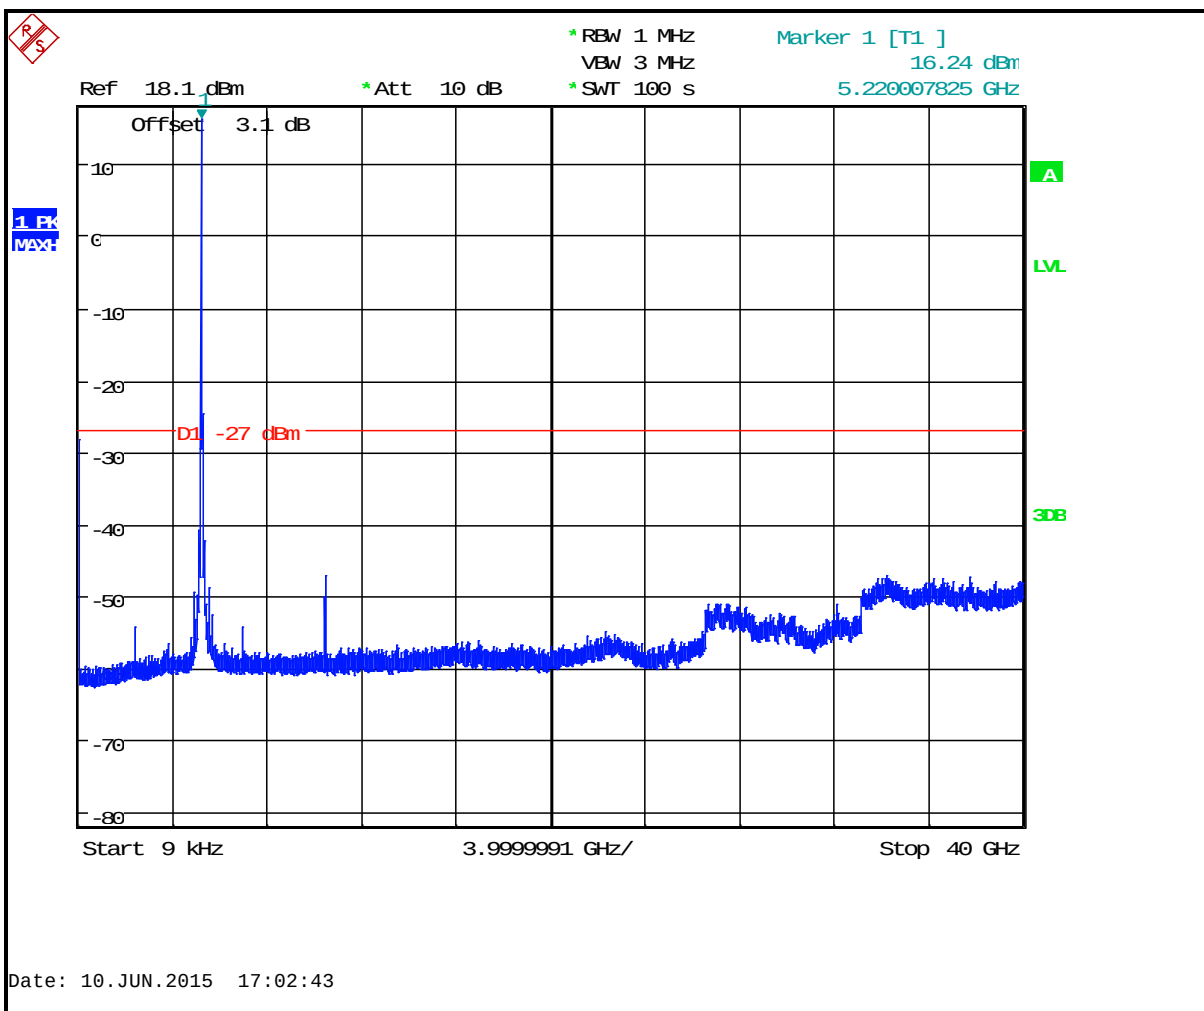


Plot 7-6: Undesirable Emissions Channel 48 (5240 MHz)

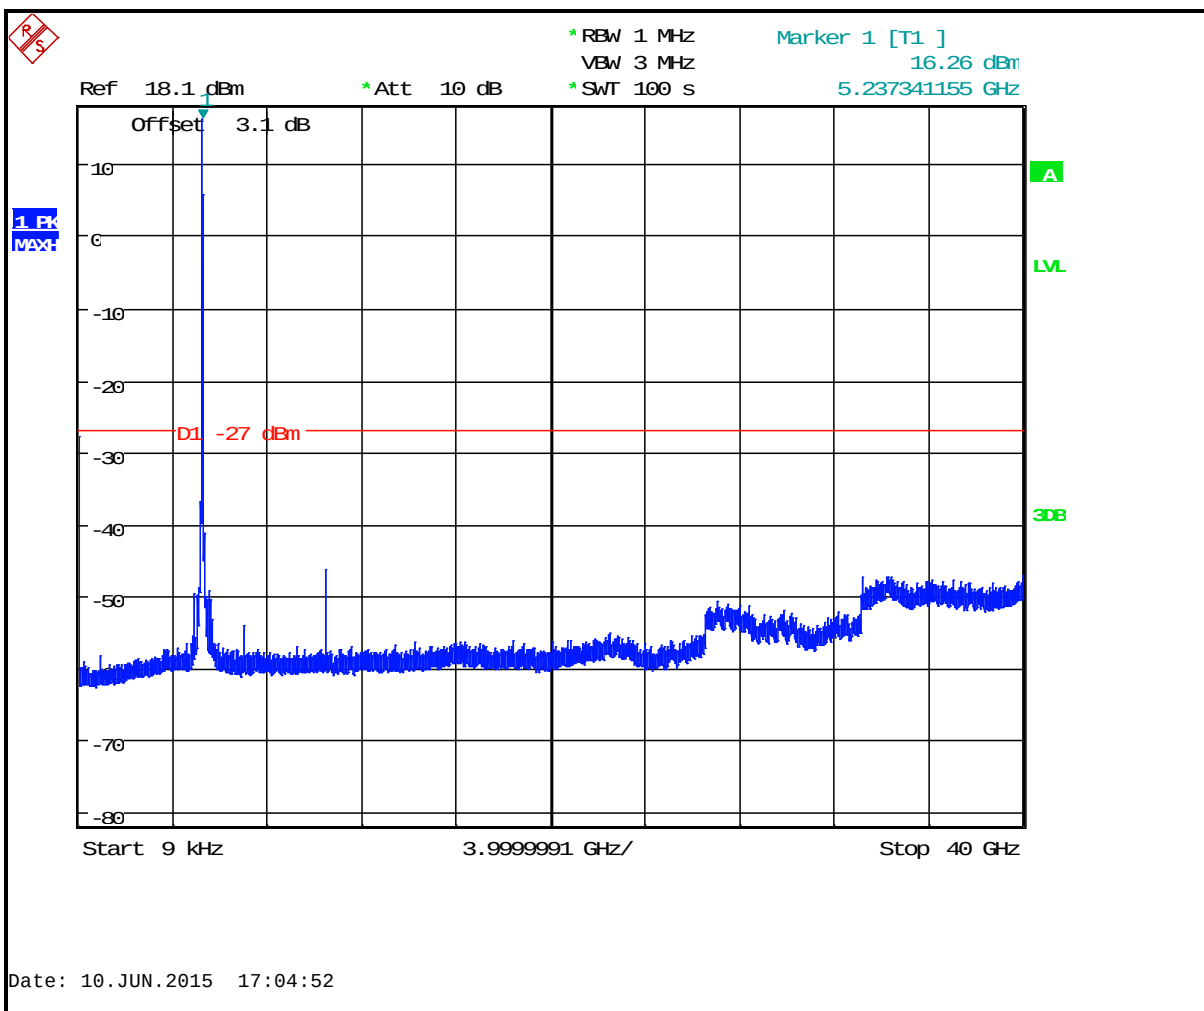


Plot 7-7: Undesirable Emissions Channel 149 (5745 MHz)

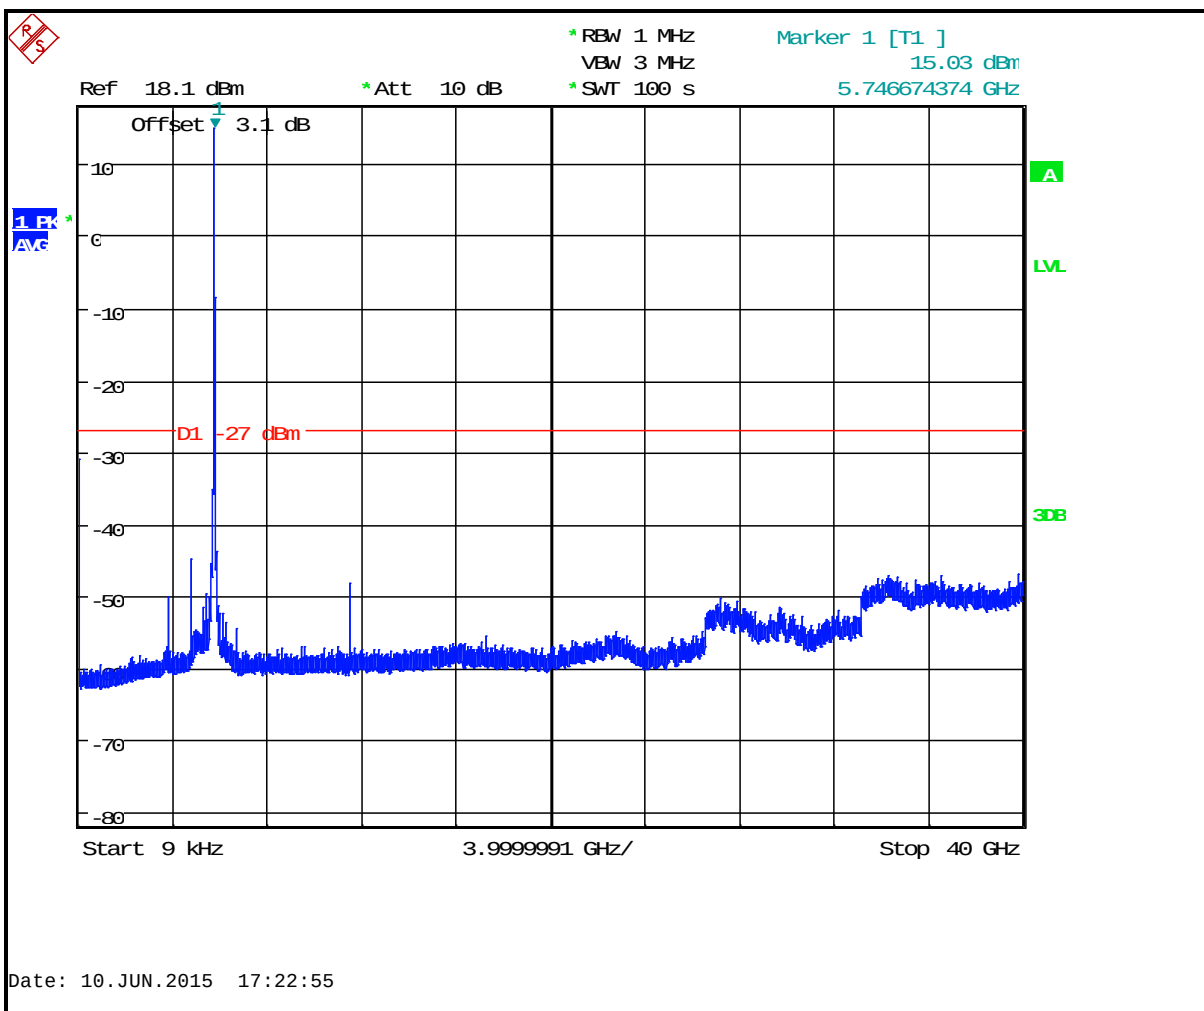

Plot 7-8: Undesirable Emissions Channel 157(5785 MHz)

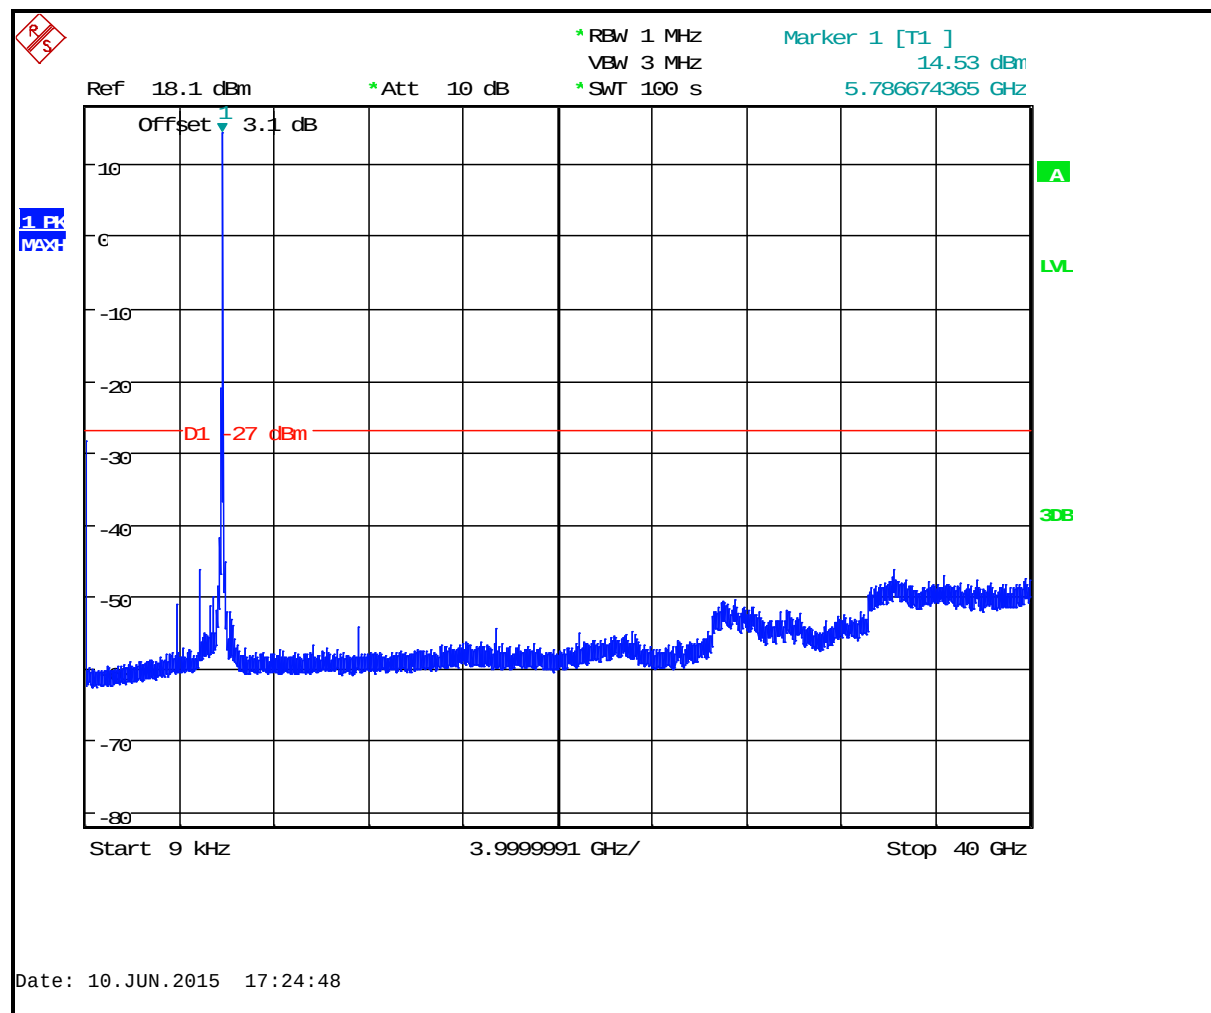

Plot 7-9: Undesirable Emissions Channel 165 (5825 MHz)

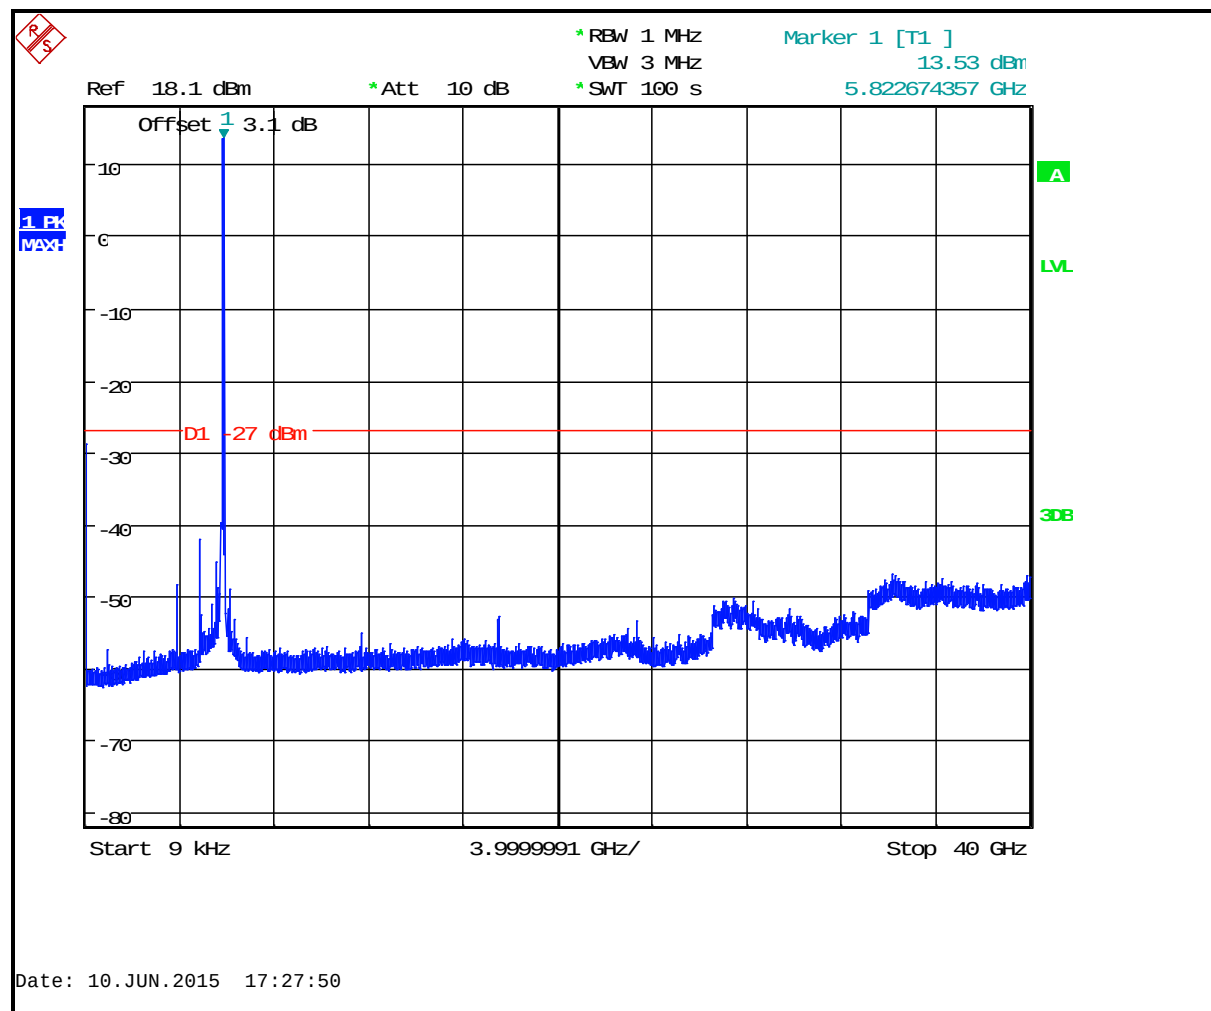

7.3 Limits of Undesirable Emissions

(b) *Undesirable emission limits:* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

(2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

(3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

(4) For transmitters operating in the 5.725–5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

Test Personnel:

Daniel W. Baltzell
Test Engineer


Signature

June 10, 2015
Date of Test

8 Bandwidth – FCC 15.407(a) and (e); RSS-247 6.2

8.1 Bandwidth Test Procedure

The bandwidths were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 1% of the emission bandwidth. The device was modulated and the spectrum analyzer placed in max hold, peak detector, to capture the trace. The minimum 26 dB and 6 dB bandwidths are presented below.

Table 8-1: 26 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15

Table 8-2: 26 dB Bandwidth Test Data – 802.11a (36 Mbps)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	19.5
40	5200	19.4
44	5220	19.5
48	5240	19.3
149	5745	19.6
157	5785	19.6
165	5825	19.4

Table 8-3: 26 dB Bandwidth Test Data – 802.11n (39 Mbps)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	22.7
40	5200	22.7
44	5220	22.6
48	5240	22.6
149	5745	23.5
157	5785	25.8
165	5825	26.7

Table 8-4: 26 dB Bandwidth Test Data – 802.11a (40 MHz BW, 36 Mbps)

Channel	Center Frequency (MHz)	26 dB Bandwidth (MHz)
36 (lower half)	5190	43.6
40 (lower half)	5210	43.9
44 (lower half)	5230	43.4
48 (lower half)	5250	43.8
149 (lower half)	5755	48.7
157 (lower) half	5795	48.4
165 (upper half)	5815	48.2

Table 8-5: 26 dB Bandwidth Test Data – 802.11n (40 MHz BW, 39 Mbps)

Channel	Center Frequency (MHz)	26 dB Bandwidth (MHz)
36 (lower half)	5190	43.9
40 (lower half)	5210	44.2
44 (lower half)	5230	44.2
48 (lower half)	5250	44.2
149 (lower half)	5755	43.3
157 (lower) half	5795	42.9
165 (upper half)	5815	44.2


Table 8-6: 6 dB Bandwidth Test Data – 802.11a (36 Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
149	5745	16.0	0.5	Pass
157	5785	16.1	0.5	Pass
165	5825	15.9	0.5	Pass


Table 8-7: 6 dB Bandwidth Test Data – 802.11n (39 Mbps)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
149	5745	15.8	0.5	Pass
157	5785	16.0	0.5	Pass
165	5825	16.0	0.5	Pass

Plot 8-1: 26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11a

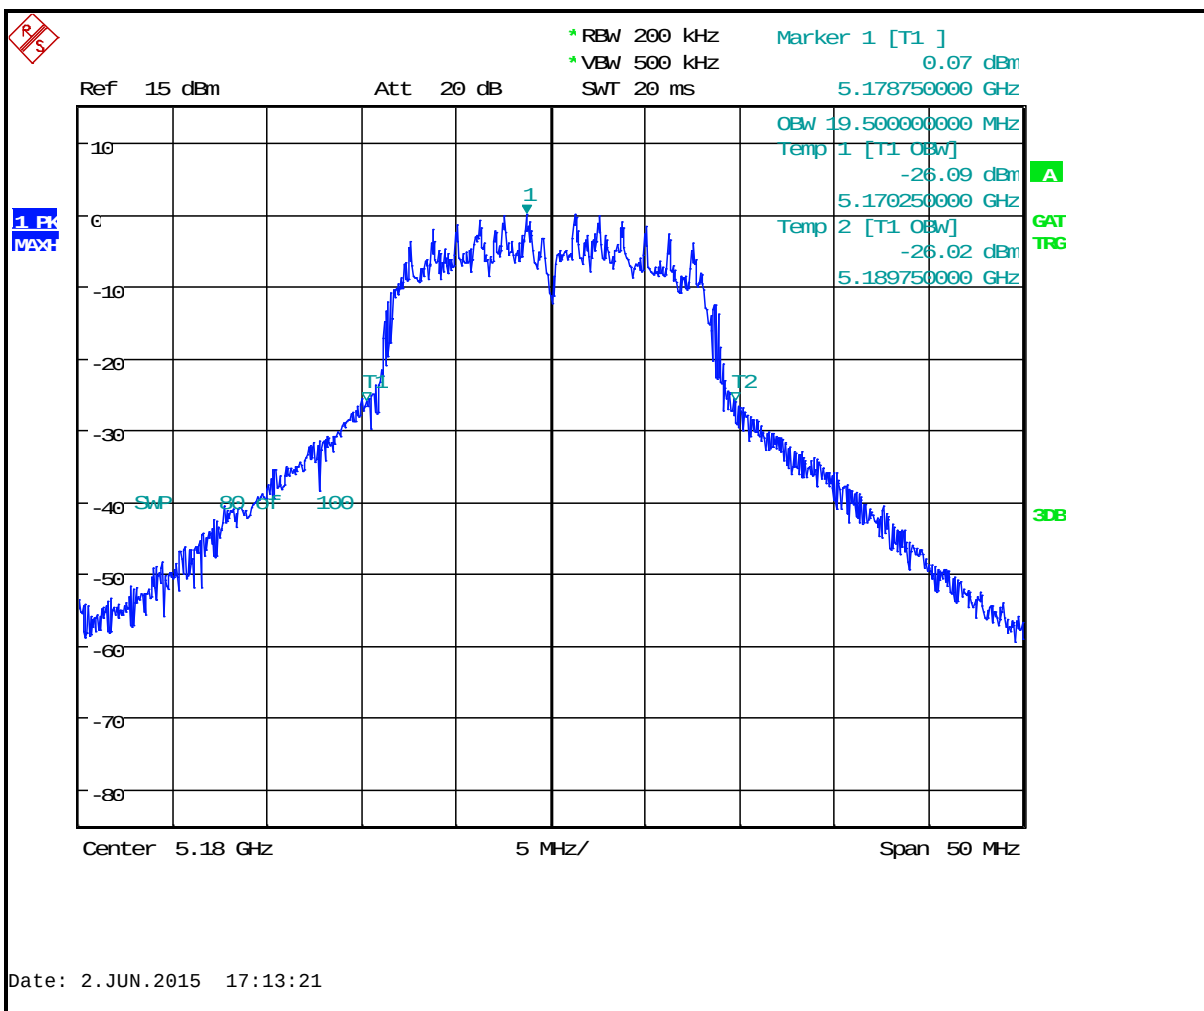

Plot 8-2: 26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11a

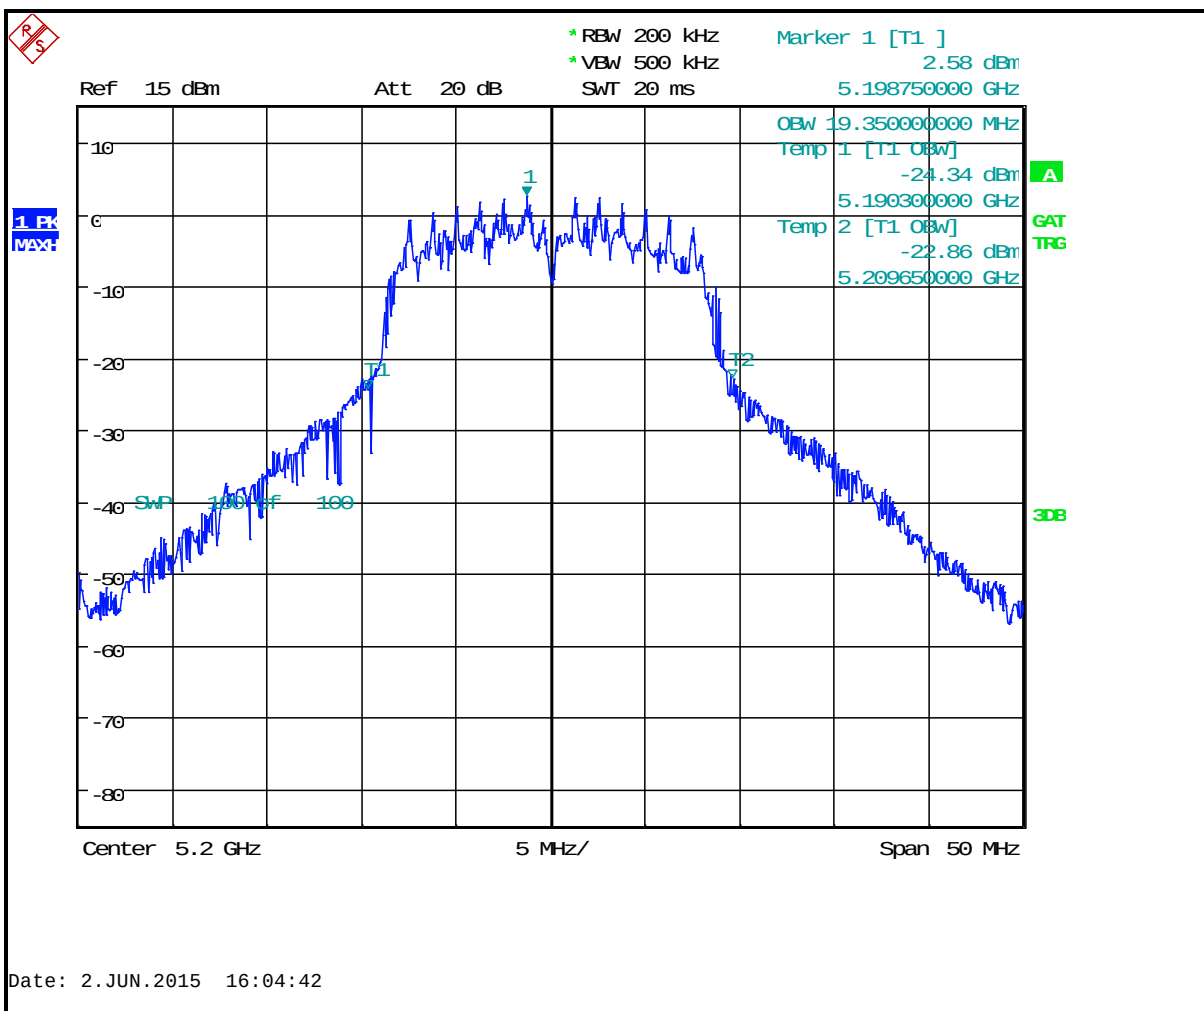

Ref 15 dBm Att 20 dB SWT 20 ms

Marker 1 [T1] 5.218800000 GHz 2.50 dBm

OBW 19.500000000 MHz

Temp 1 [T1 OBW] -23.09 dBm

5.210450000 GHz

Temp 2 [T1 OBW] -24.37 dBm

5.229950000 GHz

Center 5.22 GHz 5 MHz/ Span 50 MHz

1 PK MAX

1

2

3dB

40

50

60

70

80

90

100

110

120

130

140

150

160

170

180

190

200

210

220

230

240

250

260

270

280

290

300

310

320

330

340

350

360

370

380

390

400

410

420

430

440

450

460

470

480

490

500

510

520

530

540

550

560

570

580

590

600

610

620

630

640

650

660

670

680

690

700

710

720

730

740

750

760

770

780

790

800

810

820

830

840

850

860

870

880

890

900

910

920

930

940

950

960

970

980

990

1000

1010

1020

1030

1040

1050

1060

1070

1080

1090

1100

1110

1120

1130

1140

1150

1160

1170

1180

1190

1200

1210

1220

1230

1240

1250

1260

1270

1280

1290

1300

1310

1320

1330

1340

1350

1360

1370

1380

1390

1400

1410

1420

1430

1440

1450

1460

1470

1480

1490

1500

1510

1520

1530

1540

1550

1560

1570

1580

1590

1600

1610

1620

1630

1640

1650

1660

1670

1680

1690

1700

1710

1720

1730

1740

1750

1760

1770

1780

1790

1800

1810

1820

1830

1840

1850

1860

1870

1880

1890

1900

1910

1920

1930

1940

1950

1960

1970

1980

1990

2000

2010

2020

2030

2040

2050

2060

2070

2080

2090

2100

2110

2120

2130

2140

2150

2160

2170

2180

2190

2200

2210

2220

2230

2240

2250

2260

2270

2280

2290

2300

2310

2320

2330

2340

2350

2360

2370

2380

2390

2400

2410

2420

2430

2440

2450

2460

2470

2480

2490

2500

2510

2520

2530

2540

2550

2560

2570

2580

2590

2600

2610

2620

2630

2640

2650

2660

2670

2680

2690

2700

2710

2720

2730

2740

2750

2760

2770

2780

2790

2800

2810

2820

2830

2840

2850

2860

2870

2880

2890

2900

2910

2920

2930

2940

2950

2960

2970

2980

2990

3000

3010

3020

3030

3040

3050

3060

3070

3080

3090

3100

3110

3120

3130

3140

3150

3160

3170

3180

3190

3200

3210

3220

3230

3240

3250

3260

3270

3280

3290

3300

3310

3320

3330

3340

3350

3360

3370

3380

3390

3400

3410

3420

3430

3440

3450

3460

3470

3480

3490

3500

3510

3520

3530

3540

3550

3560

3570

3580

3590

3600

3610

3620

3630

3640

3650

3660

3670

3680

3690

3700

3710

3720

3730

3740

3750

3760

3770

3780

3790

3800

3810

3820

3830

3840

3850

3860

3870


3880

3890


3900

3910


Plot 8-4: 26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11a

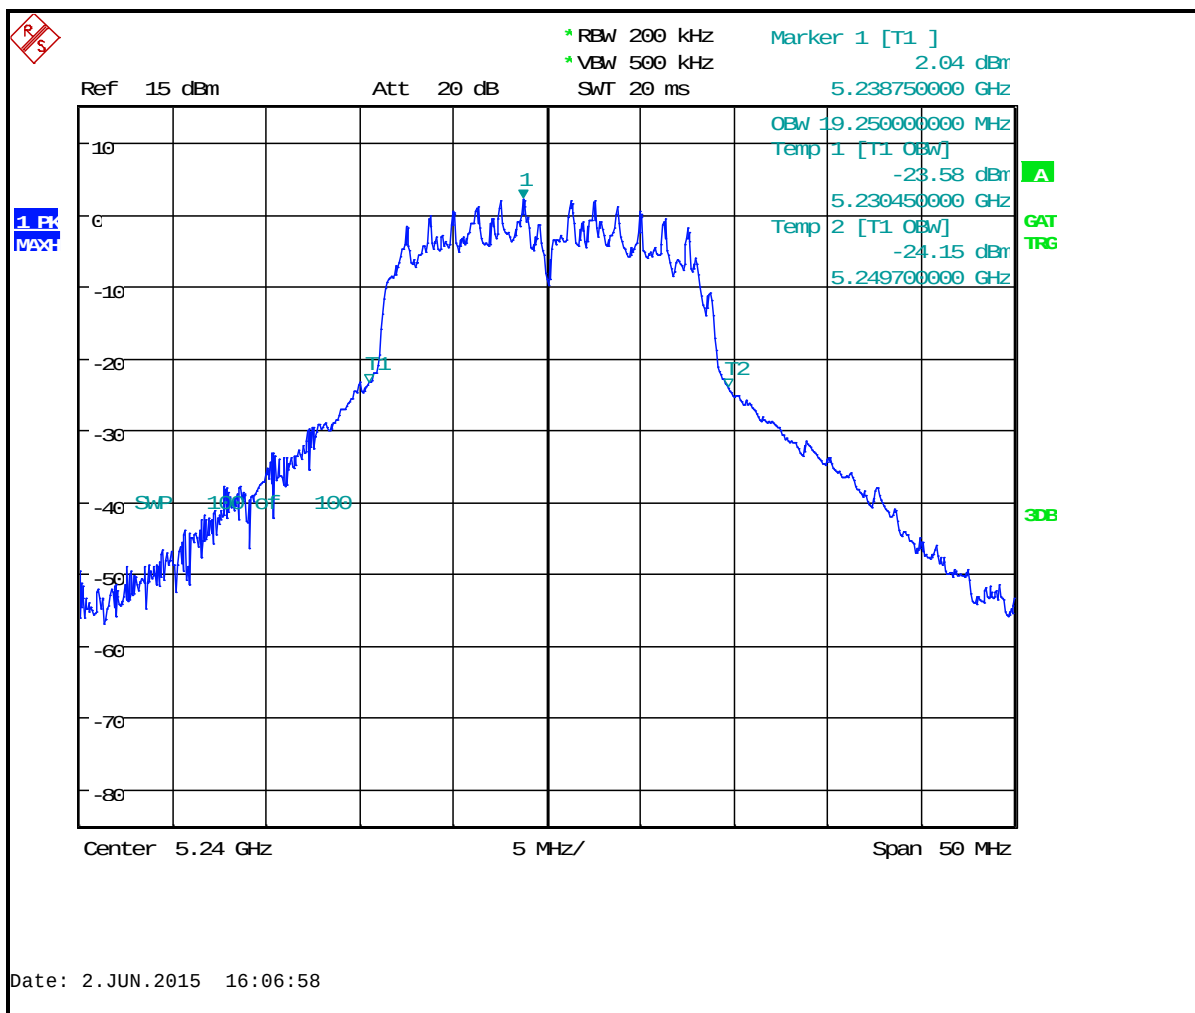


Plot 8-5: 26 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11a

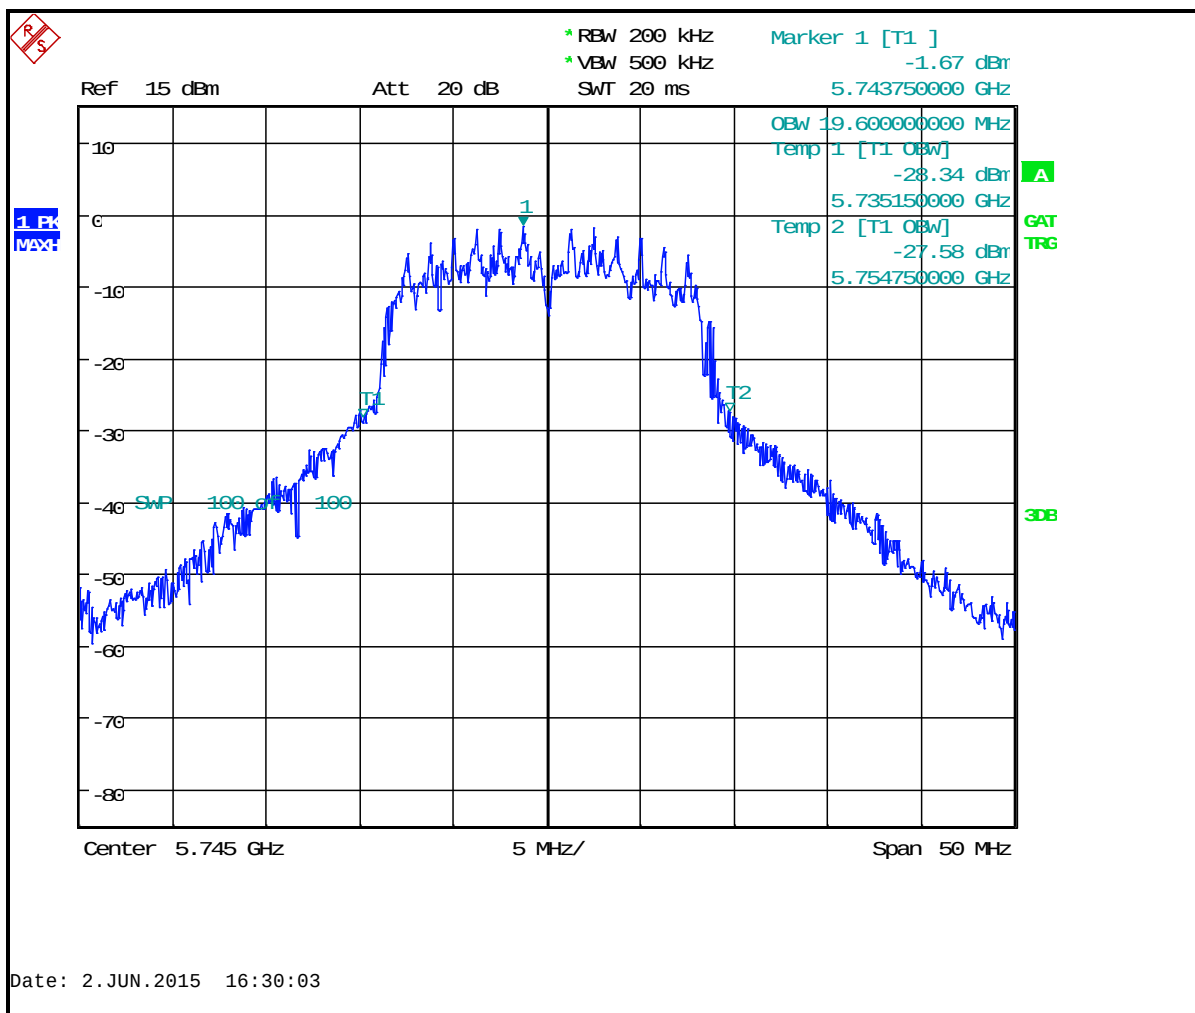


Plot 8-6: 26 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11a

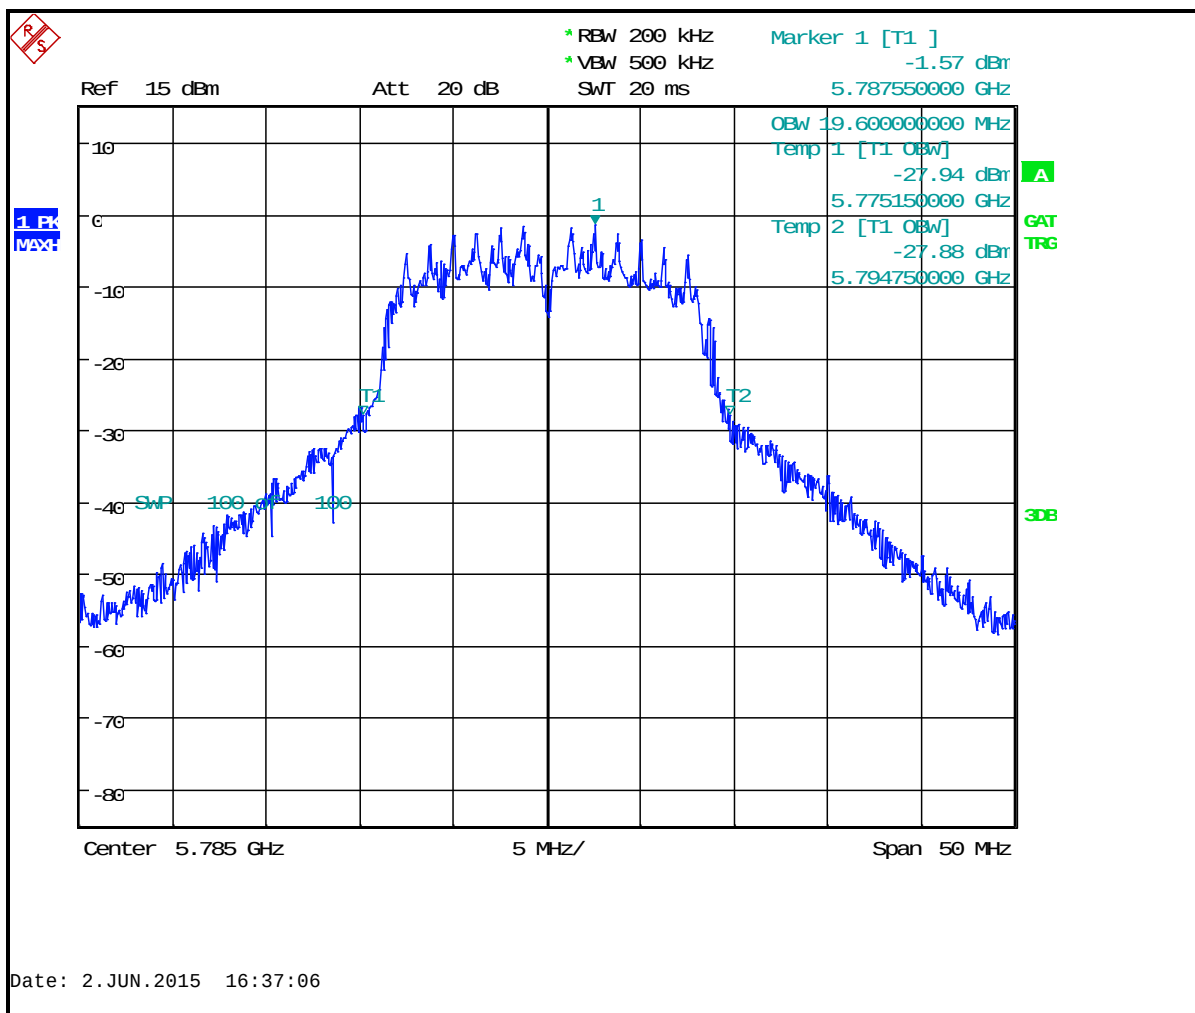


Plot 8-8: 26 dB Bandwidth Channel 36 (TX Frequency 5180 MHz) - 802.11n

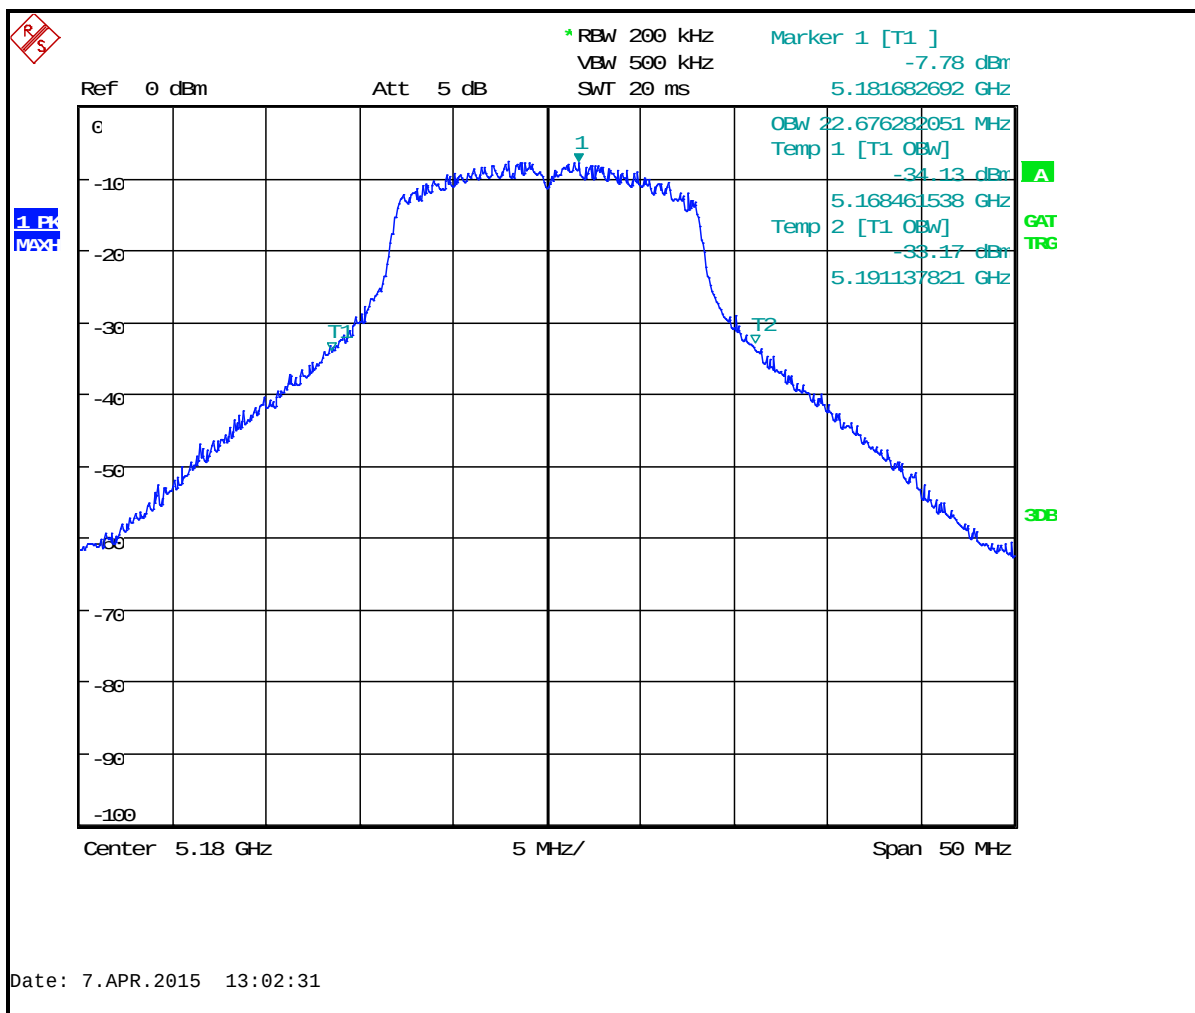


Plot 8-9: 26 dB Bandwidth Channel 40 (TX Frequency 5200 MHz) - 802.11n

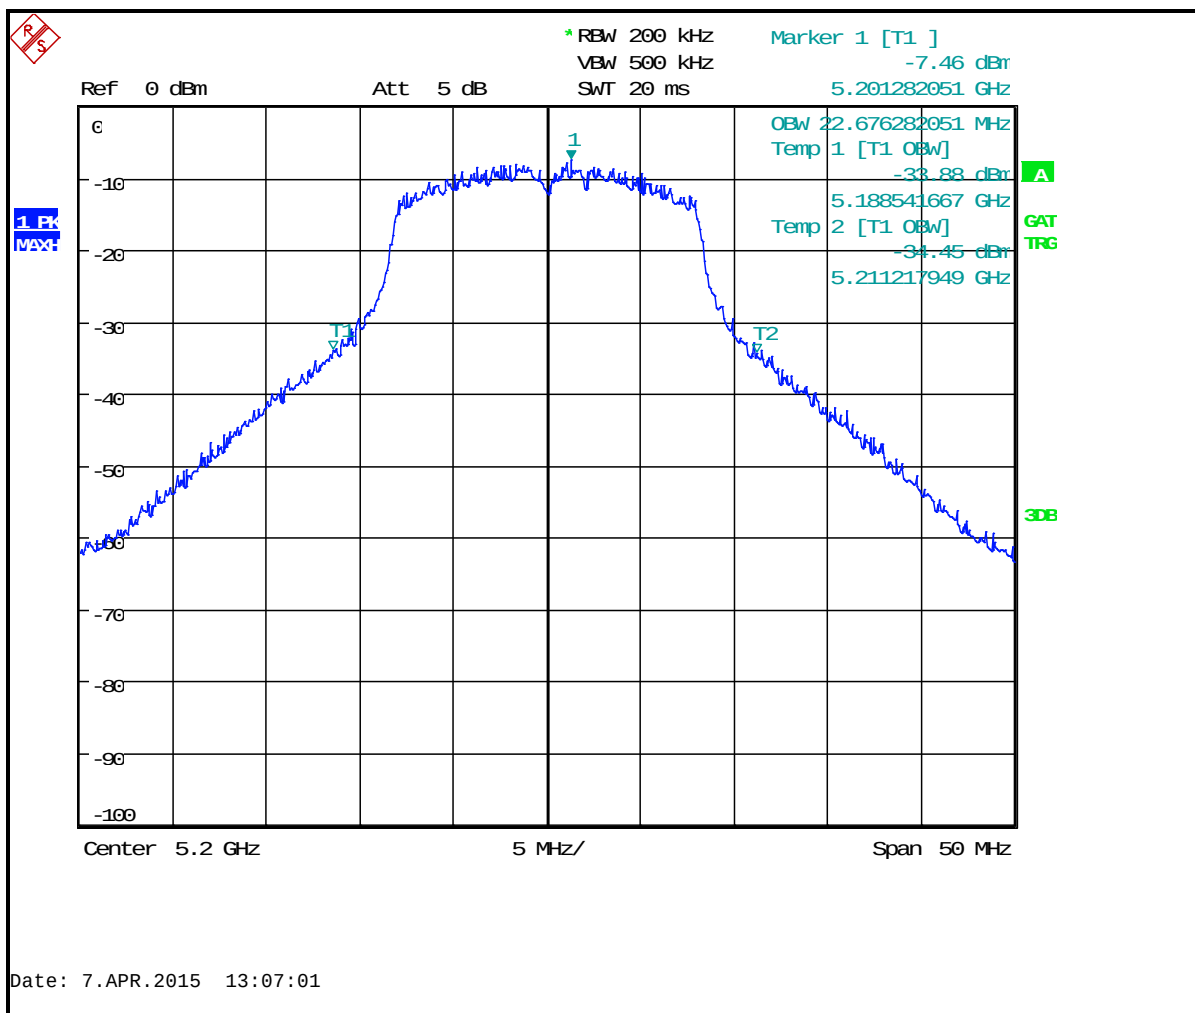


Plot 8-10: 26 dB Bandwidth Channel 44 (TX Frequency 5220 MHz) - 802.11n

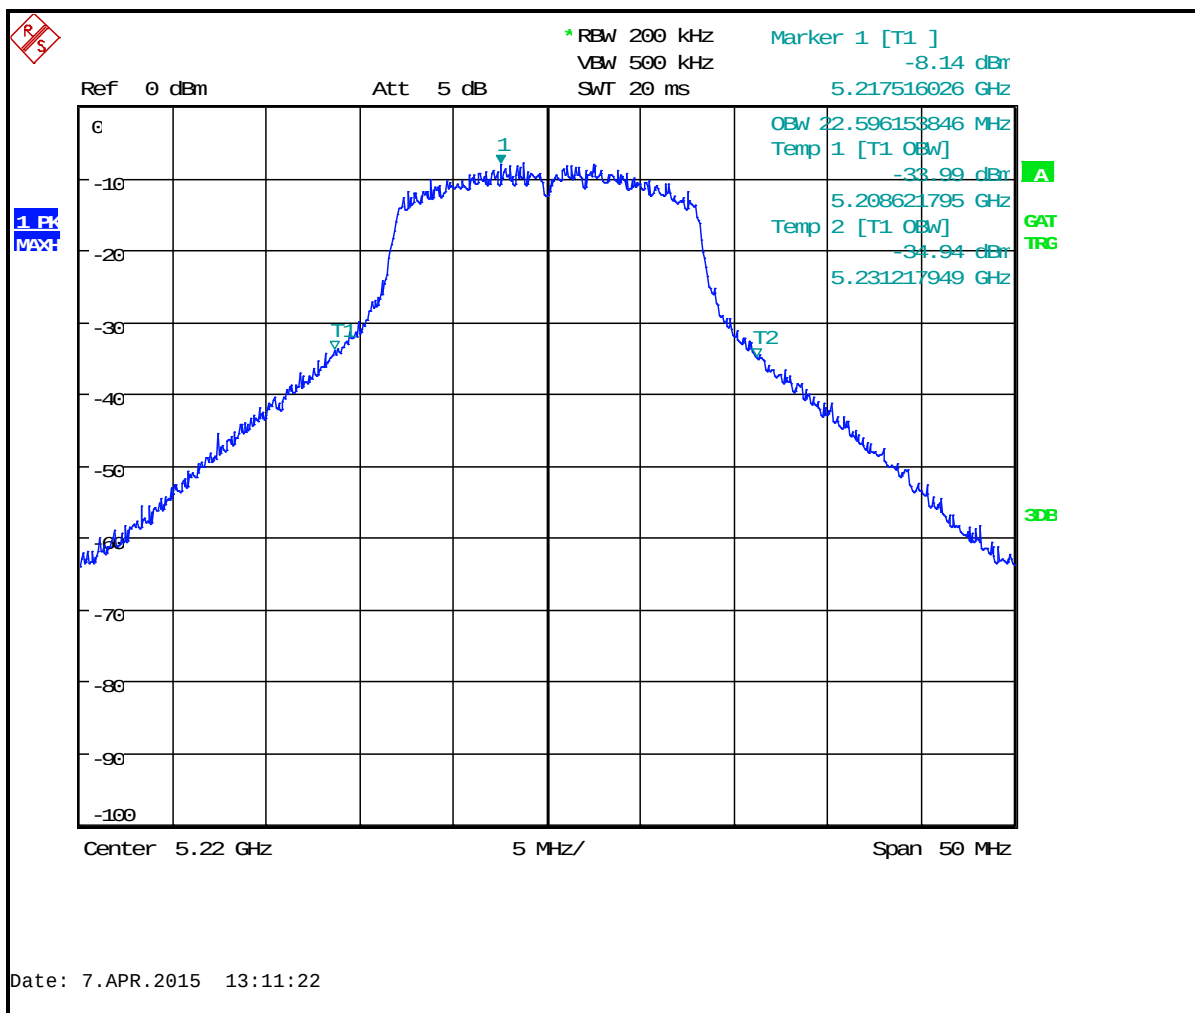


Plot 8-11: 26 dB Bandwidth Channel 48 (TX Frequency 5240 MHz) - 802.11n

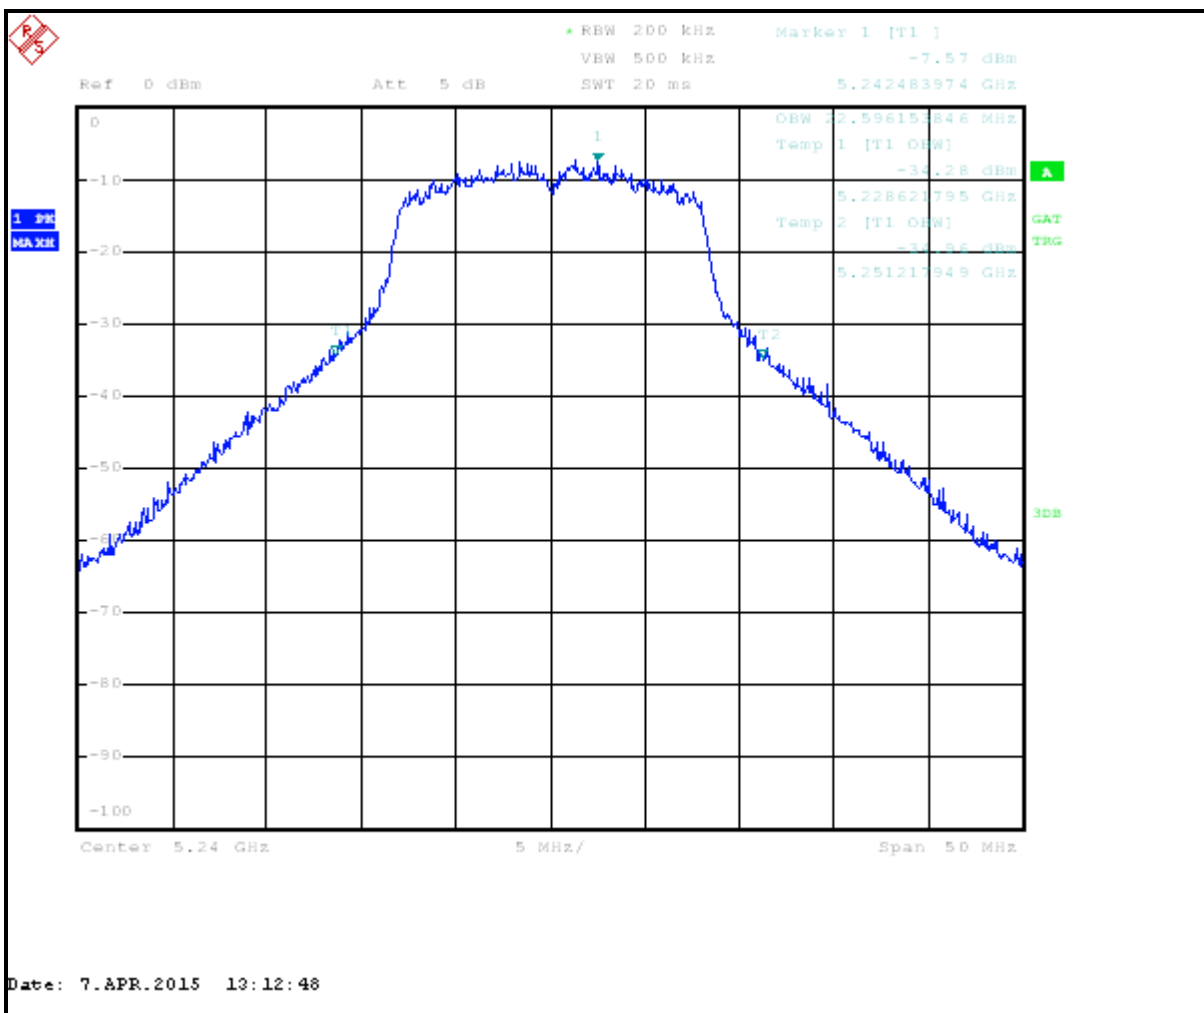


Plot 8-12: 26 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11n

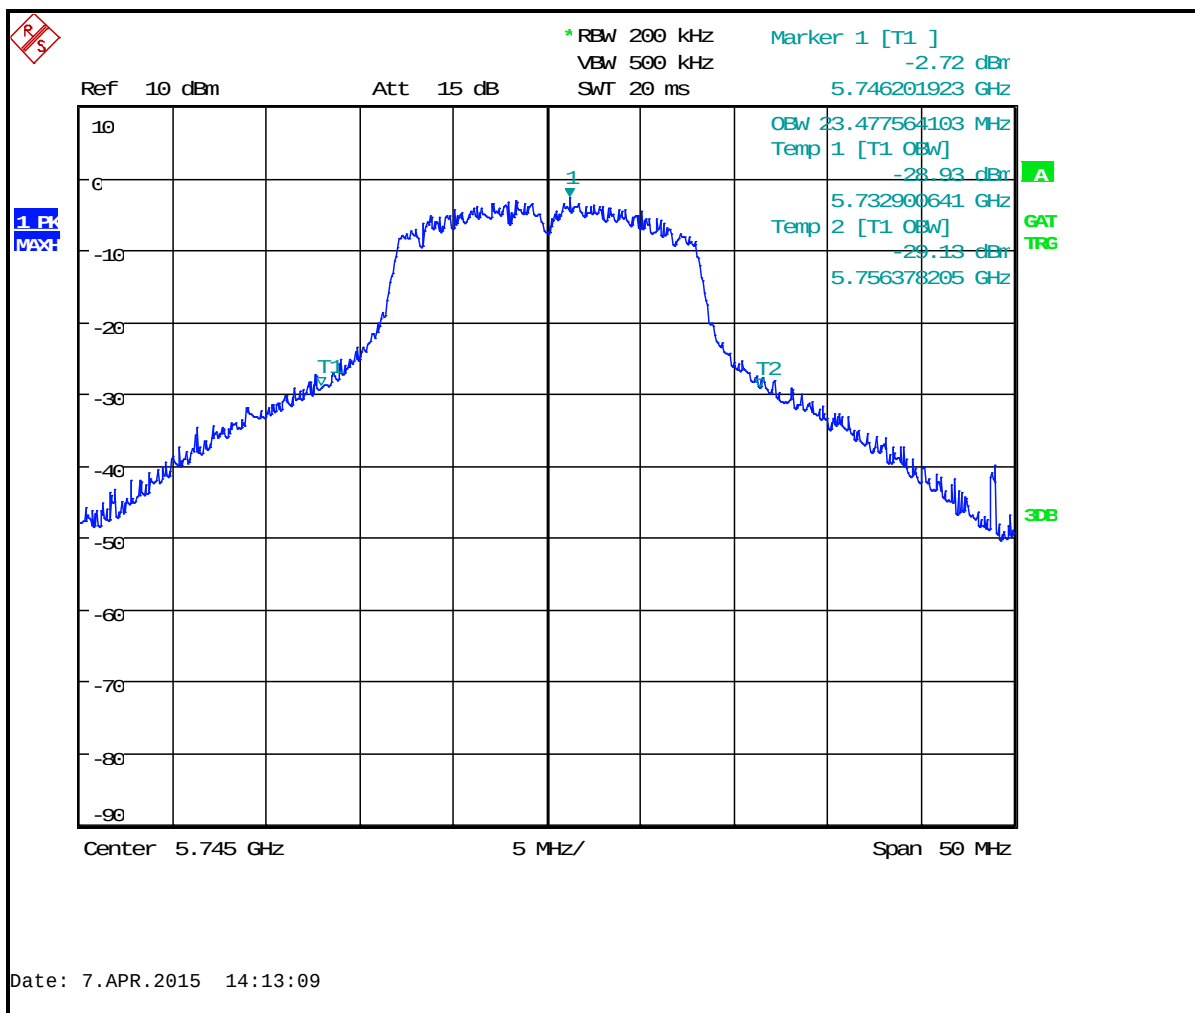


Plot 8-13: 26 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11n

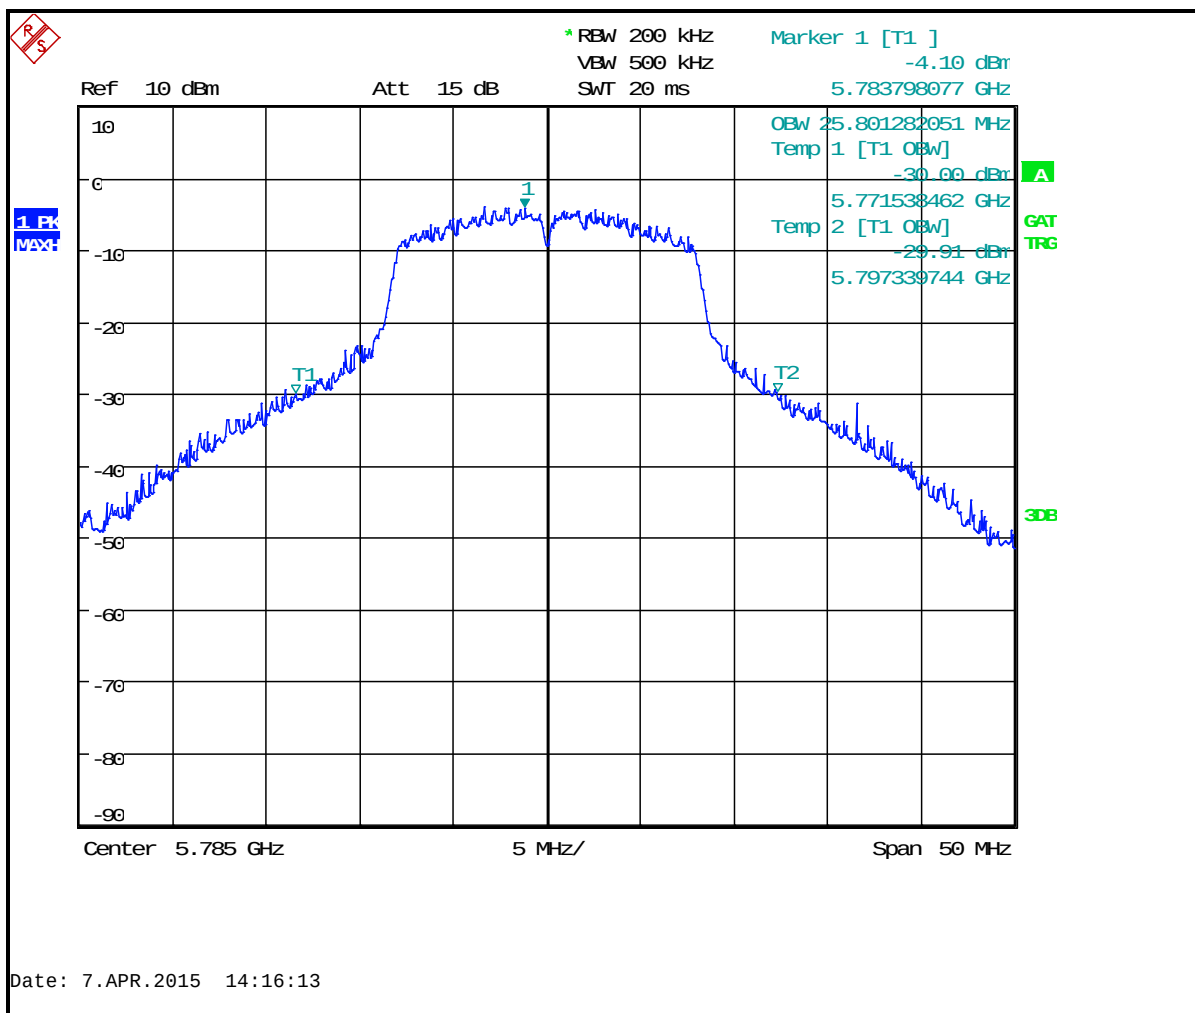


Plot 8-14: 26 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11n

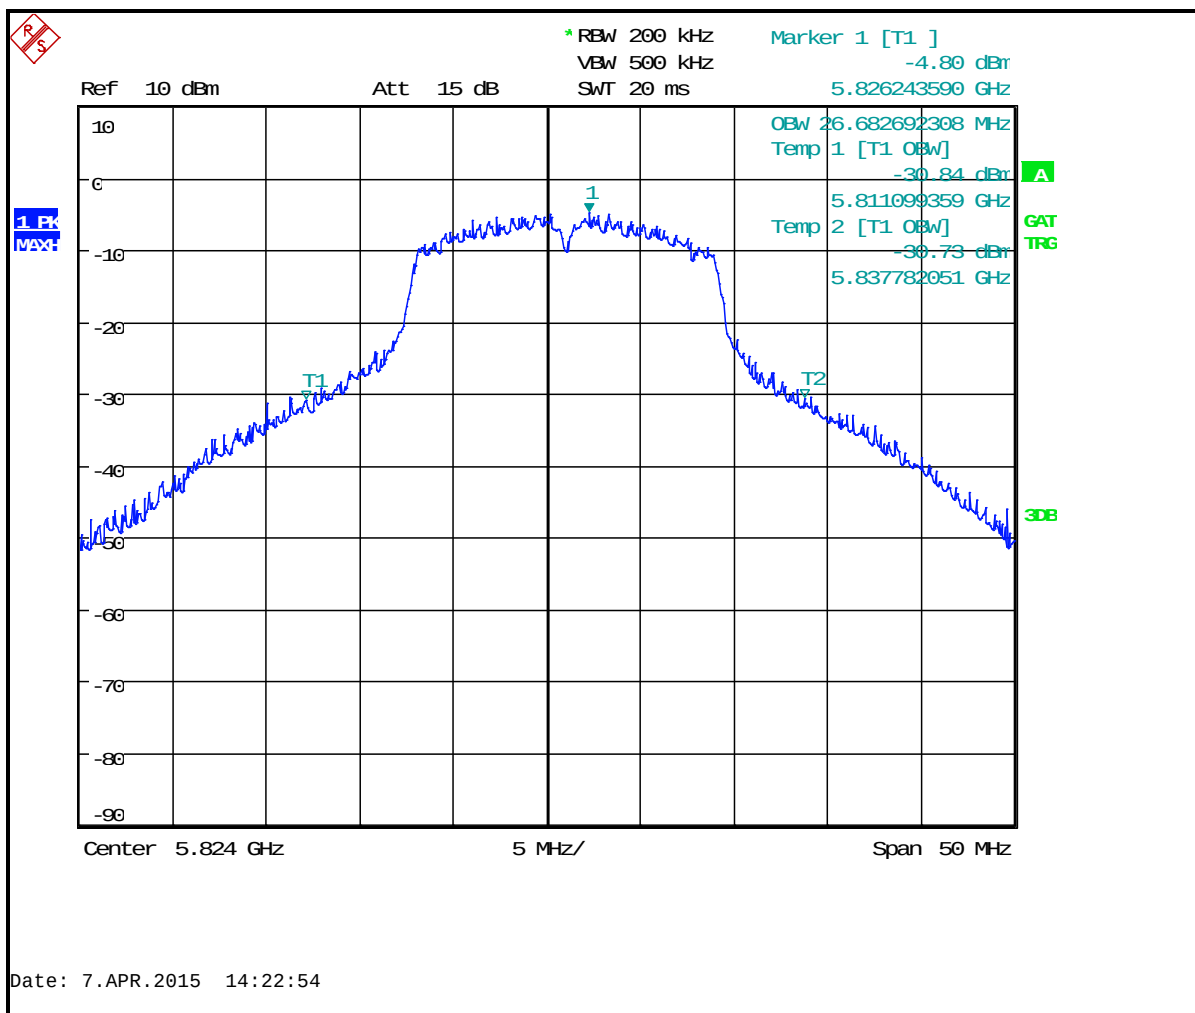


Plot 8-15: 26 dB Bandwidth (Frequency 5190 MHz) - 802.11a (40 MHz BW, 36 Mbps)

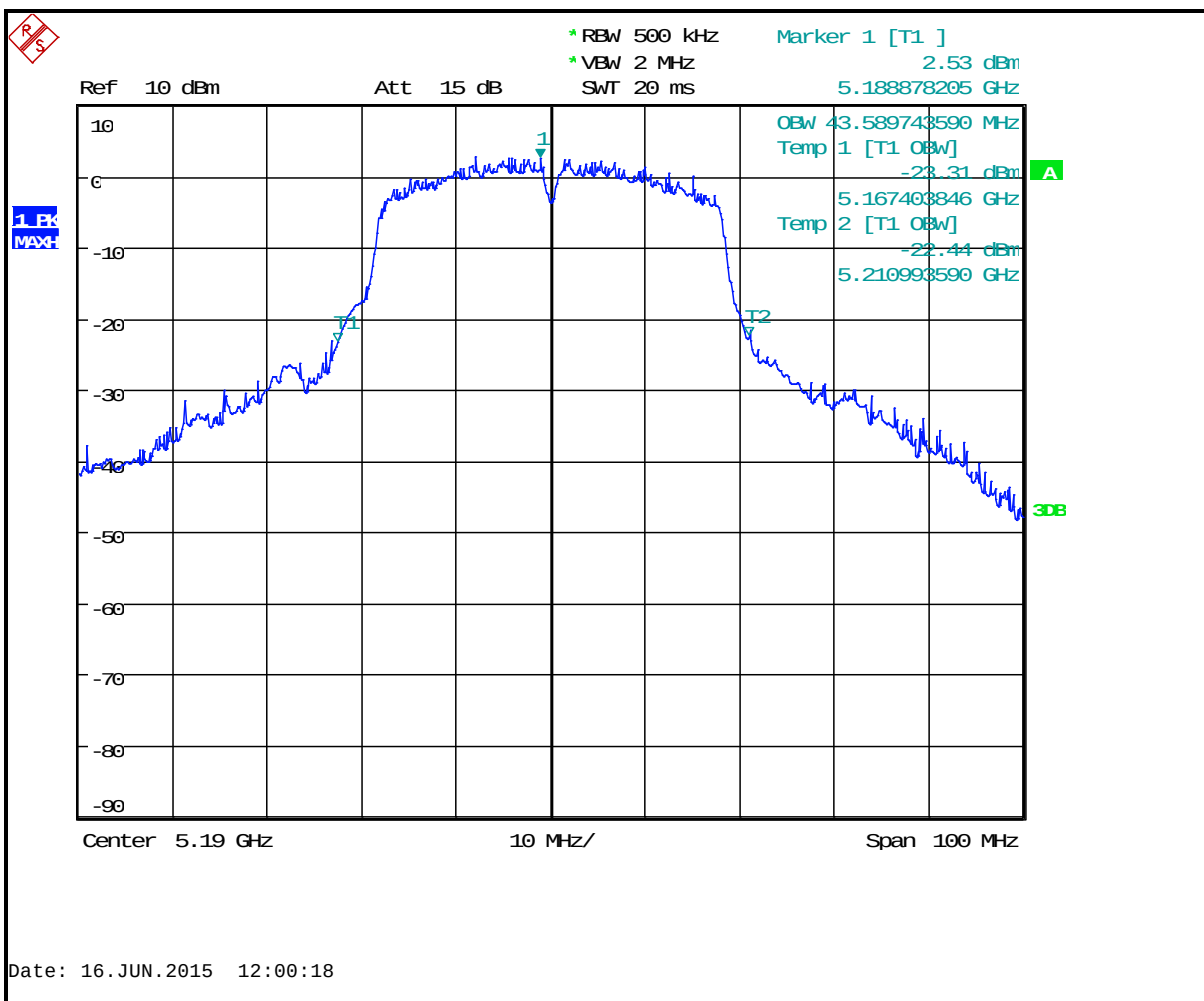


Plot 8-16: 26 dB Bandwidth (Frequency 5210 MHz) - 802.11a (40 MHz BW, 36 Mbps)

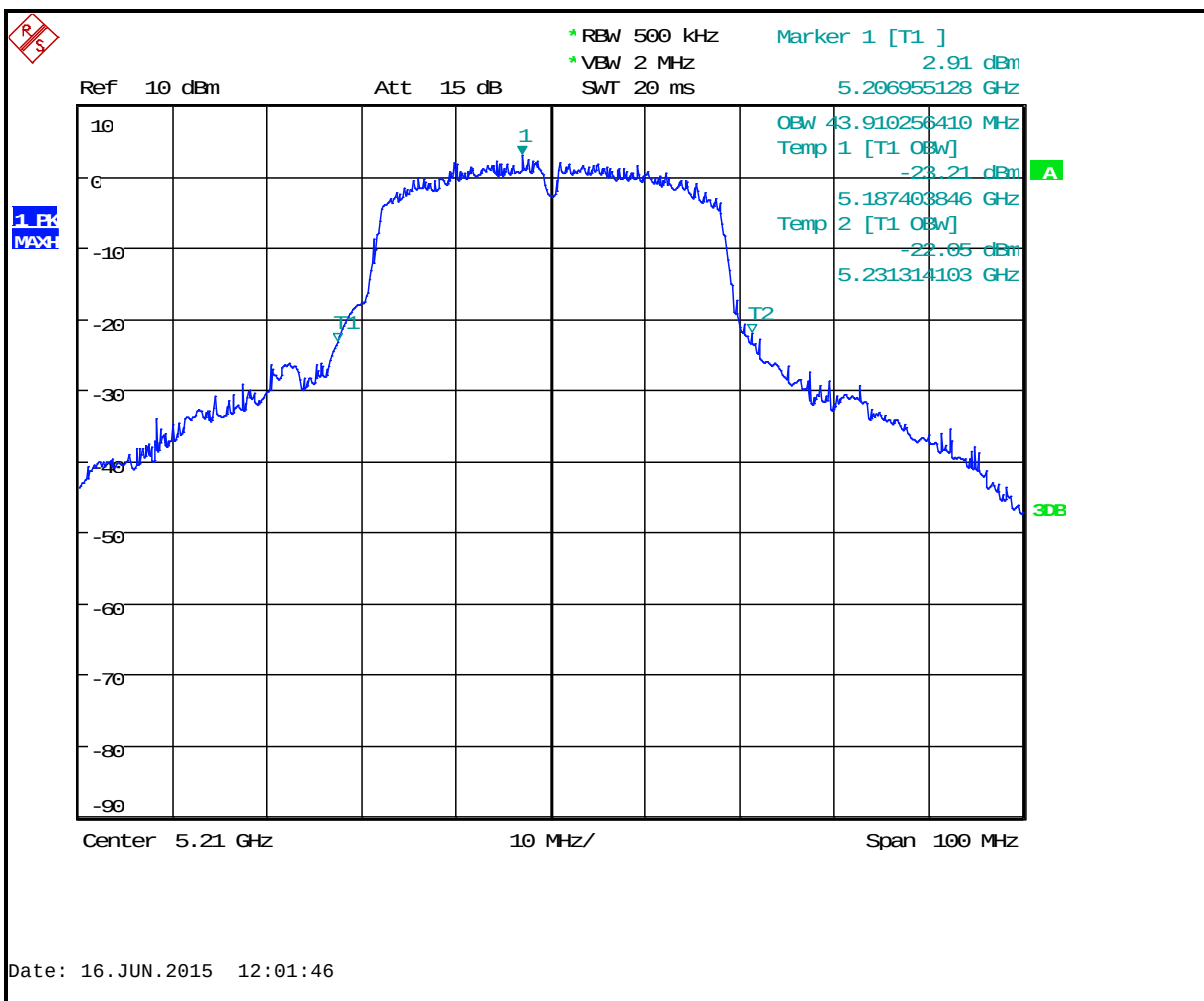


Plot 8-17: 26 dB Bandwidth (Frequency 5230 MHz) - 802.11a (40 MHz BW, 36 Mbps)

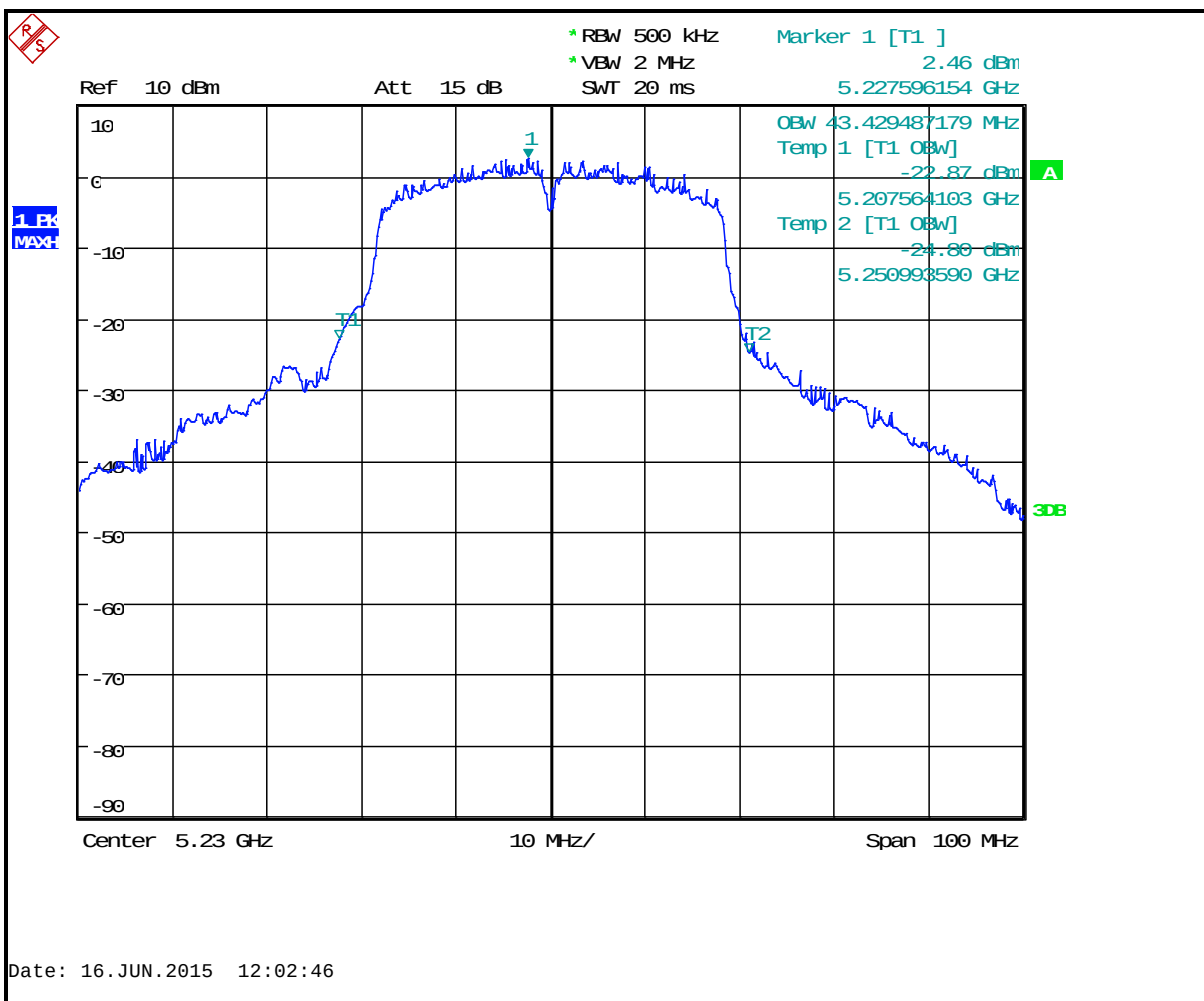


Plot 8-18: 26 dB Bandwidth (Frequency 5755 MHz) - 802.11a (40 MHz BW, 36 Mbps)

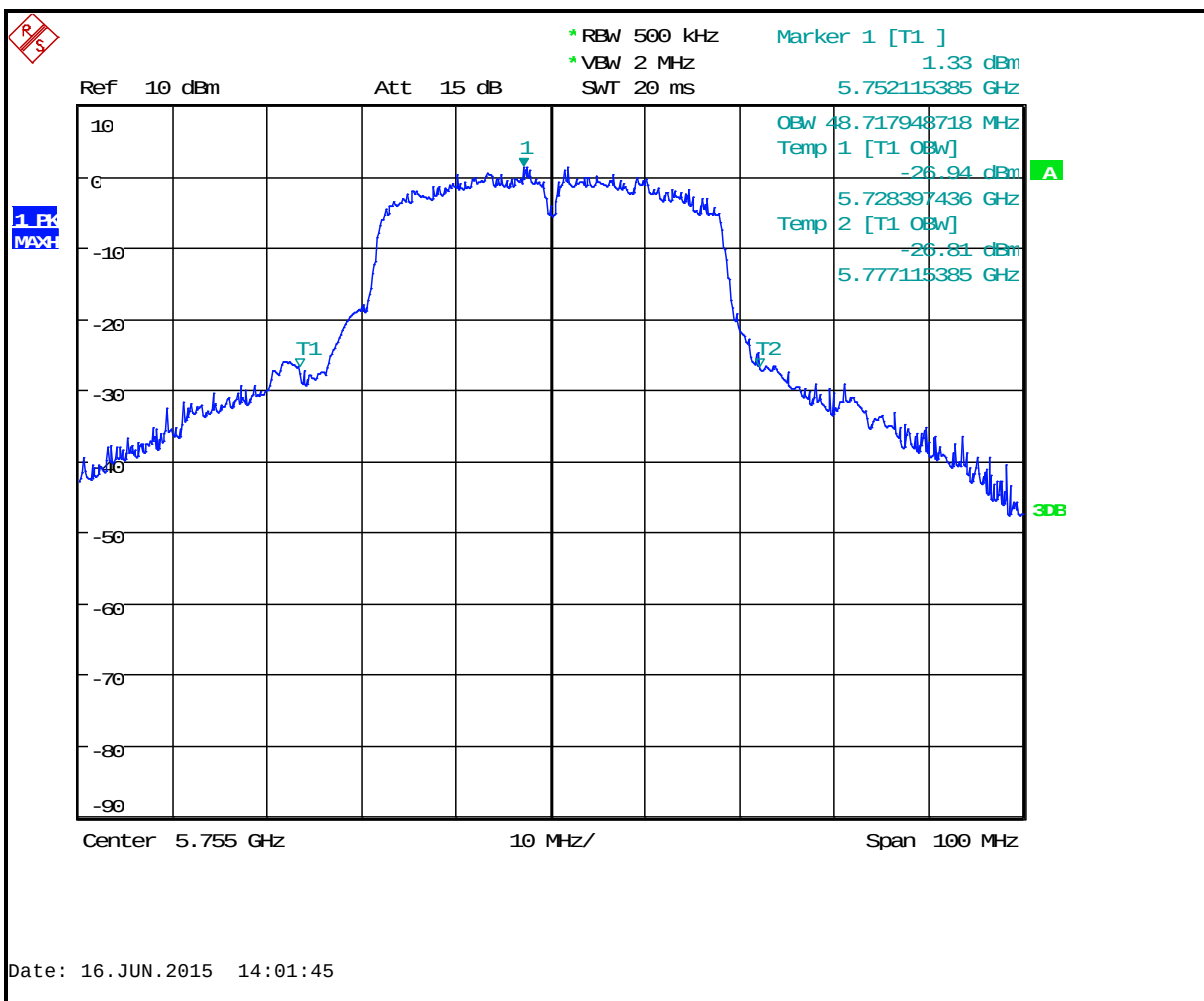


Plot 8-19: 26 dB Bandwidth (Frequency 5795 MHz) - 802.11a (40 MHz BW, 36 Mbps)

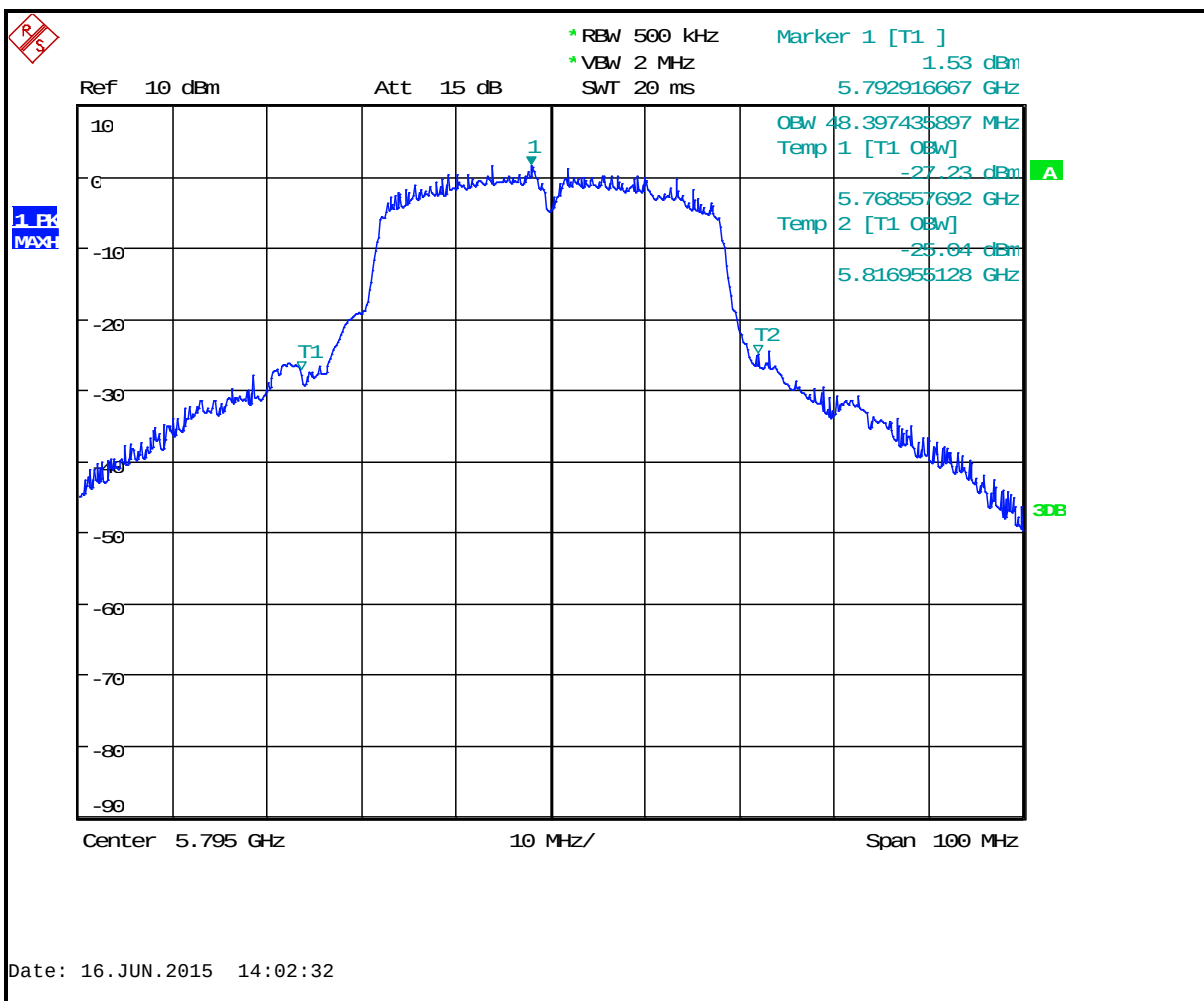


Plot 8-20: 26 dB Bandwidth (Frequency 5815 MHz) - 802.11a (40 MHz BW, 36 Mbps)

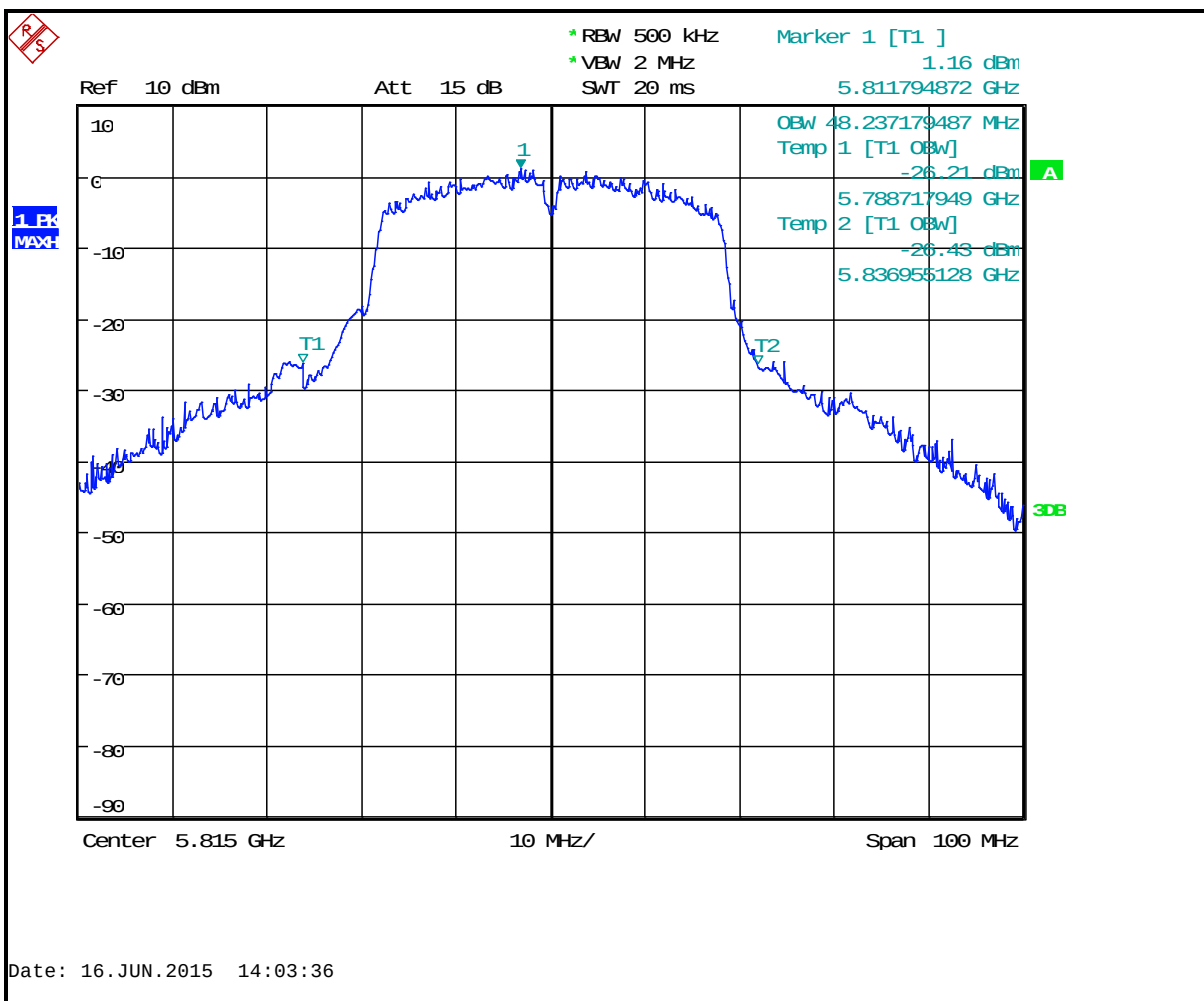


Plot 8-21: 26 dB Bandwidth (Frequency 5190 MHz) - 802.11n (40 MHz BW)

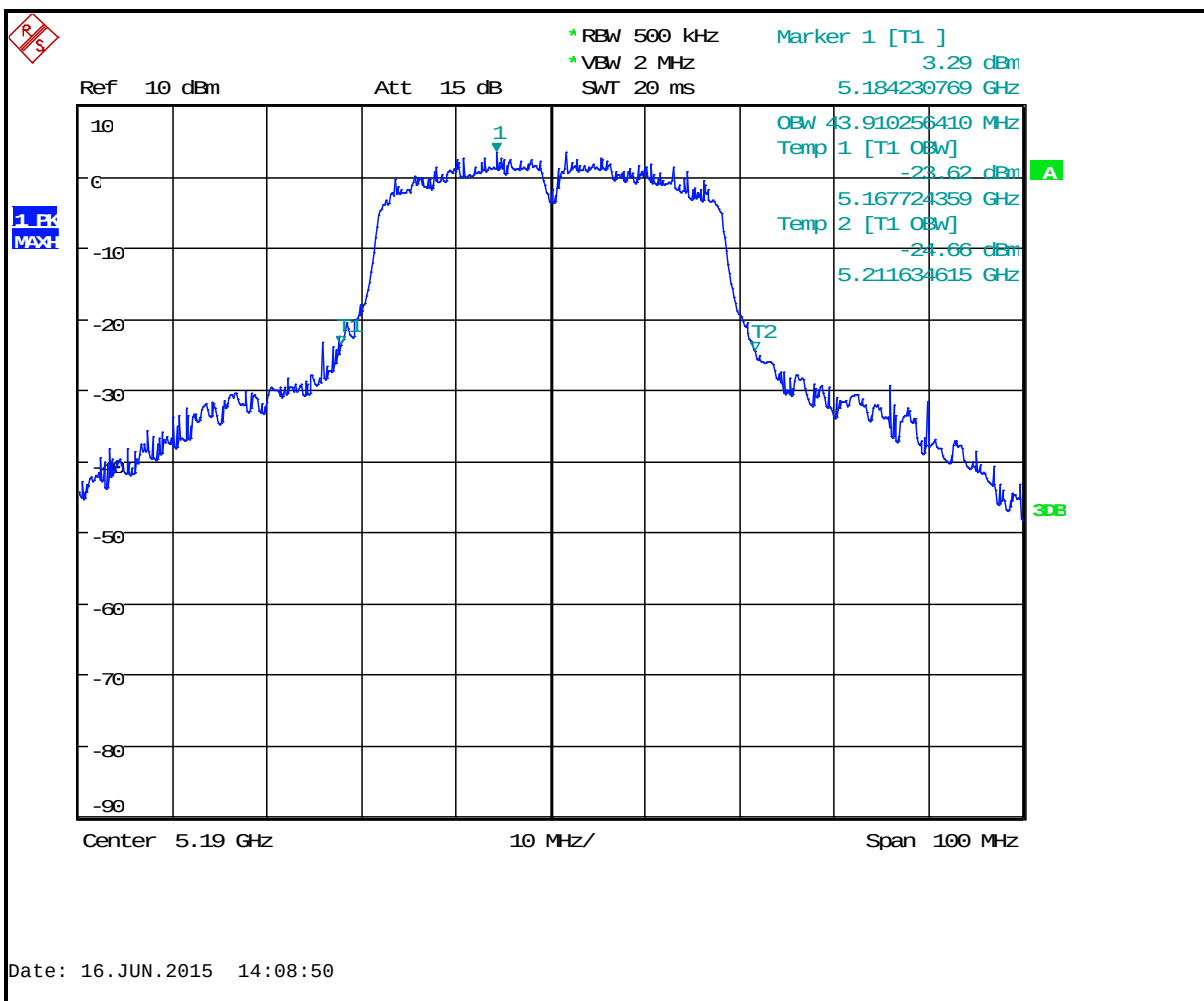


Plot 8-22: 26 dB Bandwidth (Frequency 5210 MHz) - 802.11n (40 MHz BW)

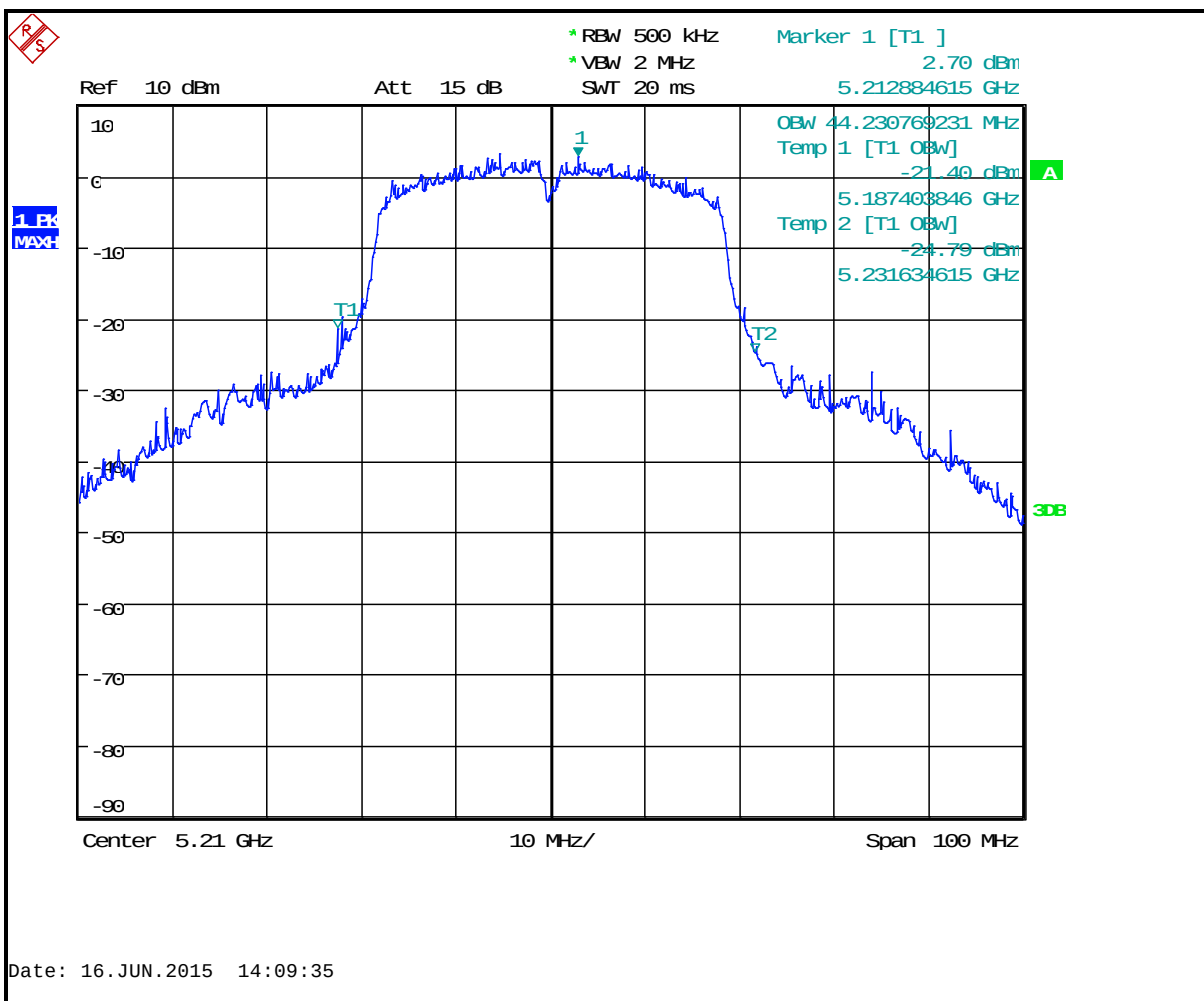


Plot 8-23: 26 dB Bandwidth (Frequency 5230 MHz) - 802.11n (40 MHz BW)

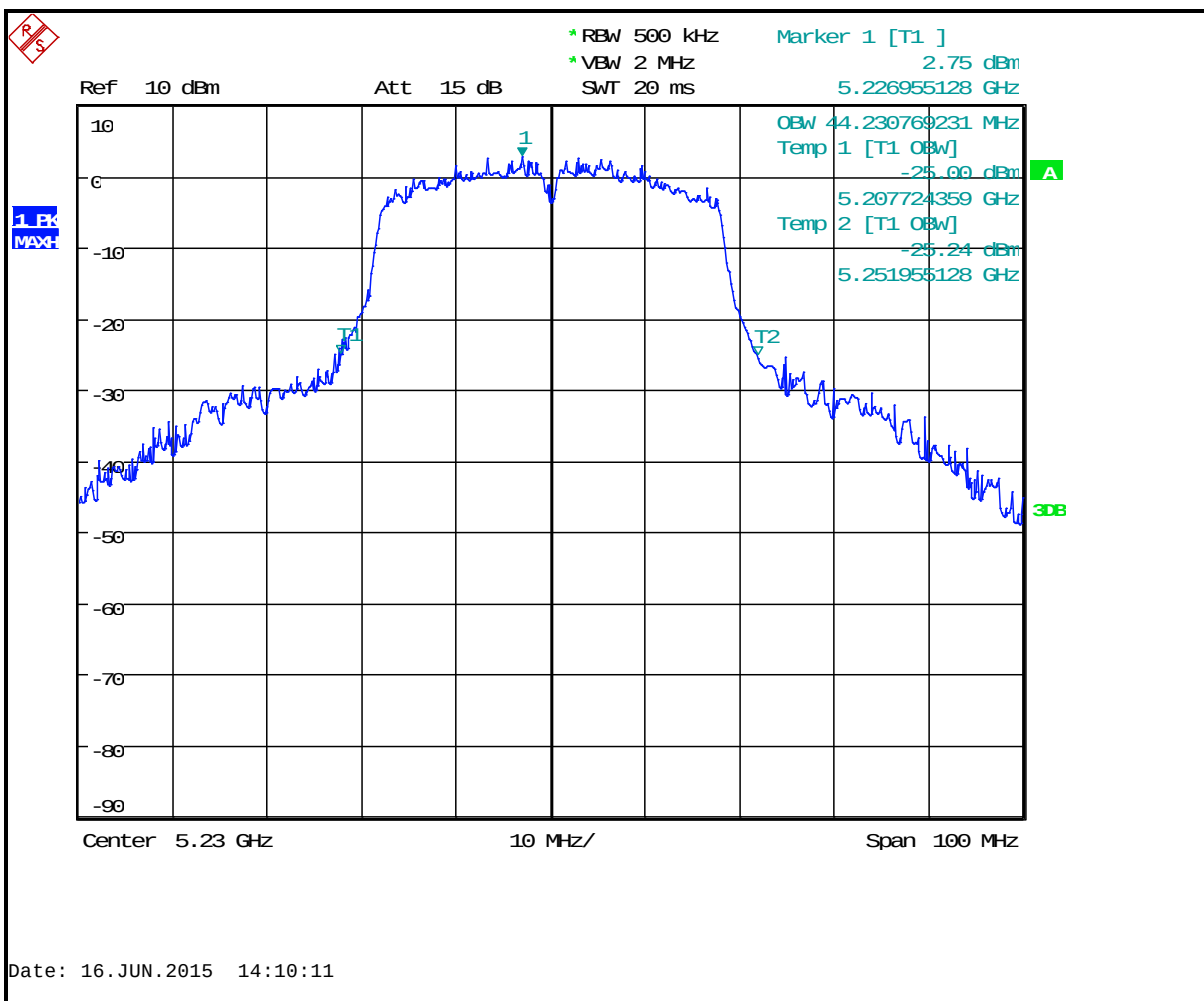


Plot 8-24: 26 dB Bandwidth (Frequency 5250 MHz) - 802.11n (40 MHz BW)

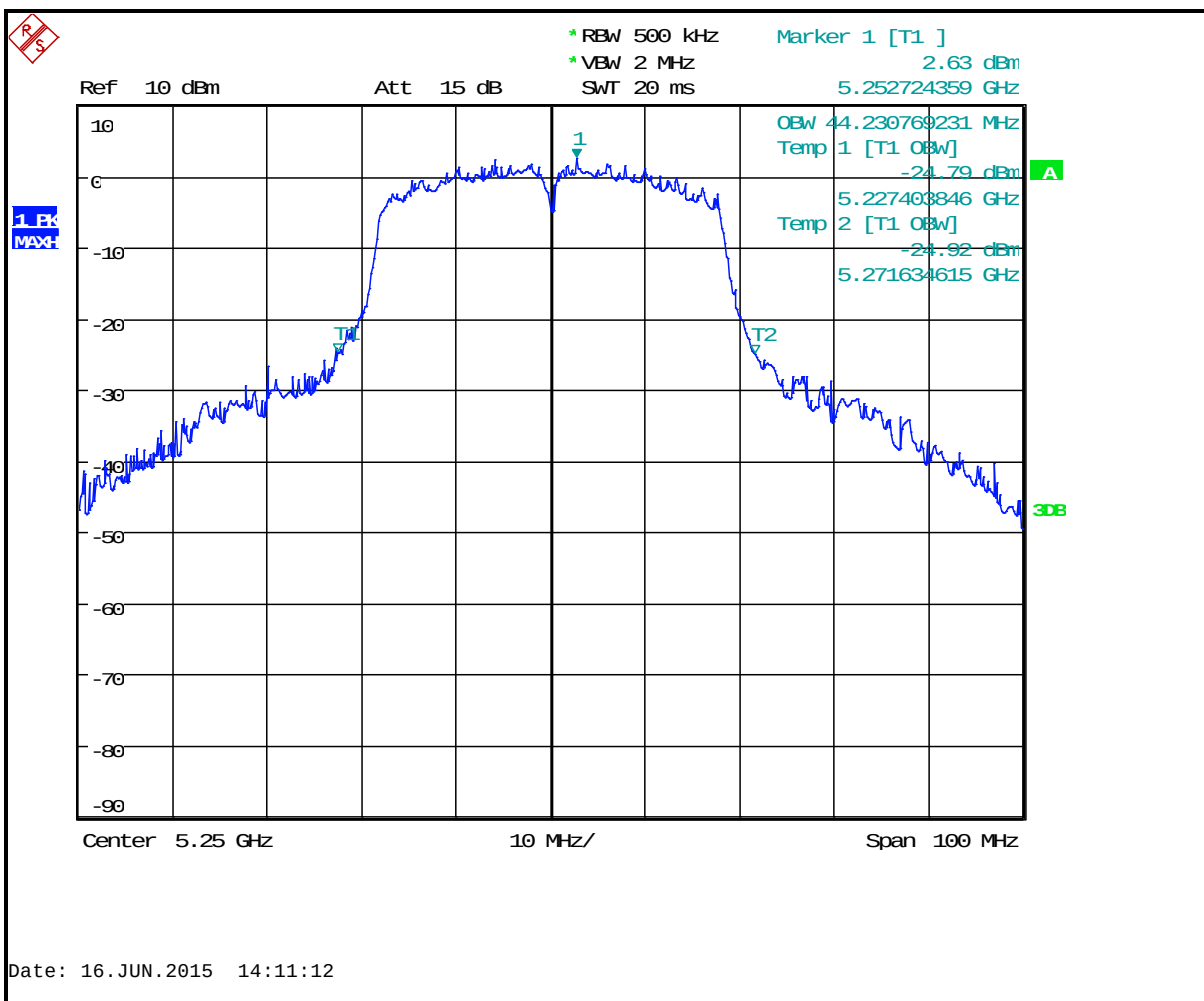


Plot 8-25: 26 dB Bandwidth (Frequency 5755 MHz) - 802.11n (40 MHz BW)

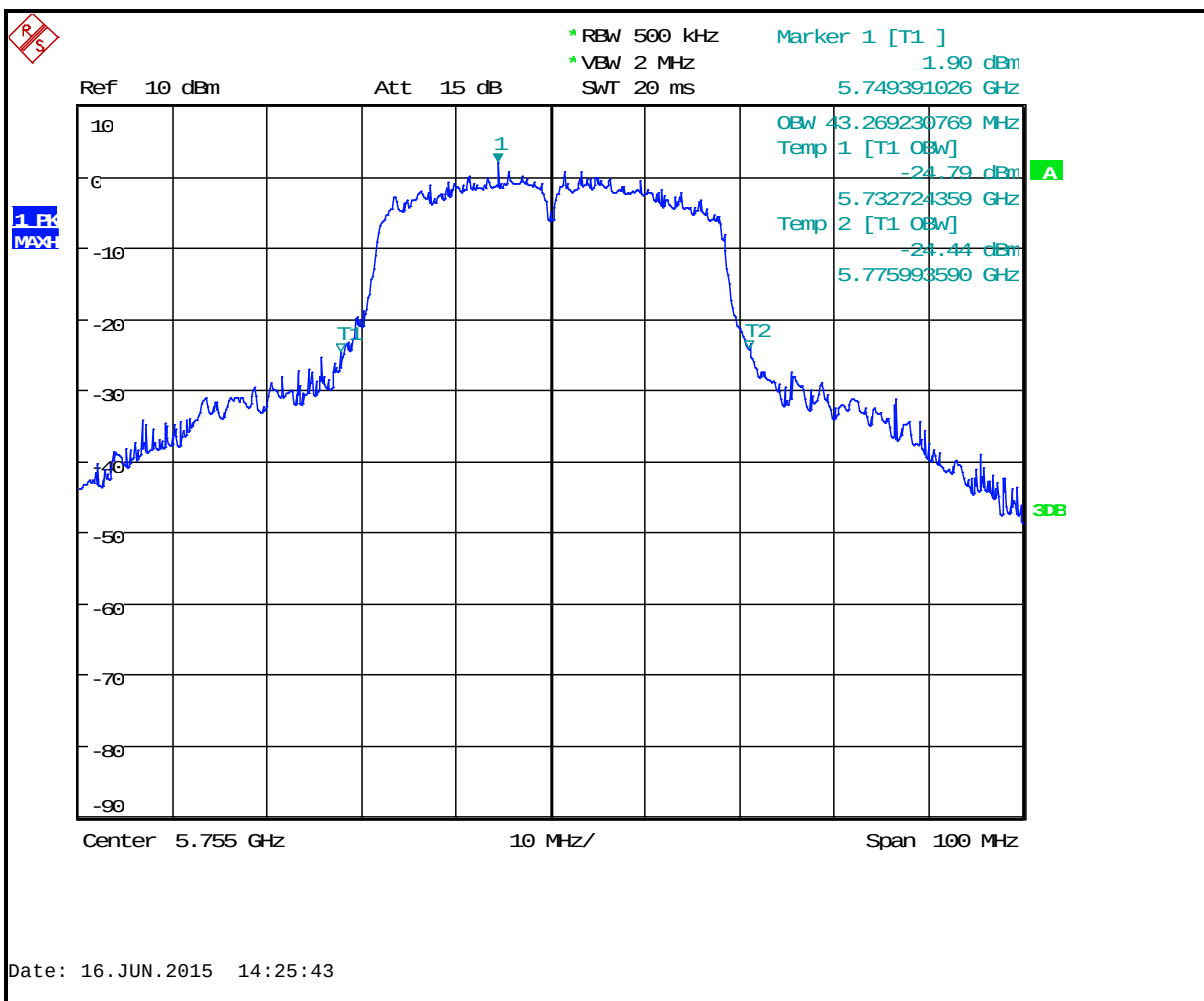


Plot 8-26: 26 dB Bandwidth (Frequency 5795 MHz) - 802.11n (40 MHz BW)

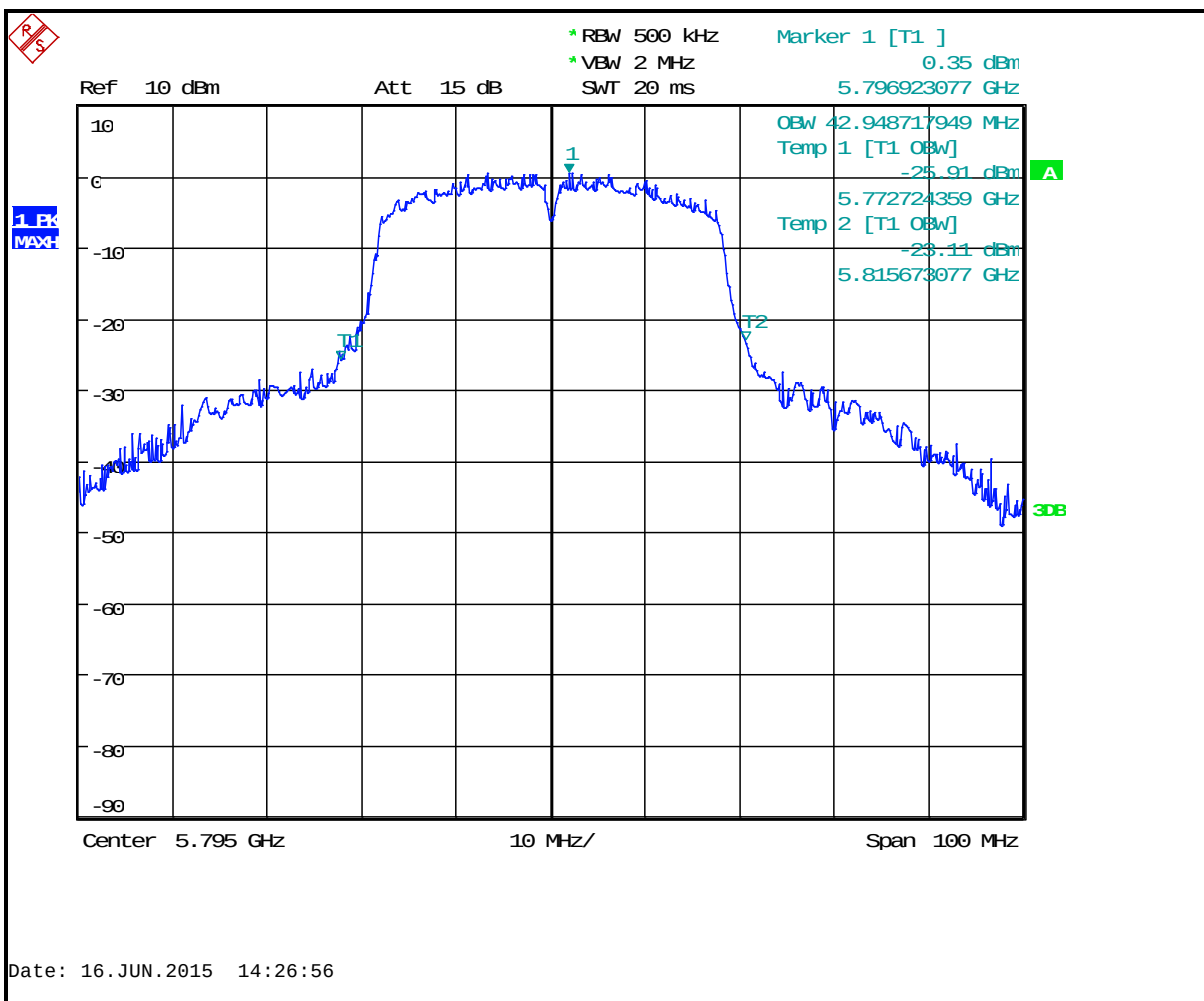


Plot 8-27: 26 dB Bandwidth (Frequency 5815 MHz) - 802.11n (40 MHz BW)

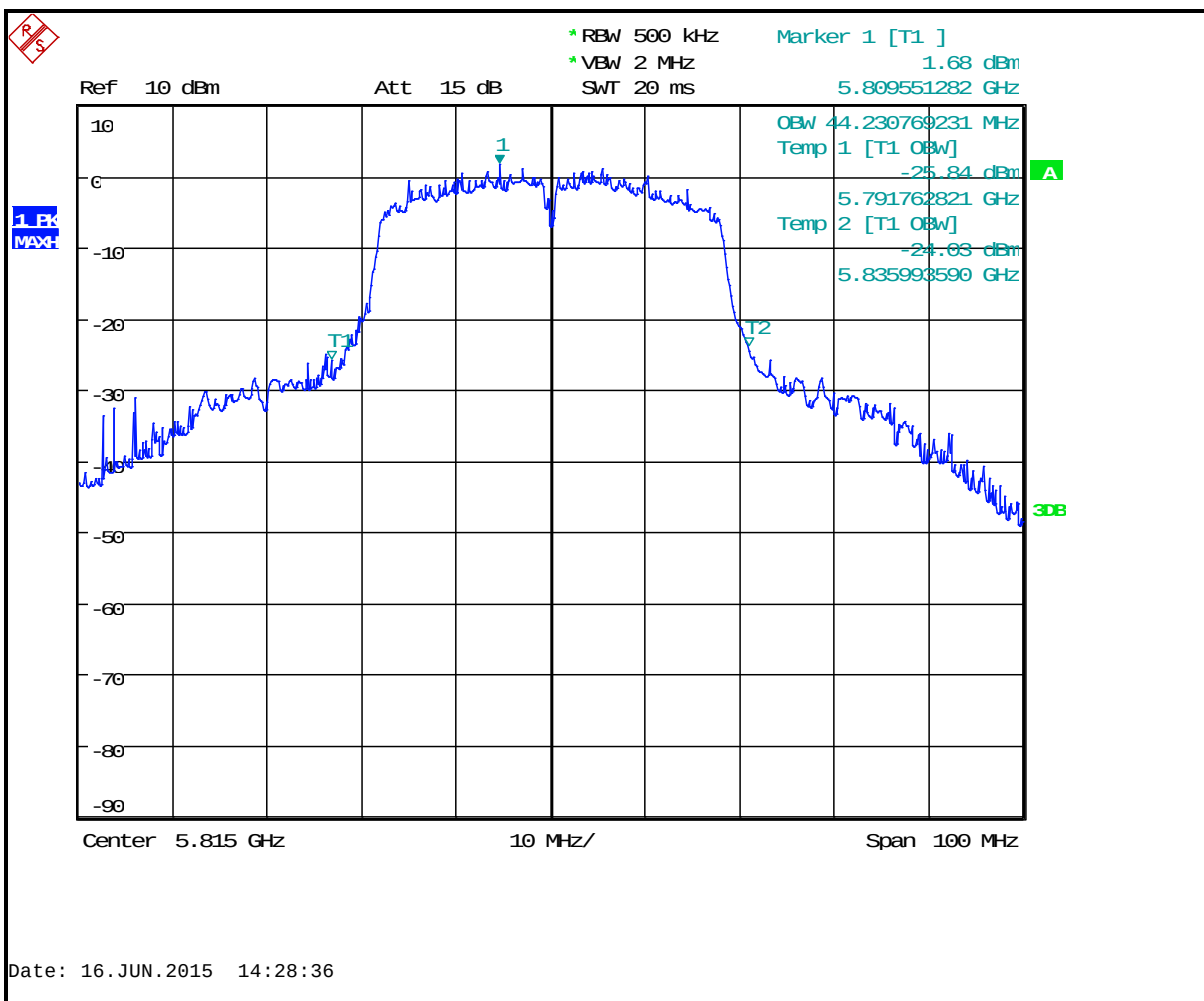


Plot 8-28: 6 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11a

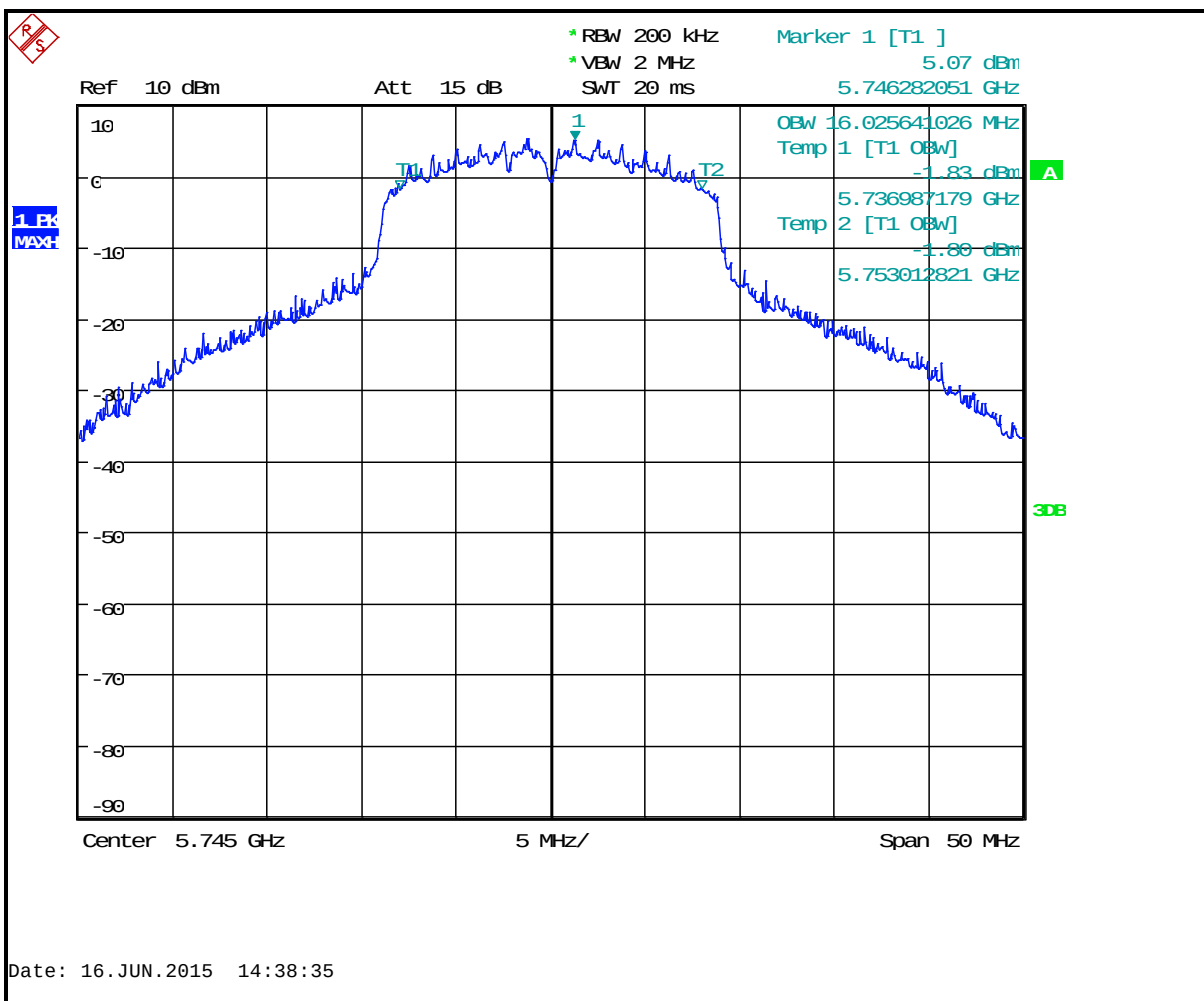


Plot 8-29: 6 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11a

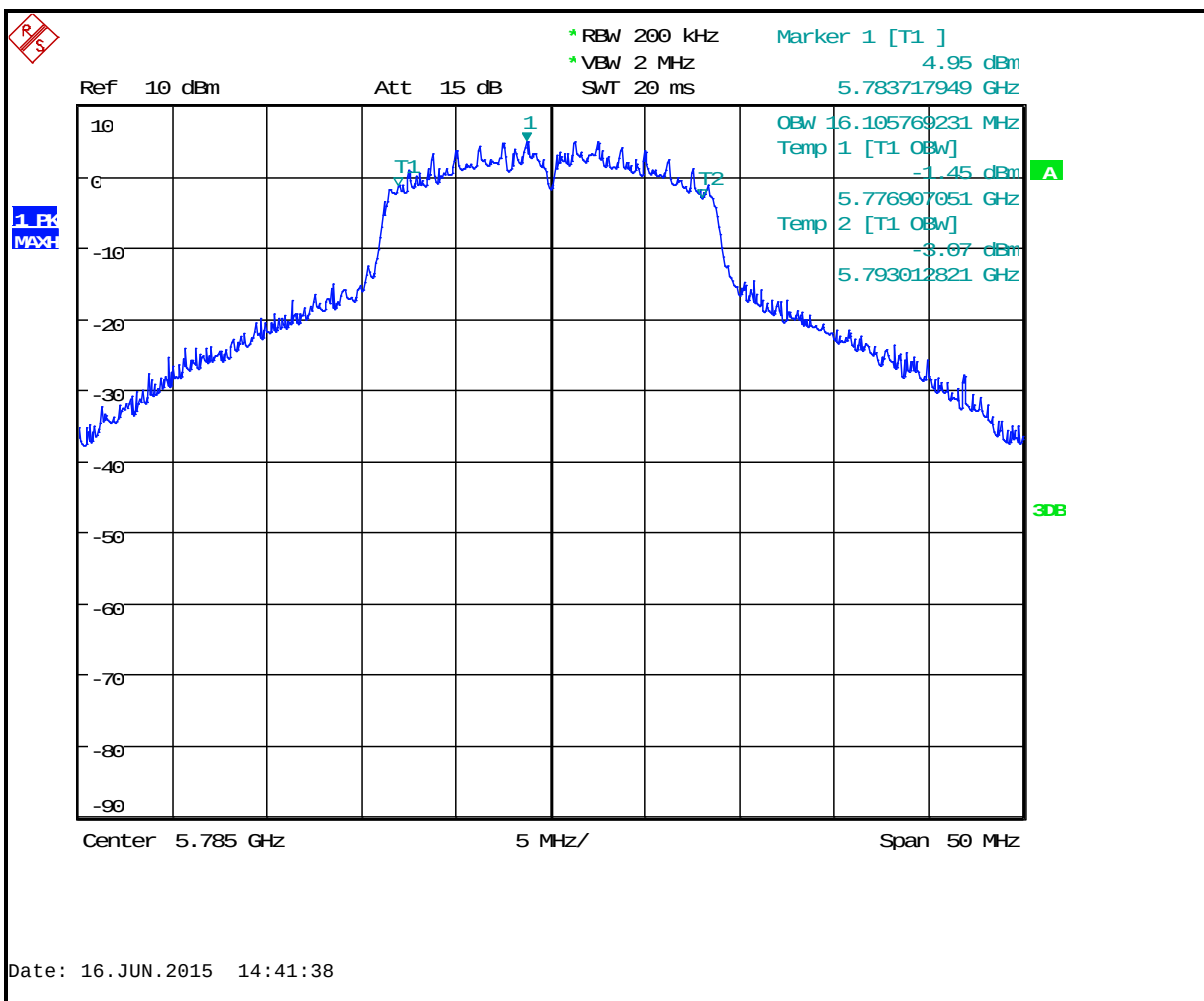


Plot 8-30: 6 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11a

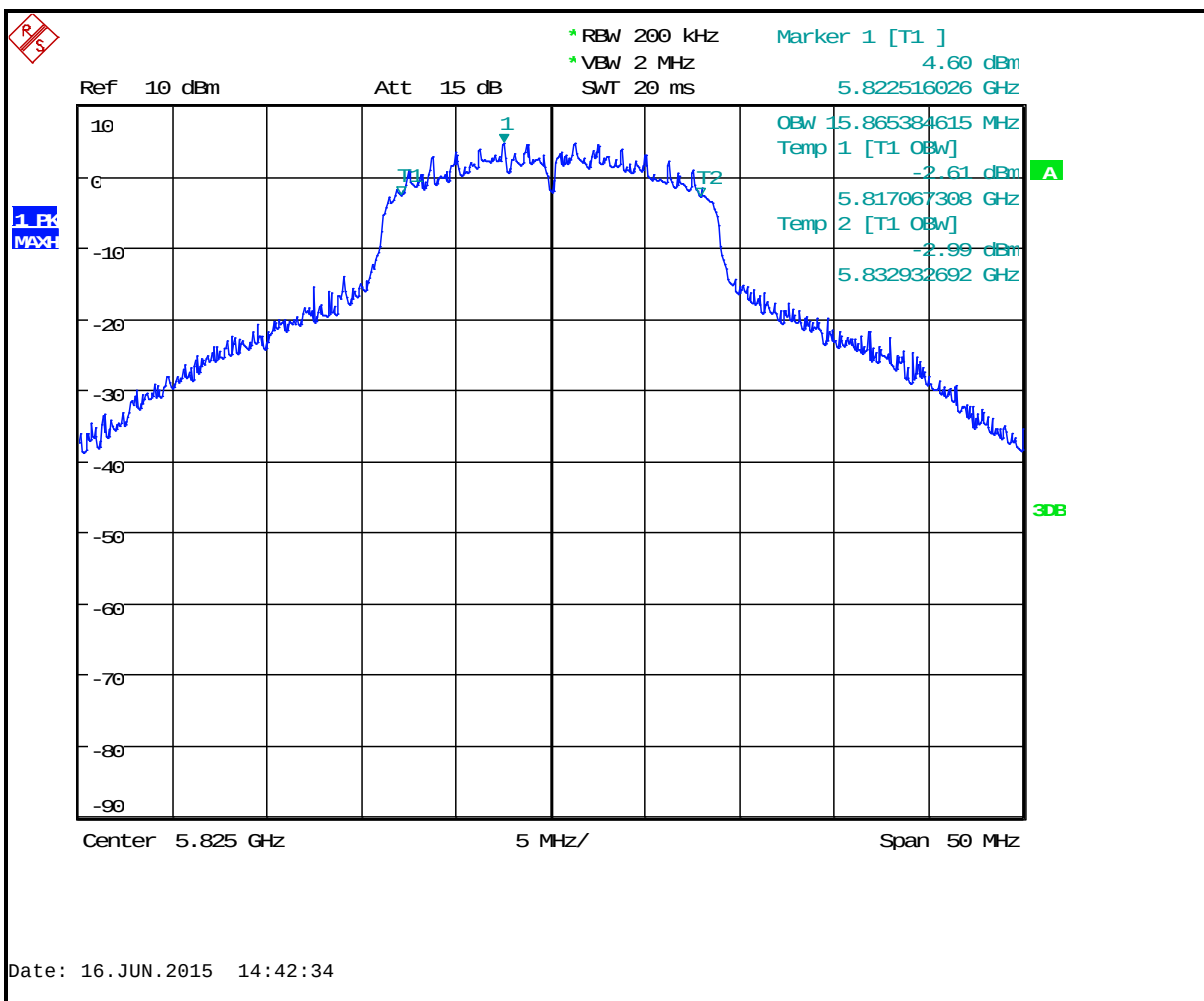


Plot 8-31: 6 dB Bandwidth Channel 149 (TX Frequency 5745 MHz) - 802.11n

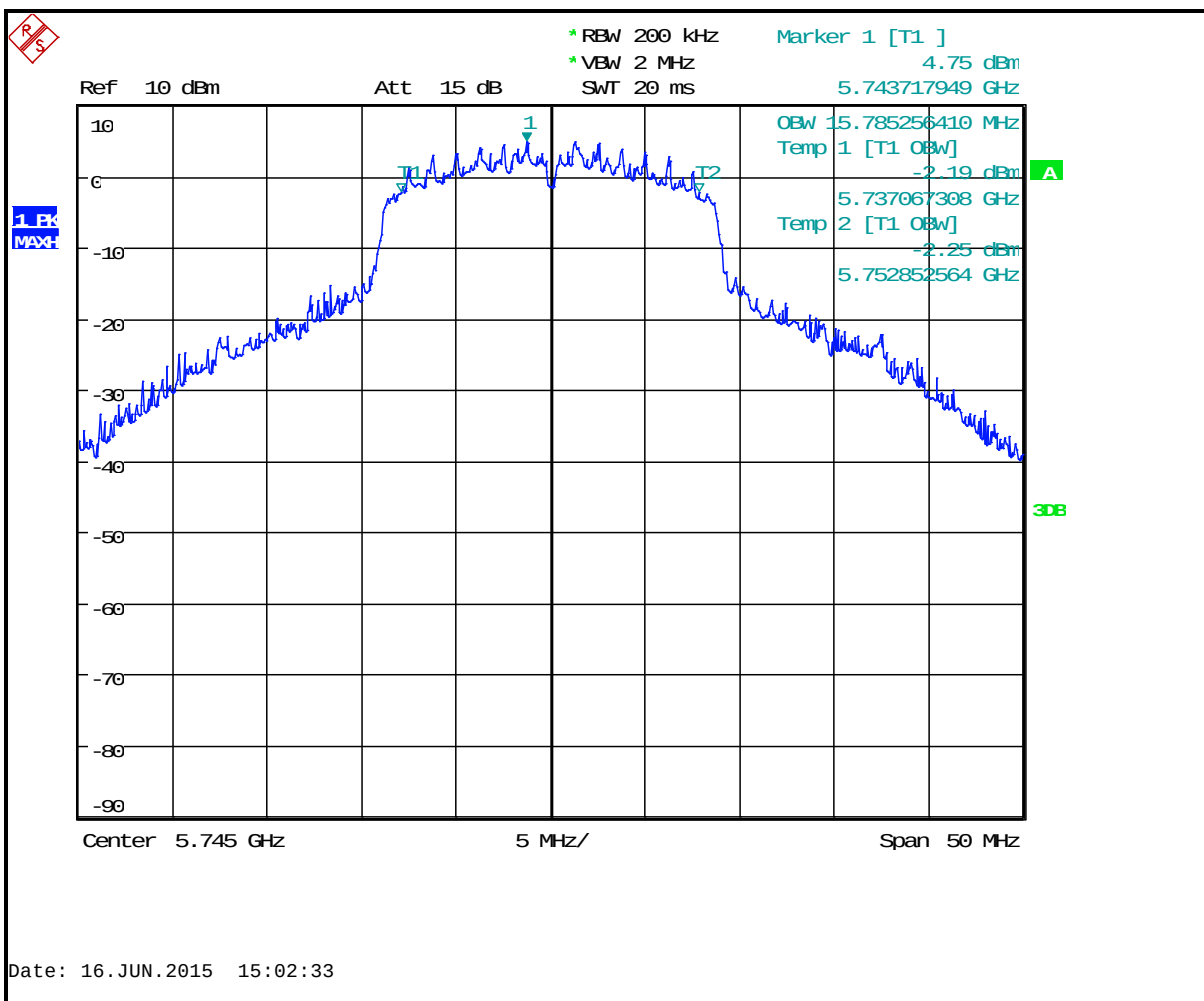

Plot 8-32: 6 dB Bandwidth Channel 157 (TX Frequency 5785 MHz) - 802.11n

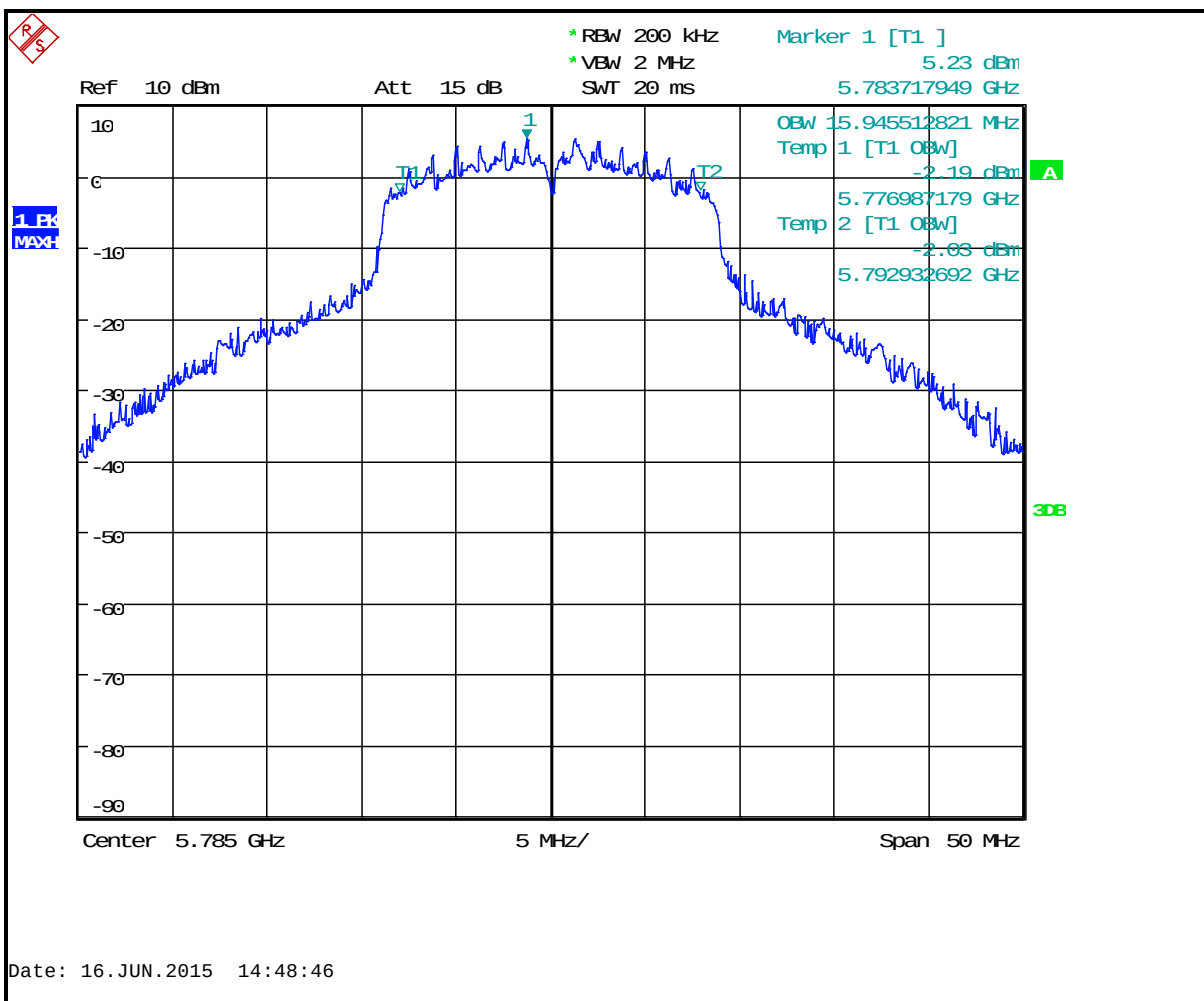

Plot 8-33: 6 dB Bandwidth Channel 165 (TX Frequency 5825 MHz) - 802.11n

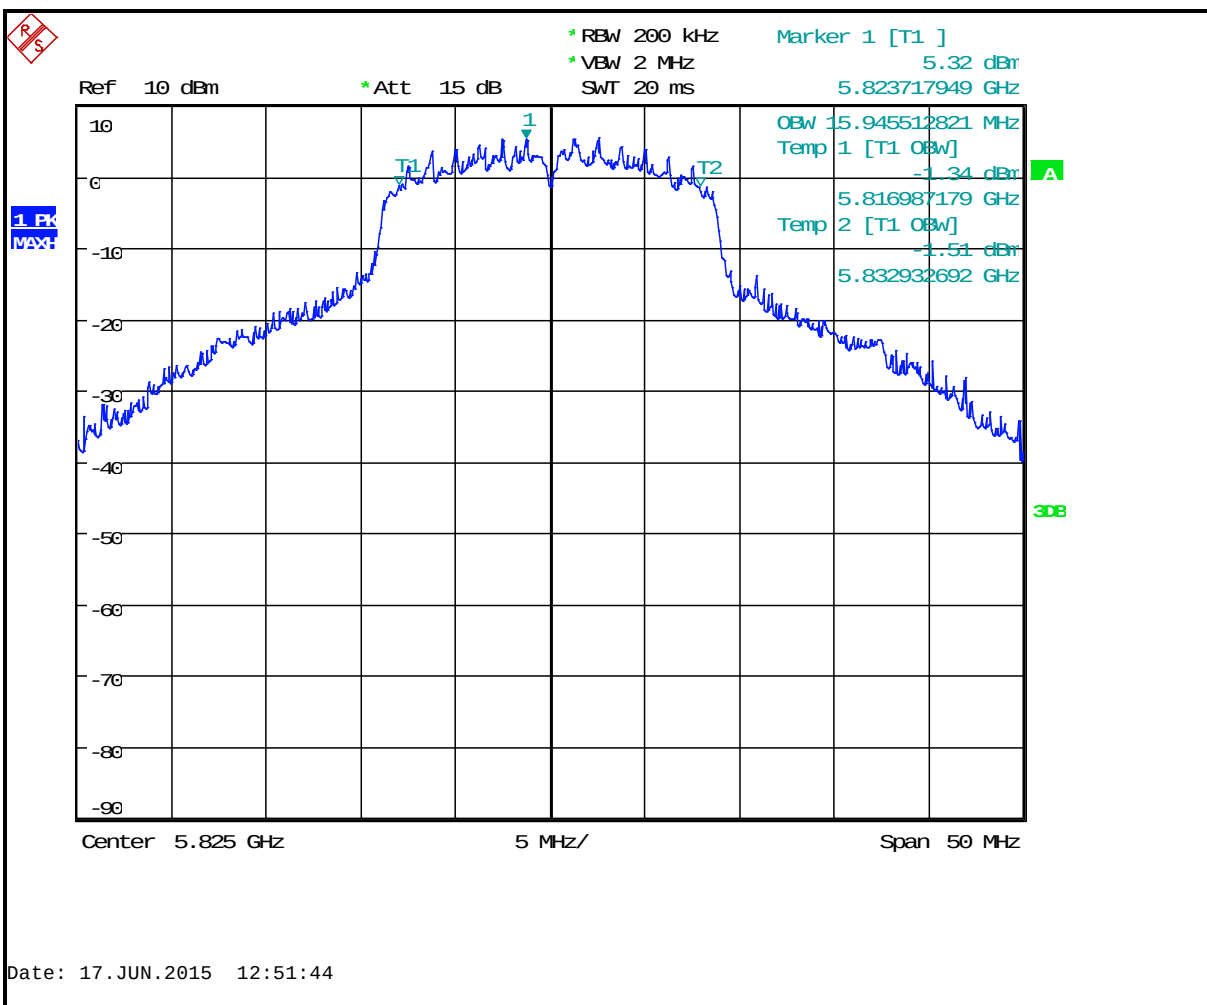

Test Personnel:

Daniel W. Baltzell
 Test Engineer

Daniel W. Baltzell
 Signature

June 4-17, 2015
 Dates of Test

9 Radiated Emissions – FCC 15.209; RSS-247 6.2, RSS-Gen 6.13/7.1

9.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

9.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the three/ten-meter, open-field test site, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency.

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Table 9-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	N/A	9/3/15
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	N/A	9/3/15
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	Not Required
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/9/18
900321	EMCO	3161-03	Horn Antennas (4 – 8.2 GHz)	9508-1020	4/9/18
900323	EMCO	3160-7	Horn Antennas (8,2 – 12.4 GHz)	9605-1054	4/9/18
900356	EMCO	3160-08	Horn Antenna (12.4 - 18 GHz)	9607-1044	4/9/18
901218	EMCO	3160-09	Horn Antenna (18 - 26.5 GHz)	960281-003	4/14/18
901303	EMCO	3160-10	Horn Antenna (26.5 - 40.0 GHz) WR-28	960452-007	6/19/15
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	6/11/17
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	11/13/15

9.3 Radiated Emissions Harmonics/Spurious Test Results

Table 9-2: Radiated Emissions Harmonics/Spurious Channel 36 (TX Frequency: 5180 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10360	6.6	-6.3	35.4	29.1	68.2	-39.1
15540	-1.2	-13.2	39.9	26.8	68.2	-41.4

Table 9-3: Radiated Emissions Harmonics/Spurious Channel 40 (TX Frequency: 5200 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10400	5.8	-6.2	35.4	29.2	68.2	-39.0
15600	-0.4	-13.1	39.9	26.9	68.2	-41.3

Table 9-4: Radiated Emissions Harmonics/Spurious Channel 44 (TX Frequency: 5220 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10440	6.2	-6.2	35.4	29.2	68.2	-39.0
15660	-1.2	-13.3	39.9	26.7	68.2	-41.5

Table 9-5: Radiated Emissions Harmonics/Spurious Channel 48 (TX Frequency: 5240 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
10480	6.7	-5.8	35.5	29.7	68.2	-38.5
15720	-0.9	-13.1	39.9	26.9	68.2	-41.3

Table 9-6: Radiated Emissions Harmonics/Spurious Channel 149 (TX Frequency: 5745 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11490	4.7	-6.0	35.7	29.7	68.2	-38.5
17235	-2.1	-14.5	40.0	25.6	68.2	-42.6

Table 9-7: Radiated Emissions Harmonics/Spurious Channel 157 (TX Frequency: 5785 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11570	5.5	-5.4	35.7	30.3	68.2	-37.9
17355	-1.9	-14.2	40.1	25.9	68.2	-42.3

Table 9-8: Radiated Emissions Harmonics/Spurious Channel 165 (TX Frequency: 5825 MHz)

Emission Frequency (MHz)	Analyzer Peak Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Analyzer RMS Detector (dBuV) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
11650	3.7	-5.8	35.8	30.0	68.2	-38.2
17475	-2.6	-14.1	40.1	26.0	68.2	-42.2

Test Personnel:

Daniel W. Baltzell
Test Engineer


Signature

June 11, 2015
Date of Test

10 Conducted Emissions - FCC Rules and Regulations Part 15.207; RSS-Gen 8.8

The EUT is battery operated so AC conducted emissions were not tested.

11 Conclusion

The data in this measurement report shows that the EUT as tested, Harris Corporation Model XL-185P C1D2, FCC ID: OWDTR-0149-E, IC: 3636B-0149, complies with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations and Industry Canada RSS-247.