



Engineering Solutions & Electromagnetic Compatibility Services

FCC & ISCED Certification Report

**L3Harris Technologies, Inc.
221 Jefferson Ridge Parkway
Lynchburg, VA 24501**

**Model: XL-85M VHF
VHF Portable Land Mobile Radio**

**FCC ID: OWDTR-0176-E
IC: 3636B-0176**


April 23, 2025

Standards Referenced for this Report	
Part 2: 2024	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15: 2024	Radio Frequency Devices
Part 22: 2024	Public Mobile Services
Part 74: 2024	Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services
Part 80: 2024	Stations In The Maritime Services
Part 90: 2024	Private Land Portable Radio Services
ANSI C63.26-2017	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
RSS-119 Issue 12	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

Report Prepared By: Daniel W. Baltzell

Document Number: 2024072TNB

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from the standards referenced above.

Signature: 

Date: April 23, 2025

Typed/Printed Name: Desmond A. Fraser

Position: President

*This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and L3Harris Technologies, Inc.. Test results relate only to the item tested.
This replaces R1.0.*

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.*

Grant Note	FCC Rule Part	Frequency Range (MHz)	Rated Conducted Output Power (W)	Frequency Tolerance (ppm)	Emission Designator	Transmit Mode
EF	22, 74, 80	136 – 174	50.0	0.2	16K0F3E	Analog FM (Wideband)
EF	22, 74, 80, 90	136 – 174	50.0	0.2	11K0F3E	Analog FM (Narrowband)
EF	22, 74, 80, 90	136 – 174	50.0	0.2	16K0F1D/E	2-level FSK 9600 Data/Digital Voice (Wideband)
EF	22, 74, 80, 90	136 – 174	50.0	0.2	11K7F1D/E	2-level FSK 9600 Data/Digital Voice (Narrowband)
EF	22, 74, 80, 90	136 – 174	50.0	0.2	8K40F1D/E	C4FM Data/Voice
EF	22, 74, 80, 90	136 – 174	50.0	0.2	8K10DXW	H-CPM (TDMA) Data/Voice

This device contains functions that are not operational in U.S Territories except as noted in the filing. The grant is requested to list extended frequencies as noted in the filing and Section 2.927(b) applies to this application.

Additionally, as this is a combined FCC and ISED test report, there are test frequencies contained within this report that may not be authorized for use in either the United States or Canada. Any data presented in this report between 136 and 174 MHz is for engineering use only per L3Harris Technologies' request.

Table of Contents

1	Test Summary.....	7
2	General Information	7
2.1	Measurement Uncertainty	7
2.2	Test Facility	7
2.3	Related Submittal(s)/Grant(s)	7
2.4	Tested System Details	8
3	FCC §2.1033(C)(8): Voltages and Currents through the Final Amplifying Stage.....	9
4	FCC §2.1046(a): RF power output: Conducted; §90.205 Power and antenna height limits; §80.215: Transmitter Power; §74.461: Transmitter Power; §22.565: Transmitting power limits; ISED RSS-119 4.1: Transmitter Output Power.....	9
4.1	Test Procedure.....	9
4.2	Test Data.....	9
5	FCC §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emission Limitations; §80.211: Emission Limitations; §74.462: Authorized Bandwidth and Emissions; §22.359: Emission Limitations; ISED RSS-119 5.8: Transmitter Unwanted Emissions	11
5.1	Test Procedure.....	11
5.2	Test Data.....	11
6	FCC §2.1053(a): Field Strength of Spurious Radiation; §90.210: Emission Masks; §80.211: Emission Limitations; §74.462: Emission Limitations; §22.359: Emission Limitations; ISED RSS-119 5.8.9.2: Out-of-band Emission Limit	16
6.1	Test Procedure.....	16
6.2	Test Data.....	16
6.3	Digital/Receiver Radiated Emissions	18
7	FCC §2.1049(c)(1): Occupied Bandwidth; §90.210 Emission Masks; §80.205: Bandwidths; §80.211: Emission Limitations; §74.462: Authorized Bandwidth and Emissions; §22.359: Emission Limitations; ISED RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks	20
7.1	Test Procedure.....	20
7.2	Test Data.....	24
8	FCC §2.1055: Frequency Stability; §90.213: Frequency Tolerance; §90.539: Frequency Stability; §80.209: Frequency Stability; §74.464: Frequency Tolerance; §22.355: Frequency Tolerance; ISED RSS-119 5.3: Transmitter Frequency Stability	60
8.1	Test Procedure.....	60
8.2	Test Data.....	63
8.2.1	Temperature Frequency Stability	63
8.2.2	Frequency Stability/Voltage Variation	64
9	FCC §2.1047(a)(b): Modulation Characteristics; §80.213: Modulation Requirements; §74.463: Modulation Requirements; RSS-119 5.2: Types of Modulation	65
9.1	Test Procedures.....	65
9.1.1	Audio Frequency Response	65
9.1.2	Audio Low Pass Filter Response	65
9.1.3	Modulation Limiting	65
9.2	Test Data.....	66
9.2.1	Audio Frequency Response	66
9.2.2	Audio Low Pass Filter Response	72
9.2.3	Modulation Limiting	78
10	FCC §90.214: Transient Frequency Response; §74.462(c): Authorized Bandwidth and Emissions; RSS-119 5.9: Transient Frequency Behavior.....	90
10.1	Test Procedure.....	90
10.2	Test Data.....	91
11	§2.202: Necessary Bandwidth and Emission Bandwidth	99
12	Conclusion	99

Table of Figures

Figure 2-1: Configuration of Tested System.....	8
---	---

Table of Tables

Table 2-1: Equipment Under Test (EUT).....	8
Table 4-1: RF Conducted Output Power - Measured.....	9
Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted.....	9
Table 5-1: Test Equipment Used For Testing Spurious Emissions	14
Table 6-1: Field Strength of Spurious Radiation; 136.0125 MHz.....	16
Table 6-2: Field Strength of Spurious Radiation; 155.0125 MHz.....	17
Table 6-3: Field Strength of Spurious Radiation; 173.9875 MHz.....	17
Table 6-4: Digital/Receiver Radiated Emissions	18
Table 6-5: Test Equipment Used For Testing Field Strength of Spurious Radiation	18
Table 7-1: Test Equipment Used For Testing Occupied Bandwidth	59
Table 8-1: Temperature Frequency Stability – 136.0125 MHz	63
Table 8-2: Temperature Frequency Stability – 155.0125 MHz	63
Table 8-3: Temperature Frequency Stability – 173.9875 MHz	63
Table 8-4: Frequency Stability/Voltage Variation –136.0125 MHz	64
Table 8-5: Frequency Stability/Voltage Variation – 155.0125 MHz	64
Table 8-6: Frequency Stability/Voltage Variation –173.9875 MHz	64
Table 8-7: Test Equipment Used For Testing Temperature Frequency Stability.....	64
Table 9-1: Test Equipment Used For Testing Modulation Requirements.....	89
Table 10-1: Test Equipment Used For Testing Transient Frequency Behavior.....	98

Table of Plots

Plot 5-1: Conducted Antenna Spurious Emissions, 136.0125 MHz	12
Plot 7-1: Occupied Bandwidth – 136.0125 MHz; Wideband Analog; Mask B	24
Plot 7-2: Occupied Bandwidth – 155.0125 MHz; Wideband Analog; Mask B	25
Plot 7-3: Occupied Bandwidth – 173.9875 MHz; Wideband Analog; Mask B	26
Plot 7-4: Occupied Bandwidth – 136.0125 MHz; Narrowband Analog; Mask D	27
Plot 7-5: Occupied Bandwidth – 155.0125 MHz; Narrowband Analog; Mask D	28
Plot 7-6: Occupied Bandwidth – 173.9875 MHz; Narrowband Analog; Mask D	29
Plot 7-7: Occupied Bandwidth – 136.0125 MHz; Wideband 2-level FSK 9600; Mask C	30
Plot 7-8: Occupied Bandwidth – 155.0125 MHz; Wideband 2-level FSK 9600; Mask C	31
Plot 7-9: Occupied Bandwidth – 173.9875 MHz; Wideband 2-level FSK 9600; Mask C	32
Plot 7-10: Occupied Bandwidth – 136.0125 MHz; Narrowband 2-level FSK 9600; Mask D.....	33
Plot 7-11: Occupied Bandwidth – 155.0125 MHz; Narrowband 2-level FSK 9600; Mask D.....	34
Plot 7-12: Occupied Bandwidth – 173.9875 MHz; Narrowband 2-level FSK 9600; Mask D.....	35
Plot 7-13: Occupied Bandwidth – 136.0125 MHz; C4FM; Mask D.....	36
Plot 7-14: Occupied Bandwidth – 155.0125 MHz; C4FM; Mask D.....	37
Plot 7-15: Occupied Bandwidth – 173.9875 MHz; C4FM; Mask D.....	38
Plot 7-16: Occupied Bandwidth – 136.0125 MHz; H-CPM TDMA; Mask D	39
Plot 7-17: Occupied Bandwidth – 155.0125 MHz; H-CPM TDMA; Mask D	40
Plot 7-18: Occupied Bandwidth – 173.9875 MHz; H-CPM TDMA; Mask D	41
Plot 7-19: OBW 99%, 136.0125 MHz, Narrowband Analog.....	42
Plot 7-20: OBW 99%, 155.0125 MHz, Narrowband Analog.....	43
Plot 7-21: OBW 99%, 173.9875 MHz, Narrowband Analog.....	44
Plot 7-22: OBW 99%, 136.0125 MHz, Wideband.....	45

Plot 7-23:	OBW 99%, 155.0125 MHz, Narrowband Analog	46
Plot 7-24:	OBW 99%, 173.9875 MHz, Narrowband Analog	47
Plot 7-25:	OBW 99%, 136.0125 MHz, C4FM	48
Plot 7-26:	OBW 99%, 155.0125 MHz, C4FM	49
Plot 7-27:	OBW 99%, 173.9875 MHz, C4FM	50
Plot 7-28:	OBW 99%, 136.0125 MHz, H-CPM TDMA	51
Plot 7-29:	OBW 99%, 155.0125 MHz, H-CPM TDMA	52
Plot 7-30:	OBW 99%, 173.9875 MHz, H-CPM TDMA	53
Plot 7-31:	OBW 99%, 136.0125 MHz, 2-Level FSK 9600 Narrowband	54
Plot 7-32:	OBW 99%, 155.0125 MHz, 2-Level FSK 9600 Narrowband	55
Plot 7-33:	OBW 99%, 173.9875 MHz, 2-Level FSK 9600 Narrowband	56
Plot 7-34:	OBW 99%, 136.0125 MHz, 2-Level FSK 9600 Wideband	57
Plot 7-35:	OBW 99%, 155.0125 MHz, 2-Level FSK 9600 Wideband	58
Plot 7-36:	OBW 99%, 173.9875 MHz, 2-Level FSK 9600 Wideband	59
Plot 9-1:	Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (WB)	66
Plot 9-2:	Modulation Characteristics - Audio Frequency Response – 155.0125 MHz (WB)	67
Plot 9-3:	Modulation Characteristics - Audio Frequency Response – 173.9875 MHz (WB)	68
Plot 9-4:	Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (NB)	69
Plot 9-5:	Modulation Characteristics - Audio Frequency Response – 155.0125 MHz (NB)	70
Plot 9-6:	Modulation Characteristics - Audio Frequency Response – 173.9875 MHz (NB)	71
Plot 9-7:	Modulation Characteristics - Audio Low Pass Filter Response – 136.0125 (NB)	72
Plot 9-8:	Modulation Characteristics - Audio Low Pass Filter Response – 136.0125 (WB)	73
Plot 9-9:	Modulation Characteristics - Audio Low Pass Filter Response – 155.0125 (NB)	74
Plot 9-10:	Modulation Characteristics - Audio Low Pass Filter Response – 155.0125 (WB)	75
Plot 9-11:	Modulation Characteristics - Audio Low Pass Filter Response – 173.9875 (NB)	76
Plot 9-12:	Modulation Characteristics - Audio Low Pass Filter Response – 173.9875 (WB)	77
Plot 9-13:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; (WB); Positive Peak	78
Plot 9-14:	Modulation Characteristics – Modulation Limiting - 136.0125 MHz; (WB) Negative Peak	79
Plot 9-15:	Modulation Characteristics – Modulation Limiting – 136.0125 MHz; (NB); Positive Peak	80
Plot 9-16:	Modulation Characteristics – Modulation Limiting - 136.0125 MHz; (NB) Negative Peak	81
Plot 9-17:	Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (WB); Positive Peak	82
Plot 9-18:	Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (WB); Negative Peak	83
Plot 9-19:	Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (NB); Positive Peak	84
Plot 9-20:	Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (NB); Negative Peak	85
Plot 9-21:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (WB); Positive Peak	86
Plot 9-22:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (WB); Negative Peak	87
Plot 9-23:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (NB); Positive Peak	88
Plot 9-24:	Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (NB); Negative Peak	89
Plot 10-1:	Transient Frequency Behavior – 155.0125 MHz; Wide Band; Carrier ON Time	91
Plot 10-2:	Transient Frequency Behavior – 155.0125 MHz; Wide Band; Carrier OFF Time	92
Plot 10-3:	Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier ON Time	93
Plot 10-4:	Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier OFF Time	94
Plot 10-5:	Transient Frequency Behavior – 155.0125 MHz; Narrow Band; Carrier ON Time	95
Plot 10-6:	Transient Frequency Behavior – 155.0125 MHz; Narrow Band; Carrier OFF Time	96
Plot 10-7:	Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier ON Time	97
Plot 10-8:	Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier OFF Time	98

Table of Appendixes

Appendix A: Test Configuration Photographs	100
--	-----

Table of Photographs

Photograph 1: Radiated Emissions – Front View (Below 1 GHz).....	100
Photograph 2: Radiated Emissions – Back View (Below 1 GHz).....	101
Photograph 3: Radiated Emissions – Front View (Above 1 GHz).....	102
Photograph 4: Radiated Emissions – Back View (Above 1 GHz).....	103

1 Test Summary

Test	FCC Reference	ISED Reference	Result
RF Power Output	2.1046(a), 22.565, 74.461, 80.215, 90.205	RSS-119 4.1, 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1051, 22.359, 74.462, 80.211, 90.210	RSS-119 5.5, 5.8	Complies
Field Strength of Spurious Radiation	2.1053(a), 22.359, 74.462, 80.211(f)(3), 90.210	RSS-119 5.5, 5.8	Complies
Occupied Bandwidth/ Emission Masks	2.1049(c)(1), 22.359(b), 74.462, 80.205, 80.211, 90.210	RSS-119 5.5, 5.8	Complies
Adjacent Channel Power	90.210	RSS-119 4.3	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 22.355, 74.464, 80.209, 90.213, 90.539	RSS-119 5.3	Complies
Modulation Characteristics	2.1047(a)(b), 74.463, 80.213	RSS-119 5.2	Complies
Transient Frequency Response	74.462(c), 90.214	RSS-119 5.9	Complies

2 General Information

The following certification report is prepared on behalf of **L3Harris Technologies** in accordance with the Federal Communications Commission and Innovation, Science and Economic Development (ISED) Canada. The Equipment Under Test (EUT) was the XL-85M VHF, FCC ID: OWDTR-0176-E, IC: 3636B-0176.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and 90. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Measurement Uncertainty

The measurement uncertainty complies with CISPR 16-4-2 limits and is not used to adjust measurements for compliance determination. Expanded uncertainty (U) for each scope, calculated per ANSI/NCSS Z540-2-1997 (R2002) with a type B evaluation, is provided in this RTL report. While this demonstrates RTL's commitment to transparency, compliance decisions are based solely on comparing measured values directly to the relevant standards' limits.

2.2 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170.

ISED CAB ID: US0079, Company Number: 2956A

2.3 Related Submittal(s)/Grant(s)

This is an original certification report for L3Harris Technologies, Inc. Model XL-85M VHF, FCC ID: OWDTR-0176-E, IC: 3636B-0176.


2.4 Tested System Details

The test sample was received on February 16, 2025. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable. The device was programmed for multiple modes of operation and modulation types.

Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Mobile Radio	L3Harris Technologies	XL-85M VHF	FR EVM 012	OWDTR-0176-E	24464
Mobile Radio	L3Harris Technologies	XL-85M VHF	FR EVM 012	OWDTR-0176-E	24465
Antenna, VHF 8.15 dBi	L3Harris Technologies	136-174 MHz log-periodic	AN-025137-011	N/A	23375
Antenna, VHF 4.55 dBi	L3Harris Technologies	Element, NGP	AN-225002-004	N/A	23378
Control Head	L3Harris Technologies	XL-CH2	A4031A000186	OWDTR-0171-E	24454
Handset	L3Harris Technologies	N/A	14050-6010-01	N/A	24462

Figure 2-1: Configuration of Tested System

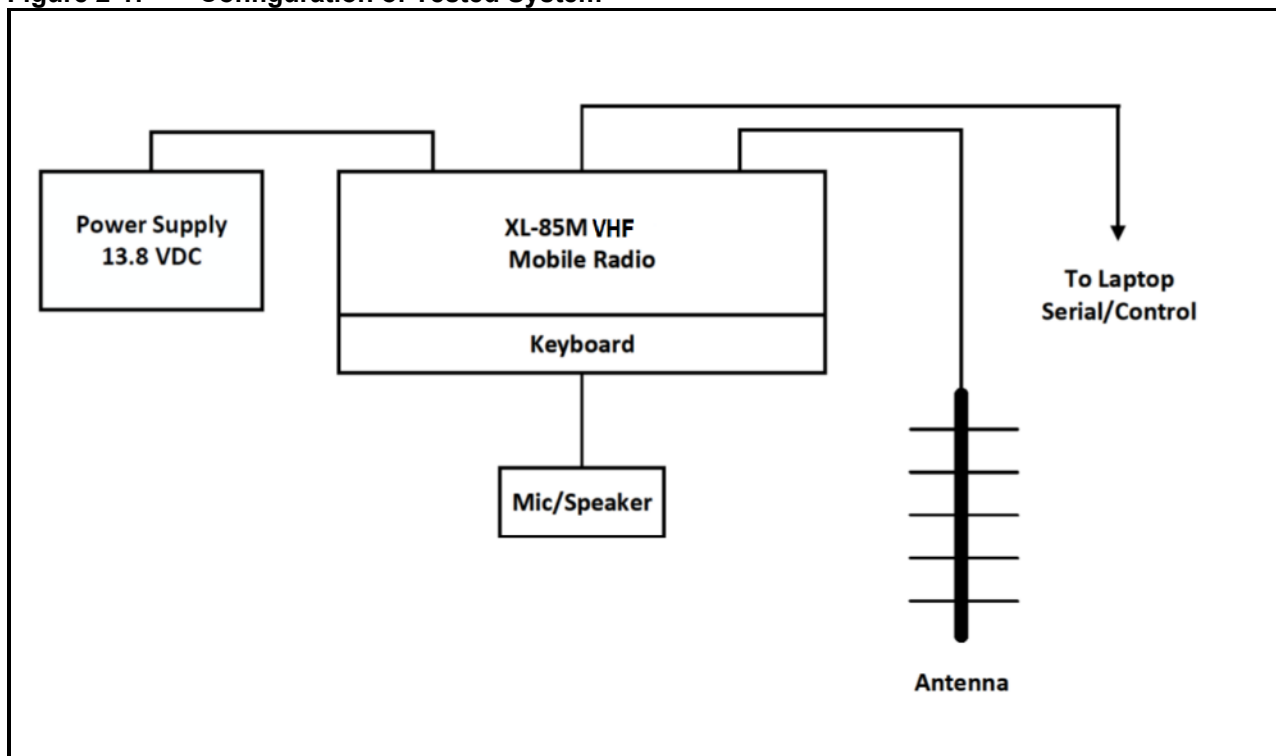

3 FCC §2.1033(C)(8): Voltages and Currents through the Final Amplifying Stage

13.8VDC / 8 A

4 FCC §2.1046(a): RF power output: Conducted; §90.205 Power and antenna height limits; §80.215: Transmitter Power; §74.461: Transmitter Power; §22.565: Transmitting power limits; ISED RSS-119 4.1: Transmitter Output Power

4.1 Test Procedure

ANSI C63-26, section 5.2

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's Rated Power: 50.0 W

4.2 Test Data

Table 4-1: RF Conducted Output Power - Measured

Frequency (MHz)	Power (dBm)	Power (W)
136.0125	47.31	53.8
138.0125	47.27	53.3
141.0125	47.32	54.0
143.9875	47.31	53.8
148.0125	47.30	53.7
150.0125	47.34	54.2
154.0125	47.36	54.5
155.0125	47.35	54.3
162.0125	47.37	54.6
173.9875	47.35	54.3

Notes: Data presented is for analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Table 4-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901773	Rohde & Schwarz	FSW	Spectrum Analyzer	101021	02/02/2027
901139	MCE Weinschel	48-20-34	Attenuator, 20 dB, DC-18 GHz, 100 W	BK5859	09/21/2027
901727	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	09/14/2027
901350	Meterman	33XR	Multimeter	040402802	10/18/2027

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ± 0.5 Hz/ ± 0.5 dB

Results: Pass

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: L3Harris Technologies
Model: XL-85M VHF
ID's: OWDTR-0176-E/3636B-0176
Standards: FCC Part 90/ISED RSS-119
Report #: 2024072TNB

Test Personnel:

Daniel W. Baltzell		March 3, 2025
EMC Test Engineer	Signature	Date of Test

5 FCC §2.1051: Spurious Emissions at Antenna Terminals; §90.210: Emission Limitations; §80.211: Emission Limitations; §74.462: Authorized Bandwidth and Emissions; §22.359: Emission Limitations; ISED RSS-119 5.8: Transmitter Unwanted Emissions

5.1 Test Procedure

ANSI C63-26-2015, section 5.7

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

5.2 Test Data

Frequency range of measurement per §2.1057: 9 kHz to 10 x Fc


Limits: (43 + 10 LOG P(W)) for wideband and 50 + 10 LOG P(W)) for narrowband. A worst case limit of 50 + 10 Log P(W) was used.

The following channels (in MHz) were investigated:


Frequency (MHz)
136.0125
155.0125
173.9875

Both high and low power settings were checked; high power was found to be the worst case. All modes were investigated and analog mode is presented as representative data.


Plot 5-1: Conducted Antenna Spurious Emissions, 136.0125 MHz

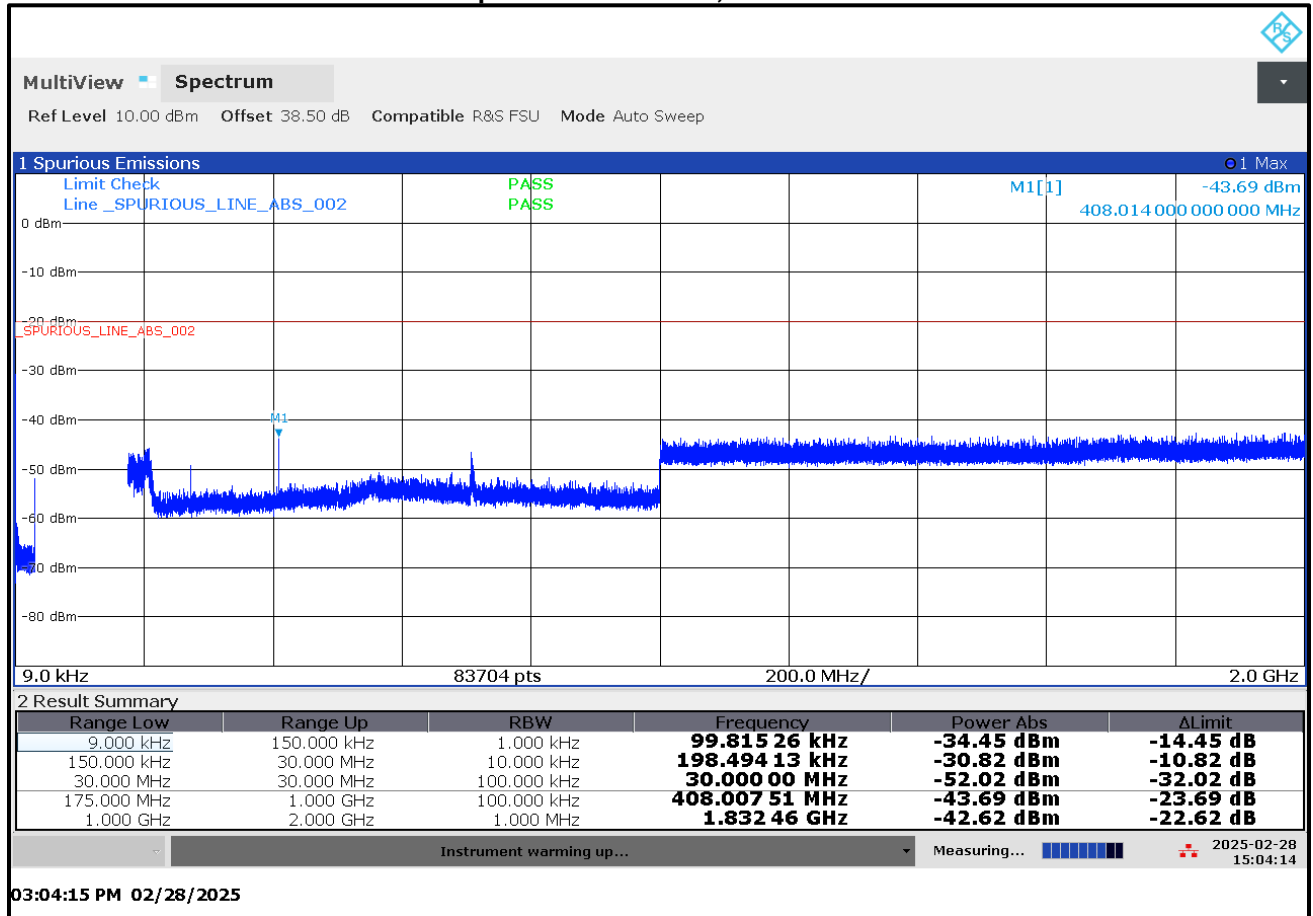

Plot 5-2: Conducted Antenna Spurious Emissions, 155.0125 MHz

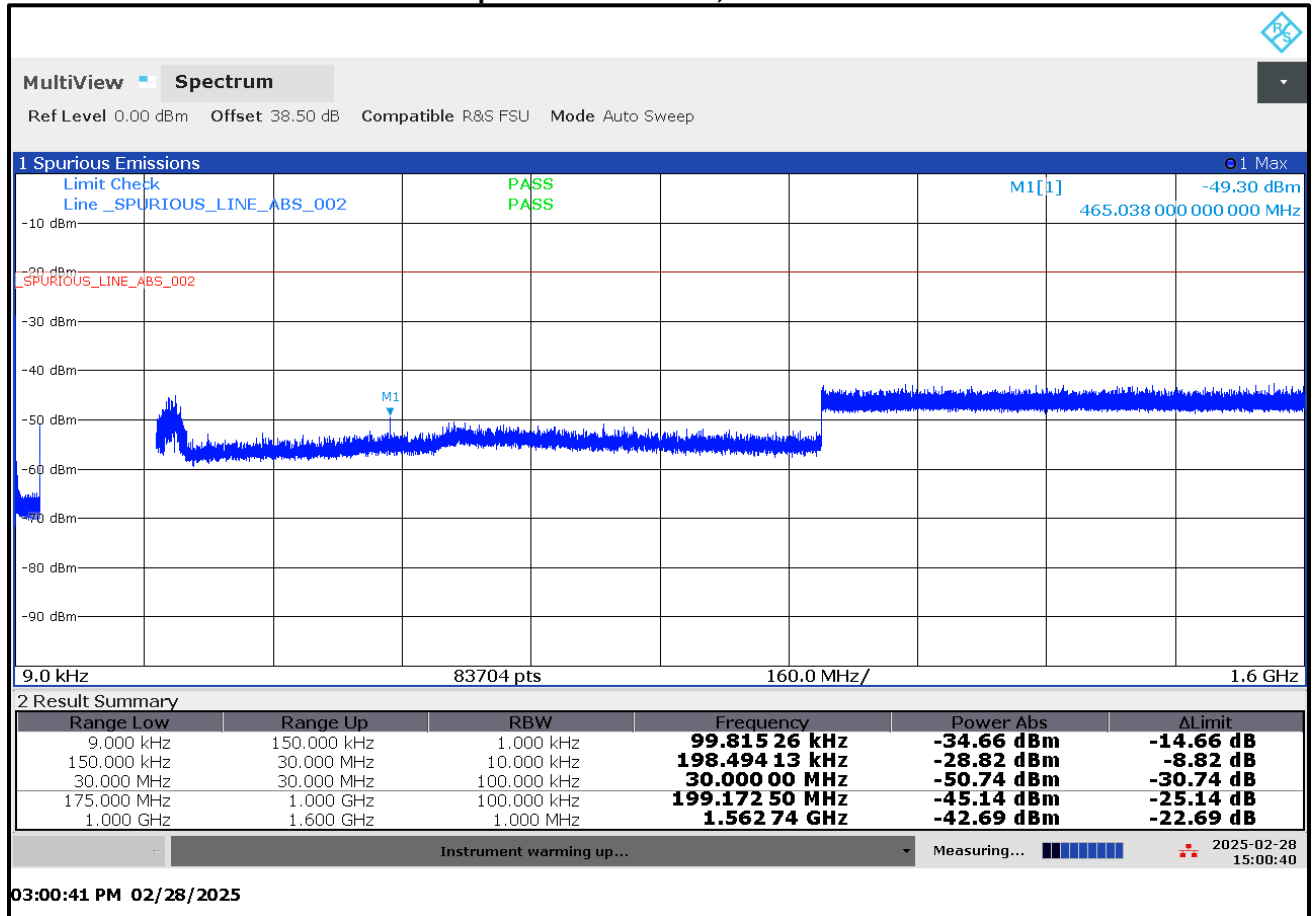

Plot 5-3: Conducted Antenna Spurious Emissions, 173.9875

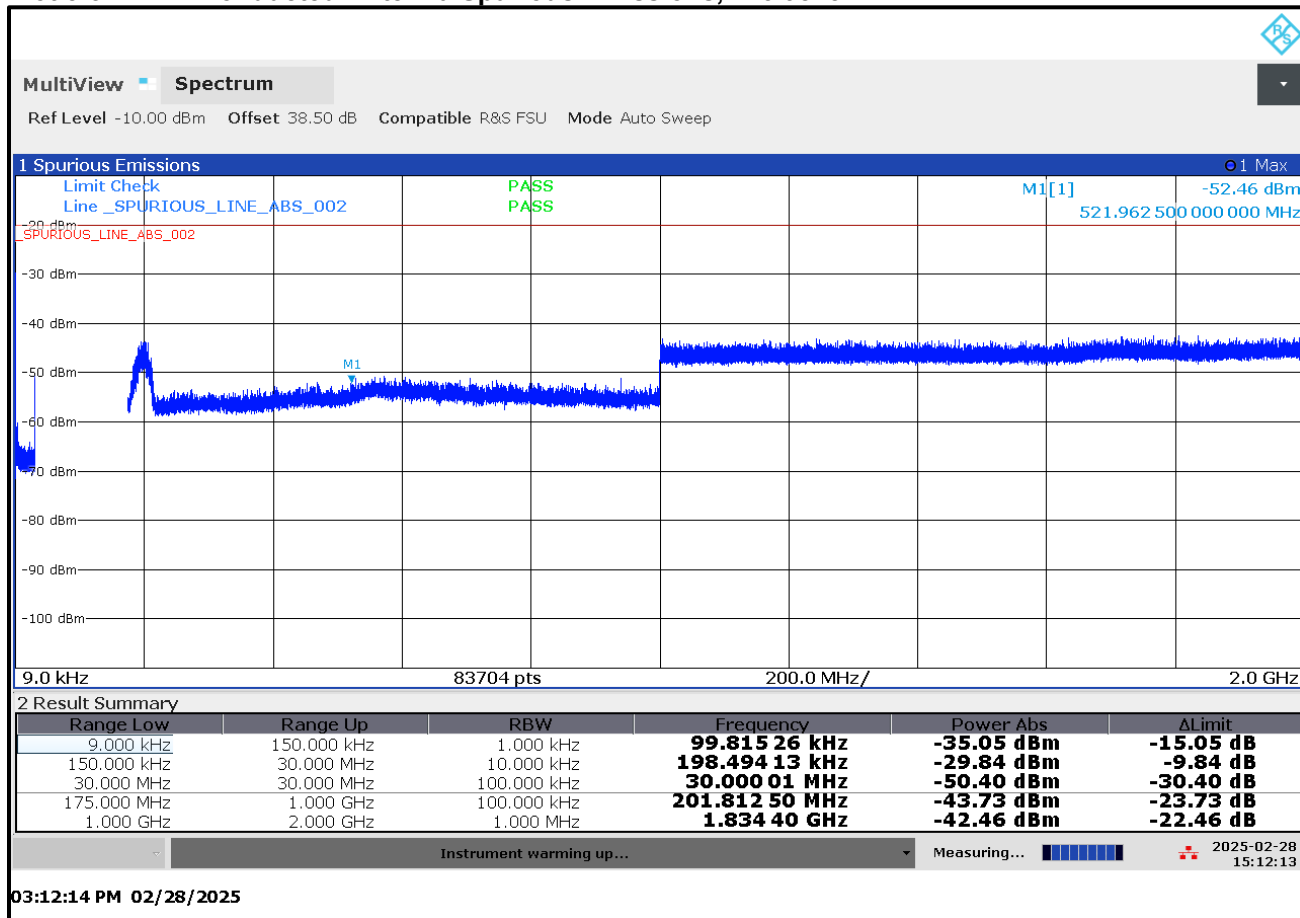

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 dB

Results: Pass

Table 5-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901773	Rohde & Schwarz	FSW	Spectrum Analyzer	101021	02/02/2027
901139	MCE Weinschel	48-20-34	Attenuator, 20 dB, DC-18 GHz, 100 W	BK5859	09/21/2027
901129	Par Electronics	188-174 (25W)	VHF Notch Filters	N/A	10/15/2027

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: L3Harris Technologies
Model: XL-85M VHF
ID's: OWDTR-0176-E/3636B-0176
Standards: FCC Part 90/ISED RSS-119
Report #: 2024072TNB

Test Personnel:

Daniel W. Baltzell		February 28, 2025
EMC Test Engineer	Signature	Date of Test

6 FCC §2.1053(a): Field Strength of Spurious Radiation; §90.210: Emission Masks; §80.211: Emission Limitations; §74.462: Emission Limitations; §22.359: Emission Limitations; ISED RSS-119 5.8.9.2: Out-of-band Emission Limit

6.1 Test Procedure

FCC 2.1053 - ANSI C63.26-2015 section 5.5.3

The data which was not attenuated more than 20 dB below the worst-case limits (narrowband); per FCC 2.1057(c), all other data need not be reported. It is narrowband data compared to wideband limits.

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25.

Additionally, radiated emissions were investigated with the licensed and unlicensed (DSS, DTS, NII) transmitters transmitting simultaneously. No non-compliances were found.

§2.1053 Requirements

Limit: 50+10LogP narrowband limit used as worst-case limit.

6.2 Test Data

Table 6-1: Field Strength of Spurious Radiation; 136.0125 MHz

Fundamental Power Measured = 47.3 dBm; 53.8 W; Limit = 67.3 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
272.0250	19.0	-80.8	0.2	-0.5	128.8	-61.5
408.0375	15.8	-78.0	0.3	-0.4	125.9	-58.6
544.0500	22.4	-72.6	0.3	-0.7	120.9	-53.6
680.0625	14.9	-76.1	0.3	-0.9	124.7	-57.4
816.0750	15.1	-75.0	0.4	-1.5	124.2	-56.8
952.0875	15.4	-74.0	0.4	-0.9	122.6	-55.3
1088.1000	17.8	-74.6	0.4	4.6	117.8	-50.4
1224.1125	17.7	-74.0	0.4	4.8	116.9	-49.6
1360.1250	18.1	-73.2	0.5	5.6	115.3	-48.0

Table 6-2: Field Strength of Spurious Radiation; 155.0125 MHz

Fundamental Power Measured = 47.4 dBm; 54.3 W; Limit = 67.4 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
310.0250	20.7	-78.9	0.2	-0.6	127.1	-59.8
465.0375	17.4	-79.3	0.3	-0.5	127.4	-60.1
620.0500	17.4	-75.3	0.3	-0.8	123.8	-56.5
775.0625	15.4	-74.8	0.4	-1.3	123.8	-56.5
930.0750	19.4	-71.7	0.4	-1.1	120.5	-53.2
1085.0875	18.1	-74.6	0.4	4.6	117.8	-50.4
1240.1000	18.9	-73.1	0.4	4.9	116.0	-48.7
6045.4875	17.9	-73.5	0.4	5.9	115.4	-48.0
1550.1250	17.9	-72.9	0.5	6.6	114.2	-46.8

Table 6-3: Field Strength of Spurious Radiation; 173.9875 MHz

Fundamental Power Measured = 47.4 dBm; 54.3 W; Limit = 67.4 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
347.9750	20.4	-70.9	0.2	-0.5	119.0	-51.6
521.9625	21.7	-63.5	0.3	-0.6	111.8	-44.4
695.9500	7.5	-72.5	0.3	-0.9	121.1	-53.8
869.9375	10.0	-69.6	0.4	-1.4	118.7	-51.3
1043.9250	9.6	-72.3	0.4	4.5	115.6	-48.2
1217.9125	7.8	-73.4	0.4	4.8	116.4	-49.0
1391.9000	7.3	-73.6	0.4	5.9	115.5	-48.2
1565.8875	7.8	-72.5	0.5	6.7	113.7	-46.3
1739.8750	8.0	-70.4	0.5	6.5	111.8	-44.4

6.3 Digital/Receiver Radiated Emissions

Table 6-4: Digital/Receiver Radiated Emissions

Emission Frequency (MHz)	Analyzer Reading (dBμV)	Site Correction Factor (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pass/Fail
53.130	7.7	12.3	20.0	40.0	-20.0	Pass
124.720	8.9	13.8	22.7	43.5	-20.8	Pass
226.960	1.4	19.4	20.8	46.0	-25.2	Pass
238.800	9.0	21.0	30.0	46.0	-16.0	Pass
251.120	17.4	21.6	39.0	46.0	-7.0	Pass
262.800	-2.0	21.0	19.0	46.0	-27.0	Pass
322.640	3.1	21.2	24.3	46.0	-21.7	Pass
334.640	3.4	21.4	24.8	46.0	-21.2	Pass
346.480	-1.2	22.4	21.2	46.0	-24.8	Pass
394.480	1.6	23.7	25.3	46.0	-20.7	Pass
657.360	-2.4	28.8	26.4	46.0	-19.6	Pass
1266.960	0.6	34.7	35.3	54.0	-18.7	Pass
1721.360	-0.9	38.2	37.3	54.0	-16.7	Pass
2008.080	0.8	40.6	41.4	54.0	-12.6	Pass

Table 6-5: Test Equipment Used For Testing Field Strength of Spurious Radiation


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Laboratories	AM3-1197-0005	3-meter antenna mast, polarizing	OATS1	N/A
901729	Insulated Wire Inc.	KPS-1503-3150-KPR	SMK RF Cables 20'	NA	12/29/2027
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
901773	Rohde & Schwarz	FSW	Spectrum Analyzer	101021	02/02/2027
901582	Rohde & Schwarz	1167.0000.02	Signal Generator	101903	05/23/2027
901158	Compliance Design, Inc.	Roberts Dipole Antenna	Adjustable Elements Dipole Antenna (25-1000 MHz)	00401	12/17/2027
901669	ETS-Lindgren	3142E	Biconilog Antenna (30 MHz – 6000 MHz)	00166065	04/24/2027
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	08/05/2027
900323	EMCO	3160-07	Horn Antennas (8.2 – 12 GHz)	9605-1054	05/17/2027
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	08/05/2027
901129	Par Electronics	188-174 (25W)	VHF Notch Filters	N/A	10/15/2027

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: L3Harris Technologies
Model: XL-85M VHF
ID's: OWDTR-0176-E/3636B-0176
Standards: FCC Part 90/ISED RSS-119
Report #: 2024072TNB

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

March 6, 2025
Date of Tests

7 FCC §2.1049(c)(1): Occupied Bandwidth; §90.210 Emission Masks; §80.205: Bandwidths; §80.211: Emission Limitations; §74.462: Authorized Bandwidth and Emissions; §22.359: Emission Limitations; ISED RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks

7.1 Test Procedure

ANSI C63.26 5.4

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2b}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁵	B	H
809-824/854-869 ^{1b}	B, D	D, G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5895-5925 ⁴	B	C
All other bands	B	C

1. Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.
2. Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.
3. Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691 of this chapter.
4. DSRCS Roadside Units in the 5895-5925 MHz band are governed under subpart M of this part.
5. Equipment designed to operate on 25 kilohertz bandwidth channels must meet the requirements of either Emission Mask B or G, whichever is applicable, while equipment designed to operate on 12.5 kilohertz bandwidth channels must meet the requirements of Emission Mask D. Equipment designed to operate on 25 kilohertz bandwidth channels may alternatively meet the Adjacent Channel Power limits of §90.221.

6. Transmitters utilizing analog emissions that are equipped with an audio low-pass filter must meet Emission Mask B. All transmitters utilizing digital emissions and those transmitters using analog emissions without an audio low-pass filter must meet Emission Mask H.

RSS-119 Table 3 – Channel Bandwidths, Authorized Bandwidths and Spectrum Masks

Frequency Band (MHz)	Related SRSP for Channelling Plan and ERP	Channel Bandwidth (kHz)	Authorized Bandwidth (kHz)	Spectrum Masks for Equipment With Audio Filter	Spectrum Masks for Equipment Without Audio Filter
27.41-28 and 29.7-50	N/A	20	20	B	C
72-76	N/A	20	20	B	C
138-144, 148-149.9 and 150.05-174	SRSP-500	30	20	B	C
		15	11.25	D	D
		7.5	6	E	E
217-218 and 219-220	N/A	12.5	11.25	D or I	D or J
220-222	SRSP-512	5	4	F	F
406.1-430 and 450-470	SRSP-501	25	20 22	B Y	C (G) (Note 1) Y
		12.5	11.25	D	D
		6.25	6	E	E
768-776 and 798-806	SRSP-511	6.25 12.5 25 50	(Note 2)	See Section 5.8.9	See Section 5.8.9
806-821/851-866 and 821-824/866-869	SRSP-502	25	20 22	B Y	G Y
		12.5	11.25	D	D
		6.25	6	E	E
896-901/935-940	SRSP-506	12.5	13.6	I	J (G) (Note 3)
929-930 and 931-932	SRSP-504 (for paging)	25	20	B	G
928-929/952-953 and 932-932.5/941-941.5	SRSP-505	25	20	B	G
		12.5	11.25	D	D
932.5-935/941.5-944	SRSP-507	25	20	B	G
		12.5	11.25	D	D

Notes:


- Paging transmitters in the bands 406.1-430 MHz and 450-470 MHz are to use mask G.
- Provided that the ACP requirements in Section 5.8.9.1 are met, any authorized bandwidth that does not exceed the channel bandwidth can be used.

3. Mask G applies if two 12.5 kHz channels are aggregated. Alternatively, a mask may be used if it does not produce more adjacent channel interference than narrowband (12.5 kHz) channel equipment.


5.5.1 For the band 72-76 MHz, the channel carriers for fixed and mobile stations are given in tables 4(a) and 4(b) respectively. It is to be noted that 0.75 W licence-exempt radios (see RSS-210, Licence-exempt Radio Apparatus (All Frequency Banks): Category I Equipment) are permitted interstitially, 10 kHz offset to tables 4(a) and 4(b) frequencies, in the bands 72.01-72.99 MHz and 75.41-75.99 MHz.

7.2 Test Data


Plot 7-1: Occupied Bandwidth – 136.0125 MHz; Wideband Analog; Mask B

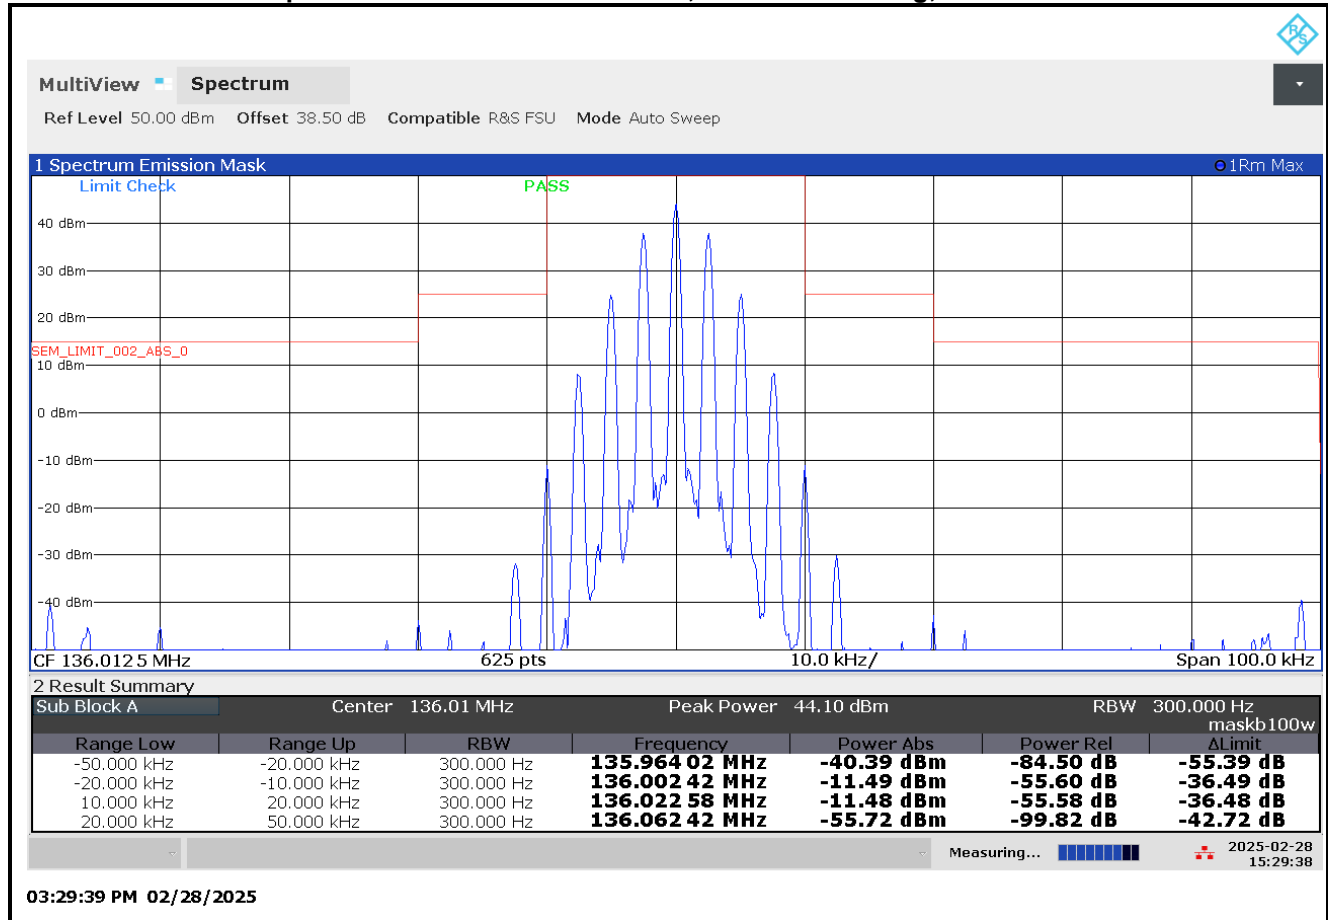


Plot 7-2: Occupied Bandwidth – 155.0125 MHz; Wideband Analog; Mask B

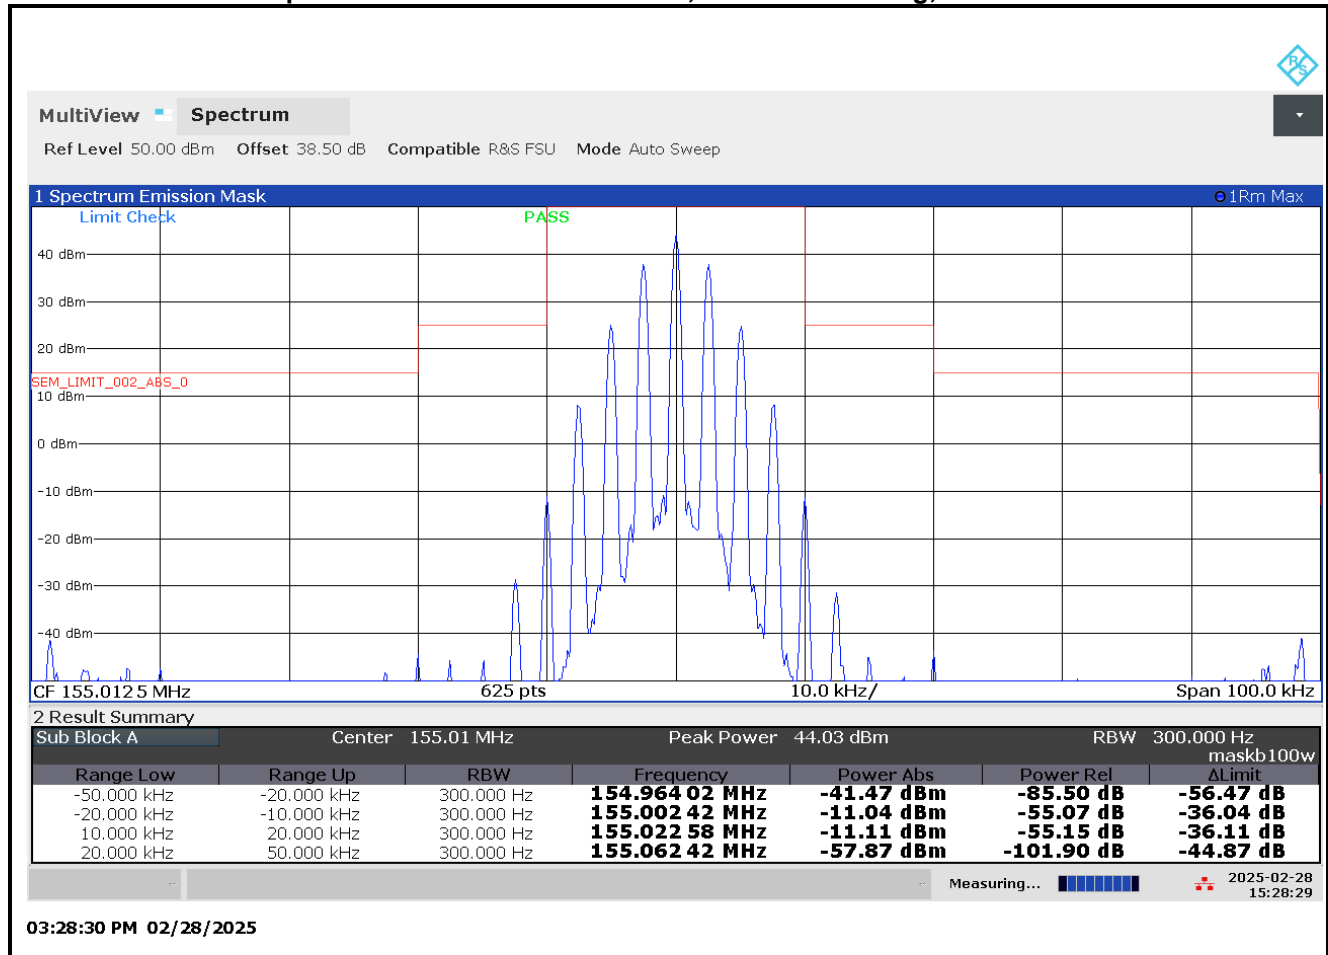


Plot 7-3: Occupied Bandwidth – 173.9875 MHz; Wideband Analog; Mask B

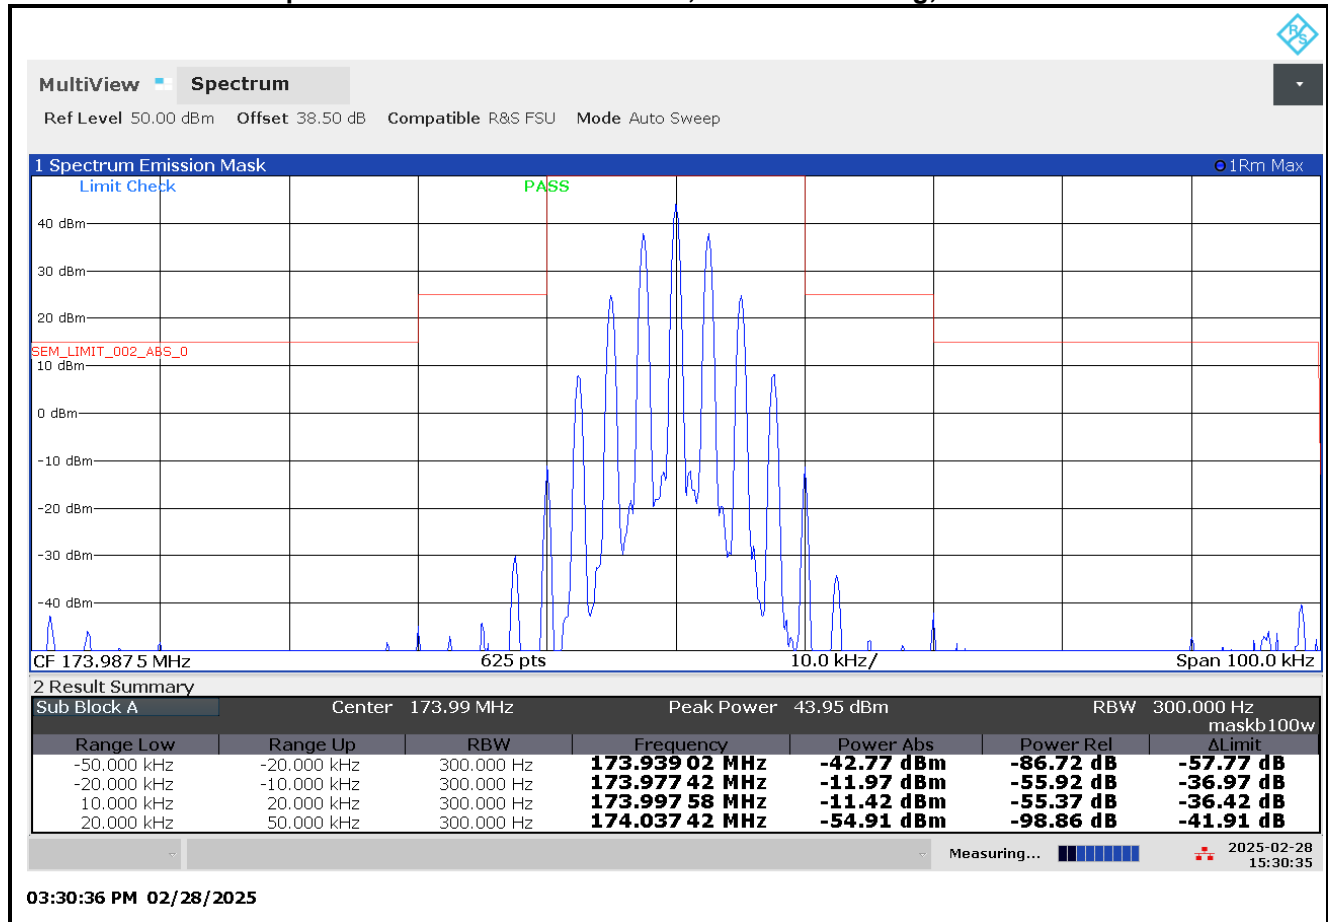


Plot 7-4: Occupied Bandwidth – 136.0125 MHz; Narrowband Analog; Mask D

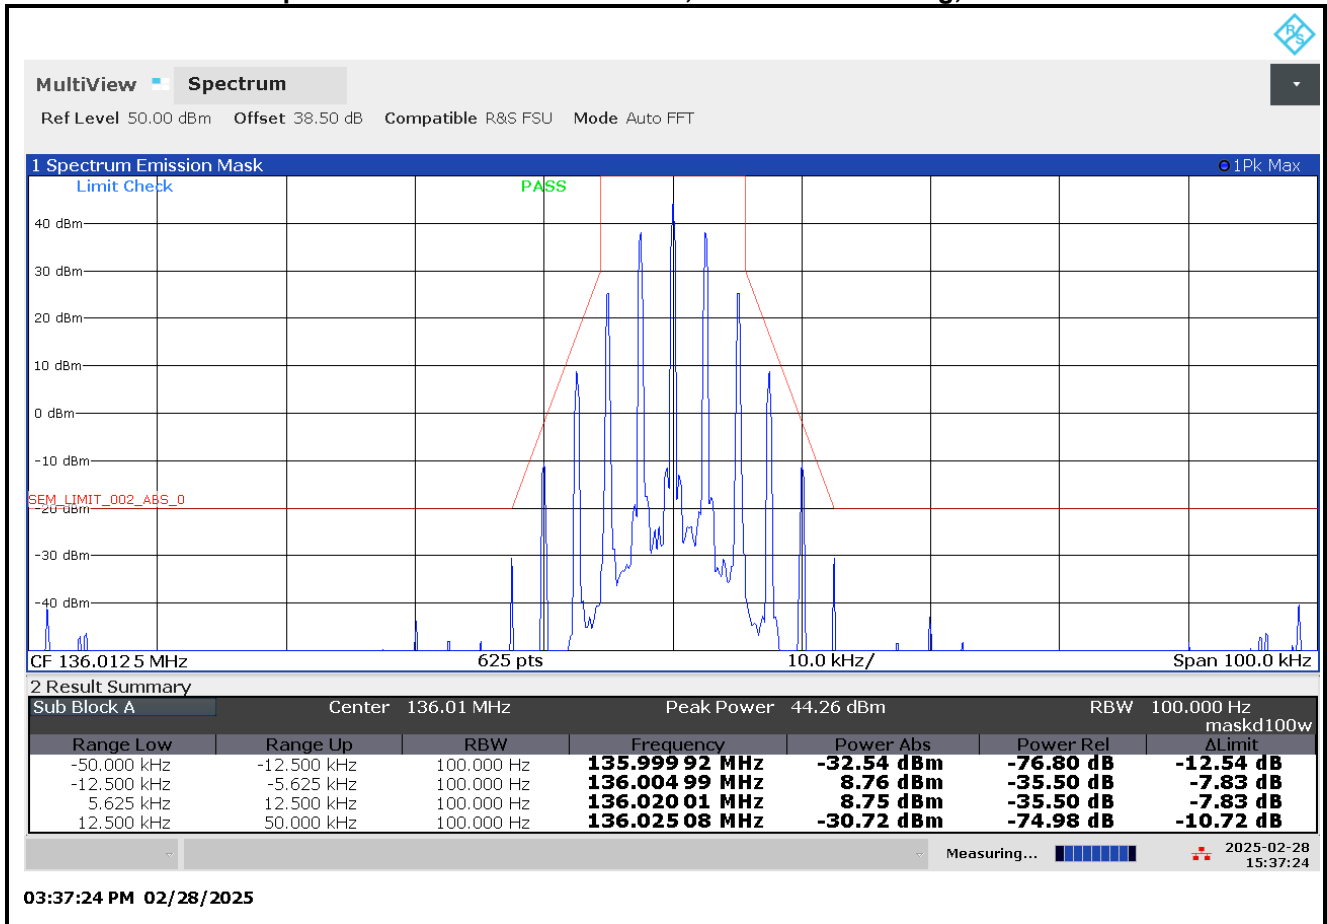


Plot 7-5: Occupied Bandwidth – 155.0125 MHz; Narrowband Analog; Mask D

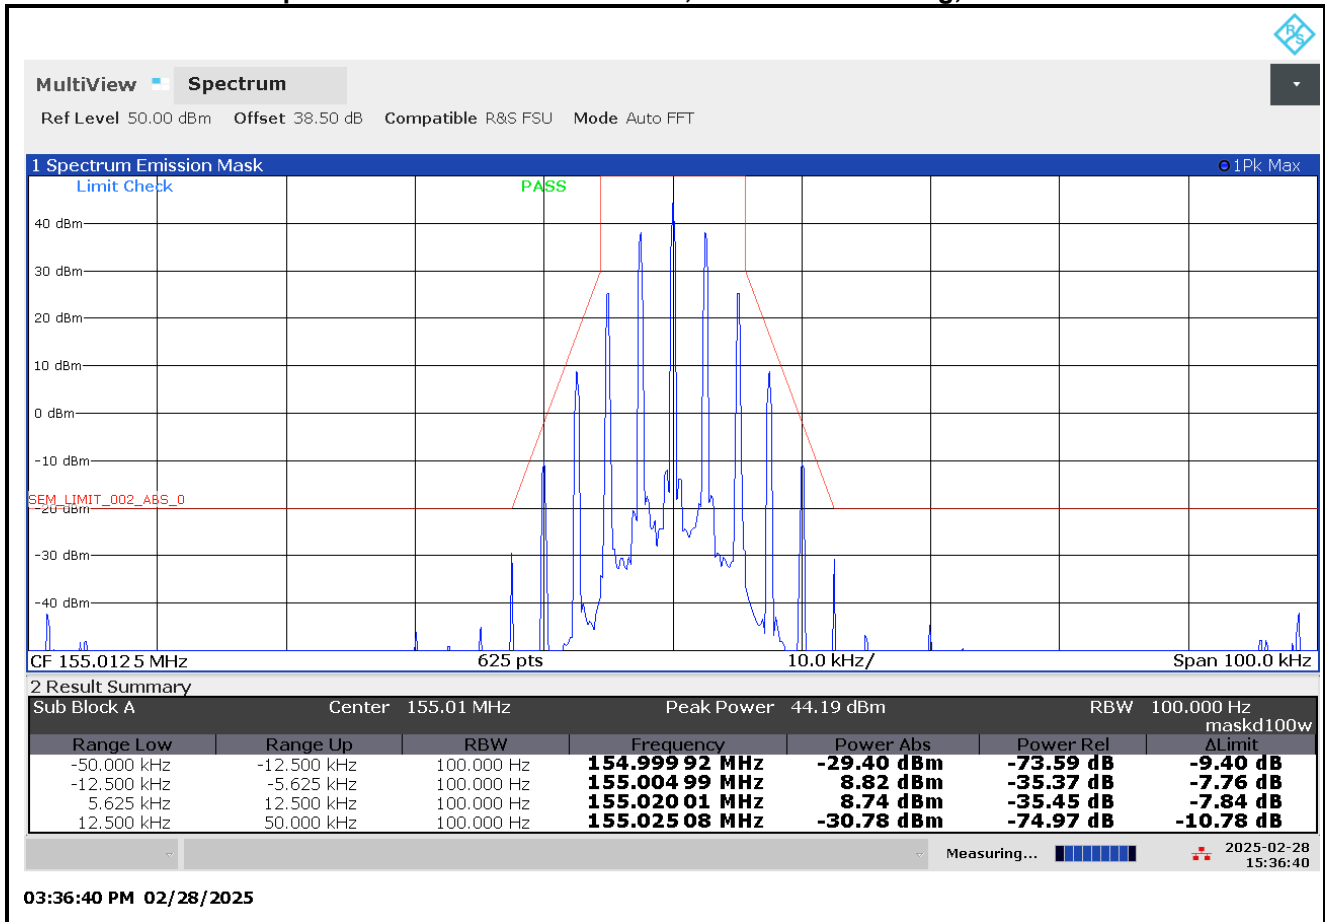


Plot 7-6: Occupied Bandwidth – 173.9875 MHz; Narrowband Analog; Mask D

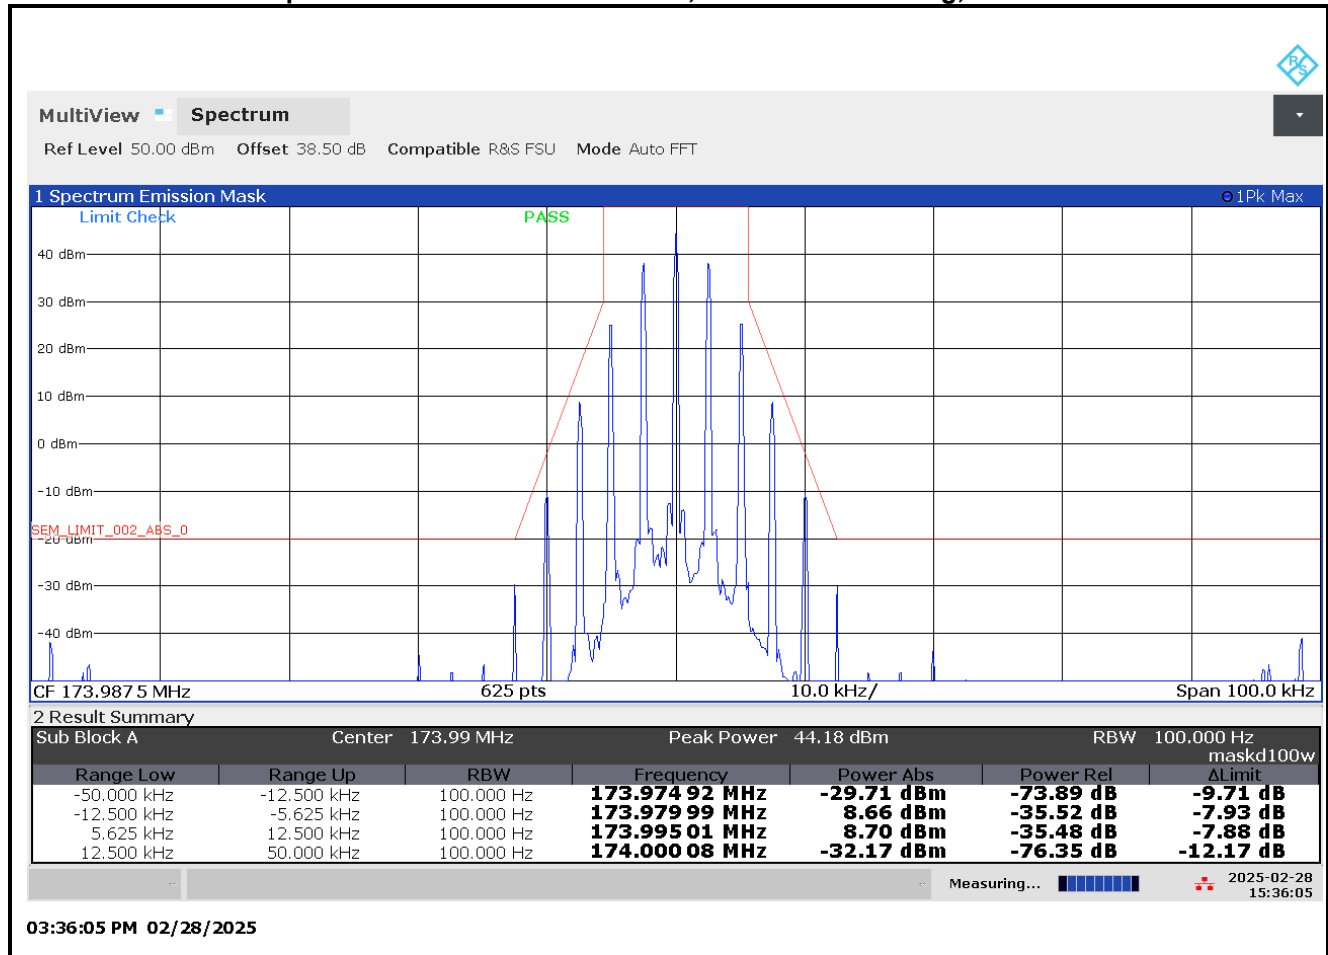


Plot 7-7: Occupied Bandwidth – 136.0125 MHz; Wideband 2-level FSK 9600; Mask C

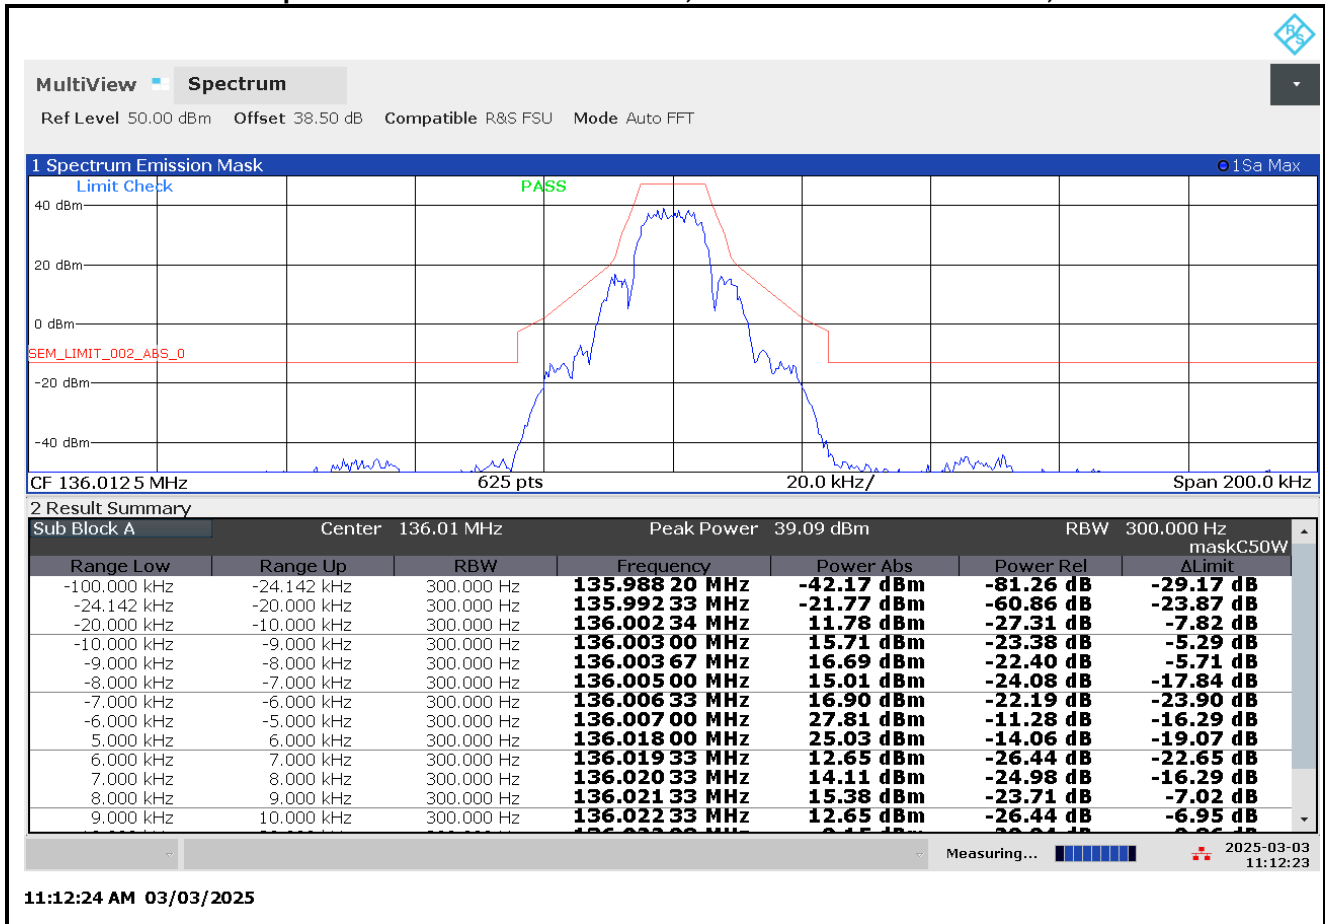


Plot 7-8: Occupied Bandwidth – 155.0125 MHz; Wideband 2-level FSK 9600; Mask C

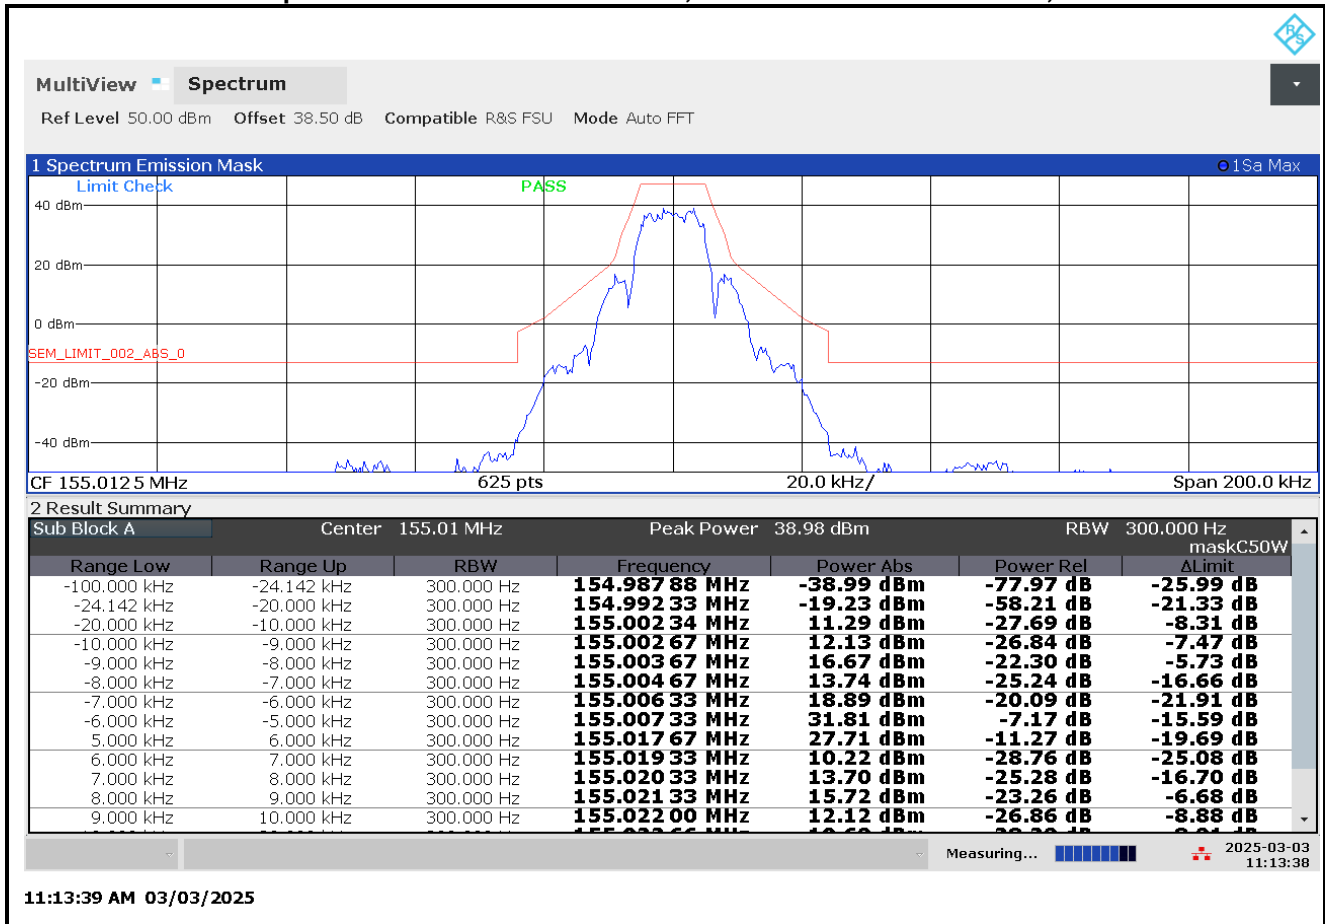


Plot 7-9: Occupied Bandwidth – 173.9875 MHz; Wideband 2-level FSK 9600; Mask C

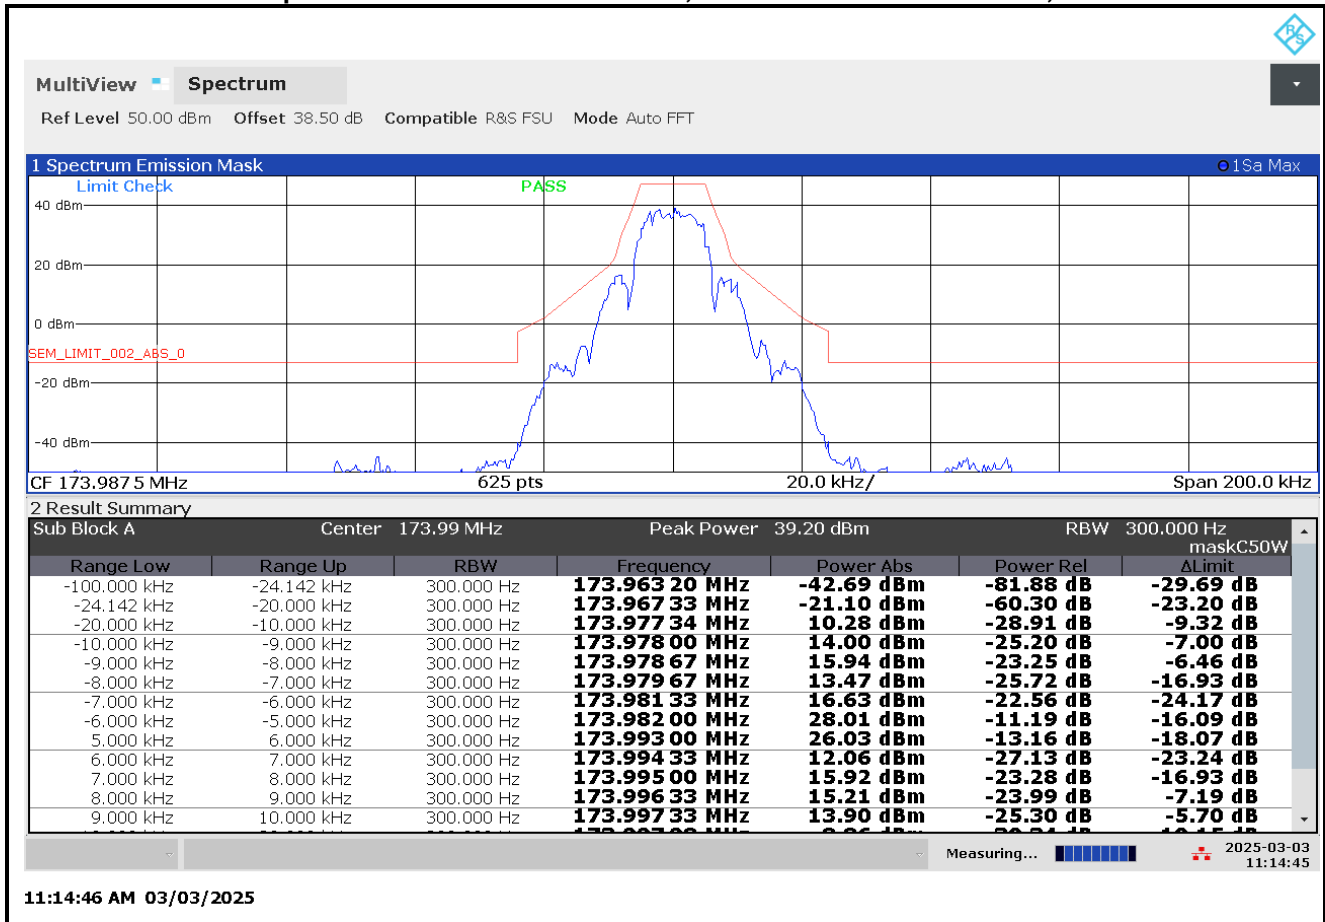


Plot 7-10: Occupied Bandwidth – 136.0125 MHz; Narrowband 2-level FSK 9600; Mask D

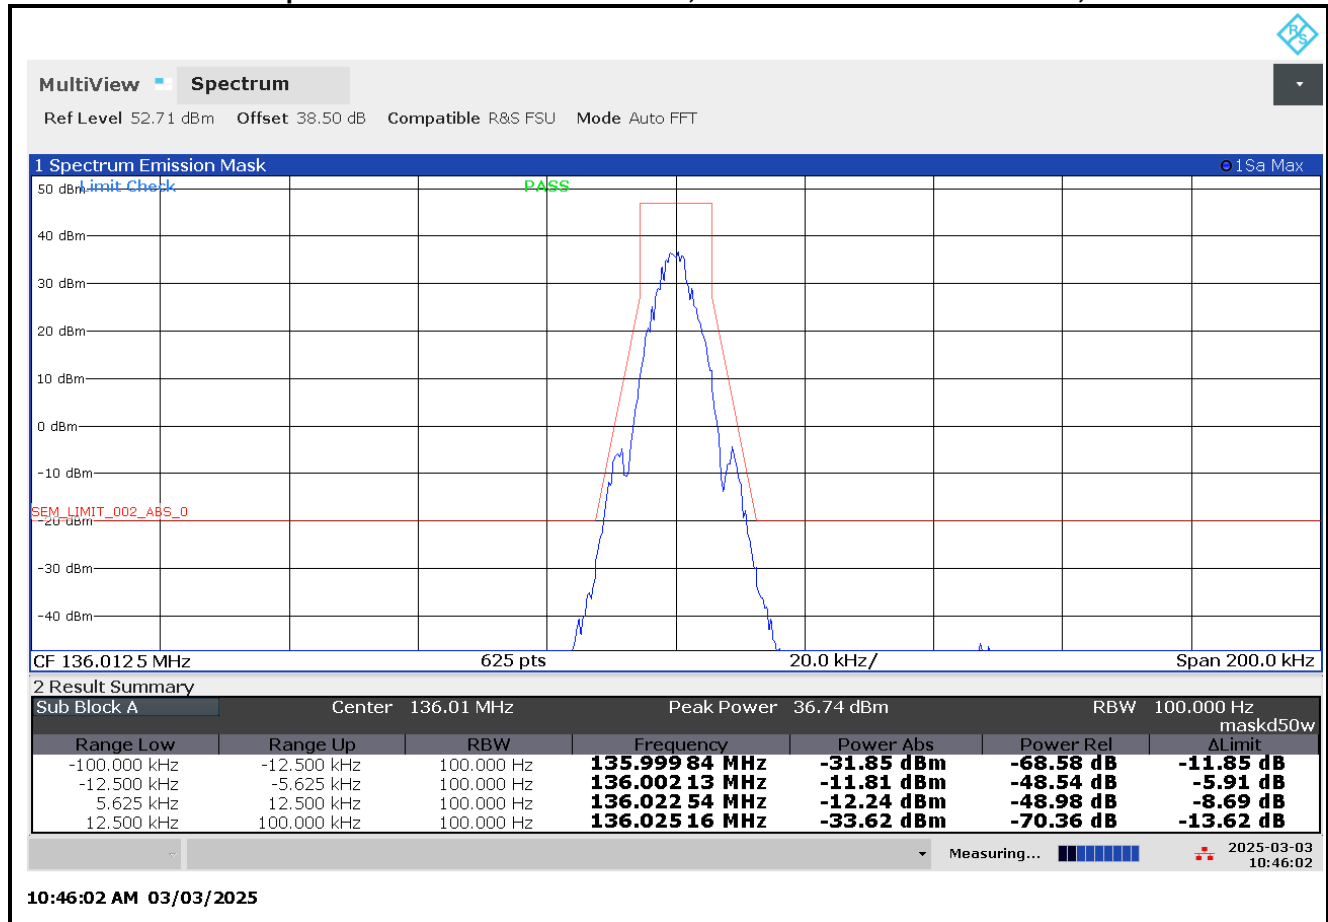


Plot 7-11: Occupied Bandwidth – 155.0125 MHz; Narrowband 2-level FSK 9600; Mask D

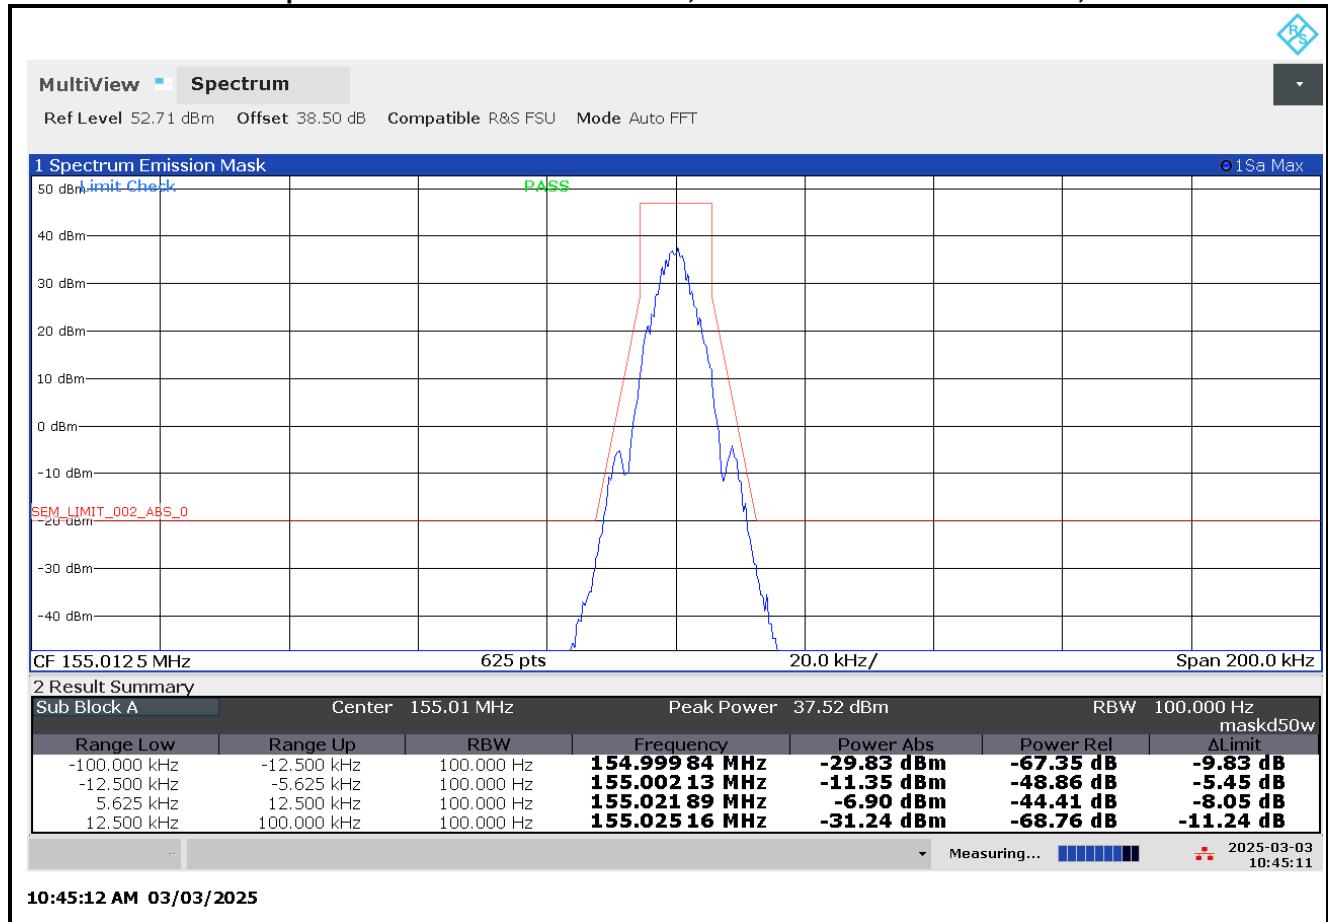


Plot 7-12: Occupied Bandwidth – 173.9875 MHz; Narrowband 2-level FSK 9600; Mask D

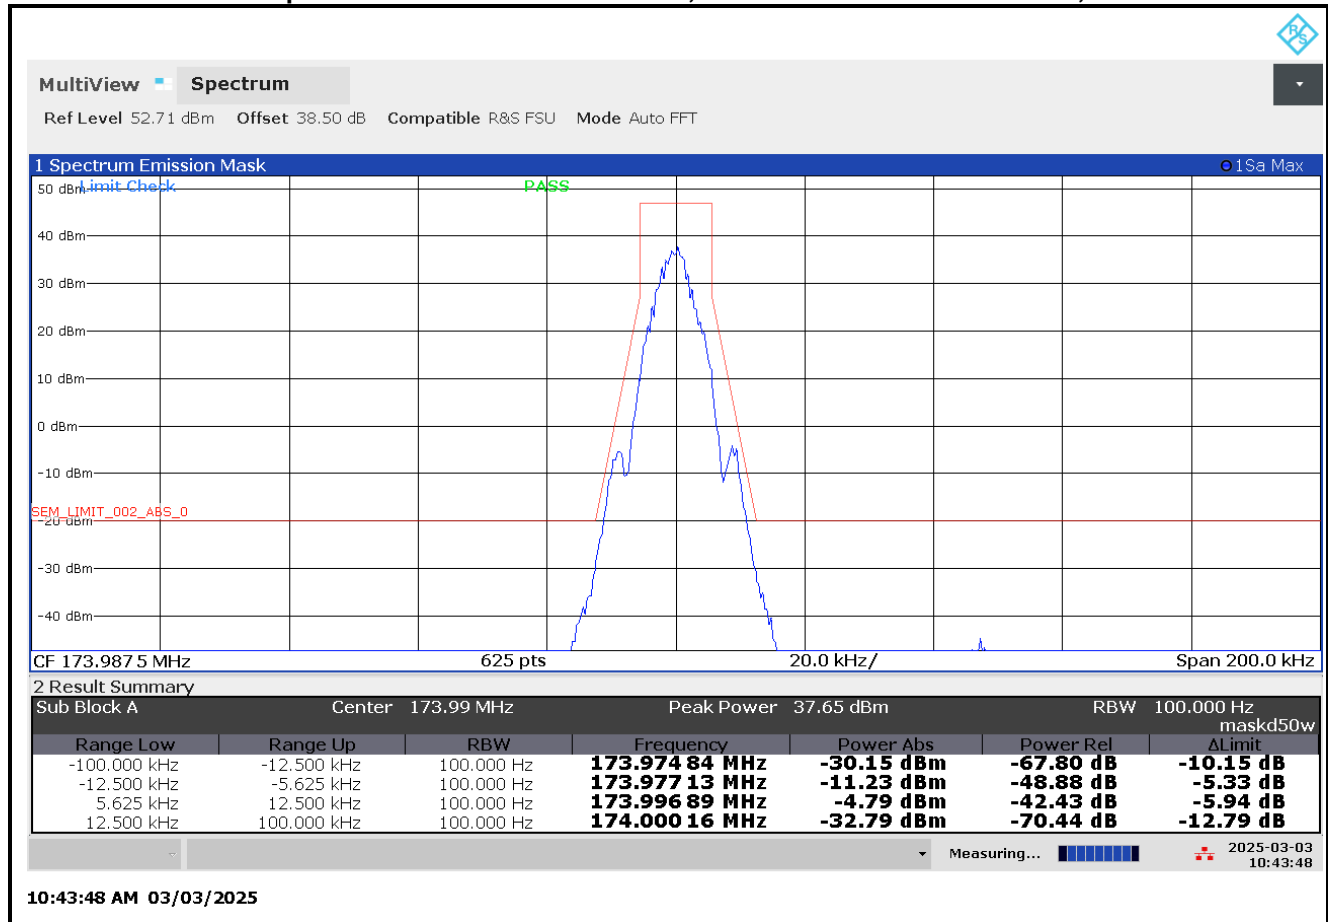


Plot 7-13: Occupied Bandwidth – 136.0125 MHz; C4FM; Mask D

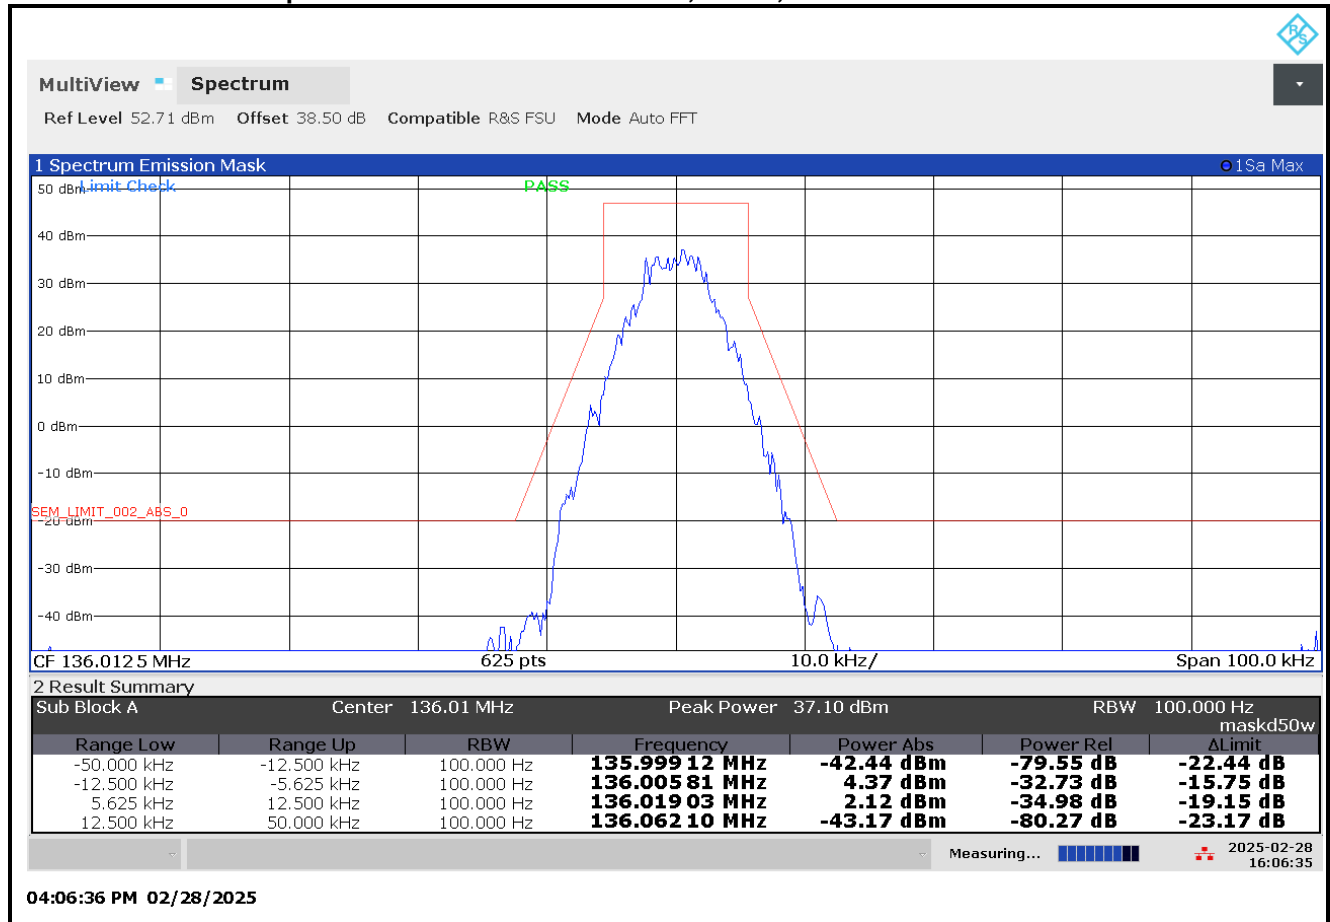


Plot 7-14: Occupied Bandwidth – 155.0125 MHz; C4FM; Mask D

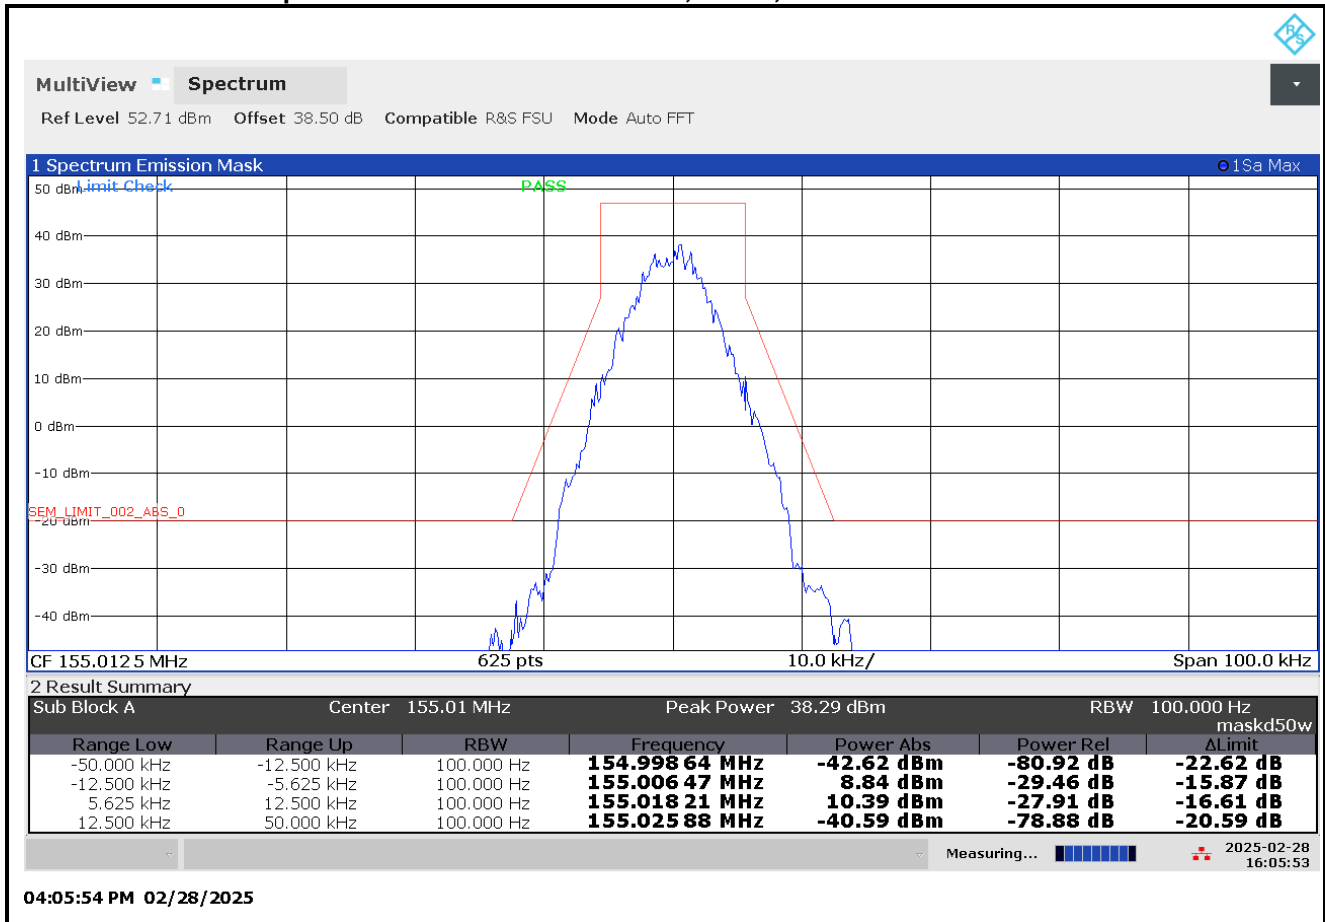


Plot 7-15: Occupied Bandwidth – 173.9875 MHz; C4FM; Mask D

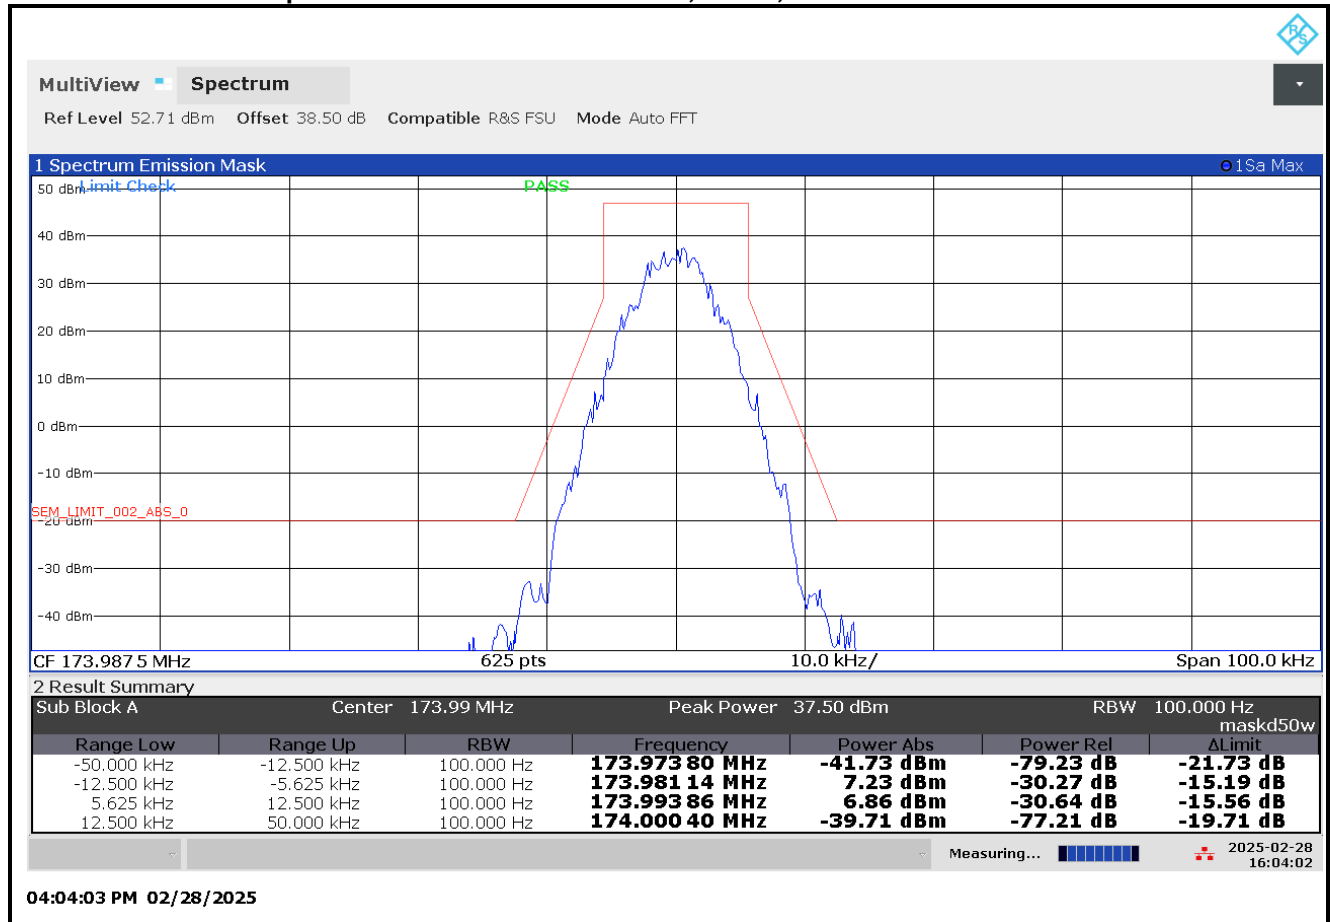


Plot 7-16: Occupied Bandwidth – 136.0125 MHz; H-CPM TDMA; Mask D

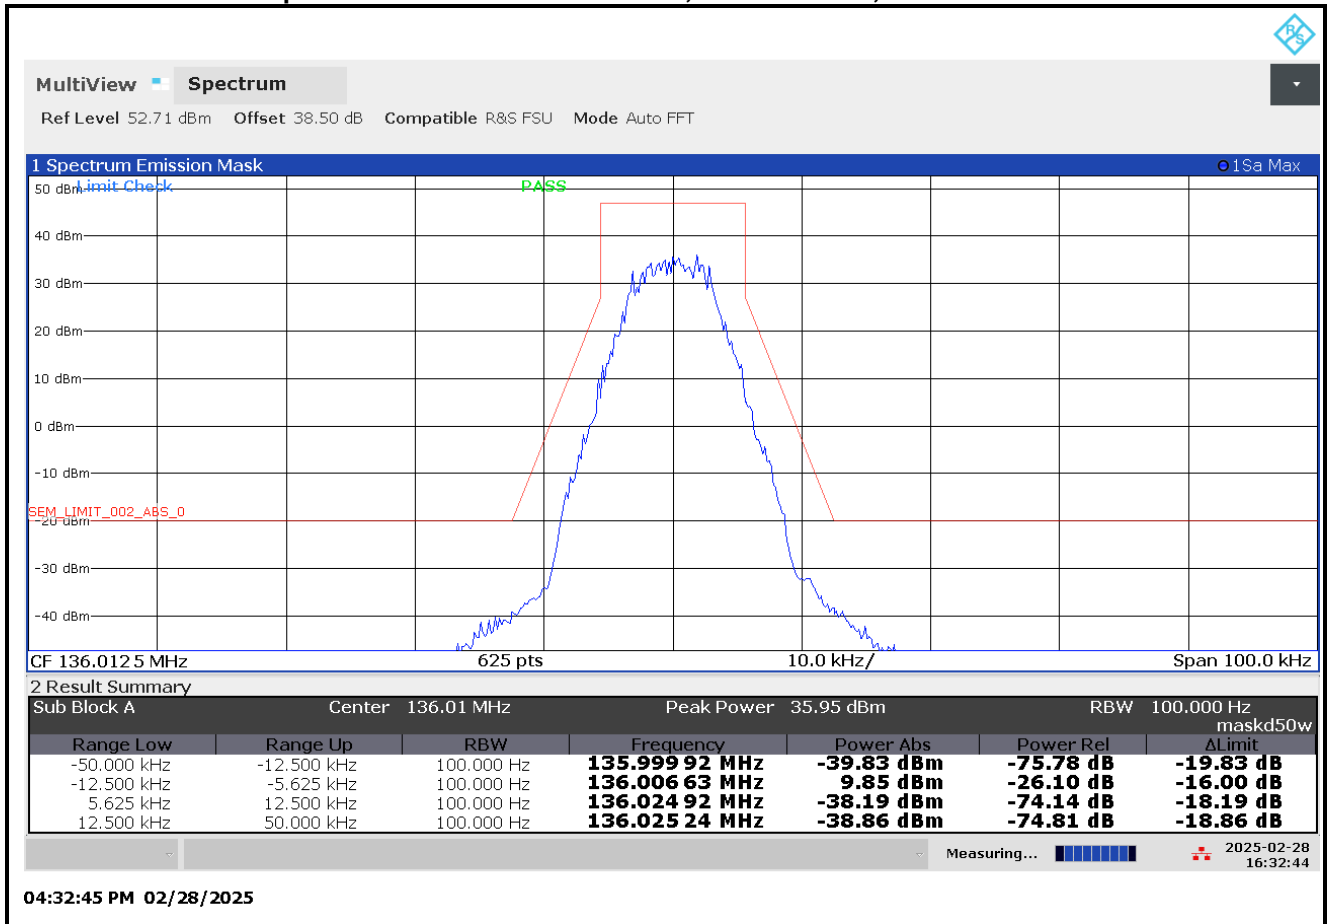


Plot 7-17: Occupied Bandwidth – 155.0125 MHz; H-CPM TDMA; Mask D

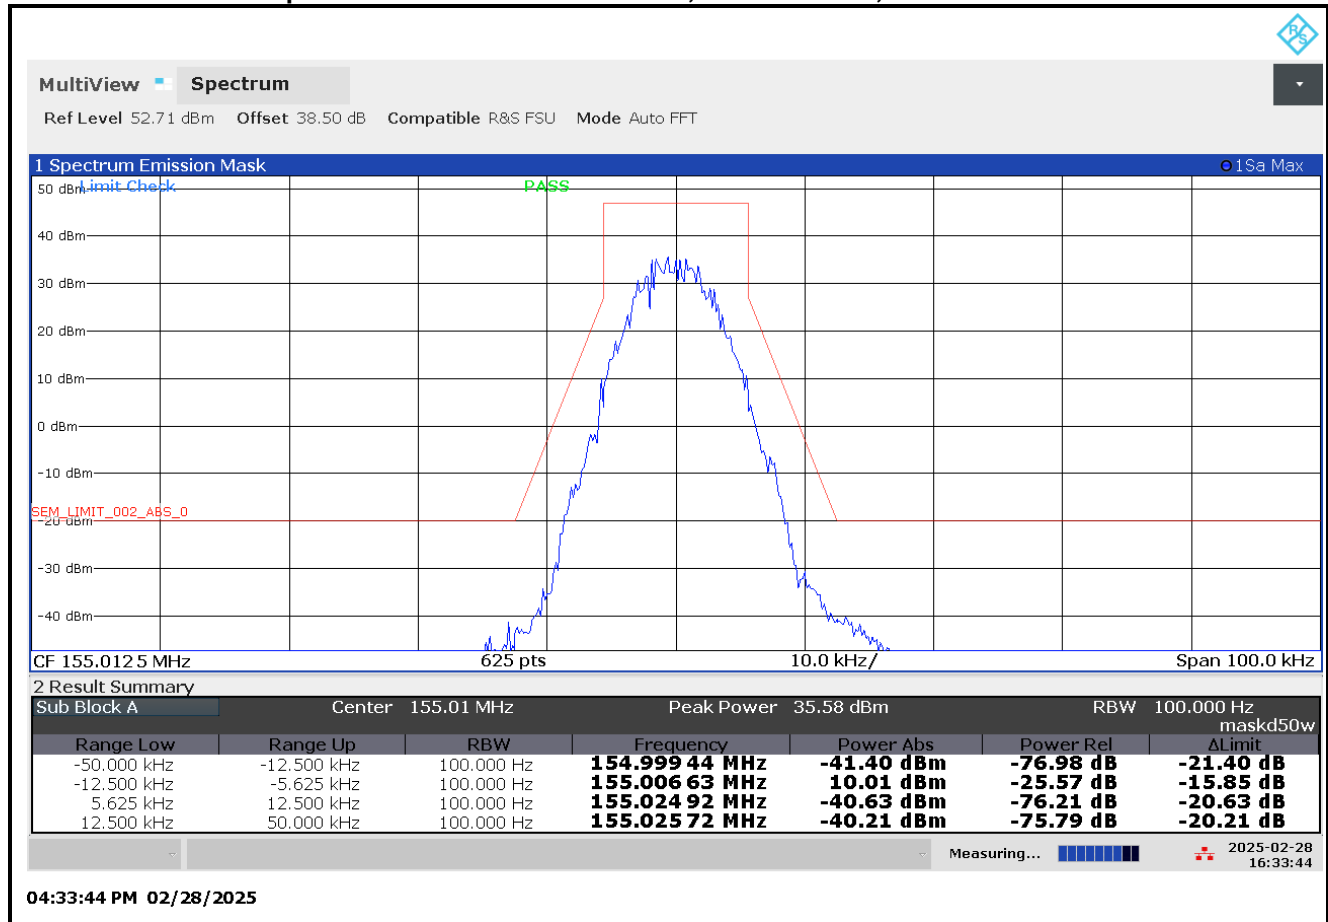


Plot 7-18: Occupied Bandwidth – 173.9875 MHz; H-CPM TDMA; Mask D

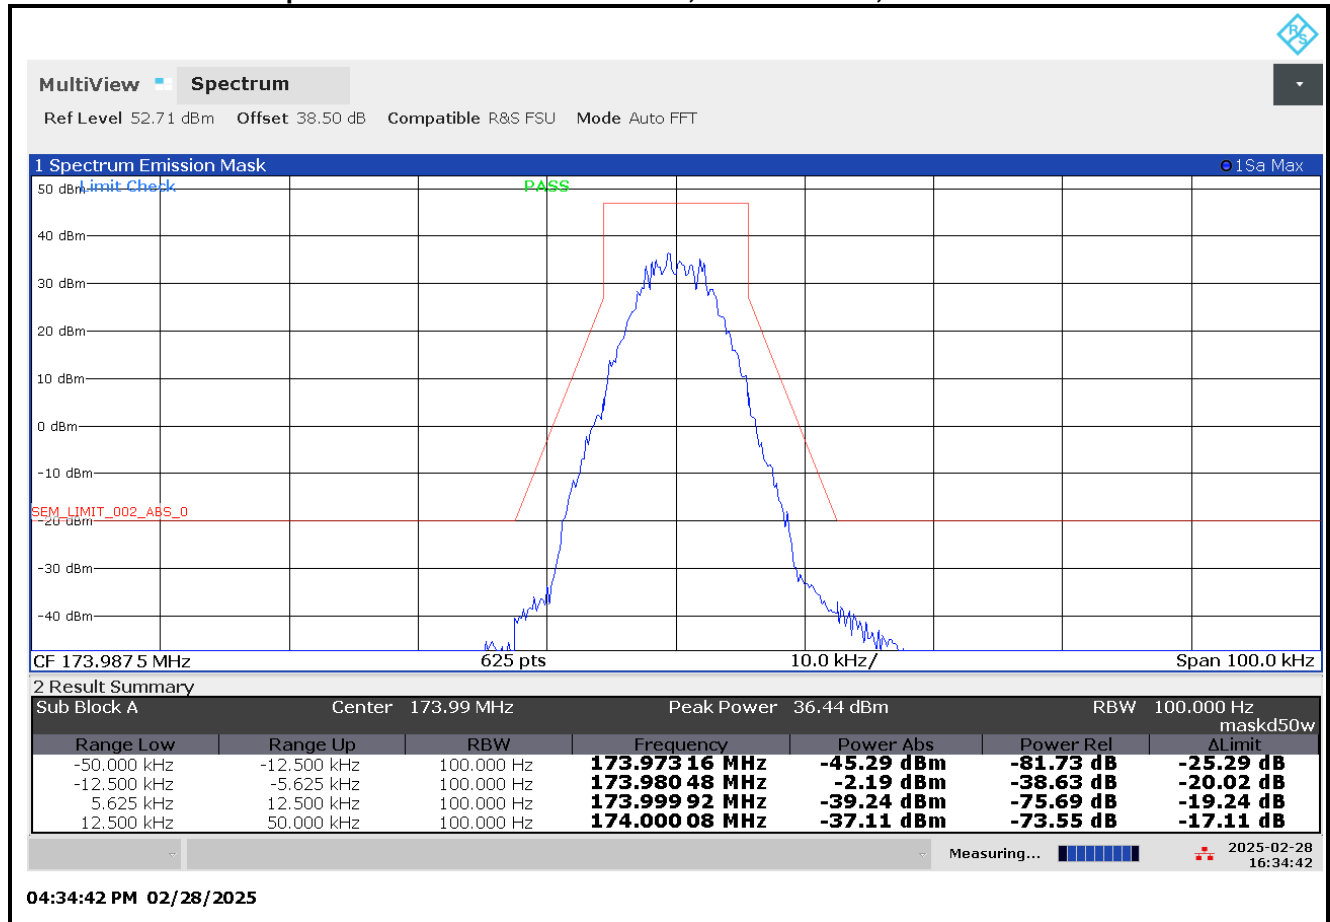


Plot 7-19: OBW 99%, 136.0125 MHz, Narrowband Analog

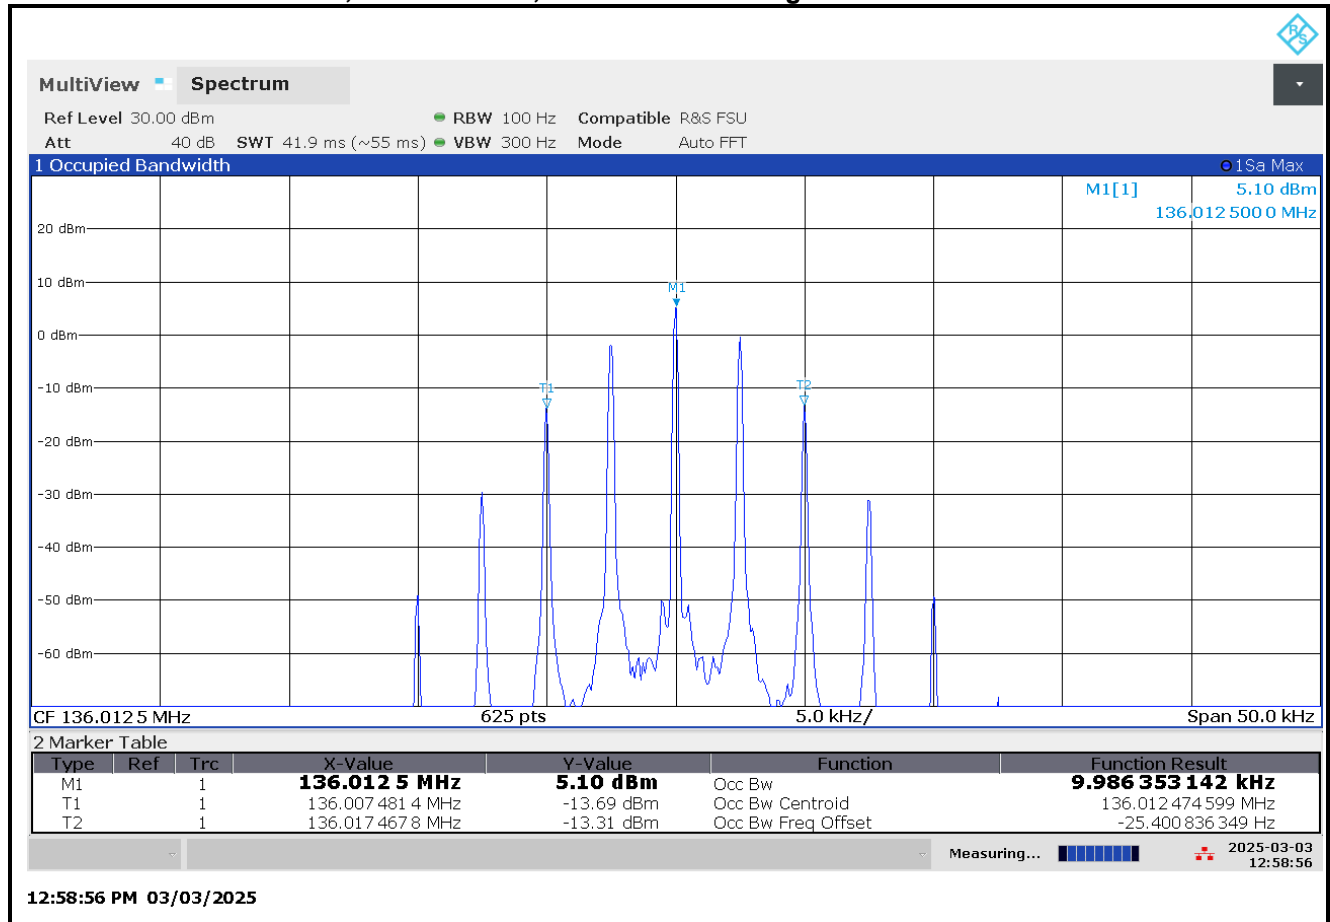


Plot 7-20: OBW 99%, 155.0125 MHz, Narrowband Analog

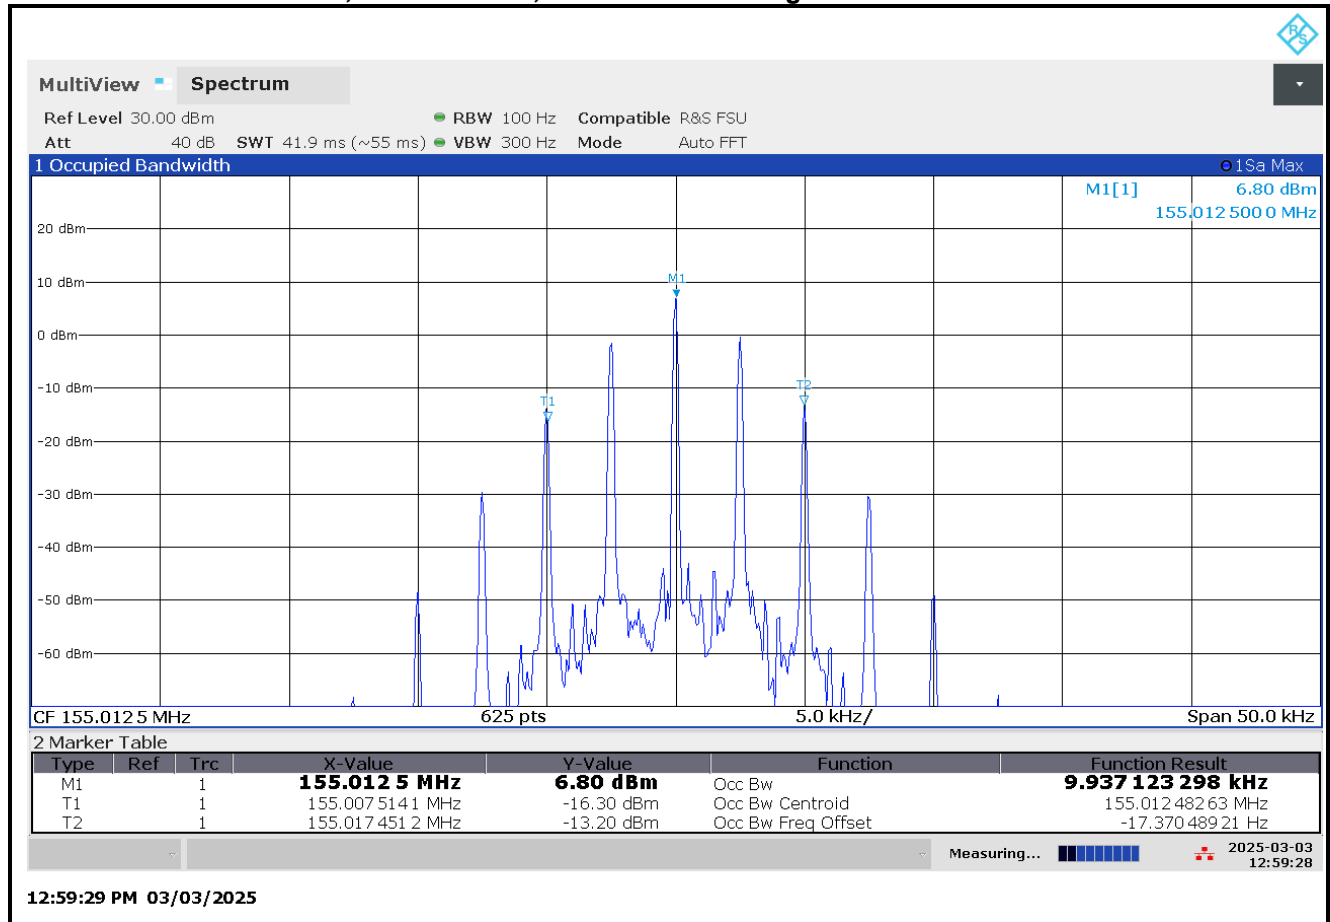


Plot 7-21: OBW 99%, 173.9875 MHz, Narrowband Analog

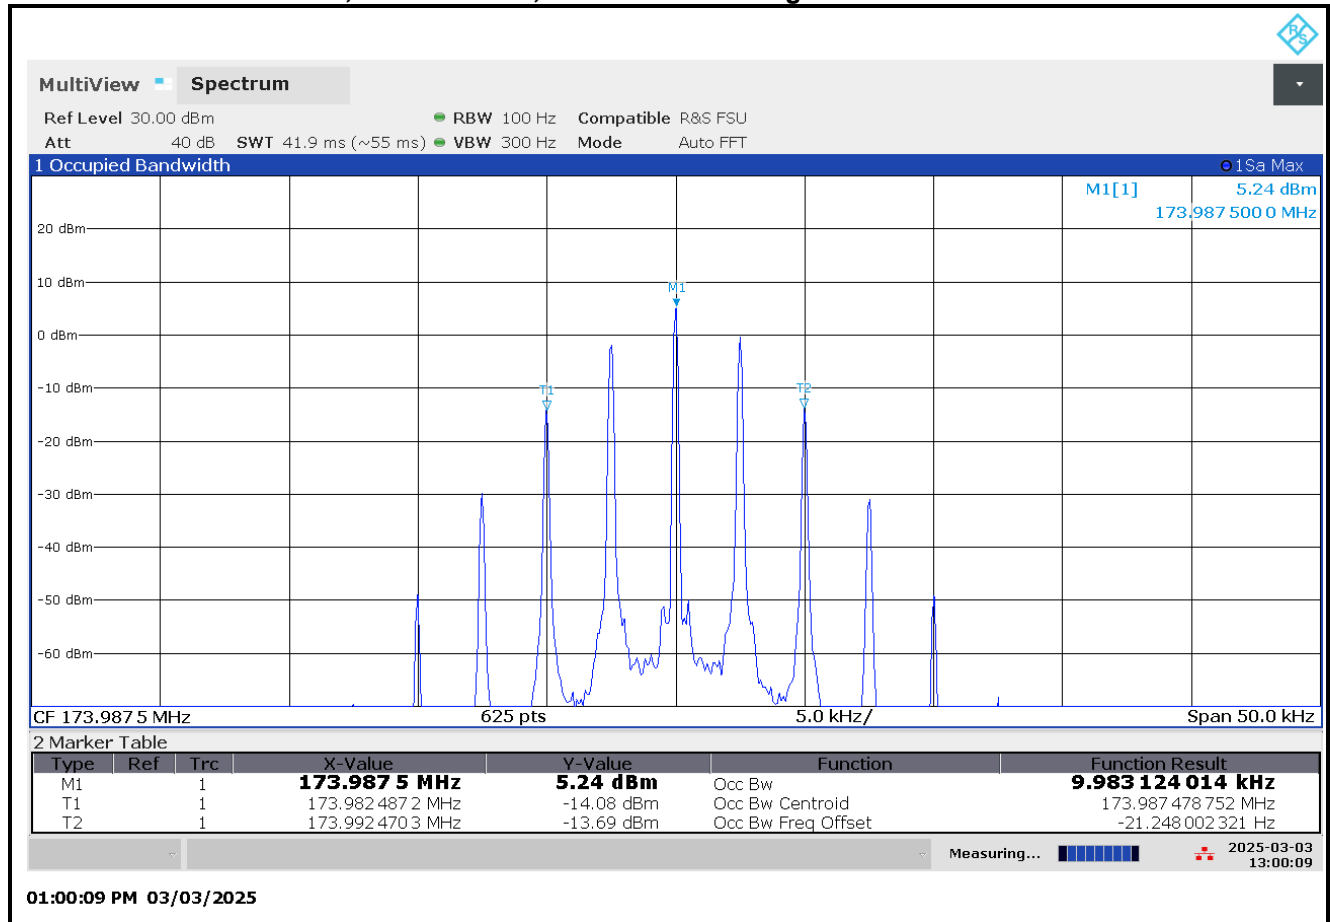


Plot 7-22: OBW 99%, 136.0125 MHz, Wideband Analog

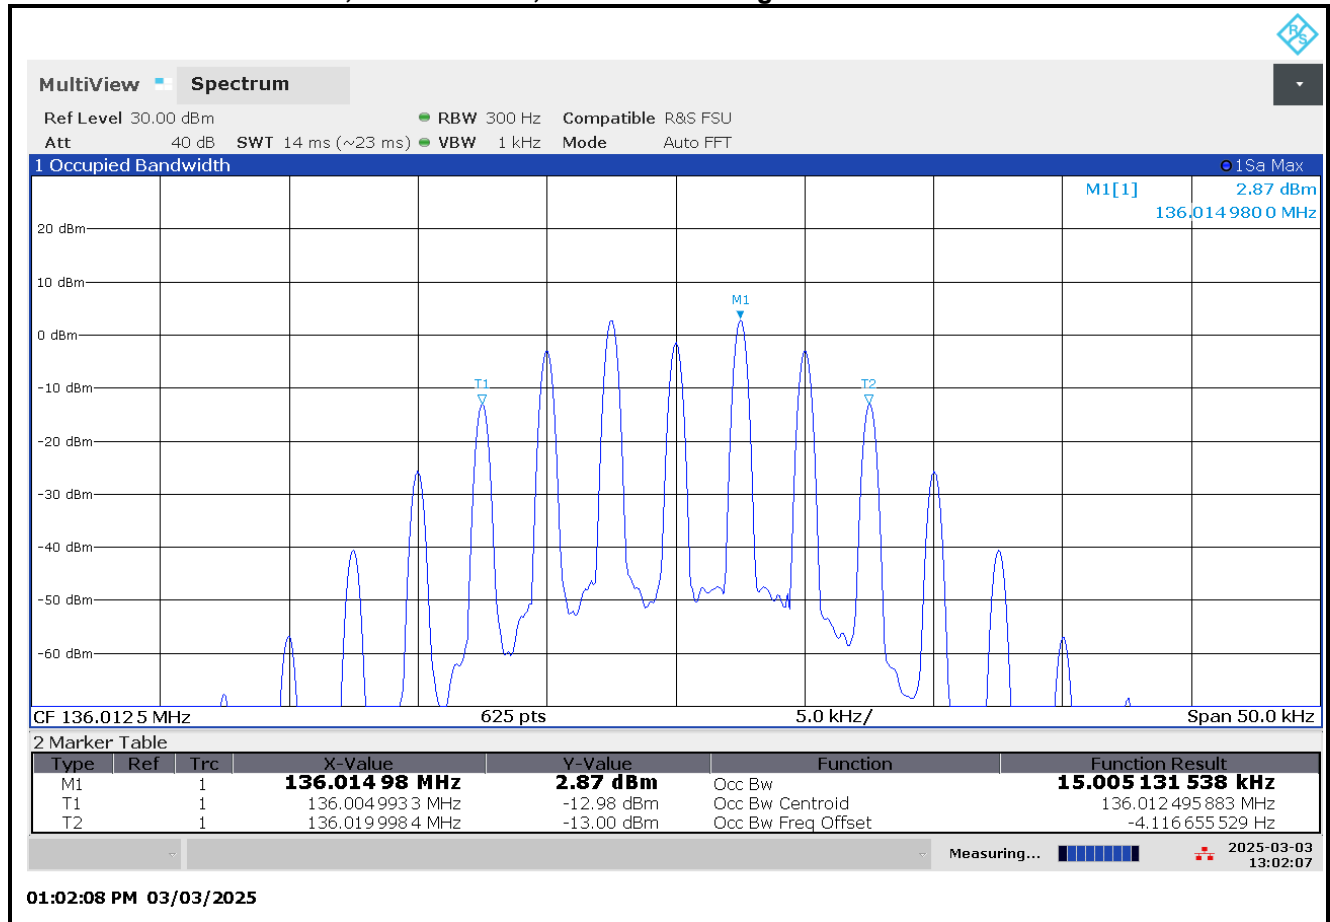


Plot 7-23: OBW 99%, 155.0125 MHz, Wideband Analog

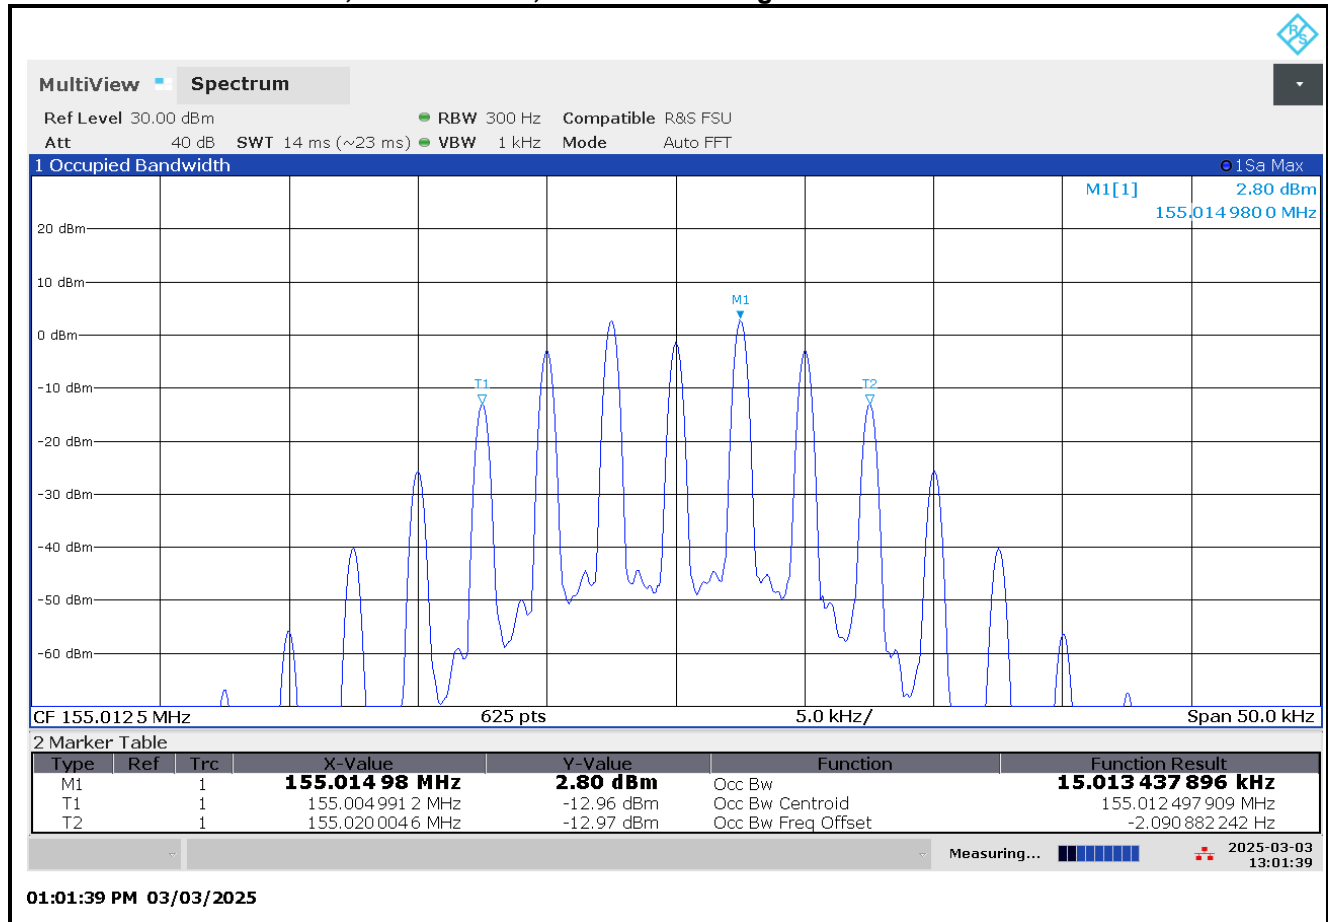


Plot 7-24: OBW 99%, 173.9875 MHz, Wideband Analog

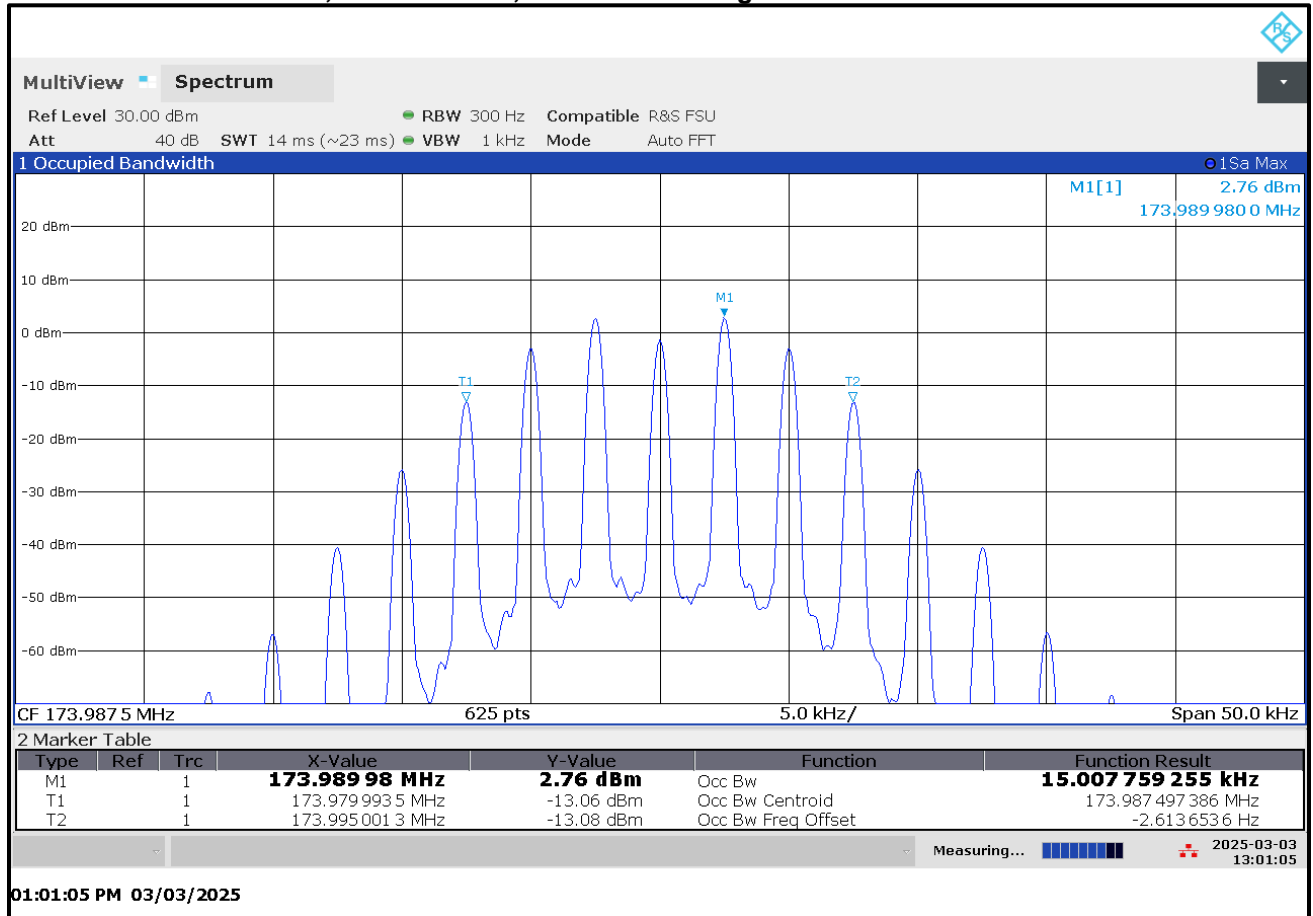


Plot 7-25: OBW 99%, 136.0125 MHz, C4FM

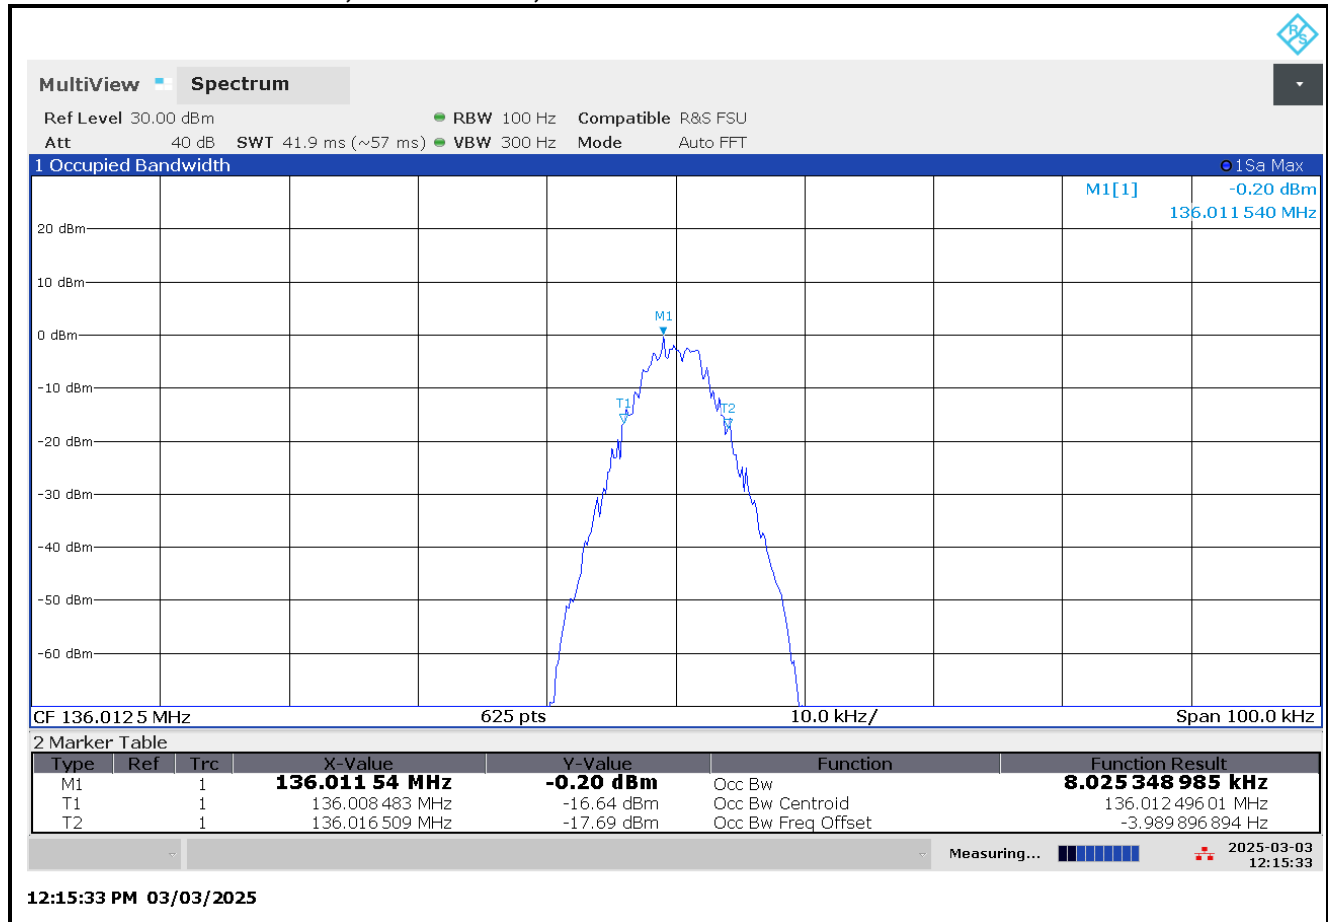


Plot 7-26: OBW 99%, 155.0125 MHz, C4FM

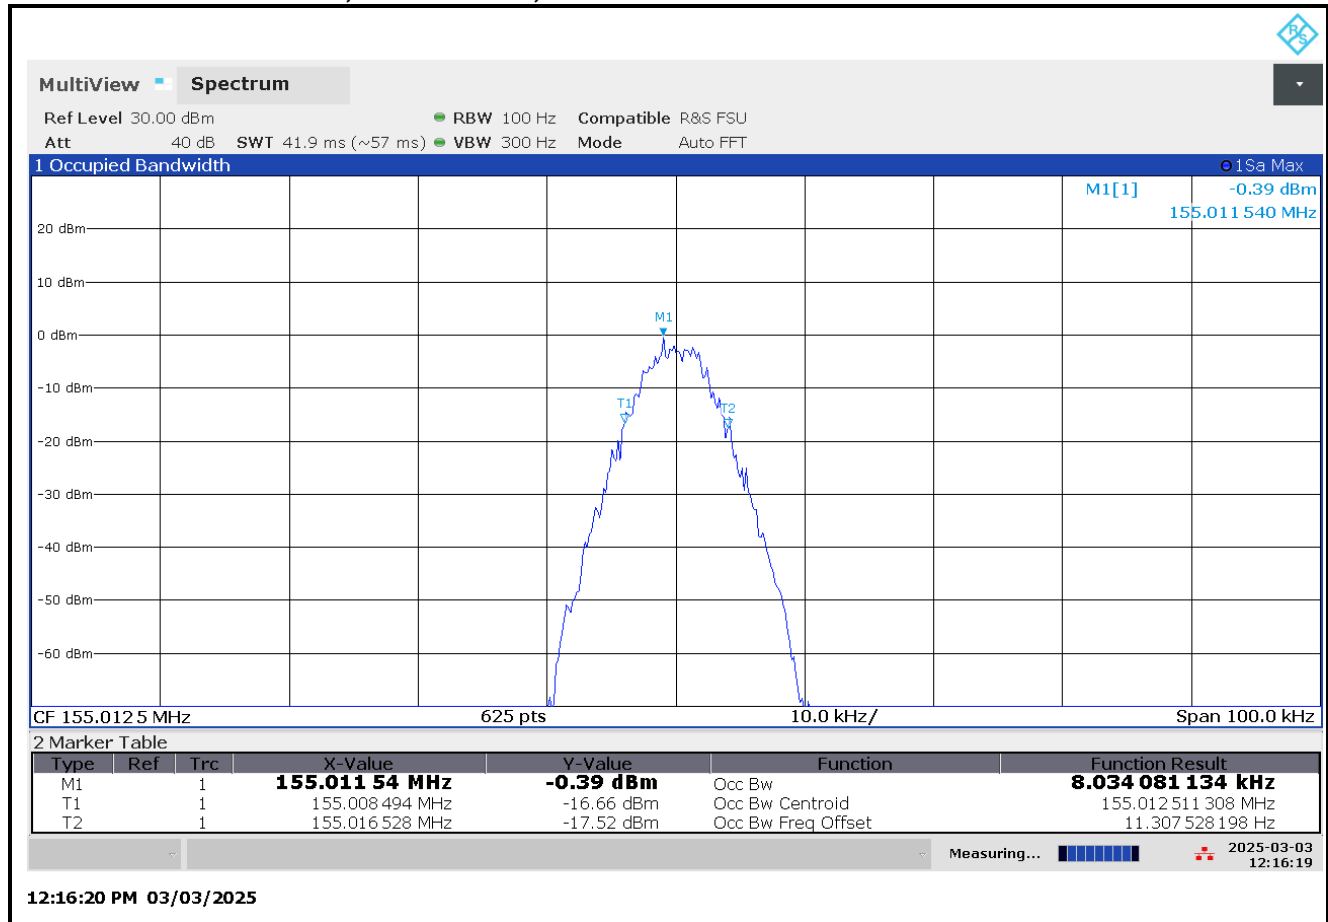


Plot 7-27: OBW 99%, 173.9875 MHz, C4FM

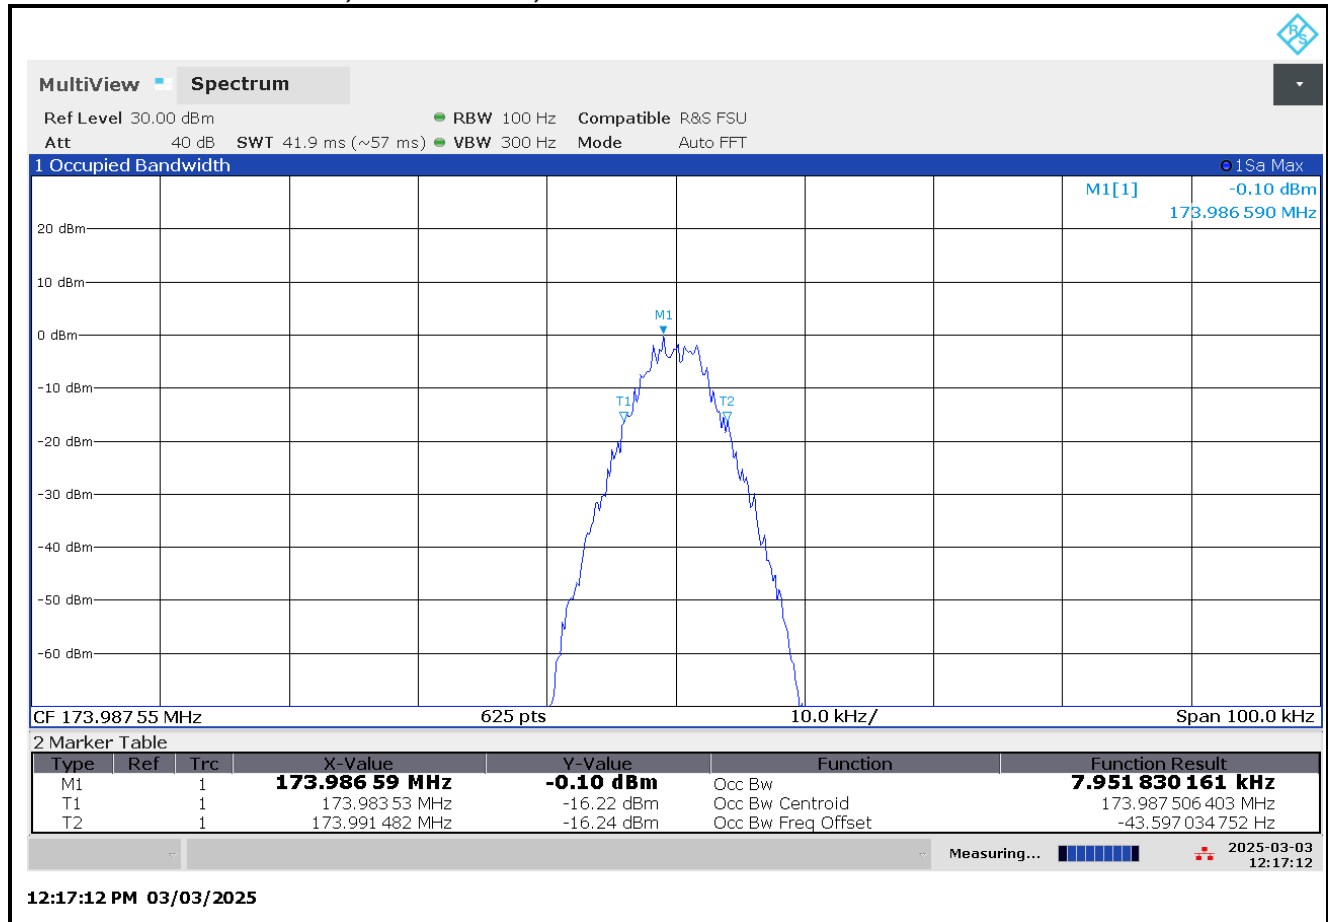


Plot 7-28: OBW 99%, 136.0125 MHz, H-CPM TDMA

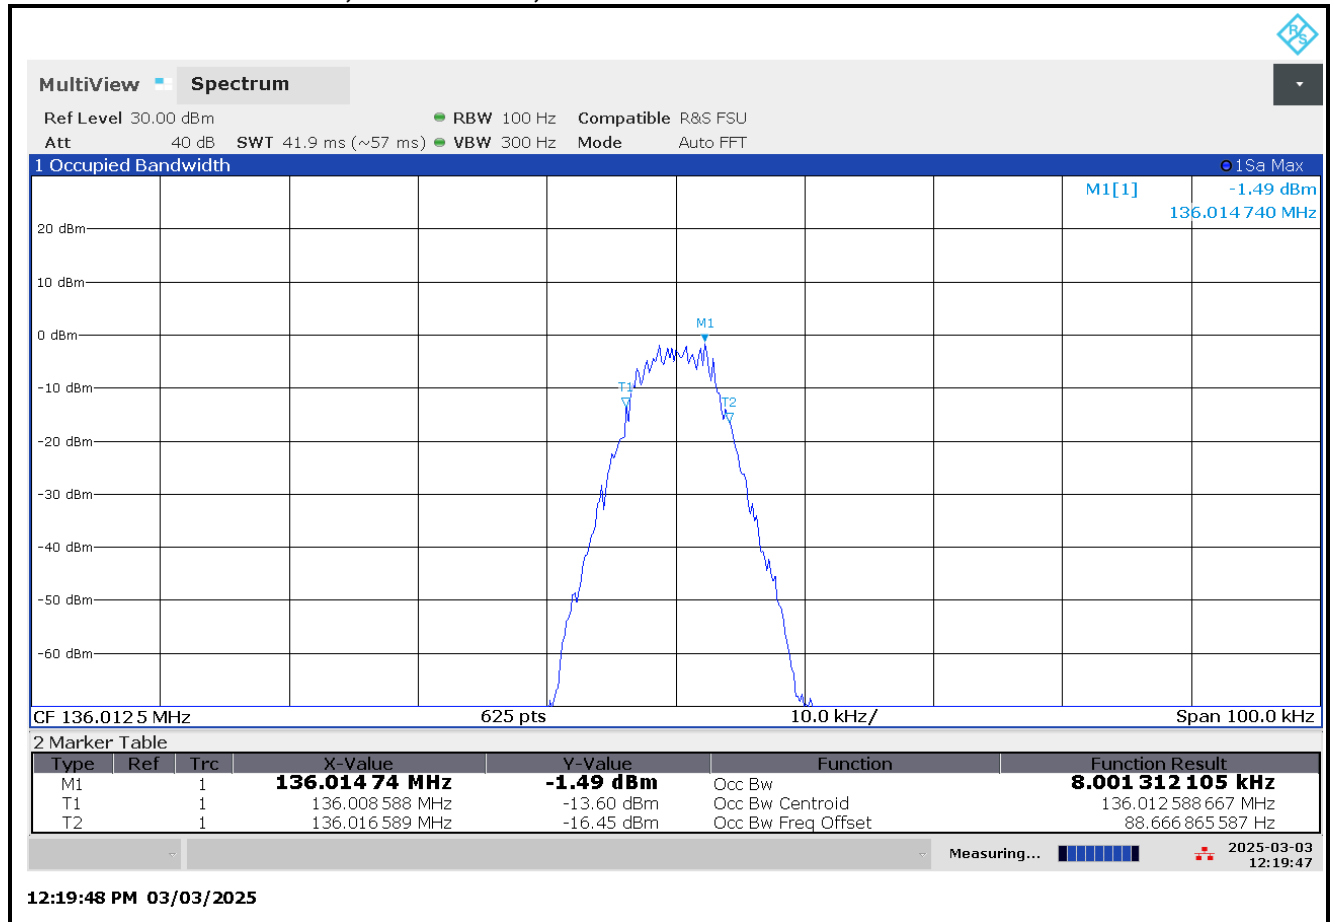


Plot 7-29: OBW 99%, 155.0125 MHz, H-CPM TDMA

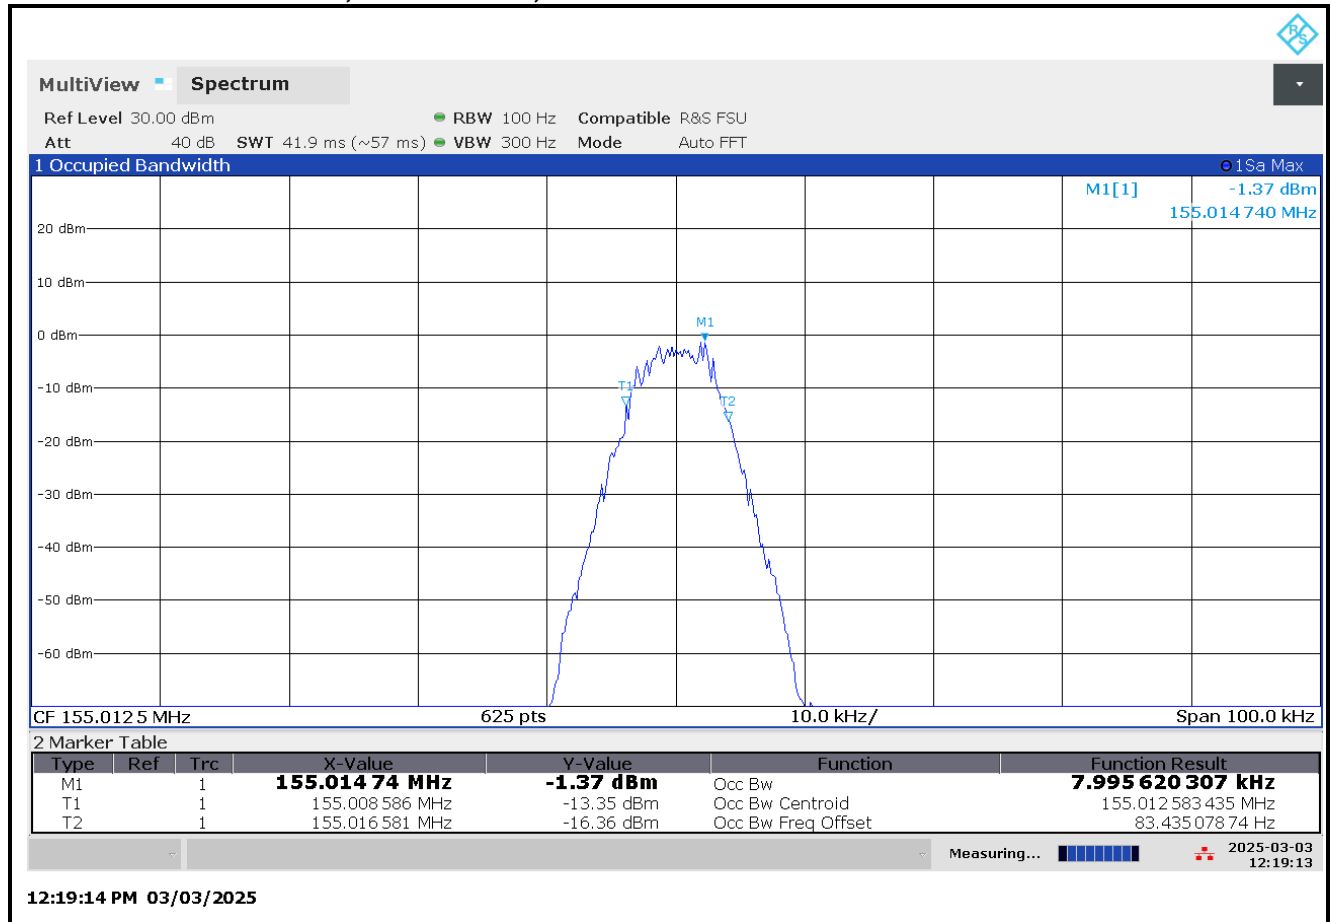


Plot 7-30: OBW 99%, 173.9875 MHz, H-CPM TDMA

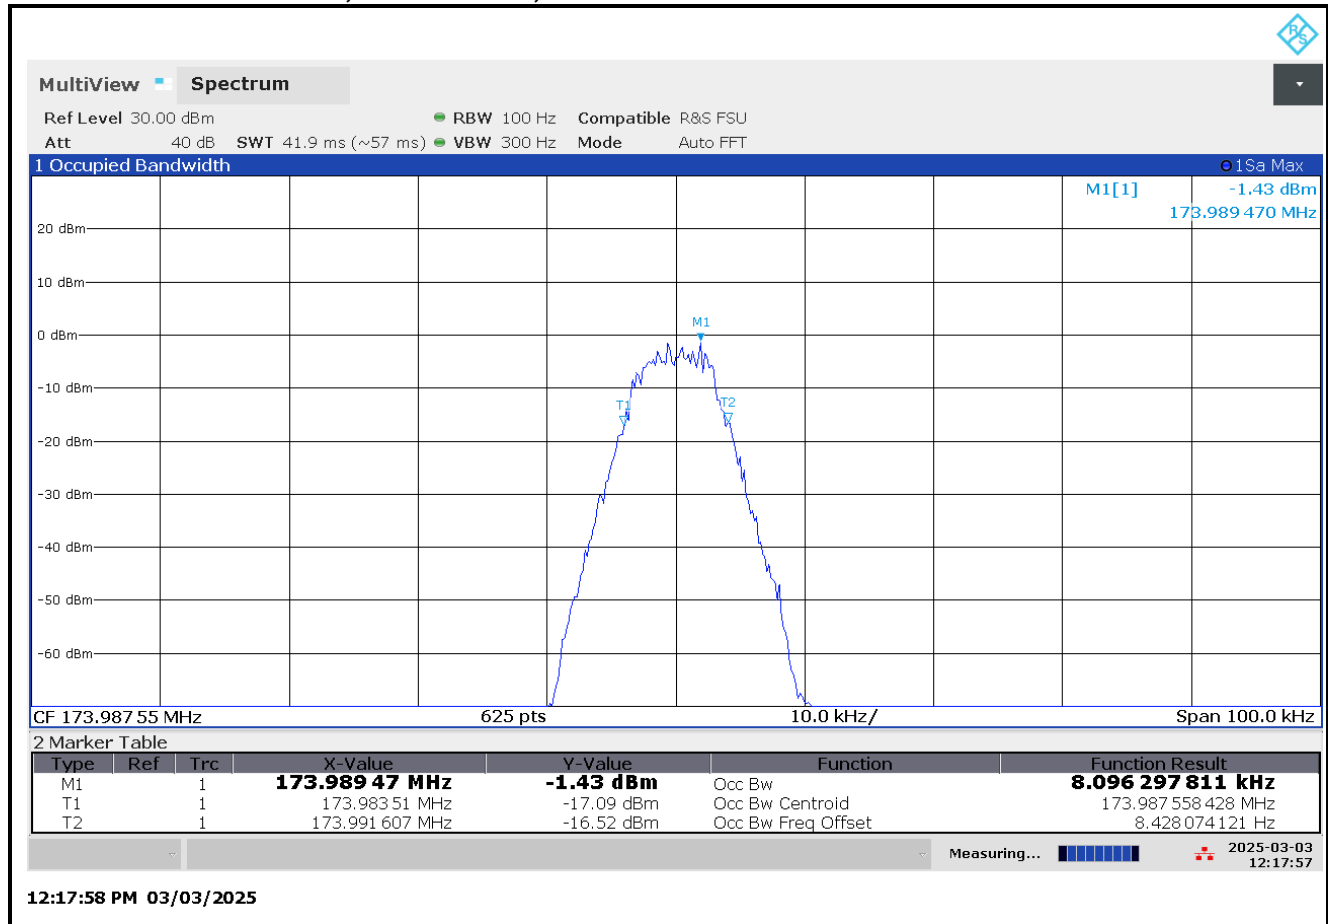


Plot 7-31: OBW 99%, 136.0125 MHz, 2-Level FSK 9600 Narrowband

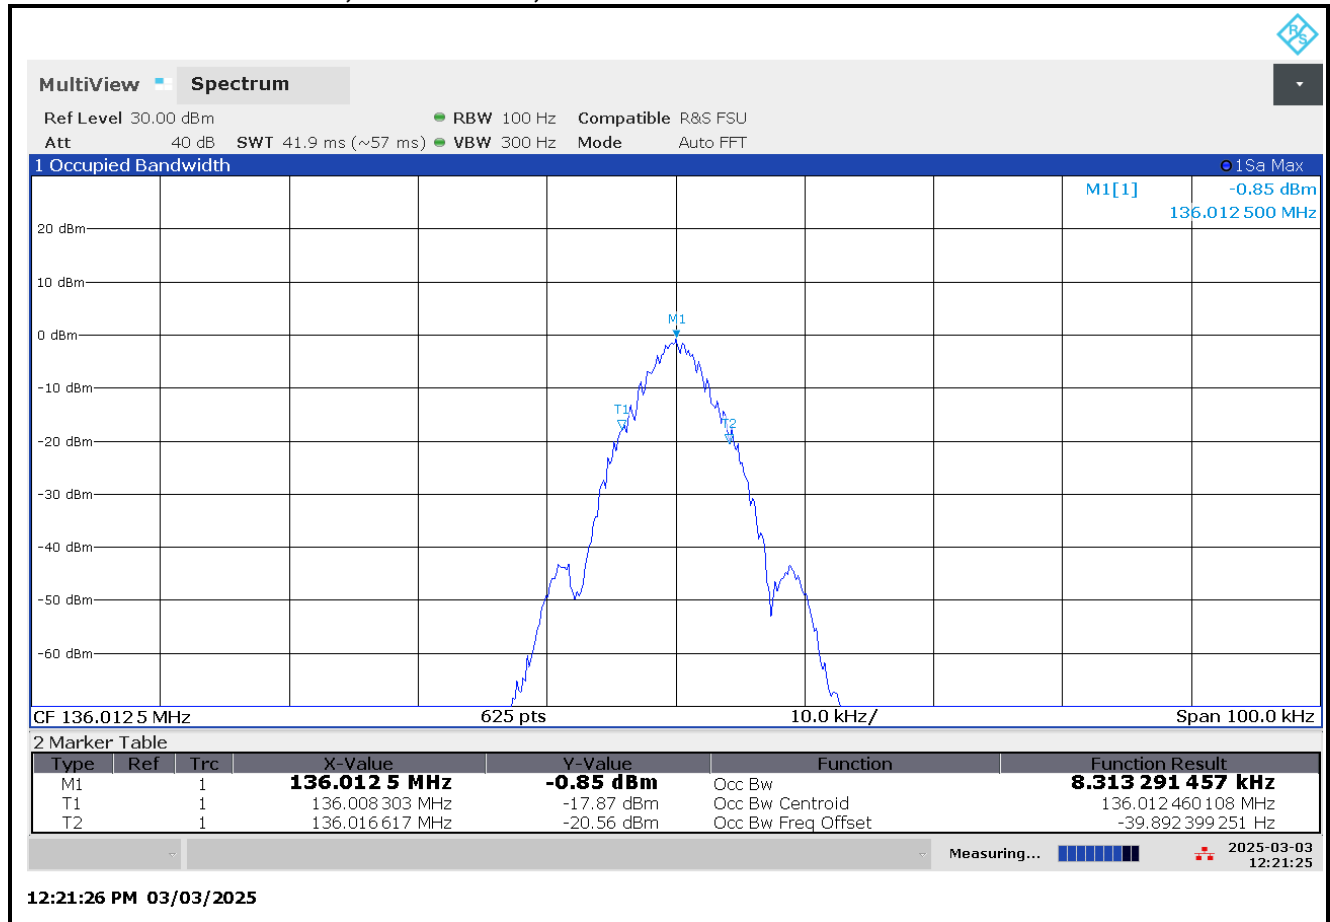


Plot 7-32: OBW 99%, 155.0125 MHz, 2-Level FSK 9600 Narrowband

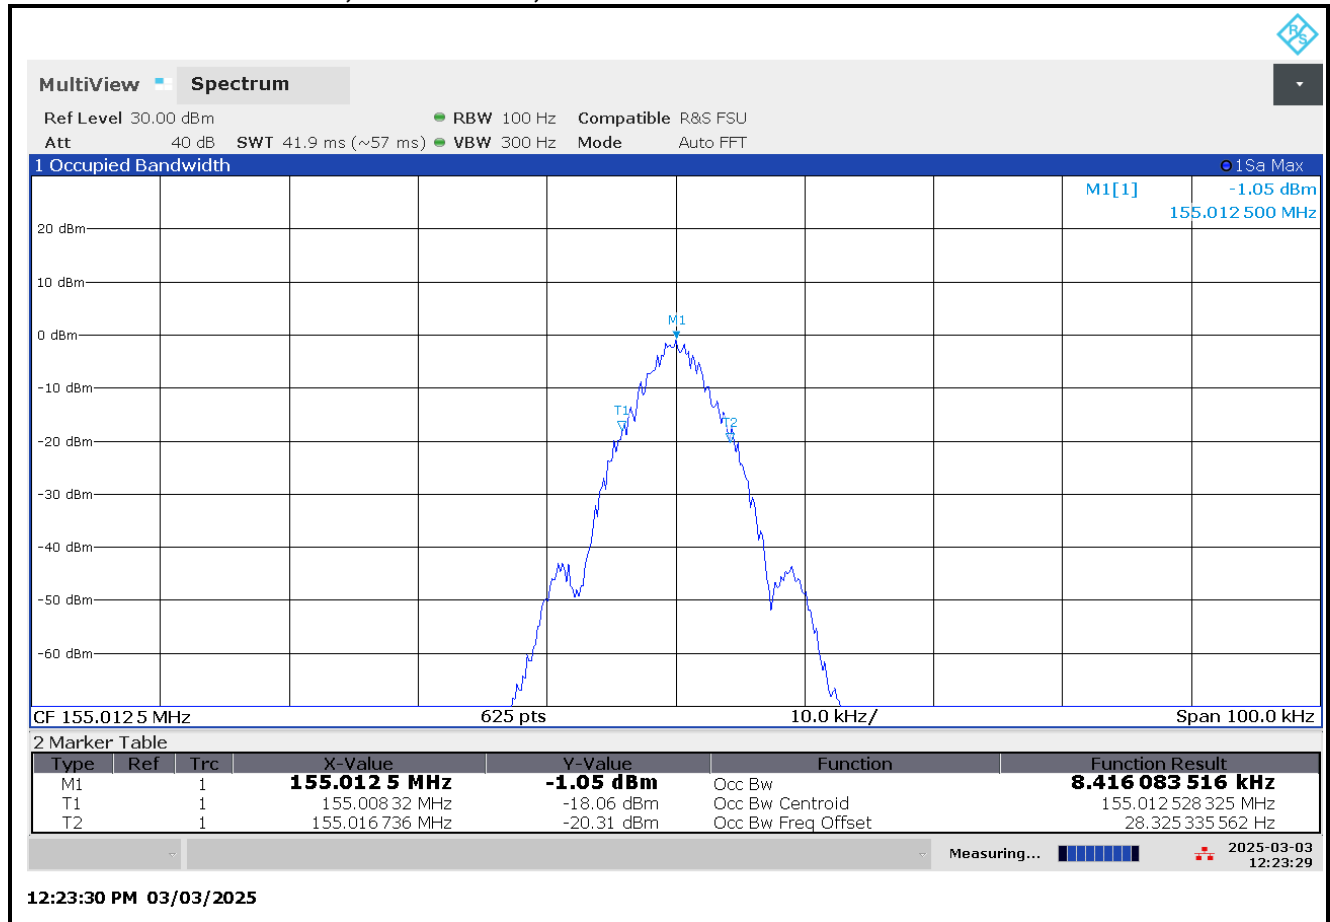


Plot 7-33: OBW 99%, 173.9875 MHz, 2-Level FSK 9600 Narrowband

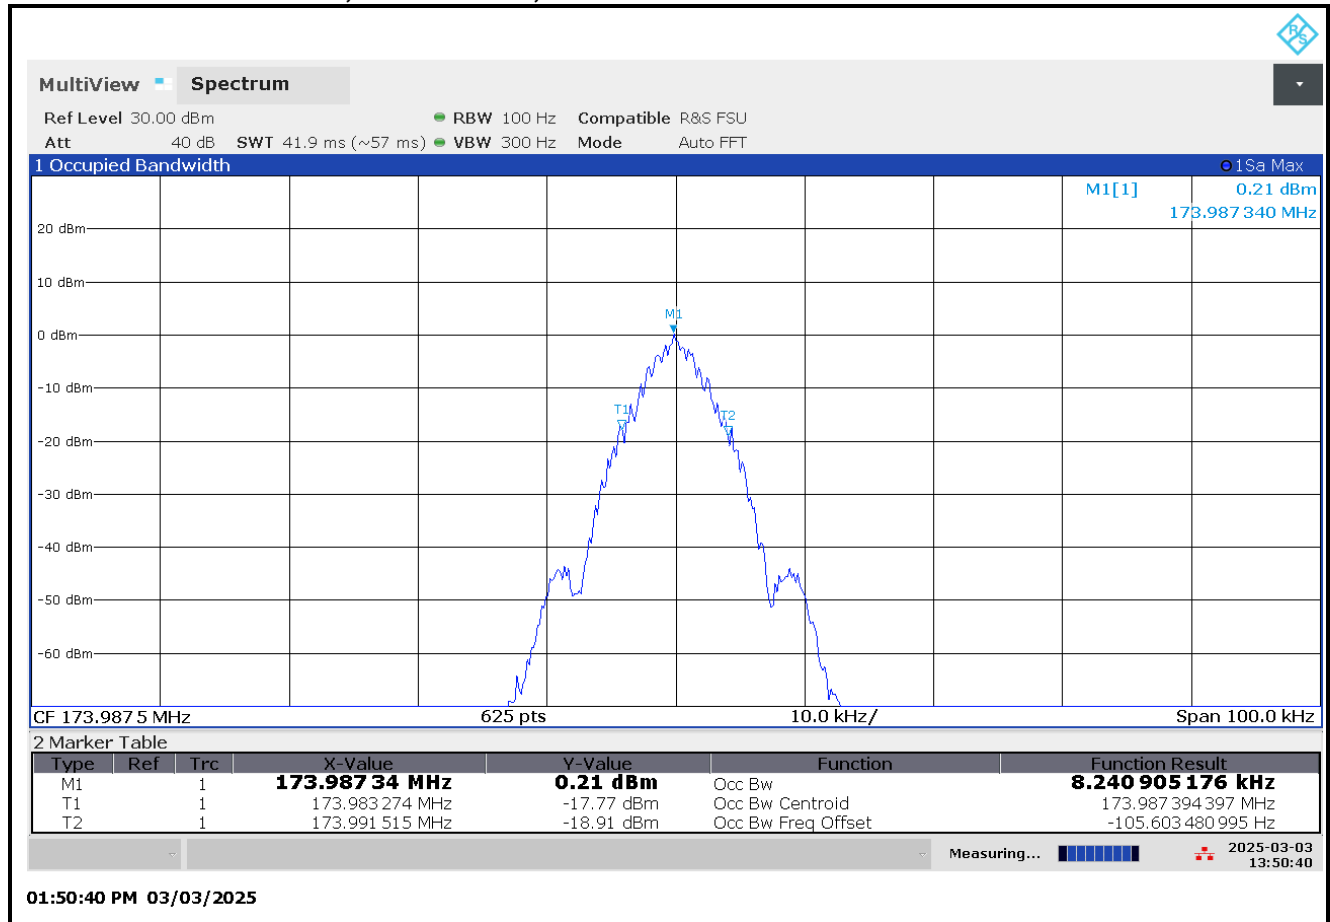

Plot 7-34: OBW 99%, 136.0125 MHz, 2-Level FSK 9600 Wideband

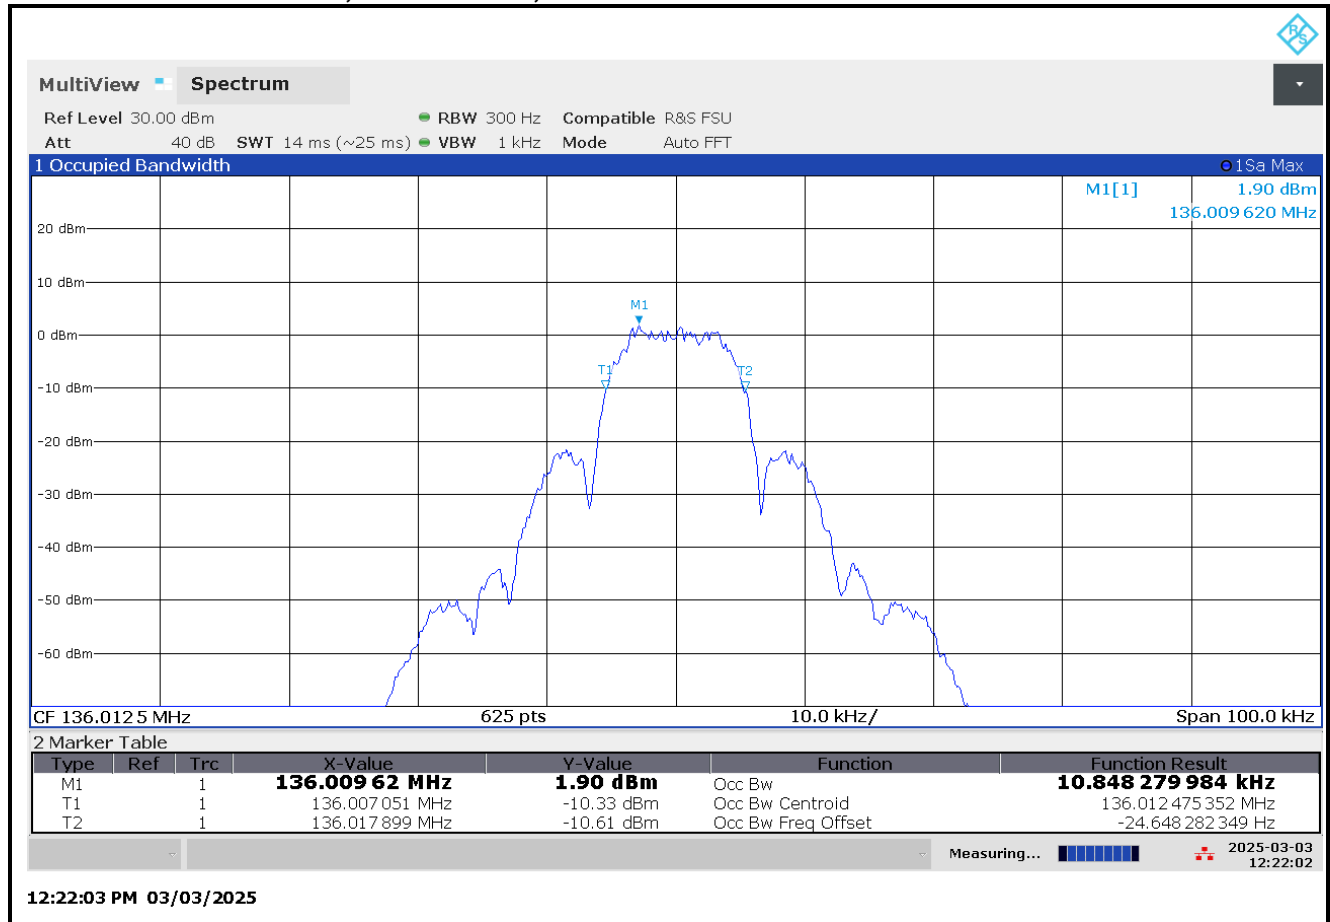

Plot 7-35: OBW 99%, 155.0125 MHz, 2-Level FSK 9600 Wideband

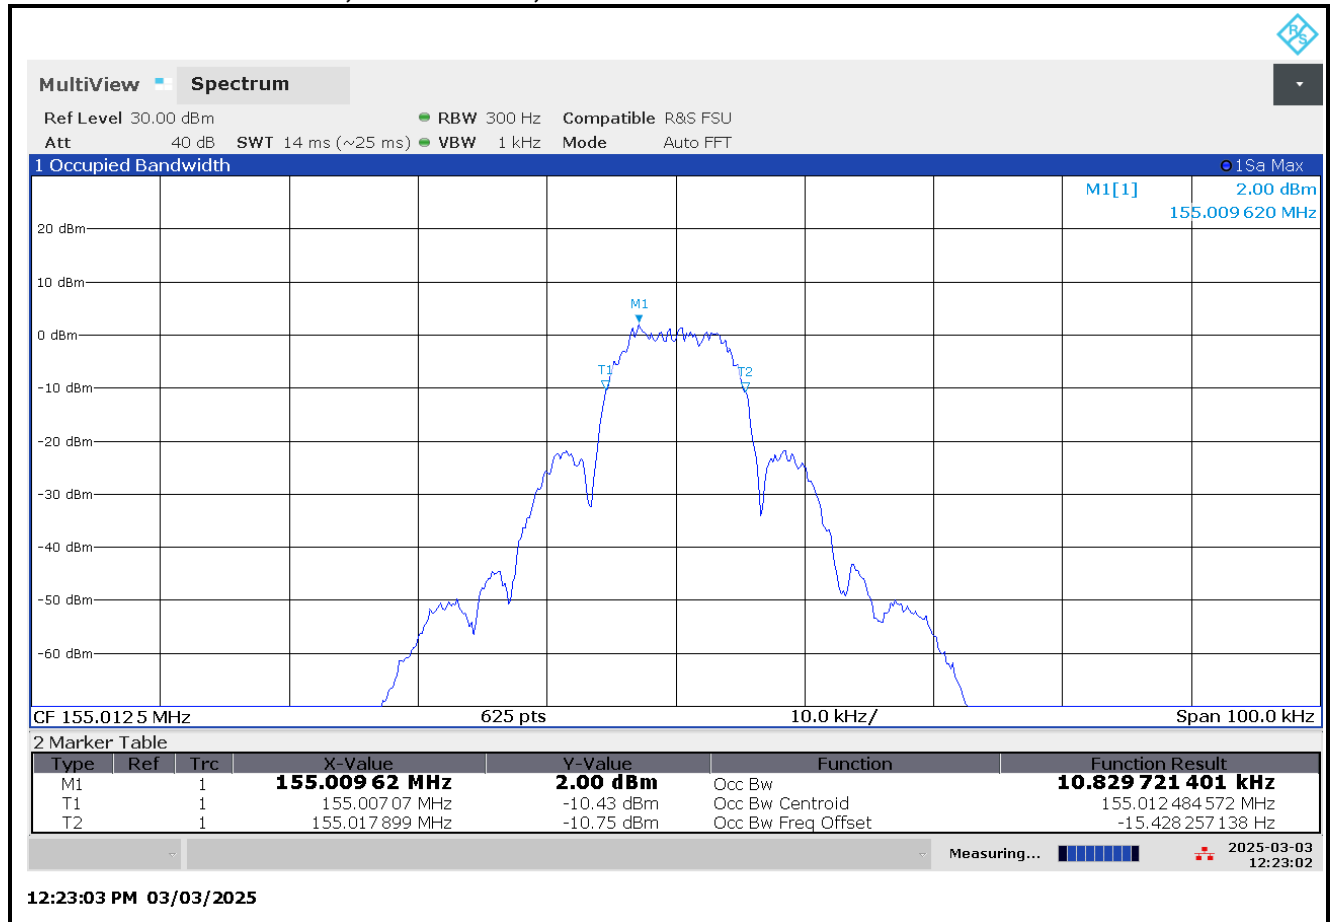

Plot 7-36: OBW 99%, 173.9875 MHz, 2-Level FSK 9600 Wideband

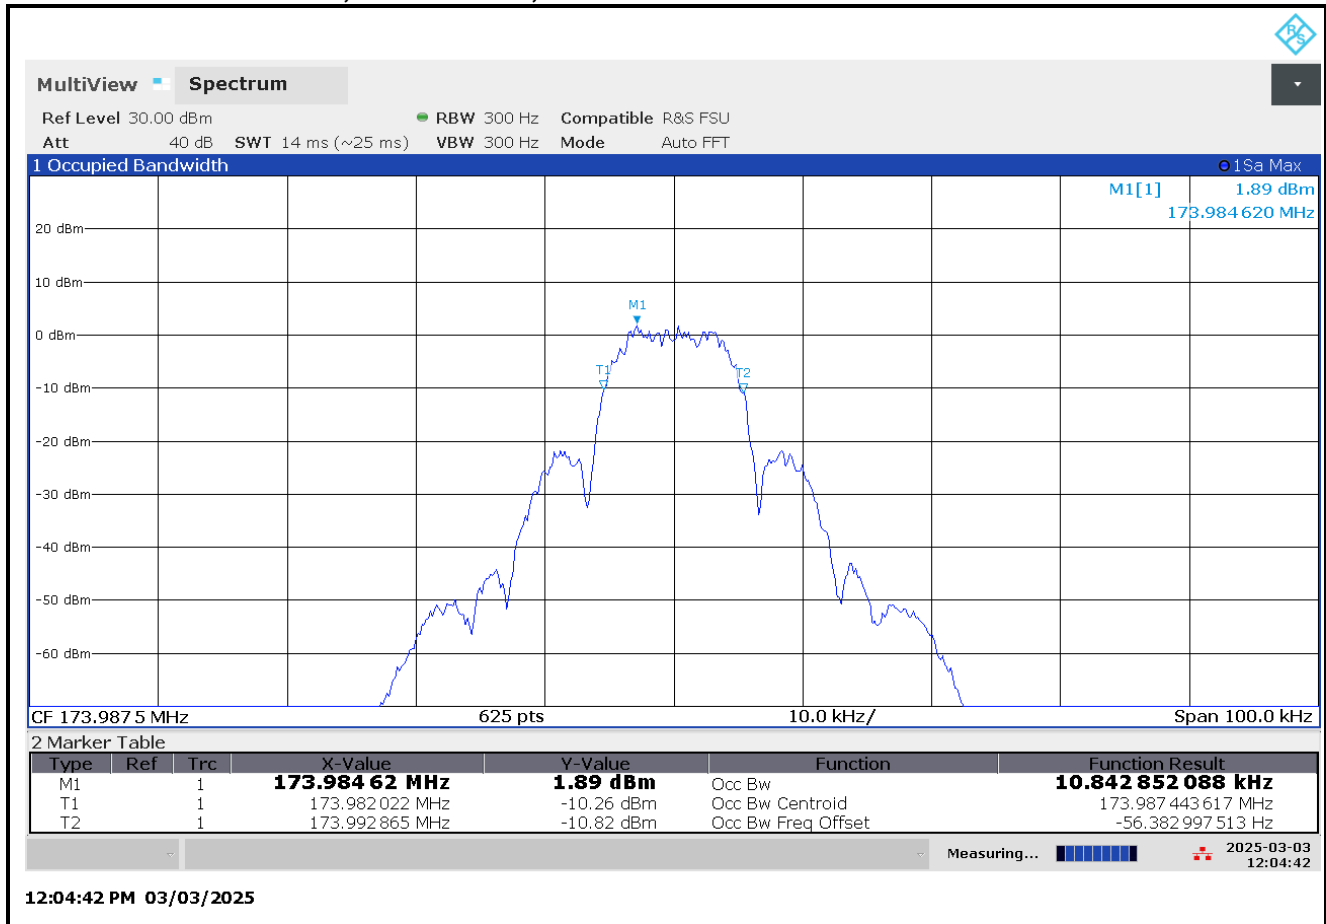


Table 7-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901723	Rohde & Schwarz	FSW	Spectrum Analyzer	1166.1660.50	04/26/2027
901724	API Weinschel, Inc.	48-40-34	40 dB 100W Attenuator	CJ8921	09/09/2027
901760	Hewlett Packard	3336B	Syntheiszer/Level Generator	1931401314	03/28/2027

Test Personnel:

Daniel Baltzell
Test Engineer

Signature

February 28 – March 3, 2025
Dates of Tests

8 FCC §2.1055: Frequency Stability; §90.213: Frequency Tolerance; §90.539: Frequency Stability; §80.209: Frequency Stability; §74.464: Frequency Tolerance; §22.355: Frequency Tolerance; ISED RSS-119 5.3: Transmitter Frequency Stability

8.1 Test Procedure

ANSI C63.26, section 5.6

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C. The AFC was not locked to the base station.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

Part 22.355 Frequency tolerance. Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Mobile <= 3 Watts (ppm)
50-450	50.0
450-512	5.0
821-896	2.5

Part 74.464 Frequency tolerance. For operations on frequencies above 25 MHz using authorized bandwidths to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter.

Part 80.209: 156-162 MHz 10 ppm.

Part 90.213 Frequency Stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1 2 3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5 11} 5	^{6 5}	^{4 6} 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	^{7 11 14} 2.5	^{8 5}	^{8 5}
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁹ 300	300	300
Above 2450 ¹⁰			

⁵ In the 150-174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

⁶ In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.

RSS-119 Limits:

Frequency Band (MHz)	Channel Bandwidth (kHz)	Frequency Stability (ppm)		
		Base/Fixed	Mobile Station	
			Output Power > 2 W	Output Power ≤ 2 W
27.41-28 and 29.7-50	20	20	20	50
72-76	20	5	20	50
138-174	30	5	5	5
	15	2.5	5	5
	7.5	1	2	5
217-218 and 219-220	12.5	1	5	5
220-222 (Note 1)	5	0.1	1.5	1.5
406.1-430 and 450-470 (Note 6)	25 (Note 2)	0.5	1	1
	25	2.5	5	5
	12.5	1.5	2.5	2.5
	6.25	0.5	1	1

Note 2: This provision is for digital equipment with a channel bandwidth of 25 kHz and an occupied bandwidth greater than 20 kHz. The mobile station's frequency stability values given in Table 1 are for mobile, portable and control transmitters using automatic frequency control (AFC) to lock onto the base station signal. When the mobile, portable and control transmitters are operating without using AFC to lock onto the base station signal, the frequency stability limit shall be better than 1 kHz and the equipment's unwanted emissions measured with maximum frequency shift shall still comply with emission mask Y (Section 5.8.10) at nominal carrier frequency.

8.2 Test Data

8.2.1 Temperature Frequency Stability

Table 8-1: Temperature Frequency Stability – 136.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	136.012488	-0.09
-20	136.012496	-0.03
-10	136.012520	0.15
0	136.012536	0.27
10	136.012498	-0.01
20 (reference)	136.012500	0.00
30	136.012491	-0.07
40	136.012489	-0.08
50	136.012496	-0.03
60	136.012527	0.20

Table 8-2: Temperature Frequency Stability – 155.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	155.012488	-0.08
-20	155.012493	-0.04
-10	155.012527	0.17
0	155.012541	0.27
10	155.012497	-0.02
20 (reference)	155.012500	0.00
30	155.012492	-0.05
40	155.012487	-0.08
50	155.012492	-0.05
60	155.012531	0.20

Table 8-3: Temperature Frequency Stability – 173.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	173.987487	-0.08
-20	173.987491	-0.05
-10	173.987531	0.18
0	173.987546	0.26
10	173.987496	-0.02
20 (reference)	173.987500	0.00
30	173.987492	-0.05
40	173.987485	-0.08
50	173.987488	-0.07
60	173.987534	0.19

8.2.2 Frequency Stability/Voltage Variation

Table 8-4: Frequency Stability/Voltage Variation –136.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
11.56	136.012500	0.00
13.6(reference)	136.012500	0.00
15.64	136.012497	-0.02

Table 8-5: Frequency Stability/Voltage Variation – 155.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
11.56	155.012498	-0.01
13.6(reference)	155.012500	0.00
15.64	155.012496	-0.02

Table 8-6: Frequency Stability/Voltage Variation –173.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
11.56	173.987496	-0.02
13.6(reference)	173.987500	0.00
15.64	173.987496	-0.02

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ± 0.5 Hz

Results: Pass

Table 8-7: Test Equipment Used For Testing Temperature Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901350	Meterman	33XR	Multimeter	040402802	10/18/2027
901672	Rohde & Schwarz	FSEM30	Spectrum Analyzer	FSEM30	04/25/2027
901724	API Weinschel, Inc.	48-40-34	40 dB 100W Attenuator	CJ8921	09/20/2027
N/A	GW Instek	PSS-3203	Power Supply	2679	Not Required
900946	Tenney Engineering, Inc	TH65	Temperature Chamber with Humidity	11380	04/07/2027

Test Personnel:

Daniel W. Baltzell
EMC Test Engineer



Signature

February 27, 2027
Date of Test

9 FCC §2.1047(a)(b): Modulation Characteristics; §80.213: Modulation Requirements; §74.463: Modulation Requirements; RSS-119 5.2: Types of Modulation

9.1 Test Procedures

9.1.1. Audio Frequency Response

ANSI C63.26 2015, section 5.3.3

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = 20 LOG (DEVfreq/DEVref)

9.1.2 Audio Low Pass Filter Response

ANSI C63.26 2015, section 5.3

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

9.1.3 Modulation Limiting


ANSI C63.26 2015, section 5.3.2

The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.


9.2 Test Data

9.2.1 Audio Frequency Response


Plot 9-1: Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (WB)

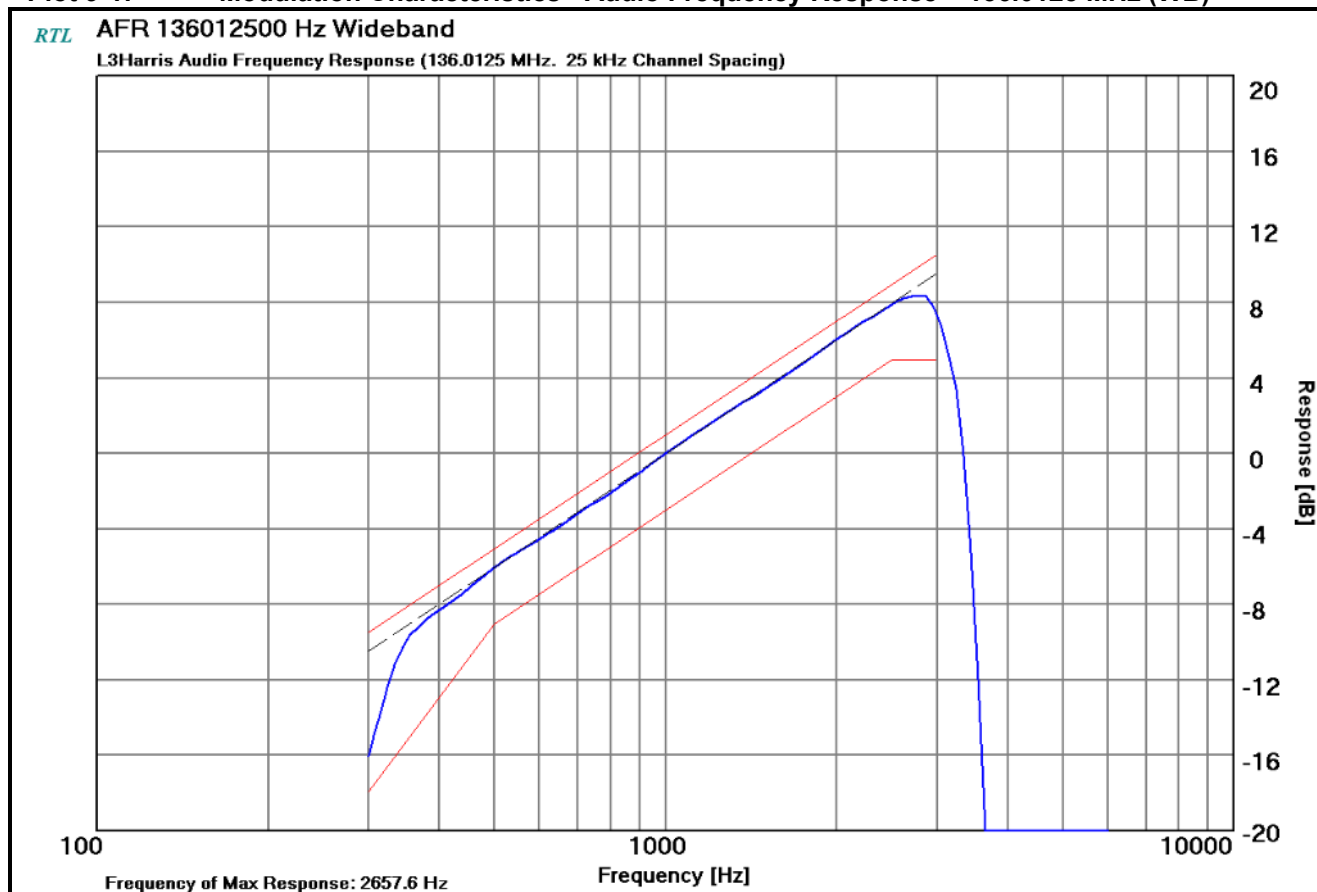


Plot 9-2: Modulation Characteristics - Audio Frequency Response – 155.0125 MHz (WB)

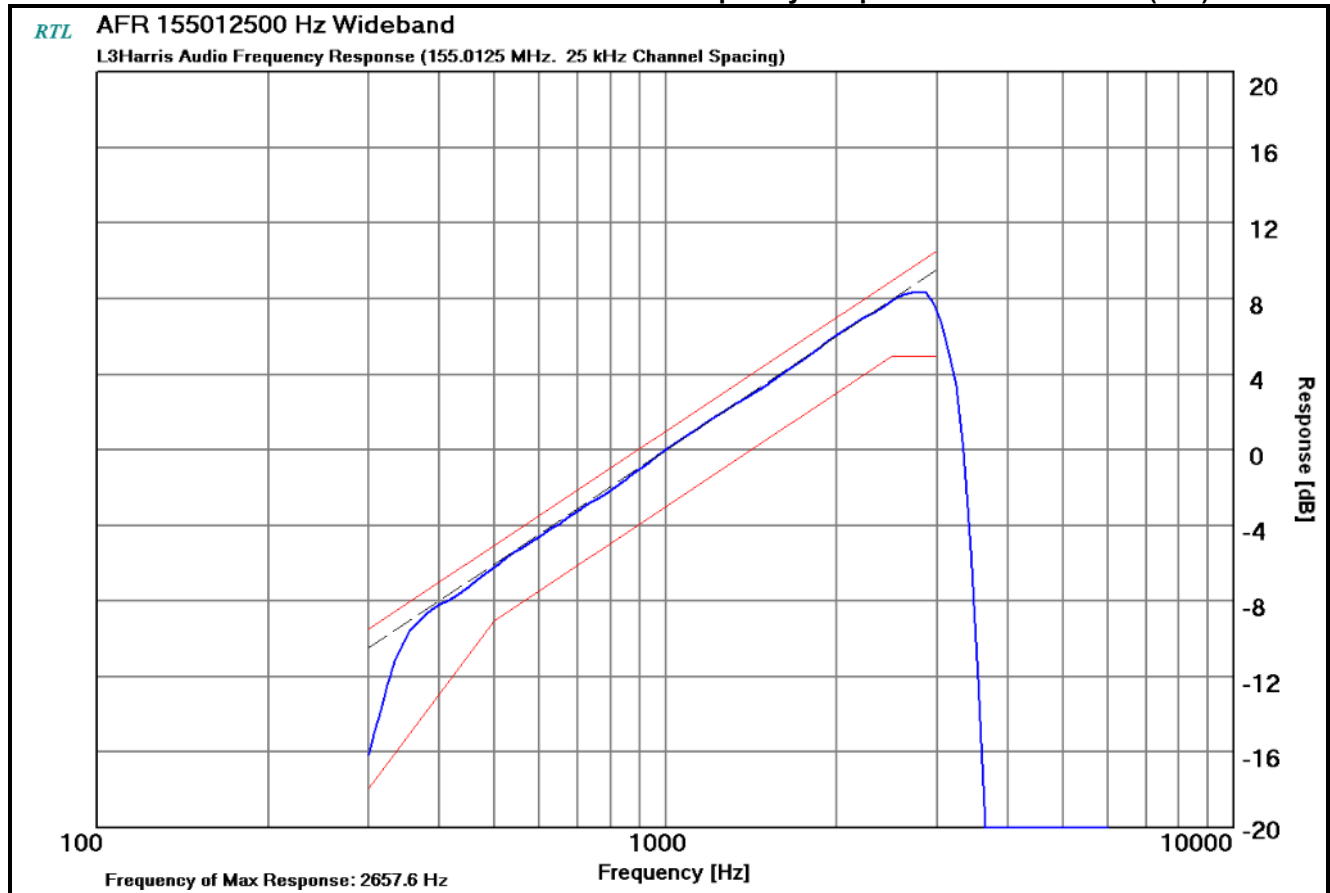


Plot 9-3: Modulation Characteristics - Audio Frequency Response – 173.9875 MHz (WB)

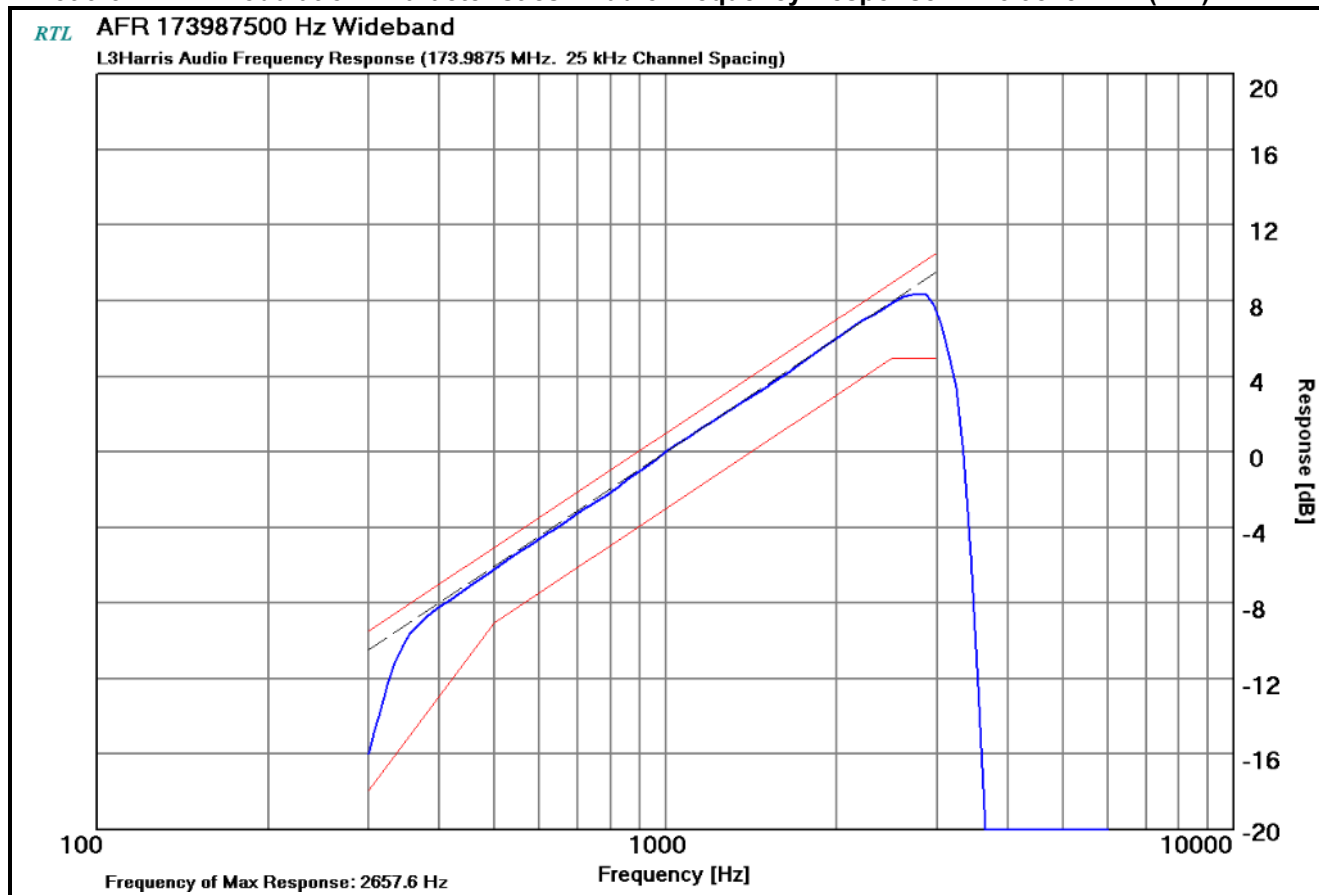


Plot 9-4: Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (NB)

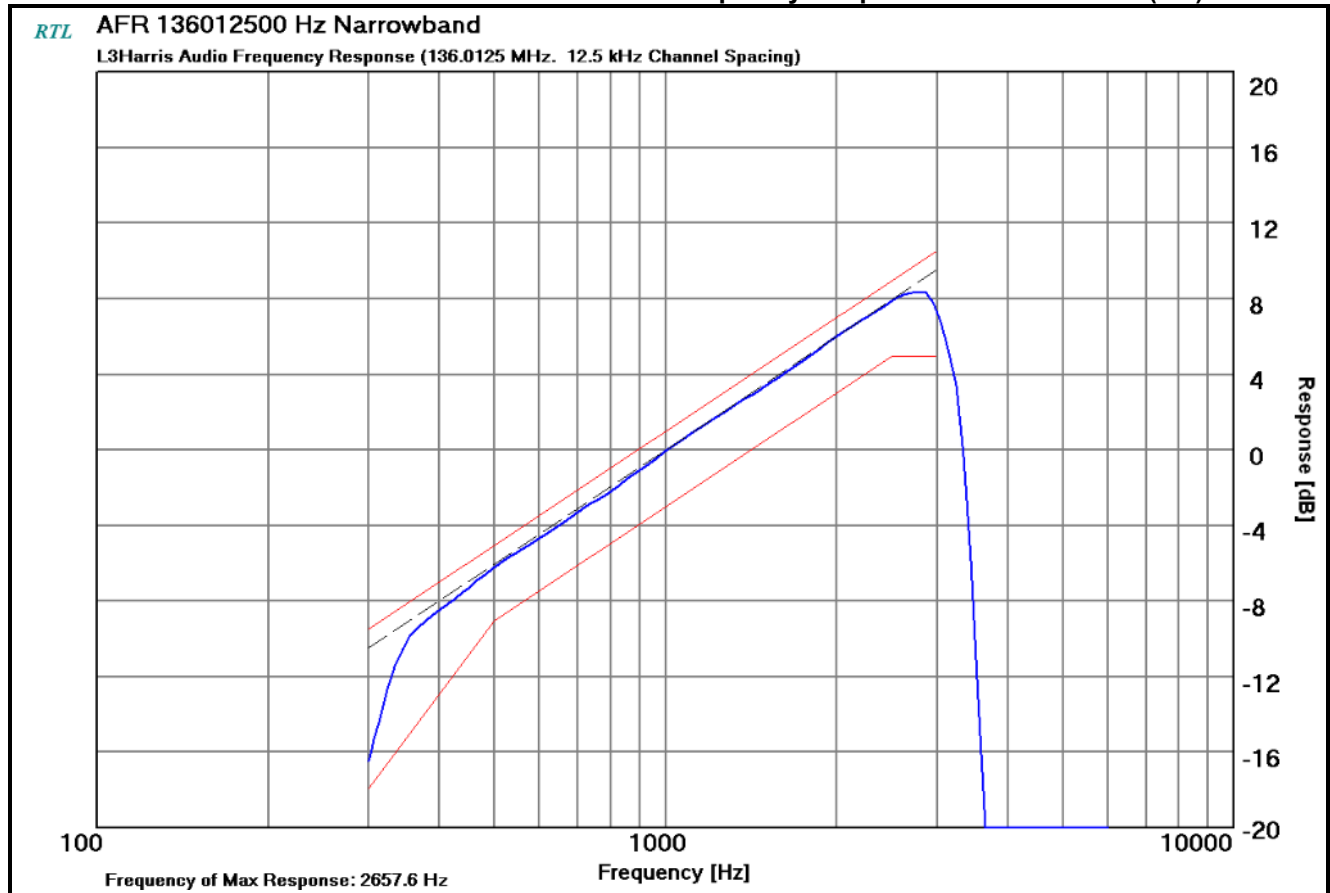

Plot 9-5: Modulation Characteristics - Audio Frequency Response – 155.0125 MHz (NB)

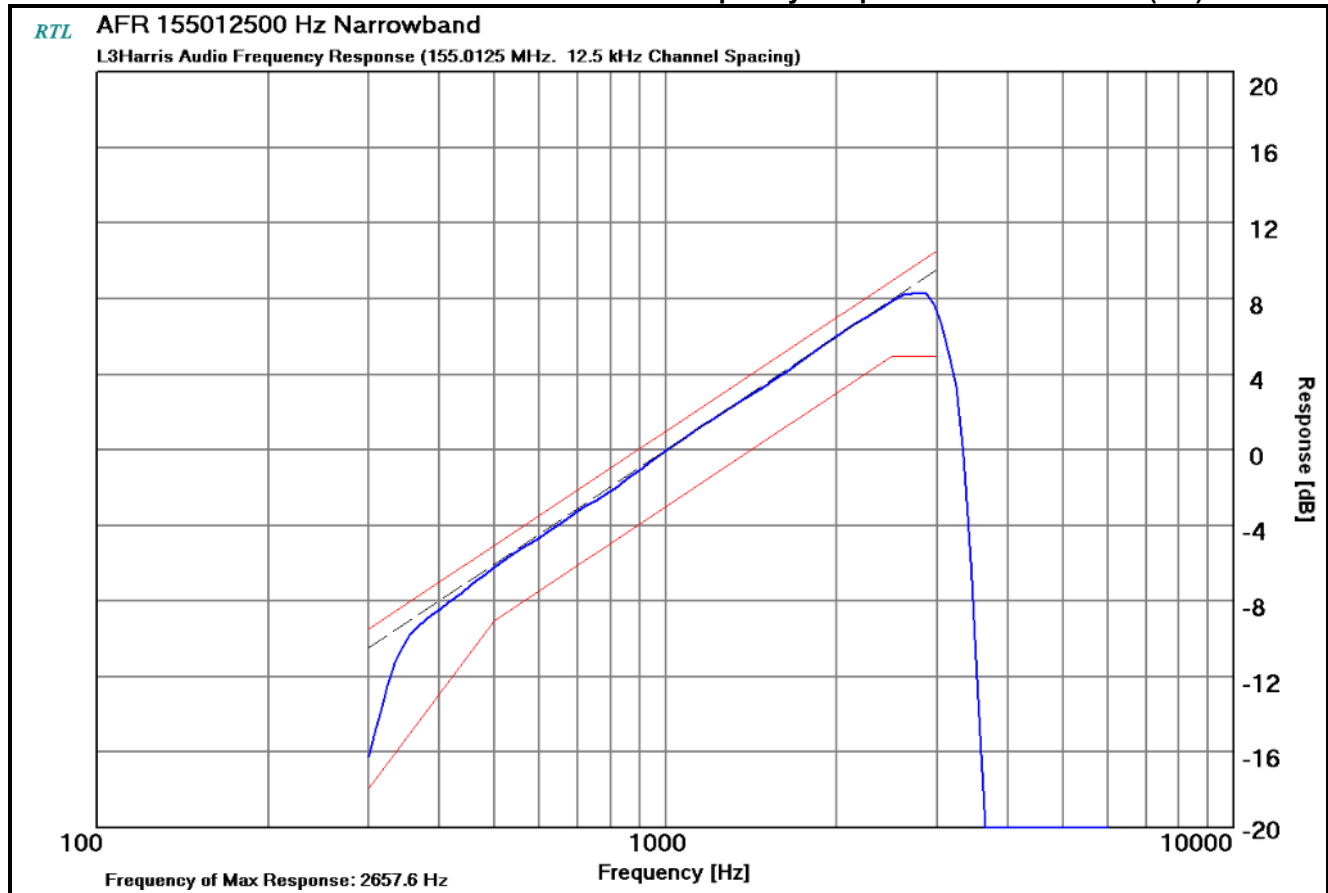


Plot 9-1: Modulation Characteristics - Audio Frequency Response – 173.9875 MHz (NB)

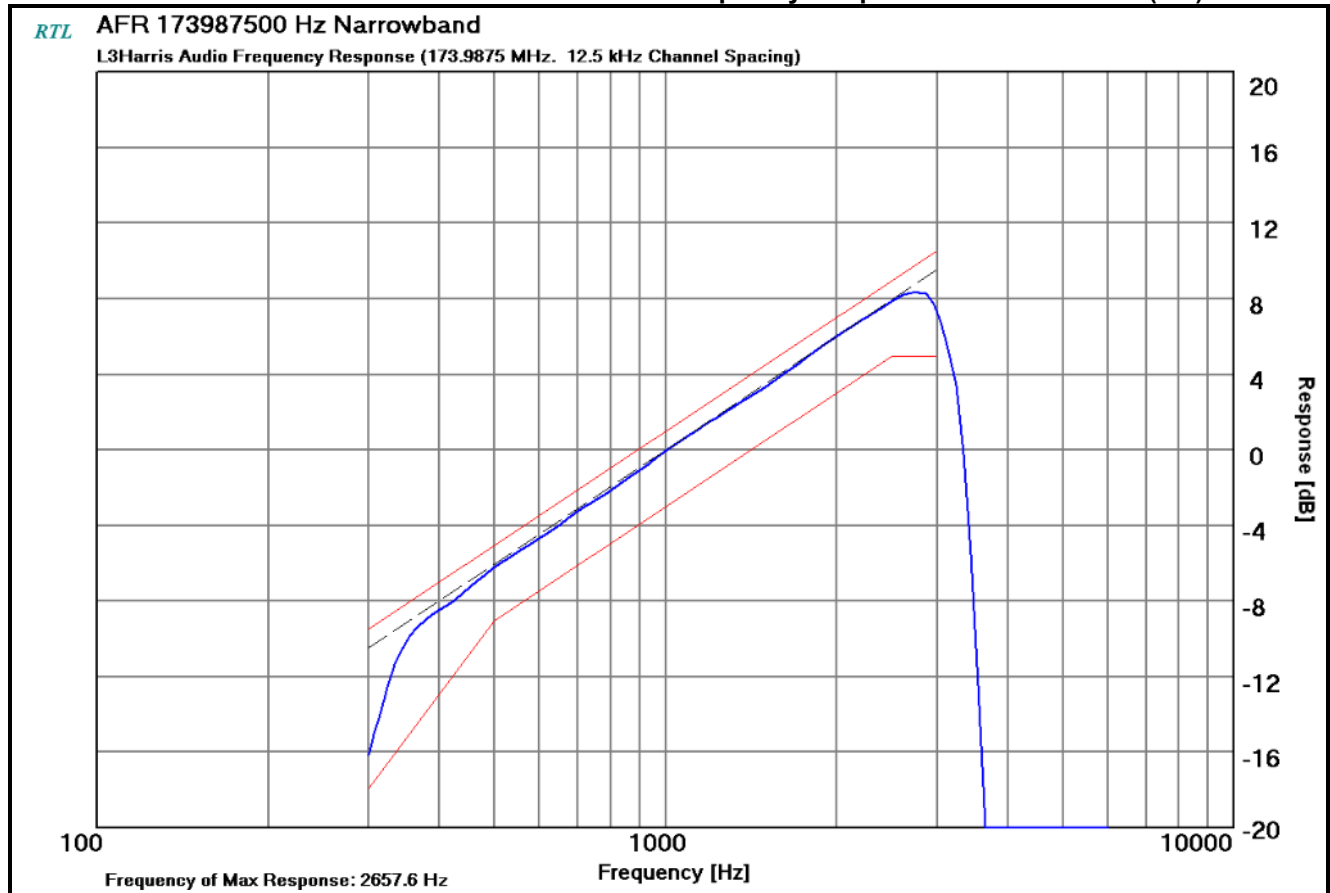


9.2.2 Audio Low Pass Filter Response


Plot 9-7: Modulation Characteristics - Audio Low Pass Filter Response – 136.0125 (NB)

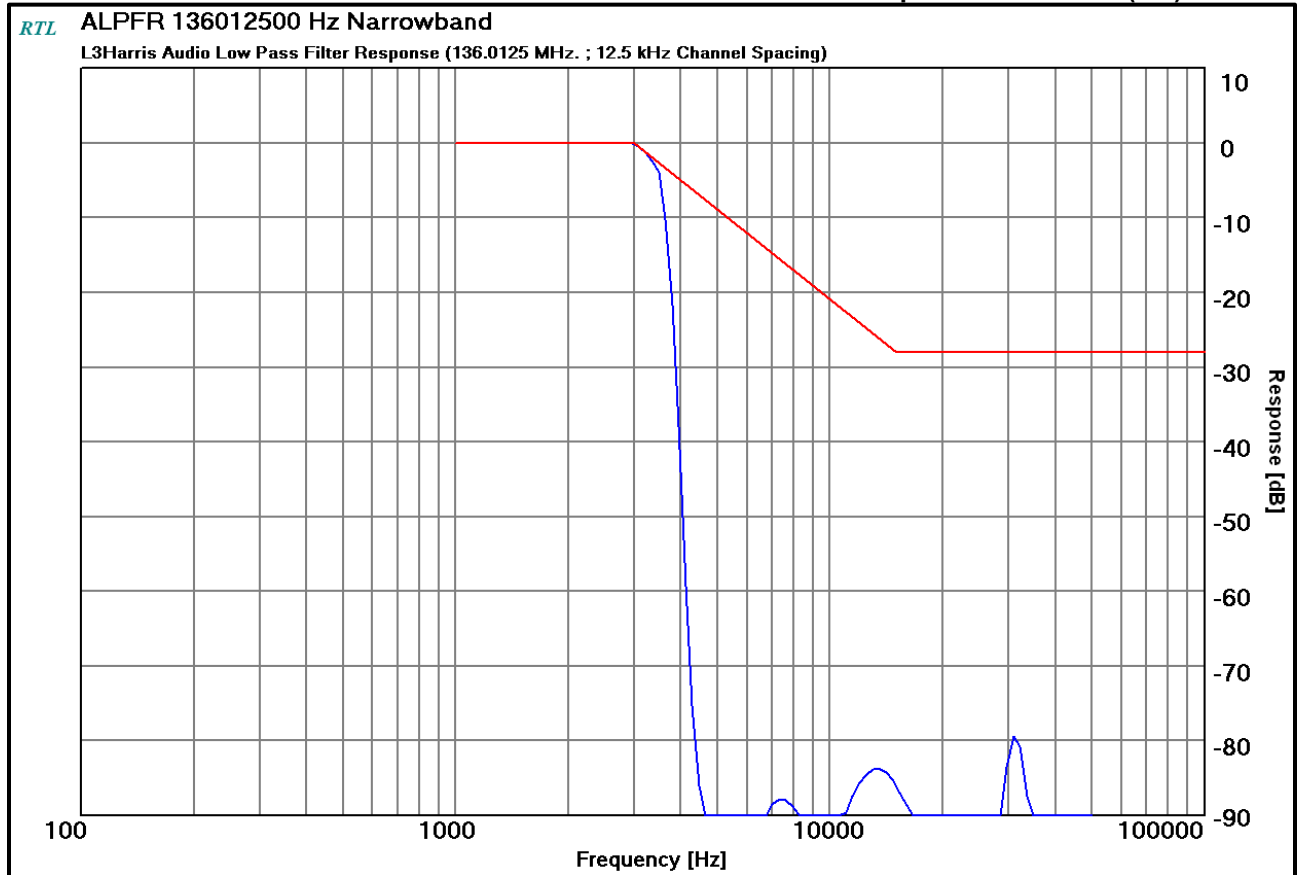


Plot 9-8: Modulation Characteristics - Audio Low Pass Filter Response – 136.0125 (WB)

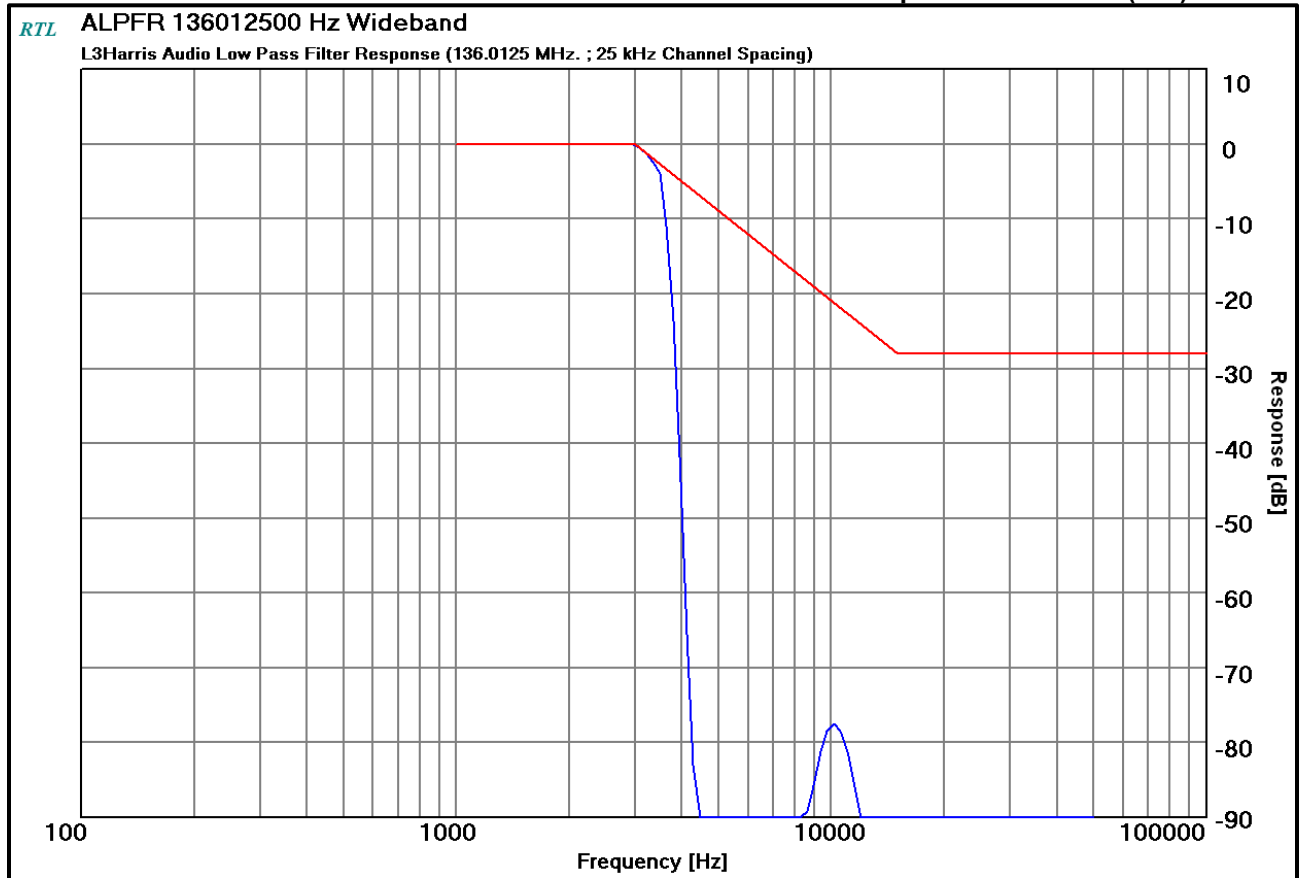


Plot 9-9: Modulation Characteristics - Audio Low Pass Filter Response – 155.0125 (NB)

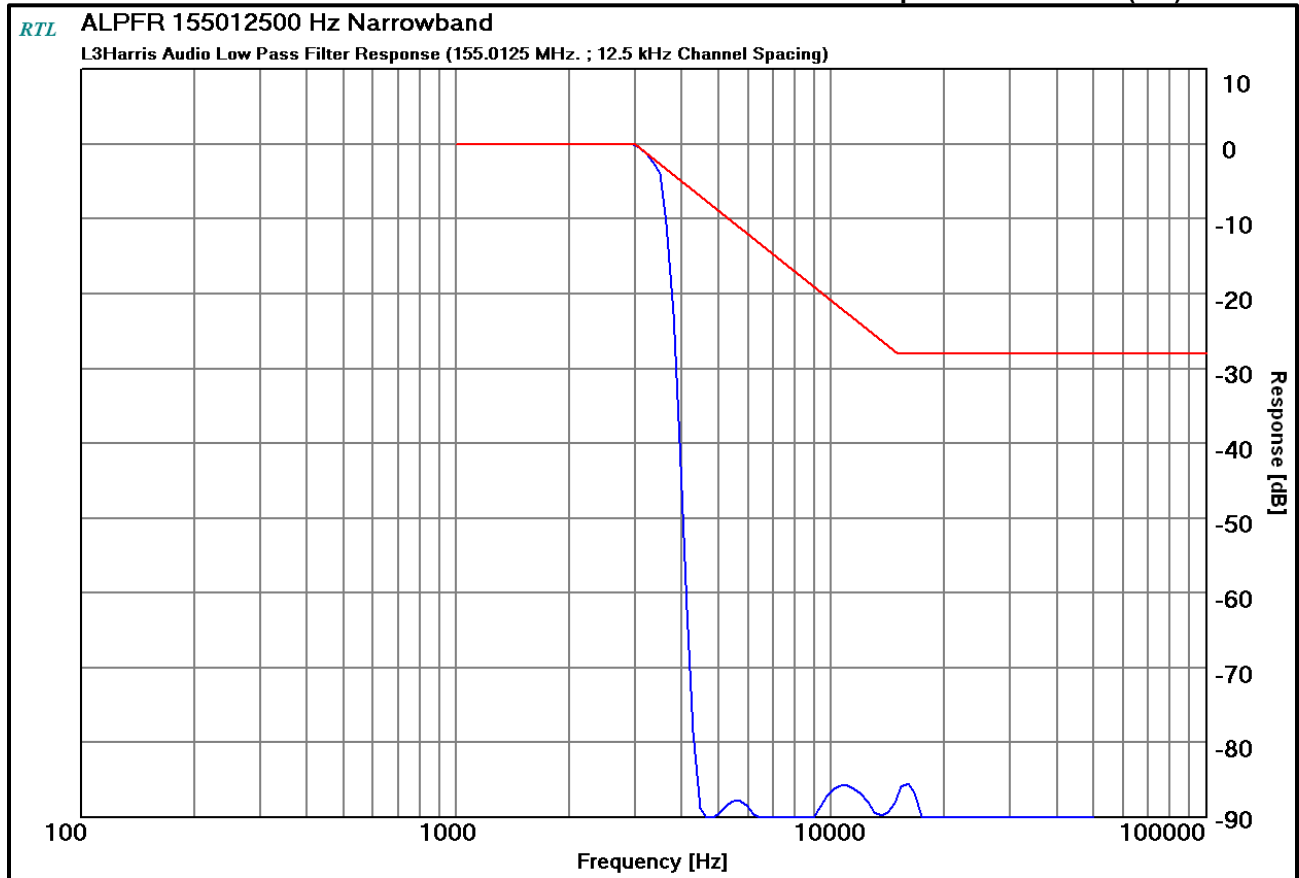


Plot 9-10: Modulation Characteristics - Audio Low Pass Filter Response – 155.0125 (WB)

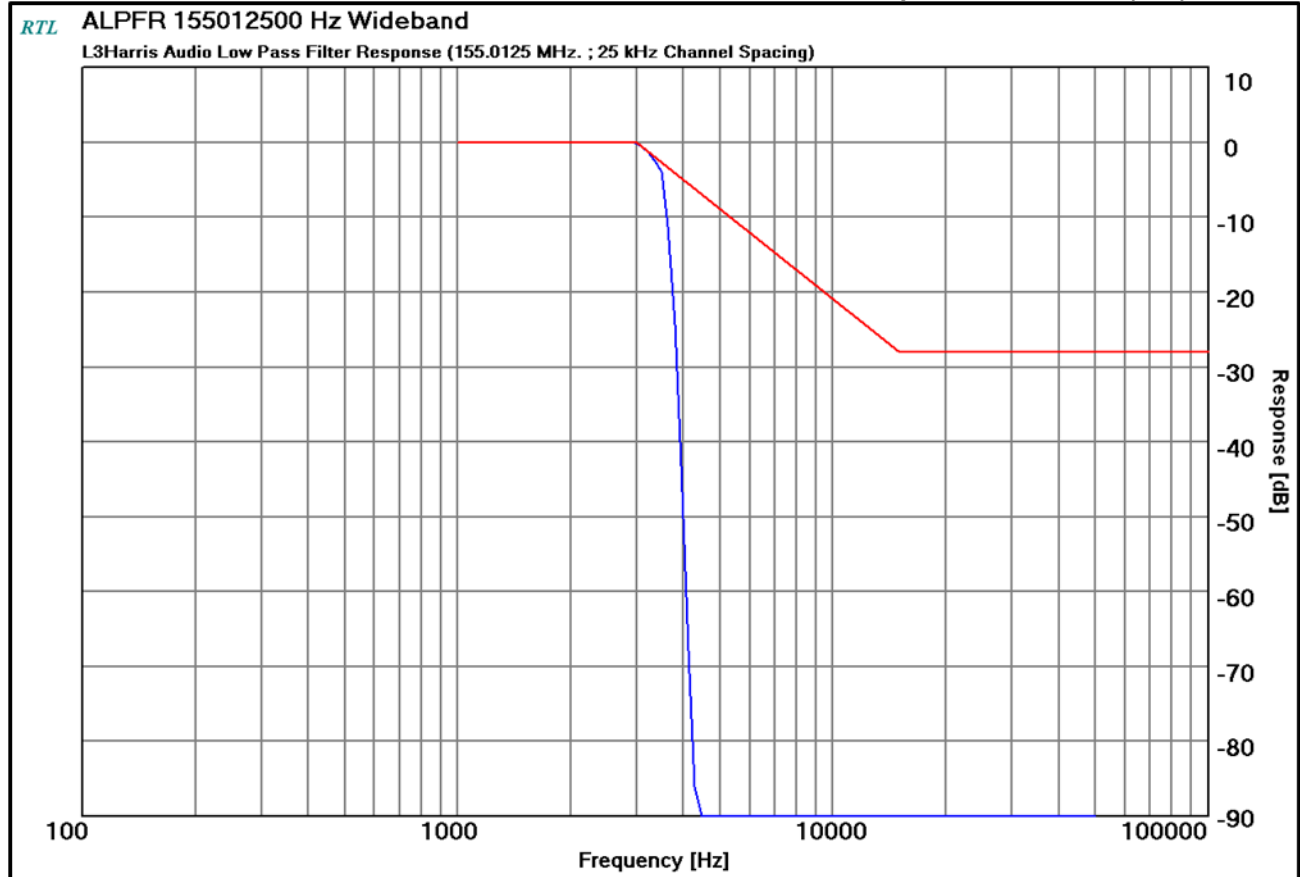

Plot 9-11: Modulation Characteristics - Audio Low Pass Filter Response – 173.9875 (NB)

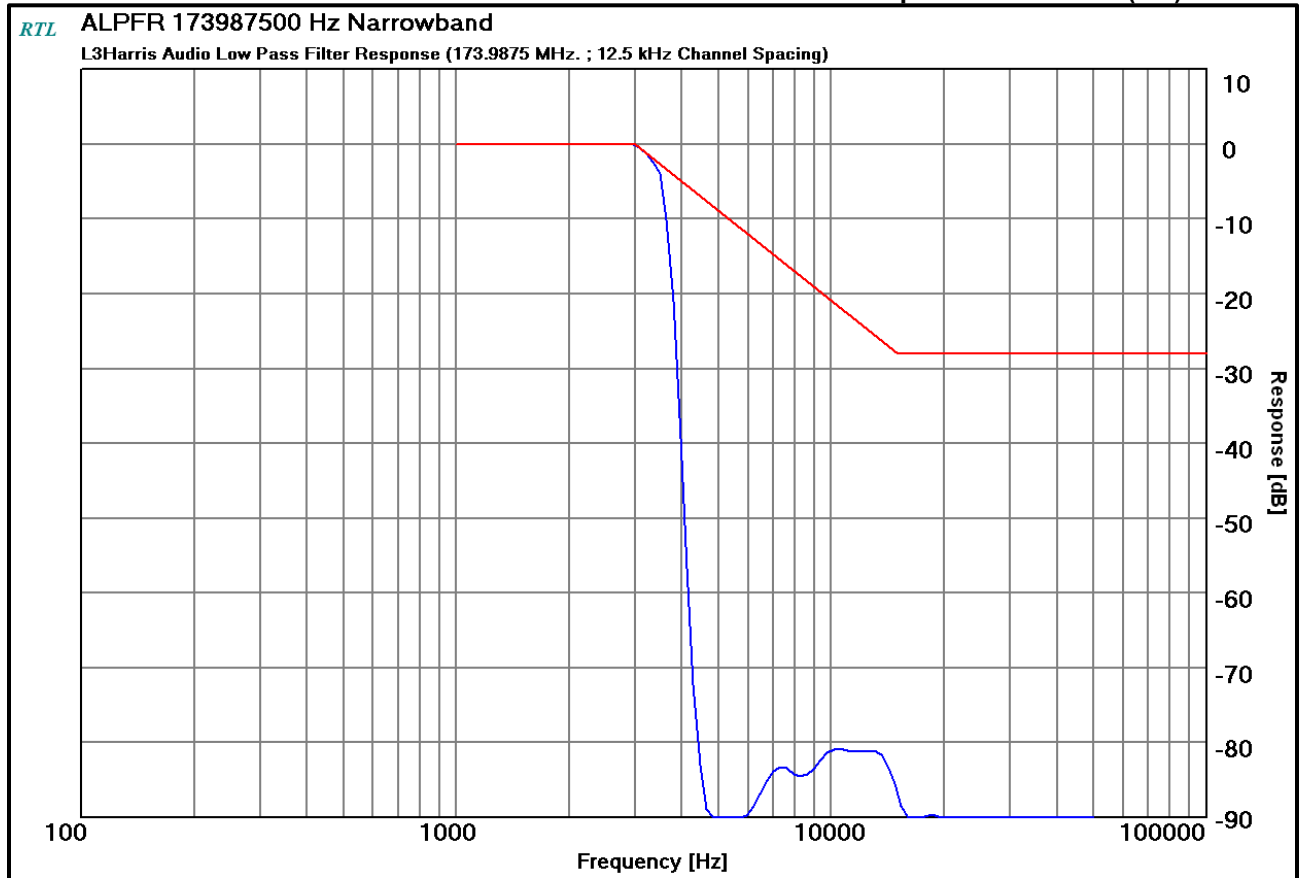


Plot 9-12: Modulation Characteristics - Audio Low Pass Filter Response – 173.9875 (WB)

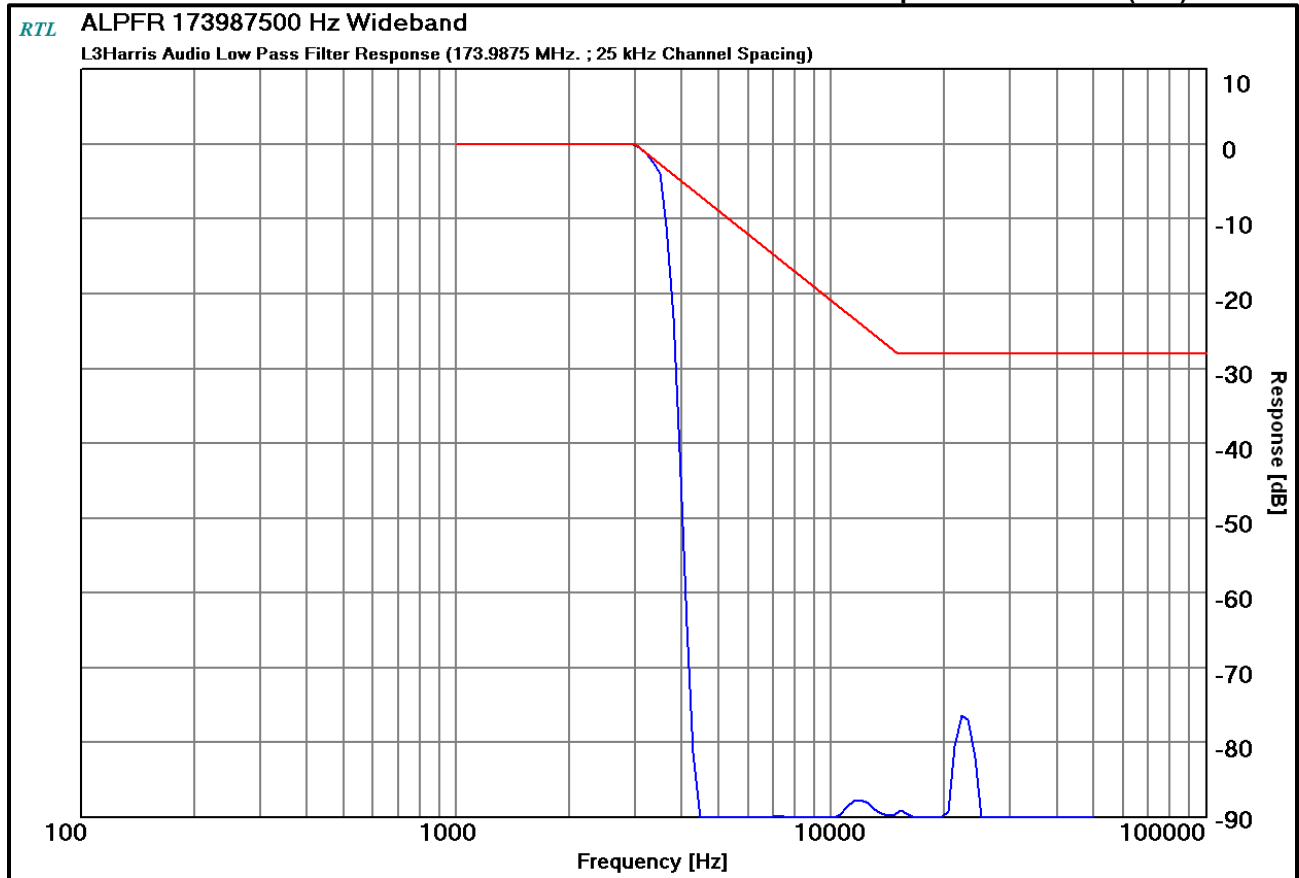


9.2.3 Modulation Limiting


Plot 9-13: Modulation Characteristics – Modulation Limiting – 136.0125 MHz; (WB); Positive Peak

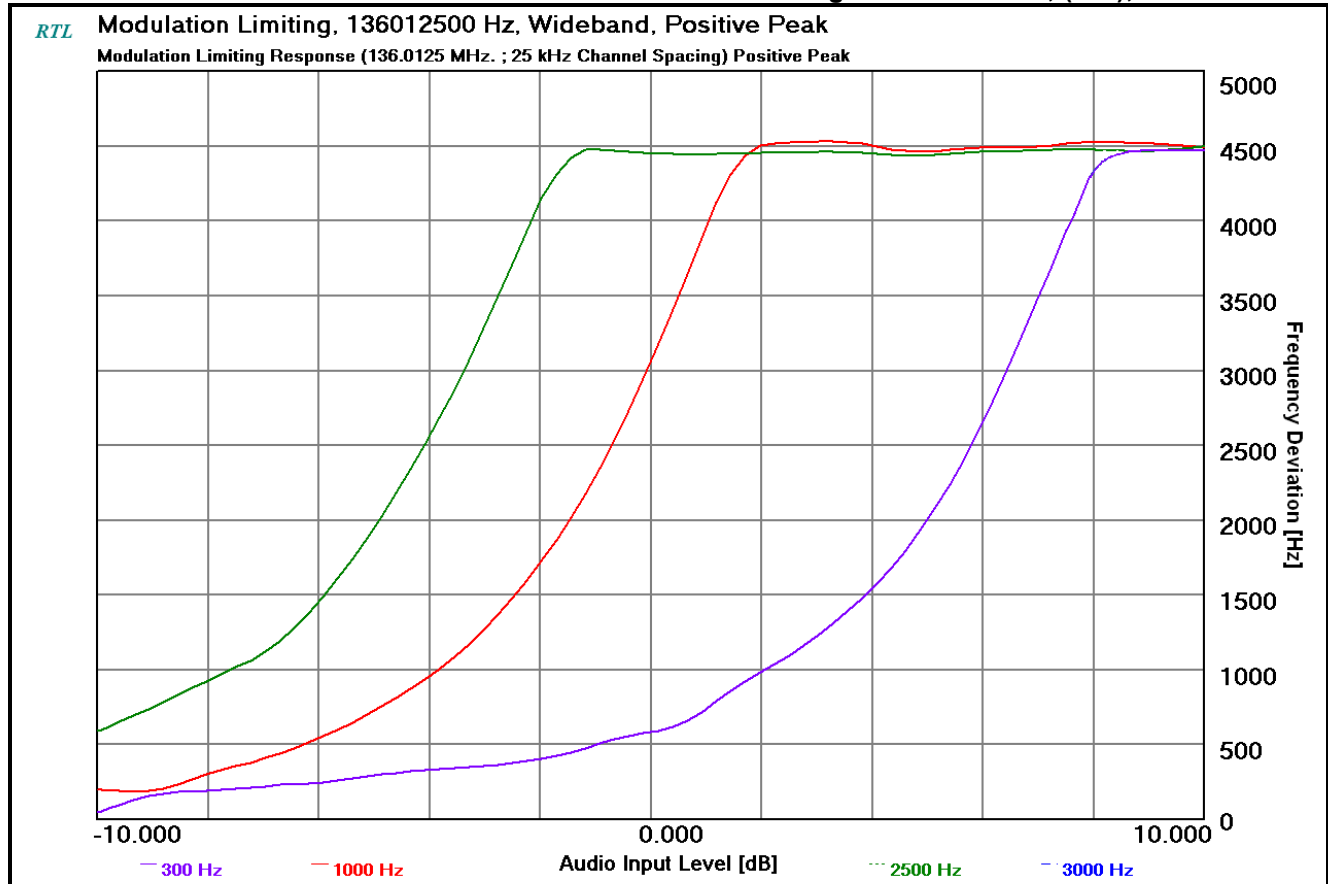


Plot 9-14: Modulation Characteristics – Modulation Limiting - 136.0125 MHz; (WB) Negative Peak

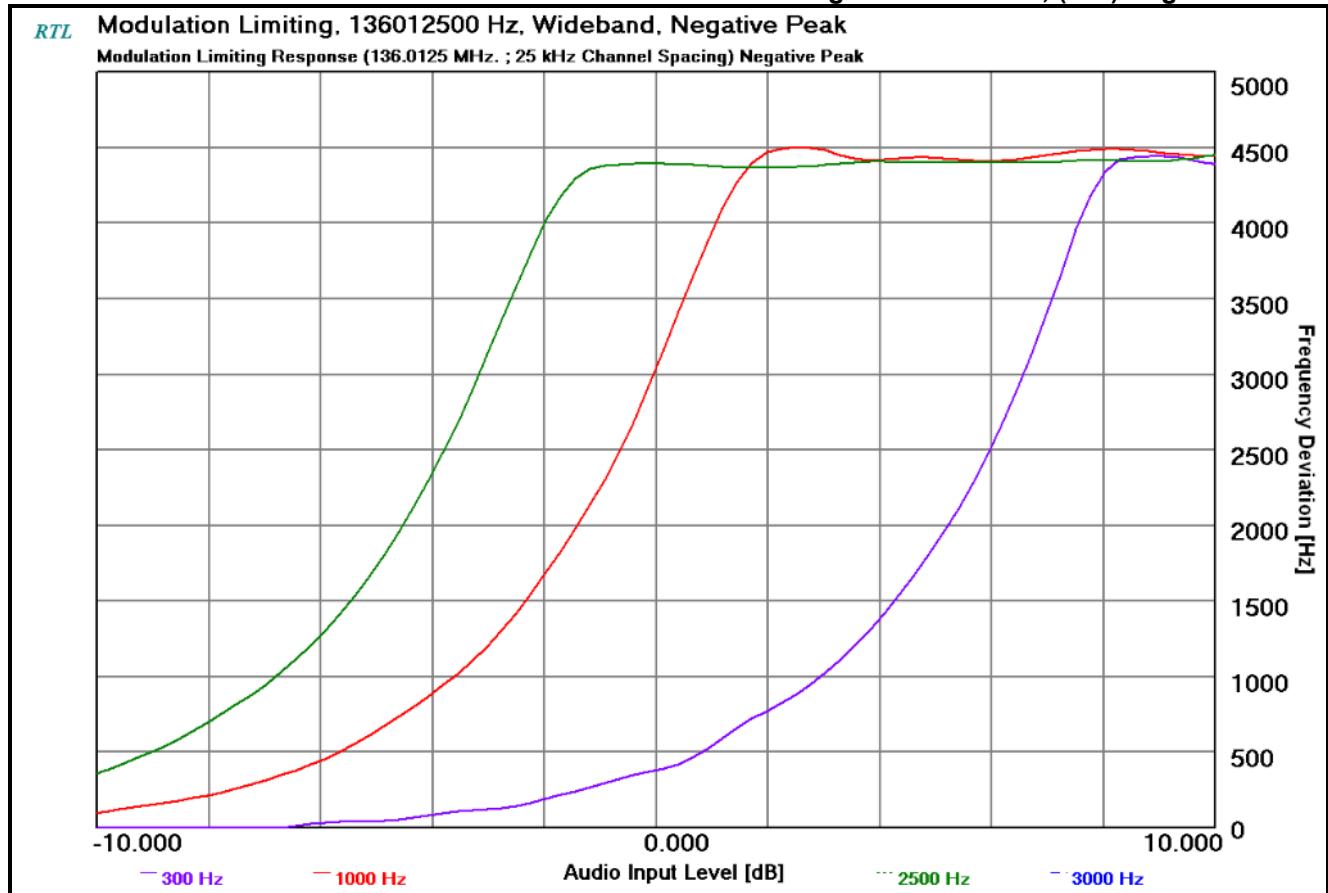


Plot 9-15: Modulation Characteristics – Modulation Limiting – 136.0125 MHz; (NB); Positive Peak

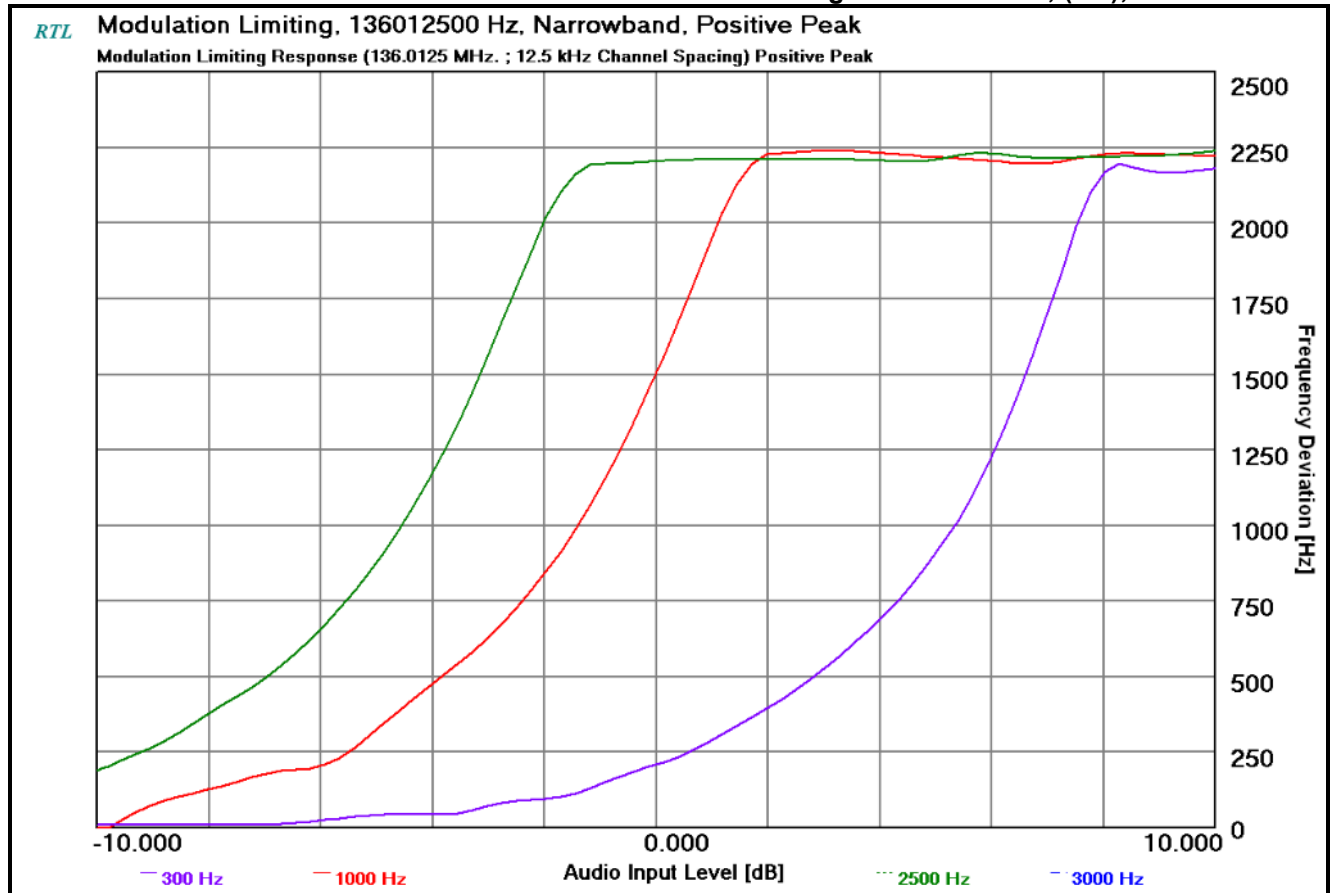


Plot 9-16: Modulation Characteristics – Modulation Limiting - 136.0125 MHz; (NB) Negative Peak

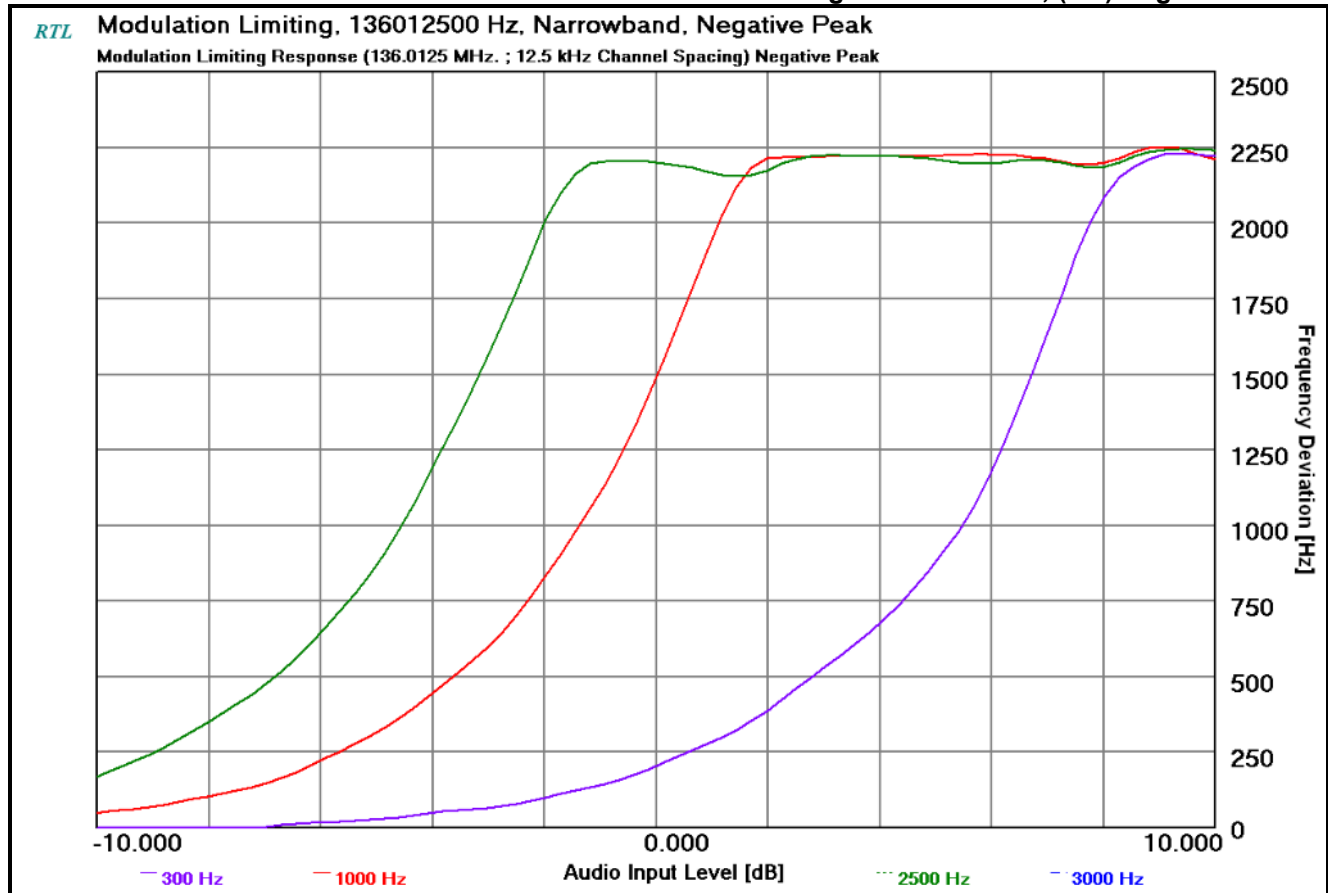


Plot 9-17: Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (WB); Positive Peak

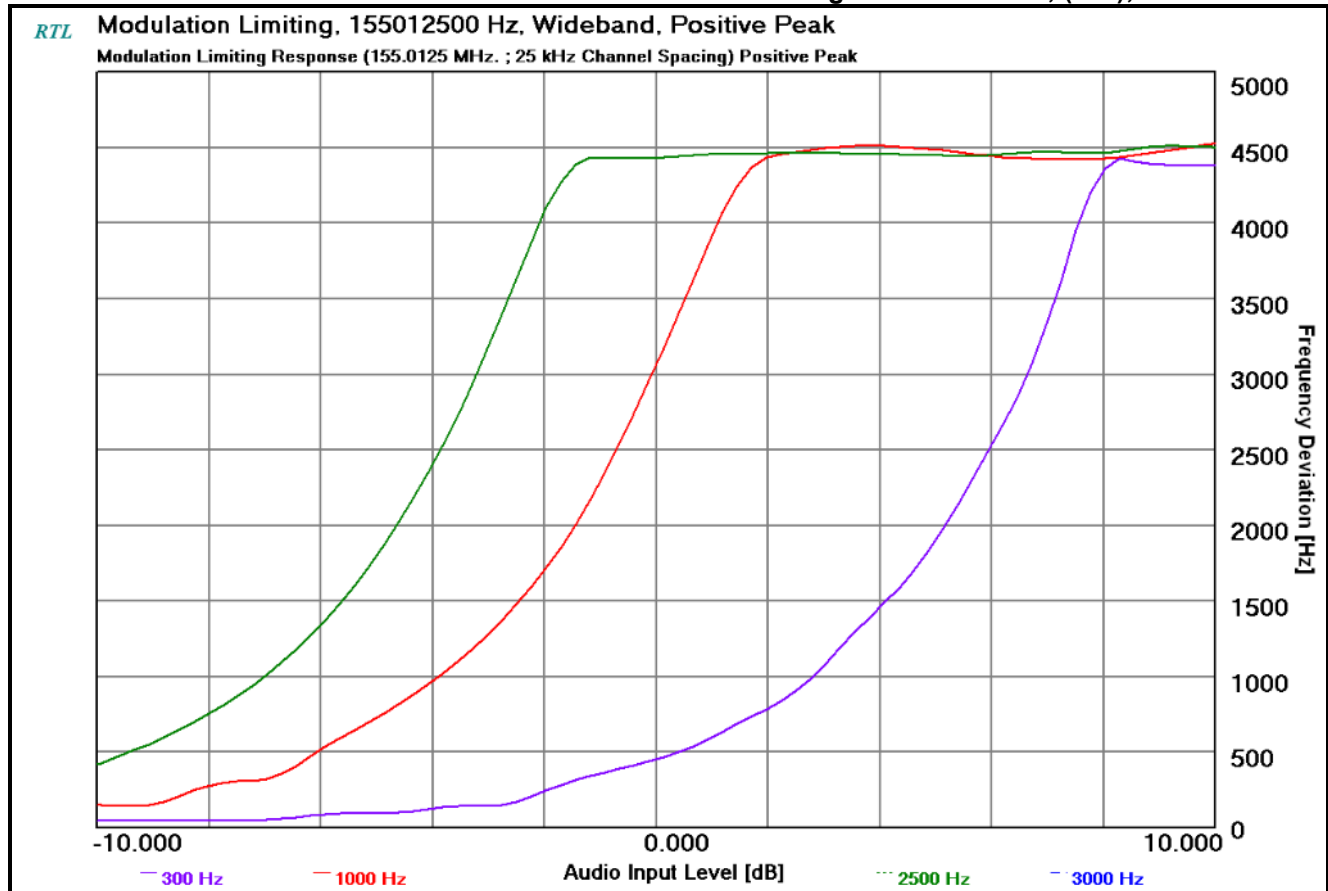


Plot 9-18: Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (WB); Negative Peak

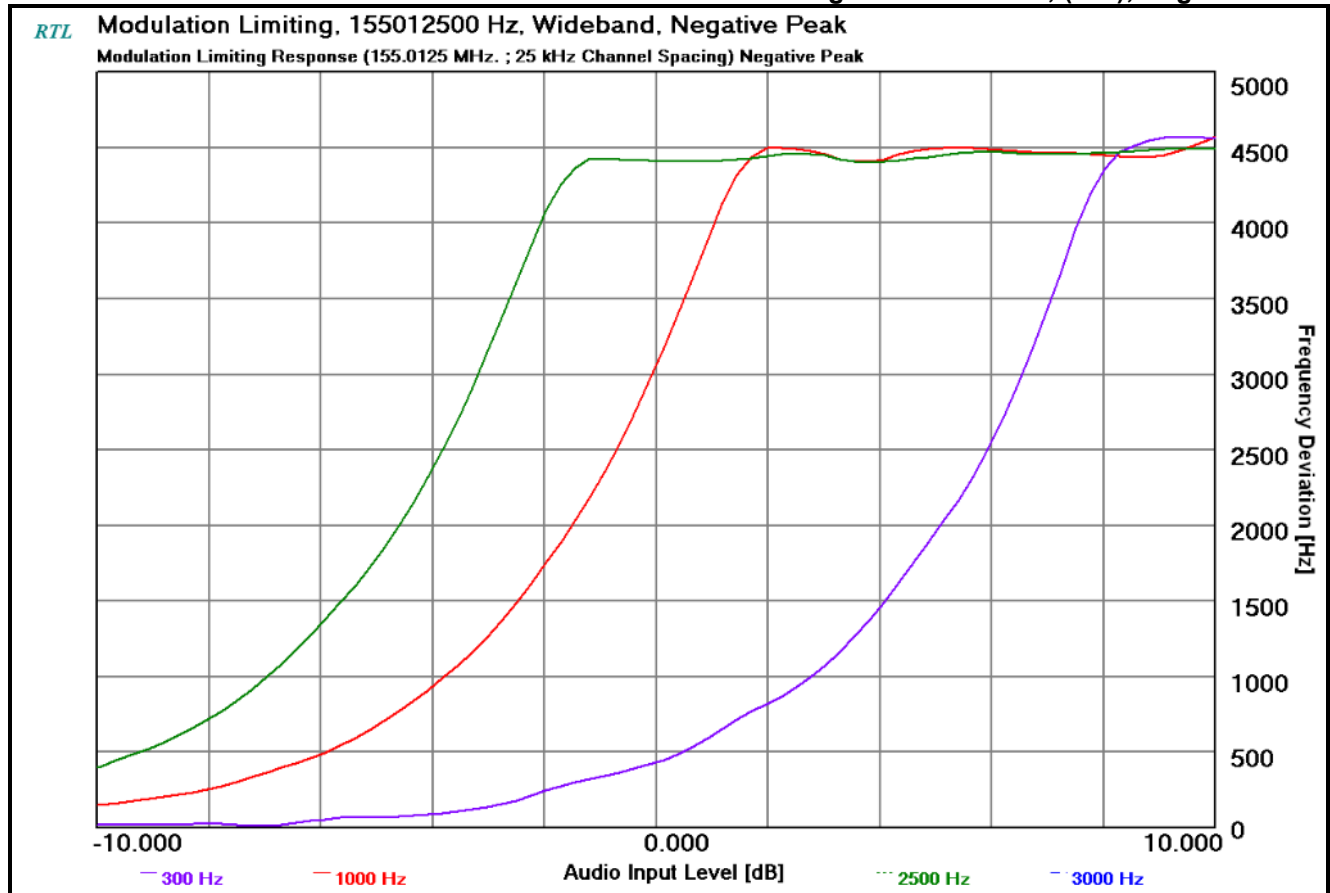


Plot 9-19: Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (NB); Positive Peak

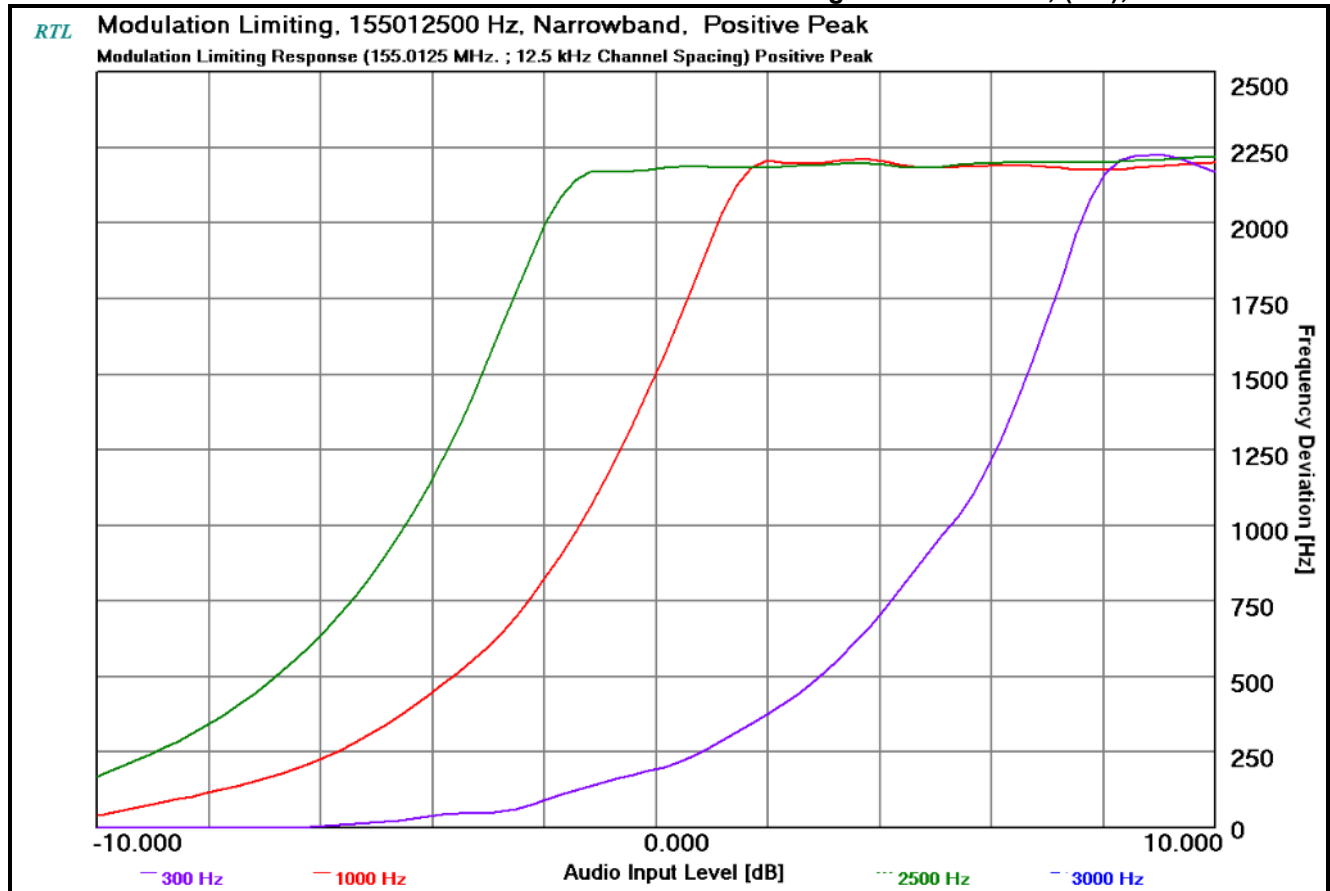


Plot 9-20: Modulation Characteristics – Modulation Limiting – 155.0125 MHz; (NB); Negative Peak

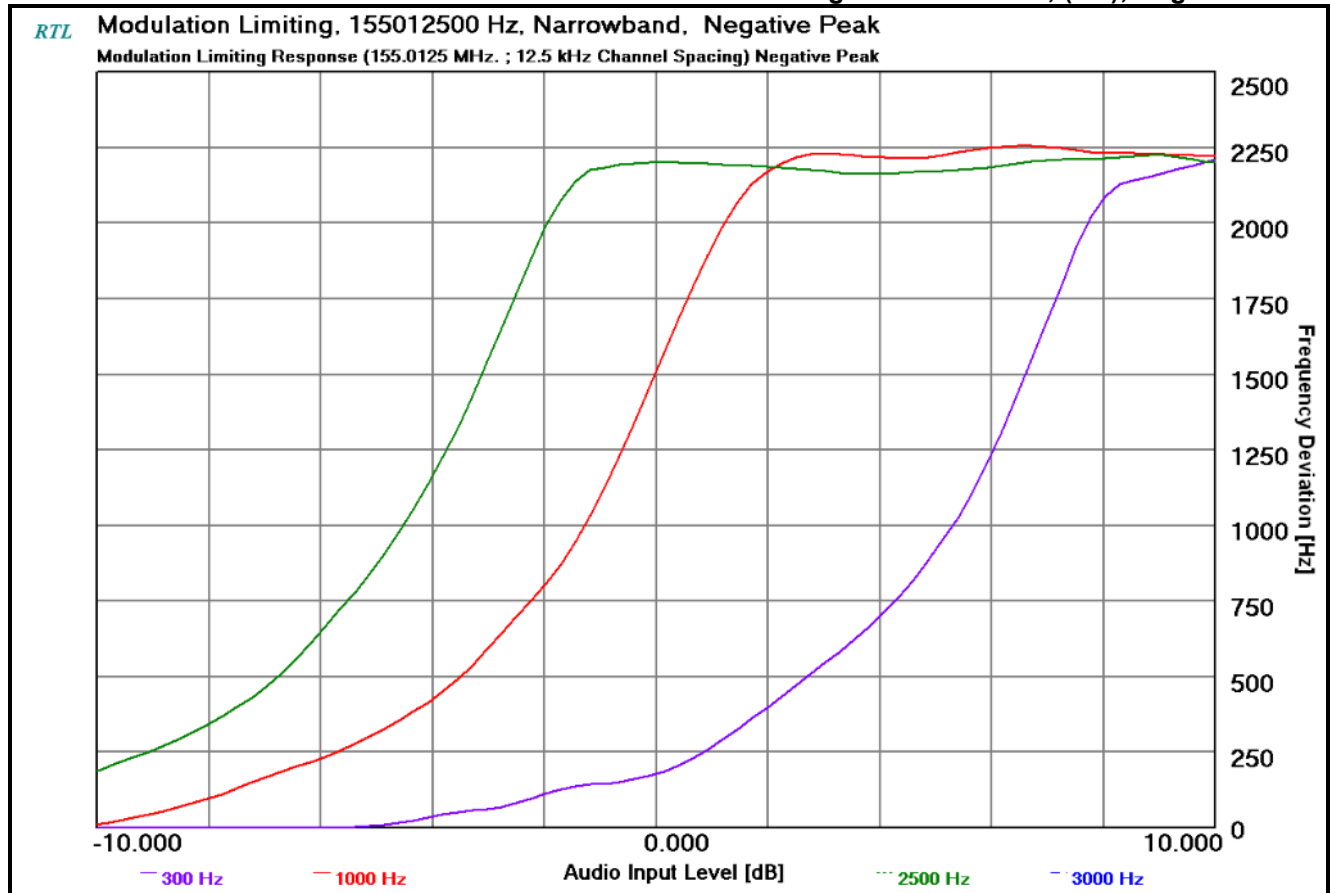


Plot 9-21: Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (WB); Positive Peak

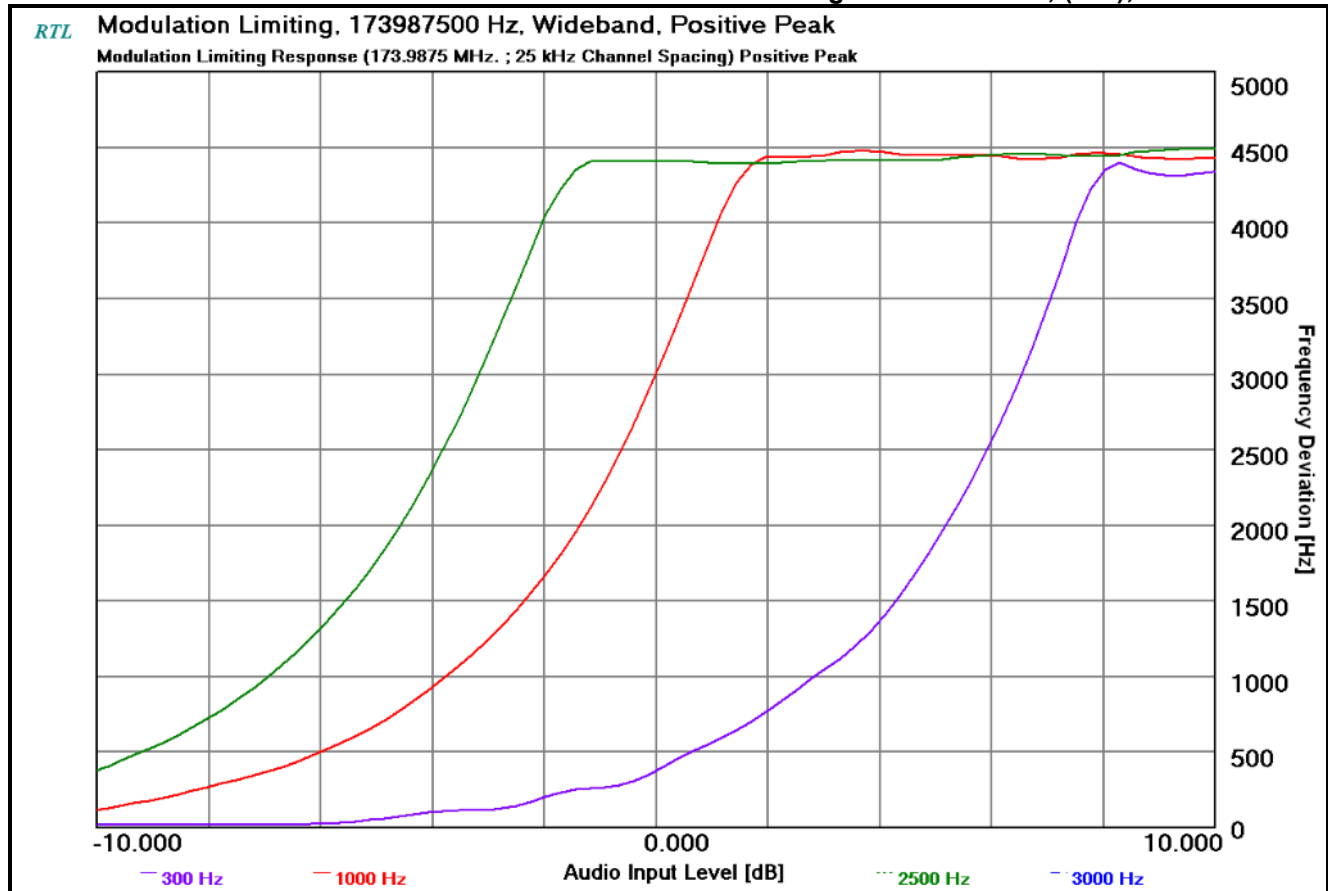


Plot 9-22: Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (WB); Negative Peak

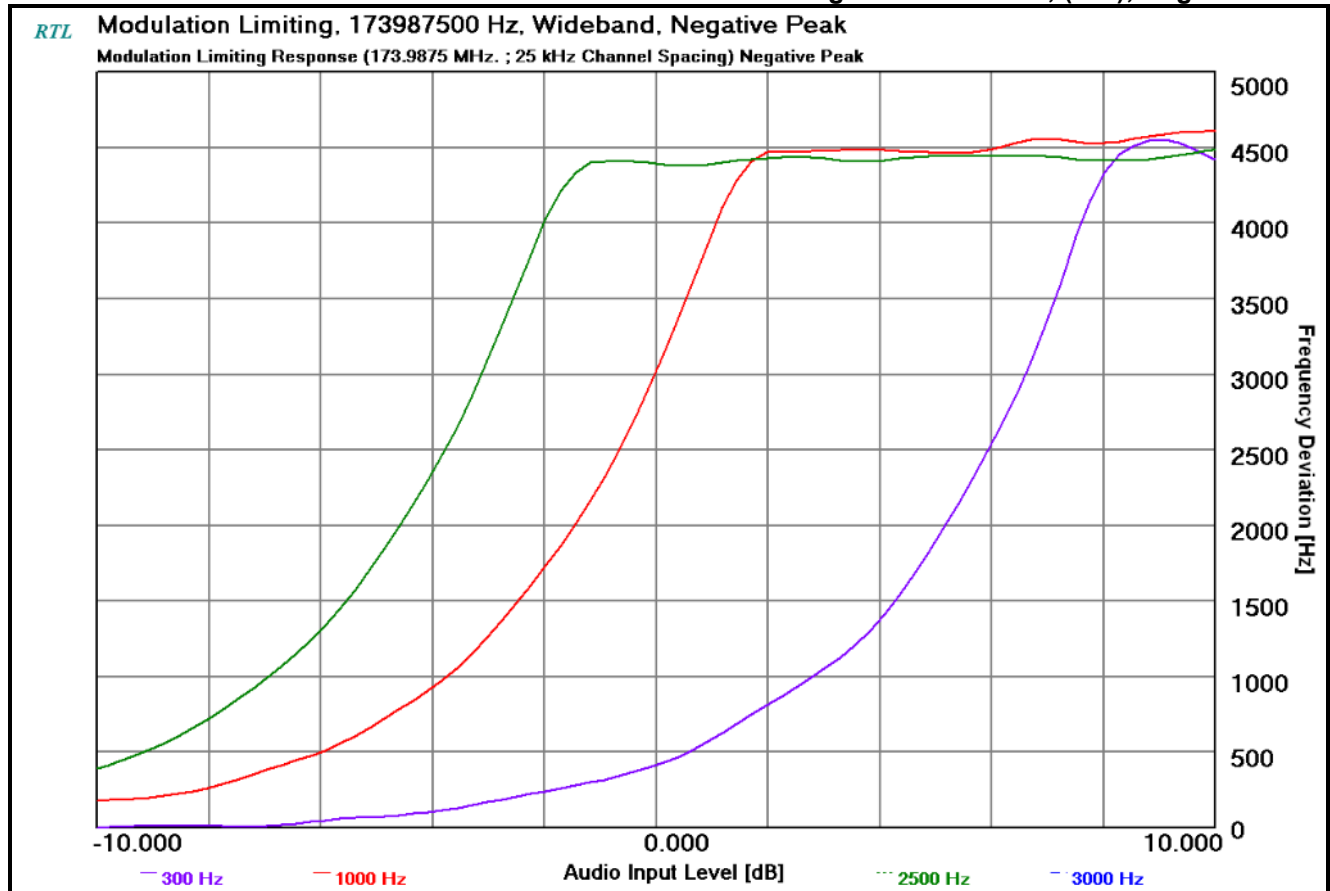

Plot 9-23: Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (NB); Positive Peak

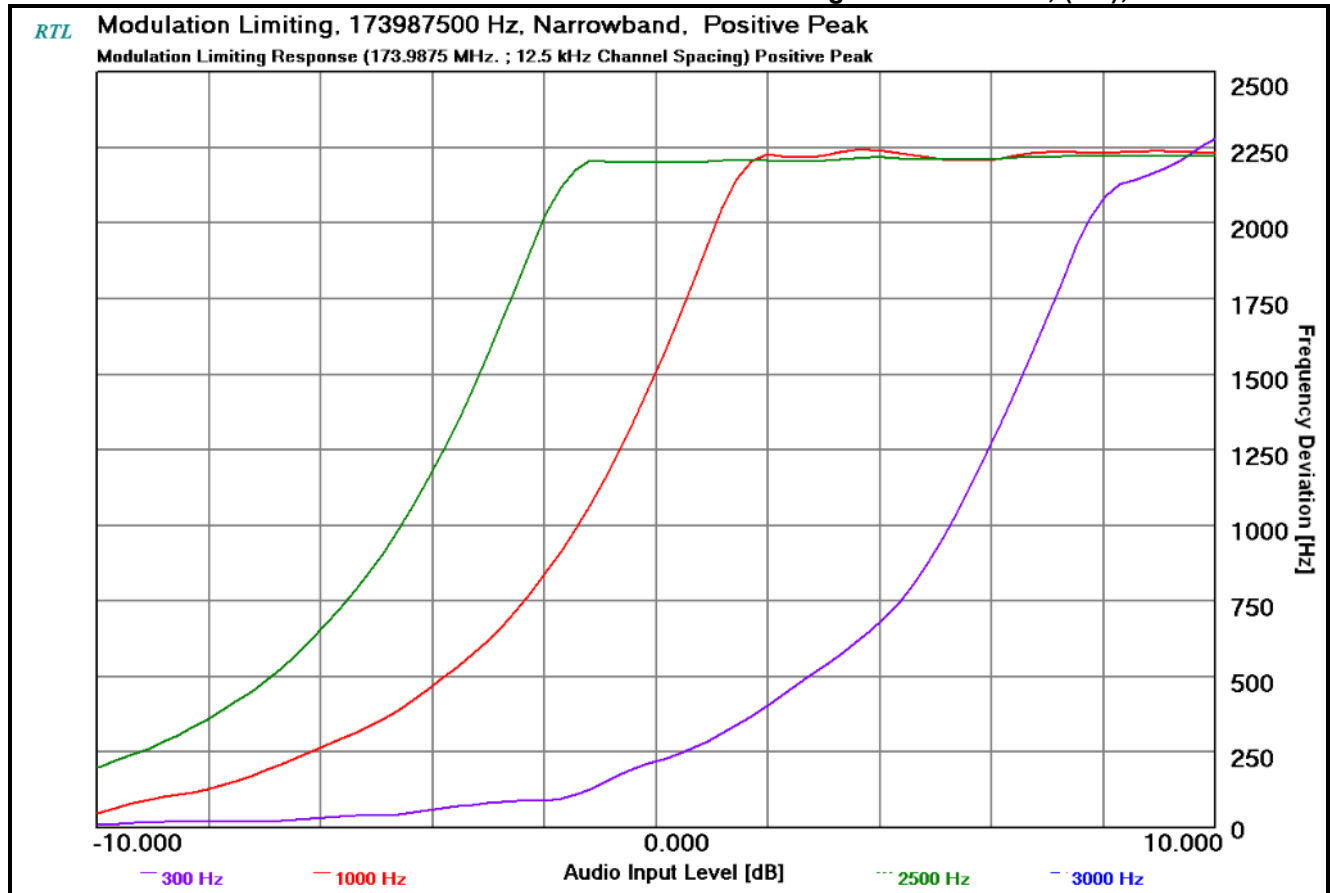

Plot 9-24: Modulation Characteristics – Modulation Limiting – 173.9875 MHz; (NB); Negative Peak

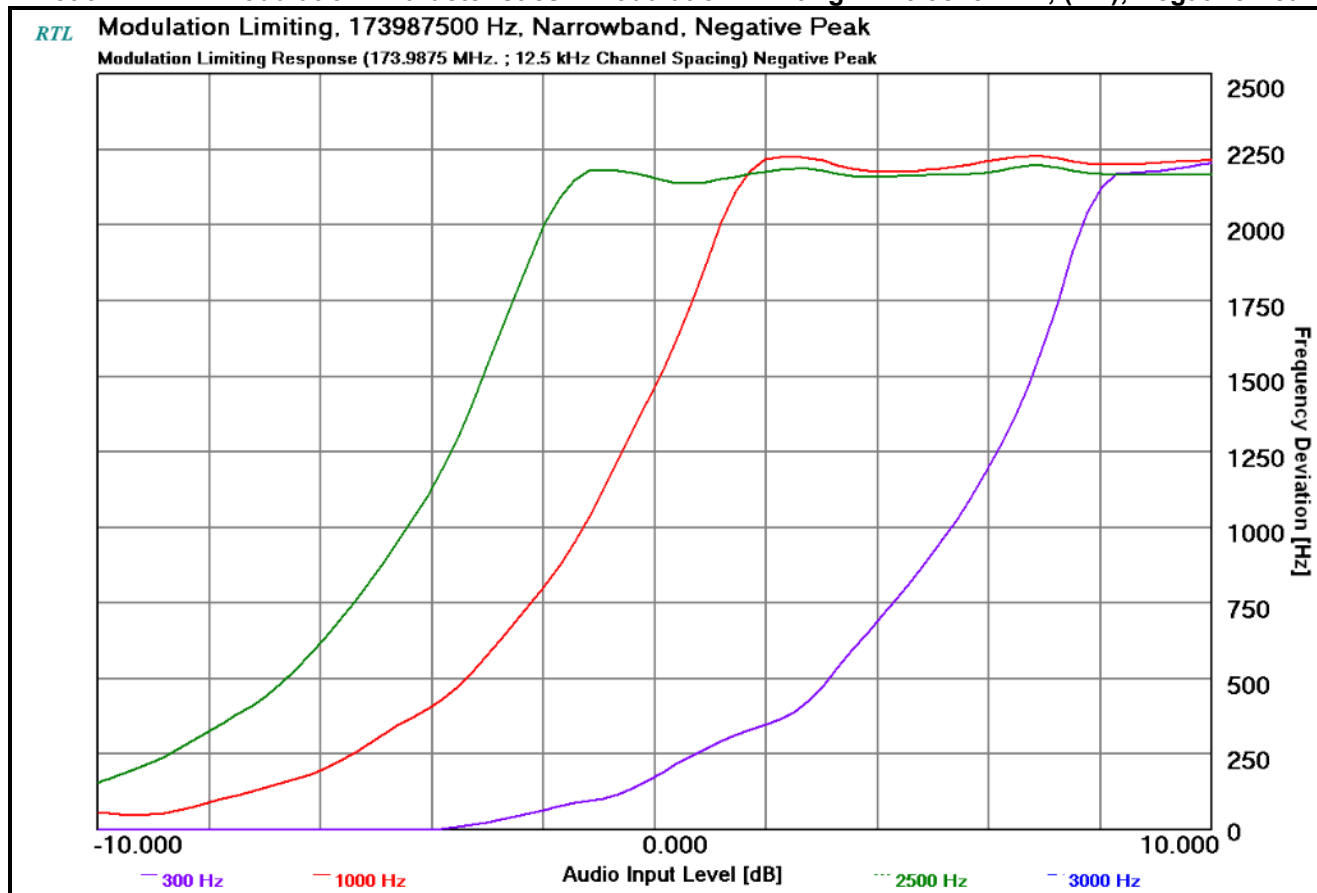

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ± 0.5 Hz/ ± 0.5 dB

Results: Pass

Table 9-1: Test Equipment Used For Testing Modulation Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/ Level Generator	2514A02585	03/28/2027
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	11/02/2027
901759	Hewlett Packard	HP 3586B	Selective Level Meter	2510A03886	04/04/2027
901139	Weinschel Corporation	48-20-34	Attenuator DC-18 GHz 20 dB 100W	BK5859	09/21/2027

Test Personnel:

Daniel W. Baltzell
EMC Test Engineer

Signature

March 4, 2025
Date of Test

10 FCC §90.214: Transient Frequency Response; §74.462(c): Authorized Bandwidth and Emissions; RSS-119 5.9: Transient Frequency Behavior

10.1 Test Procedure

TIA-EIA-603-C 2004, section 2.2.3. Transmitter plots were taken with the radio set at high power.

§90.214 Transient Frequency Behavior

Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1^4	±25.0 kHz	5.0 ms	10.0 ms
t_2	±12.5 kHz	20.0 ms	25.0 ms
t_3^4	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1^4	±12.5 kHz	5.0 ms	10.0 ms
t_2	±6.25 kHz	20.0 ms	25.0 ms
t_3^4	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1^4	±6.25 kHz	5.0 ms	10.0 ms
t_2	±3.125 kHz	20.0 ms	25.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.


⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

10.2 Test Data


Plot 10-1: Transient Frequency Behavior – 155.0125 MHz; Wide Band; Carrier ON Time

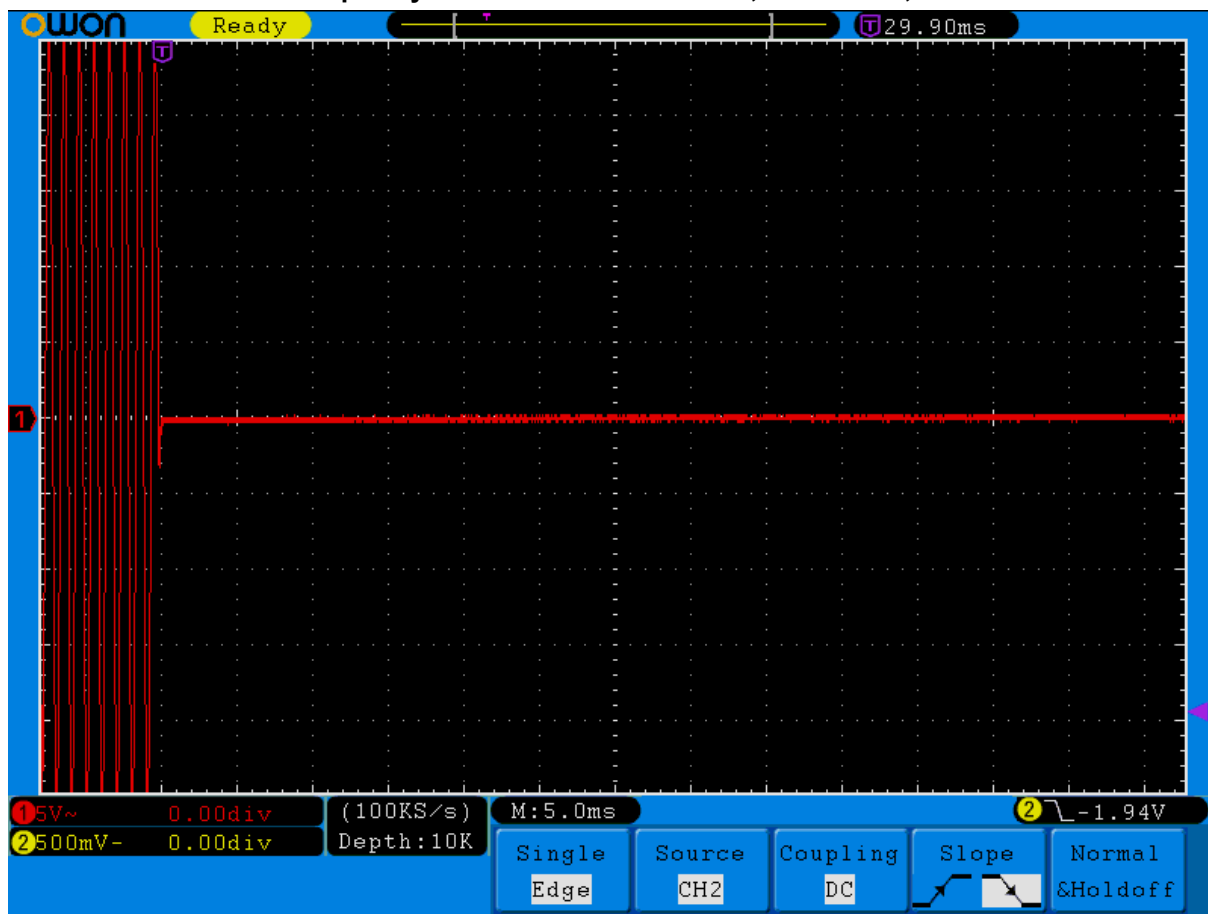


Plot 10-2: Transient Frequency Behavior – 155.0125 MHz; Wide Band; Carrier OFF Time

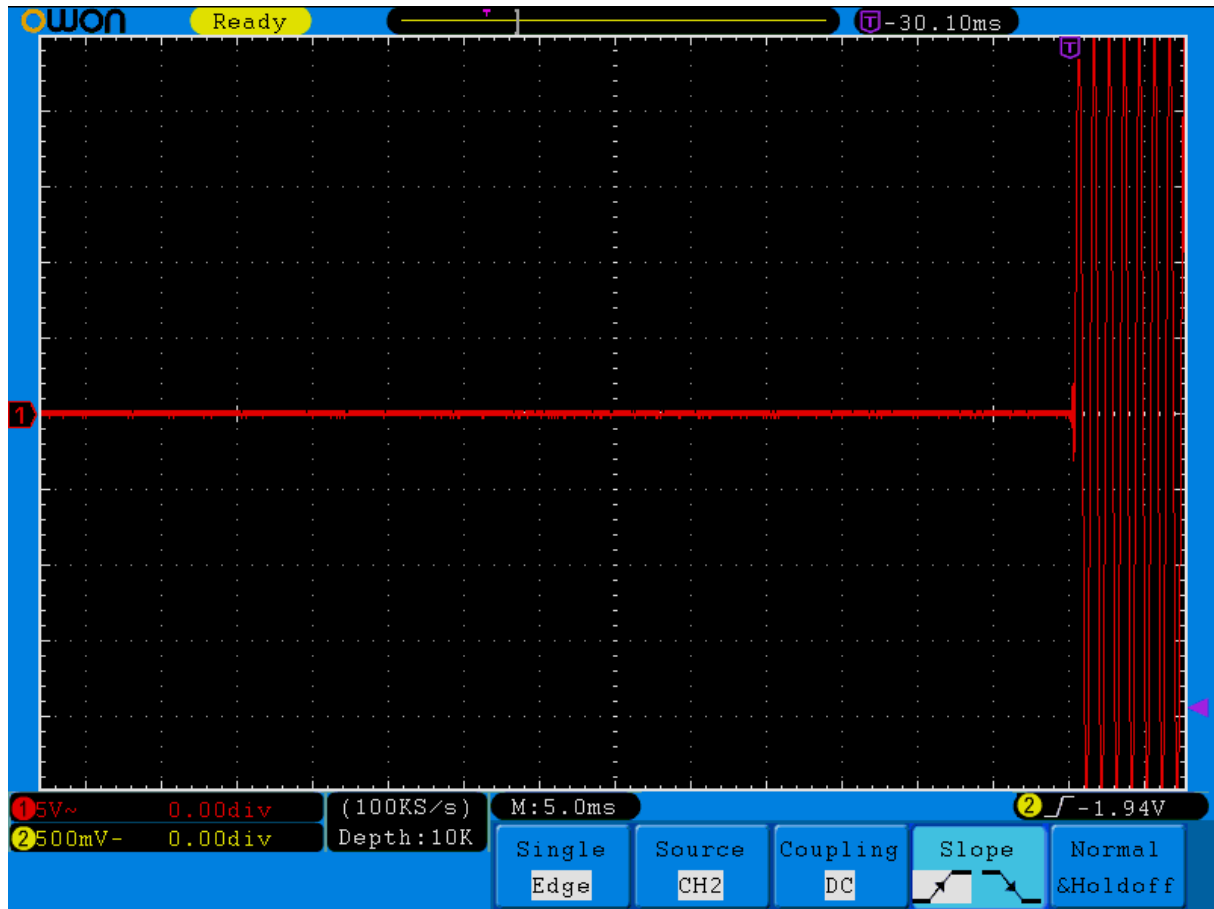


Plot 10-3: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier ON Time

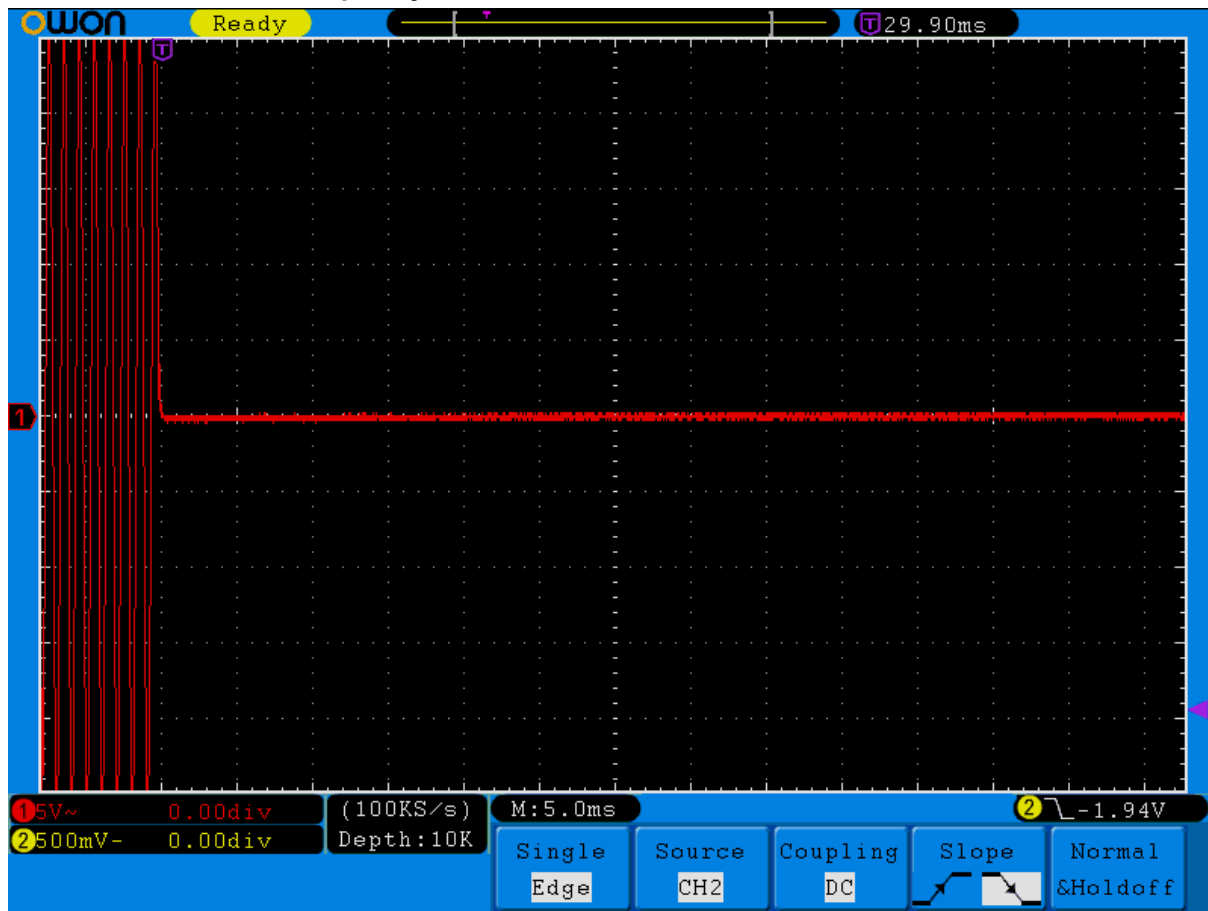


Plot 10-4: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier OFF Time

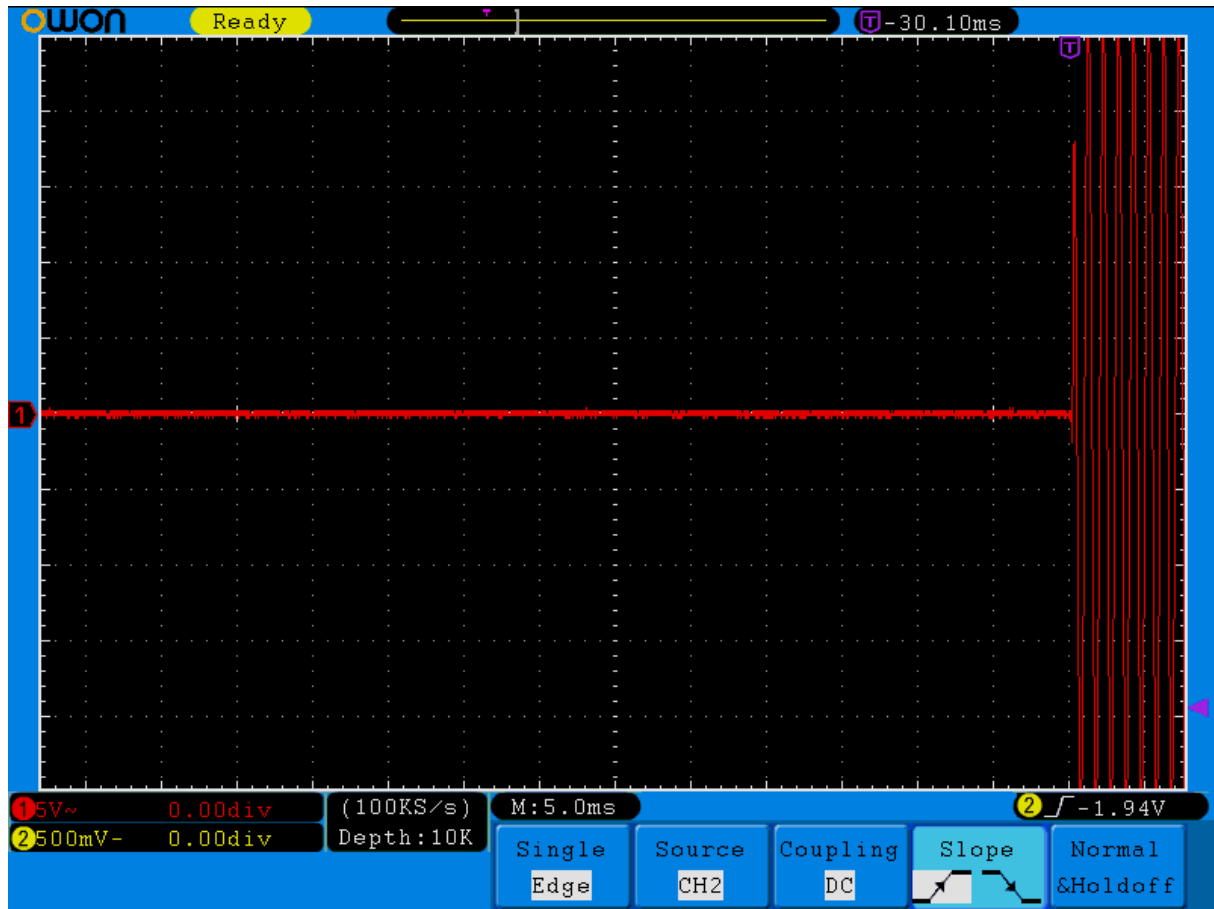


Plot 10-5: Transient Frequency Behavior – 155.0125 MHz; Narrow Band; Carrier ON Time

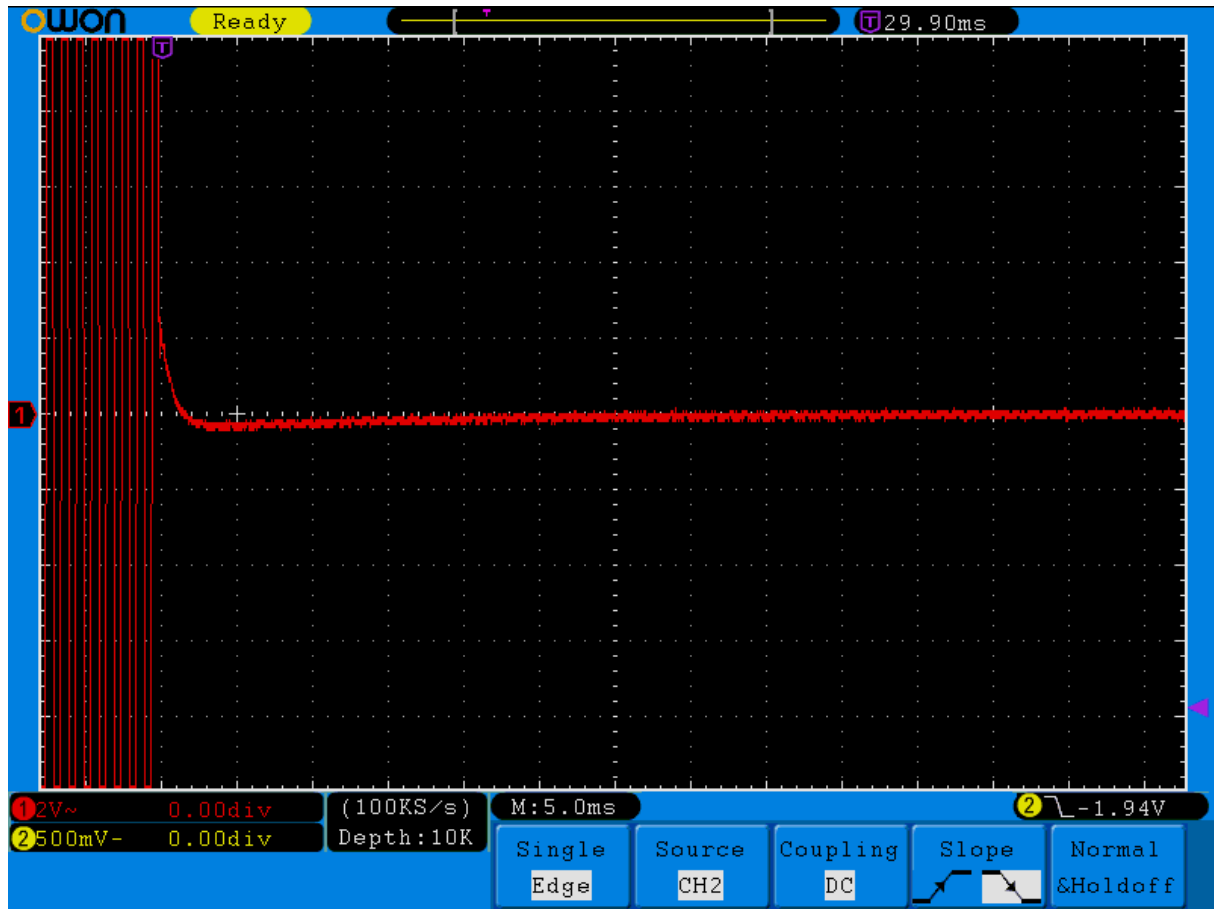


Plot 10-6: Transient Frequency Behavior – 155.0125 MHz; Narrow Band; Carrier OFF Time

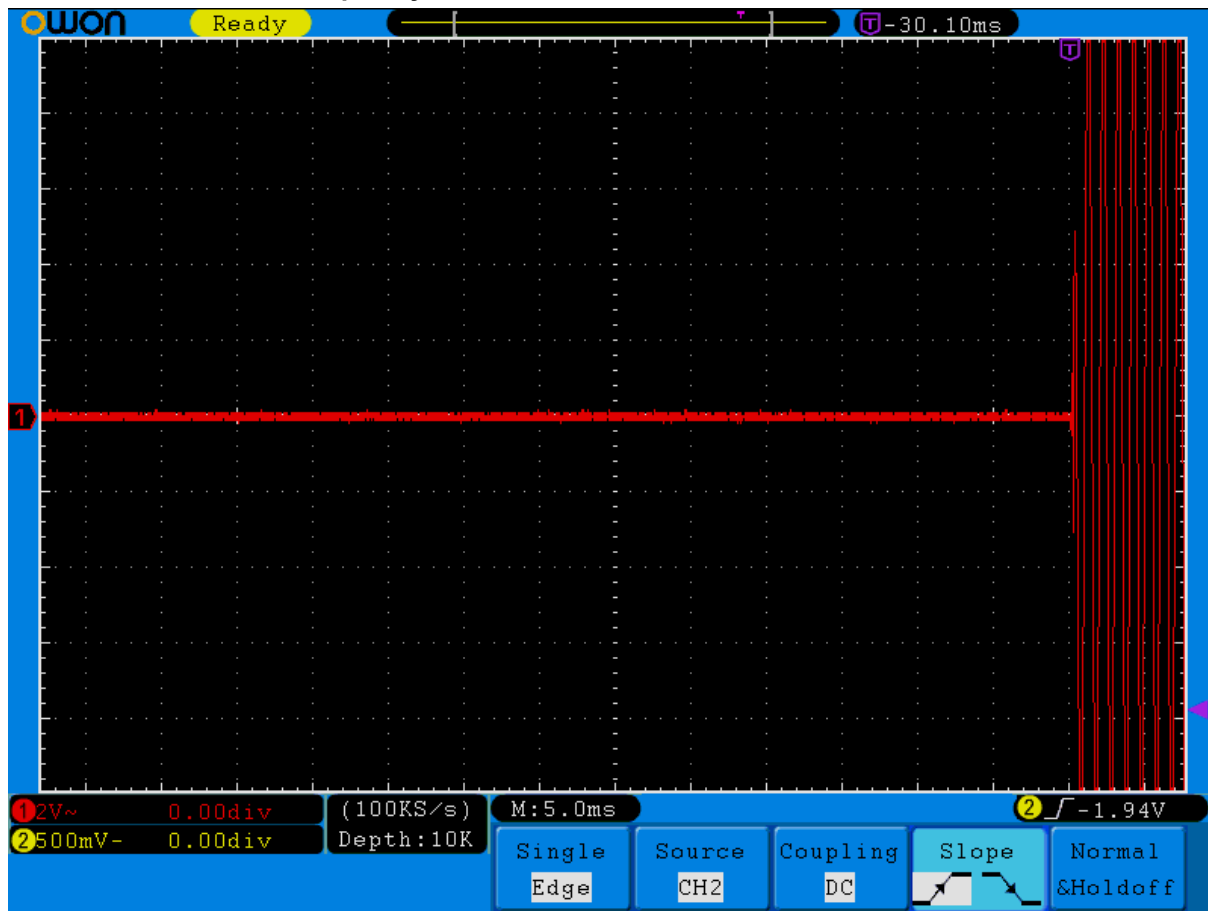

Plot 10-7: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier ON Time

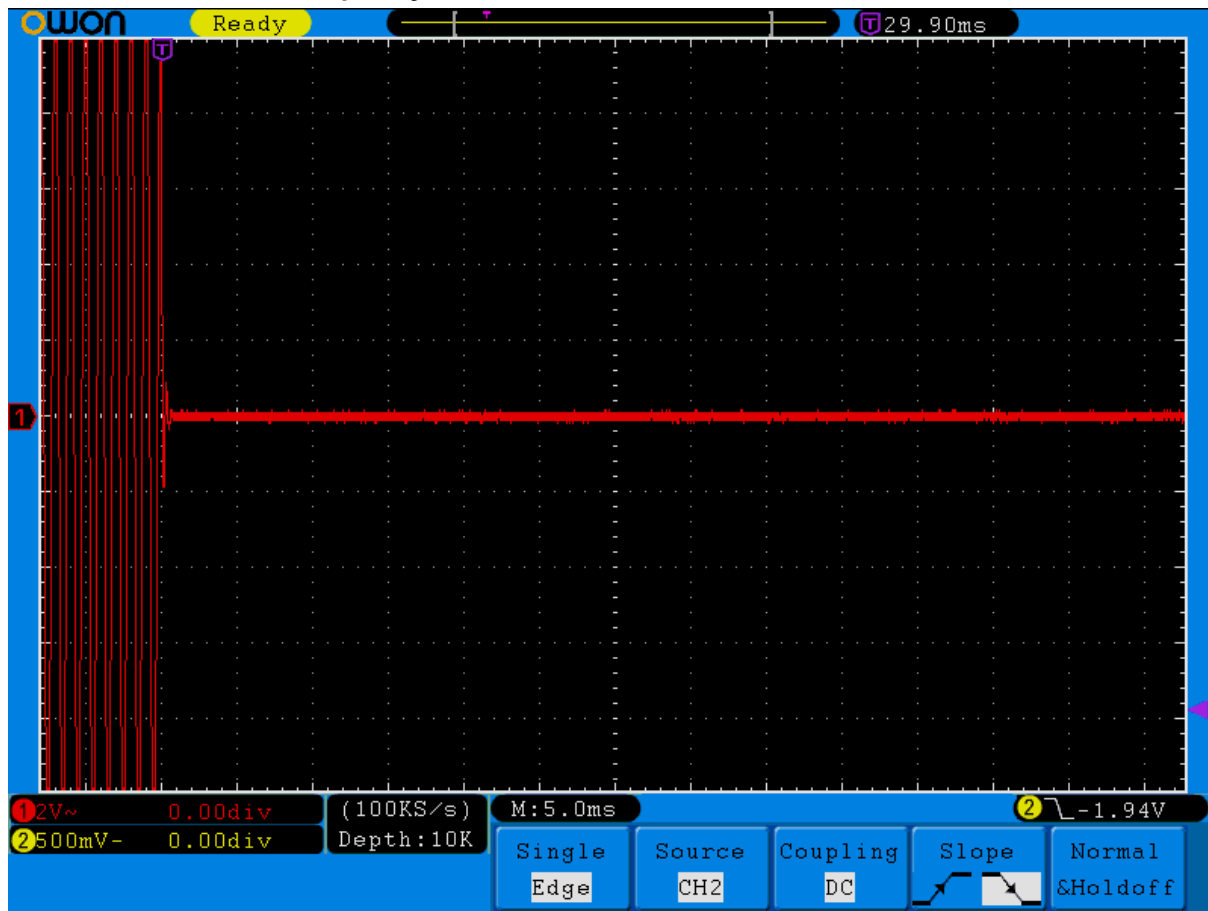

Plot 10-8: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier OFF Time

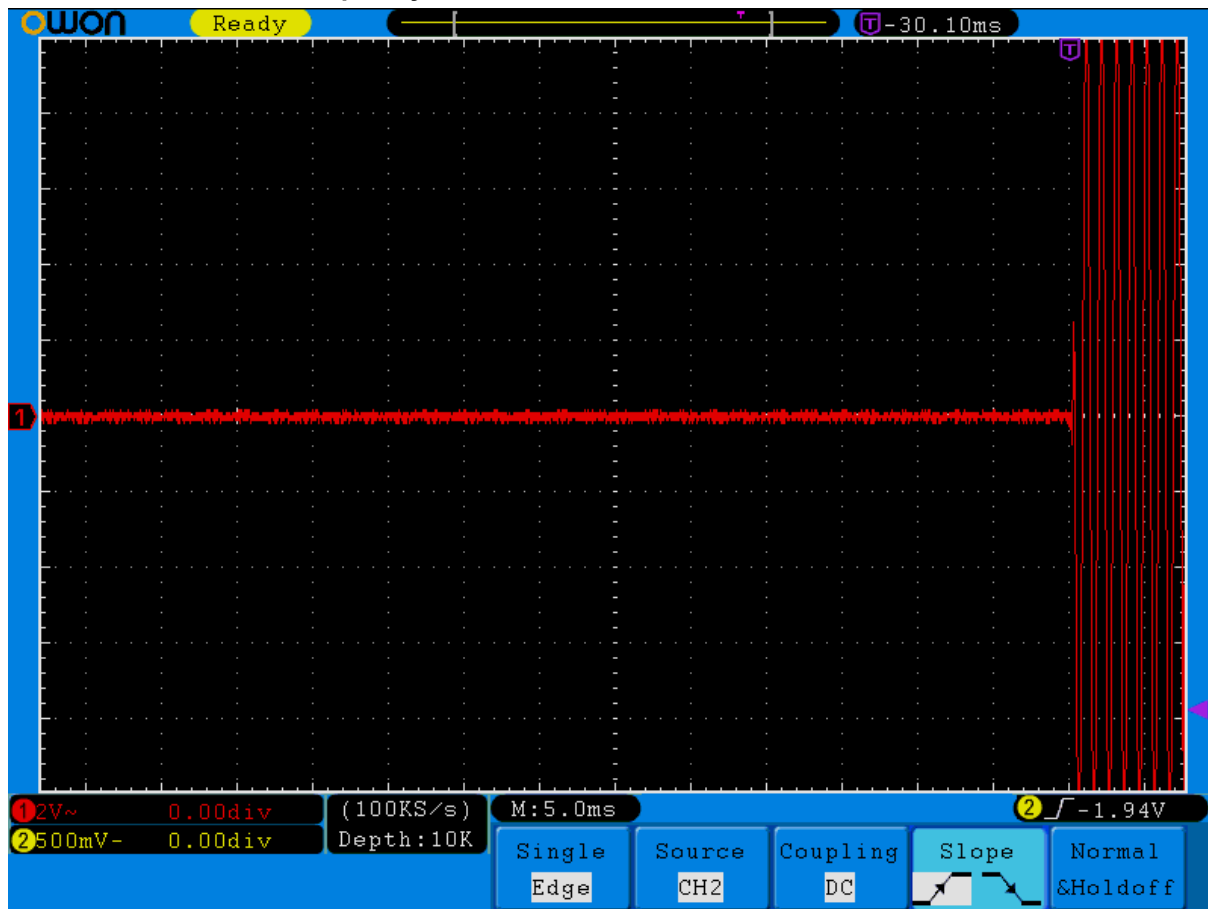

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: $\pm 0.5 \text{ Hz} \pm 0.5 \text{ dB}$

Results: Pass

Table 10-1: Test Equipment Used For Testing Transient Frequency Behavior

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900917	Rhode & Schwarz	SMF 100A	Signal Generator	1167.0000.02	08/16/2027
901118	Hewlett Packard	HP8901B	Modulation Analyzer (150 kHz–1300 MHz)	2406A00178	11/02/2027
901761	OWON	SDS7102V	Oscilloscope	B020129	04/02/2027

Test Personnel:

Daniel Baltzell
Test Engineer

Signature

February 28, 2025
Date of Tests

11 §2.202: Necessary Bandwidth and Emission Bandwidth

Analog FM (Wideband)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2M + 2DK = 16.0 \text{ kHz}$

Emission designator: 16K0F3E

2-level FSK 9600 Data/Digital Voice (Wideband)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 5600

$B_n = [9600/\log_2(4) + 2 (5600) (1) = 16.000 \text{ kHz}$

Emission designator: 16K0F1D, 16K0F1E

Analog FM (Narrowband)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 11.0 \text{ kHz}$

Emission designator: 11K0F3E

2-level FSK 9600 Data/Digital Voice (Narrowband)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 3450

$B_n = [9600/\log_2(4) + 2 (3450) (1) = 11.700 \text{ kHz}$

Emission designator: 11K7F1D, 11K7F1E

C4FM Data/Voice

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (1) = 8.400 \text{ kHz}$

Emission designator: 8K40F1D, 8K40F1E

H-CPM (TDMA) Data/Voice

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 1050

$B_n = [12000/\log_2(4) + 2 (1050) (1) = 8.1 \text{ kHz}$

Emission designator: 8K10DXW

12 Conclusion

The data in this measurement report shows that the L3Harris Technologies, Inc., Model XL-85M VHF; FCC ID: OWDTR-0176-E, IC: 3636B-0176, complies with the applicable requirements of Parts 2, 22, 74, 80 and 90 of the FCC Rules and ISED RSS-119.