


1. Peak-Average Ratio

1.1 GSM850


1.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	824.2	9.73	<=13	Pass
			836.6	3.59	<=13	Pass
			848.8	3.59	<=13	Pass
	EGPRS	4 TX Slots	824.2	8.70	<=13	Pass
			836.6	9.40	<=13	Pass
			848.8	9.02	<=13	Pass


1.1.2 Test Graph

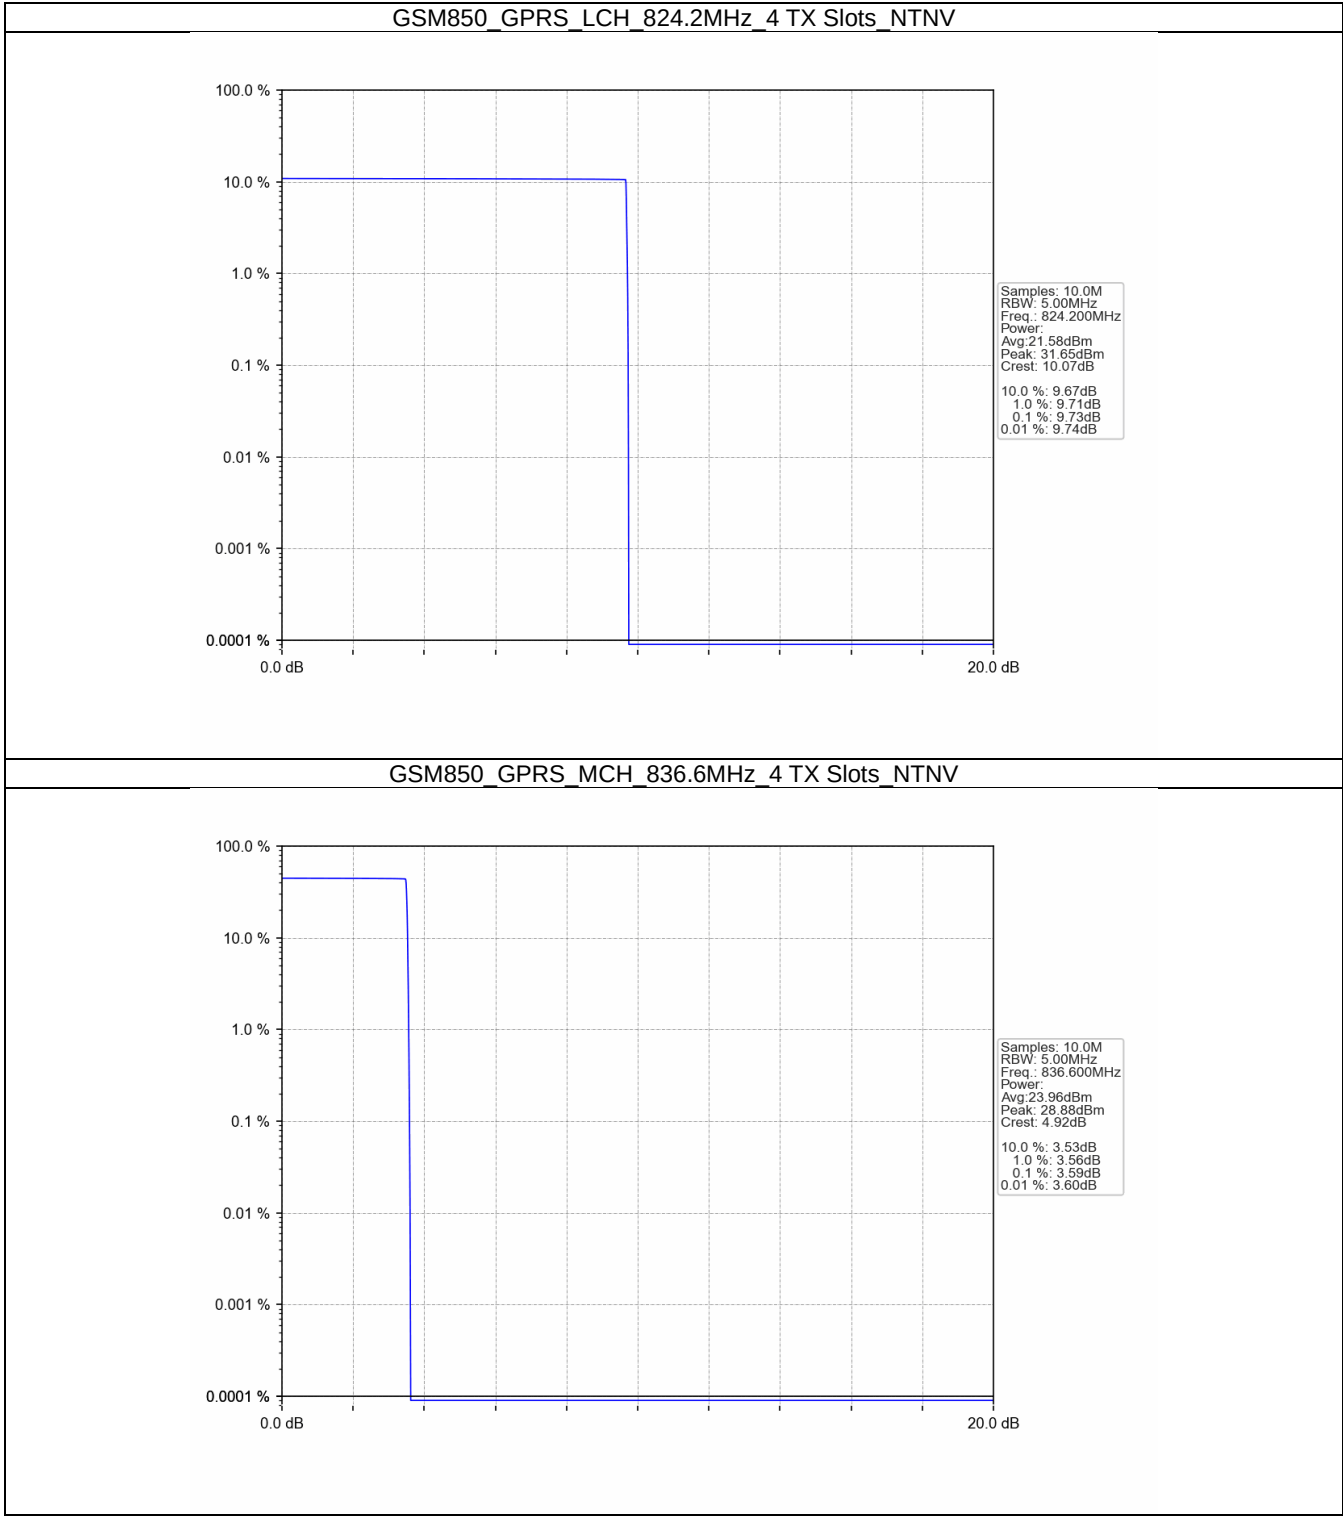


GSM850 GPRS HCH 848.8MHz 4 TX Slots NTNV

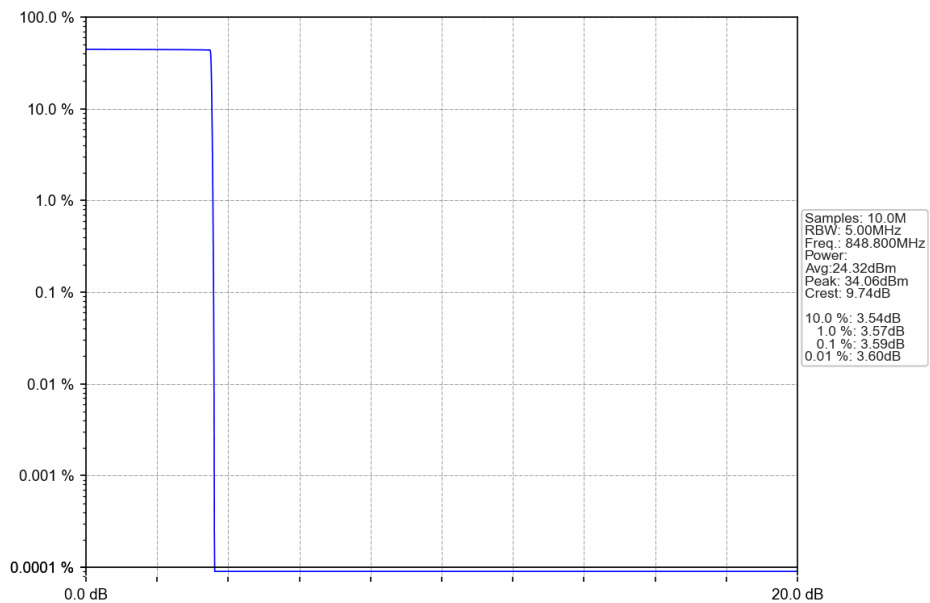


GSM850 EGPRS LCH 824.2MHz 4 TX Slots NTNV

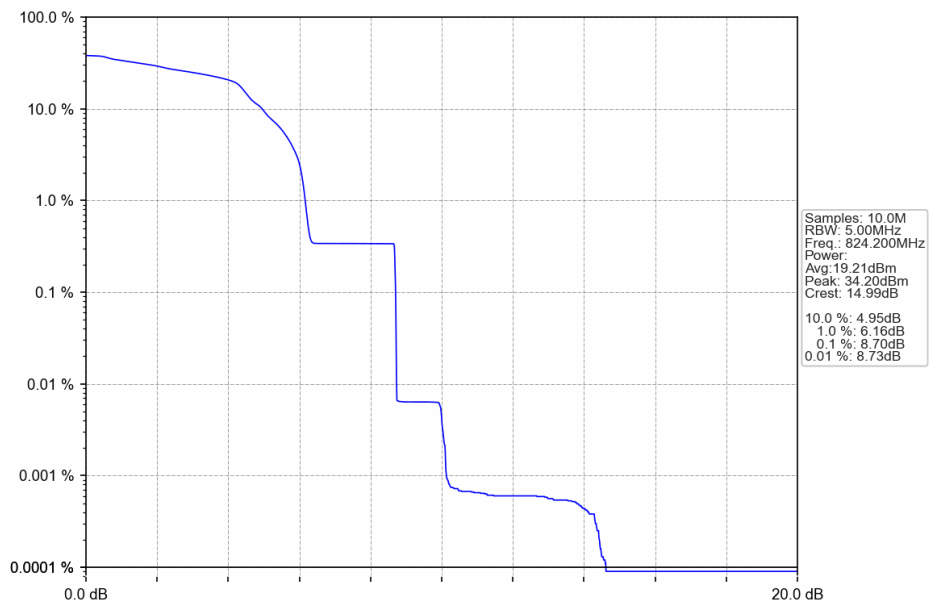

GSM850 EGPRS MCH 836.6MHz 4 TX Slots NTNV

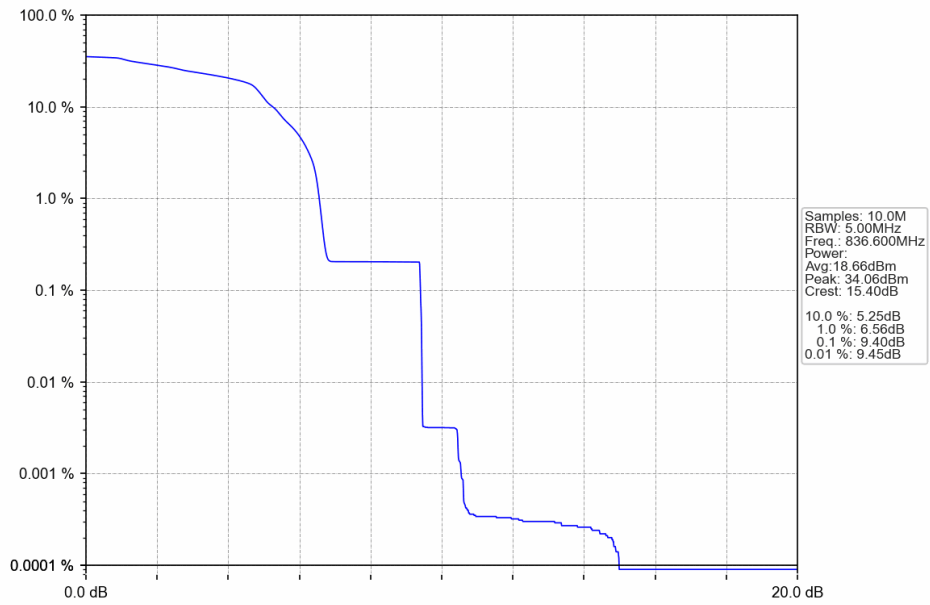

GSM850 EGPRS HCH 848.8MHz 4 TX Slots NTNV

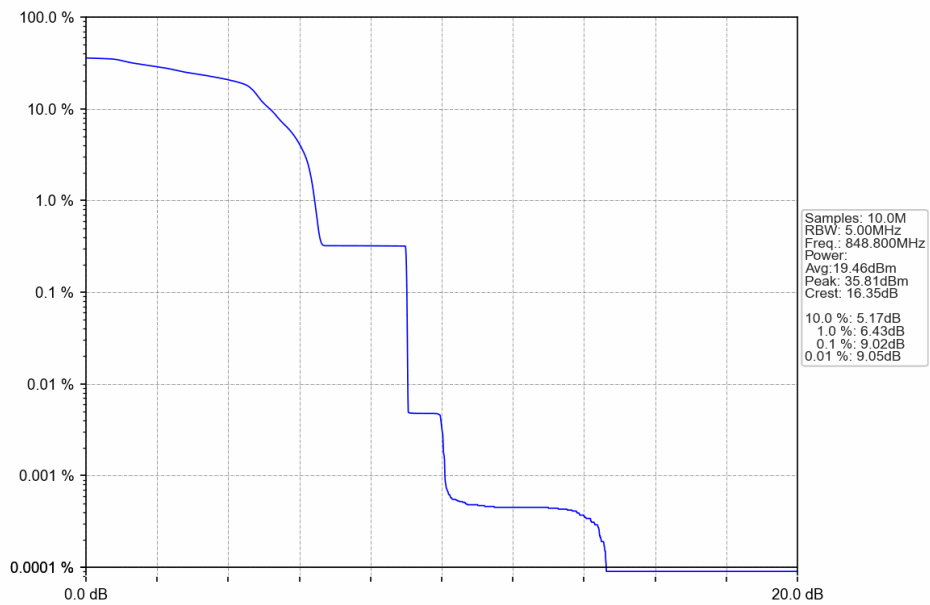


2. Peak-Average Ratio

2.1 PCS1900


2.1.1 Test Result

Band: PCS1900						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	1850.2	9.56	<=13	Pass
			1880	3.55	<=13	Pass
			1909.8	3.51	<=13	Pass
	EGPRS	4 TX Slots	1850.2	11.95	<=13	Pass
			1880	6.76	<=13	Pass
			1909.8	6.79	<=13	Pass


2.1.2 Test Graph

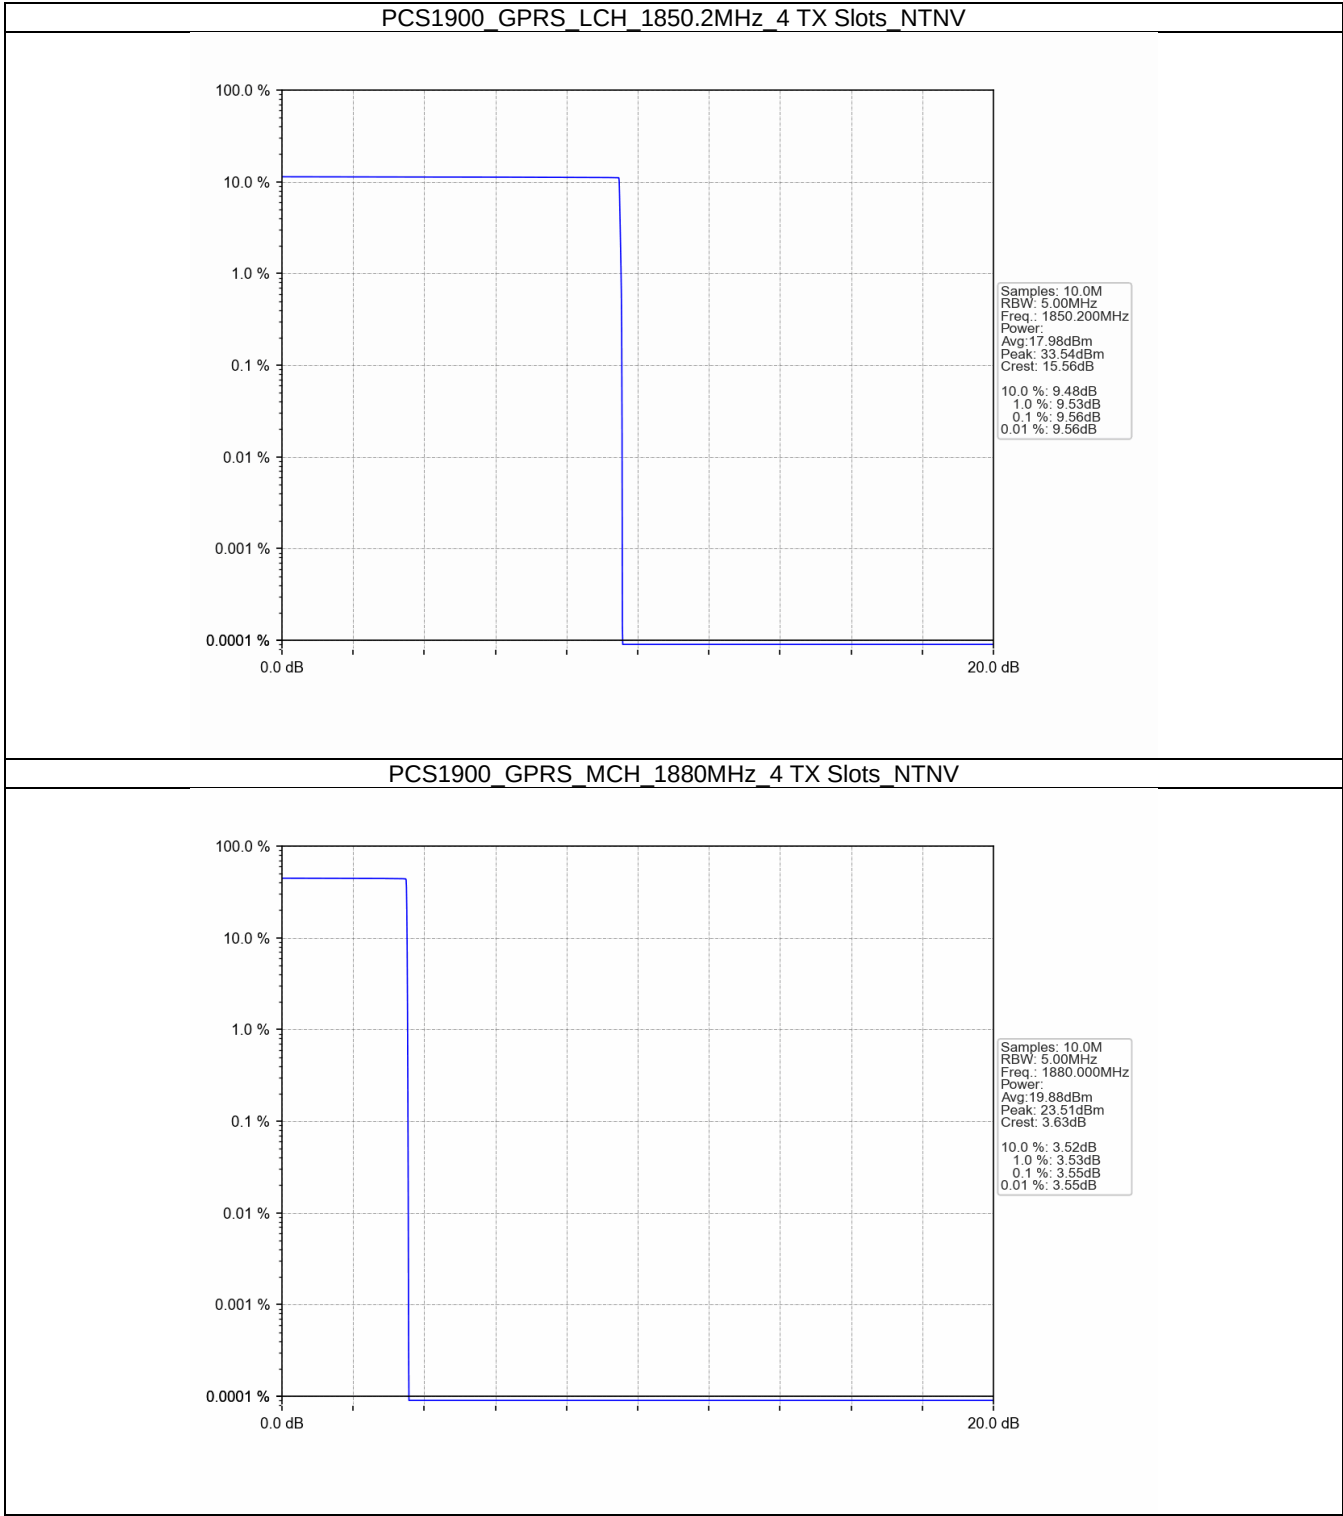


PCS1900 GPRS HCH 1909.8MHz 4 TX Slots NTNV

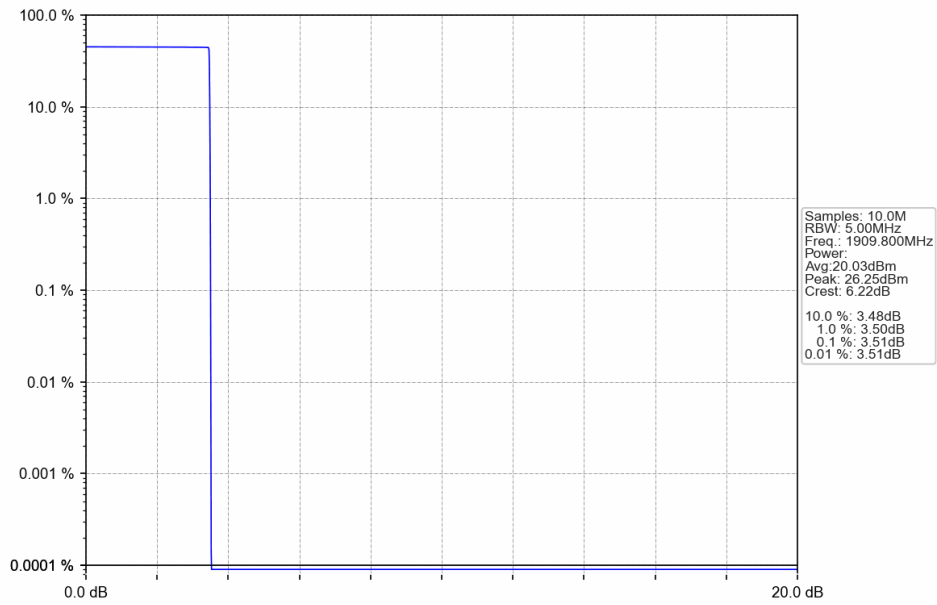

PCS1900 EGPRS LCH 1850.2MHz 4 TX Slots NTNV

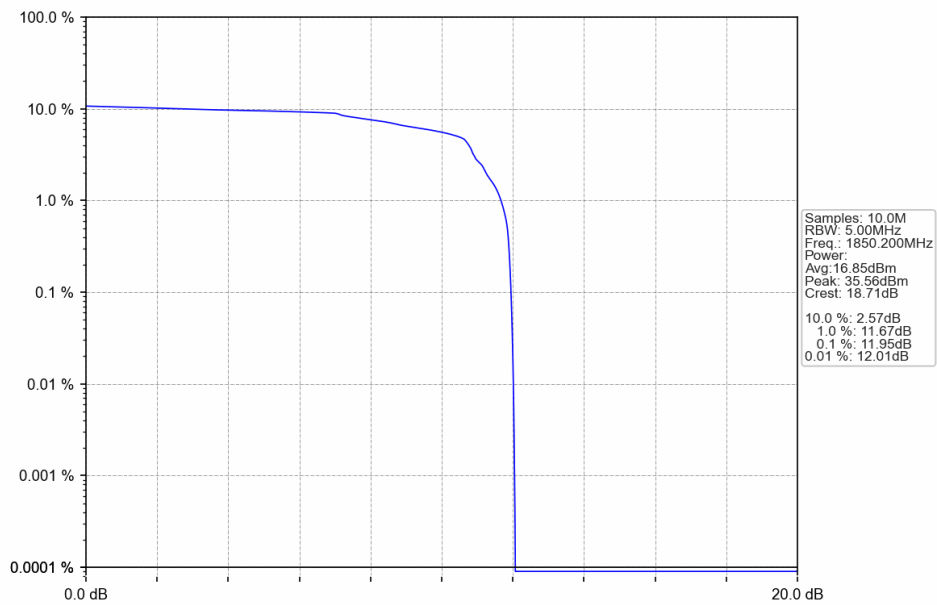

PCS1900 EGPRS MCH 1880MHz 4 TX Slots NTNV

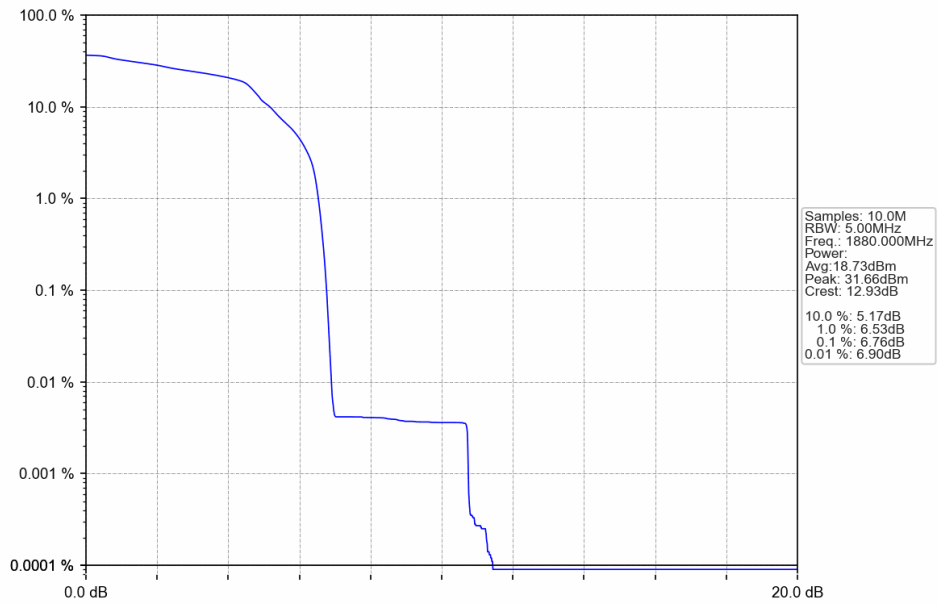

PCS1900 EGPRS HCH 1909.8MHz 4 TX Slots NTNV

