

Appendix B

Detailed Test Results

GSM850 for Body
GSM1900 for Body
WCDMA Band II for Body
WCDMA Band V for Body
LTE Band 2 for Body
LTE Band 4 for Body
LTE Band 5 for Body
LTE Band 7 for Body
LTE Band 38 for Body
LTE Band 40a for Body
LTE Band 40b for Body
LTE Band 41 for Body
WIFI 2.4G for Body
WIFI 5G for Body
BT for Body

Test Laboratory: SGS-SAR Lab

A99 LITE GSM850 GPRS 3TS 190CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77013

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.316 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.83 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

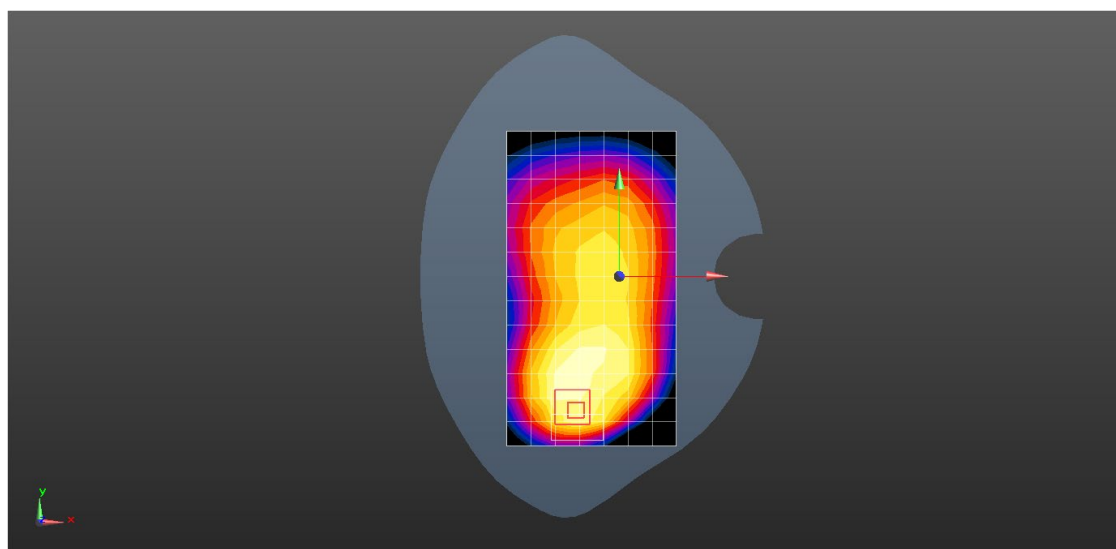

0 dB = 0.372 W/kg = -4.29 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE GSM1900 GPRS 3TS 661CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.77013

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.367$ S/m; $\epsilon_r = 40.253$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.921 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.691 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

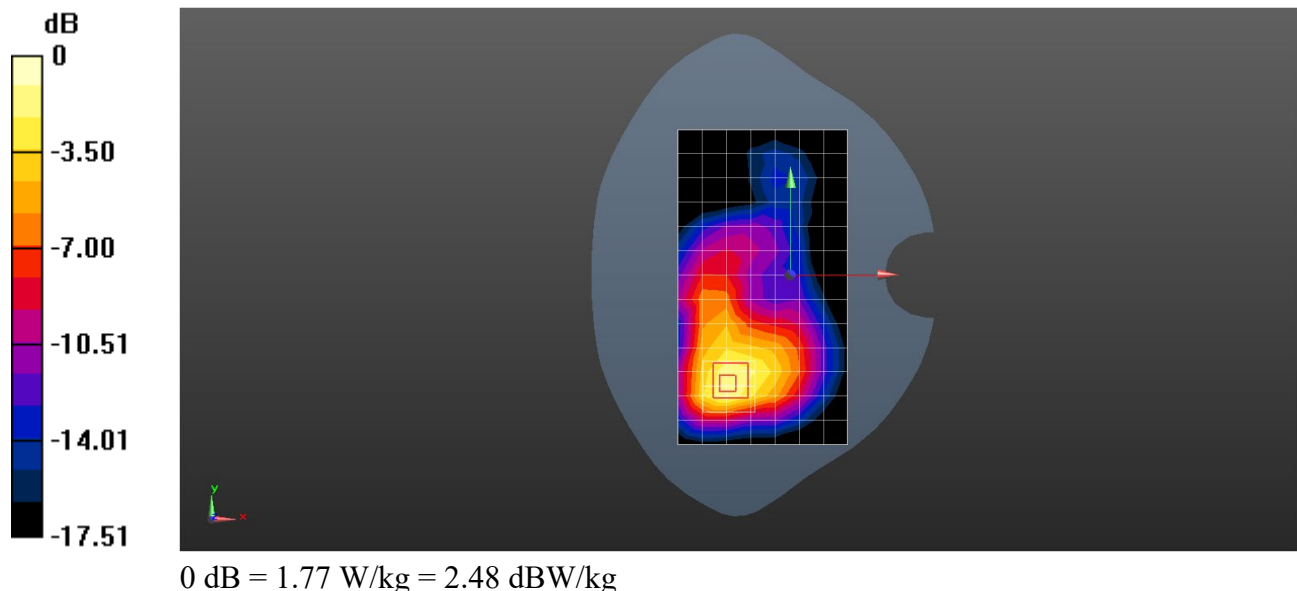

Test Laboratory: SGS-SAR Lab

A99 LITE WCDMA Band II RMC 9292CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.47 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.681 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

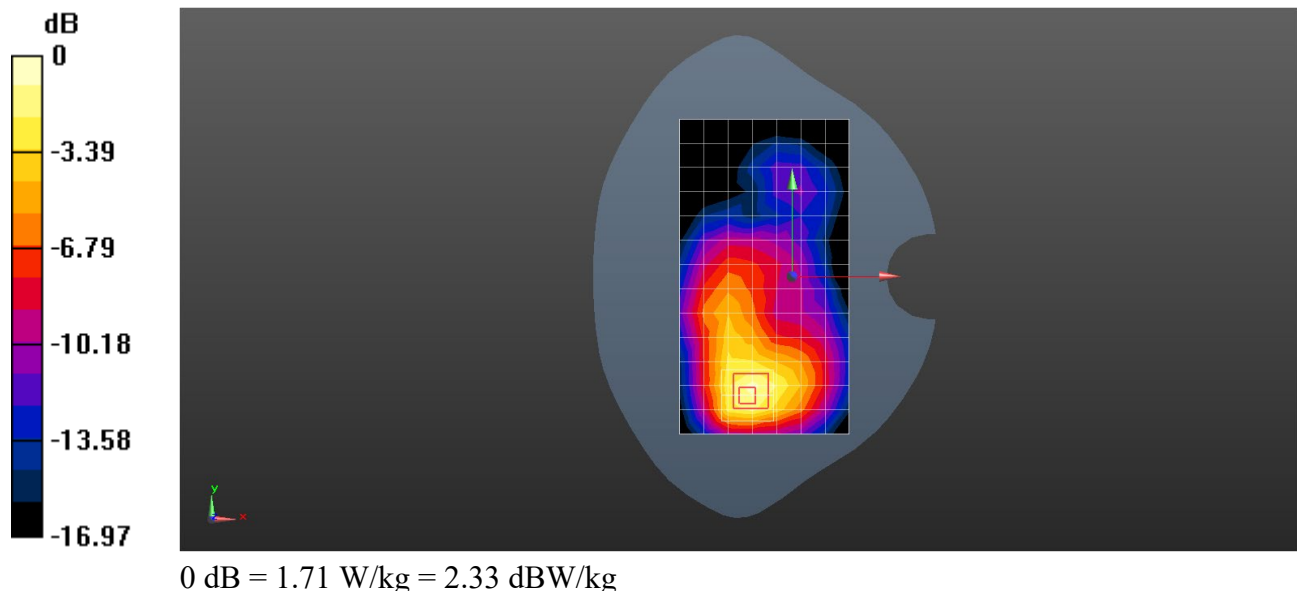

Test Laboratory: SGS-SAR Lab

A99 LITE WCDMA Band V RMC 4182CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.941$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.473 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.64 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

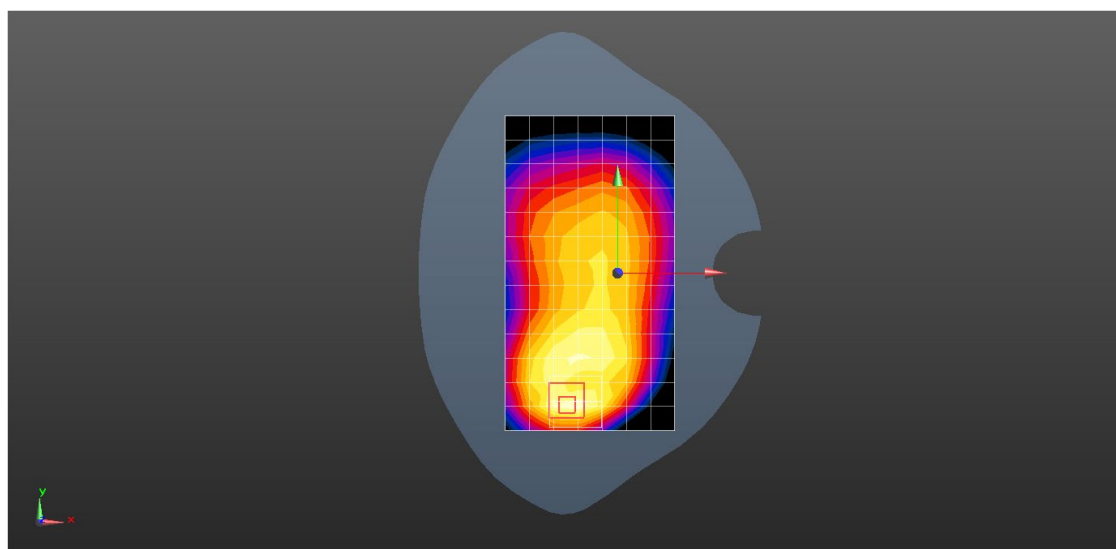

0 dB = 0.496 W/kg = -3.05 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 2 20M QPSK 1RB50 18700CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1860$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.826$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.82, 7.76, 7.85); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.49 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.703 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

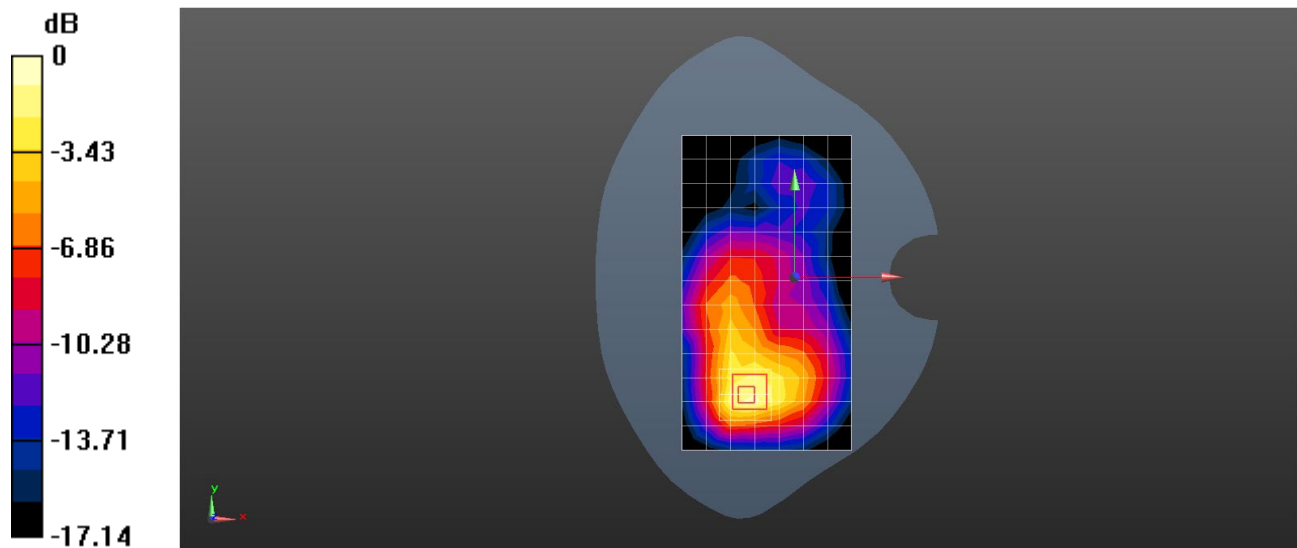

0 dB = 1.77 W/kg = 2.48 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 4 20M QPSK 1RB50 20050CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1720$ MHz; $\sigma = 1.288$ S/m; $\epsilon_r = 40.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.11, 8.04, 8.17); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.06 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.879 W/kg; SAR(10 g) = 0.497 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

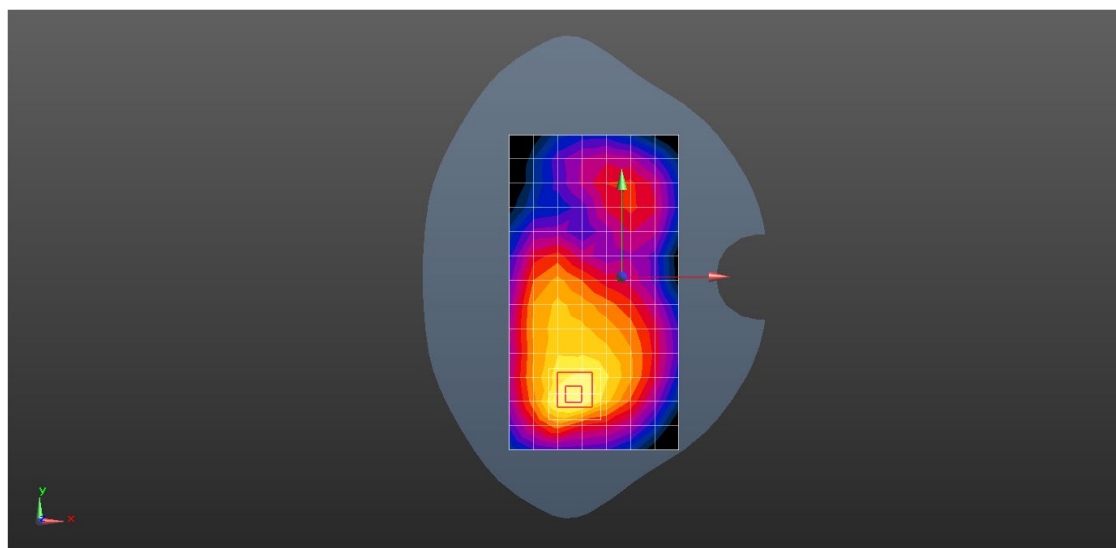

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 7 20M QPSK 1RB50 21350CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2560$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 37.962$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.31, 7.23, 7.33); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.71 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.383 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.4 W/kg; SAR(10 g) = 0.679 W/kg

Maximum value of SAR (measured) = 2.21 W/kg

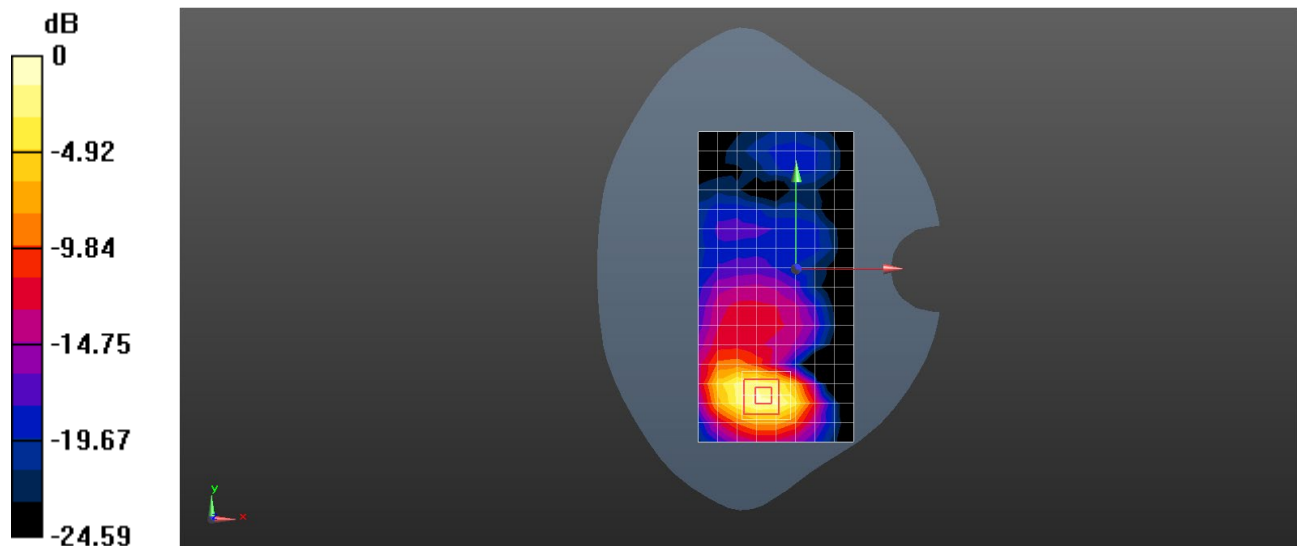

0 dB = 2.21 W/kg = 3.44 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 5 10M QPSK 1RB25 20600CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 41.718$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.3, 9.34, 9.27); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.314 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.83 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.227 W/kg ; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

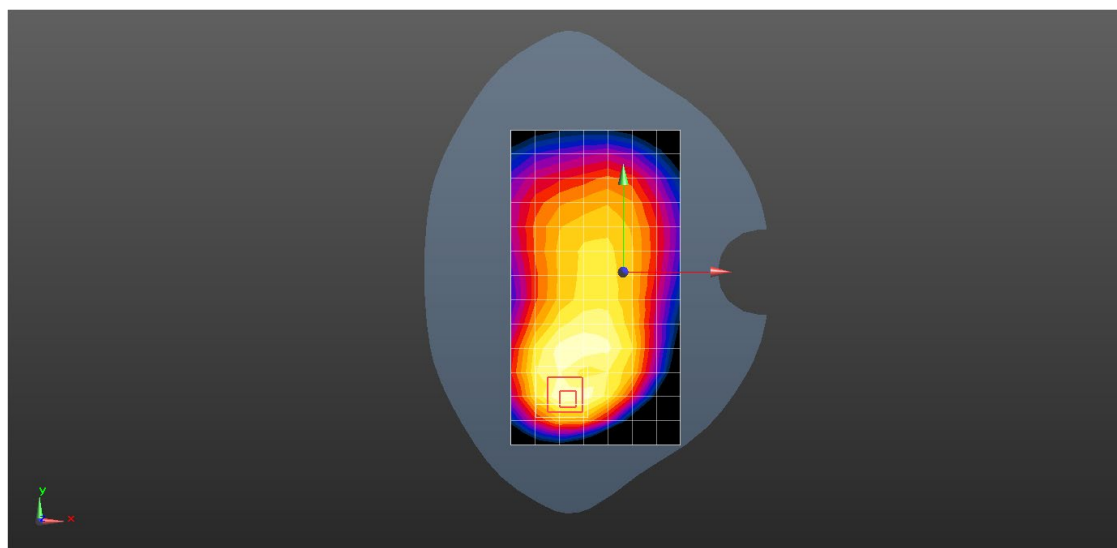

$0 \text{ dB} = 0.312 \text{ W/kg} = -5.06 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 38 20M QPSK 1RB50 38000CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016

Medium: HSL2600;Medium parameters used: $f = 2595$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 40.22$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.31, 7.23, 7.33); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.54 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.195 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.34 W/kg; SAR(10 g) = 0.633 W/kg

Maximum value of SAR (measured) = 2.16 W/kg

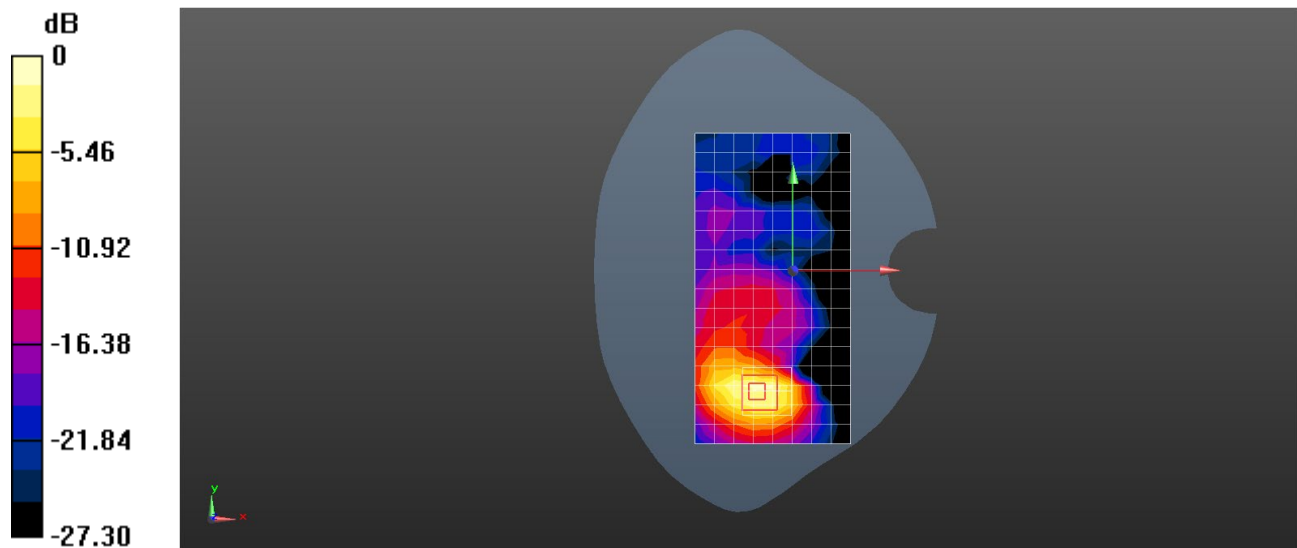

0 dB = 2.16 W/kg = 3.34 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 40a 10M QPSK 1RB0 38750CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-TDD BW 10MHz (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.699$ S/m; $\epsilon_r = 38.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.56, 7.47, 7.57); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.456 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.586 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

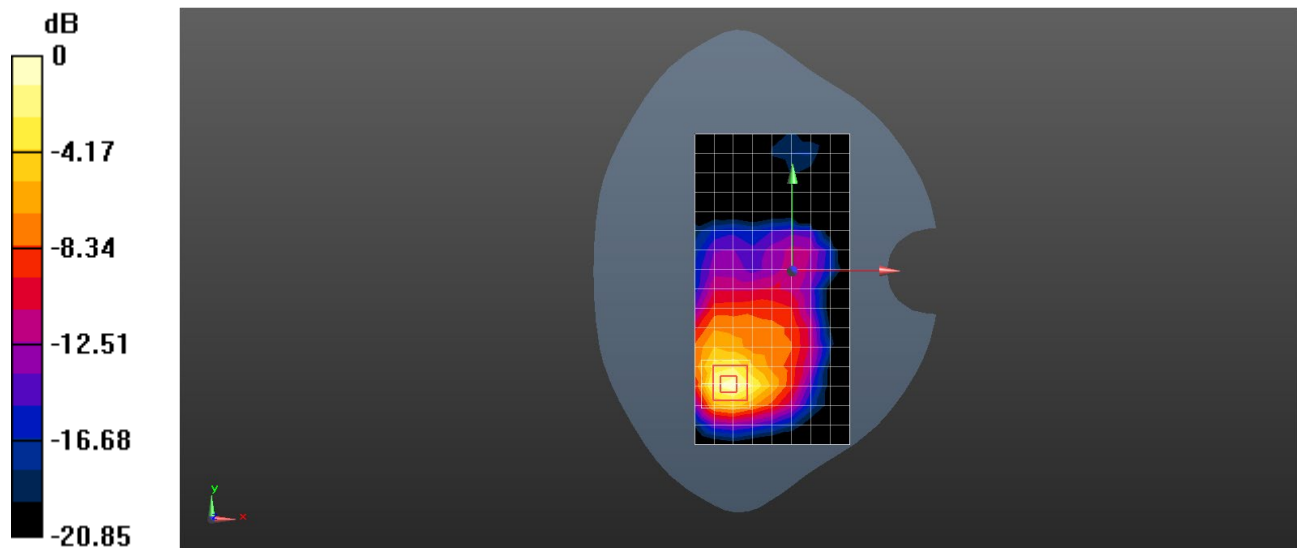

0 dB = 0.493 W/kg = -3.07 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 40b 10M QPSK 1RB25 39200CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-TDD BW 10MHz (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58016

Medium: HSL2300;Medium parameters used: $f = 2355$ MHz; $\sigma = 1.729$ S/m; $\epsilon_r = 38.576$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.56, 7.47, 7.57); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.488 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.605 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.575 W/kg

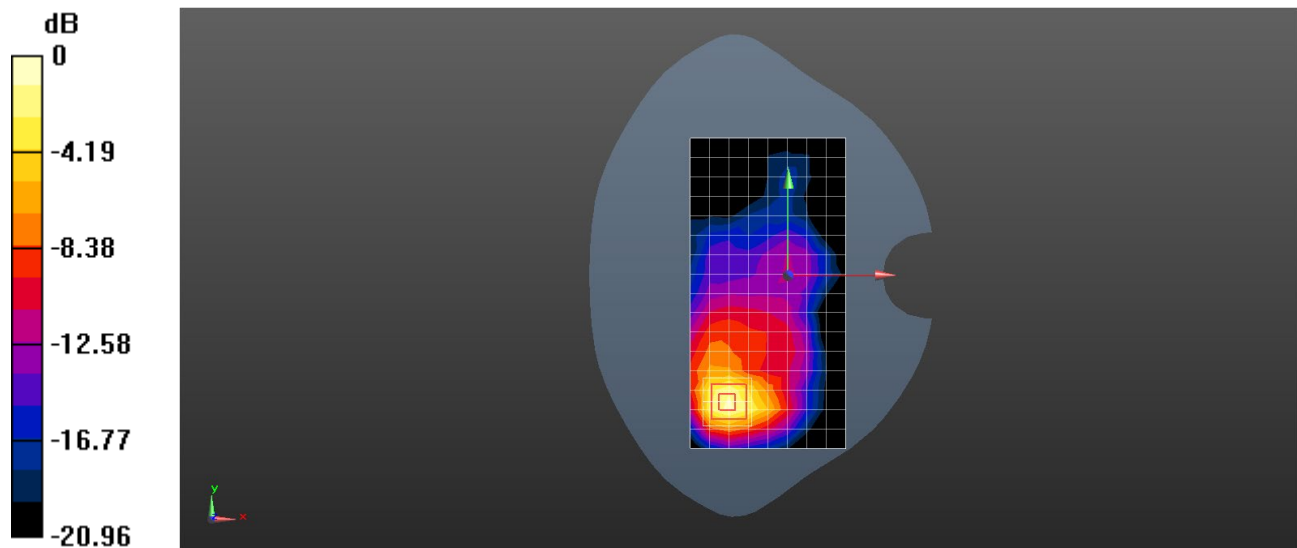

0 dB = 0.575 W/kg = -2.40 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE LTE Band 41 20M QPSK 1RB50 40185CH Back side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used (interpolated): $f = 2549.5$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 38.002$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.31, 7.23, 7.33); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.39 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.644 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.505 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

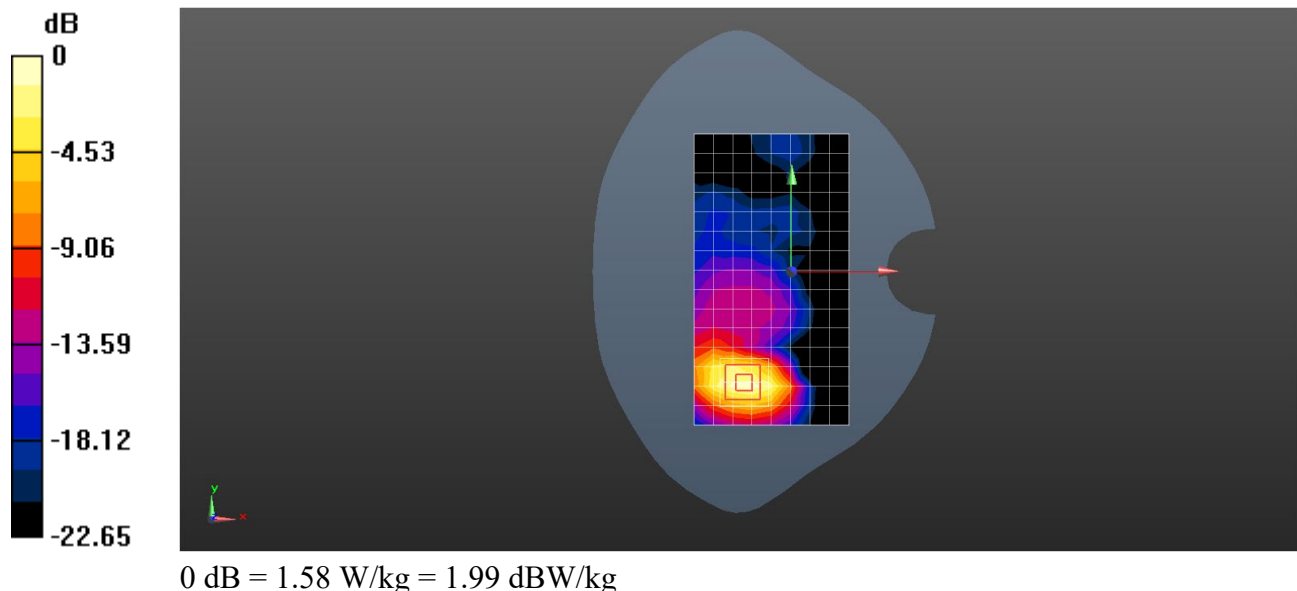

Test Laboratory: SGS-SAR Lab

A99 LITE WIFI 2.4G 802.11b 11CH Right side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 39.821$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.4, 7.32, 7.42); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0631 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.896 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0613 W/kg

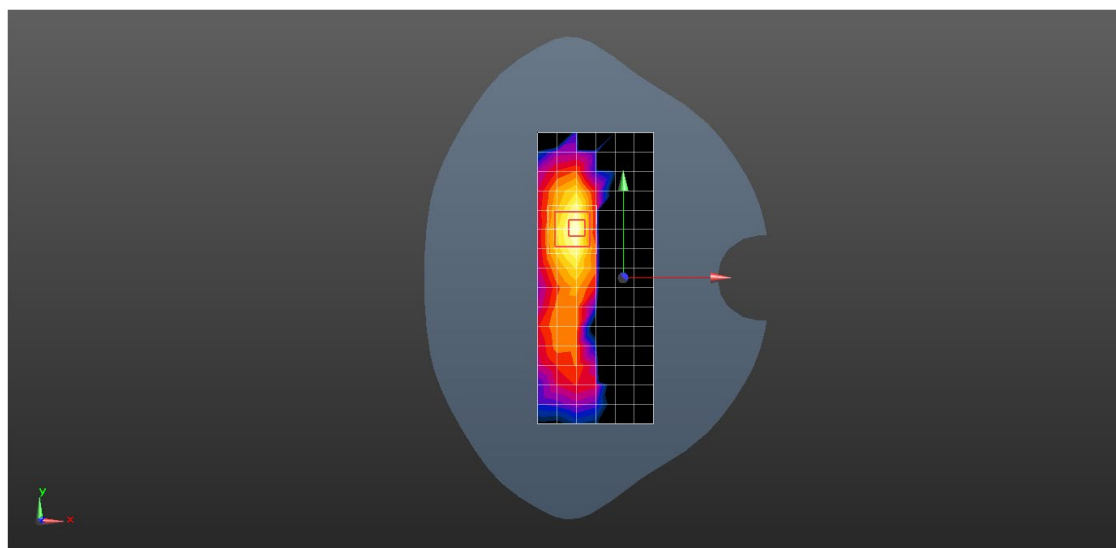

0 dB = 0.0613 W/kg = -12.13 dBW/kg

Test Laboratory: SGS-SAR Lab

A99 LITE WIFI 5G 802.11a 149CH Right side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.353 \text{ S/m}$; $\epsilon_r = 34.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(5.07, 4.88, 5.02); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x24x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.482 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.393 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.961 W/kg

SAR(1 g) = 0.226 W/kg ; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

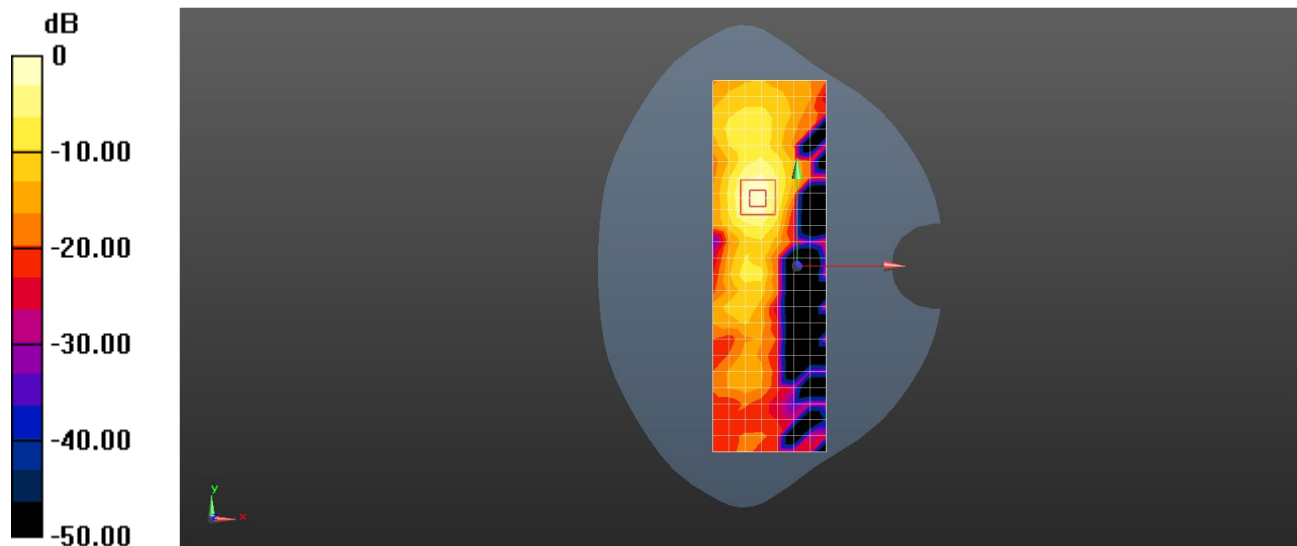

$0 \text{ dB} = 0.529 \text{ W/kg} = -2.77 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

A99 LITE Bluetooth DH5 39CH Right side 10mm

DUT: A99 LITE; Type: portable device ; Serial: 00074000031

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 39.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.4, 7.32, 7.42); Calibrated: 2023/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024/4/16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0232 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5980 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00676 W/kg

Maximum value of SAR (measured) = 0.0322 W/kg

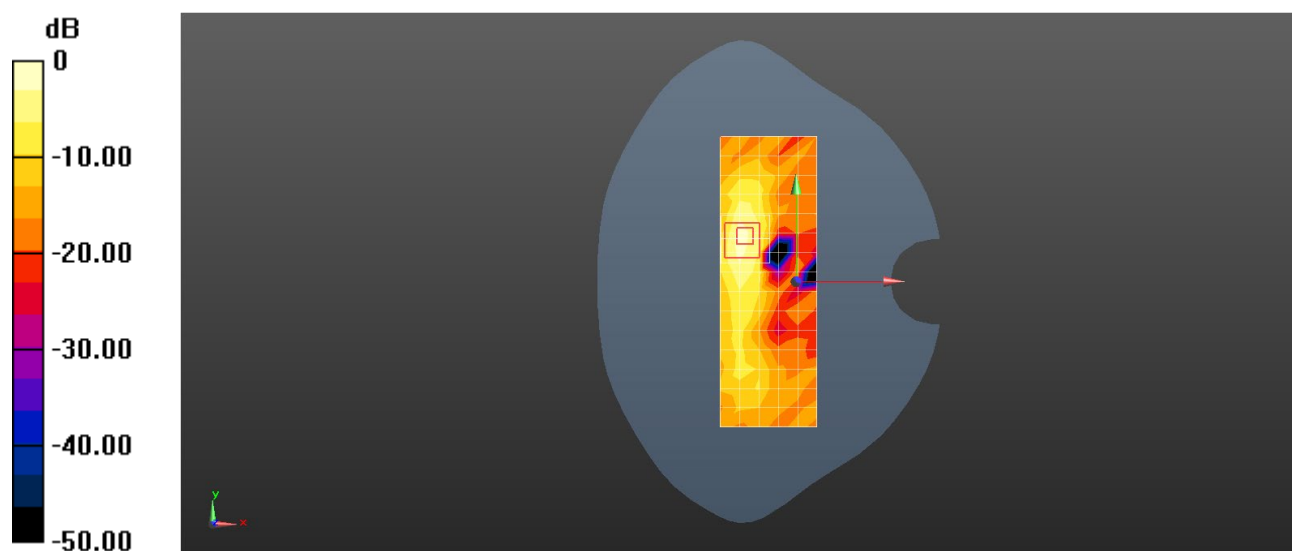

0 dB = 0.0322 W/kg = -14.92 dBW/kg