



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 Part 15 Subpart C 15.247 (FHSS)
ISED RSS-247

Report No.: ITRO77-U4 Rev B

Company: Itron, Inc.

Model Name: eNIC 551-0121-05



REGULATORY COMPLIANCE TEST REPORT

Company Name: Itron, Inc.

Model Name: eNIC 551-0121-05

To: FCC CFR 47 Part 15 Subpart C 15.247 (FHSS) & ISED RSS-247

Test Report Serial No.: ITRO77-U4 Rev B

This report supersedes: ITRO77-U4 Rev A

Applicant: Itron, Inc.
230 W Tasman Drive
San Jose, California 95134
USA

Issue Date: 24th March 2025

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION.....	5
1.1. TESTING ACCREDITATION	5
1.2. RECOGNITION.....	6
1.3. PRODUCT CERTIFICATION.....	7
2. DOCUMENT HISTORY.....	8
3. TEST RESULT CERTIFICATE.....	9
4. REFERENCES AND MEASUREMENT UNCERTAINTY.....	10
4.1. Normative References	10
4.2. Test and Uncertainty Procedure	11
5. PRODUCT DETAILS AND TEST CONFIGURATIONS.....	12
5.1. Technical Details.....	12
5.2. Scope Of Test Program	13
5.3. Equipment Model(s) and Serial Number(s).....	14
5.4. Antenna Details.....	14
5.5. Cabling and I/O Ports.....	14
5.6. Test Configurations	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard.....	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S).....	16
7.1.1. Radiated Test Setup.....	16
7.1.2. Conducted Test Setup.....	19
8. MEASUREMENT AND PRESENTATION OF TEST DATA.....	21
9. TEST RESULTS.....	22
9.1. 20 dB & 99% Bandwidth	22
9.2. Frequency Hopping Tests	28
9.2.1. Number of Hopping Channels	29
9.2.2. Channel Separation	34
9.2.3. Channel Occupancy & Dwell Time	39
9.3. Output Power	44
9.4. Emissions	51
9.4.1. Conducted Emissions	51
9.4.1.1. Conducted Unwanted Spurious Emissions.....	52
9.4.1.2. Conducted Band-Edge Emissions	57
9.4.1.3. AC Wireline Emissions.....	77
9.4.2. Radiated Emissions	78
9.4.2.4. TX Spurious & Restricted Band Emissions.....	80
A. APPENDIX - GRAPHICAL IMAGES	87
A.1. 20 dB & 99% Bandwidth	88
A.2. Frequency Hopping Tests.....	103
A.2.1. Number of Hopping Channels	103
A.2.2. Channel Separation	118
A.2.3. Dwell Time.....	123
A.2.4. Channel Occupancy	128
A.3. Emissions.....	133
A.3.1. Conducted Emissions	133
A.3.1.1. Conducted Unwanted Spurious Emissions	133
A.3.1.2. Conducted Band-Edge Emissions	148
10. Test Setup Photographs	168
10.1.1. Test Setup - RE#1 - Radiated Emissions - 3m Chamber.....	168

10.1.2. Test Setup - RF#1 - Conducted	169
10.1.3. Test Setup - CE#1 – AC Wireline Emissions	170

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 28th day of February 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2025



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

1.2. RECOGNITION

MiCOM Labs, Inc. is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MiCOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 Requirements for bodies certifying products, processes and services. This product certification body also meets the A2LA R322 – Specific Requirements – Notified Body Accreditation Requirements and A2LA R308 – Specific Requirements - ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.

Presented this 28th day of February 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2025



For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	25 th November 2024	Draft report for comment
Rev A	10 th December 2024	Initial Release
Rev B	24 th March 2025	Included AC wireline results

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Itron, Inc. 230 W Tasman Drive San Jose, California 56093 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: eNIC 551-0121-05	Telephone: +1 925 462 0304
Type Of Equipment: Plug in radio device, mesh network.	Fax: +1 925 462 0306
S/N's: 0013500900150B5E, 0013500900150B46	
Test Date(s): 13 th -14 th November 2024 18 th November 2024, 24 th March 2025	Website: www.micomlabs.com


STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C 15.247 (FHSS) ISED RSS-247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

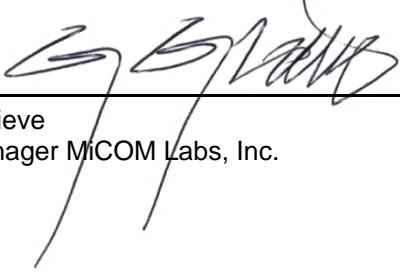
 Graeme Grieve
 Quality Manager MiCOM Labs, Inc.




 Gordon Hurst
 President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
II	A2LA	16th April 2024	R105 - Requirements When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014 + 2017 Amendment	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	FCC 47 CFR Part 15, Subpart B	Nov 2017	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
VII	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	FCC Public Notice DA 00-705	Mar 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
IX	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
X	UKAS M3003	Edition 6 March 2024	The Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 3	Aug 2023	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XIII	FCC 47 CFR Part 2.1033	Feb 2023	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	UKAS LAB 12	Edition 4 April 2022	The Expression of Uncertainty in Testing

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Itron, Inc. eNIC 551-0121-05 to FCC CFR 47 Part 15 Subpart C 15.247 (FHSS).& ISED RSS-247
Applicant:	ITron, Inc. 230 W Tasman Drive San Jose California 95134 United States of America
Manufacturer:	ITron, Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ITRO77-U4
Date EUT received:	6 th November 2024
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 (FHSS) ISED RSS-247
Dates of test (from - to):	13 th -14 th November 2024, 18 th November 2024, 24 th March 2025
No of Units Tested:	1
Product Family Name:	eNIC 550
Model(s):	eNIC 551-0121-05 (GPS included), 551-0101 (no GPS included)
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	902 - 928 MHz;
Type of Modulation:	FSK, GFSK
EUT Modes of Operation:	FHSS (Frequency Hopping Spread Spectrum)
Declared Nominal Output Power:	902 - 928 MHz: 30 dBm
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	4.0VDCdc, 1.0A
Operating Temperature Range:	-40°C to +85°C
ITU Emission Designator:	FSK 168KF1D GFSK 317KF1D
Equipment Dimensions:	Width: 2.75, Height 0.75"
Weight:	50g
Hardware Rev:	174-1620-00
Software Rev:	5.6.4

5.2. Scope Of Test Program

Itron, Inc. eNIC 551-0121-05

The scope of the test program was to test the Itron, Inc. eNIC 551-0121-05, eNIC 551-0121-05 configurations in the frequency ranges 902 - 928 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 (FHSS)

Radio Frequency Devices; Subpart C – Intentional Radiators

ISED RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/ Support)	Equipment Description	Manufacturer	Model No.	Serial No.
EUT	Plug in radio device, mesh network.	ITron, Inc	eNIC 551-0121-05	0013500900150B5E, 0013500900150B46
Support	Laptop	Lenovo	--	--

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	World Products	WPANT10155-S1C	OMNI	1.0	-	360	-	902 - 928

BF Gain - Beamforming Gain
 Dir BW - Directional BeamWidth
 X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

** NONE **

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
902 - 928 MHz				
FSK 300kHz	100	902.30	915.20	926.90
FSK 400kHz	150	902.40	915.20	927.60
GFSK 300kHz	150	902.30	915.20	926.90
GFSK 300kHz	200	902.30	915.20	926.90
GFSK 400kHz	300	902.40	915.20	927.60

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	View Data
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	View Data
Channel Separation	Complies	View Data
Dwell Time	Complies	View Data
Channel Occupancy	Complies	View Data
Output Power	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(iii) AC Wireline Emissions	Complies	View Data
(2) Radiated Emissions	Complies	View Data

7. TEST EQUIPMENT CONFIGURATION(S)


7.1.1. Radiated Test Setup

Test Setup for Radiated Emissions for above and below 1 GHz

Radiated Emissions Below 1GHz Test Setup

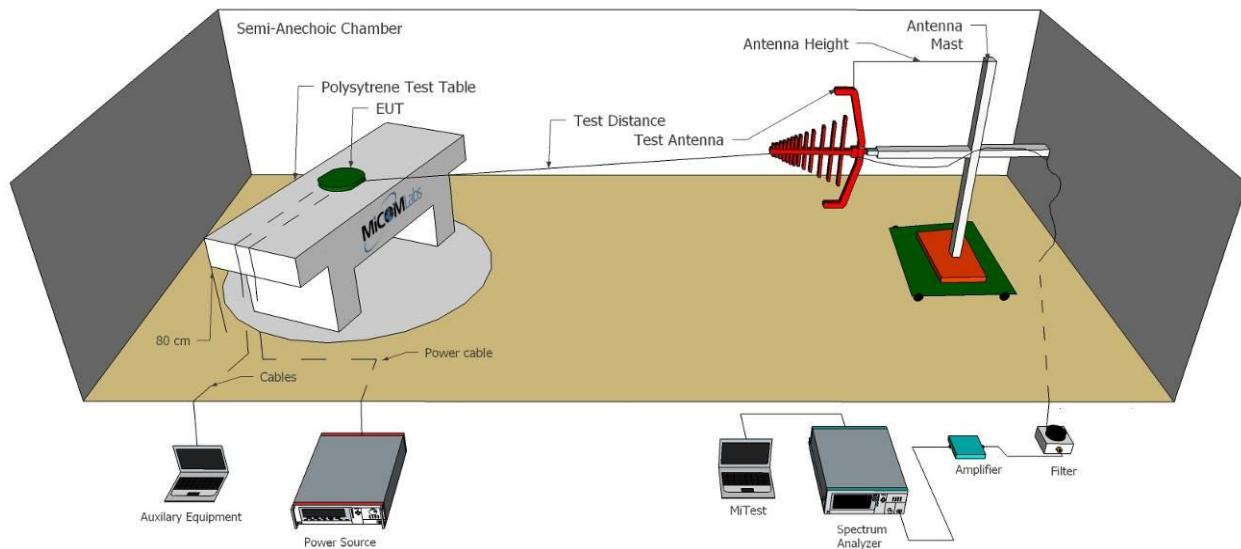

Radiated Emissions Above 1GHz Test Setup

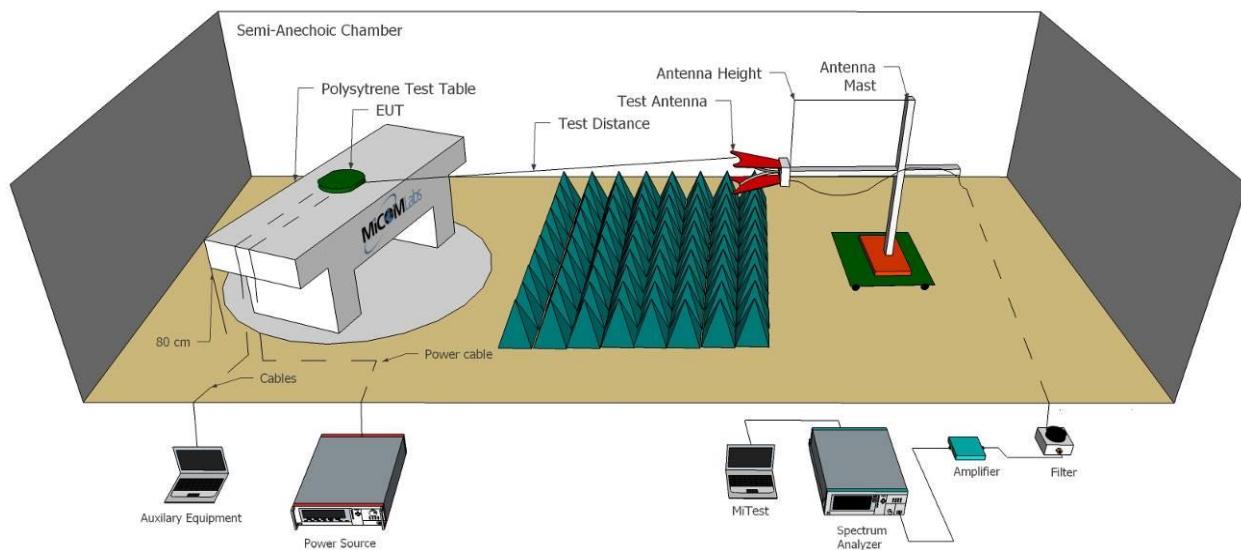


Test Equipment Utilized

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2025
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	20 Jul 2025
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Dec 2025
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	13 Apr 2025
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	13 Apr 2025
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2025
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	13 Apr 2025
382	Tunable Notch Filter	Wainwright Instruments GmbH	WRCT800/960-0.2/40-8EEK	64	Cal when used
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 May 2025
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	7 Dec 2025
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Apr 2025
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	18 Apr 2025
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	18 Apr 2025
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	16 Apr 2025

465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	14 Apr 2025
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	18 Apr 2025
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	18 Apr 2025
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	18 Apr 2025
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
578	DC Power Supply 0 - 60 V, 0 - 15 A	HP	6274B	2537A-08192	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	20 Jul 2025

7.1.2. Conducted Test Setup

MiTest Automated Test System

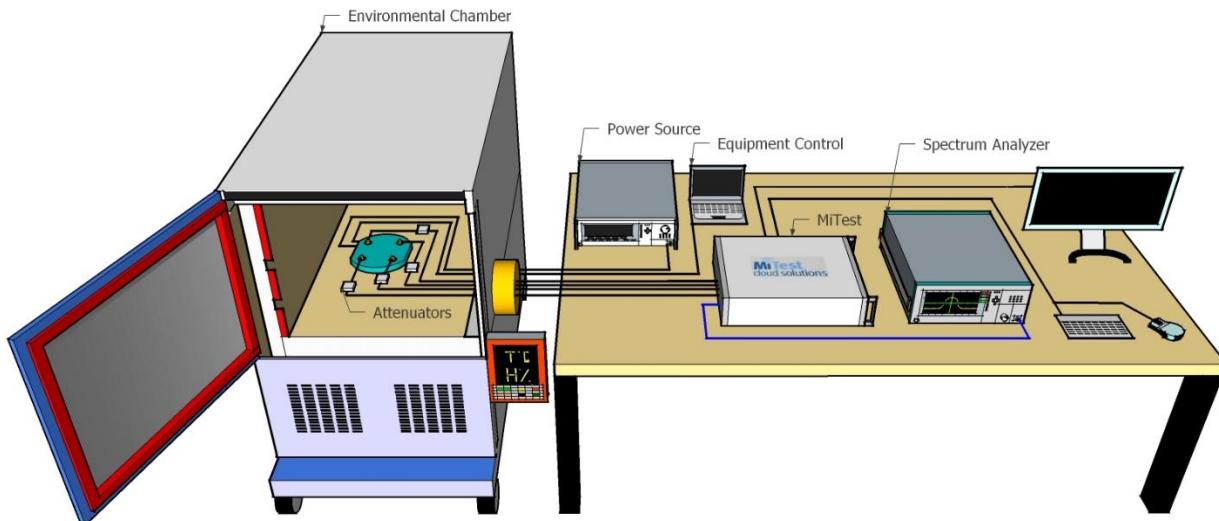

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	11 Jul 2025
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	11 Jul 2025
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	11 Jul 2025
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	11 Jul 2025
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	11 Jul 2025
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	22 Mar 2026
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2025
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2025
382	Tunable Notch Filter	Wainwright Instruments GmbH	WRCT800/960-0.2/40-8EEK	64	Cal when used
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required

441	USB Wideband Power Sensor	Boonton	55006	9179	4 Dec 2025
442	USB Wideband Power Sensor	Boonton	55006	9181	12 Dec 2025
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2025
493	USB Wideband Power Sensor	Boonton	55006	9634	8 Oct 2025
494	USB Wideband Power Sensor	Boonton	55006	9726	12 Dec 2025
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen	512	11 Jul 2025
516	USB Wideband Power Sensor	Boonton	RTP5006	10511	4 Dec 2025
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
592	Harmonic Mixer, 140 GHz to 220 GHz	Radiometer Physics	RPG FS-Z220	101105	7 Jun 2026
593	Harmonic Mixer, 90 GHz to 140 GHz	Radiometer Physics	RPG FS-Z140	101197	2 Aug 2026
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Nov 2025

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	20 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	300kHz	Duty Cycle (%):	99
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			kHz	MHz
902.3	0.204	--	--	--	0.204	0.204	≤ 500	-0.296
915.2	0.205	--	--	--	0.205	0.205	≤ 500	-0.295
926.9	0.205	--	--	--	0.205	0.205	≤ 500	-0.295

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.3	0.175	--	--	--	0.175		
915.2	0.175	--	--	--	0.175		
926.9	0.175	--	--	--	0.175		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	400kHz	Duty Cycle (%):	99
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			kHz	MHz
902.4	0.210	--	--	--	0.210	0.210	≤ 500	-0.29
915.6	0.210	--	--	--	0.210	0.210	≤ 500	-0.29
927.6	0.210	--	--	--	0.210	0.210	≤ 500	-0.29

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.4	0.200	--	--	--	0.200		
915.6	0.202	--	--	--	0.202		
927.6	0.202	--	--	--	0.202		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	300kHz	Duty Cycle (%):	99
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			kHz	MHz
902.3	0.194	--	--	--	0.194	0.194	≤ 500	-0.306
915.2	0.196	--	--	--	0.196	0.196	≤ 500	-0.304
926.9	0.194	--	--	--	0.194	0.194	≤ 500	-0.306

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.3	0.168	--	--	--	0.168		
915.2	0.168	--	--	--	0.168		
926.9	0.168	--	--	--	0.168		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	300kHz	Duty Cycle (%):	99
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			kHz	MHz
902.3	0.253	--	--	--	0.253	0.253	≤ 500	-0.247
915.2	0.252	--	--	--	0.252	0.252	≤ 500	-0.248
926.9	0.252	--	--	--	0.252	0.252	≤ 500	-0.248

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.3	0.216	--	--	--	0.216		
915.2	0.216	--	--	--	0.216		
926.9	0.216	--	--	--	0.216		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	400kHz	Duty Cycle (%):	99
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			kHz	MHz
902.4	0.375	--	--	--	0.375	0.375	≤ 500	-0.125
915.6	0.377	--	--	--	0.377	0.377	≤ 500	-0.123
927.6	0.375	--	--	--	0.375	0.375	≤ 500	-0.125

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
902.4	0.317	--	--	--	0.317		
915.6	0.317	--	--	--	0.317		
927.6	0.317	--	--	--	0.317		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Frequency Hopping Tests	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References, FCC Public Notice DA 00-705		

Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

9.2.1. Number of Hopping Channels

Equipment Configuration for Number of Hopping Channels			
Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results			
Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	26	--	--
910.0-920.0	33	--	--
920.0-928.0	23	--	--
Total number of Hops	82	50	Pass

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	20	--	--
910.0-920.0	24	--	--
920.0-928.0	19	--	--
Total number of Hops	63	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<u>26</u>	--	--
910.0-920.0	<u>32</u>	--	--
920.0-928.0	<u>24</u>	--	--
Total number of Hops	82	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<u>26</u>	--	--
910.0-920.0	<u>32</u>	--	--
920.0-928.0	<u>24</u>	--	--
Total number of Hops	82	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	<u>20</u>	--	--
910.0-920.0	<u>24</u>	--	--
920.0-928.0	<u>19</u>	--	--
Total number of Hops	63	25	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2.2. Channel Separation

Equipment Configuration for Channel Separation

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.2	0.300	0.025	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Separation

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.6	0.400	0.210	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Separation

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.2	0.300	0.194	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Separation

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.2	0.300	0.252	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Separation

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	99.0	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.6	0.400	0.375	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2.3. Channel Occupancy & Dwell Time

Equipment Configuration for Channel Occupancy

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.20	0.001	5.610	20.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Occupancy

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.60	0.012	61.320	20.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Occupancy

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.20	0.012	48.100	20.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Occupancy

Variant:	300kHz	Antenna:	Not Applicable
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.20	0.013	52.910	10.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Channel Occupancy

Variant:	400kHz	Antenna:	Not Applicable
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency(MHz)	Dwell Time (Single Burst) (S)	Channel Occupancy (mS)	Observation Period (S)	Channel Occupancy Limit (mS)	Pass / Fail
915.60	0.009	27.660	10.00	400.000	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.3. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1), (b)(1)/(2)/(3)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.
Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power $[10^{\log 10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are



Title: Itron, Inc. eNIC 551-0121-05
To: FCC 15.247 & ISED RSS-247
Serial #: ITRO77-U4 Rev B

possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Equipment Configuration for Output Power Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.3	29.40	--	--	--	29.40	30.00	-0.60	Max
915.2	29.10	--	--	--	29.10	30.00	-0.90	Max
926.9	29.48	--	--	--	29.48	30.00	-0.52	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Output Power Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.4	28.98	--	--	--	28.98	30.00	-1.02	Max
915.6	29.12	--	--	--	29.12	30.00	-0.88	Max
927.6	29.30	--	--	--	29.30	30.00	-0.70	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Output Power Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.3	28.94	--	--	--	28.94	30.00	-1.06	Max
915.2	29.25	--	--	--	29.25	30.00	-0.75	Max
926.9	29.35	--	--	--	29.35	30.00	-0.65	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Output Power Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.3	28.99	--	--	--	28.99	30.00	-1.01	Max
915.2	29.20	--	--	--	29.20	30.00	-0.80	Max
926.9	29.37	--	--	--	29.37	30.00	-0.63	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Output Power Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	1.00
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
902.4	29.03	--	--	--	29.03	30.00	-0.97	Max
915.6	29.18	--	--	--	29.18	30.00	-0.82	Max
927.6	29.35	--	--	--	29.35	30.00	-0.65	Max

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.4. Emissions

9.4.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Transmitter Conducted Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.4.1.1. Conducted Unwanted Spurious Emissions

Equipment Configuration for Unwanted Emissions Peak	
Variant:	300kHz
Data Rate:	100.00 KBit/s
Modulation:	FSK
TPC:	Not Applicable
Engineering Test Notes:	

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.3	30.0 - 18000.0	-31.985	8.54						
915.2	30.0 - 18000.0	-31.615	8.83						
926.9	30.0 - 18000.0	-31.103	8.78						

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	400kHz	Duty Cycle (%):	99
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.4	30.0 - 18000.0	-31.949	8.25						
915.6	30.0 - 18000.0	-30.723	8.67						
927.6	30.0 - 18000.0	-31.707	8.31						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	300kHz	Duty Cycle (%):	99
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.3	30.0 - 18000.0	-31.971	8.00						
915.2	30.0 - 18000.0	-31.632	8.66						
926.9	30.0 - 18000.0	-31.160	8.63						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	300kHz	Duty Cycle (%):	99
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.3	30.0 - 18000.0	-31.540	8.51						
915.2	30.0 - 18000.0	-32.207	8.94						
926.9	30.0 - 18000.0	-31.621	8.97						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	400kHz	Duty Cycle (%):	99
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
902.4	30.0 - 18000.0	-32.049	7.81						
915.6	30.0 - 18000.0	-32.219	8.53						
927.6	30.0 - 18000.0	-32.238	8.34						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak	
--	--

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results	
Channel Frequency:	902.3 MHz

Band-Edge Frequency:	902.0 MHz						
Test Frequency Range:	875.0 - 905.0 MHz						
		Band-Edge Markers and Limit		Revised Limit		Margin	
Port(s)		M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-5.74	9.07	902.10				-0.100

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-9.20	8.99	902.20		-0.200

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.3 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	<u>-4.48</u>	9.07	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS	
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB	

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.3 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-3.04	9.08	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	<u>-9.72</u>	9.07	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.3 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-3.97	8.63	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-9.79	8.77	902.20		-0.200

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.3 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-7.16	8.83	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.3 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-4.54	9.08	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	902.4 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-10.12	8.97	902.10		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.97	9.11	927.10		-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-7.74	9.10	927.80		-0.200

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-24.33	9.11	927.10		-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	<u>-25.66</u>	9.32	927.20		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB		

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-1.58	9.14	927.90		-0.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	100.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-31.71	9.08	927.10		-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	FSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-6.23	9.09	927.80		-0.200

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	150.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-27.09	9.21	927.10		-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	300kHz	Duty Cycle (%):	99.0
Data Rate:	200.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.9 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-21.80	9.22	927.10		-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	400kHz	Duty Cycle (%):	99.0
Data Rate:	300.00 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	927.6 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-4.69	9.17	927.90		-0.100


Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.3. AC Wireline Emissions

Model:	eNIC 551-0101	Configuration tested:	120V _{AC} 60 Hz AC/DC
Input power:	120V _{AC} 60Hz	Standard:	FCC Part 15B (Class B)

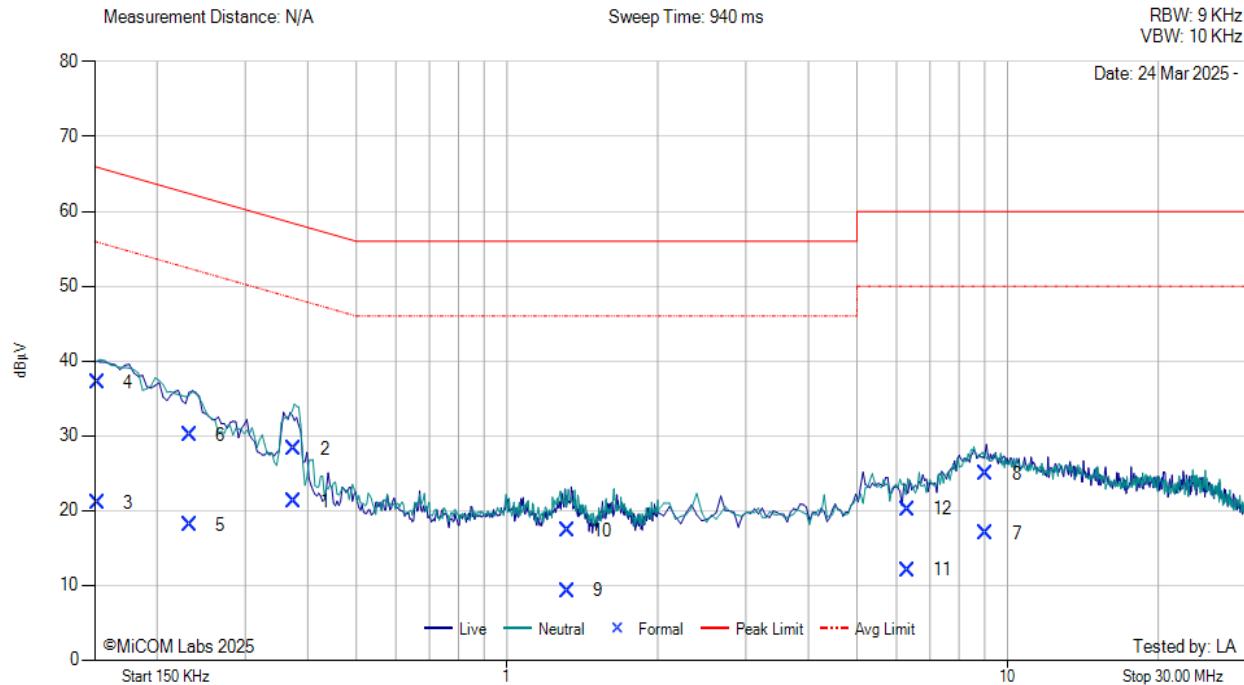

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	Factor dB	Total Correction dB μ V	Corrected Value dB μ V	Measurement Type	Line	Limit dB μ V/m	Margin dB	Pass /Fail
1	0.376	11.26	-0.05	10.01	9.96	21.22	Max Avg	Neutral	49.5	-28.3	Pass
2	0.376	18.28	-0.05	10.01	9.96	28.24	Max Qp	Neutral	59.5	-31.3	Pass
3	0.152	11.01	-0.03	10.00	9.97	20.98	Max Avg	Neutral	55.9	-35.0	Pass
4	0.152	27.20	-0.03	10.00	9.97	37.17	Max Qp	Neutral	65.9	-28.8	Pass
5	0.233	8.09	-0.04	10.00	9.96	18.05	Max Avg	Live	53.6	-35.6	Pass
6	0.233	20.13	-0.04	10.00	9.96	30.09	Max Qp	Live	63.6	-33.5	Pass
7	9.058	6.79	-0.20	10.33	10.13	16.92	Max Avg	Live	50.0	-33.1	Pass
8	9.058	14.82	-0.20	10.33	10.13	24.95	Max Qp	Live	60.0	-35.1	Pass
9	1.319	-0.64	-0.09	10.03	9.95	9.30	Max Avg	Live	46.0	-36.7	Pass
10	1.319	7.32	-0.09	10.03	9.95	17.27	Max Qp	Live	56.0	-38.7	Pass
11	6.326	1.98	-0.18	10.25	10.07	12.05	Max Avg	Live	50.0	-38.0	Pass
12	6.326	10.10	-0.18	10.25	10.07	20.17	Max Qp	Live	60.0	-39.8	Pass

Test Notes: 120V_{AC} 60Hz

9.4.2. Radiated Emissions

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).


(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.4. TX Spurious & Restricted Band Emissions

Equipment Configuration for 30 MHz TO 1 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.3	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	SB

Test Measurement Results

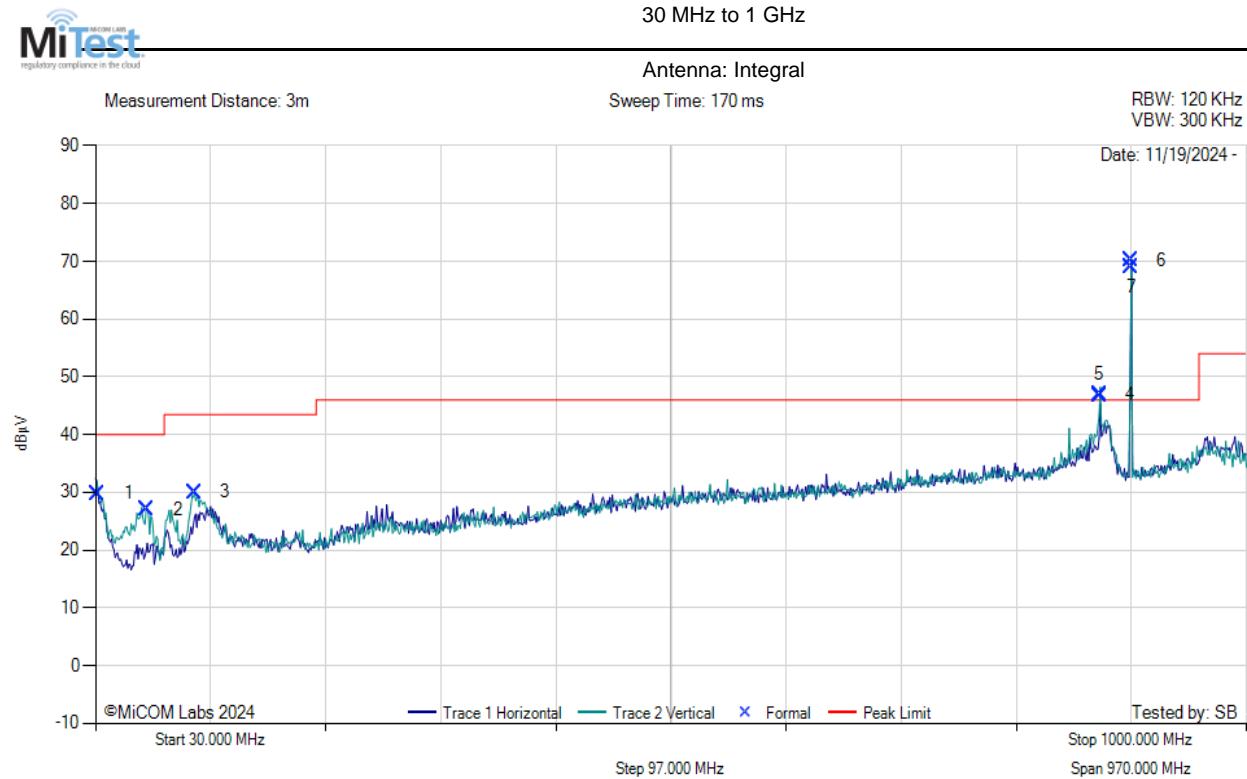

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	31.94	31.12	3.53	-4.85	29.80	MaxP	Vertical	99	149	40.0	-10.2	Pass	
2	73.65	39.99	3.92	-16.81	27.09	MaxP	Vertical	99	89	40.0	-12.9	Pass	
3	113.42	37.28	4.16	-11.44	30.00	MaxP	Vertical	99	269	43.5	-13.5	Pass	
4	876.26	42.20	6.85	-2.20	46.85	NRB	Horizontal	167	29	--	--	Pass	
5	876.28	42.29	6.85	-2.20	46.94	NRB	Vertical	99	63	--	--	Pass	
6	903.00	65.14	6.93	28.70	70.22	Fundamental	Horizontal	199	0	--	--	--	
7	903.00	64.05	6.93	28.70	69.13	Fundamental	Vertical	149	330	--	--	--	




Title: Itron, Inc. eNIC 551-0121-05
To: FCC 15.247 & ISED RSS-247
Serial #: ITRO77-U4 Rev B

Test Notes: 4VDC, 902.3, 100kbps, Max Power

Equipment Configuration for 30 MHz TO 1 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.2	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	300kHz

Test Measurement Results

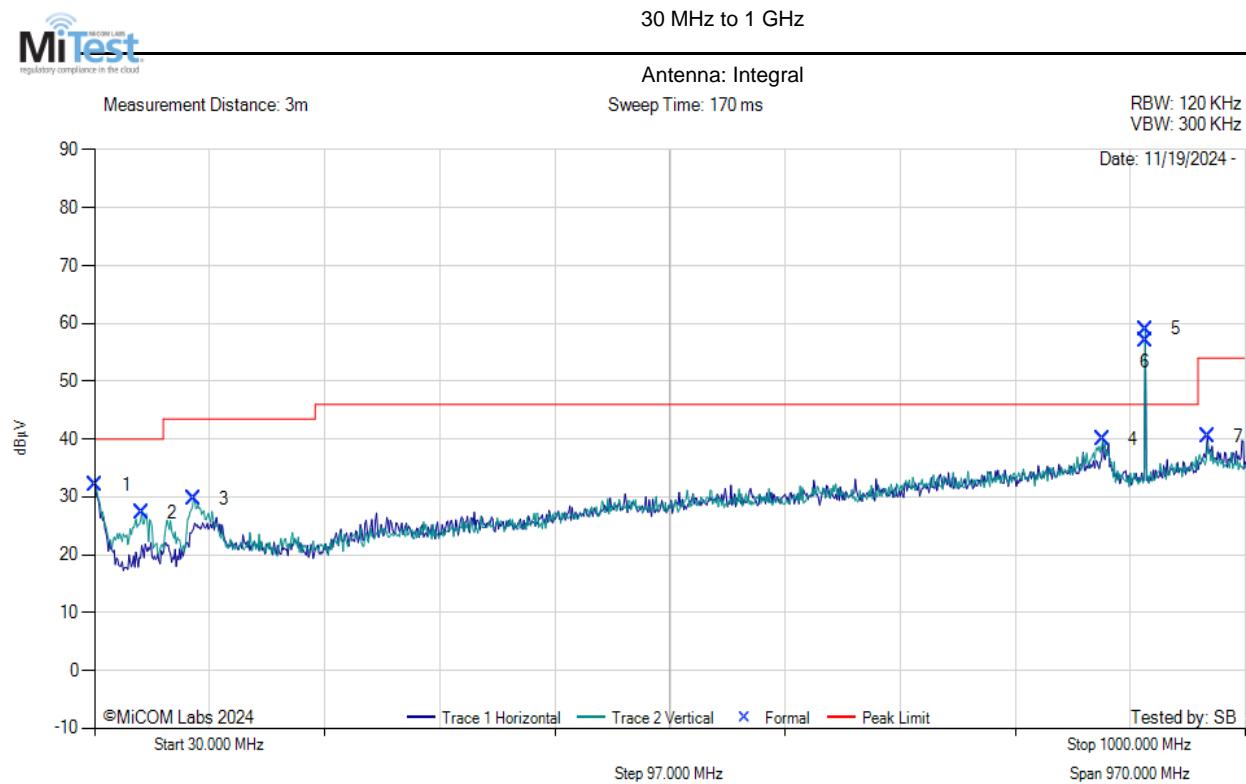


30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	30.97	32.60	3.52	-4.10	32.02	MaxP	Vertical	199	210	40.0	-8.0	Pass	
2	69.77	40.24	3.89	-16.85	27.27	MaxP	Vertical	100	179	40.0	-12.7	Pass	
3	113.42	36.98	4.16	-11.44	29.71	MaxP	Vertical	100	0	43.5	-13.8	Pass	
4	879.72	35.27	6.87	-2.20	39.94	MaxP	Vertical	149	119	46.0	-6.1	Pass	
5	915.61	53.82	6.98	-1.75	59.05	Fundamental	Vertical	199	59	--	--	--	
6	915.61	51.73	6.98	-1.75	56.96	Fundamental	Horizontal	199	120	--	--	--	
7	967.99	34.44	7.15	-1.10	40.49	MaxP	Horizontal	100	30	54.0	-13.5	Pass	

Test Notes: 4VDC, 915.2, 100kbps, Max Power

Equipment Configuration for 30 MHz TO 1 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.9	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	300kHz

Test Measurement Results

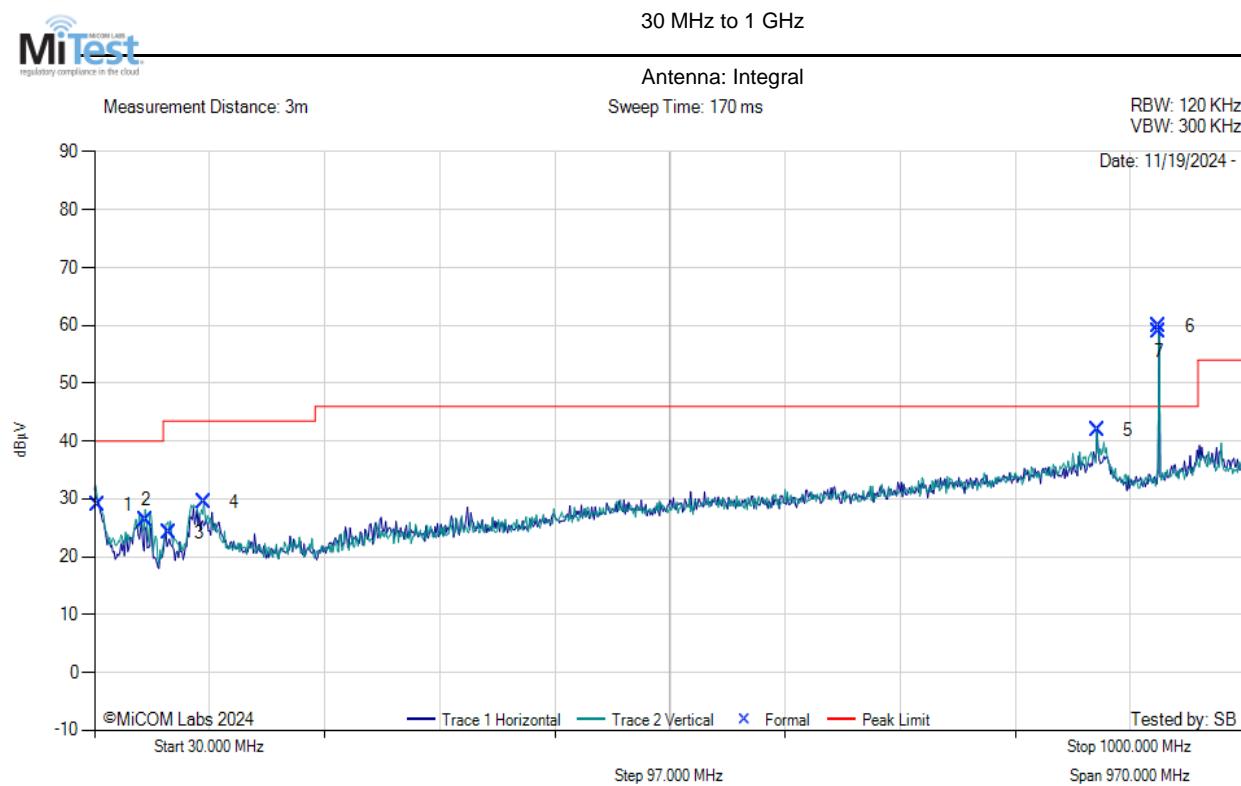


30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	32.91	31.09	3.55	-5.69	28.95	MaxP	Vertical	100	239	40.0	-11.0	Pass	
2	73.65	39.30	3.92	-16.81	26.40	MaxP	Vertical	149	29	40.0	-13.6	Pass	
3	93.05	36.86	4.05	-16.76	24.15	MaxP	Vertical	149	239	43.5	-19.3	Pass	
4	122.15	36.53	4.20	-11.33	29.41	MaxP	Vertical	100	59	43.5	-14.1	Pass	
5	874.87	37.29	6.86	-2.19	41.96	MaxP	Vertical	149	119	46.0	-4.0	Pass	
6	927.25	54.43	7.00	-1.55	59.88	Fundamental	Vertical	100	119	--	--	--	
7	927.25	53.57	7.00	-1.55	59.02	Fundamental	Horizontal	149	329	--	--	--	

Test Notes: 4VDC, 926.9, 100kbps, Max Power

Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	902.3	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	300kHz

Test Measurement Results

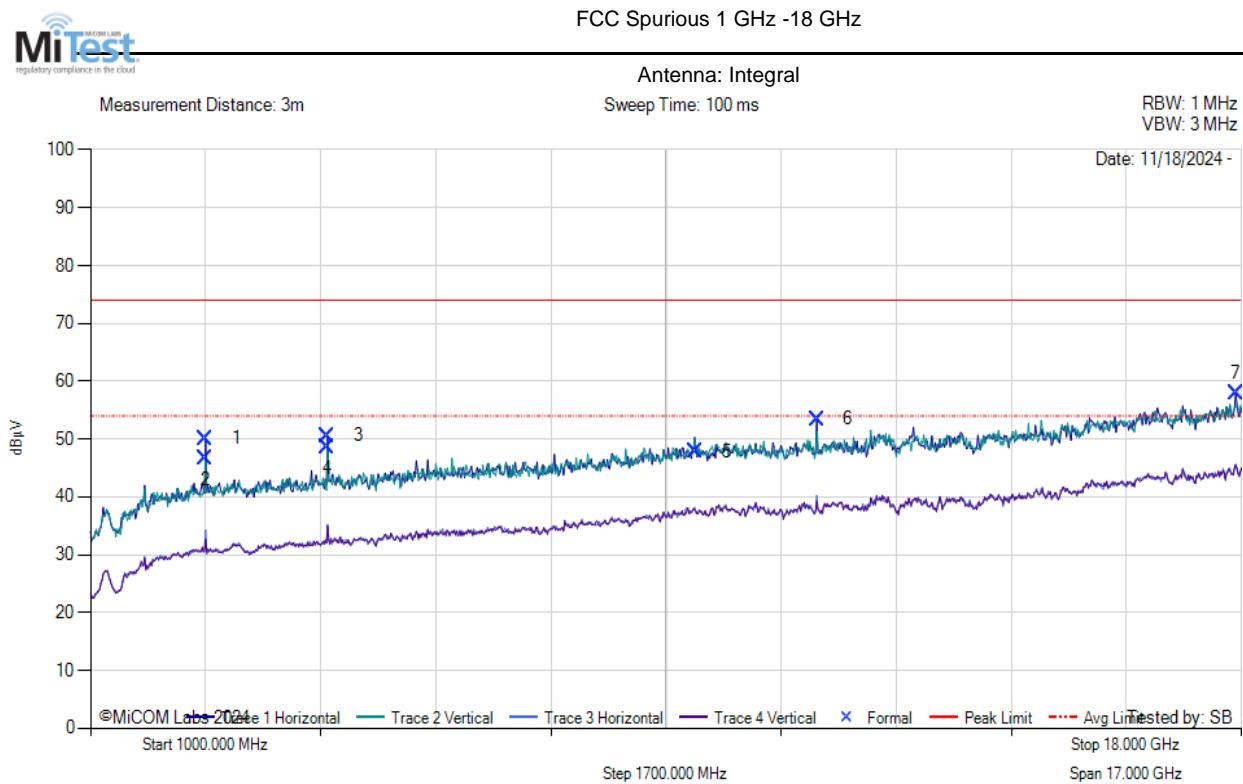

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	2700.00	59.78	2.06	32.43	50.09	MaxP	Horizontal	149	150	74.0	-23.9	Pass	
2	2700.00	56.31	2.06	32.43	46.62	MaxP	Vertical	149	29	74.0	-27.4	Pass	
3	4502.00	60.00	2.76	33.90	50.56	MaxP	Horizontal	199	90	74.0	-23.4	Pass	
4	4502.00	57.97	2.76	33.90	48.54	MaxP	Vertical	199	269	74.0	-25.5	Pass	
5	9942.00	49.18	4.34	37.29	47.85	MaxP	Vertical	149	119	74.0	-26.2	Pass	
6	11727.00	54.87	5.04	38.56	53.46	MaxP	Horizontal	149	90	74.0	-20.5	Pass	
7	17915.00	49.90	6.67	41.55	57.85	MaxP	Horizontal	199	30	74.0	-16.1	Pass	

Test Notes: 4VDC, 902.3, 100kbps, Max Power


Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.2	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	300kHz

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

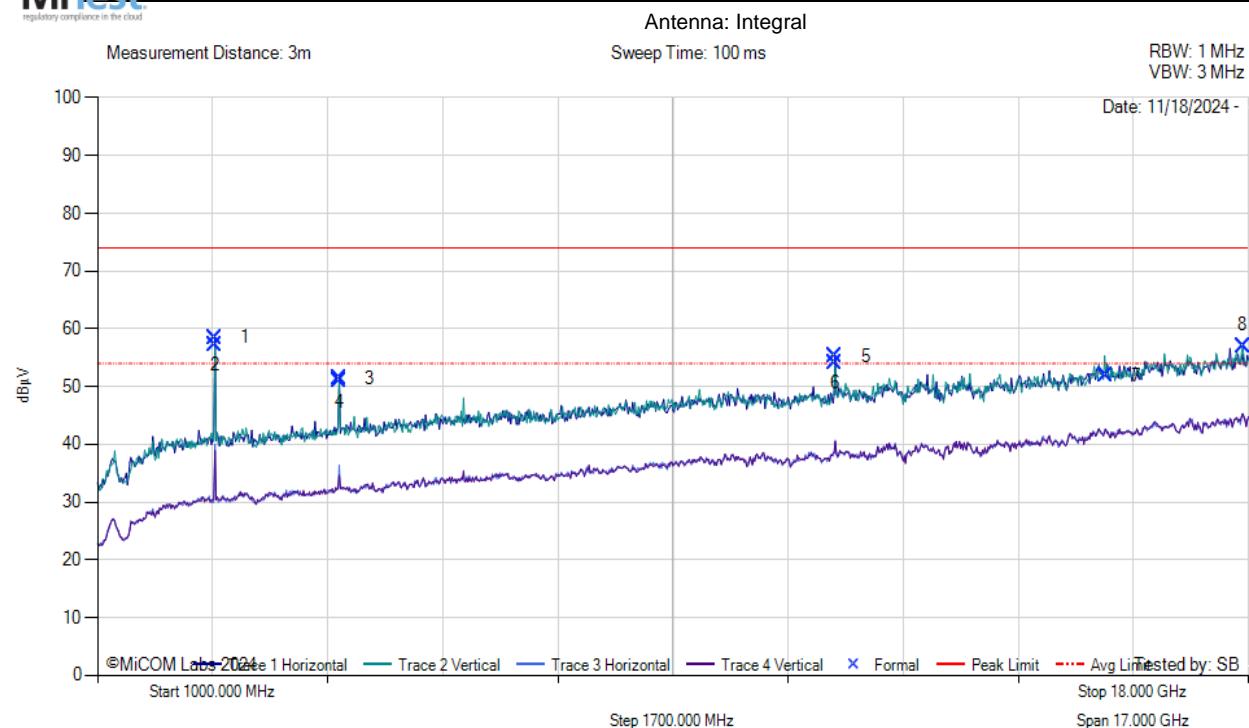


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2734.00	68.12	2.11	32.44	58.48	MaxP	Horizontal	149	240	74.0	-15.5	Pass
2	2734.00	66.91	2.11	32.44	57.28	MaxP	Vertical	149	149	74.0	-16.7	Pass
3	4570.00	60.94	2.80	33.97	51.47	MaxP	Horizontal	199	90	74.0	-22.5	Pass
4	4570.00	60.39	2.80	33.97	50.92	MaxP	Vertical	149	269	74.0	-23.1	Pass
5	11897.00	56.40	4.99	38.79	55.25	MaxP	Horizontal	149	210	74.0	-18.7	Pass
6	11897.00	55.34	4.99	38.79	54.19	MaxP	Vertical	149	209	74.0	-19.8	Pass
7	15892.00	47.41	5.82	40.63	51.90	MaxP	Vertical	149	149	74.0	-22.1	Pass
8	17915.00	49.08	6.67	41.55	57.03	MaxP	Vertical	149	29	74.0	-17.0	Pass

Test Notes: 4VDC, 915.2, 100kbps, Max Power

Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

Antenna:	Integral	Variant:	300kHz
Antenna Gain (dBi):	1.0	Modulation:	FSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.9	Data Rate:	100.00 KBit/s
Power Setting:	Max	Tested By:	300kHz

Test Measurement Results

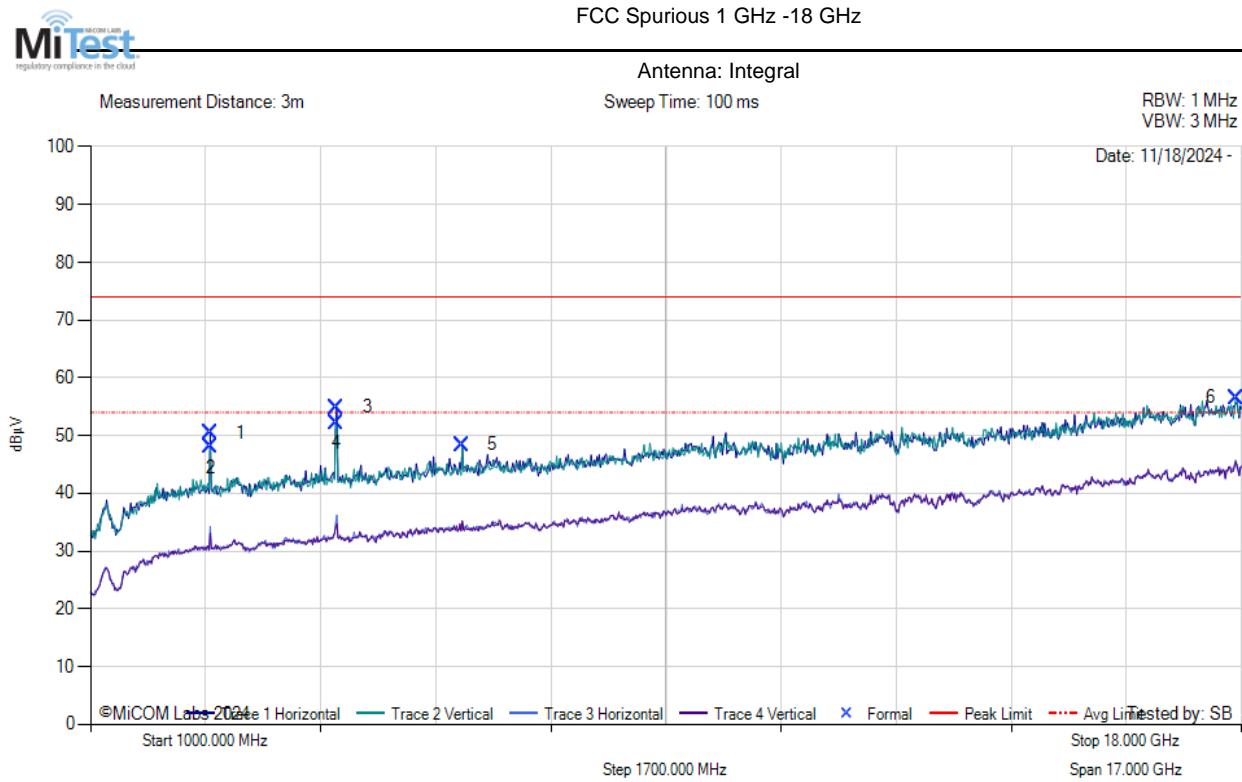


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2768.00	59.99	2.16	32.47	50.41	MaxP	Horizontal	199	60	74.0	-23.6	Pass
2	2768.00	57.59	2.16	32.47	48.01	MaxP	Vertical	150	89	74.0	-26.0	Pass
3	4638.00	64.37	2.82	34.00	54.86	MaxP	Horizontal	199	90	74.0	-19.1	Pass
4	4638.00	61.73	2.82	34.00	52.22	MaxP	Vertical	150	119	74.0	-21.8	Pass
5	6491.00	53.97	3.41	35.64	48.46	MaxP	Vertical	199	59	74.0	-25.5	Pass
6	17932.00	49.19	6.50	41.53	56.60	MaxP	Vertical	199	59	74.0	-17.4	Pass

Test Notes: 4VDC, 926.9, 100kbps, Max Power

A. APPENDIX - GRAPHICAL IMAGES

A.1. 20 dB & 99% Bandwidth

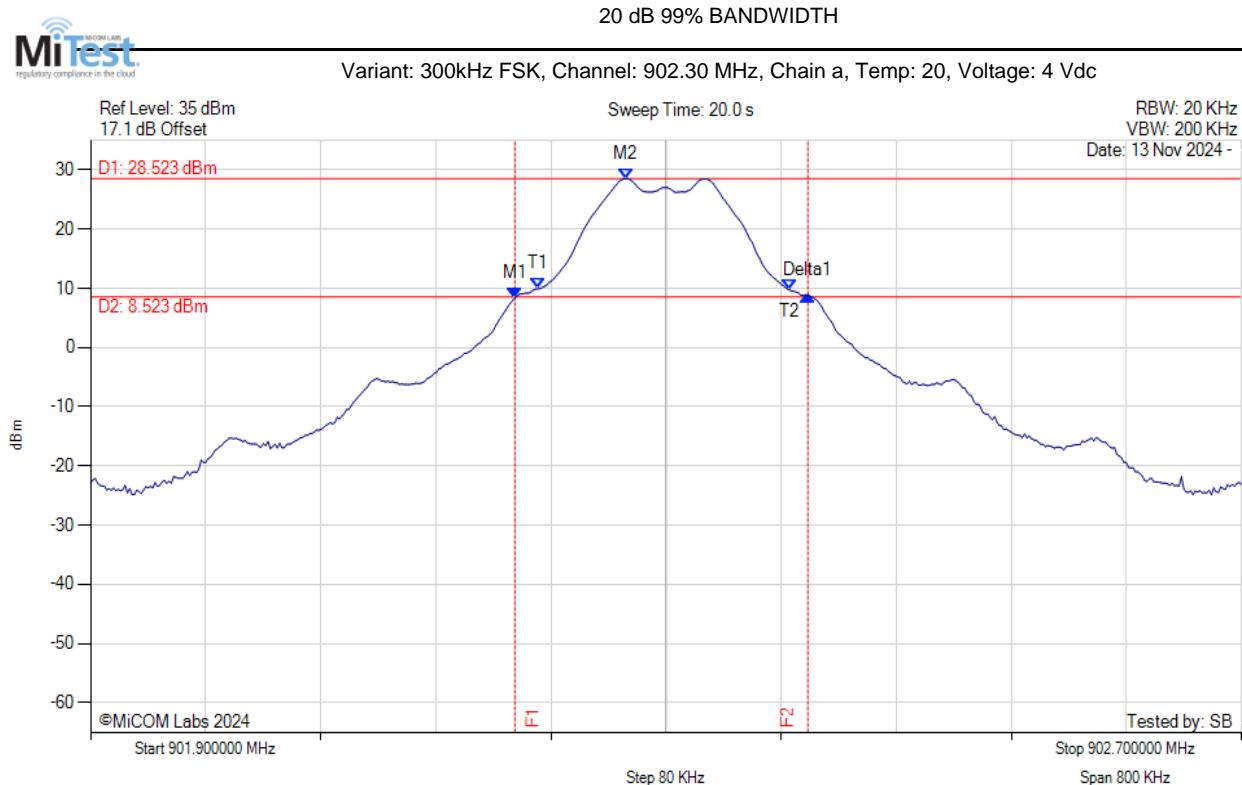


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.195 MHz : 8.413 dBm M2 : 902.272 MHz : 28.523 dBm Delta1 : 204 KHz : 0.386 dB T1 : 902.211 MHz : 9.926 dBm T2 : 902.386 MHz : 9.743 dBm OBW : 175 KHz	Measured 20 dB Bandwidth: 0.204 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH




Variant: 300kHz FSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

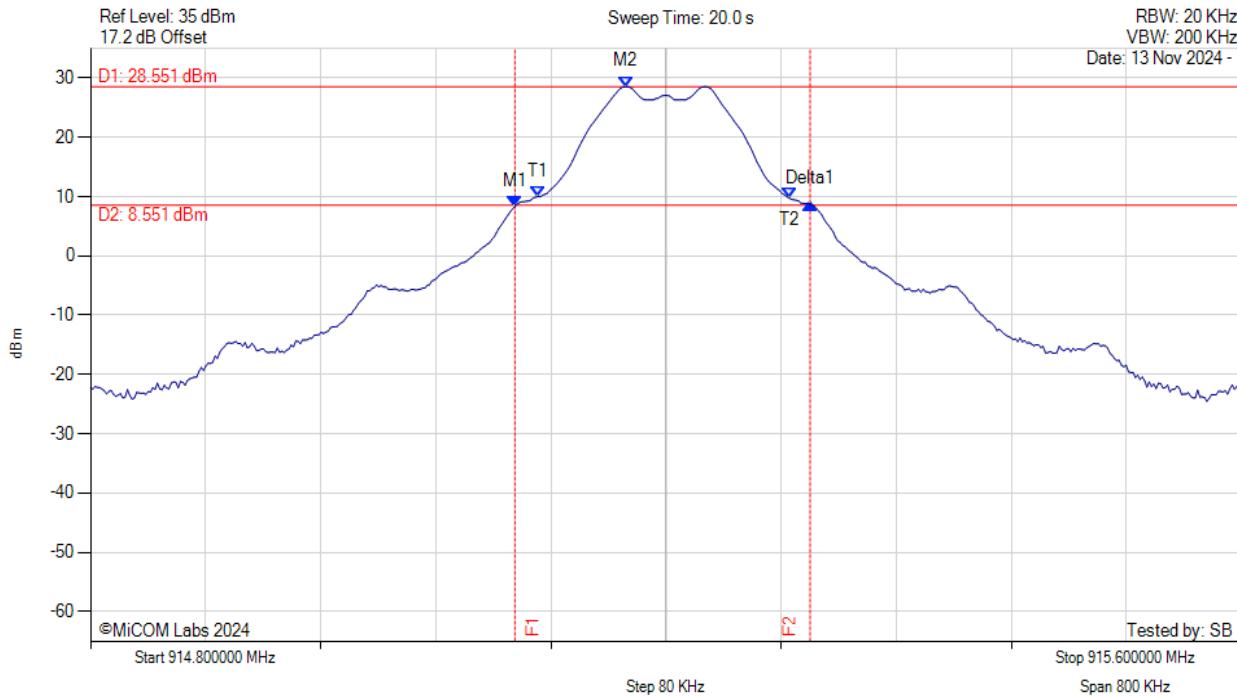

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.095 MHz : 8.327 dBm M2 : 915.172 MHz : 28.551 dBm Delta1 : 205 KHz : 0.407 dB T1 : 915.111 MHz : 10.030 dBm T2 : 915.286 MHz : 9.745 dBm OBW : 175 KHz	Measured 20 dB Bandwidth: 0.205 MHz Limit: kHz Margin: #VALUE! MHz


[back to matrix](#)

20 dB 99% BANDWIDTH

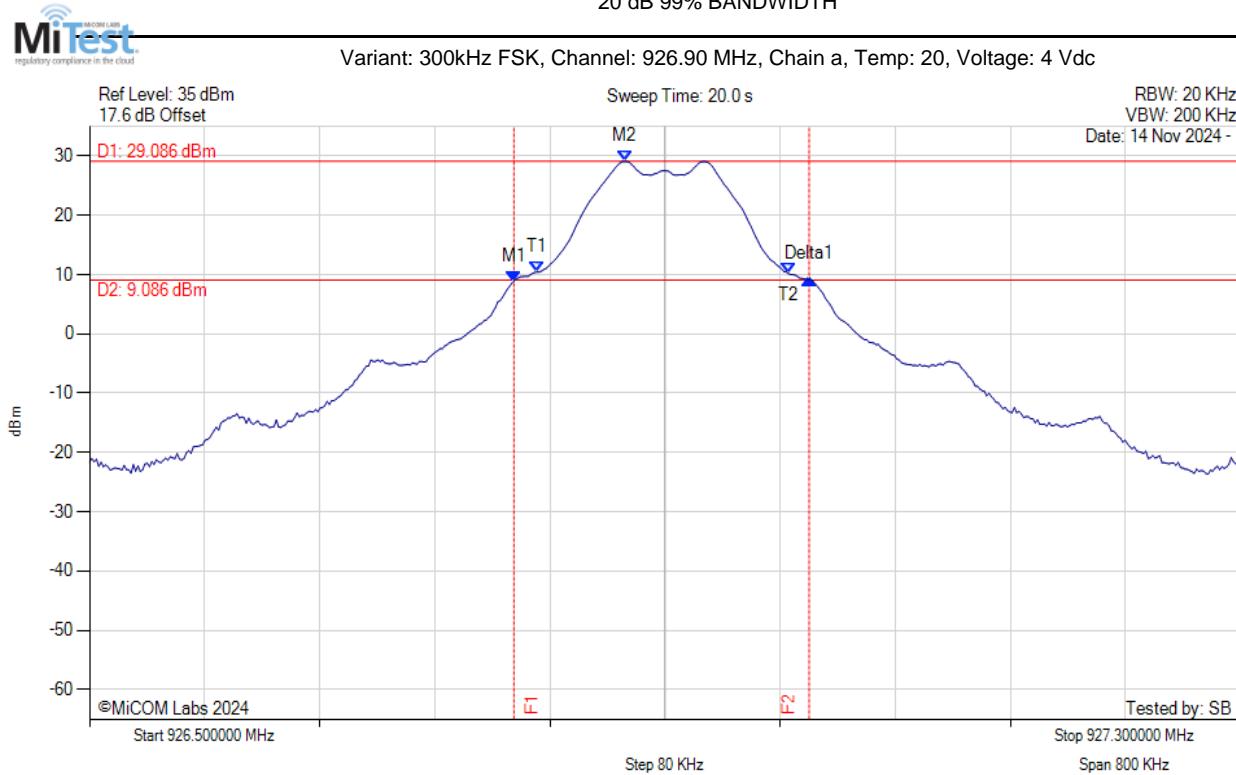


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.795 MHz : 8.895 dBm M2 : 926.872 MHz : 29.086 dBm Delta1 : 205 KHz : 0.297 dB T1 : 926.811 MHz : 10.461 dBm T2 : 926.986 MHz : 10.178 dBm OBW : 175 KHz	Measured 20 dB Bandwidth: 0.205 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

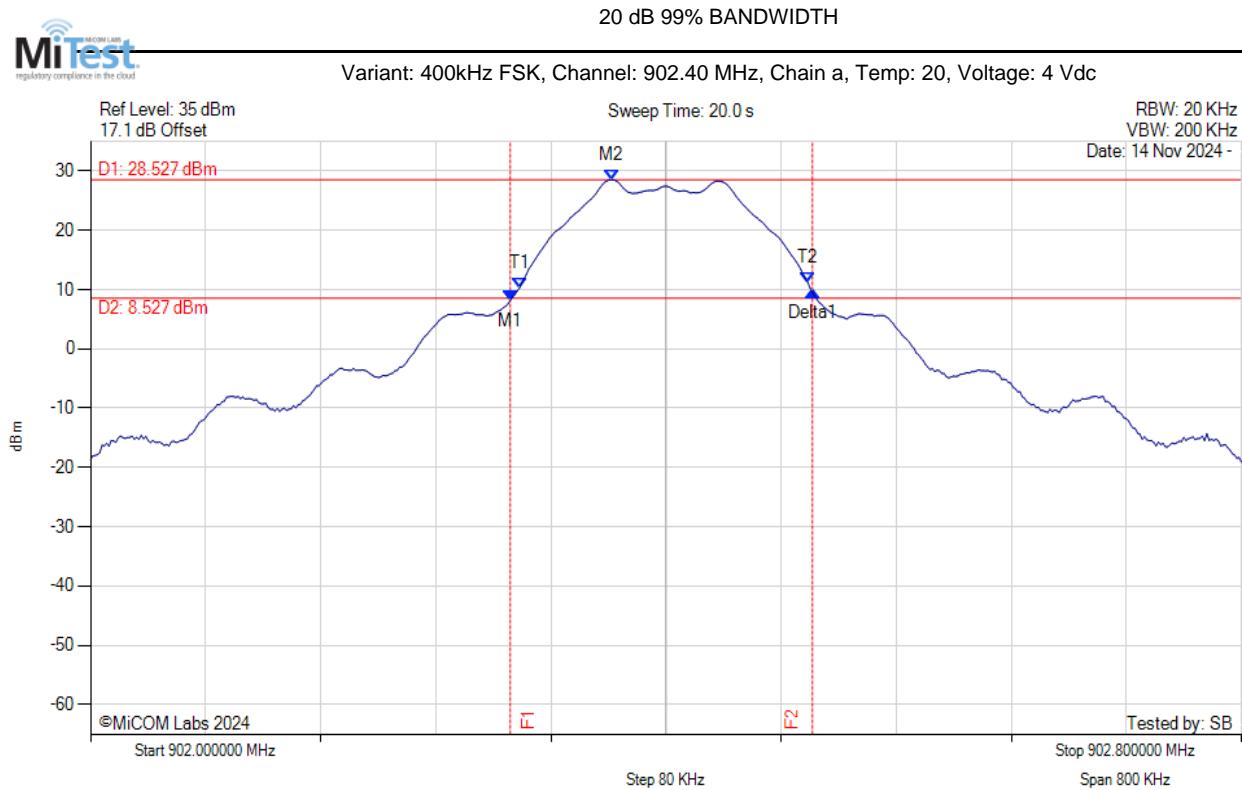


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.292 MHz : 8.214 dBm M2 : 902.362 MHz : 28.527 dBm Delta1 : 210 KHz : 1.436 dB T1 : 902.298 MHz : 10.300 dBm T2 : 902.499 MHz : 11.173 dBm OBW : 200 KHz	Measured 20 dB Bandwidth: 0.210 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

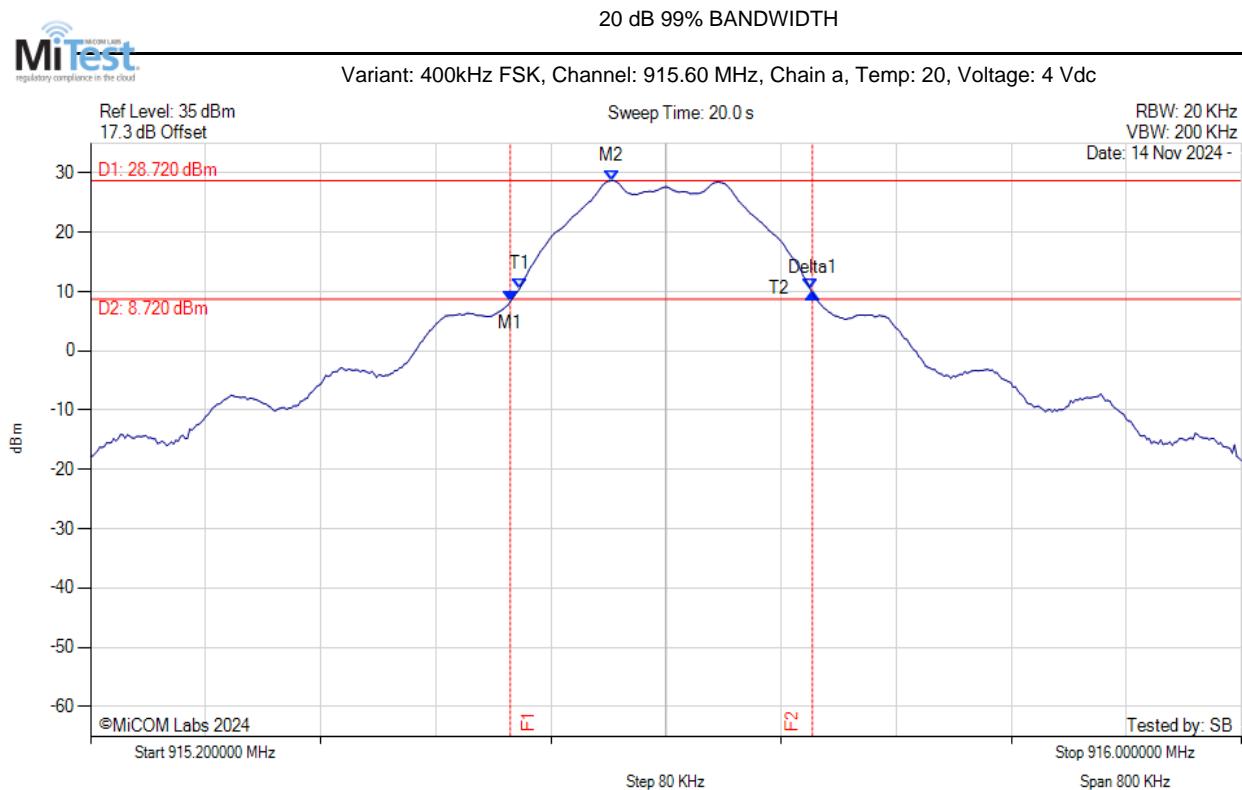

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.492 MHz : 8.338 dBm M2 : 915.562 MHz : 28.720 dBm Delta1 : 210 KHz : 1.397 dB T1 : 915.498 MHz : 10.459 dBm T2 : 915.700 MHz : 10.491 dBm OBW : 202 KHz	Measured 20 dB Bandwidth: 0.210 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

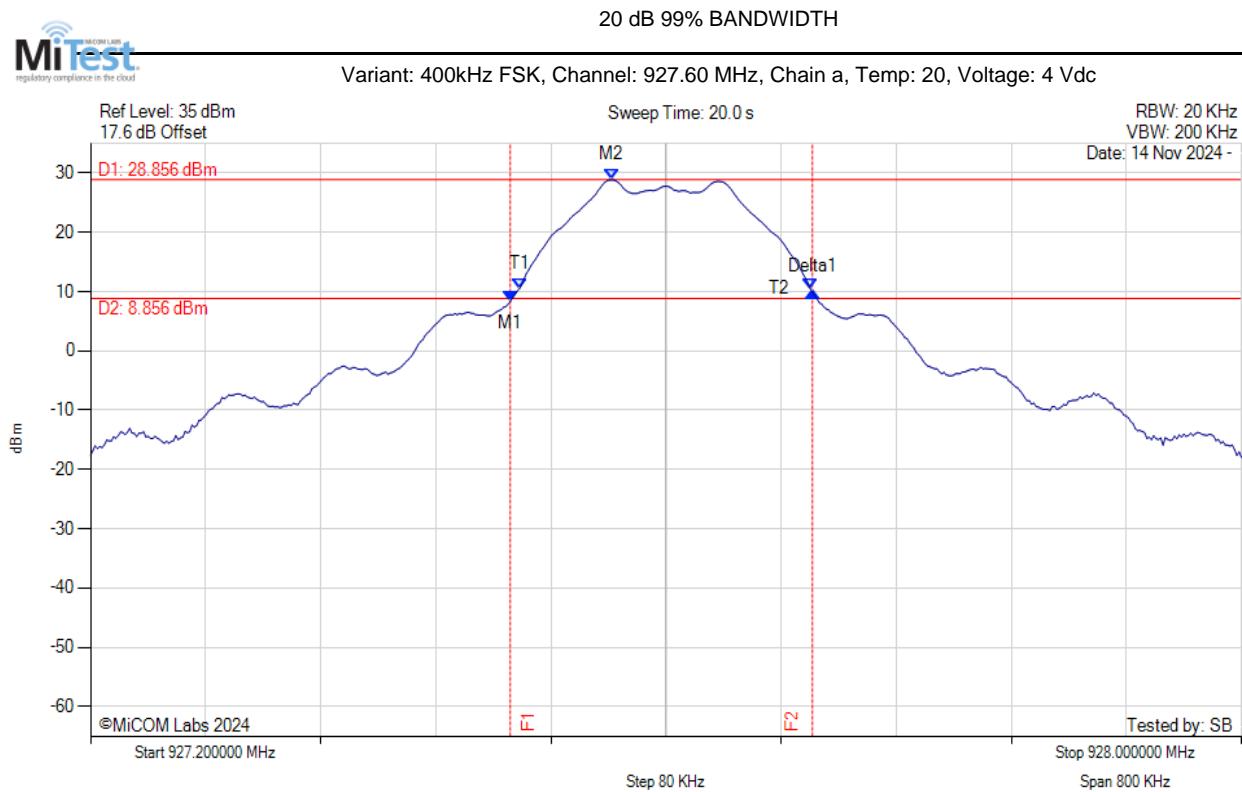


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 927.492 MHz : 8.342 dBm M2 : 927.562 MHz : 28.856 dBm Delta1 : 210 KHz : 1.580 dB T1 : 927.498 MHz : 10.532 dBm T2 : 927.700 MHz : 10.536 dBm OBW : 202 KHz	Measured 20 dB Bandwidth: 0.210 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: 300kHz GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

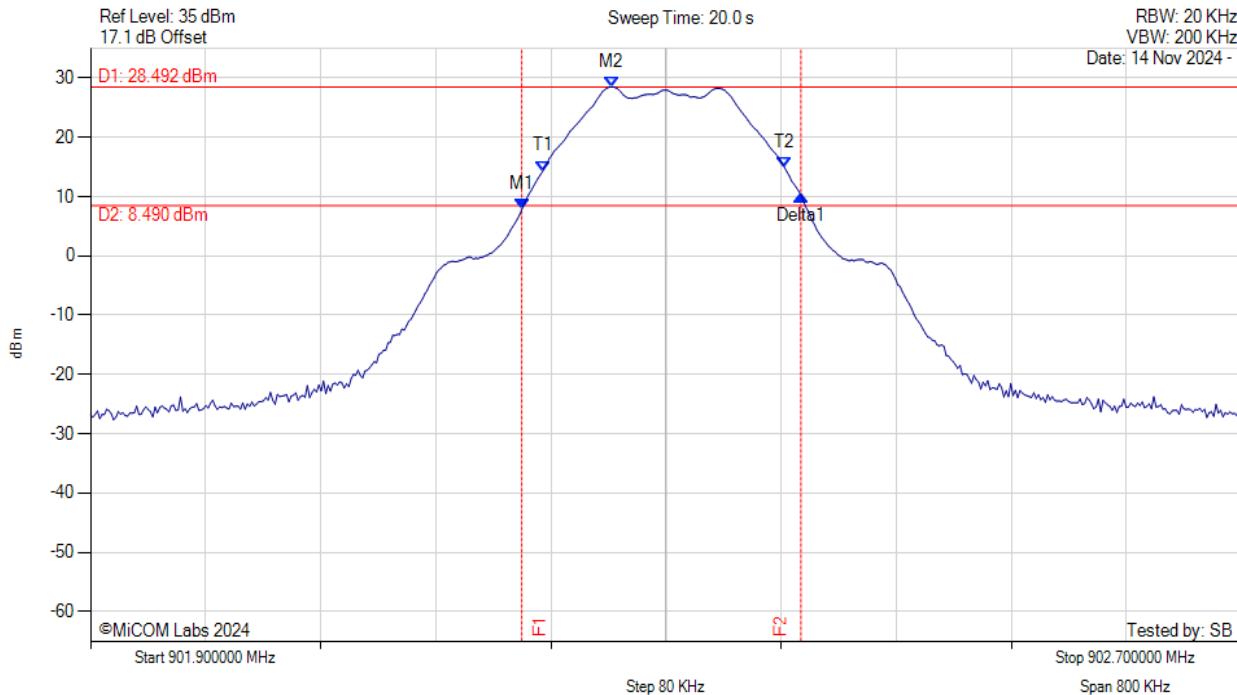


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.200 MHz : 7.874 dBm M2 : 902.262 MHz : 28.492 dBm Delta1 : 194 KHz : 2.398 dB T1 : 902.214 MHz : 14.274 dBm T2 : 902.383 MHz : 14.842 dBm OBW : 168 KHz	Measured 20 dB Bandwidth: 0.194 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

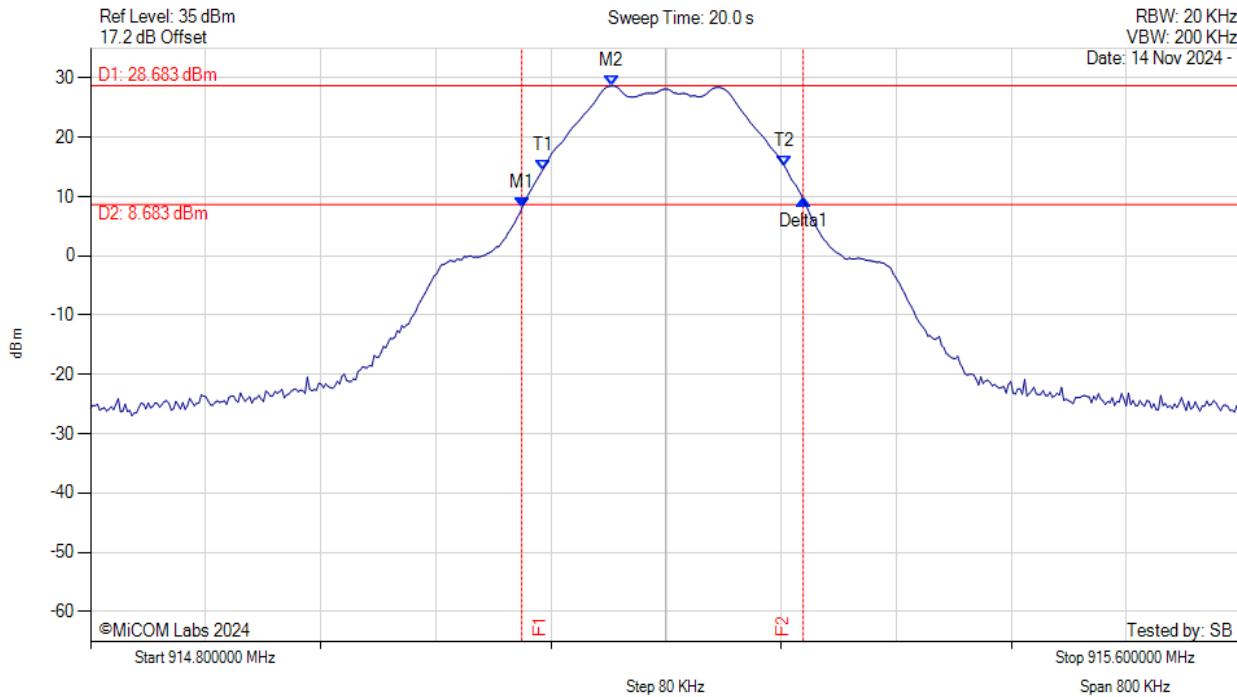


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.100 MHz : 8.033 dBm M2 : 915.162 MHz : 28.683 dBm Delta1 : 196 KHz : 1.436 dB T1 : 915.114 MHz : 14.504 dBm T2 : 915.283 MHz : 15.067 dBm OBW : 168 KHz	Measured 20 dB Bandwidth: 0.196 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: 300kHz GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

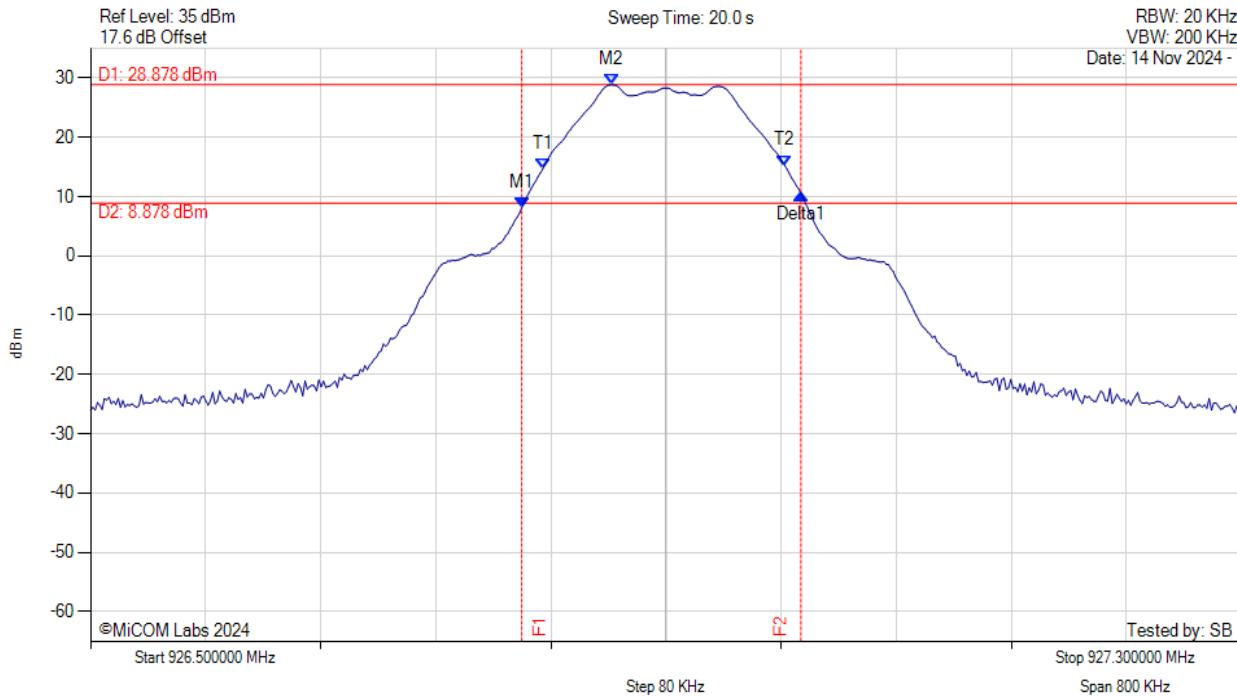


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.800 MHz : 8.179 dBm M2 : 926.862 MHz : 28.878 dBm Delta1 : 194 KHz : 2.351 dB T1 : 926.814 MHz : 14.628 dBm T2 : 926.983 MHz : 15.226 dBm OBW : 168 KHz	Measured 20 dB Bandwidth: 0.194 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH




Variant: 300kHz 200kbps GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

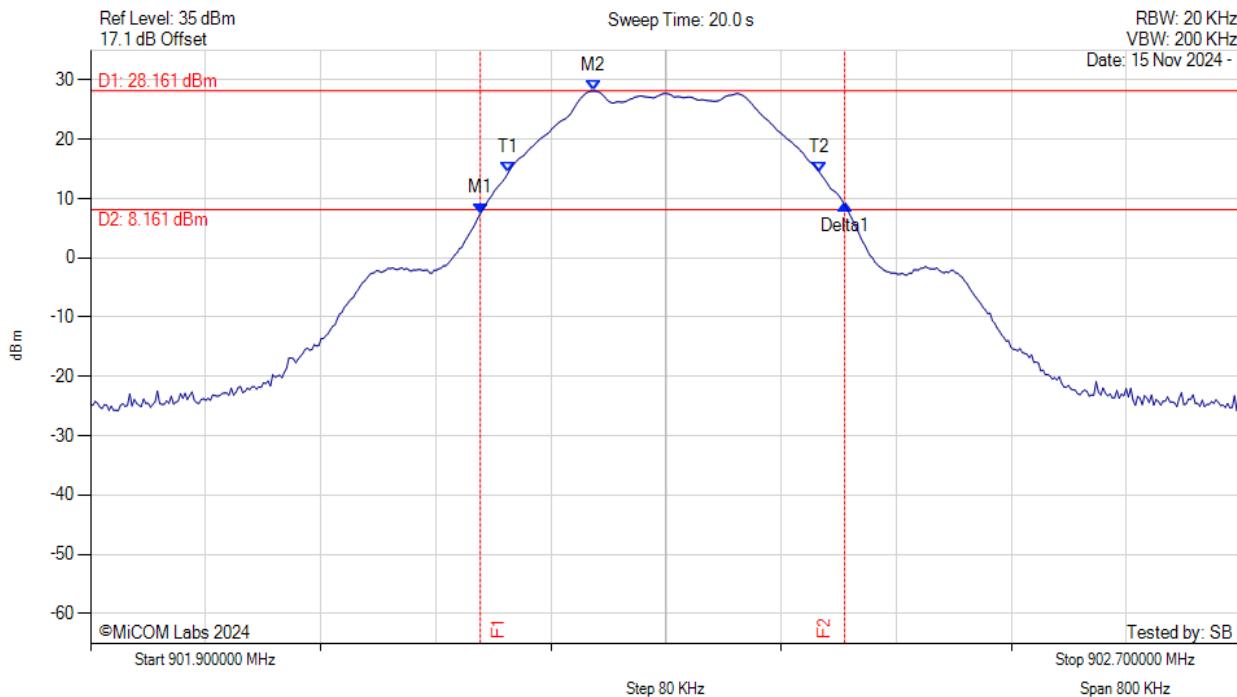

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.171 MHz : 7.514 dBm M2 : 902.249 MHz : 28.161 dBm Delta1 : 253 KHz : 1.434 dB T1 : 902.190 MHz : 14.325 dBm T2 : 902.407 MHz : 14.482 dBm OBW : 216 KHz	Measured 20 dB Bandwidth: 0.253 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH

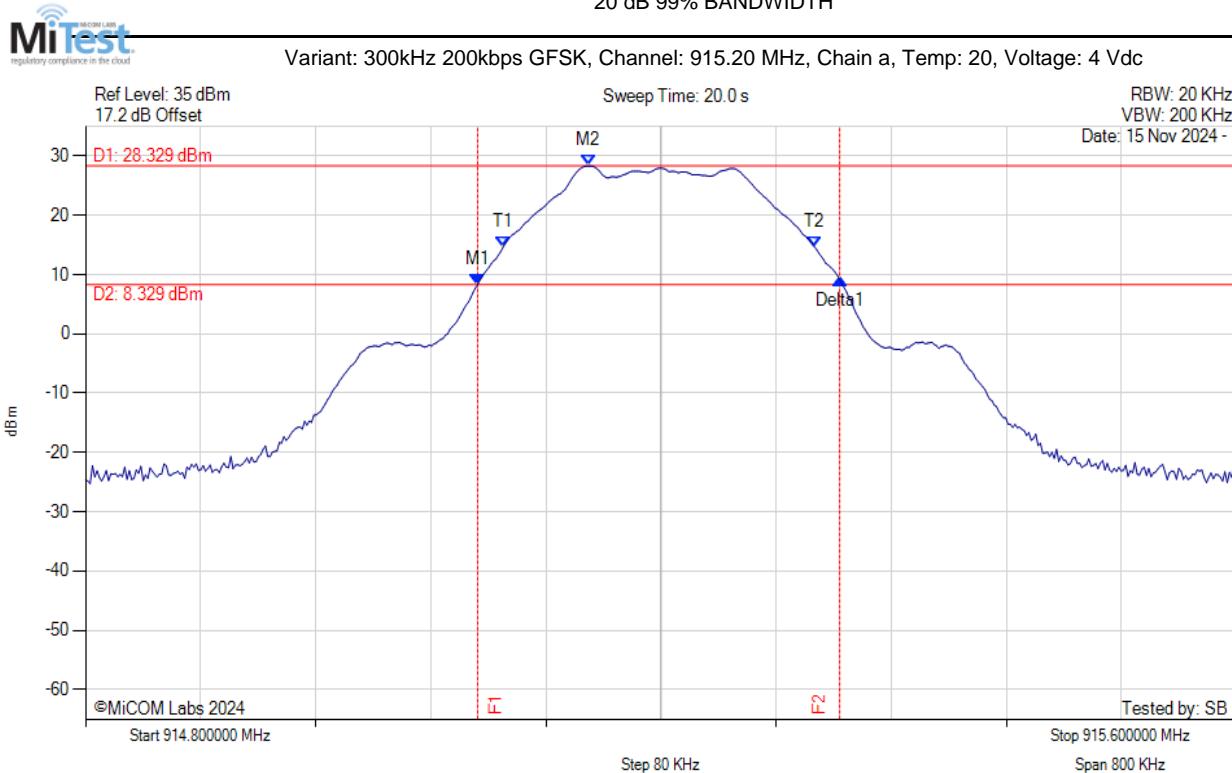


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.073 MHz : 8.309 dBm M2 : 915.149 MHz : 28.329 dBm Delta1 : 252 KHz : 0.885 dB T1 : 915.090 MHz : 14.622 dBm T2 : 915.307 MHz : 14.709 dBm OBW : 216 KHz	Measured 20 dB Bandwidth: 0.252 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH

Variant: 300kHz 200kbps GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

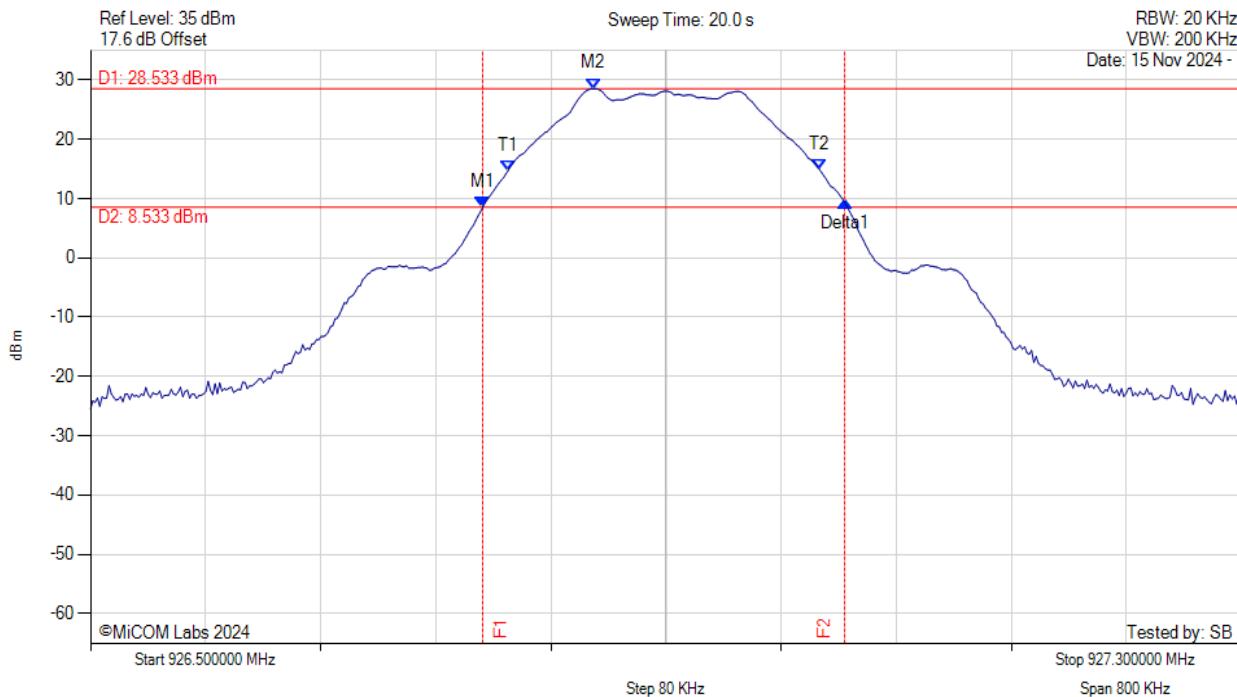


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.773 MHz : 8.515 dBm M2 : 926.849 MHz : 28.533 dBm Delta1 : 252 KHz : 0.883 dB T1 : 926.790 MHz : 14.711 dBm T2 : 927.007 MHz : 14.935 dBm OBW : 216 KHz	Measured 20 dB Bandwidth: 0.252 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: 400kHz GFSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

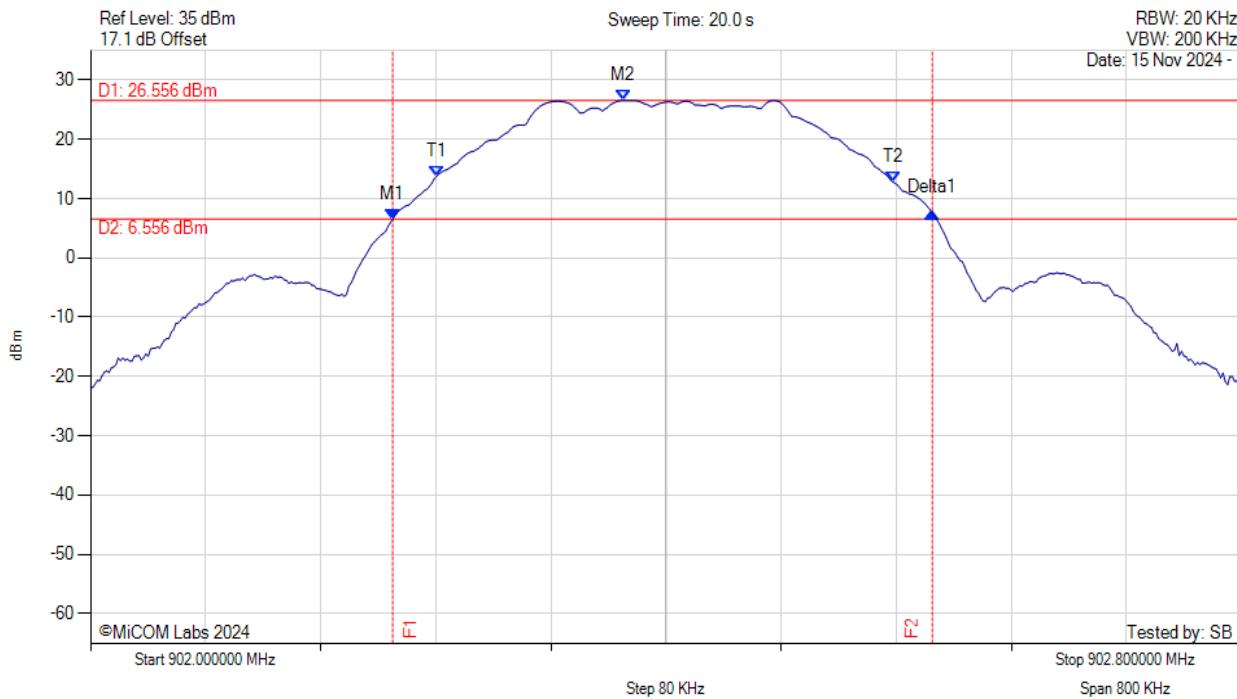


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.210 MHz : 6.552 dBm M2 : 902.370 MHz : 26.556 dBm Delta1 : 375 KHz : 1.005 dB T1 : 902.240 MHz : 13.774 dBm T2 : 902.558 MHz : 12.779 dBm OBW : 317 KHz	Measured 20 dB Bandwidth: 0.375 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH




Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

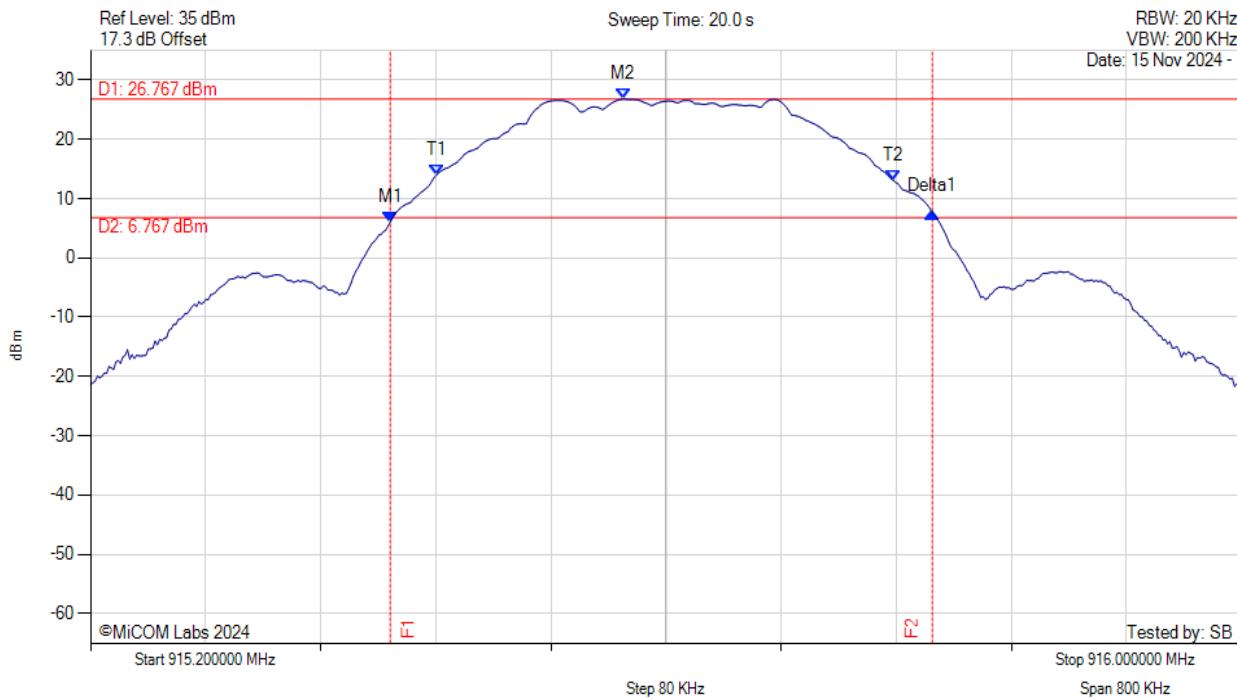

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 915.408 MHz : 6.041 dBm M2 : 915.570 MHz : 26.767 dBm Delta1 : 377 KHz : 1.702 dB T1 : 915.440 MHz : 13.987 dBm T2 : 915.758 MHz : 13.099 dBm OBW : 317 KHz	Measured 20 dB Bandwidth: 0.377 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

20 dB 99% BANDWIDTH

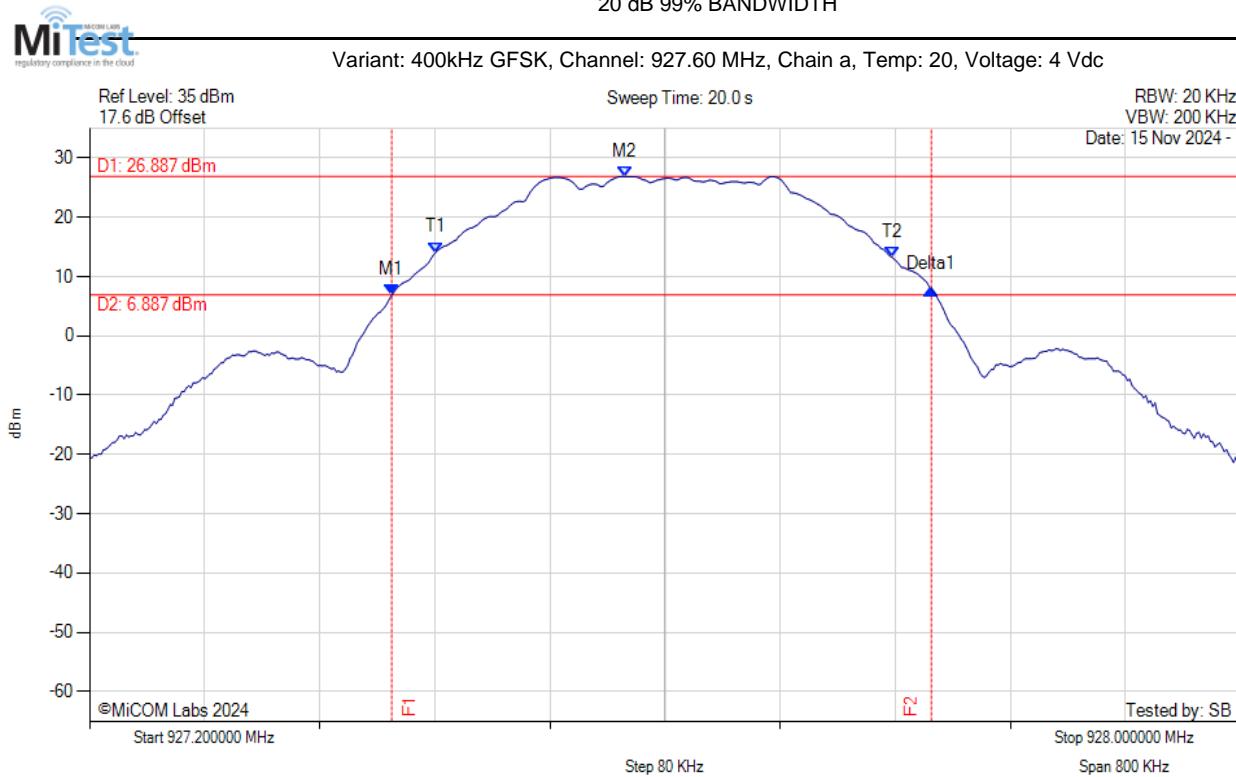


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 927.410 MHz : 6.843 dBm M2 : 927.572 MHz : 26.887 dBm Delta1 : 375 KHz : 1.047 dB T1 : 927.440 MHz : 14.061 dBm T2 : 927.758 MHz : 13.239 dBm OBW : 317 KHz	Measured 20 dB Bandwidth: 0.375 MHz Limit: kHz Margin: #VALUE! MHz

[back to matrix](#)

A.2. Frequency Hopping Tests

A.2.1. Number of Hopping Channels

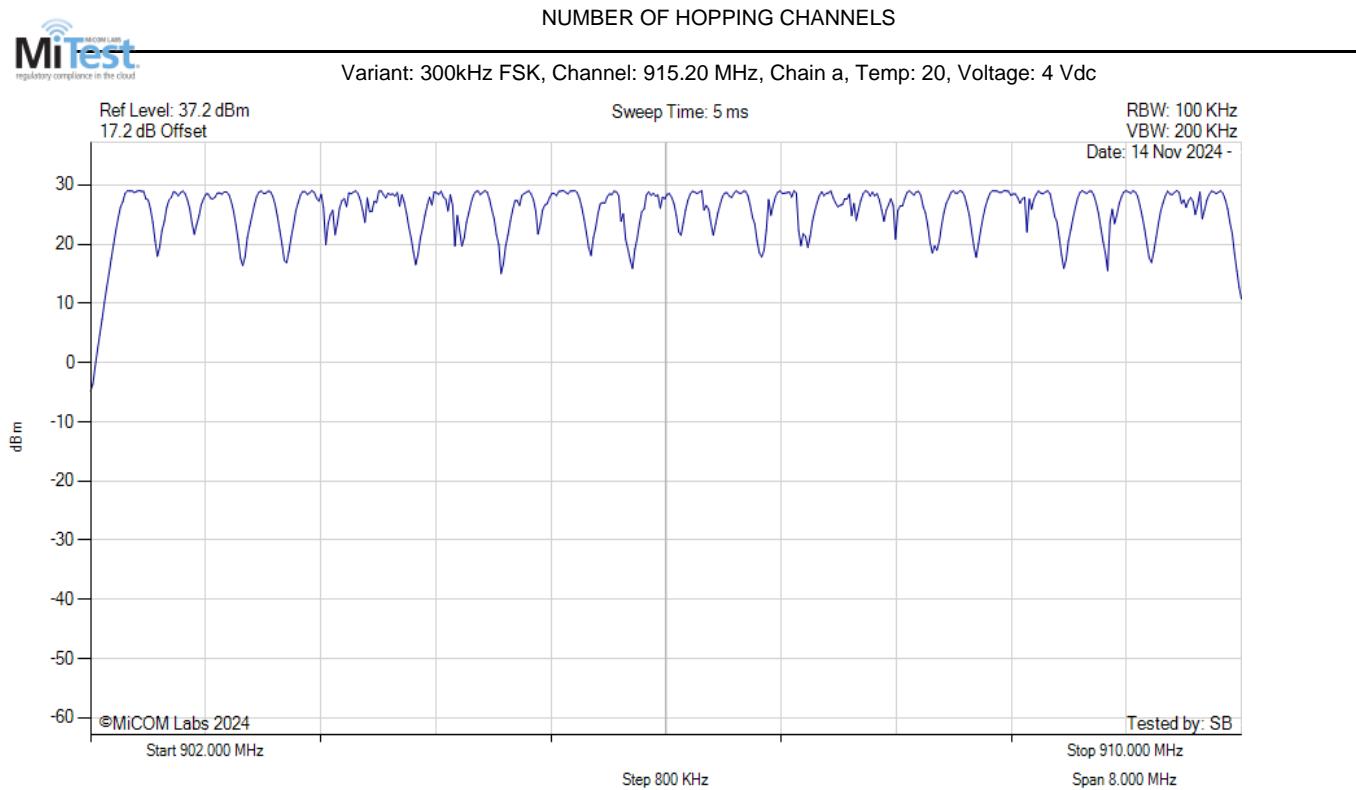


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 300kHz FSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

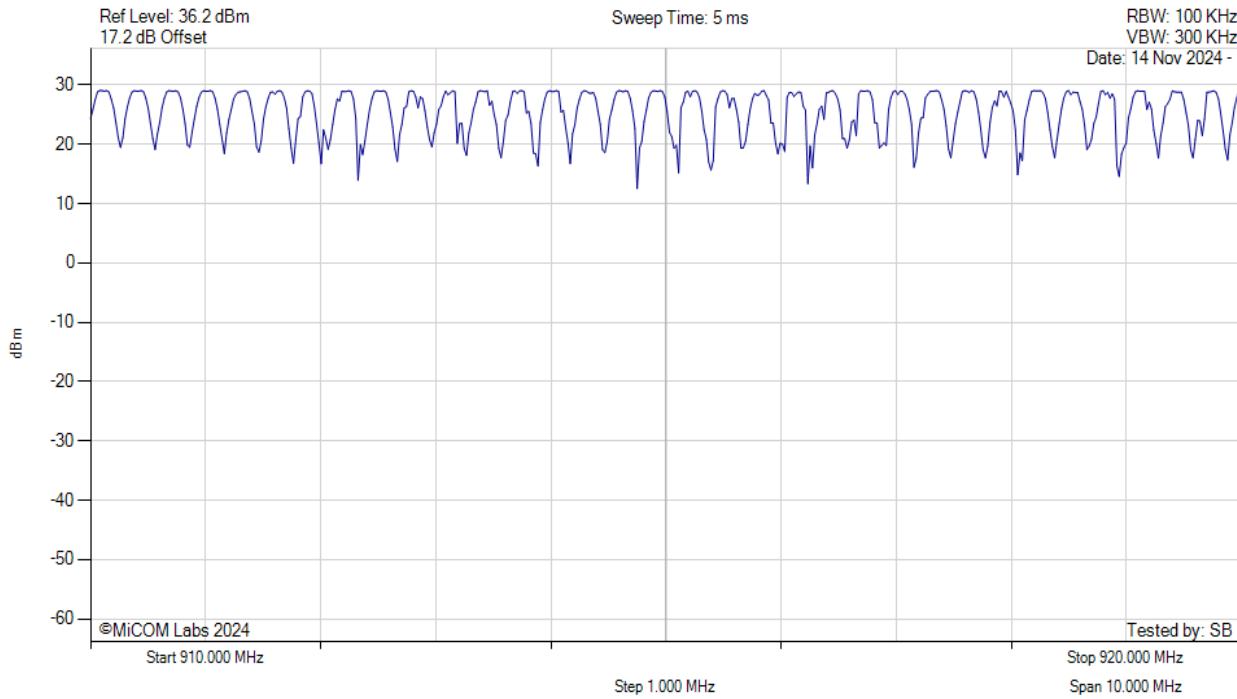


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 300kHz FSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

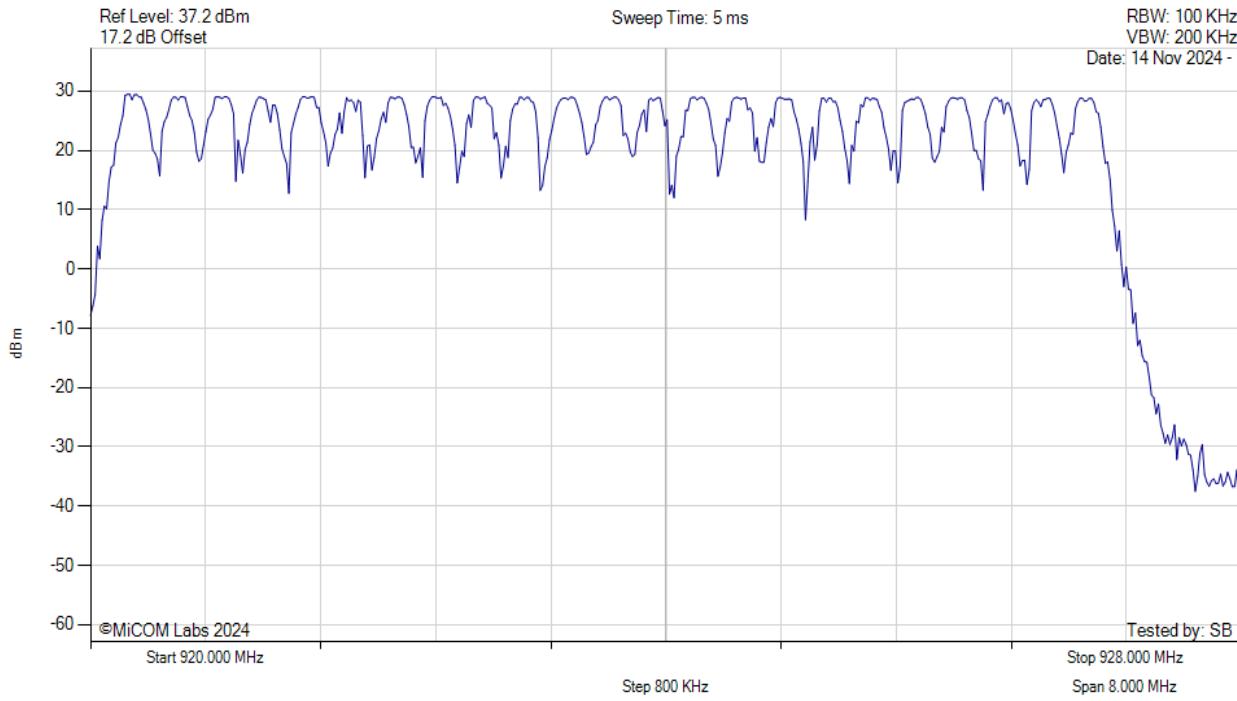


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

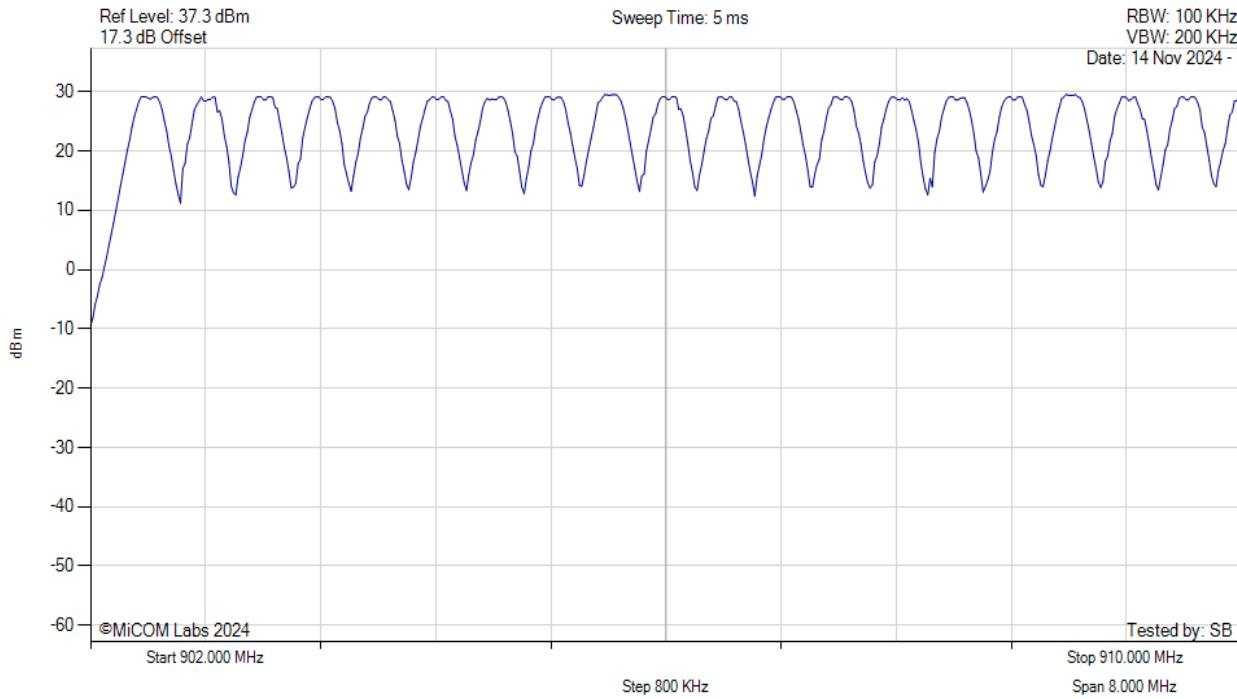


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

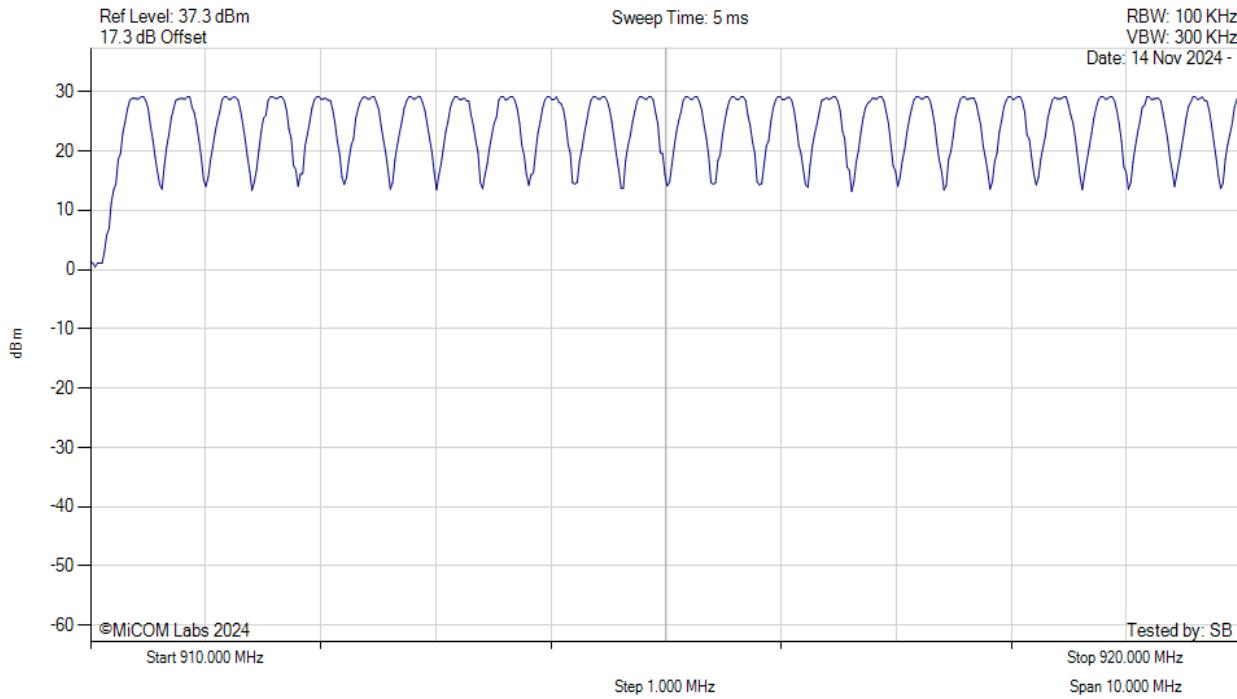


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

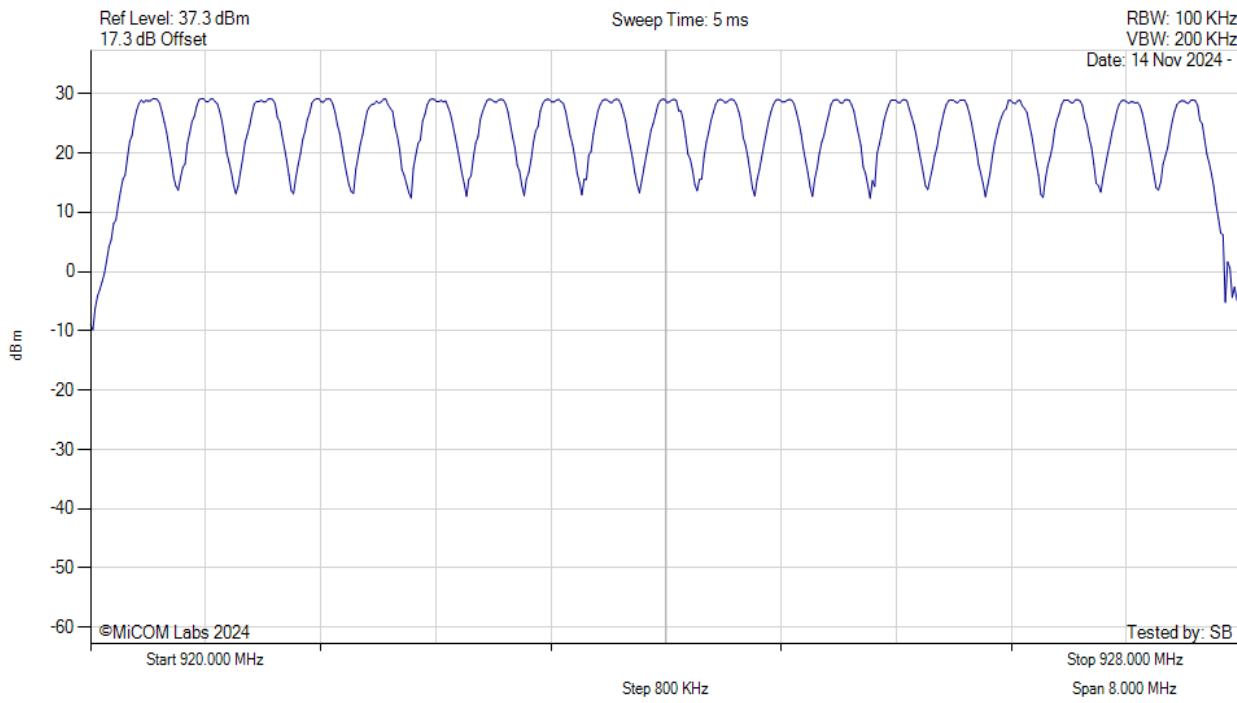


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

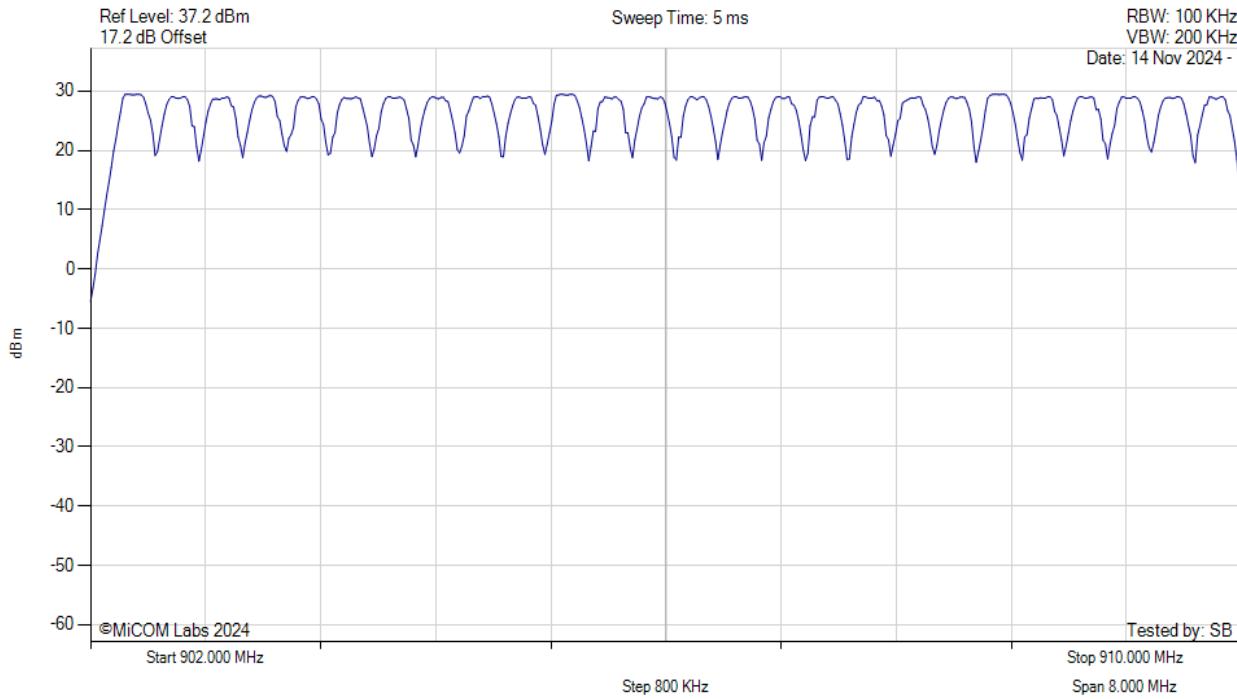


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

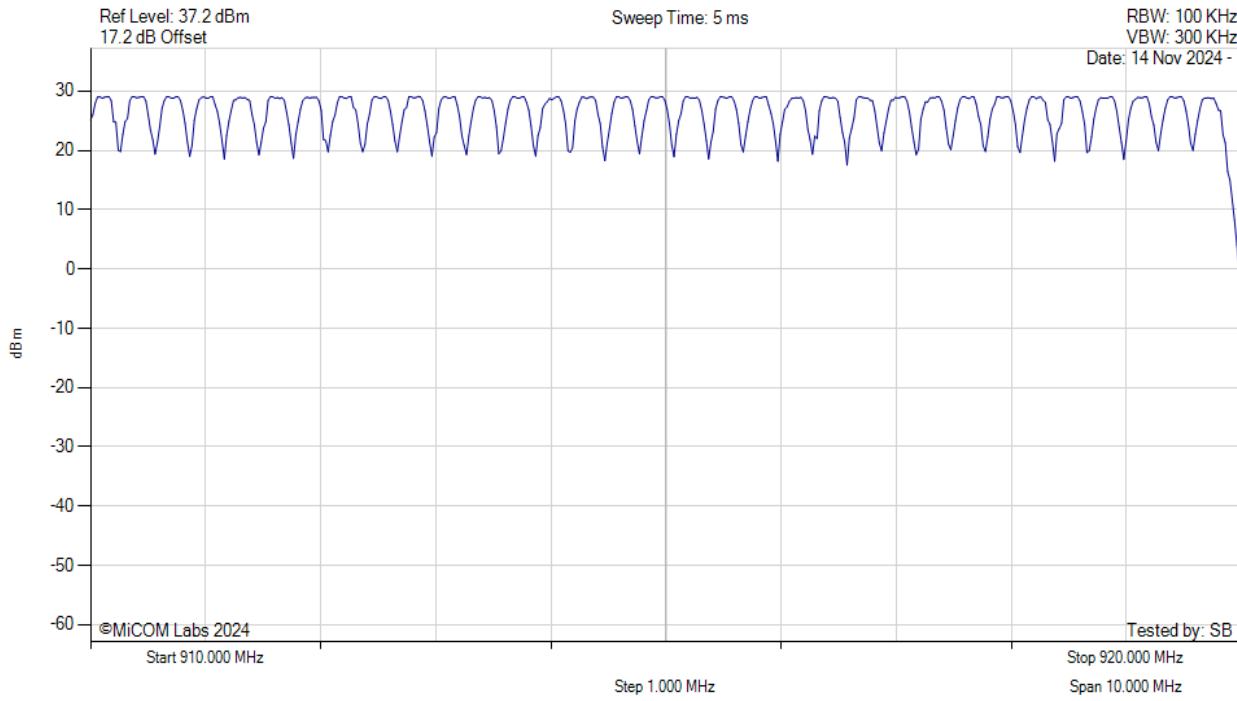


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS




Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

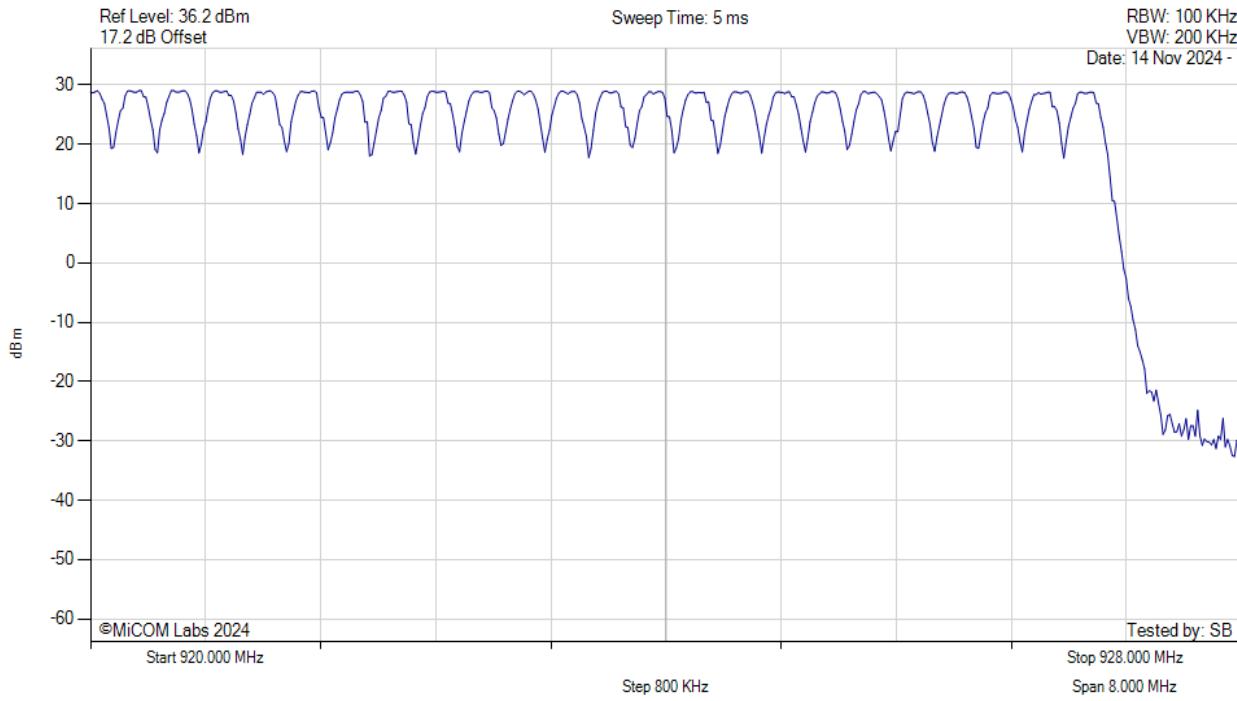

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS

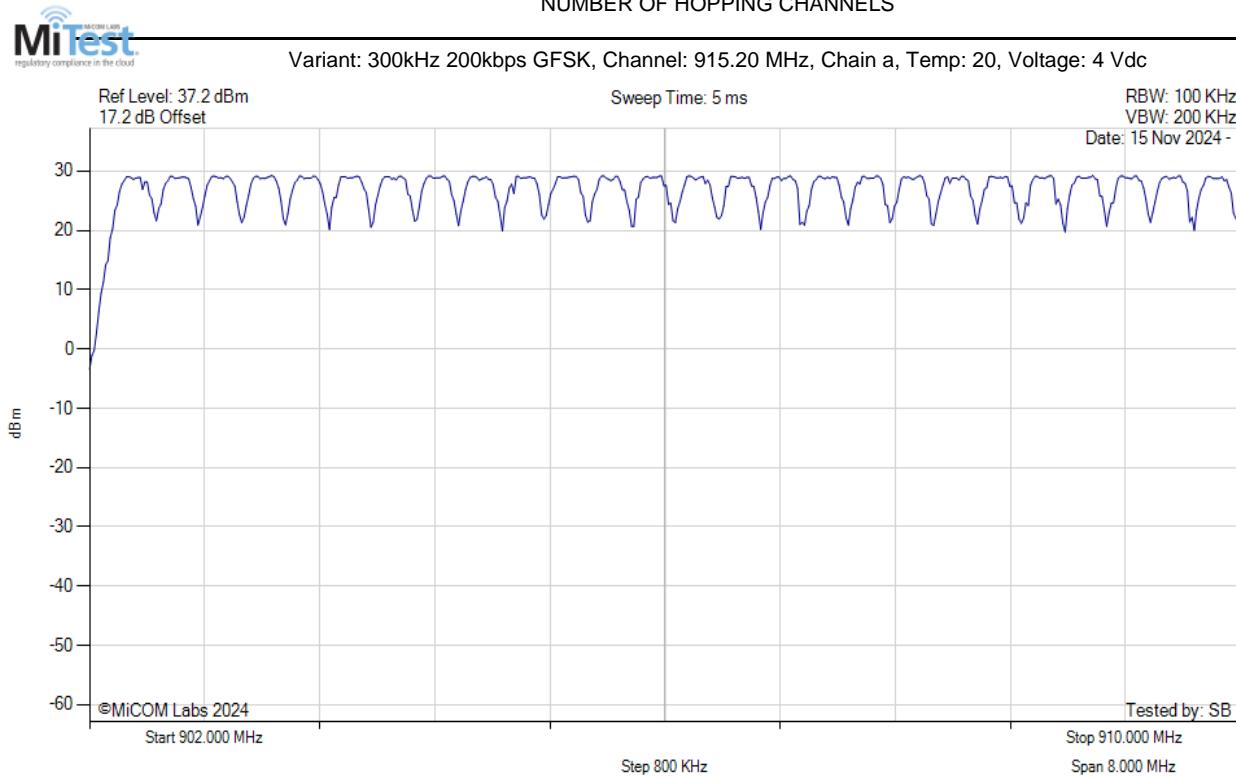


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS




Variant: 300kHz 200kbps GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

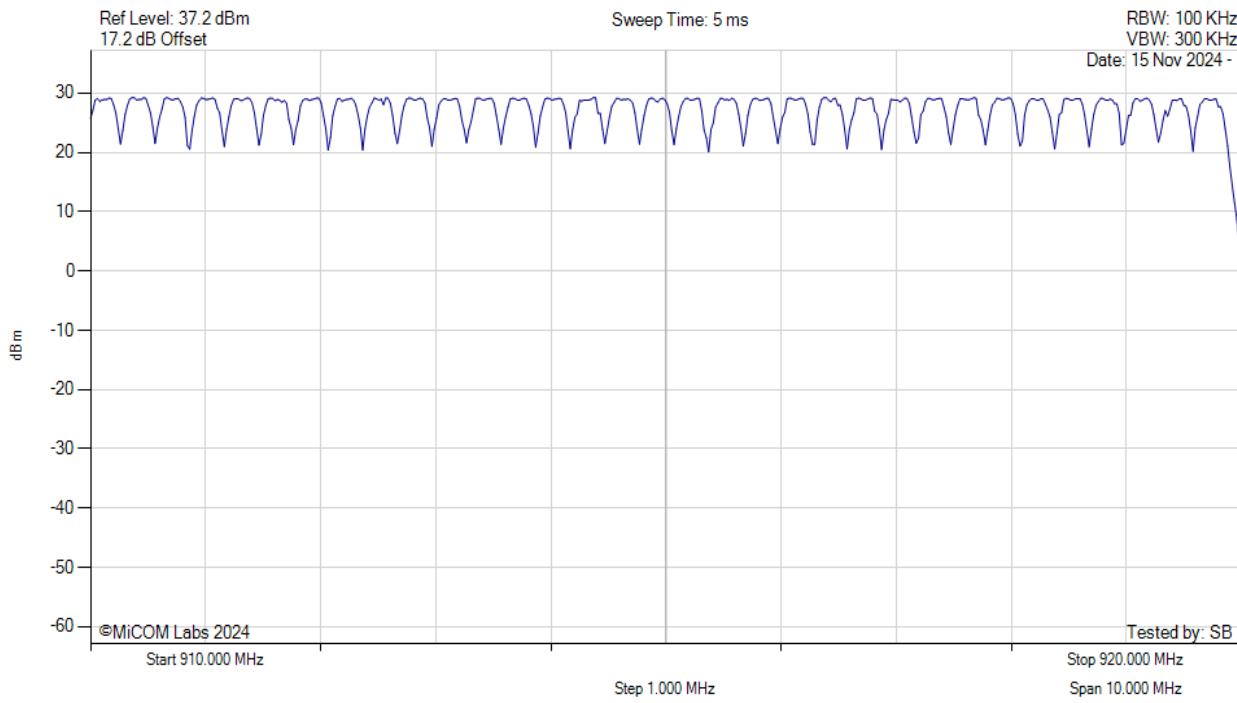

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS

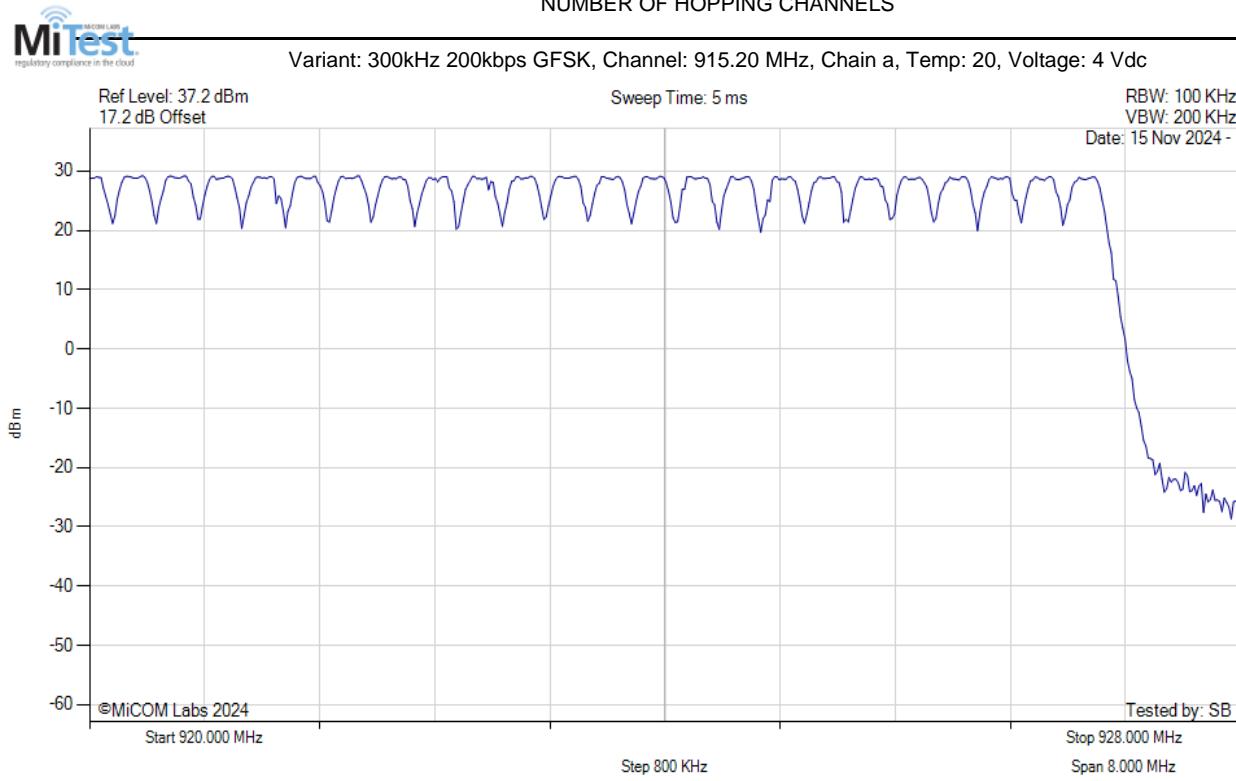


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.20 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

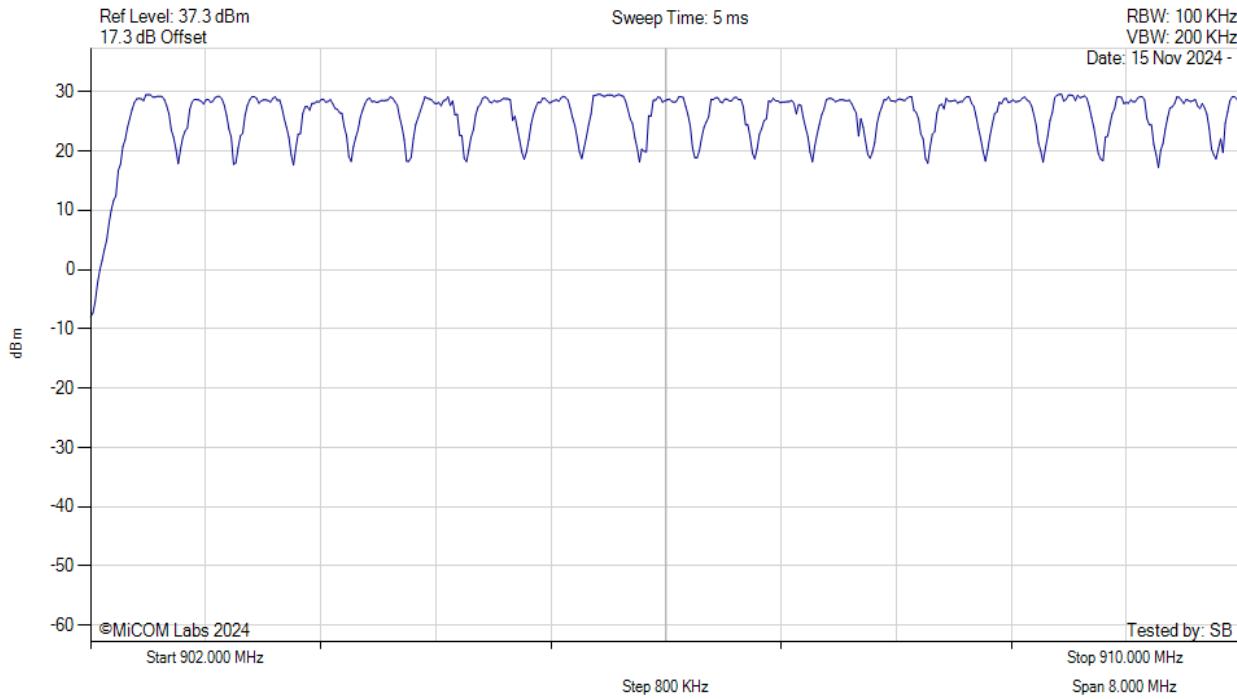


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

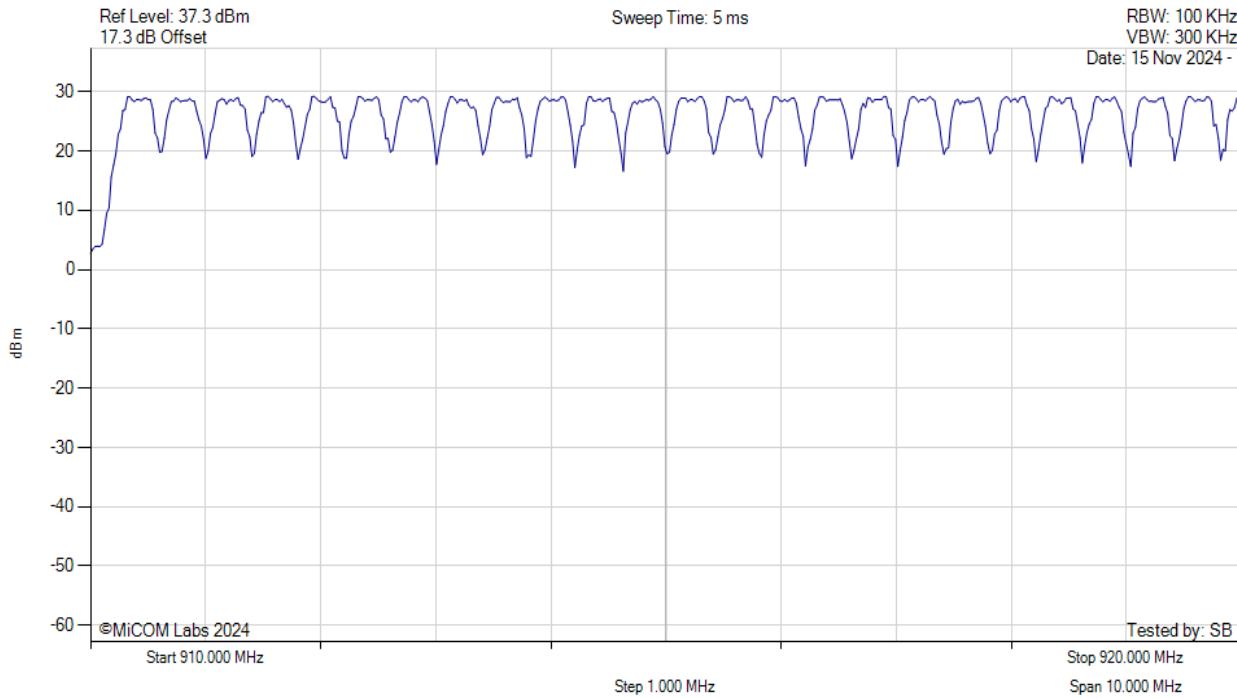


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS




Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

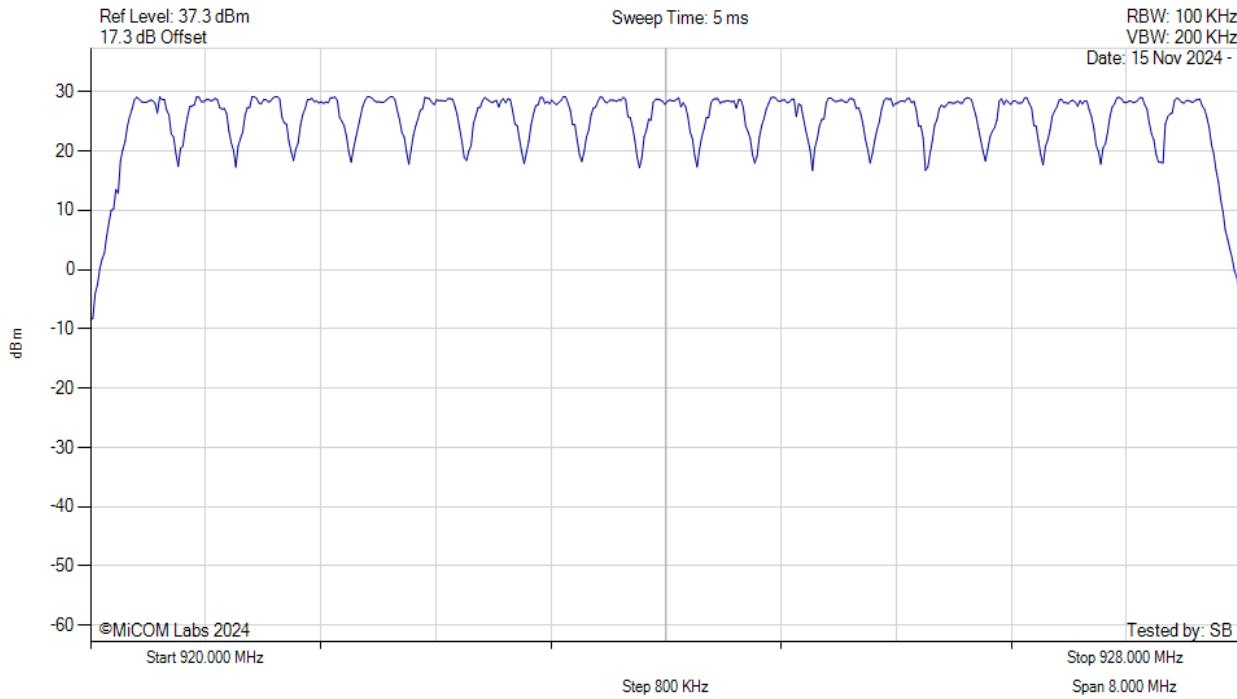

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.60 MHz

[back to matrix](#)

A.2.2. Channel Separation

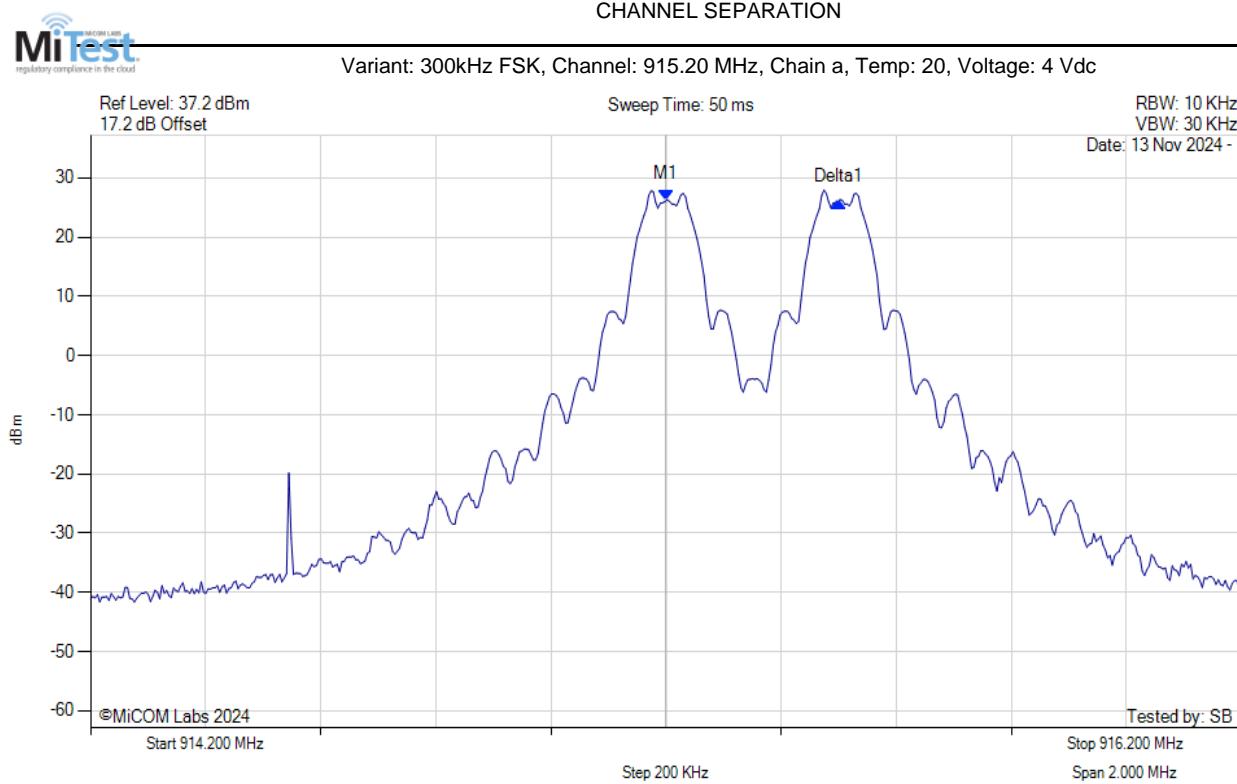


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.200 MHz : 26.313 dBm Delta1 : 300 KHz : -0.268 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

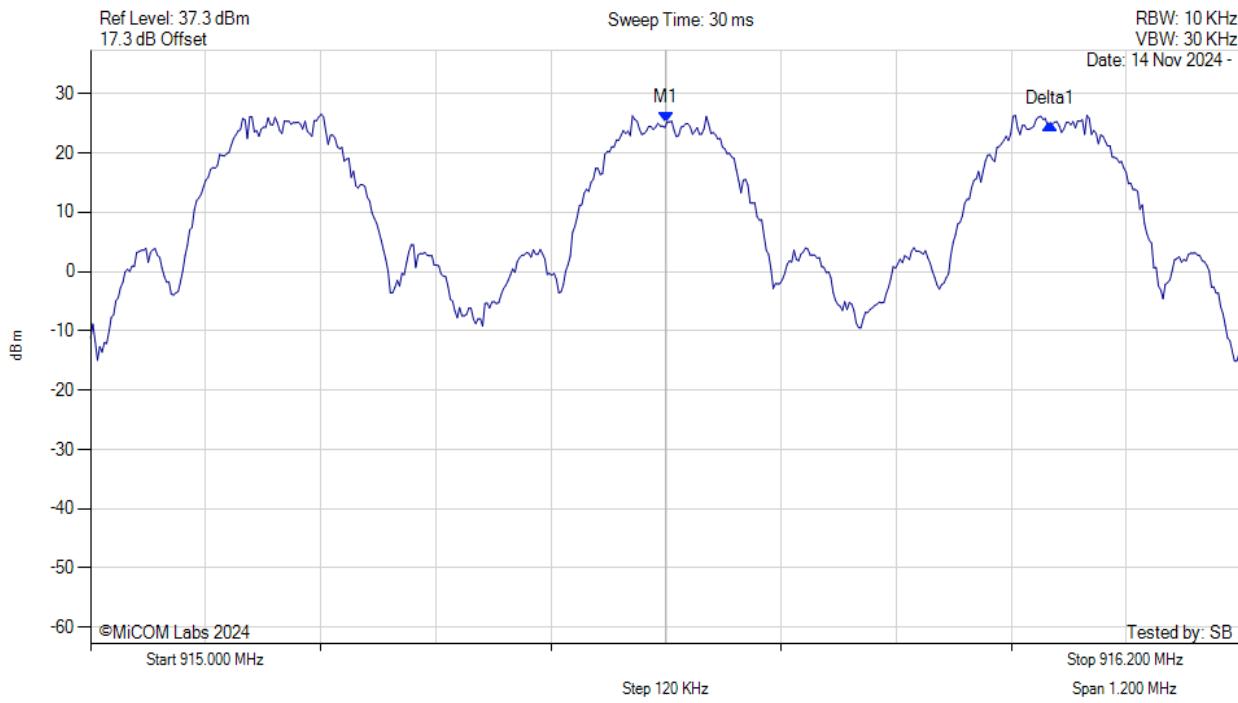


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.600 MHz : 25.183 dBm Delta1 : 400 KHz : -0.201 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

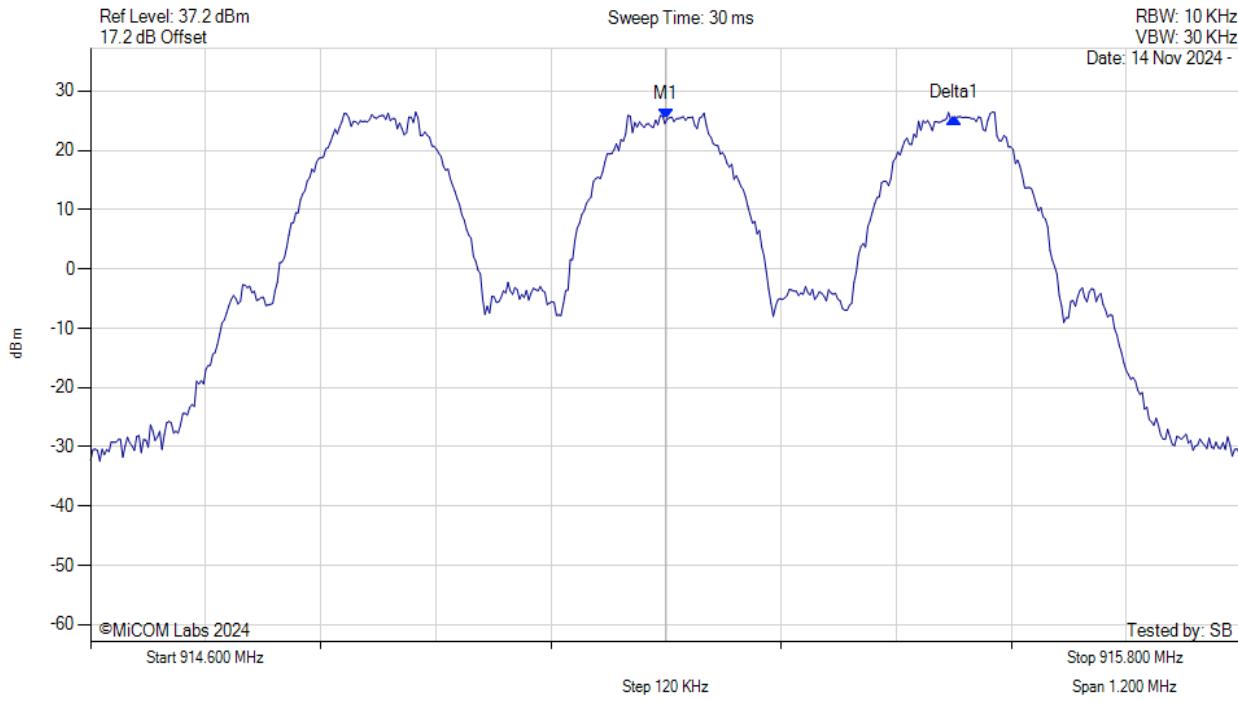


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.200 MHz : 25.264 dBm Delta1 : 300 KHz : 0.169 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: 300kHz 200kbps GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

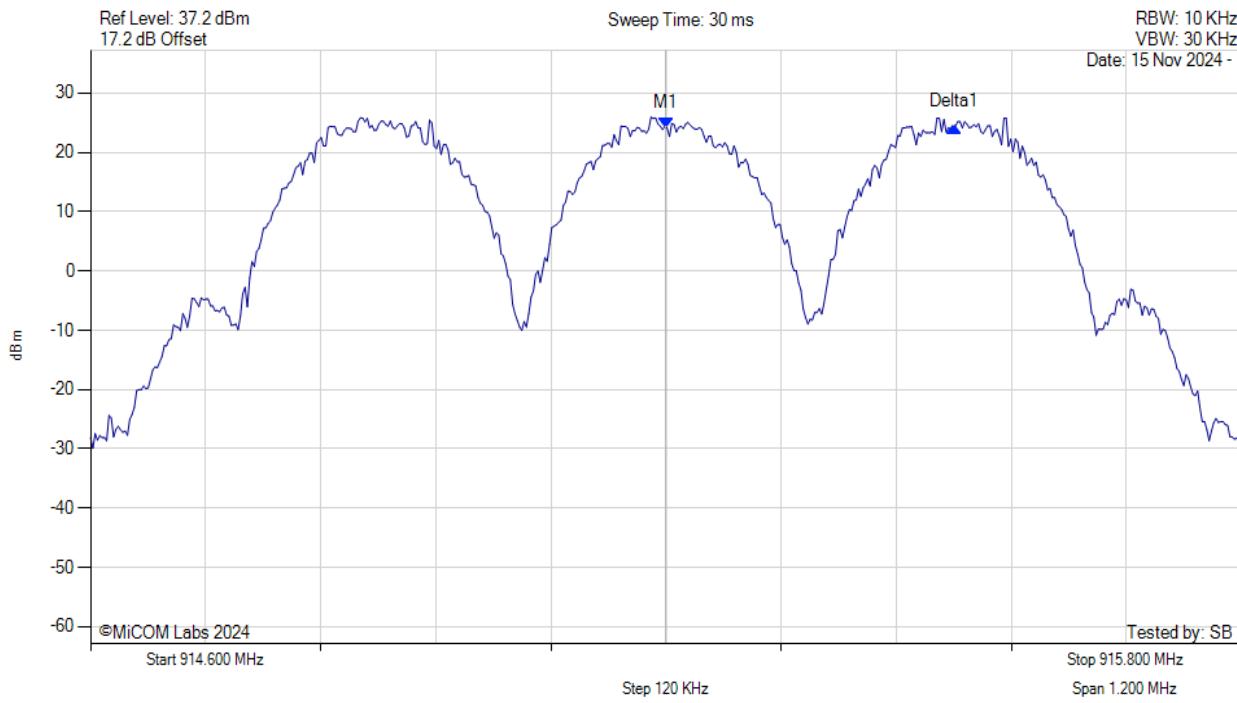


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.200 MHz : 24.084 dBm Delta1 : 300 KHz : 0.256 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL SEPARATION




Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

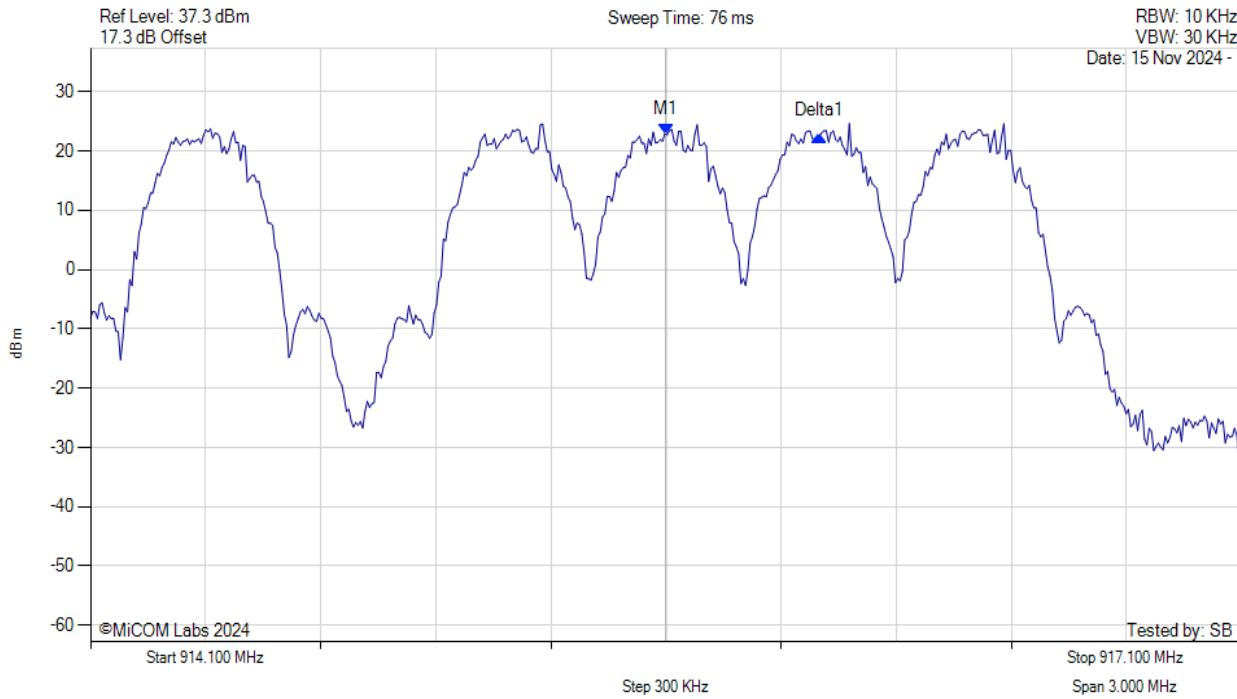

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 915.600 MHz : 22.716 dBm Delta1 : 400 KHz : -0.232 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

A.2.3. Dwell Time

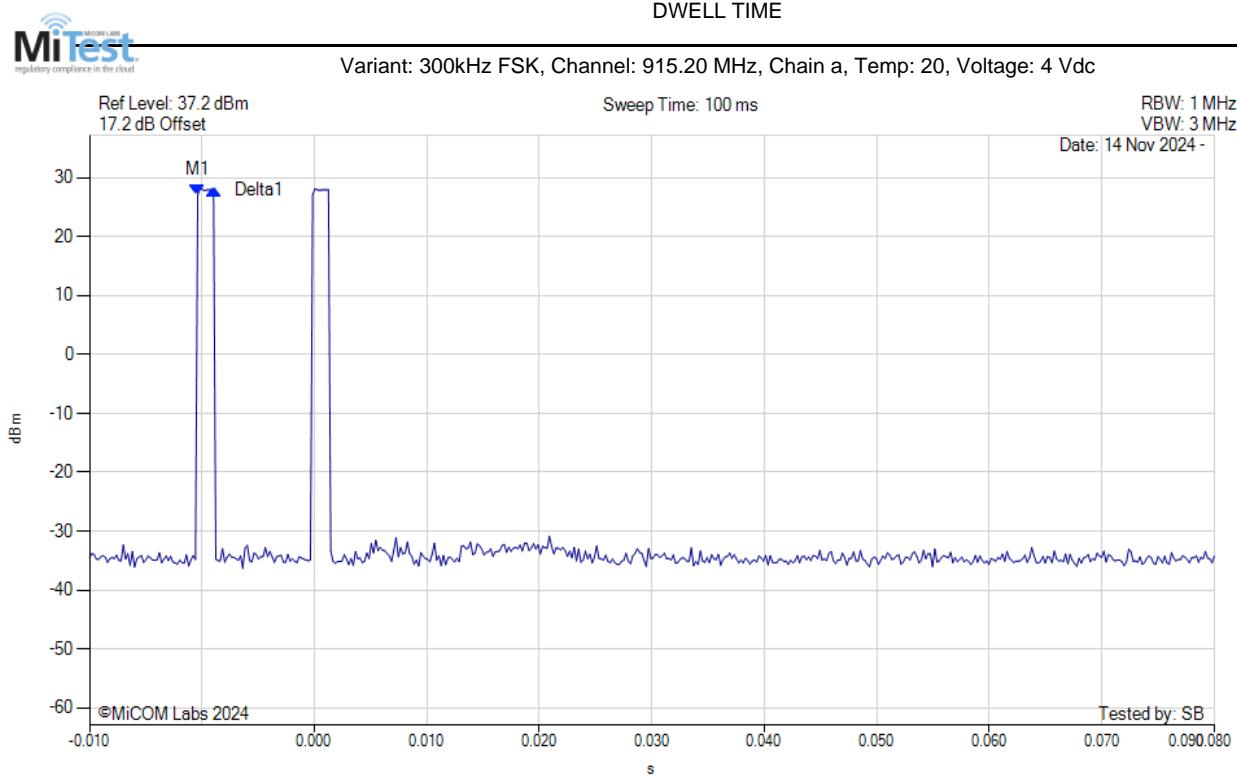


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : 27.033 dBm Delta1(915.20 MHz) : 0.001 s : 0.905 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

DWELL TIME



Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

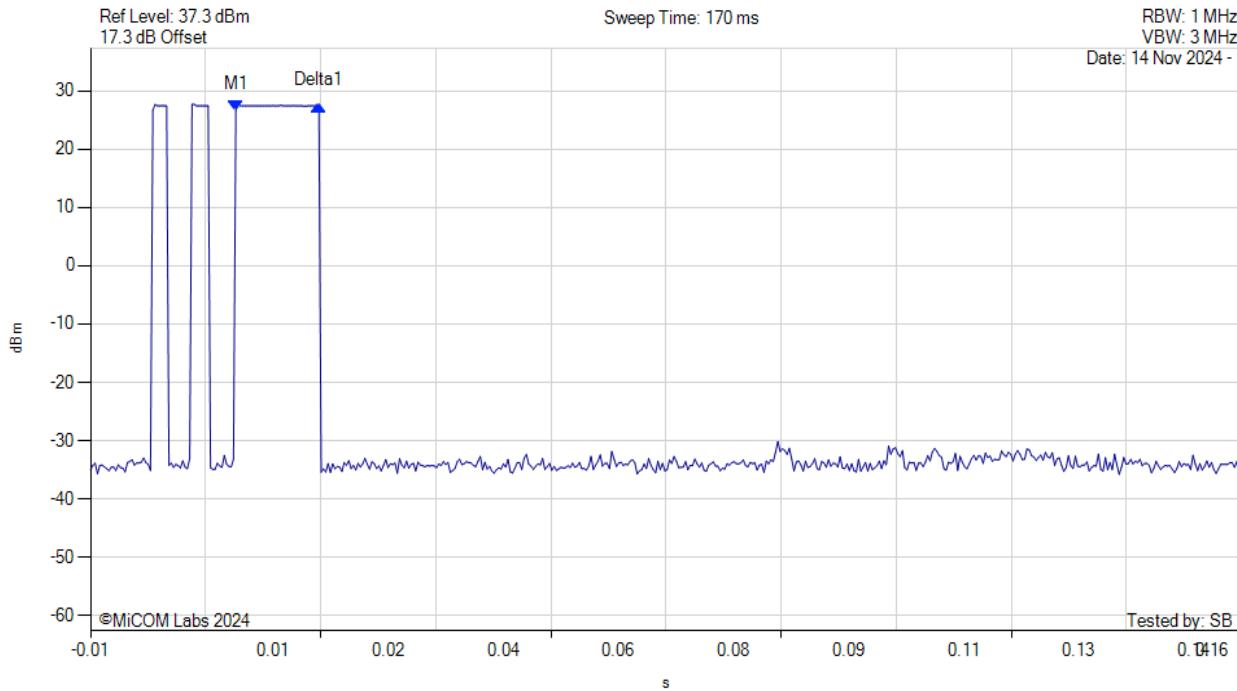


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.60 MHz) : 0.011 s : 26.680 dBm Delta1(915.60 MHz) : 0.012 s : 0.744 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

DWELL TIME



Variant: 300kHz GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

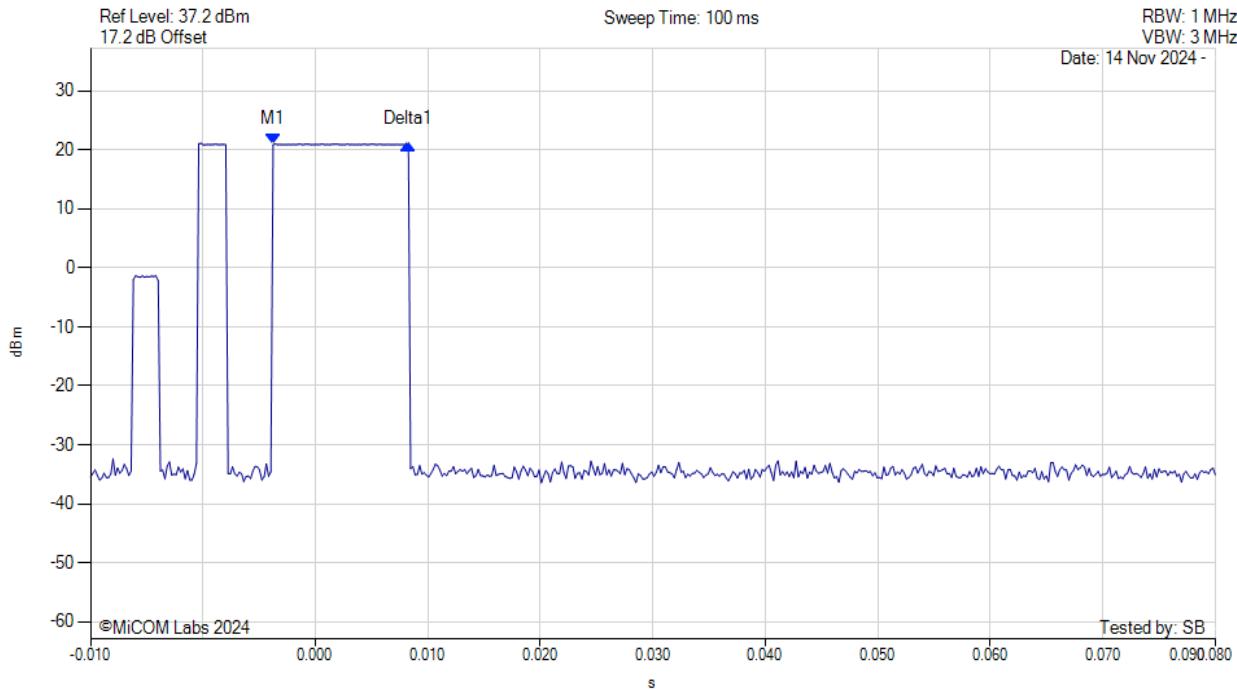


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : 0.006 s : 20.867 dBm Delta1(915.20 MHz) : 0.012 s : 0.000 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

DWELL TIME



Variant: 300kHz 200kbps GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

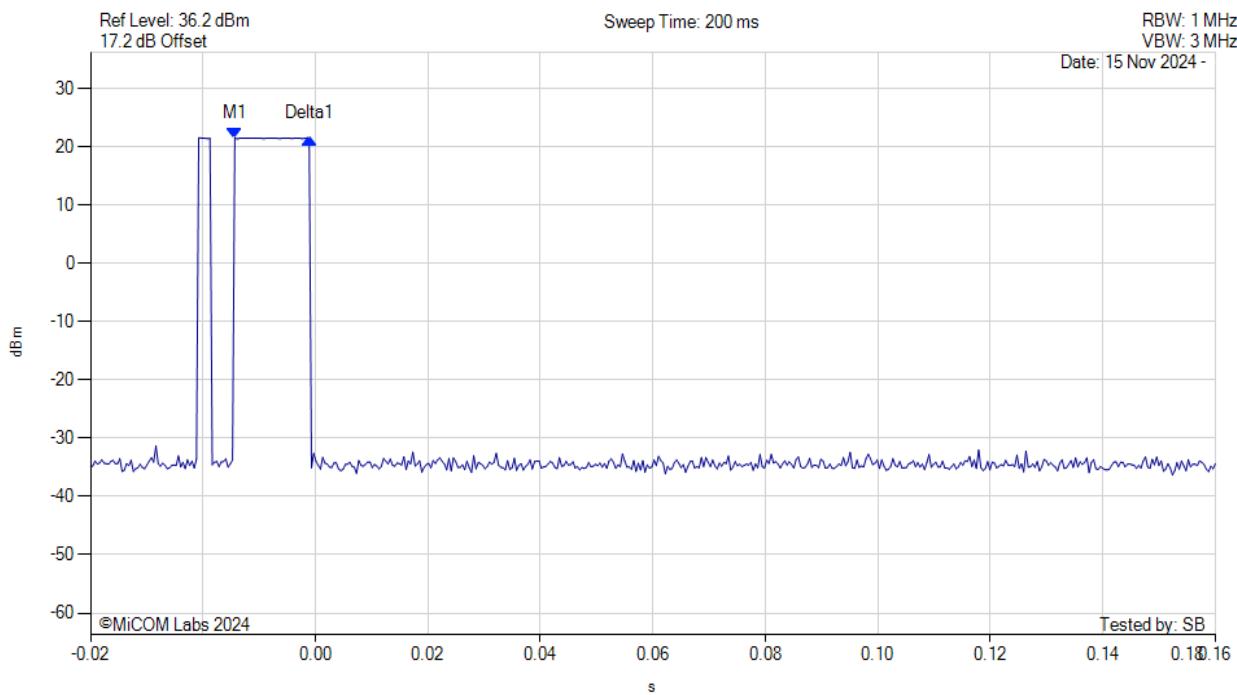


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.20 MHz) : 0.006 s : 21.506 dBm Delta1(915.20 MHz) : 0.013 s : -0.122 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

DWELL TIME




Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

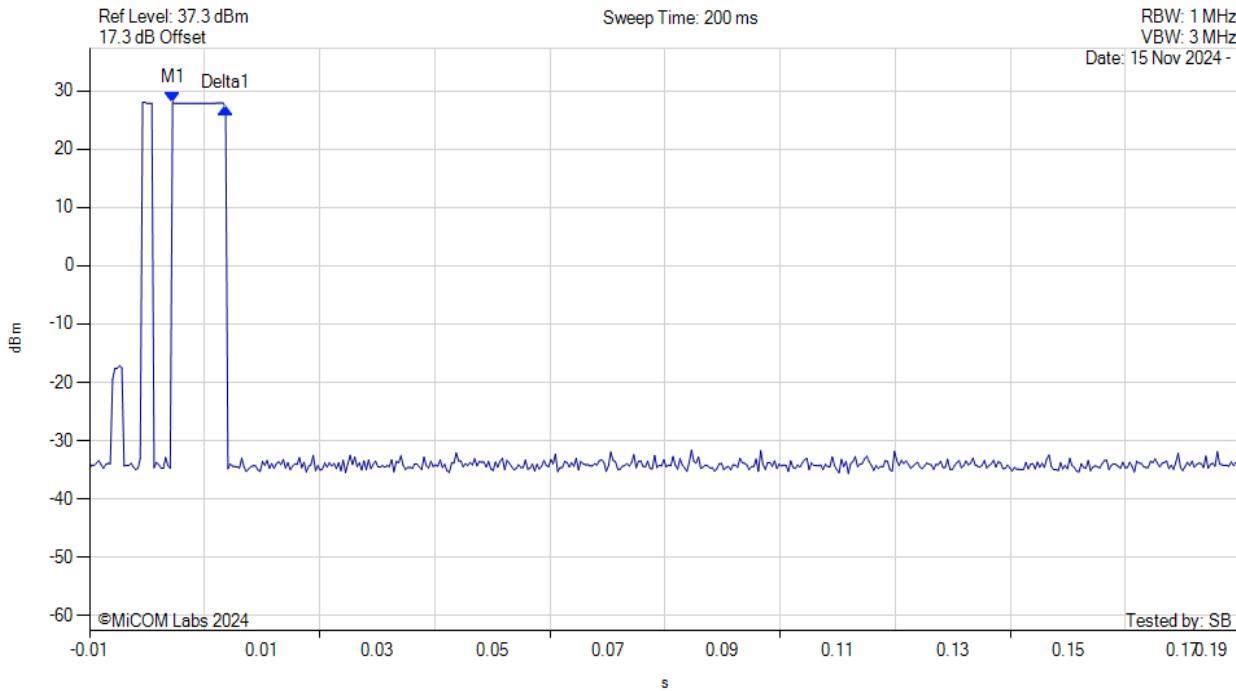

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1(915.60 MHz) : 0.004 s : 28.038 dBm Delta1(915.60 MHz) : 0.009 s : -0.905 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

A.2.4. Channel Occupancy

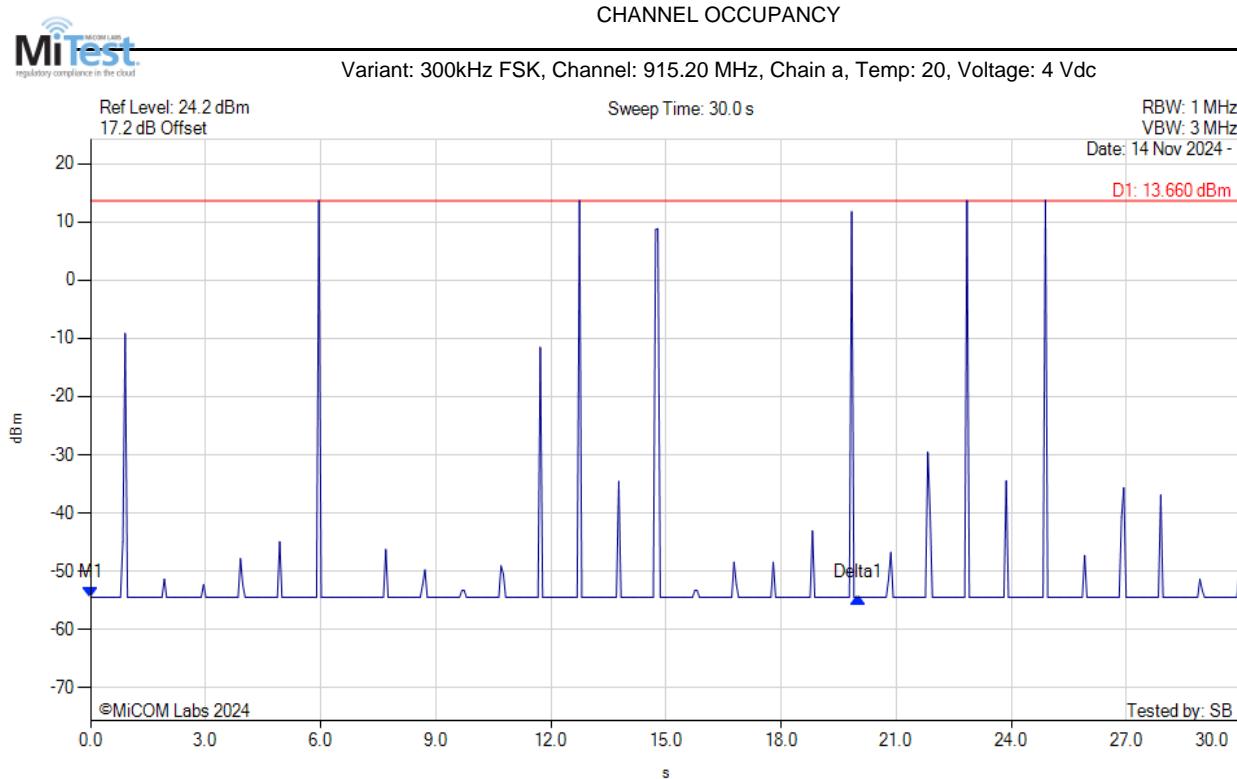


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : -54.463 dBm Delta1(915.20 MHz) : 20.000 s : 0.000 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL OCCUPANCY




Variant: 400kHz FSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

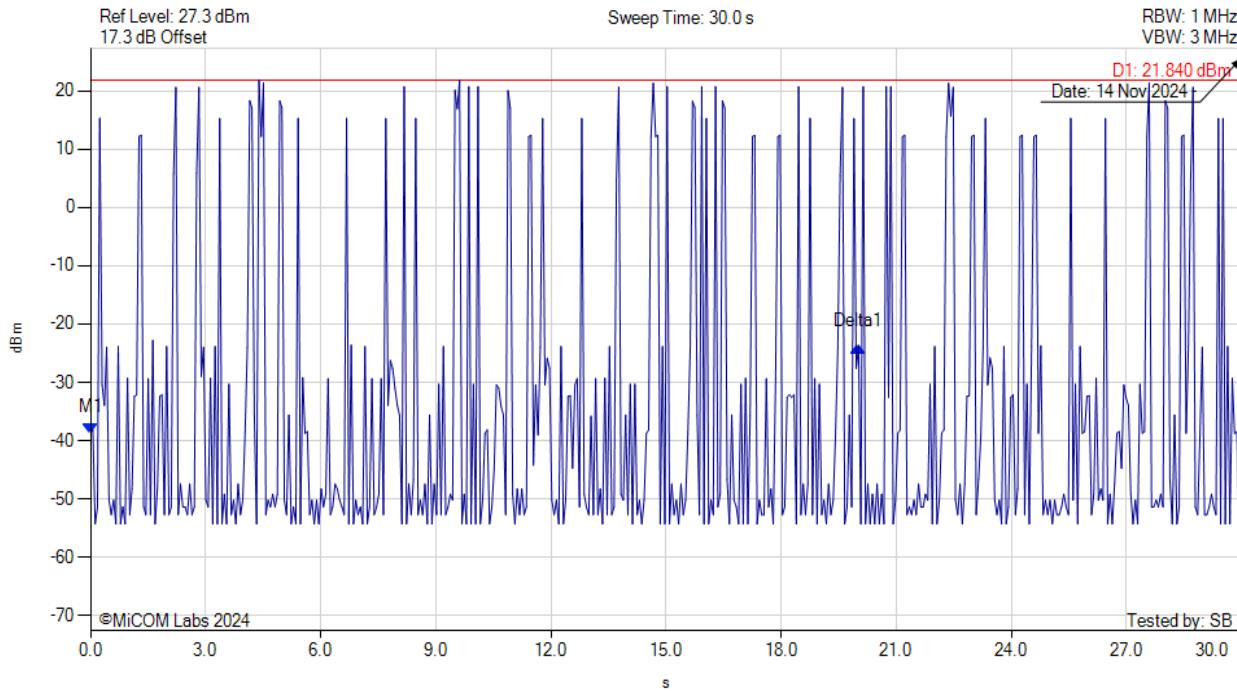

Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(915.60 MHz) : 0.000 s : -38.723 dBm Delta1(915.60 MHz) : 20.000 s : 14.860 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

CHANNEL OCCUPANCY

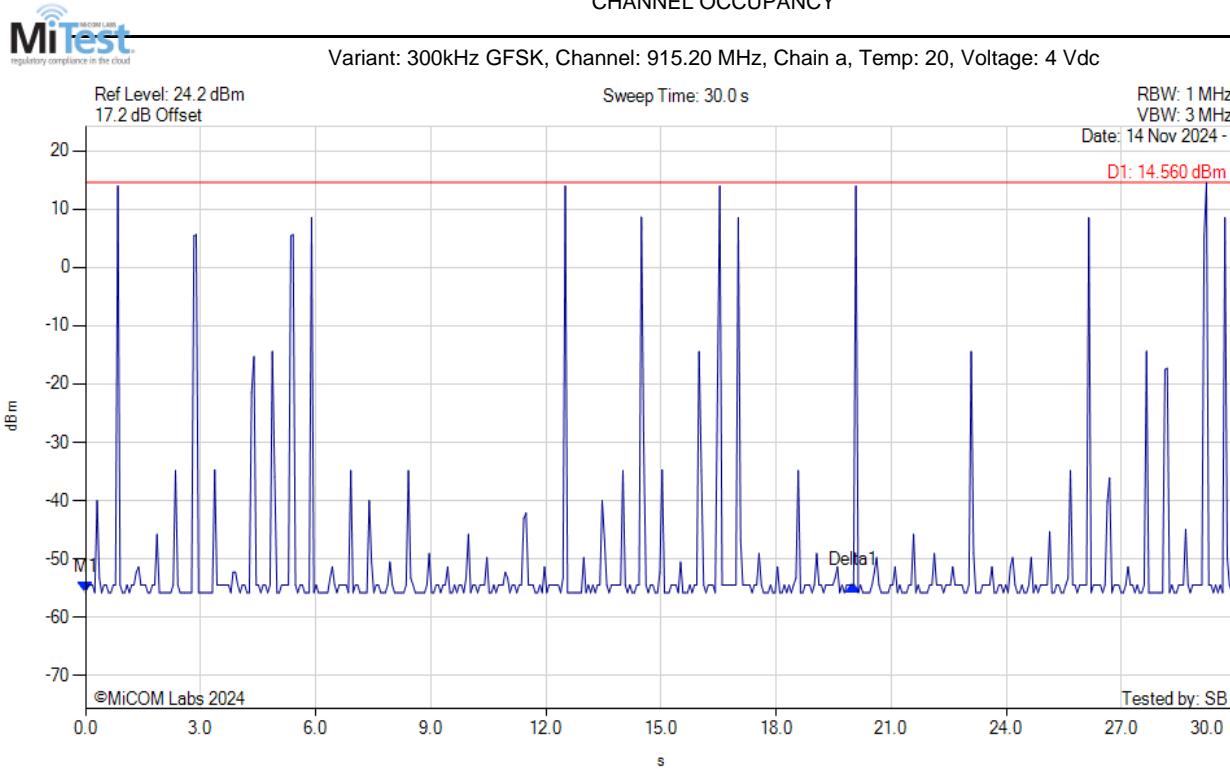


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : -55.802 dBm Delta1(915.20 MHz) : 20.000 s : 1.339 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL OCCUPANCY



Variant: 300kHz 200kbps GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

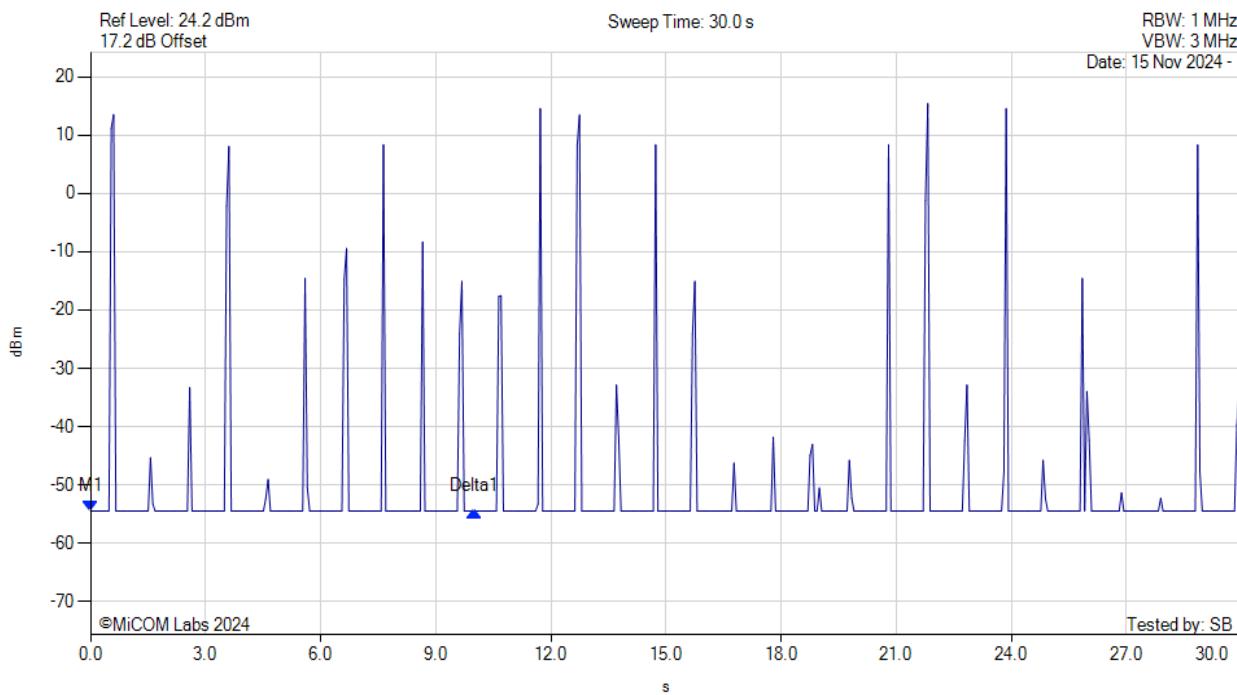


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(915.20 MHz) : 0.000 s : -54.463 dBm Delta1(915.20 MHz) : 10.000 s : 0.000 dB	Channel Frequency: 915.20 MHz

[back to matrix](#)

CHANNEL OCCUPANCY



Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

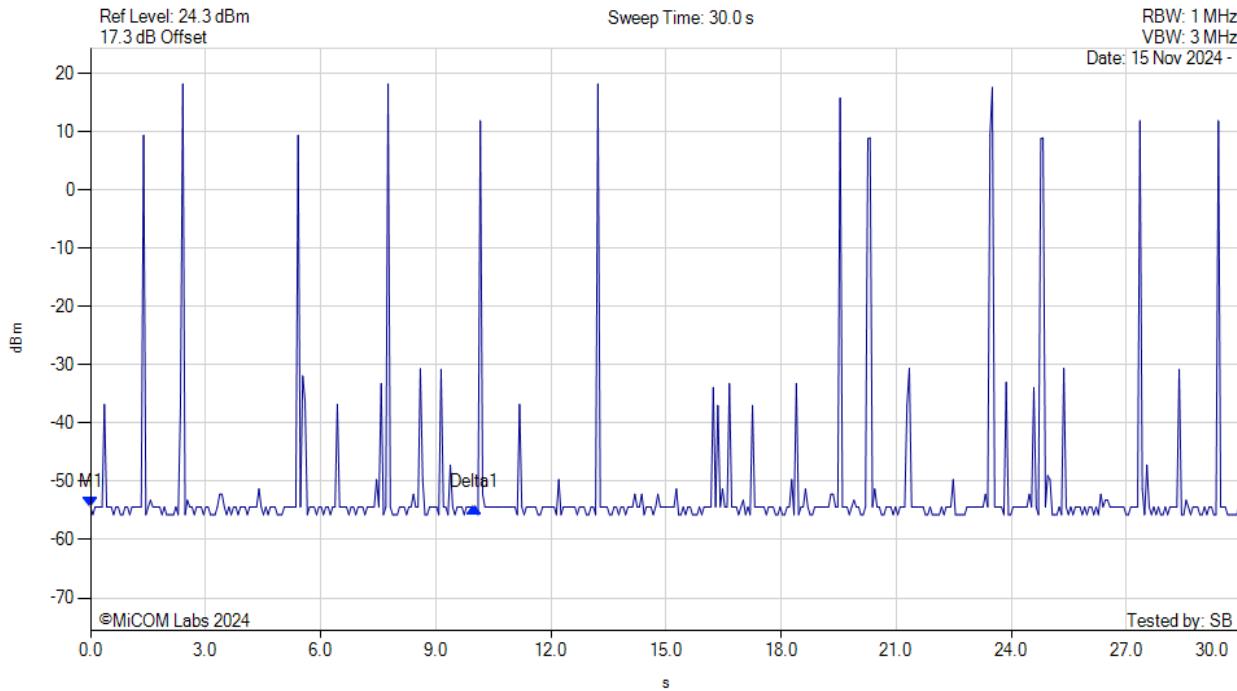


Analyzer Setup	Marker:Time:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1(915.60 MHz) : 0.000 s : -54.363 dBm Delta1(915.60 MHz) : 10.000 s : 0.000 dB	Channel Frequency: 915.60 MHz

[back to matrix](#)

A.3. Emissions

A.3.1. Conducted Emissions


A.3.1.1. Conducted Unwanted Spurious Emissions

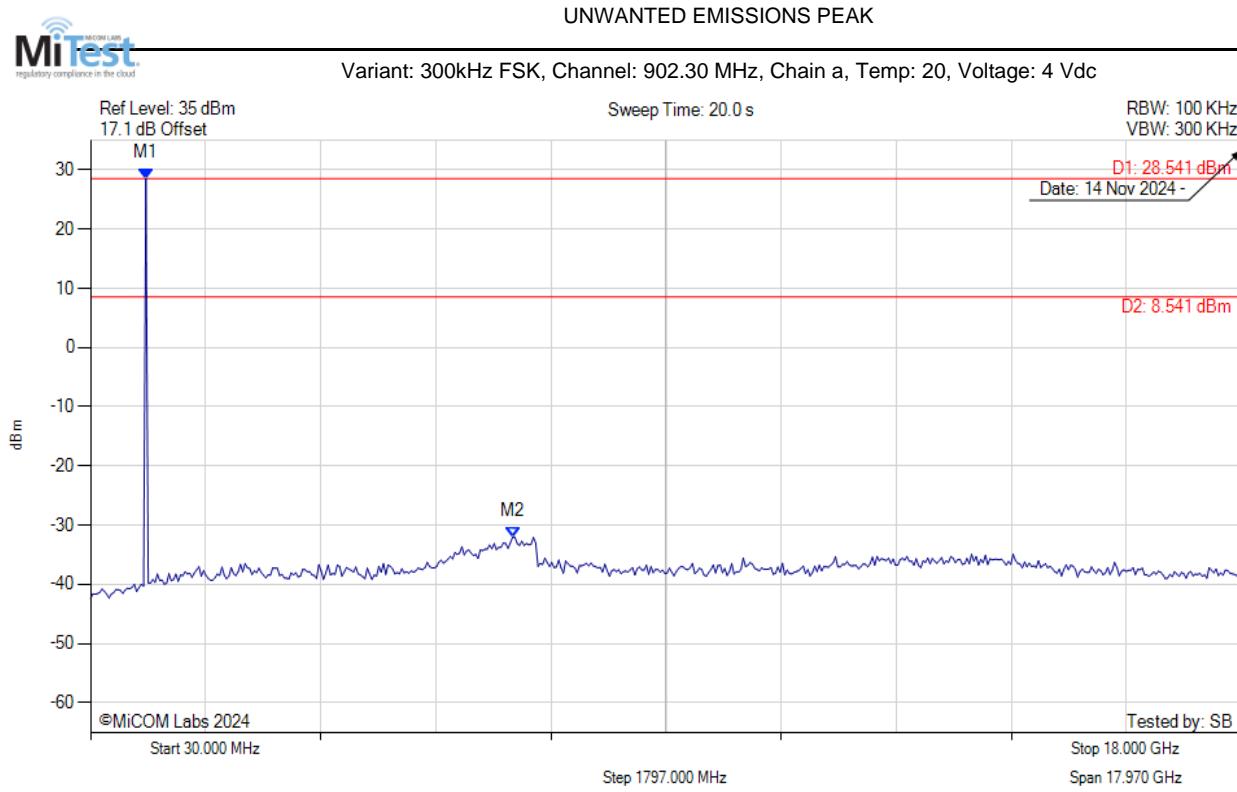

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.541 dBm M2 : 6620.200 MHz : -31.985 dBm	Limit: 8.54 dBm Margin: -40.52 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

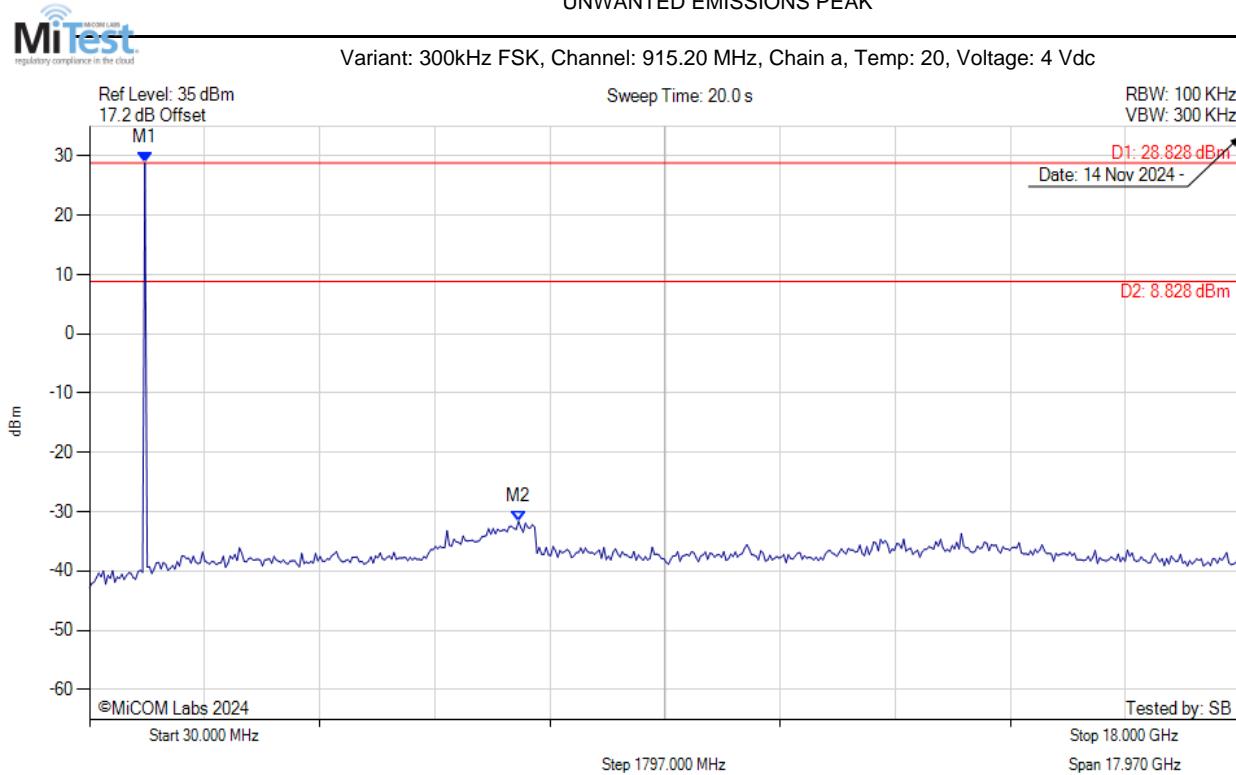

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.828 dBm M2 : 6728.236 MHz : -31.615 dBm	Limit: 8.83 dBm Margin: -40.45 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

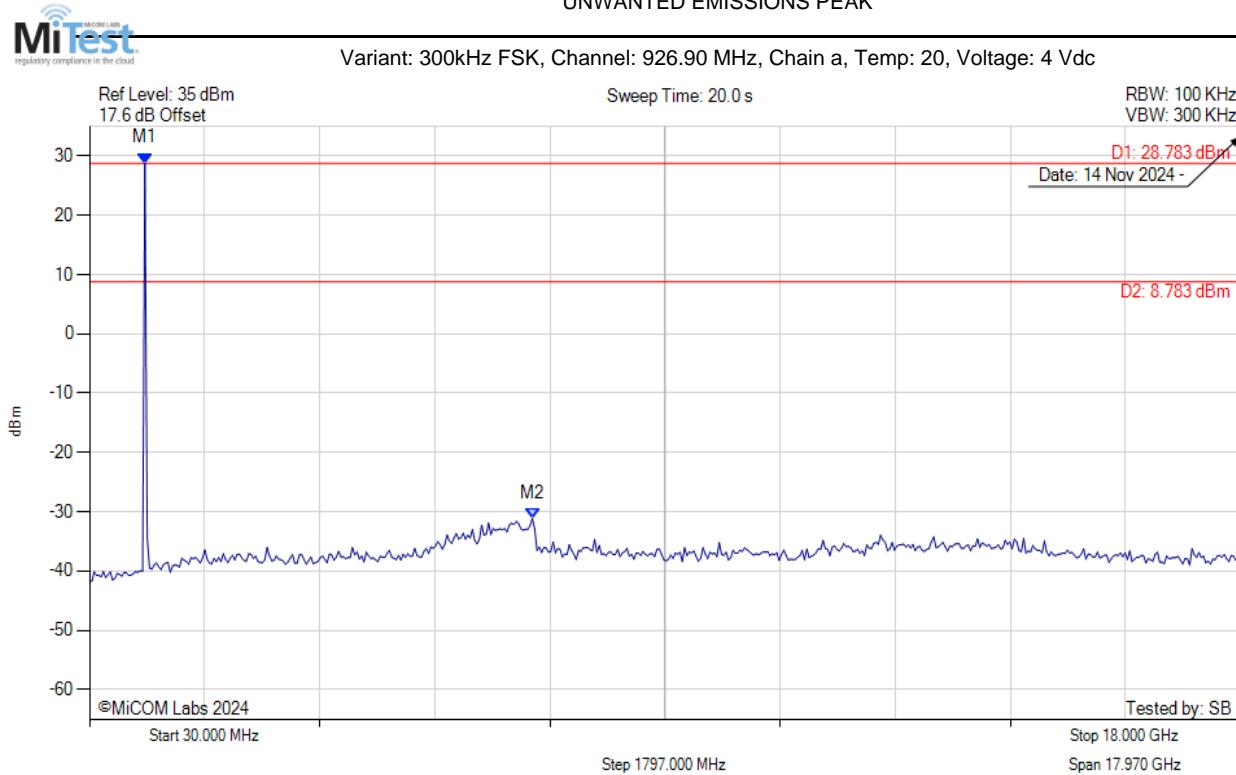

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.783 dBm M2 : 6944.309 MHz : -31.103 dBm	Limit: 8.78 dBm Margin: -39.88 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

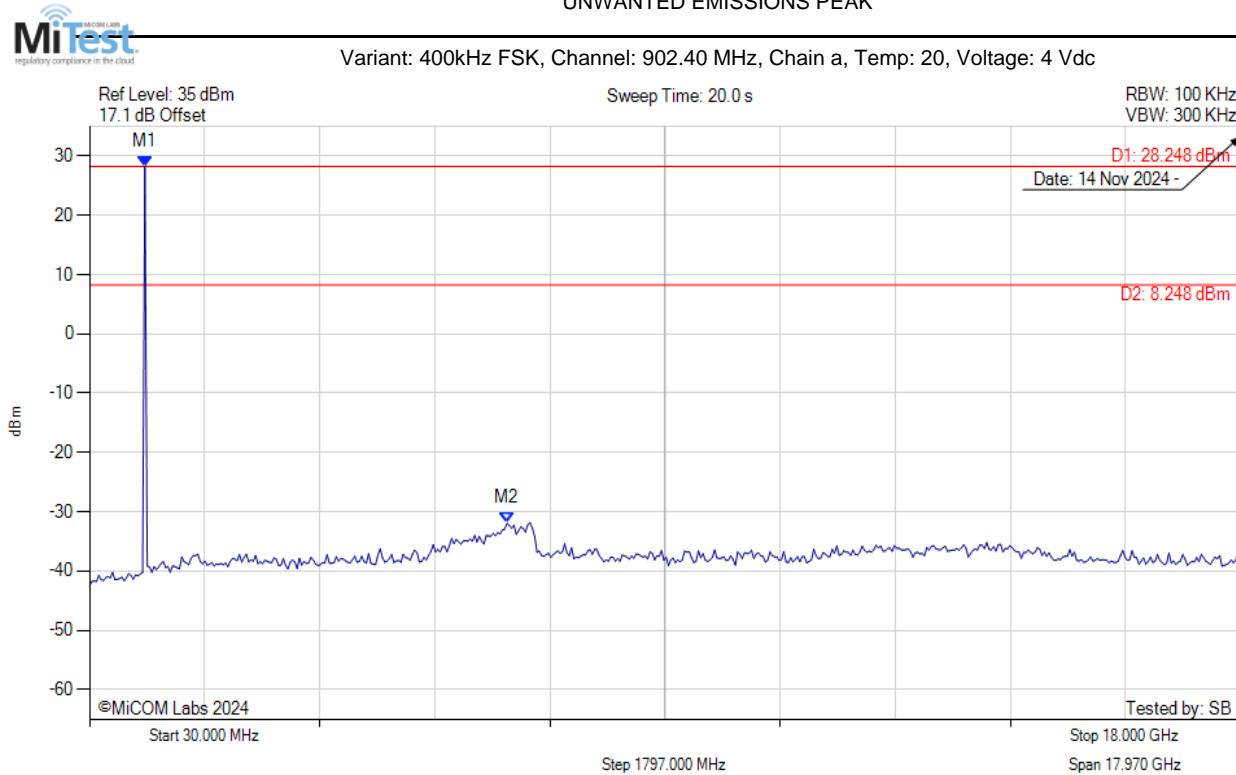

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.248 dBm M2 : 6548.176 MHz : -31.949 dBm	Limit: 8.25 dBm Margin: -40.20 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

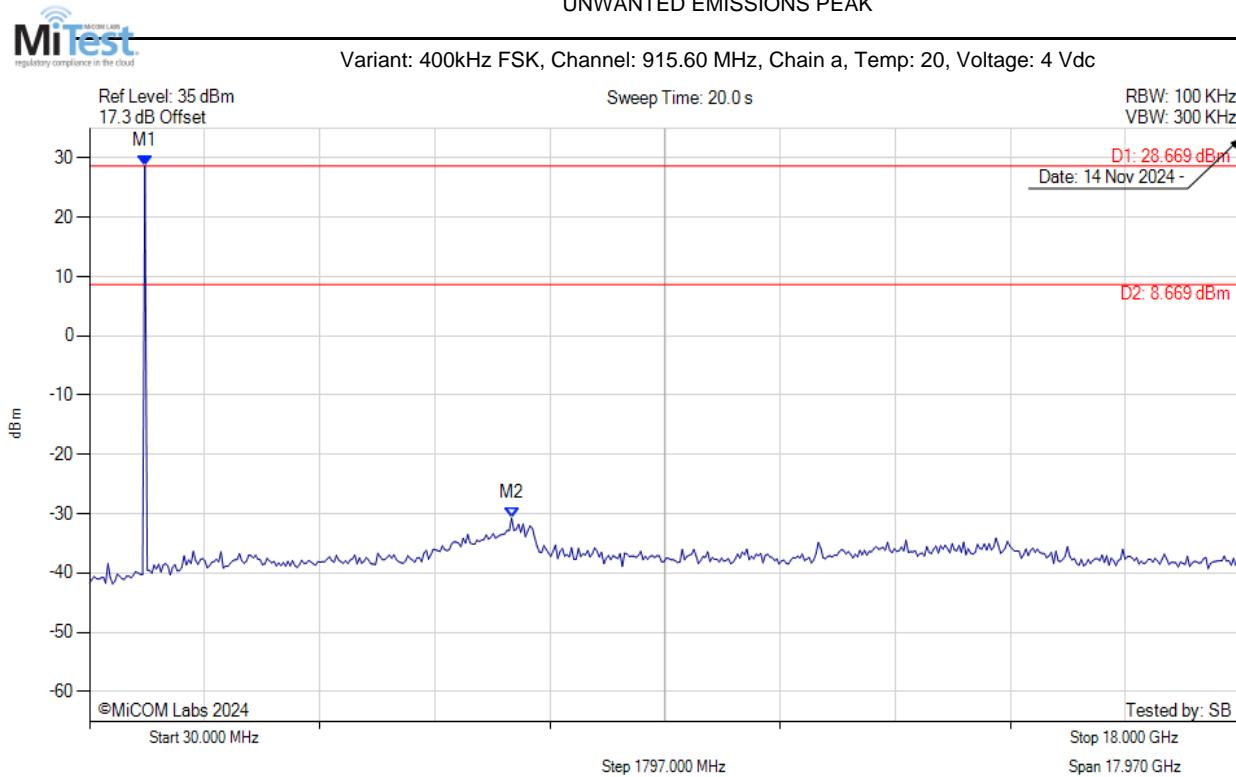

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.669 dBm M2 : 6620.200 MHz : -30.723 dBm	Limit: 8.67 dBm Margin: -39.39 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK

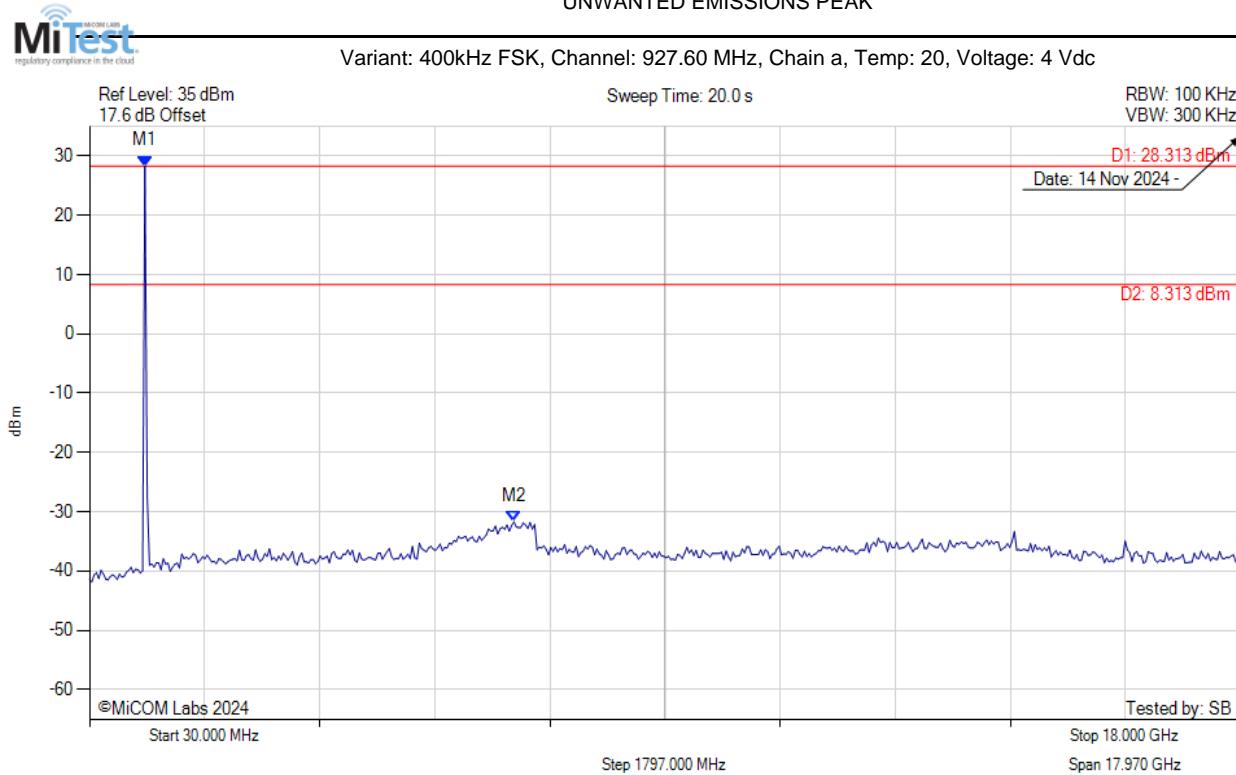


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.313 dBm M2 : 6656.212 MHz : -31.707 dBm	Limit: 8.31 dBm Margin: -40.02 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK




Variant: 300kHz GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

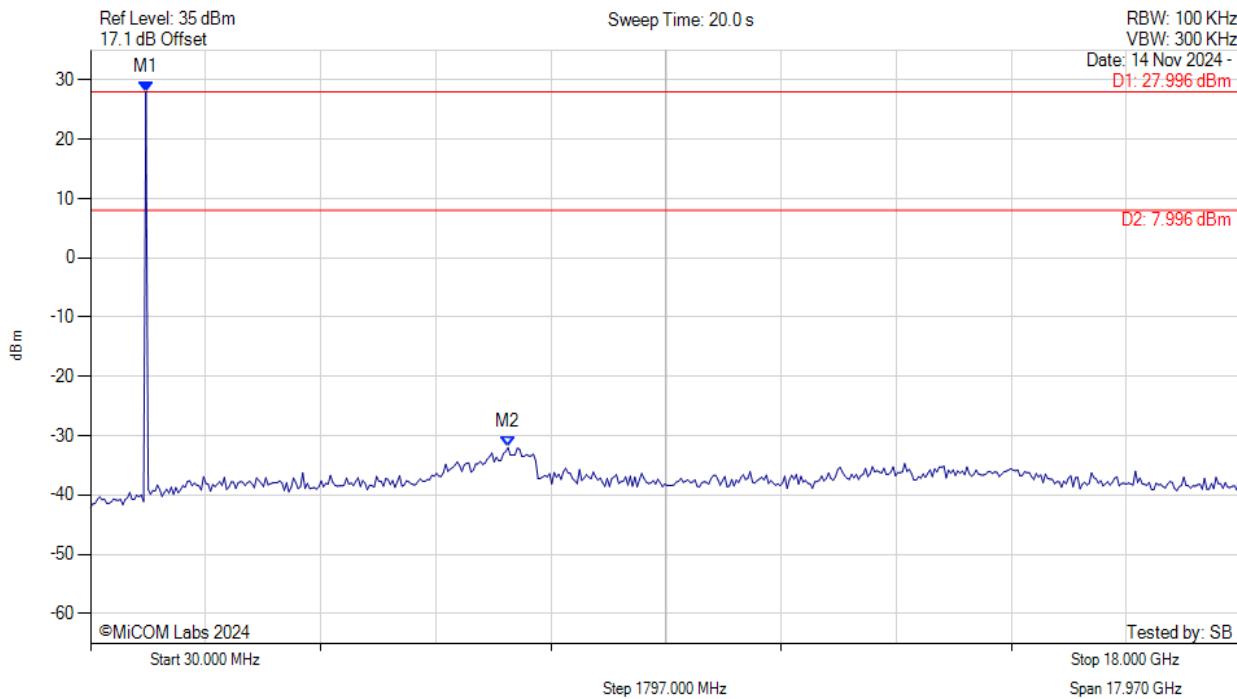

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 27.996 dBm M2 : 6548.176 MHz : -31.971 dBm	Limit: 8.00 dBm Margin: -39.97 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

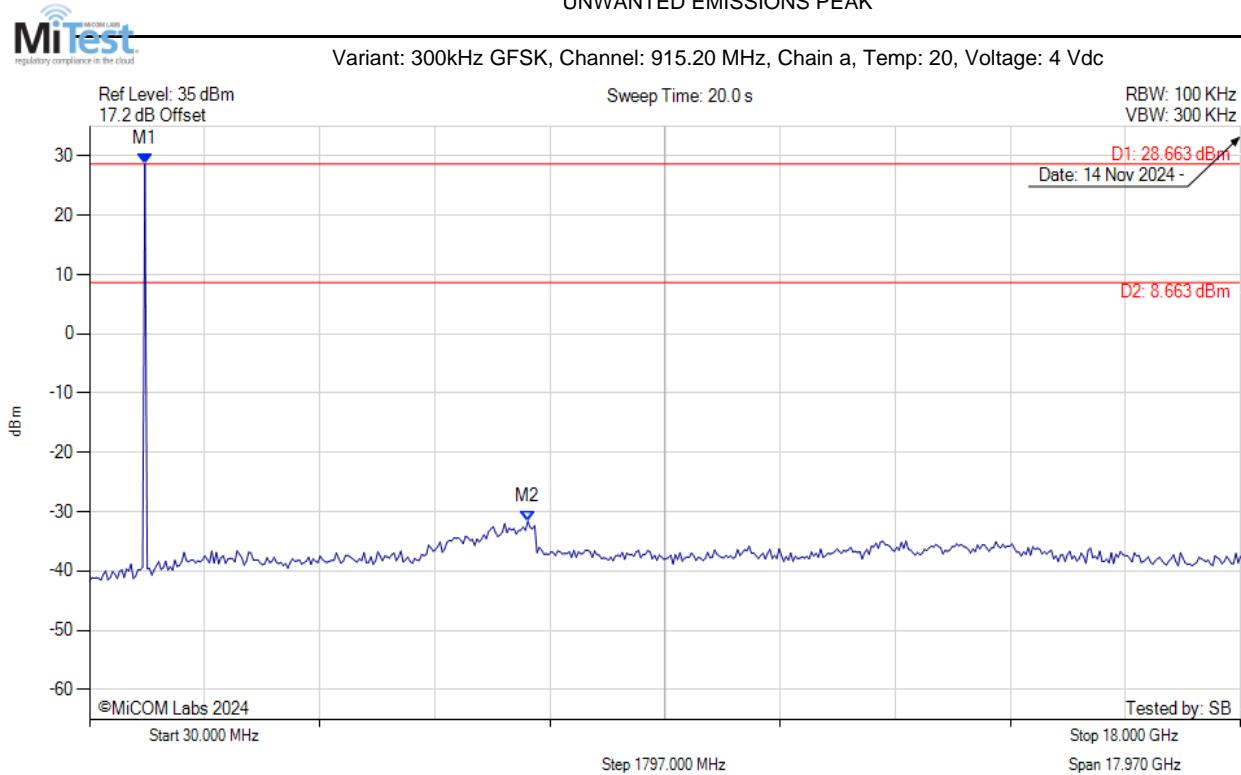

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.663 dBm M2 : 6872.285 MHz : -31.632 dBm	Limit: 8.66 dBm Margin: -40.29 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK

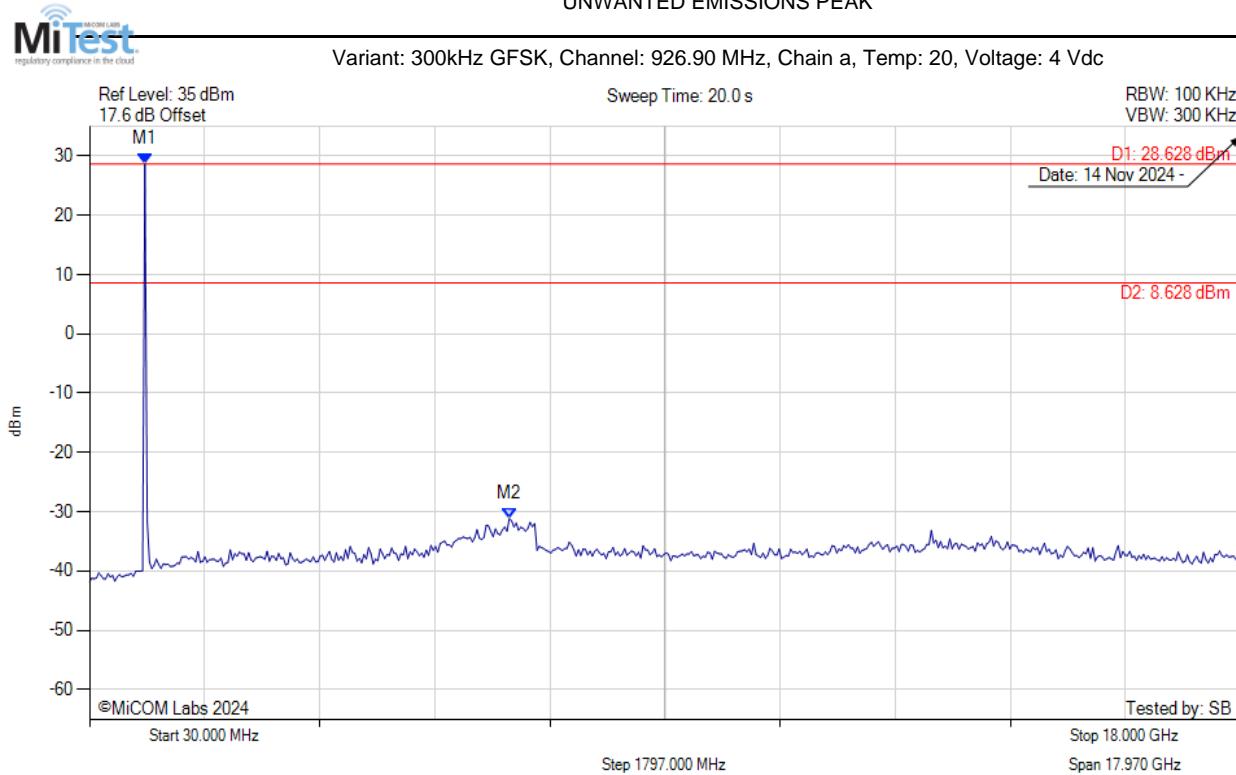


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.628 dBm M2 : 6584.188 MHz : -31.160 dBm	Limit: 8.63 dBm Margin: -39.79 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: 300kHz 200kbps GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

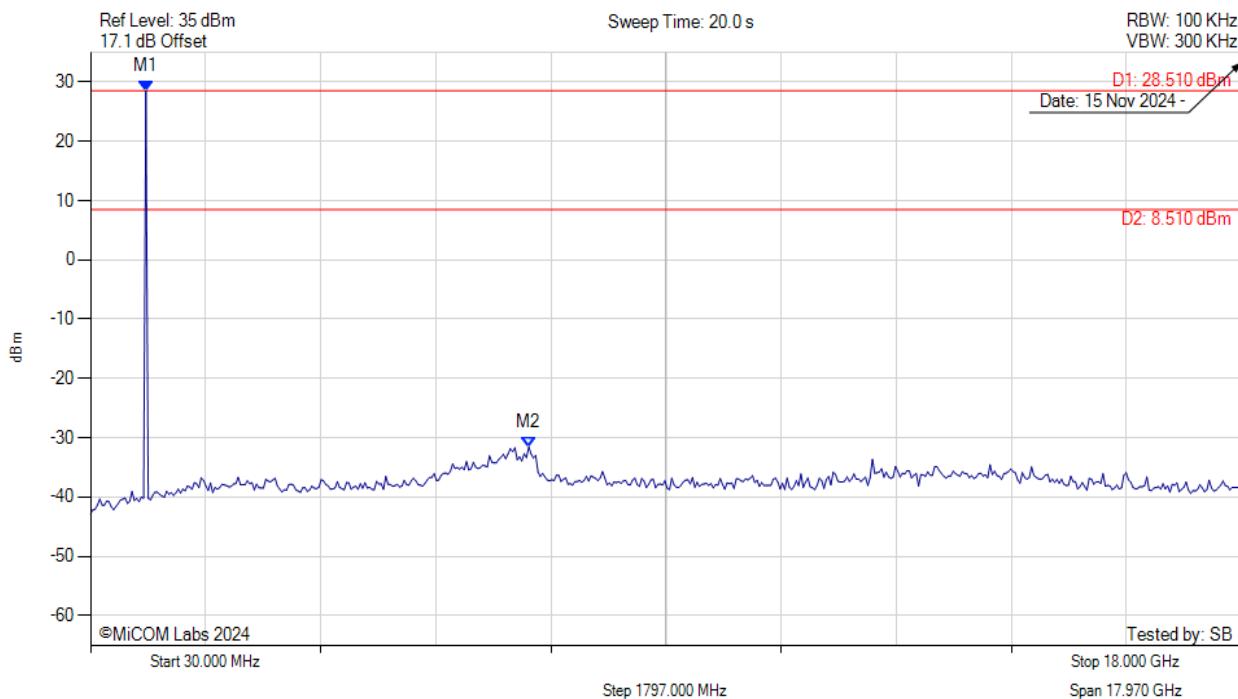


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.508 dBm M2 : 6872.285 MHz : -31.540 dBm	Limit: 8.51 dBm Margin: -40.05 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK




Variant: 300kHz 200kbps GFSK, Channel: 915.20 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

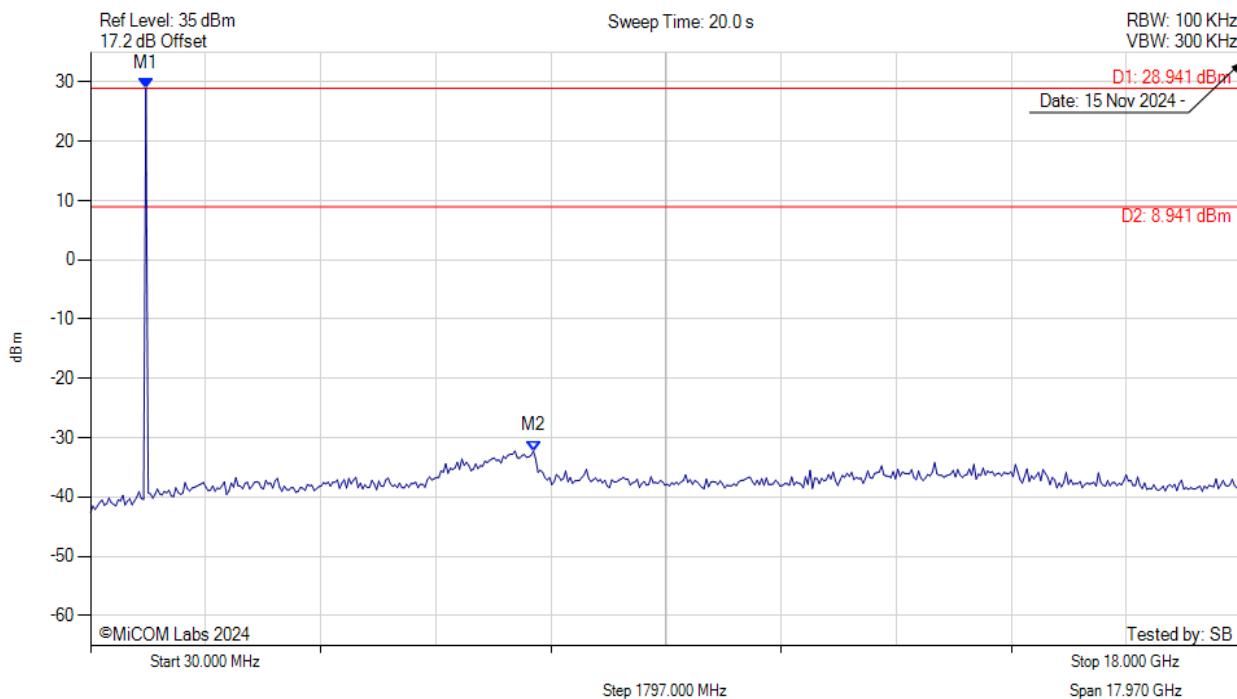

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.941 dBm M2 : 6944.309 MHz : -32.207 dBm	Limit: 8.94 dBm Margin: -41.15 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK

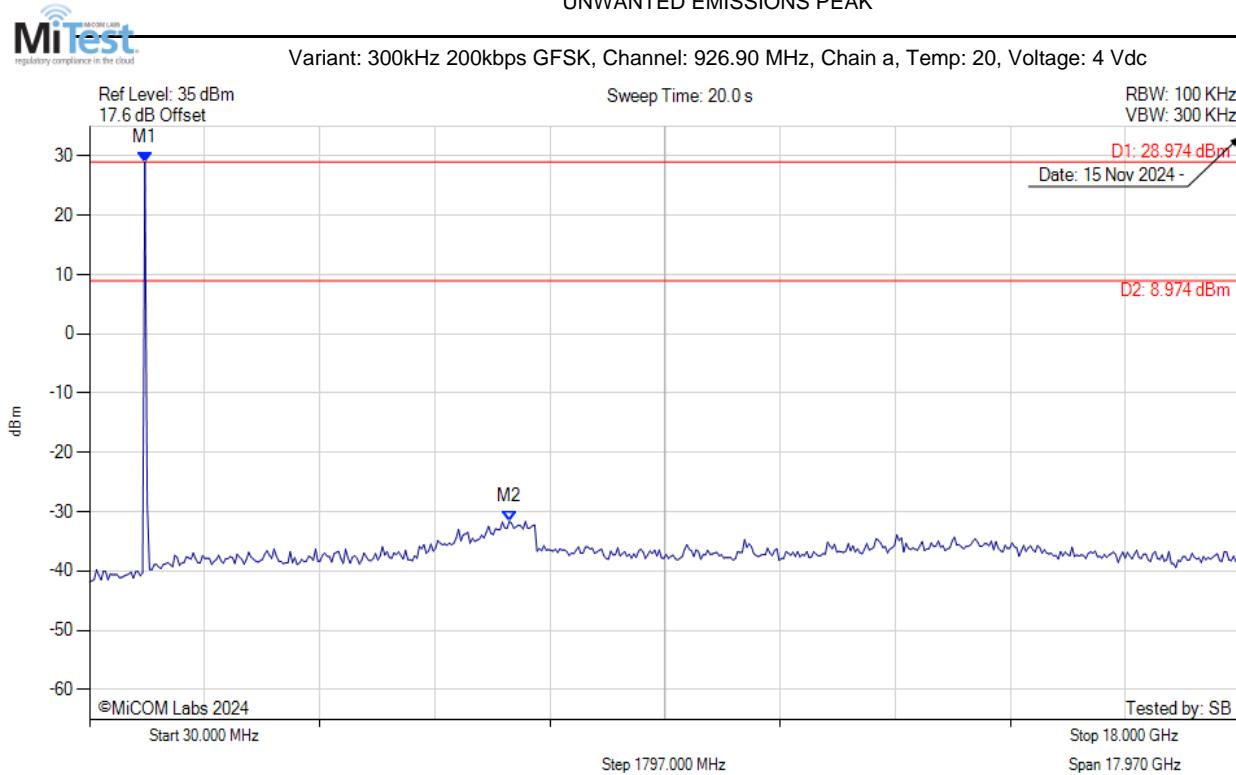


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.974 dBm M2 : 6584.188 MHz : -31.621 dBm	Limit: 8.97 dBm Margin: -40.59 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: 400kHz GFSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

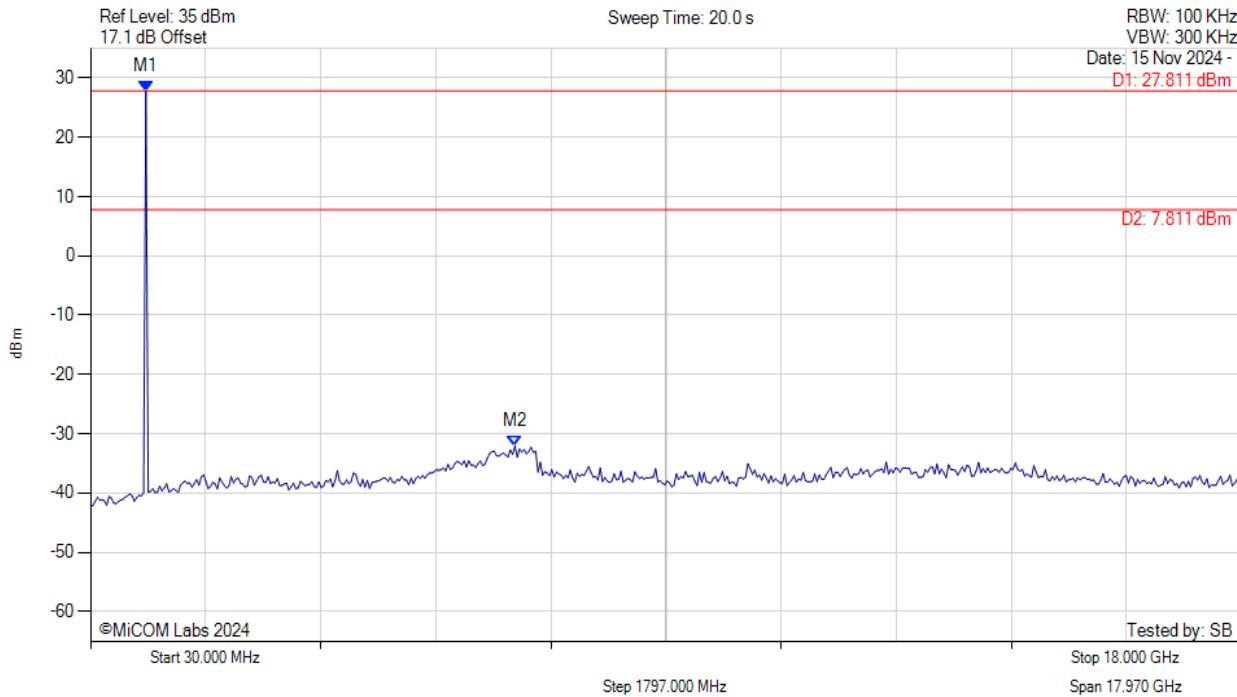


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 27.811 dBm M2 : 6656.212 MHz : -32.049 dBm	Limit: 7.81 dBm Margin: -39.86 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK




Variant: 400kHz GFSK, Channel: 915.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

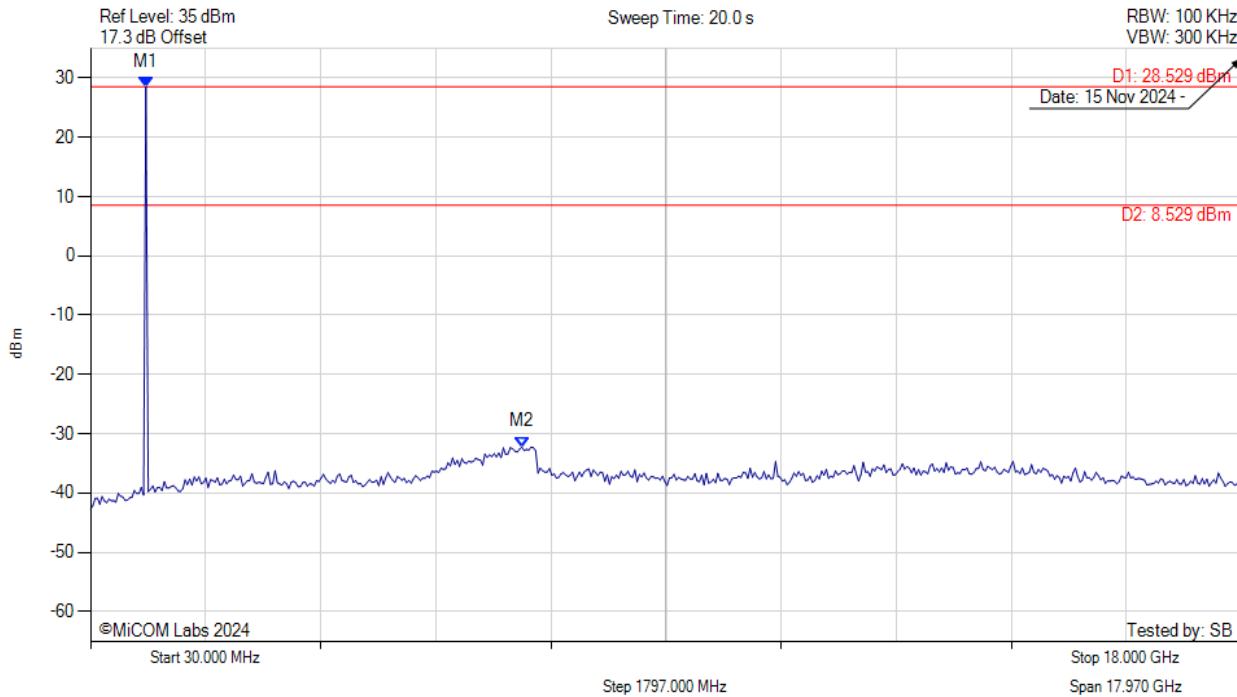

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.529 dBm M2 : 6764.248 MHz : -32.219 dBm	Limit: 8.53 dBm Margin: -40.75 dB

[back to matrix](#)


UNWANTED EMISSIONS PEAK

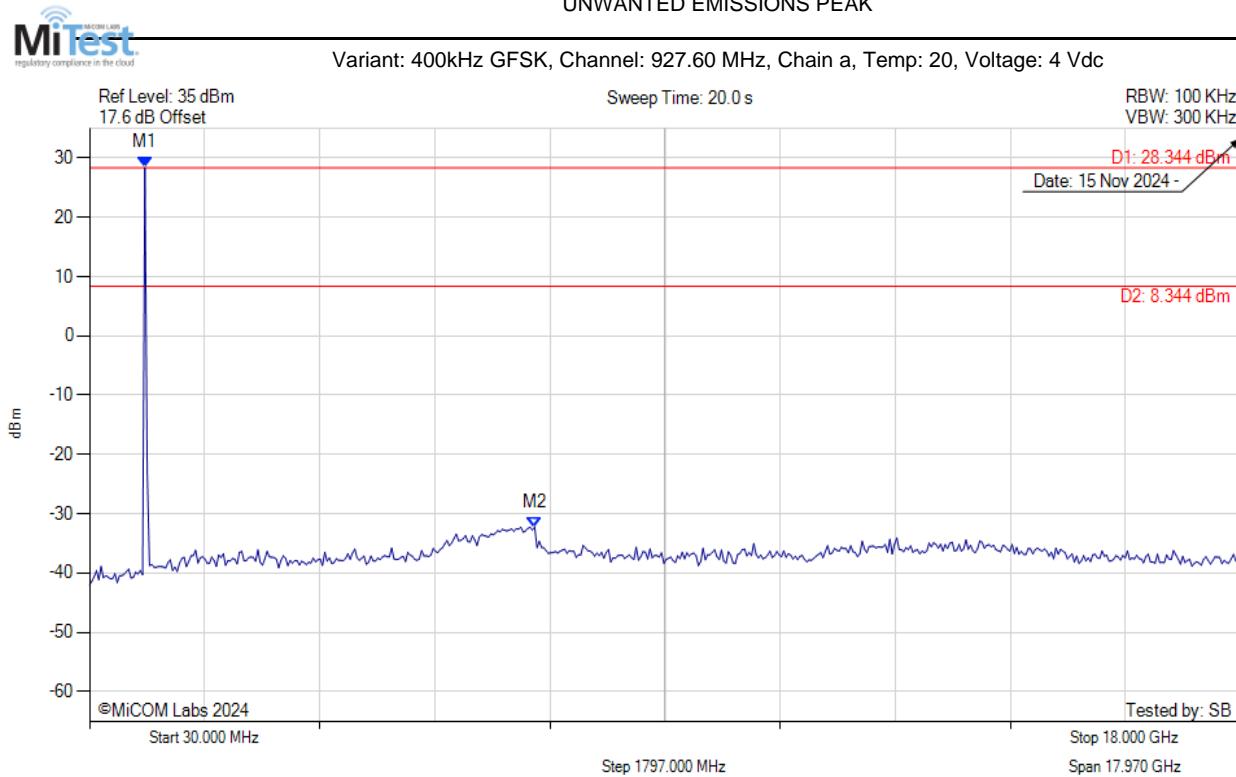

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 894.289 MHz : 28.344 dBm M2 : 6980.321 MHz : -32.238 dBm	Limit: 8.34 dBm Margin: -40.58 dB

[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions

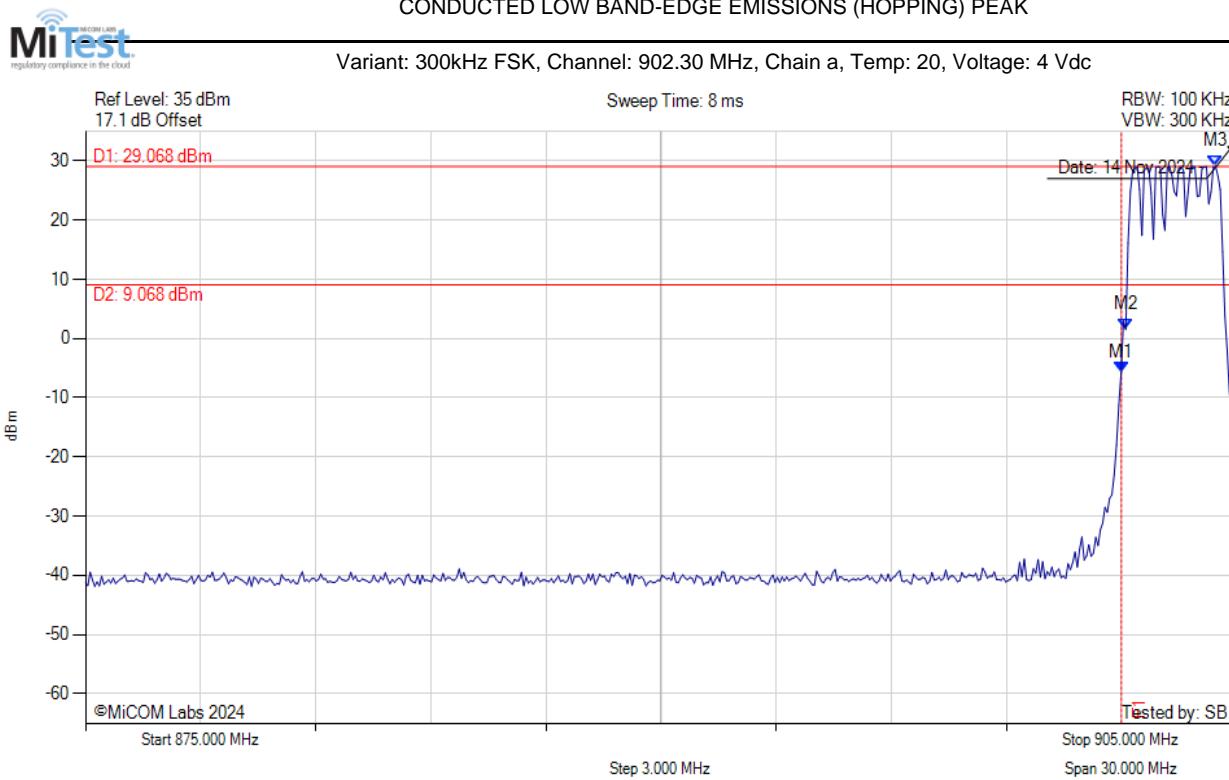


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -5.736 dBm M2 : 902.114 MHz : 1.510 dBm M3 : 904.459 MHz : 29.068 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 400kHz FSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

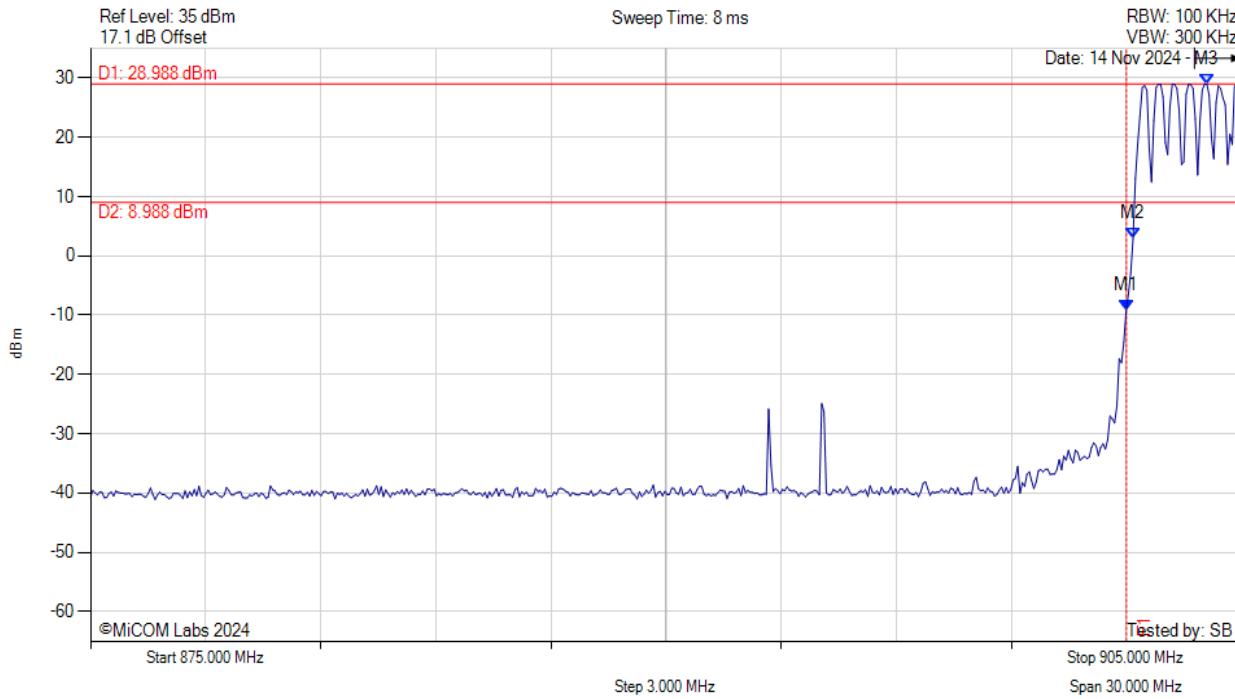


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -9.199 dBm M2 : 902.174 MHz : 2.889 dBm M3 : 904.098 MHz : 28.988 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 300kHz GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

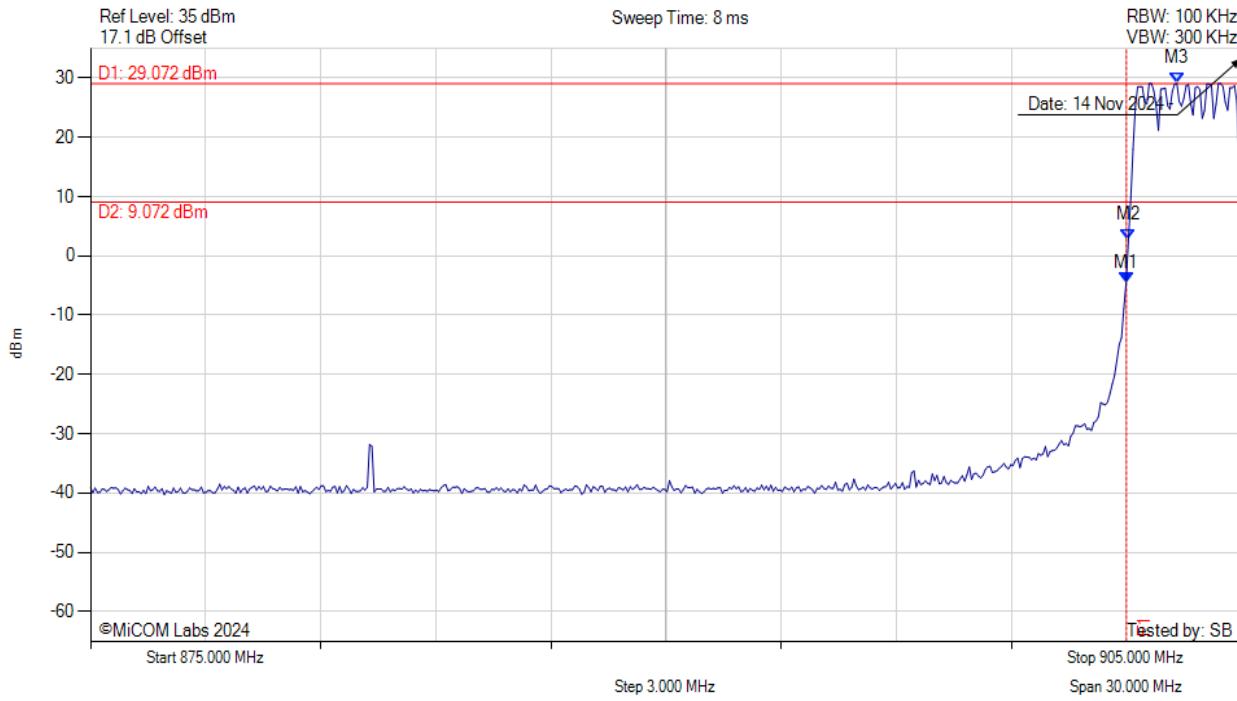


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -4.479 dBm M2 : 902.054 MHz : 2.743 dBm M3 : 903.317 MHz : 29.072 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 300kHz 200kbps GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

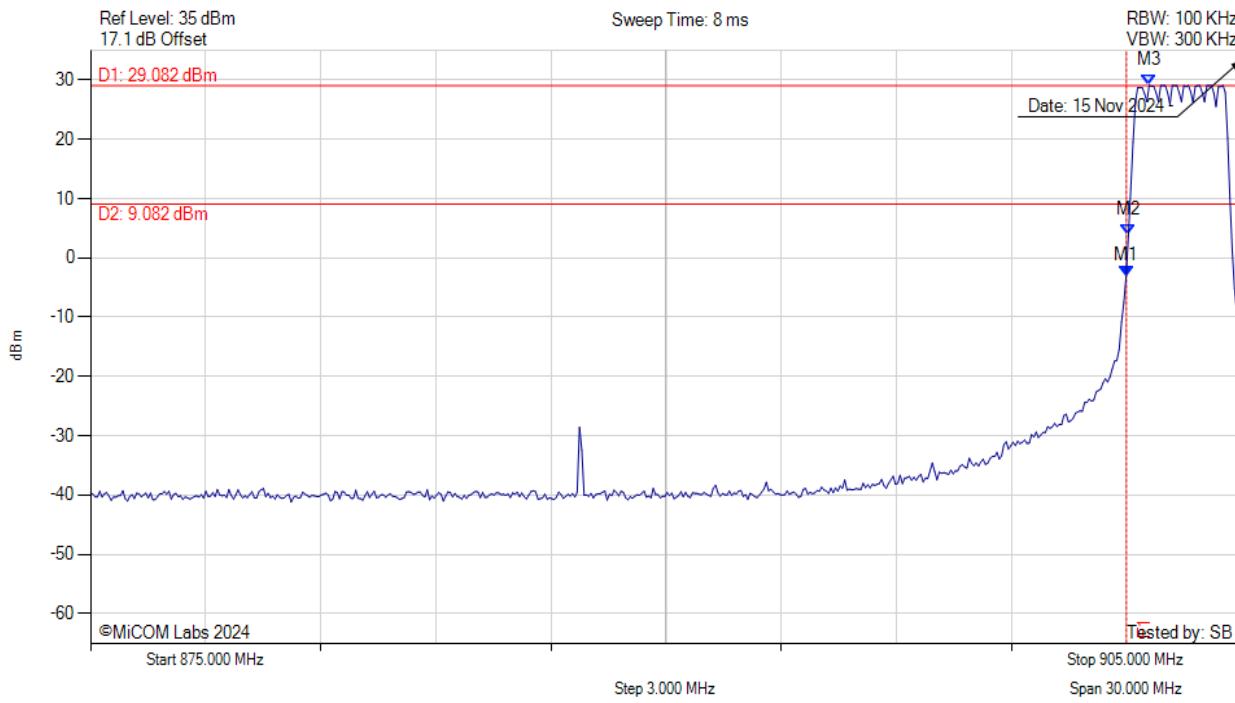


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -3.037 dBm M2 : 902.054 MHz : 3.821 dBm M3 : 902.595 MHz : 29.082 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 400kHz GFSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

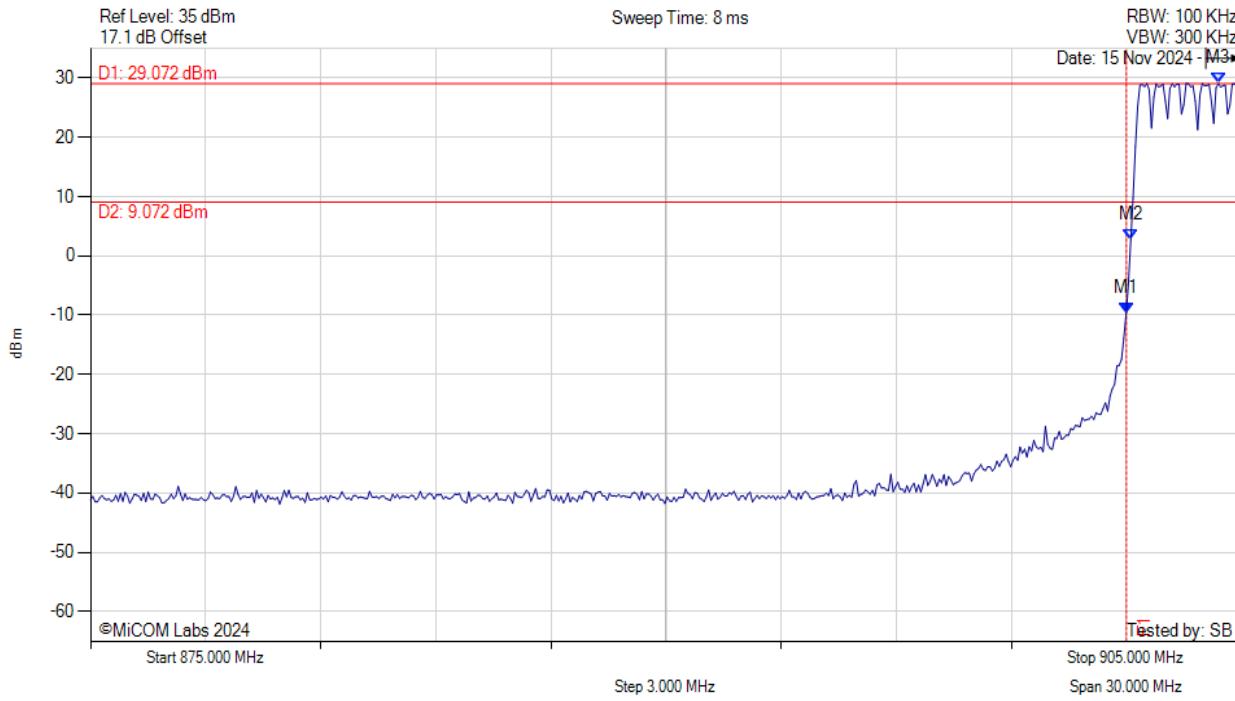


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -9.724 dBm M2 : 902.114 MHz : 2.668 dBm M3 : 904.399 MHz : 29.072 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz FSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

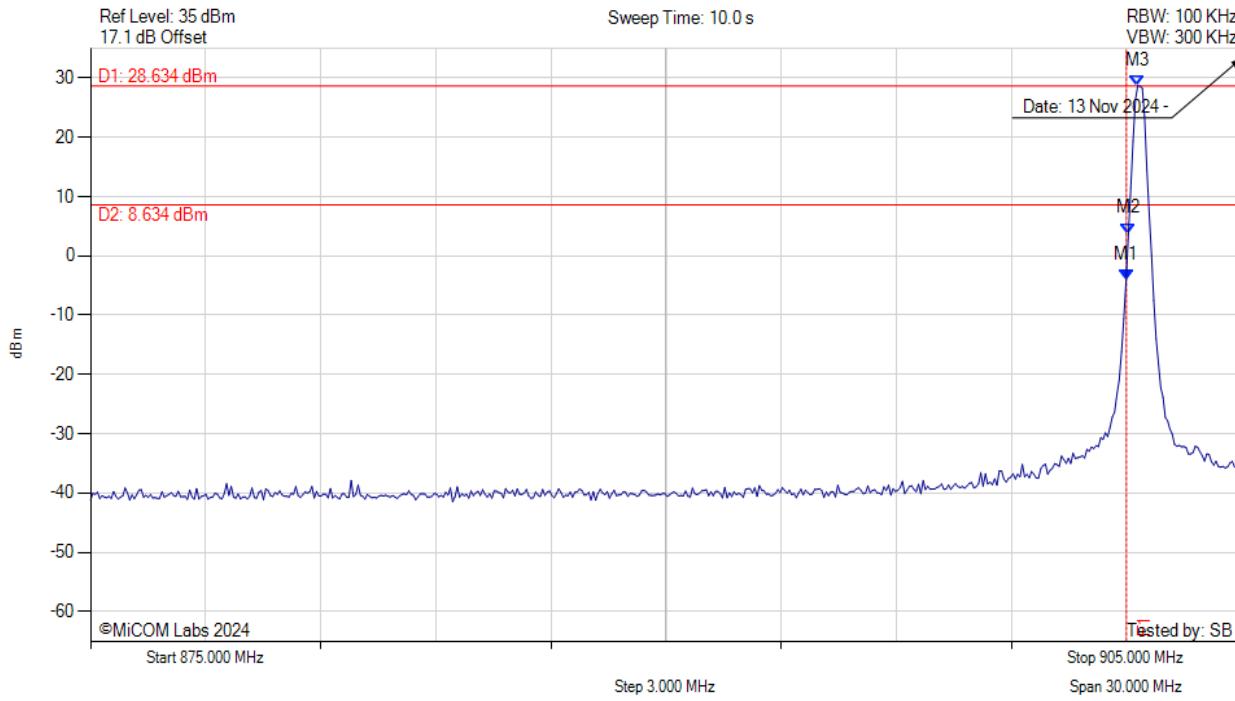


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -3.967 dBm M2 : 902.054 MHz : 3.782 dBm M3 : 902.295 MHz : 28.634 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 400kHz FSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

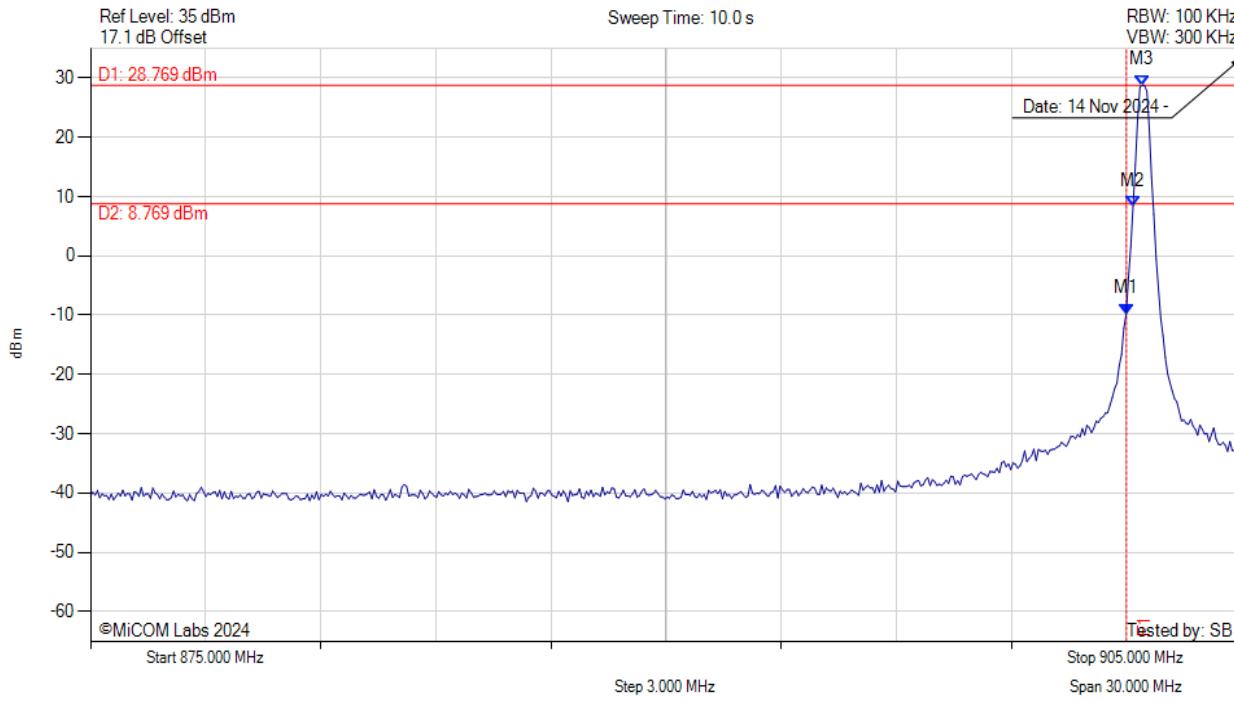


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -9.793 dBm M2 : 902.174 MHz : 8.368 dBm M3 : 902.415 MHz : 28.769 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

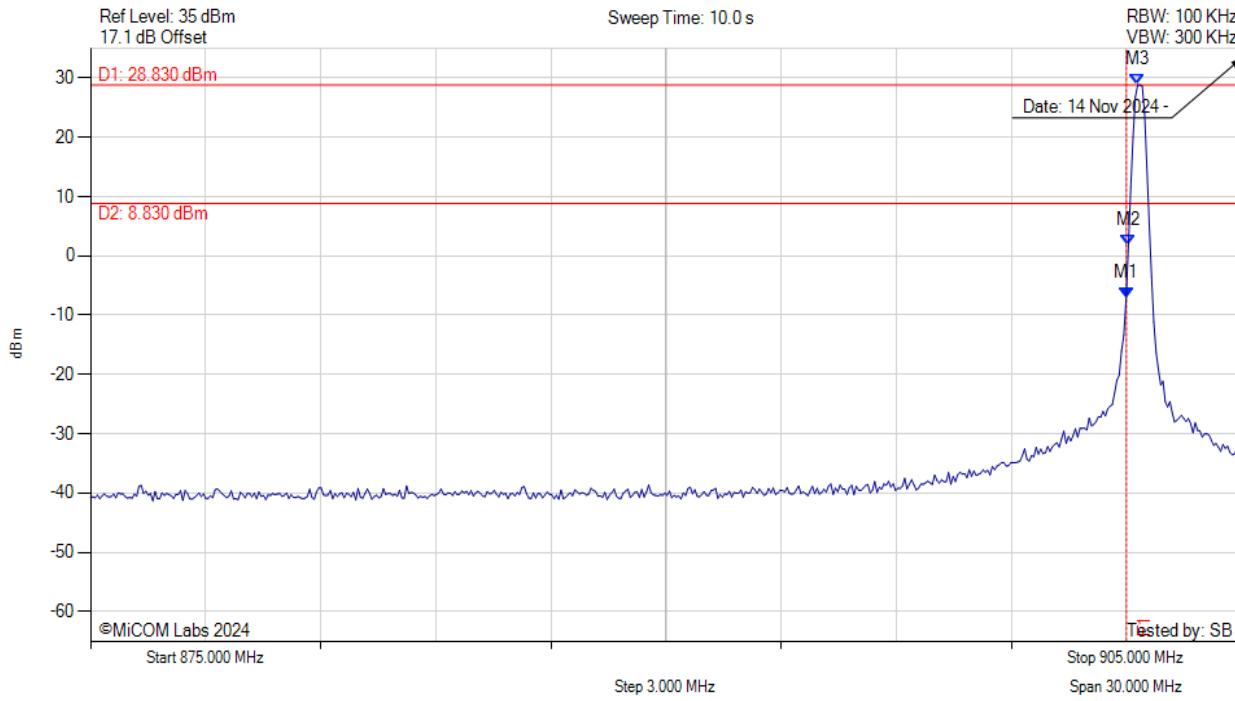


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -7.158 dBm M2 : 902.054 MHz : 1.852 dBm M3 : 902.295 MHz : 28.830 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz 200kbps GFSK, Channel: 902.30 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

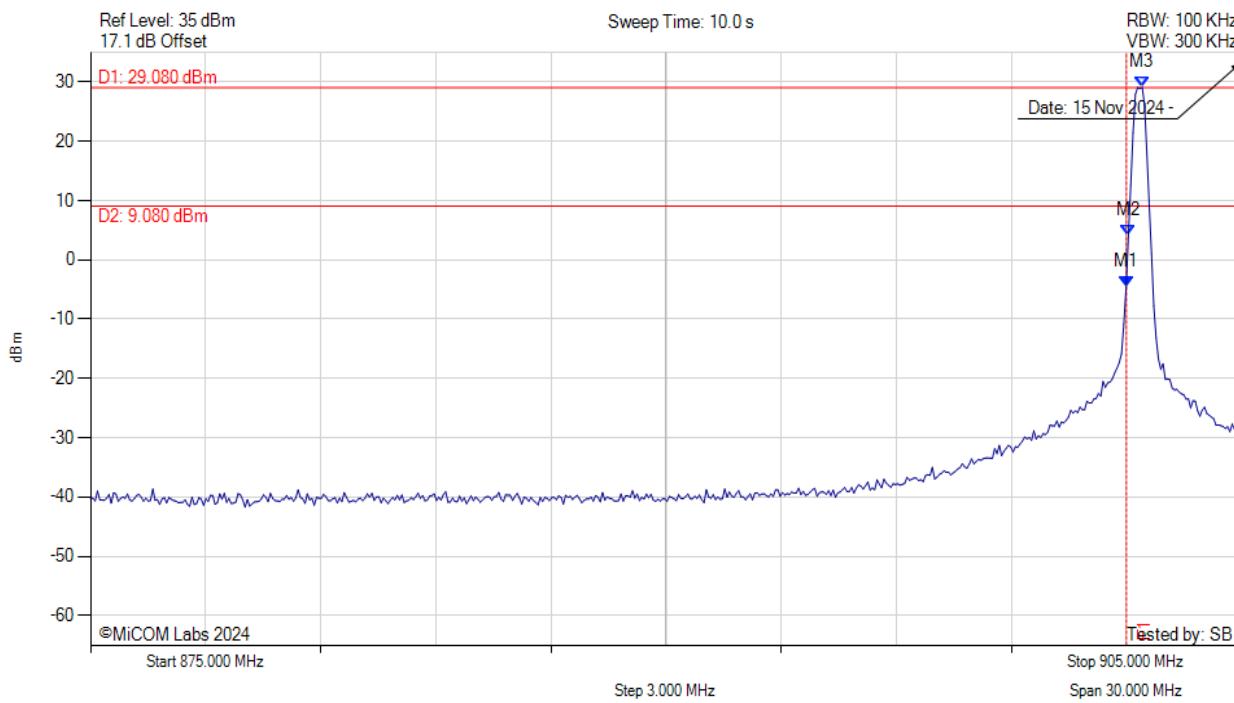


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -4.544 dBm M2 : 902.054 MHz : 4.213 dBm M3 : 902.415 MHz : 29.080 dBm	Channel Frequency: 902.30 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 400kHz GFSK, Channel: 902.40 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

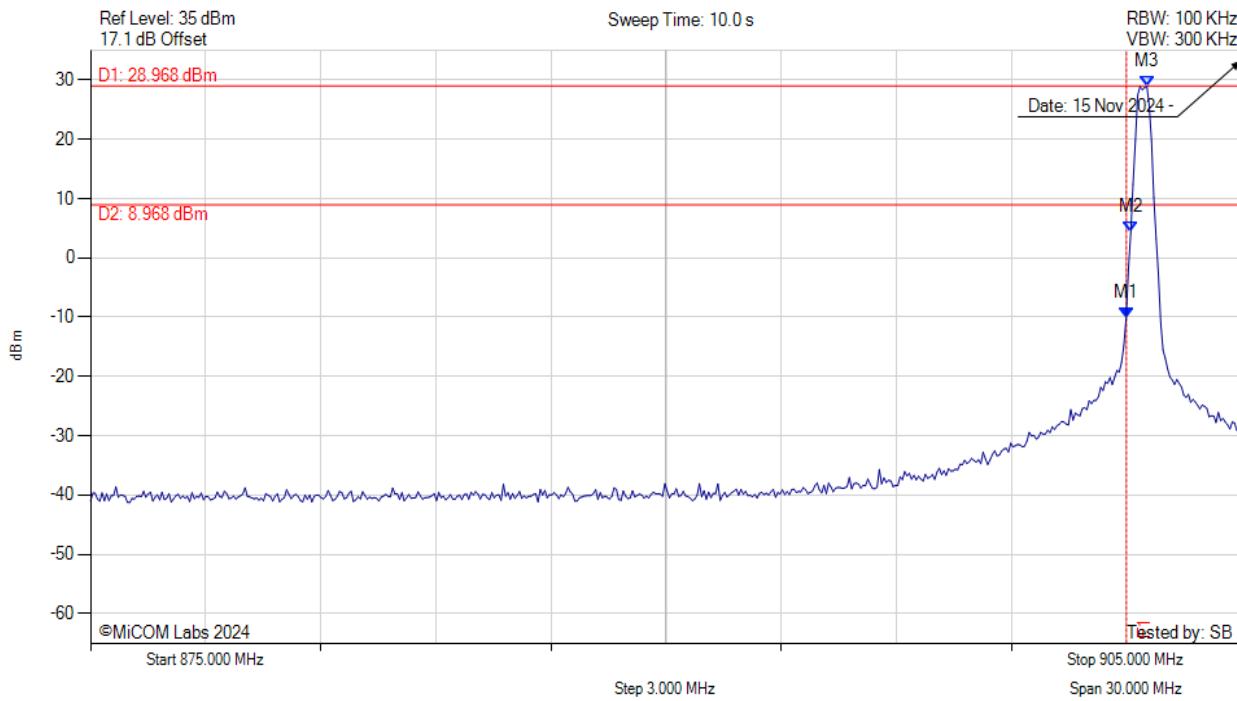


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -10.123 dBm M2 : 902.114 MHz : 4.278 dBm M3 : 902.535 MHz : 28.968 dBm	Channel Frequency: 902.40 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 300kHz FSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

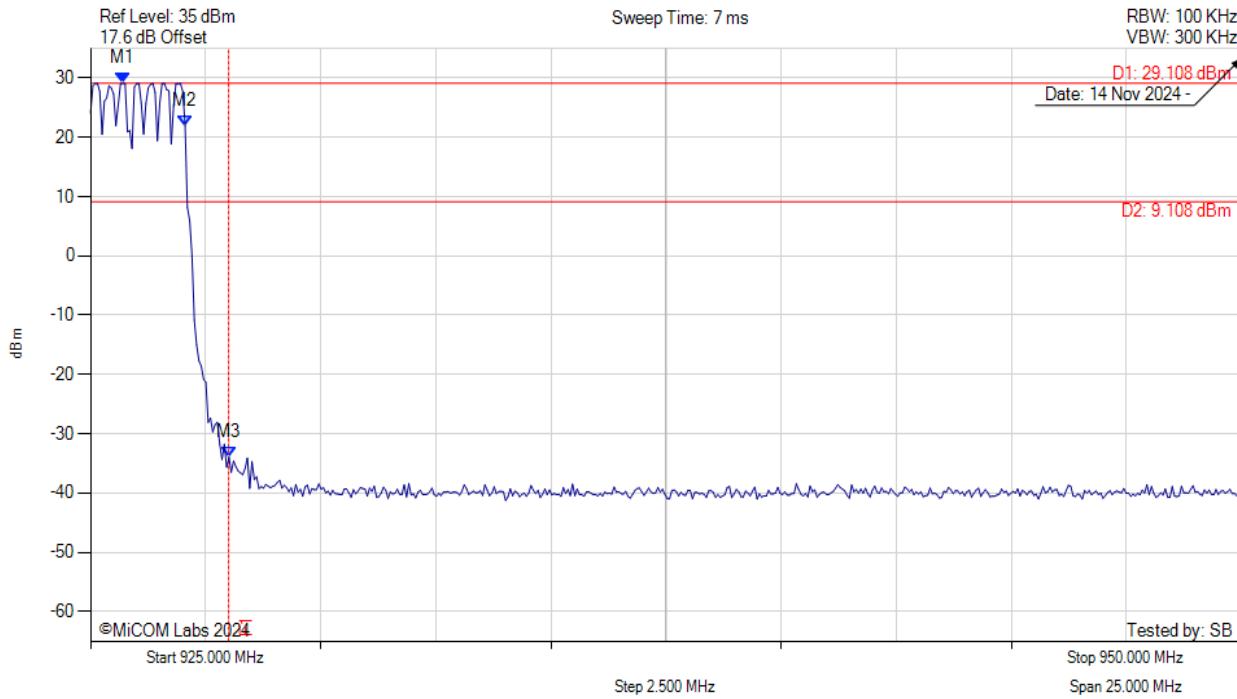


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.701 MHz : 29.108 dBm M2 : 927.054 MHz : 21.864 dBm M3 : 928.000 MHz : -33.966 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 400kHz FSK, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

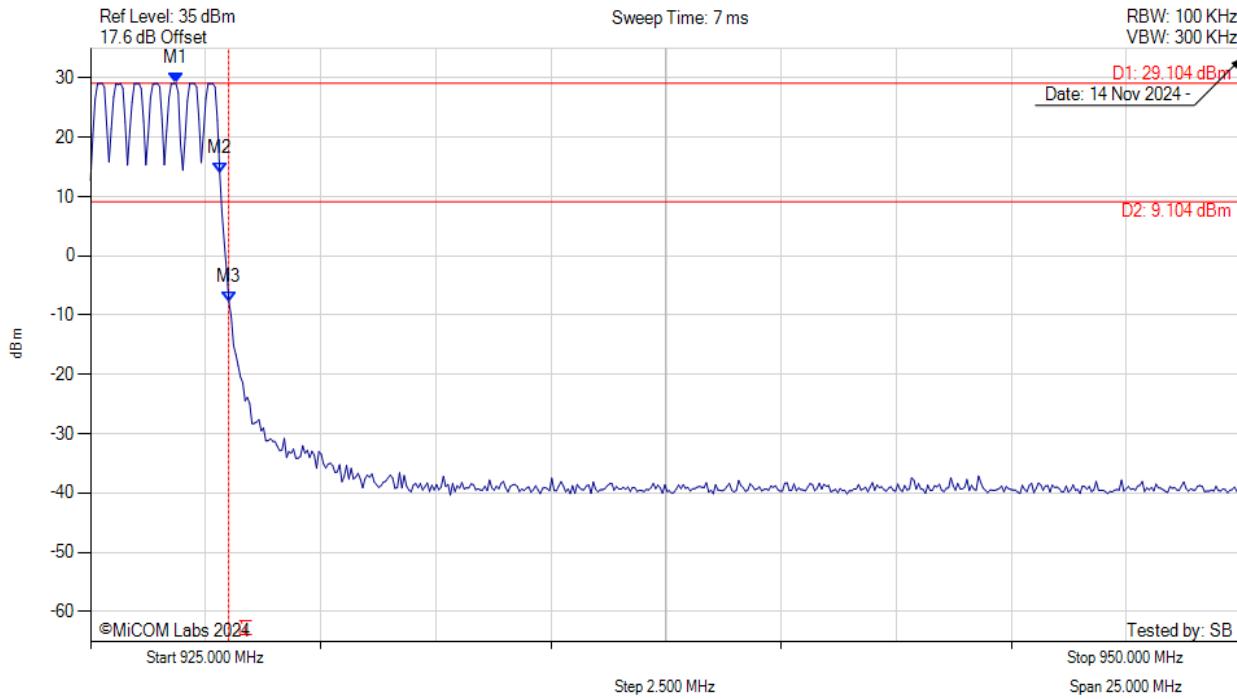


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.854 MHz : 29.104 dBm M2 : 927.806 MHz : 13.998 dBm M3 : 928.000 MHz : -7.735 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 300kHz GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

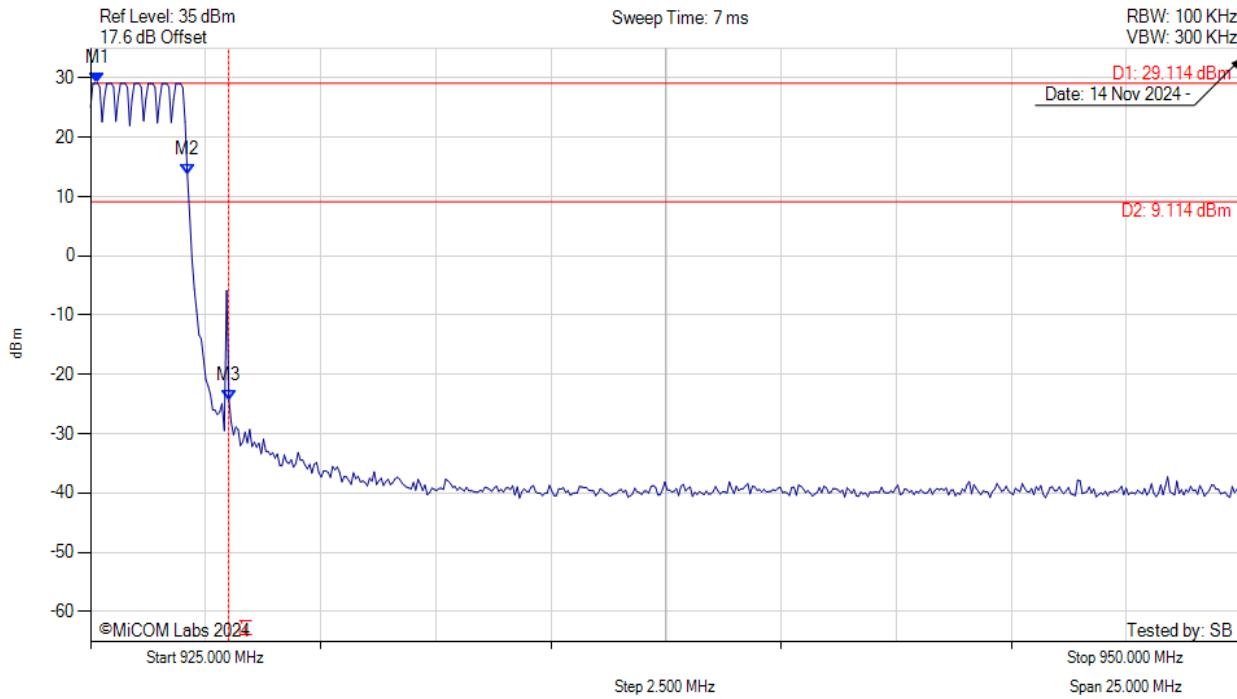


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.150 MHz : 29.114 dBm M2 : 927.104 MHz : 13.658 dBm M3 : 928.000 MHz : -24.326 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 300kHz 200kbps GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

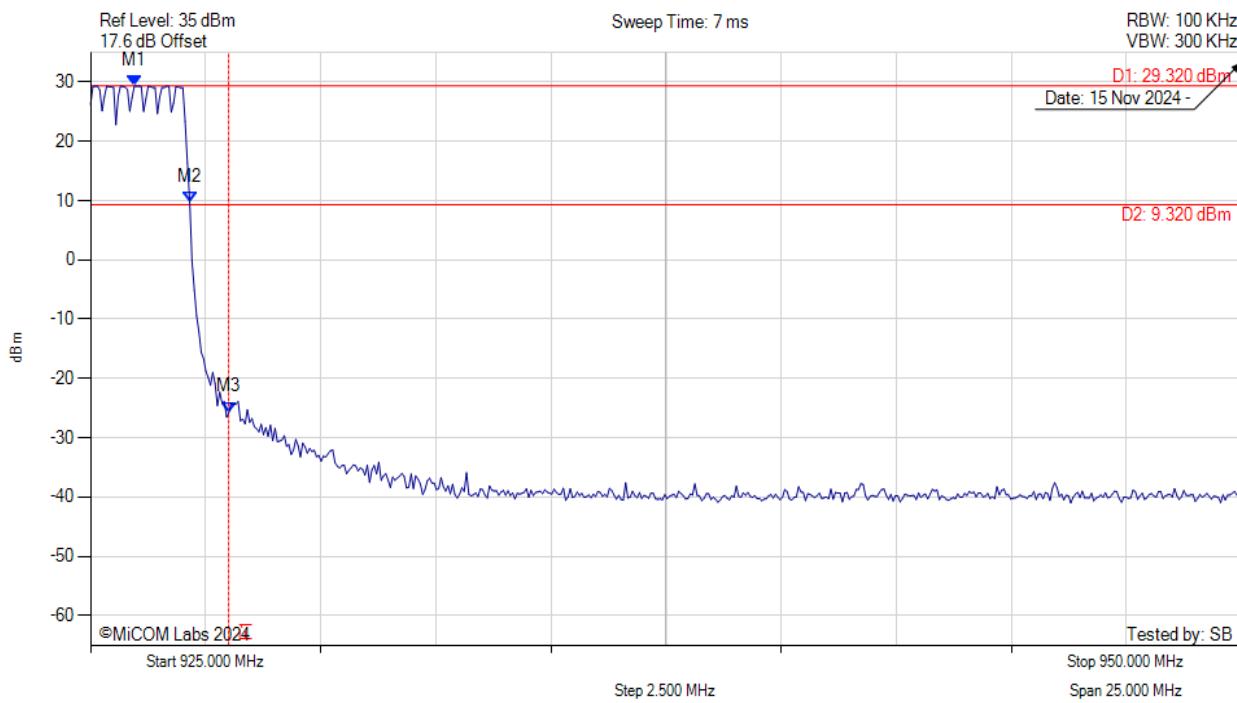


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.952 MHz : 29.320 dBm M2 : 927.154 MHz : 9.792 dBm M3 : 928.000 MHz : -25.663 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: 400kHz GFSK, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

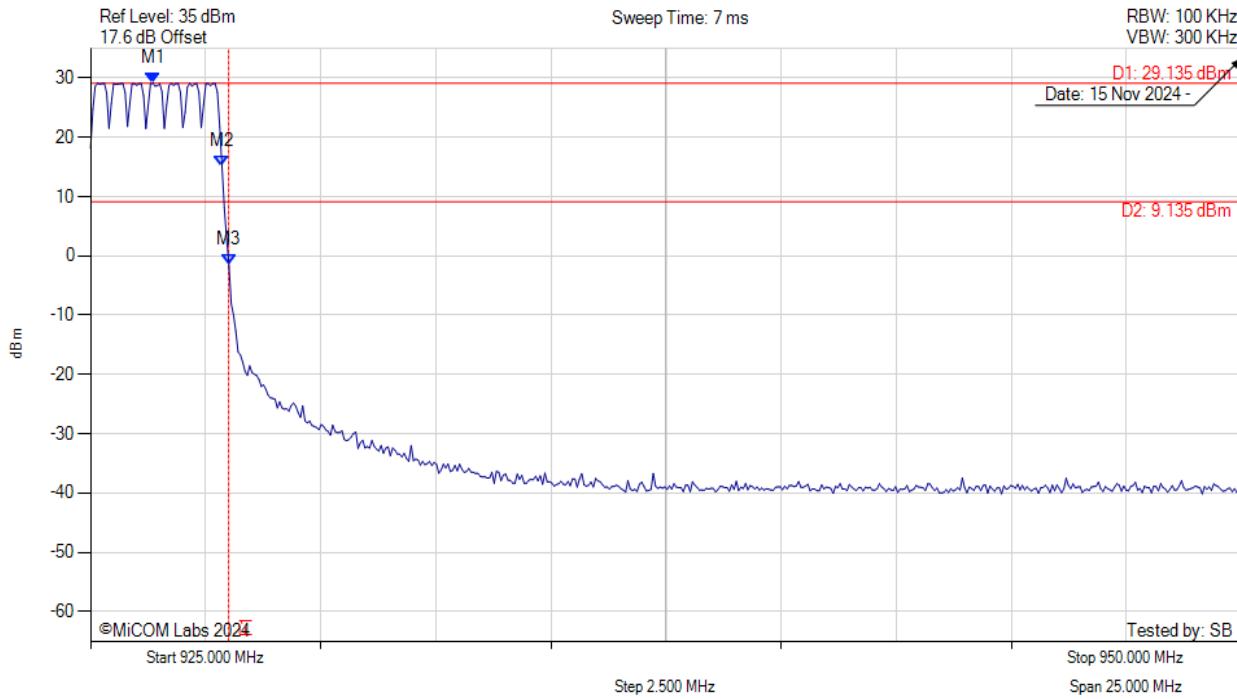


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.353 MHz : 29.135 dBm M2 : 927.856 MHz : 15.055 dBm M3 : 928.000 MHz : -1.577 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz FSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

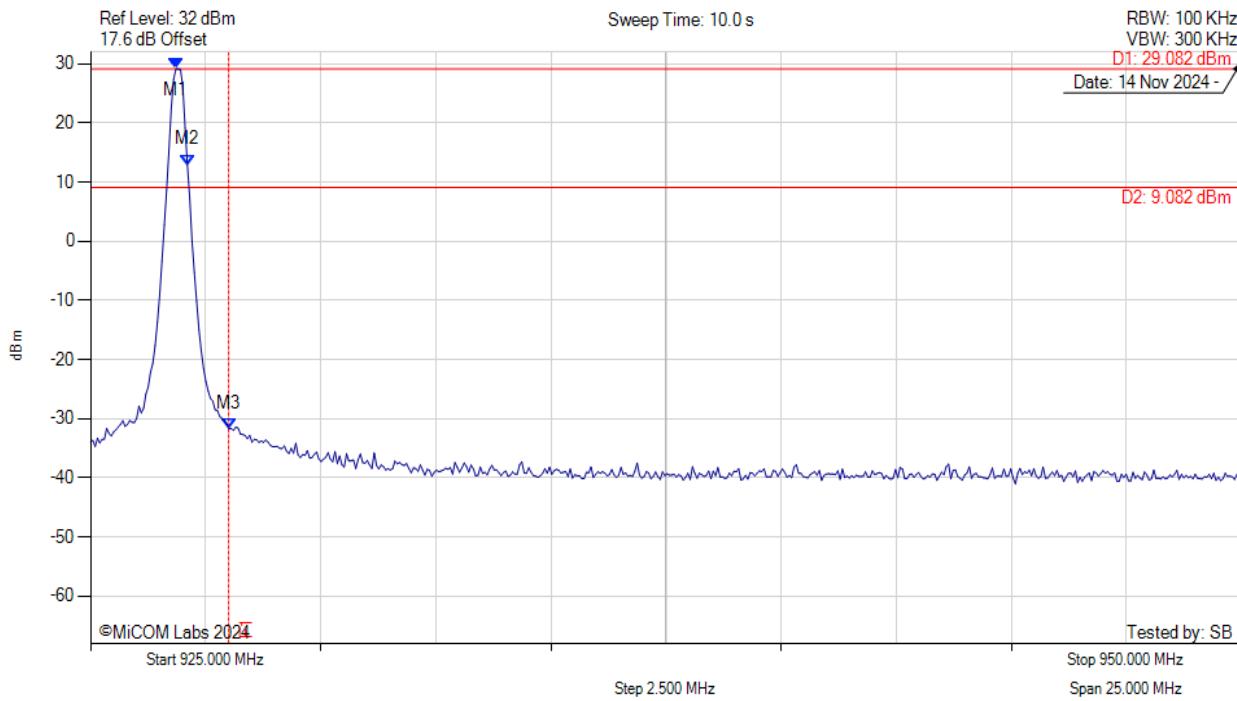


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.854 MHz : 29.082 dBm M2 : 927.104 MHz : 12.893 dBm M3 : 928.000 MHz : -31.711 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 400kHz FSK, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

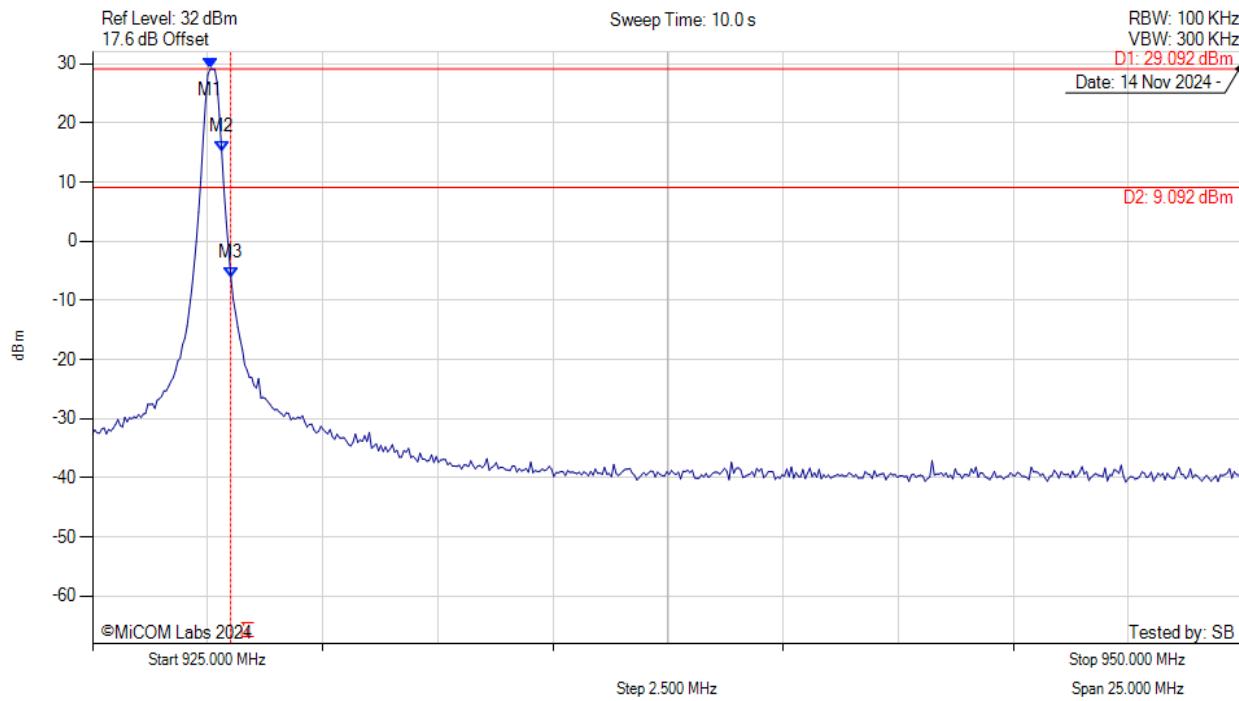


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 927.555 MHz : 29.092 dBm M2 : 927.806 MHz : 15.089 dBm M3 : 928.000 MHz : -6.232 dBm	Channel Frequency: 927.60 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

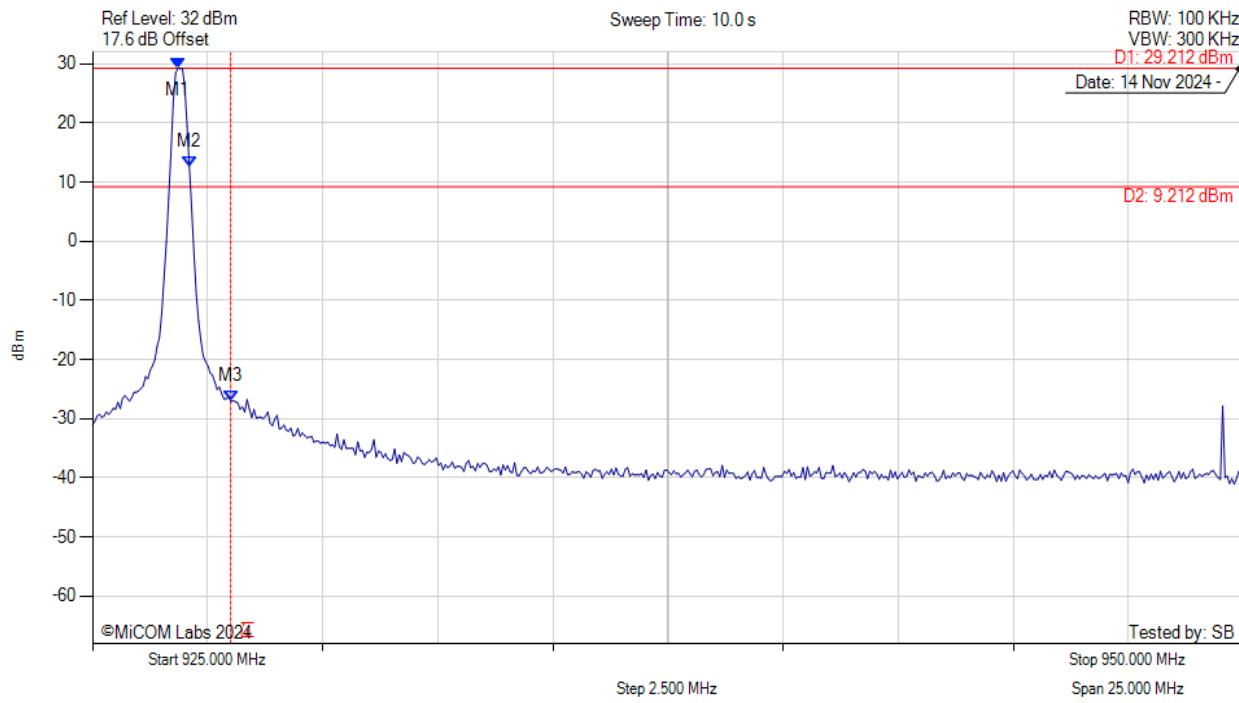


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.854 MHz : 29.212 dBm M2 : 927.104 MHz : 12.533 dBm M3 : 928.000 MHz : -27.086 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 300kHz 200kbps GFSK, Channel: 926.90 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

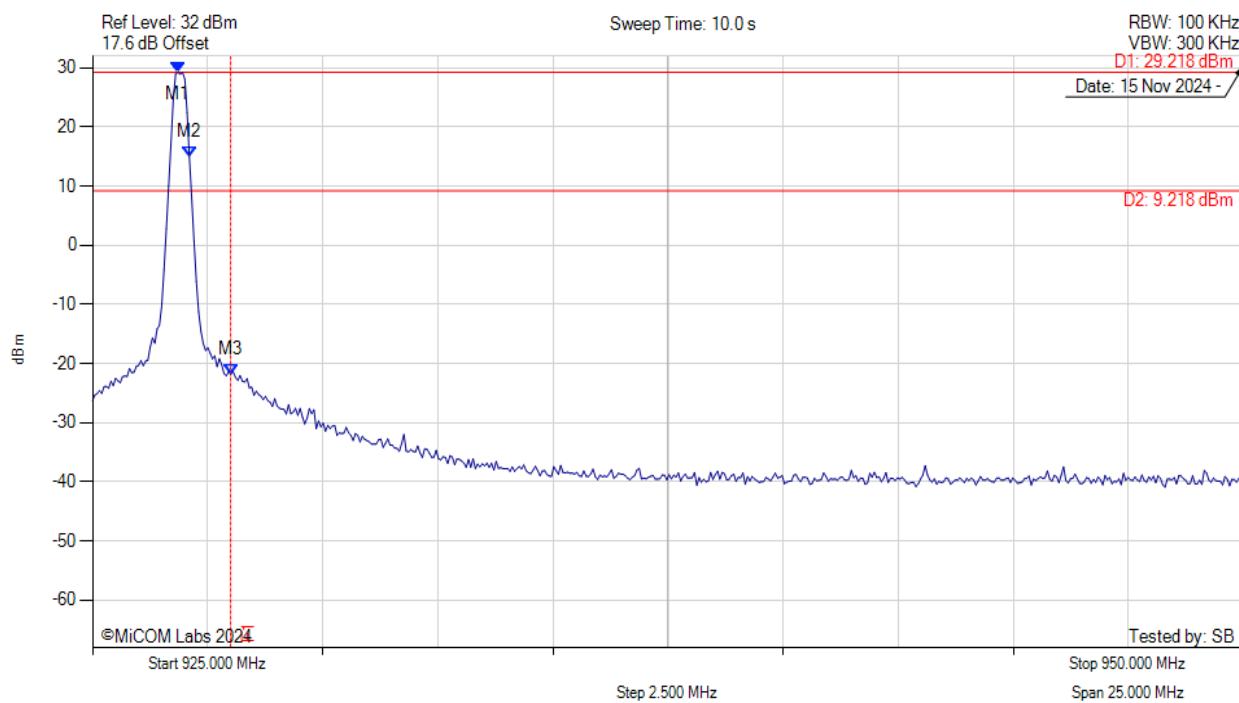


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.854 MHz : 29.218 dBm M2 : 927.104 MHz : 14.858 dBm M3 : 928.000 MHz : -21.801 dBm	Channel Frequency: 926.90 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: 400kHz GFSK, Channel: 927.60 MHz, Chain a, Temp: 20, Voltage: 4 Vdc

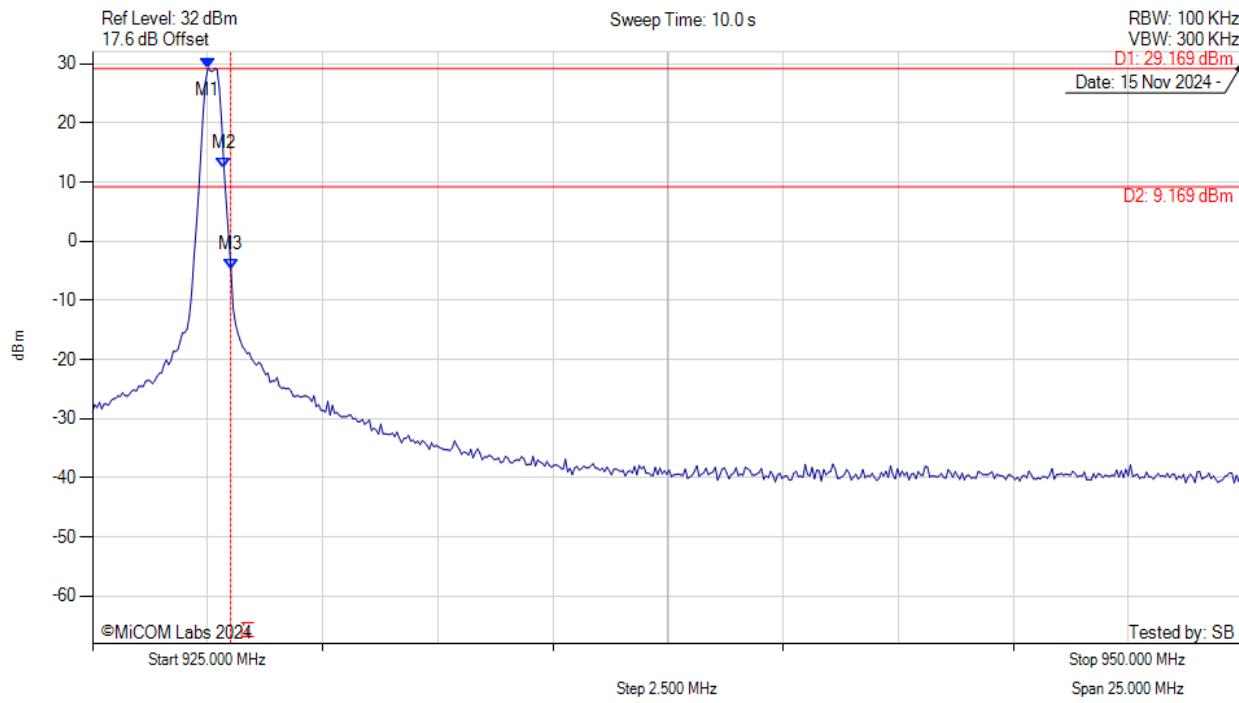


[back to matrix](#)


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 927.505 MHz : 29.169 dBm M2 : 927.856 MHz : 12.256 dBm M3 : 928.000 MHz : -4.691 dBm	Channel Frequency: 927.60 MHz

10. Test Setup Photographs


10.1.1. Test Setup - RE#1 - Radiated Emissions - 3m Chamber

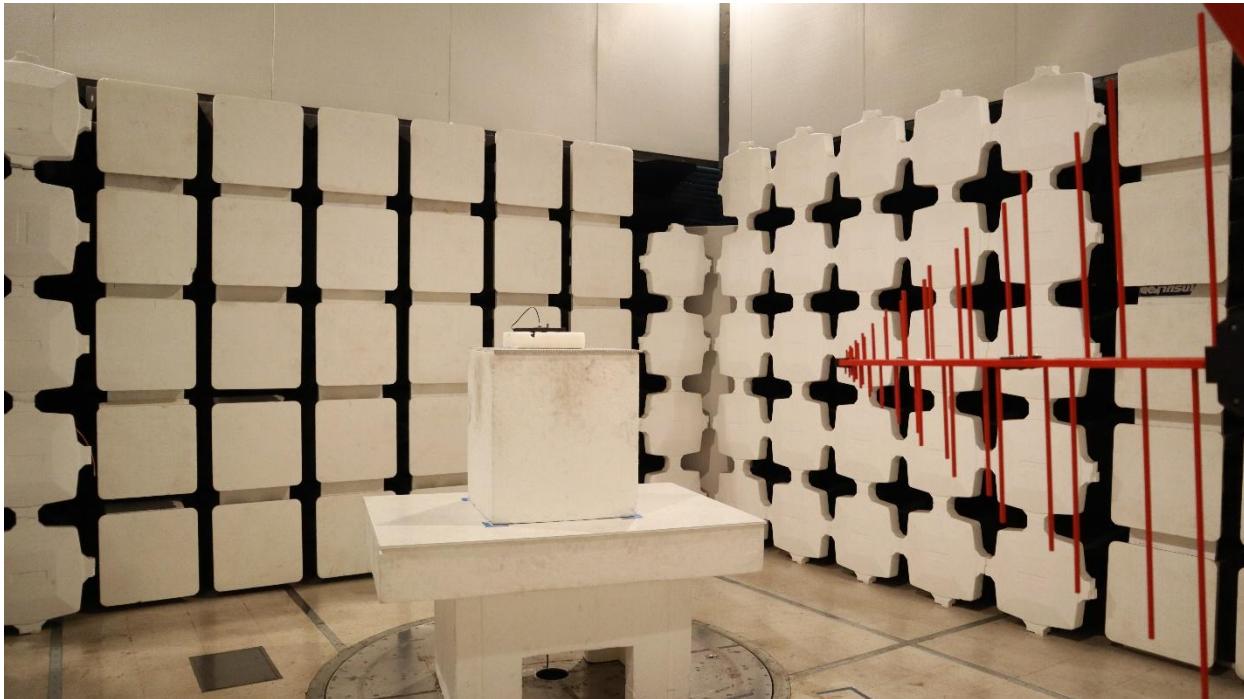

Radiated Emissions 1-18G

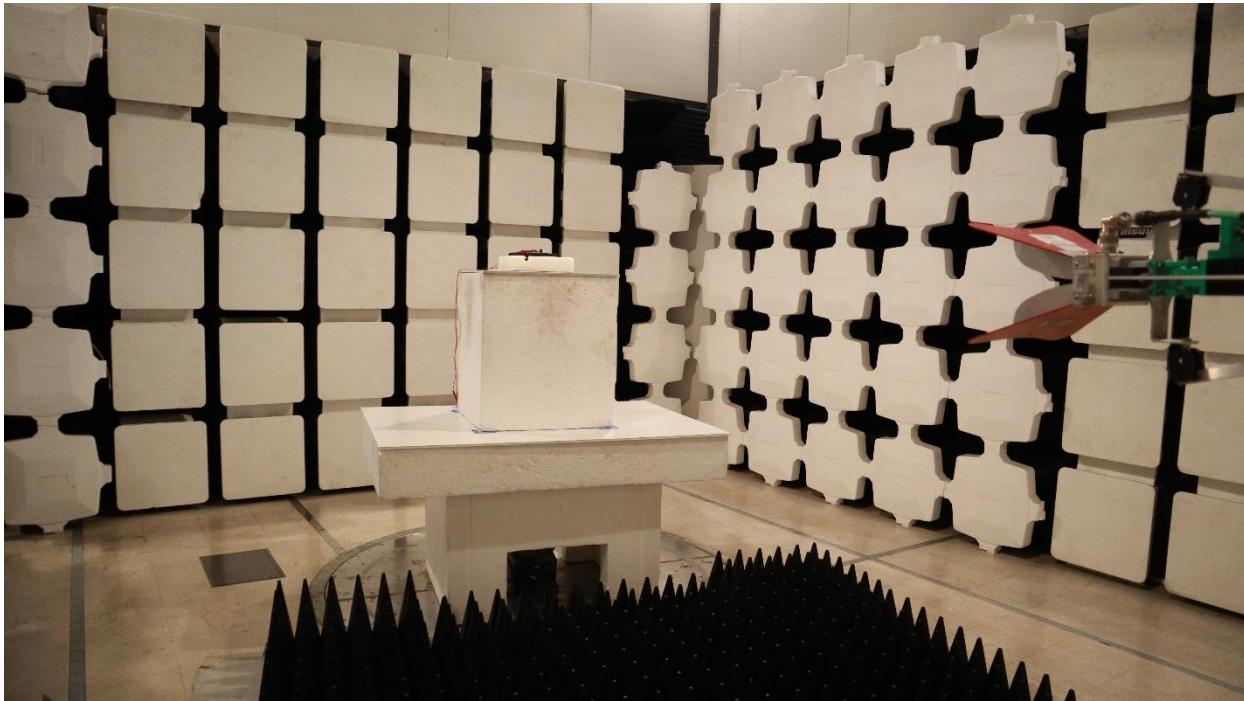

10.1.2. Test Setup - RF#1 - Conducted

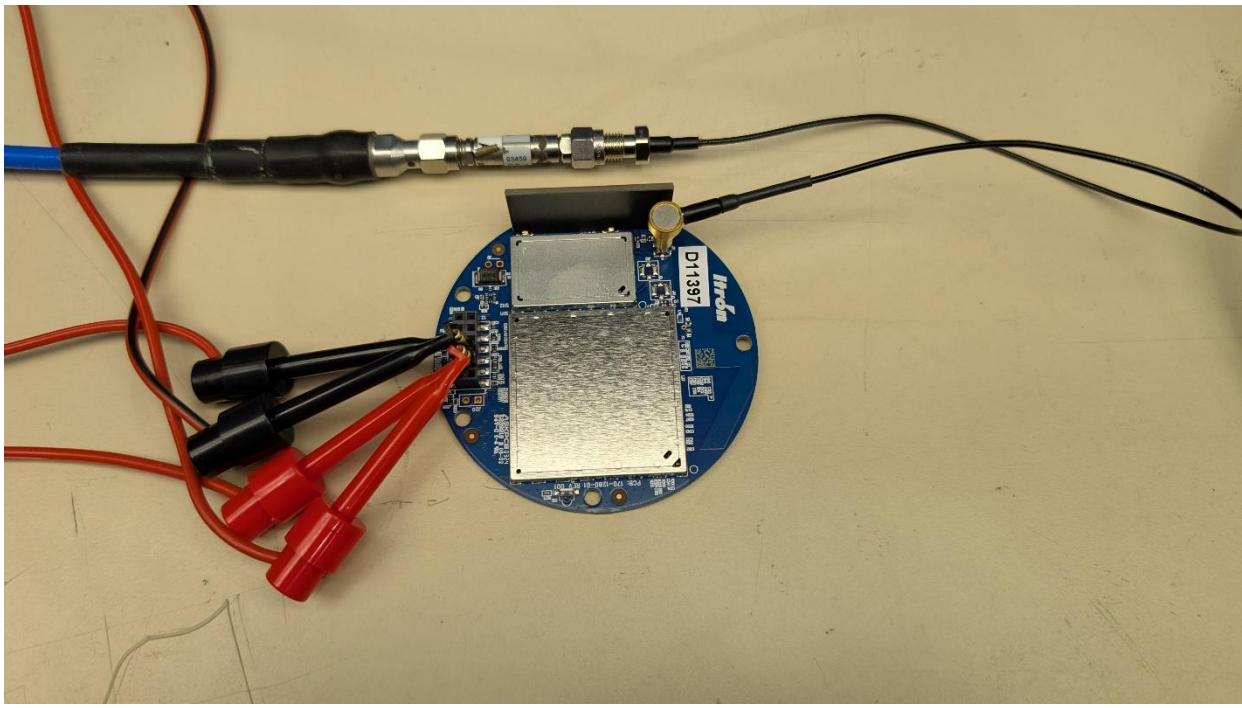

Conducted RF

10.1.3. Test Setup - CE#1 – AC Wireline Emissions

Front view



Side view





575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com