

Company: Silver Spring Networks

Test of: MicroAP 5

To: FCC CFR 47 Part 15.247 (FHSS) &  
IC RSS-247 (2400 – 2483.5 MHz)

Report No.: SSNT135 –U2\_Radiated Rev A

**RADIATED TEST REPORT**



Master Document Number	Addendum Reports
SSNT135-U2_Master	SSNT135-U2_Conducted
	SSNT135-U2_Radiated

This report is only valid in conjunction with the reports listed in the above table. Together these reports address the requirements for the type of device operating under the standard as listed.

# RADIATED TEST REPORT

FROM



Test of: Silver Spring Networks MicroAP 5

To: FCC CFR 47 Part 15.247 (FHSS) &  
IC RSS-247 (2400 – 2483.5 MHz)

Test Report Serial No.: SSNT135-U2\_Radiated Rev A

This report supersedes: NONE

Applicant: Silver Spring Networks  
230 W Tasman Drive  
San Jose, California 95134  
USA

Plug in Radio Device

Issue Date: 1<sup>st</sup> February 2017

## This Test Report is Issued Under the Authority of:

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

## Table of Contents

<b>1. TEST RESULTS .....</b>	<b>4</b>
1.1. Emissions .....	4
1.1.1. <i>Radiated Emissions</i> .....	4
1.1.1.1. TX Spurious & Restricted Band Emissions (1 – 18 GHz) .....	7
1.1.1.2. TX Spurious & Restricted Band Emissions (0.03 - 1 GHz) .....	25
1.1.1.3. Restricted Edge & Band-Edge Emissions.....	34
1.1.2. <i>Digital Emissions (0.03 - 1 GHz)</i> .....	50
<b>A. APPENDIX - GRAPHICAL IMAGES .....</b>	<b>55</b>
A.1. Emissions .....	56
A.1.1. <i>Radiated Emissions</i> .....	56
A.1.1.1. TX Spurious & Restricted Band Emissions.....	56
A.1.1.2. Restricted Edge & Band-Edge Emissions .....	83
A.1.2. <i>Digital Emissions (0.03 - 1 GHz)</i> .....	95

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1. TEST RESULTS

**Note:** There are 8 different antenna models available for use with this equipment. The 3 antenna models tested are the highest gain of each antenna type representing the worst case in terms of emissions. Radiated Emissions testing was performed with the radio operating in the modes that exhibit the worst case emissions.

### 1.1. Emissions

#### 1.1.1. Radiated Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

#### Limits for Restricted Bands

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

#### Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:  
 Level (dBmV/m) = 20 \* Log (level (mV/m))

40 dBmV/m = 100 mV/m

48 dBmV/m = 250 mV/m

**Restricted Bands of Operation (15.205)**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 6 of 98

---

- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 7 of 98

### 1.1.1.1. TX Spurious & Restricted Band Emissions (1 – 18 GHz)

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2251.12	57.90	2.63	-12.10	48.43	Max Peak	Horizontal	189	331	74.0	-25.6	Pass	
#2	2251.12	44.11	2.63	-12.10	34.64	Max Avg	Horizontal	189	331	54.0	-19.4	Pass	
#3	2400.73	58.08	2.69	-11.83	48.94	Fundamental	Horizontal	148	255	--	--	Pass	
#4	7202.22	57.03	4.24	-7.35	53.92	Max Peak	Vertical	155	121	74.0	-20.1	Pass	
#5	7202.22	52.28	4.24	-7.35	49.17	Max Avg	Vertical	155	121	54.0	-4.8	Pass	
#6	15672.43	47.28	5.92	0.14	53.34	Max Peak	Vertical	187	238	74.0	-20.7	Pass	
#7	15672.43	34.22	5.92	0.14	40.28	Max Avg	Vertical	187	238	54.0	-13.7	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 8 of 98

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2224.50	56.71	2.63	-12.35	46.99	Max Peak	Vertical	132	52	74.0	-27.0	Pass	
#2	2224.50	42.76	2.63	-12.35	33.04	Max Avg	Vertical	132	52	54.0	-21.0	Pass	
#3	2440.05	62.41	2.72	-11.72	53.41	Fundamental	Horizontal	200	109	--	--	Pass	
#4	7320.17	57.25	4.26	-7.27	54.24	Max Peak	Vertical	189	75	74.0	-19.8	Pass	
#5	7320.17	52.05	4.26	-7.27	49.04	Max Avg	Vertical	189	75	54.0	-5.0	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 9 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2186.98	56.72	2.62	-12.57	46.77	Peak (NRB)	Horizontal	148	1	--	--	Pass	
#2	2246.06	60.44	2.64	-12.14	50.94	Max Peak	Horizontal	122	352	74.0	-23.1	Pass	
#3	2246.06	46.99	2.64	-12.14	37.49	Max Avg	Horizontal	122	352	54.0	-16.5	Pass	
#4	2472.75	63.56	2.71	-11.66	54.61	Fundamental	Horizontal	151	1	--	--		
#5	7418.36	55.83	4.33	-7.14	53.02	Max Peak	Vertical	183	231	74.0	-21.0	Pass	
#6	7418.36	50.87	4.33	-7.14	48.06	Max Avg	Vertical	183	231	54.0	-5.9	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 10 of 98

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 kbps
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2270.84	56.61	2.66	-12.14	47.13	Max Peak	Vertical	173	144	74.0	-26.9	Pass	
#2	2270.84	43.09	2.66	-12.14	33.61	Max Avg	Vertical	173	144	54.0	-20.4	Pass	
#3	2400.08	59.60	2.69	-11.84	50.45	Fundamental	Vertical	101	360	--	--		
#4	4791.67	49.94	3.55	-11.11	42.38	Max Peak	Vertical	134	15	74.0	-31.6	Pass	
#5	4791.67	36.86	3.55	-11.11	29.30	Max Avg	Vertical	134	15	54.0	-24.7	Pass	
#6	7200.47	54.01	4.24	-7.35	50.90	Peak (NRB)	Vertical	151	172	--	--	Pass	
#7	15698.95	47.48	5.98	0.19	53.65	Max Peak	Vertical	156	63	74.0	-20.4	Pass	
#8	15698.95	34.36	5.98	0.19	40.53	Max Avg	Vertical	156	63	54.0	-13.5	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 11 of 98

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2413.80	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2208.00	60.63	2.61	-12.51	50.73	Max Peak	Horizontal	148	222	74.0	-23.3	Pass	
#2	2208.00	47.14	2.61	-12.51	37.24	Max Avg	Horizontal	148	222	54.0	-16.8	Pass	
#3	2413.85	56.45	2.70	-11.79	47.36	Fundamental	Horizontal	151	0	--	--		
#4	4827.74	59.67	3.55	-11.15	52.07	Max Peak	Vertical	171	22	74.0	-21.9	Pass	
#5	4827.74	55.55	3.55	-11.15	47.95	Max Avg	Vertical	171	22	54.0	-6.1	Pass	
#6	7241.43	55.87	4.24	-7.34	52.77	Max Peak	Vertical	167	285	74.0	-21.2	Pass	
#7	7241.43	51.65	4.24	-7.34	48.55	Max Avg	Vertical	167	285	54.0	-5.5	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 12 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2220.89	59.65	2.63	-12.38	49.90	Max Peak	Horizontal	133	139	74.0	-24.1	Pass	
#2	2220.89	46.45	2.63	-12.38	36.70	Max Avg	Horizontal	133	139	54.0	-17.3	Pass	
#3	2427.19	59.11	2.71	-11.75	50.07	Fundamental	Horizontal	182	46	--	--		
#4	4854.30	63.17	3.60	-11.20	55.57	Max Peak	Horizontal	190	315	74.0	-18.4	Pass	
#5	4854.30	60.41	3.60	-11.20	52.81	Max Avg	Horizontal	190	315	54.0	-1.2	Pass	
#6	7281.62	56.39	4.27	-7.32	53.34	Max Peak	Vertical	161	285	74.0	-20.7	Pass	
#7	7281.62	51.85	4.27	-7.32	48.80	Max Avg	Vertical	161	285	54.0	-5.2	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 13 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2254.31	58.04	2.63	-12.11	48.56	Max Peak	Vertical	163	167	74.0	-25.4	Pass	
#2	2254.31	44.99	2.63	-12.11	35.51	Max Avg	Vertical	163	167	54.0	-18.5	Pass	
#3	2400.72	58.10	2.69	-11.83	48.96	Fundamental	Vertical	151	57	--	--	Pass	
#4	7202.61	54.34	4.25	-7.35	51.24	Peak (NRB)	Vertical	151	88	--	--	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 14 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2440.08	58.97	2.72	-11.72	49.97	Fundamental	Vertical	150	0	--	--	Pass	
#2	7320.20	60.51	4.26	-7.27	57.50	Max Peak	Vertical	163	121	74.0	-16.5	Pass	
#3	7320.20	54.44	4.26	-7.27	51.43	Max Avg	Vertical	163	121	54.0	-2.6	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 15 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2250.74	59.34	2.63	-12.10	49.87	Max Peak	Vertical	194	311	74.0	-24.1	Pass	
#2	2250.74	46.17	2.63	-12.10	36.70	Max Avg	Vertical	194	311	54.0	-17.3	Pass	
#3	2472.83	59.00	2.71	-11.66	50.05	Fundamental	Vertical	200	1	--	--	Pass	
#4	7418.35	57.13	4.33	-7.14	54.32	Max Peak	Vertical	196	322	74.0	-19.7	Pass	
#5	7418.35	52.52	4.33	-7.14	49.71	Max Avg	Vertical	196	322	54.0	-4.3	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 16 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2400.12	58.19	2.69	-11.84	49.04	Fundamental	Vertical	151	139	--	--	Pass	
#2	4800.33	58.82	3.52	-11.12	51.22	Max Peak	Vertical	108	261	74.0	-22.8	Pass	
#3	4800.33	46.18	3.52	-11.12	38.58	Max Avg	Vertical	108	261	54.0	-15.4	Pass	
#4	7200.69	51.83	4.24	-7.35	48.72	Peak (NRB)	Vertical	151	63	74.0	-25.3	Pass	
#5	12001.16	56.91	5.37	-5.17	57.11	Max Peak	Vertical	185	252	74.0	-16.9	Pass	
#6	12001.16	40.96	5.37	-5.17	41.16	Max Avg	Vertical	185	252	54.0	-12.8	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 17 of 98

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2413.80	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2413.85	52.22	2.70	-11.79	43.13	Fundamental	Vertical	151	135	--	--	Pass	
#2	4827.50	60.99	3.55	-11.15	53.39	Max Peak	Horizontal	121	315	74.0	-20.6	Pass	
#3	4827.50	57.75	3.55	-11.15	50.15	Max Avg	Horizontal	121	315	54.0	-3.9	Pass	
#4	7241.47	55.24	4.24	-7.34	52.14	Max Peak	Vertical	141	282	74.0	-21.9	Pass	
#5	7241.47	50.43	4.24	-7.34	47.33	Max Avg	Vertical	141	282	54.0	-6.7	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 18 of 98

#### Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2427.22	57.71	2.71	-11.75	48.67	Fundamental	Vertical	151	96	--	--	Pass	
#2	4854.44	61.70	3.60	-11.20	54.10	Max Peak	Horizontal	142	315	74.0	-19.9	Pass	
#3	4854.44	58.75	3.60	-11.20	51.15	Max Avg	Horizontal	142	315	54.0	-2.9	Pass	
#4	7281.59	57.79	4.27	-7.32	54.74	Max Peak	Vertical	142	292	74.0	-19.3	Pass	
#5	7281.59	53.92	4.27	-7.32	50.87	Max Avg	Vertical	142	292	54.0	-3.1	Pass	
#6	12136.03	54.46	5.44	-5.12	54.78	Max Peak	Vertical	150	281	74.0	-19.2	Pass	
#7	12136.03	47.76	5.44	-5.12	48.08	Max Avg	Vertical	150	281	54.0	-5.9	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 19 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail		
#1	2400.86	53.64	2.69	-11.83	44.50	Fundamental	Vertical	151	96	--	--	Pass		
#2	4801.73	59.92	3.51	-11.12	52.31	Max Peak	Vertical	154	133	74.0	-21.7	Pass		
#3	4801.73	55.22	3.51	-11.12	47.61	Max Avg	Vertical	154	133	54.0	-6.4	Pass		
#4	7202.09	54.35	4.24	-7.35	51.24	Peak (NRB)	Vertical	151	96	--	--	Pass		

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 20 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2439.96	63.43	2.72	-11.72	54.43	Fundamental	Horizontal	100	99	--	--	Pass	
#2	4879.84	60.07	3.60	-11.25	52.42	Max Peak	Vertical	179	144	74.0	-21.6	Pass	
#3	4879.84	55.98	3.60	-11.25	48.33	Max Avg	Vertical	179	144	54.0	-5.7	Pass	
#4	7320.04	60.43	4.26	-7.27	57.42	Max Peak	Vertical	195	181	74.0	-16.6	Pass	
#5	7320.04	56.58	4.26	-7.27	53.57	Max Avg	Vertical	195	181	54.0	-0.4	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 21 of 98

Equipment Configuration for TX Spurious & Restricted Band Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2472.67	60.65	2.71	-11.66	51.70	Fundamental	Horizontal	101	47	--	--	Pass	
#2	4945.65	62.36	3.55	-11.44	54.47	Max Peak	Vertical	169	182	74.0	-19.5	Pass	
#3	4945.65	59.31	3.55	-11.44	51.42	Max Avg	Vertical	169	182	54.0	-2.6	Pass	
#4	7418.49	57.39	4.33	-7.14	54.58	Max Peak	Vertical	176	90	74.0	-19.4	Pass	
#5	7418.49	52.85	4.33	-7.14	50.04	Max Avg	Vertical	176	90	54.0	-4.0	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 22 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2280.20	67.94	2.66	-12.15	58.45	Max Peak	Horizontal	110	276	74.0	-15.6	Pass	
#2	2280.20	53.77	2.66	-12.15	44.28	Max Avg	Horizontal	110	276	54.0	-9.7	Pass	
#3	2400.23	55.63	2.69	-11.84	46.48	Fundamental	Vertical	151	0	--	--	Pass	
#4	4800.28	69.51	3.52	-11.12	61.91	Max Peak	Horizontal	111	267	74.0	-12.1	Pass	
#5	4800.28	57.38	3.52	-11.12	49.78	Max Avg	Horizontal	111	267	54.0	-4.2	Pass	
#6	7200.63	52.57	4.24	-7.35	49.46	Peak (NRB)	Vertical	151	118	74.0	-24.5	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 001350070000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 23 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2413.80	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2259.28	69.49	2.63	-12.11	60.01	Max Peak	Horizontal	174	261	74.0	-14.0	Pass	
#2	2259.28	54.97	2.63	-12.11	45.49	Max Avg	Horizontal	174	261	54.0	-8.5	Pass	
#3	2413.76	56.47	2.70	-11.79	47.38	Fundamental	Vertical	151	86	--	--	Pass	
#4	4827.53	68.82	3.55	-11.15	61.22	Max Peak	Horizontal	102	262	74.0	-12.8	Pass	
#5	4827.53	56.79	3.55	-11.15	49.19	Max Avg	Horizontal	102	262	54.0	-4.8	Pass	
#6	7241.40	53.62	4.24	-7.34	50.52	Peak (NRB)	Vertical	151	74	74.0	-23.5	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 001350070000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 24 of 98

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2263.29	65.74	2.64	-12.12	56.26	Max Peak	Vertical	196	333	74.0	-17.7	Pass	
#2	2263.29	51.42	2.64	-12.12	41.94	Max Avg	Vertical	196	333	54.0	-12.1	Pass	
#3	2427.19	61.37	2.71	-11.75	52.33	Fundamental	Vertical	151	1	--	--	Pass	
#4	4854.38	59.20	3.60	-11.20	51.60	Max Peak	Vertical	100	325	74.0	-22.4	Pass	
#5	4854.38	45.95	3.60	-11.20	38.35	Max Avg	Vertical	100	325	54.0	-15.7	Pass	
#6	7281.61	60.08	4.27	-7.32	57.03	Max Peak	Vertical	171	290	74.0	-17.0	Pass	
#7	7281.61	50.97	4.27	-7.32	47.92	Max Avg	Vertical	171	290	54.0	-6.1	Pass	

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 25 of 98

---

### 1.1.1.2. TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

#### Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

#### Test Measurement Results

30.00 - 1000.00 MHz														
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail		
#1	106.87	48.00	3.92	-19.43	32.49	Peak (NRB)	Vertical	100	0	43.0	-10.5	Pass		
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.														

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 26 of 98

---

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)			
<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2413.80	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	98.18	53.47	3.87	-21.84	35.50	Peak (NRB)	Vertical	100	0	43.0	-7.5	Pass
#2	106.90	51.17	3.92	-19.43	35.66	Peak (NRB)	Vertical	100	0	43.0	-7.3	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 27 of 98

---

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)			
<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Antenna:**	Tai Sheng Chen 155-0010-00	**Variant:**	6.25 kbps OQPSK
**Antenna Gain (dBi):**	5.00	**Modulation:**	OQPSK
**Beam Forming Gain (Y):**	Not Applicable	**Duty Cycle (%):**	100
**Channel Frequency (MHz):**	2427.20	**Data Rate:**	6.25 KBit/s
**Power Setting:**	20	**Tested By:**	OC

<b>Test Measurement Results</b>												
<b>30.00 - 1000.00 MHz</b>												
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	98.13	53.30	3.87	-21.84	35.33	Peak (NRB)	Vertical	100	0	43.0	-7.7	Pass
#2	106.86	49.01	3.92	-19.43	33.50	Peak (NRB)	Vertical	100	0	43.0	-9.5	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 28 of 98

---

<b>Equipment Configuration for TX Spurious &amp; Restricted Band Emissions (0.03 - 1 GHz)</b>	
---	--

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

<b>Test Measurement Results</b>
---------------------------------

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	98.16	54.78	3.87	-21.84	36.81	Peak (NRB)	Vertical	100	66	43.0	-6.2	Pass	
#2	106.98	50.31	3.92	-19.43	34.80	Peak (NRB)	Vertical	100	0	43.0	-8.2	Pass	
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.													

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 29 of 98

---

<b>Equipment Configuration for TX Spurious &amp; Restricted Band Emissions (0.03 - 1 GHz)</b>	
---	--

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

<b>Test Measurement Results</b>
---------------------------------

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	98.07	52.67	3.87	-21.84	34.70	Peak (NRB)	Vertical	100	0	43.0	-8.3	Pass	
#2	106.89	49.64	3.92	-19.43	34.13	Peak (NRB)	Vertical	100	33	43.0	-8.9	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 30 of 98

---

Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)			
<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	98.06	50.14	3.87	-21.84	32.17	Peak (NRB)	Vertical	100	0	43.0	-10.8	Pass
#2	106.88	47.42	3.92	-19.43	31.91	Peak (NRB)	Vertical	100	0	43.0	-11.1	Pass

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 31 of 98

---

**Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 32 of 98

---

<b>Equipment Configuration for TX Spurious &amp; Restricted Band Emissions (0.03 - 1 GHz)</b>			
<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 33 of 98

---

**Equipment Configuration for TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Test Measurement Results**

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The EUT was configured for testing worst case emissions < 1GHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 34 of 98

### 1.1.1.3. Restricted Edge & Band-Edge Emissions

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Radiated Spurious and Band-Edge Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.205, 15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

#### Limits for Restricted Bands

Peak emission: 74 dB<sub>UV</sub>/m

Average emission: 54 dB<sub>UV</sub>/m

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

#### Example:

Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:

$$\text{Level (dBmV/m)} = 20 * \log(\text{level (mV/m)})$$

$$40 \text{ dBmV/m} = 100 \text{ mV/m}$$

$$48 \text{ dBmV/m} = 250 \text{ mV/m}$$

#### Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

#### Frequency Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.

(3) Cable locating equipment operated pursuant to §15.213.

(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.

(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.

(6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

### Lower Band Edge

Tai Sheng Chen 155-0010-00		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2400.80	2390.00	<u>60.93</u>	<u>46.99</u>	20
6.25 kbps OQPSK	2400.20	2390.00	<u>61.29</u>	<u>46.99</u>	20

WP WPANT30017-CA		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2400.80	2390.00	<u>62.78</u>	<u>50.24</u>	20
6.25 kbps OQPSK	2400.20	2390.00	<u>61.12</u>	<u>47.74</u>	20

WP WPANT40010-C		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2400.80	2390.00	<u>60.54</u>	<u>48.44</u>	20
6.25 kbps OQPSK	2400.20	2390.00	<u>62.14</u>	<u>49.68</u>	20

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 37 of 98

---

<b>Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions</b>			
<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

<b>Test Measurement Results</b>												
<b>2310.00 - 2440.00 MHz</b>												
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#1	2385.31	26.25	2.68	32.00	60.93	Max Peak	Vertical	173	42	74.0	-13.1	Pass
#2	2390.00	12.26	2.69	32.04	46.99	Max Avg	Vertical	173	42	54.0	-7.0	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 38 of 98

---

<b>Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions</b>	
--	--

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

<b>Test Measurement Results</b>
---------------------------------

<b>2310.00 - 2440.00 MHz</b>													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	

#1	2374.89	26.68	2.70	31.91	61.29	Max Peak	Vertical	133	274	74.0	-12.7	Pass
#2	2390.00	12.26	2.69	32.04	46.99	Max Avg	Vertical	133	274	54.0	-7.0	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 39 of 98

---

<b>Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions</b>	
--	--

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

<b>Test Measurement Results</b>
---------------------------------

<b>2310.00 - 2440.00 MHz</b>													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	

#1	2386.61	28.08	2.68	32.02	62.78	Max Peak	Vertical	193	191	74.0	-11.2	Pass
#2	2390.00	15.51	2.69	32.04	50.24	Max Avg	Vertical	193	191	54.0	-3.8	Pass
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 40 of 98

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2390.00	13.01	2.69	32.04	47.74	Max Avg	Vertical	135	247	54.0	-6.3	Pass	
#2	2390.00	26.39	2.69	32.04	61.12	Max Peak	Vertical	135	247	74.0	-12.9	Pass	
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 41 of 98

Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2378.02	25.90	2.70	31.94	60.54	Max Peak	Vertical	101	12	74.0	-13.5	Pass	
#3	2390.26	13.71	2.69	32.04	48.44	Max Avg	Vertical	101	12	54.0	-5.6	Pass	
#2	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 42 of 98

---

**Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions**

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2400.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

**Test Measurement Results**

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2389.74	27.41	2.69	32.04	62.14	Max Peak	Horizontal	152	132	74.0	-11.9	Pass	
#2	2390.00	14.95	2.69	32.04	49.68	Max Avg	Horizontal	152	132	54.0	-4.3	Pass	
#3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 43 of 98

---

Upper Band Edge.

Tai Sheng Chen 155-0010-00		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2472.80	2483.50	<u>64.16</u>	<u>52.11</u>	20
6.25 kbps OQPSK	2427.20	2483.50	<u>64.53</u>	<u>50.67</u>	20

WP WPANT30017-CA		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2472.80	2483.50	<u>65.13</u>	<u>53.39</u>	20
6.25 kbps OQPSK	2427.20	2483.50	<u>62.11</u>	<u>48.14</u>	20

WP WPANT40010-C		Band-Edge Freq	Limit 74.0dB $\mu$ V/m	Limit 54.0dB $\mu$ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB $\mu$ V/m	dB $\mu$ V/m	
300 kbps GFSK	2472.80	2483.50	<u>64.60</u>	<u>52.98</u>	20
6.25 kbps OQPSK	2427.20	2483.50	<u>64.29</u>	<u>50.09</u>	20

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 44 of 98

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2483.50	17.01	2.73	32.37	52.11	Max Avg	Vertical	142	53	54.0	-1.9	Pass	
#3	2486.05	29.06	2.73	32.37	64.16	Max Peak	Vertical	142	53	74.0	-9.8	Pass	
#2	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 45 of 98

---

<b>Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions</b>			
<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

**Antenna:**	Tai Sheng Chen 155-0010-00	**Variant:**	6.25 kbps OQPSK
**Antenna Gain (dBi):**	5.00	**Modulation:**	OQPSK
**Beam Forming Gain (Y):**	Not Applicable	**Duty Cycle (%):**	100
**Channel Frequency (MHz):**	2427.20	**Data Rate:**	6.25 KBit/s
**Power Setting:**	20	**Tested By:**	OC

<b>Test Measurement Results</b>												
<b>2420.00 - 2524.00 MHz</b>												
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
#2	2504.83	29.40	2.72	32.41	64.53	Max Peak	Horizontal	189	177	74.0	-9.5	Pass
#3	2513.58	15.50	2.74	32.43	50.67	Max Avg	Horizontal	189	177	54.0	-3.3	Pass
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 46 of 98

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2483.50	18.29	2.73	32.37	53.39	Max Avg	Vertical	194	203	54.0	-0.6	Pass	
#2	2483.50	30.03	2.73	32.37	65.13	Max Peak	Vertical	194	203	74.0	-8.9	Pass	
#3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 47 of 98

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

Test Measurement Results

2420.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#2	2487.62	27.00	2.73	32.38	62.11	Max Peak	Vertical	189	76	74.0	-11.9	Pass	
#3	2491.32	13.02	2.74	32.38	48.14	Max Avg	Vertical	189	76	54.0	-5.9	Pass	
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 48 of 98

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2472.80	<b>Data Rate:</b>	300.00 Kbit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	JMH

Test Measurement Results

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	2483.50	17.88	2.73	32.37	52.98	Max Avg	Vertical	104	369	54.0	-1.0	Pass	
#3	2485.81	29.50	2.73	32.37	64.60	Max Peak	Vertical	104	369	74.0	-9.4	Pass	
#2	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 49 of 98

Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	100
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	20	<b>Tested By:</b>	OC

Test Measurement Results

2420.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#2	2496.12	29.16	2.74	32.39	64.29	Max Peak	Horizontal	164	28	74.0	-9.7	Pass	
#3	2501.44	14.96	2.73	32.40	50.09	Max Avg	Horizontal	164	28	54.0	-3.9	Pass	
#1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 50 of 98

---

### 1.1.2. Digital Emissions (0.03 - 1 GHz)

Radiated Test Conditions for Radiated Digital Emissions (0.03 – 1 GHz)			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Digital Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.209	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Radiated Digital Emissions (0.03 – 1 GHz)

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dBmV; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dBmV/m}$$

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are done as:

$$\text{Level (dBmV/m)} = 20 * \text{Log (level (mV/m))}$$

$$40 \text{ dBmV/m} = 100\text{mV/m}$$

$$48 \text{ dBmV/m} = 250\text{mV/m}$$

#### Limits for Radiated Digital Emissions (0.03 – 1 GHz)

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 51 of 98

Frequency (MHz)	Field Strength		Measurement Distance (m)
	µV/m (microvolts/meter)	dBµV/m (dB microvolts/meter)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F(kHz)	--	30
1.705-30.0	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46.0	3
Above 960	500	54.0	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241. (b) In the emission table above, the tighter limit applies at the band edges. (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. (e) The provisions in §§15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part. (f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device. (g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 52 of 98

---

**Equipment Configuration for Digital Emissions (0.03 - 1 GHz)**

<b>Antenna:</b>	Tai Sheng Chen 155-0010-00	<b>Variant:</b>	6.25 kbps OQPSK
<b>Antenna Gain (dBi):</b>	5.00	<b>Modulation:</b>	OQPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	2427.20	<b>Data Rate:</b>	6.25 KBit/s
<b>Power Setting:</b>	Not Applicable	<b>Tested By:</b>	OC

**Test Measurement Results**

There are no emissions found within 6dB of the limit line.

[Click here to view measurement data...](#)

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The antenna model operating at the data rate listed above, was the worst case in terms of TX spurious emissions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 53 of 98

---

Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

<b>Antenna:</b>	WP WPANT30017-CA	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	4.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	Not Applicable	<b>Tested By:</b>	OC

Test Measurement Results

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	98.18	51.36	3.87	-21.84	33.39	MaxQP	Vertical	100	327	43.0	-9.6	Pass	

Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

**Note:** The antenna model operating at the data rate listed above, was the worst case in terms of TX spurious emissions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 54 of 98

---

Equipment Configuration for Digital Emissions (0.03 - 1 GHz)

<b>Antenna:</b>	WP WPANT40010-C	<b>Variant:</b>	300 kbps GFSK
<b>Antenna Gain (dBi):</b>	3.50	<b>Modulation:</b>	GFSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	Not Applicable
<b>Channel Frequency (MHz):</b>	2440.00	<b>Data Rate:</b>	300.00 KBit/s
<b>Power Setting:</b>	Not Applicable	<b>Tested By:</b>	OC

Test Measurement Results

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
#1	98.07	46.95	3.87	-21.84	28.98	MaxQP	Vertical	100	31	43.0	-14.0	Pass	
Test Notes: Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.													

**Note:** The antenna model operating at the data rate listed above, was the worst case in terms of TX spurious emissions.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Silver Spring Networks MicroAP 5  
**To:** FCC CFR 47 Part 15.247 (FHSS) & IC RSS-247  
**Serial #:** SSNT135-U2\_Radiated Rev A  
**Issue Date:** 1<sup>st</sup> February 2017  
**Page:** 55 of 98

---

## **A. APPENDIX - GRAPHICAL IMAGES**


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## A.1. Emissions

### A.1.1. Radiated Emissions

#### A.1.1.1. TX Spurious & Restricted Band Emissions

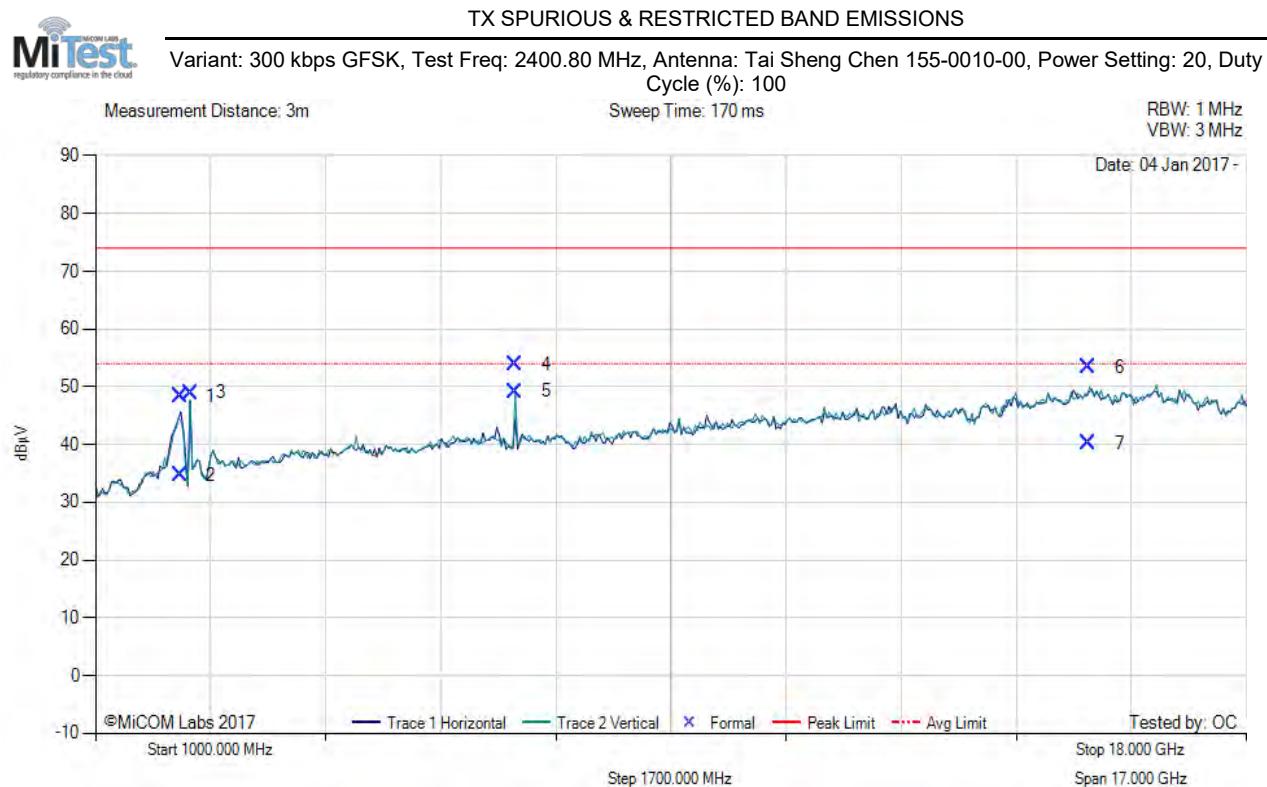

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2251.12	57.90	2.63	-12.10	48.43	Max Peak	Horizontal	189	331	74.0	-25.6	Pass	
2	2251.12	44.11	2.63	-12.10	34.64	Max Avg	Horizontal	189	331	54.0	-19.4	Pass	
3	2400.73	58.08	2.69	-11.83	48.94	Fundamental	Horizontal	148	255	--	--	Pass	
4	7202.22	57.03	4.24	-7.35	53.92	Max Peak	Vertical	155	121	74.0	-20.1	Pass	
5	7202.22	52.28	4.24	-7.35	49.17	Max Avg	Vertical	155	121	54.0	-4.8	Pass	
6	15672.43	47.28	5.92	0.14	53.34	Max Peak	Vertical	187	238	74.0	-20.7	Pass	
7	15672.43	34.22	5.92	0.14	40.28	Max Avg	Vertical	187	238	54.0	-13.7	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 300 kbps GFSK, Test Freq: 2440.00 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 20, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

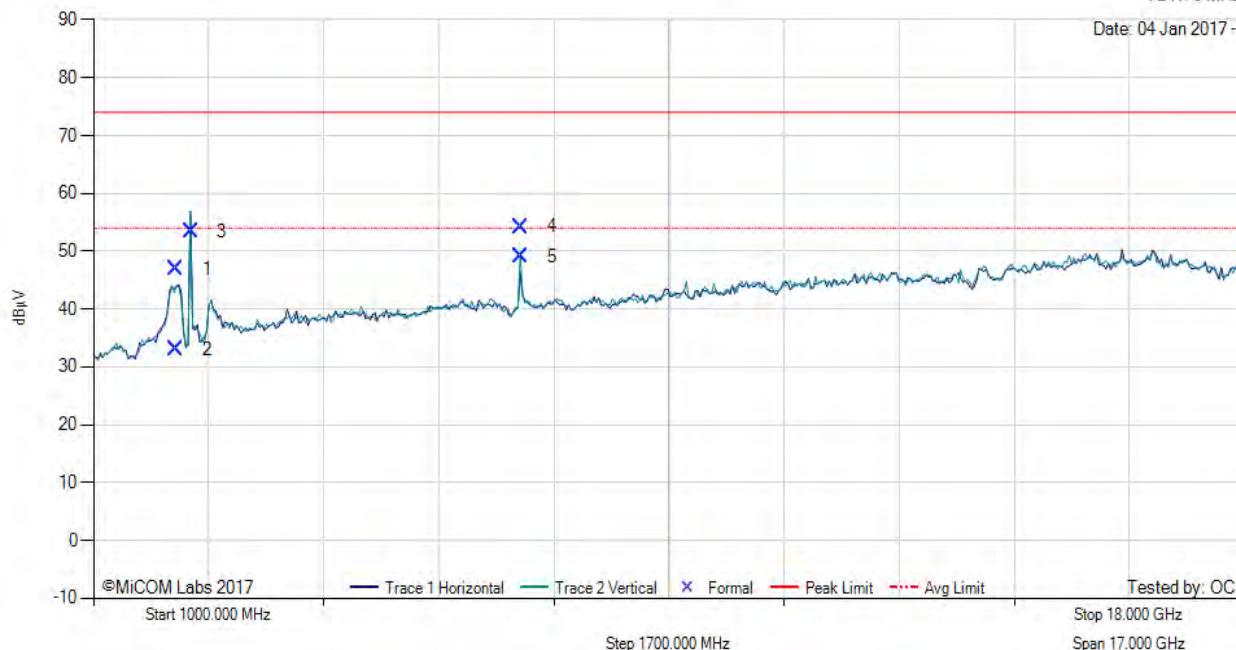

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2224.50	56.71	2.63	-12.35	46.99	Max Peak	Vertical	132	52	74.0	-27.0	Pass	
2	2224.50	42.76	2.63	-12.35	33.04	Max Avg	Vertical	132	52	54.0	-21.0	Pass	
3	2440.05	62.41	2.72	-11.72	53.41	Fundamental	Horizontal	200	109	--	--	Pass	
4	7320.17	57.25	4.26	-7.27	54.24	Max Peak	Vertical	189	75	74.0	-19.8	Pass	
5	7320.17	52.05	4.26	-7.27	49.04	Max Avg	Vertical	189	75	54.0	-5.0	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 300 kbps GFSK, Test Freq: 2472.80 MHz, Antenna: Tai Sheng Chen 155-0010-00, Power Setting: 20, Duty Cycle (%): 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

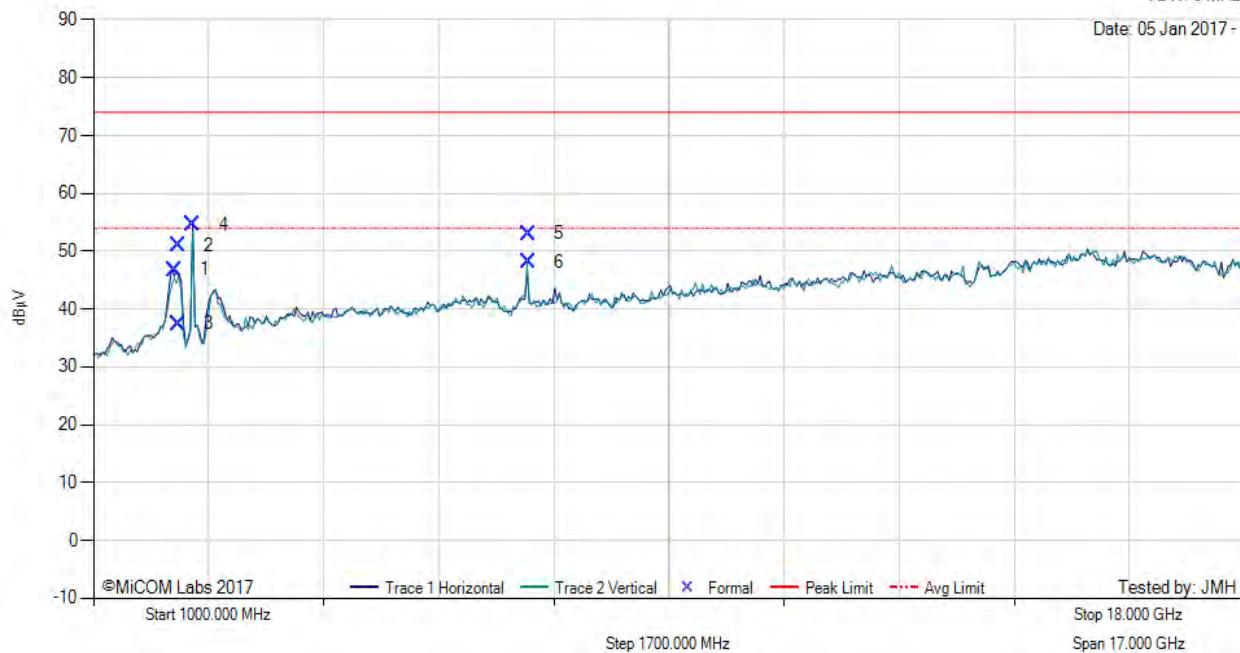

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2186.98	56.72	2.62	-12.57	46.77	Peak (NRB)	Horizontal	148	1	--	--	Pass	
2	2246.06	60.44	2.64	-12.14	50.94	Max Peak	Horizontal	122	352	74.0	-23.1	Pass	
3	2246.06	46.99	2.64	-12.14	37.49	Max Avg	Horizontal	122	352	54.0	-16.5	Pass	
4	2472.75	63.56	2.71	-11.66	54.61	Fundamental	Horizontal	151	1	--	--	Pass	
5	7418.36	55.83	4.33	-7.14	53.02	Max Peak	Vertical	183	231	74.0	-21.0	Pass	
6	7418.36	50.87	4.33	-7.14	48.06	Max Avg	Vertical	183	231	54.0	-5.9	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

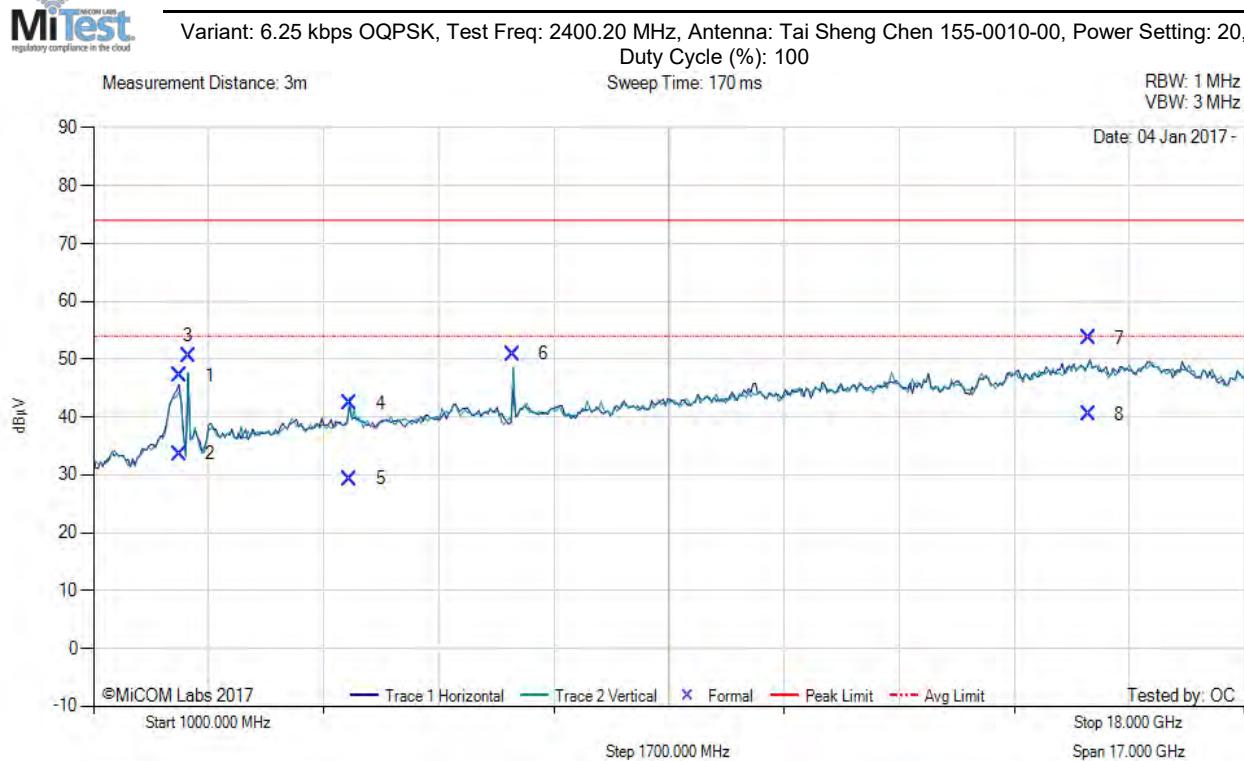

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2270.84	56.61	2.66	-12.14	47.13	Max Peak	Vertical	173	144	74.0	-26.9	Pass	
2	2270.84	43.09	2.66	-12.14	33.61	Max Avg	Vertical	173	144	54.0	-20.4	Pass	
3	2400.08	59.60	2.69	-11.84	50.45	Fundamental	Vertical	101	360	--	--	Pass	
4	4791.67	49.94	3.55	-11.11	42.38	Max Peak	Vertical	134	15	74.0	-31.6	Pass	
5	4791.67	36.86	3.55	-11.11	29.30	Max Avg	Vertical	134	15	54.0	-24.7	Pass	
6	7200.47	54.01	4.24	-7.35	50.90	Peak (NRB)	Vertical	151	172	--	--	Pass	
7	15698.95	47.48	5.98	0.19	53.65	Max Peak	Vertical	156	63	74.0	-20.4	Pass	
8	15698.95	34.36	5.98	0.19	40.53	Max Avg	Vertical	156	63	54.0	-13.5	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

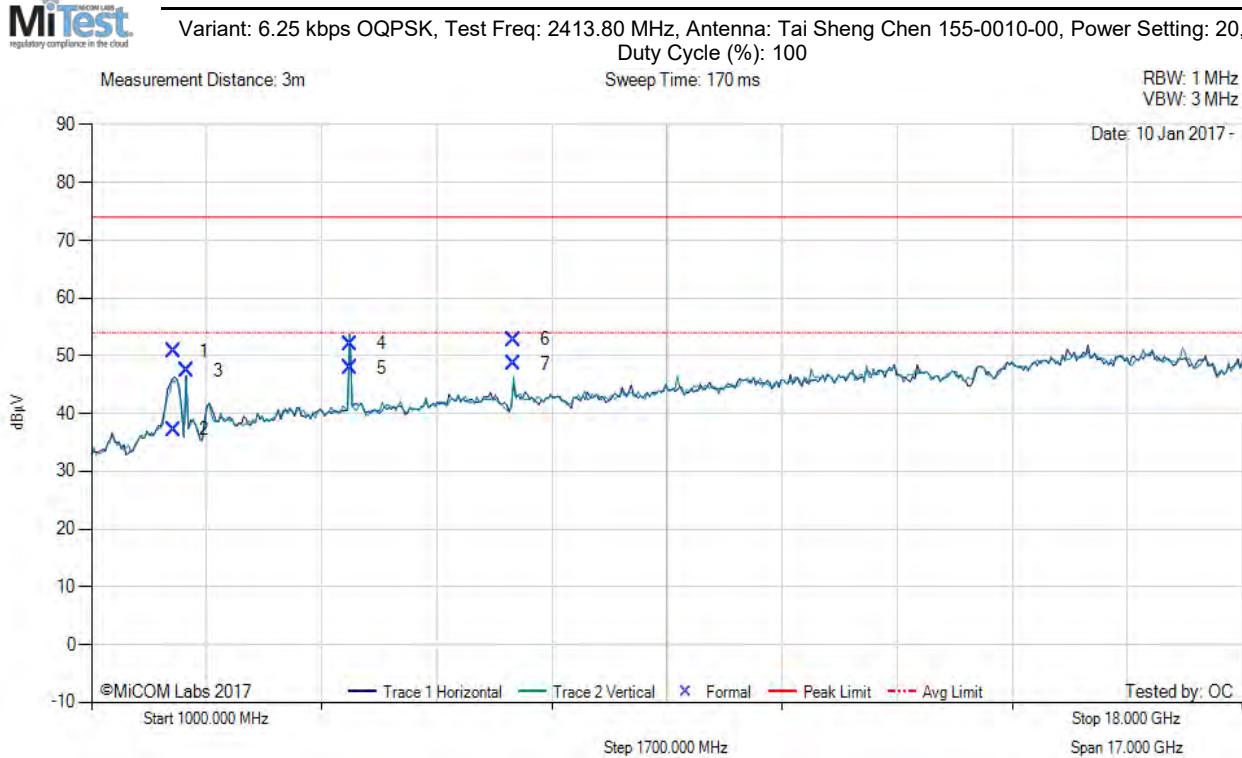

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2208.00	60.63	2.61	-12.51	50.73	Max Peak	Horizontal	148	222	74.0	-23.3	Pass	
2	2208.00	47.14	2.61	-12.51	37.24	Max Avg	Horizontal	148	222	54.0	-16.8	Pass	
3	2413.85	56.45	2.70	-11.79	47.36	Fundamental	Horizontal	151	0	--	--	Pass	
4	4827.74	59.67	3.55	-11.15	52.07	Max Peak	Vertical	171	22	74.0	-21.9	Pass	
5	4827.74	55.55	3.55	-11.15	47.95	Max Avg	Vertical	171	22	54.0	-6.1	Pass	
6	7241.43	55.87	4.24	-7.34	52.77	Max Peak	Vertical	167	285	74.0	-21.2	Pass	
7	7241.43	51.65	4.24	-7.34	48.55	Max Avg	Vertical	167	285	54.0	-5.5	Pass	


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

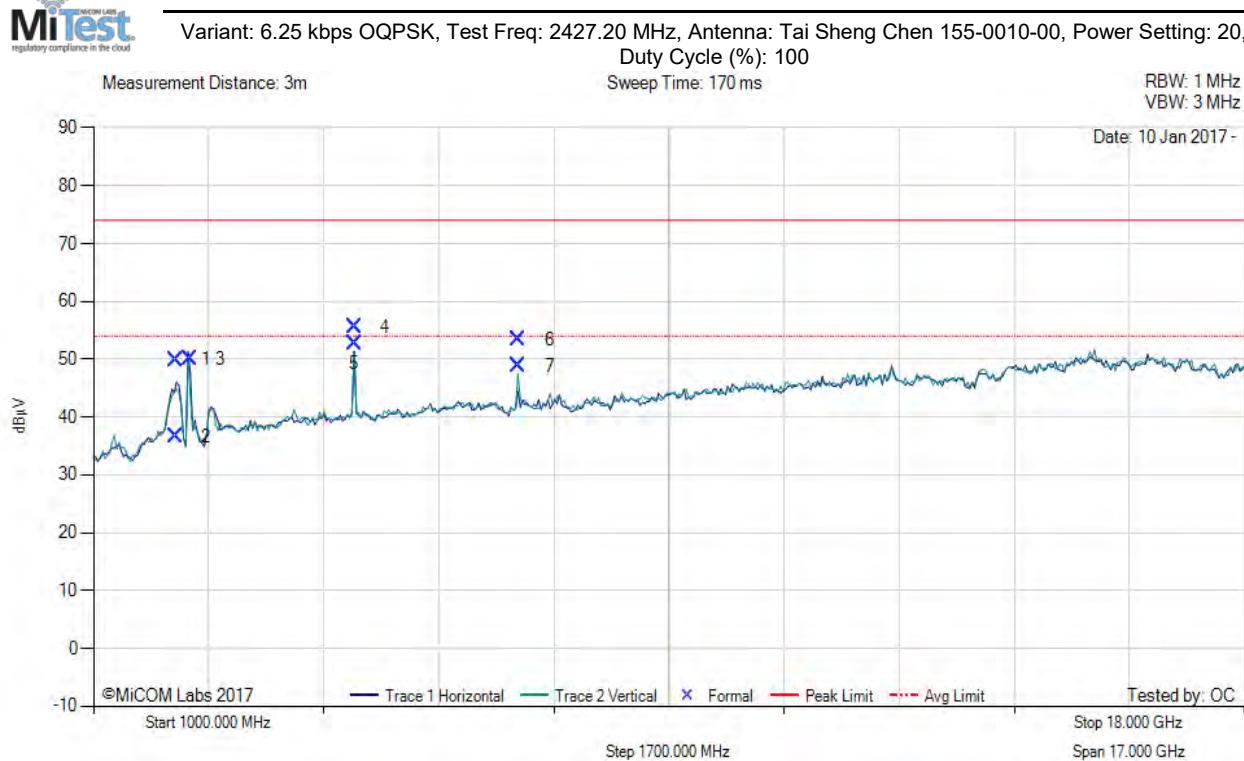

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2220.89	59.65	2.63	-12.38	49.90	Max Peak	Horizontal	133	139	74.0	-24.1	Pass	
2	2220.89	46.45	2.63	-12.38	36.70	Max Avg	Horizontal	133	139	54.0	-17.3	Pass	
3	2427.19	59.11	2.71	-11.75	50.07	Fundamental	Horizontal	182	46	--	--	Pass	
4	4854.30	63.17	3.60	-11.20	55.57	Max Peak	Horizontal	190	315	74.0	-18.4	Pass	
5	4854.30	60.41	3.60	-11.20	52.81	Max Avg	Horizontal	190	315	54.0	-1.2	Pass	
6	7281.62	56.39	4.27	-7.32	53.34	Max Peak	Vertical	161	285	74.0	-20.7	Pass	
7	7281.62	51.85	4.27	-7.32	48.80	Max Avg	Vertical	161	285	54.0	-5.2	Pass	


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

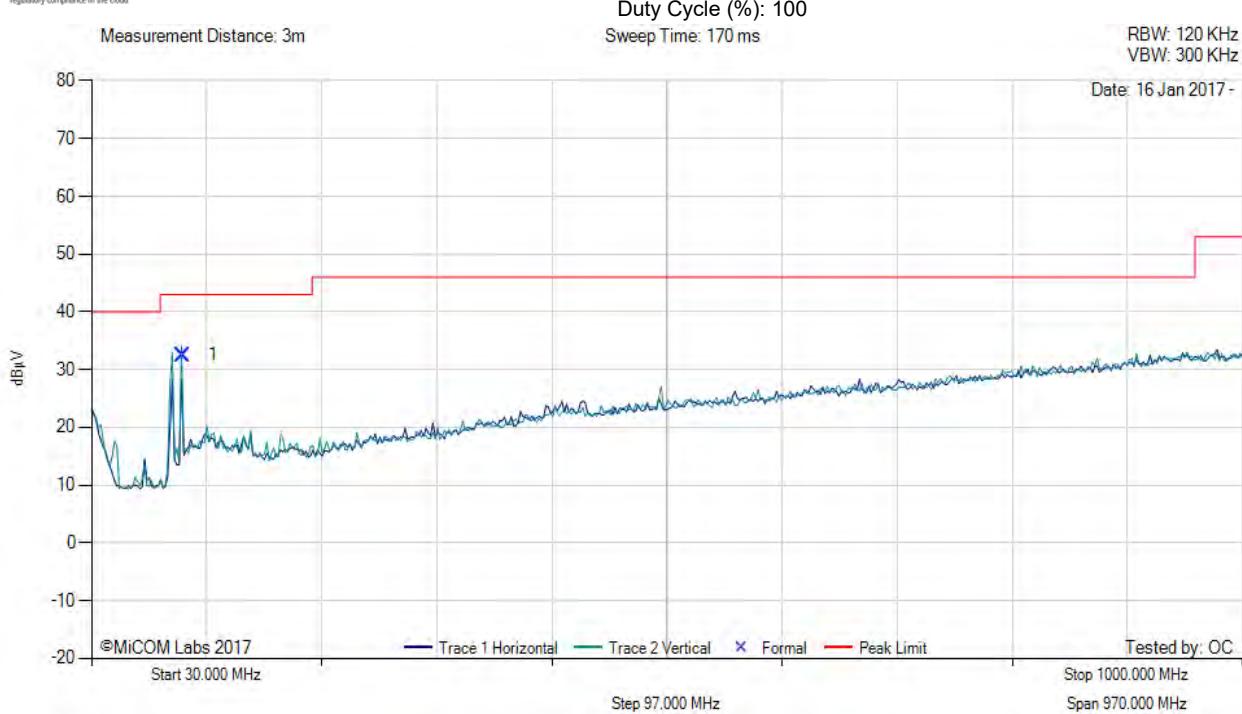

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	106.87	48.00	3.92	-19.43	32.49	Peak (NRB)	Vertical	100	0	43.0	-10.5	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

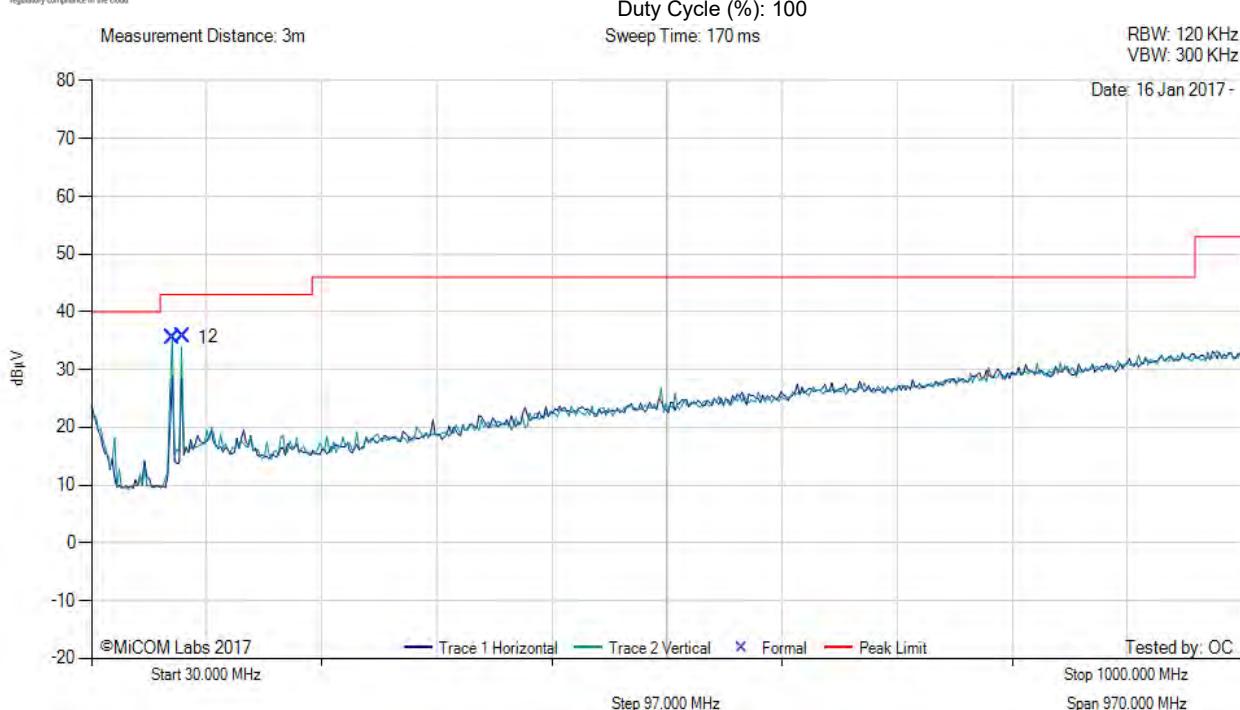


30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.18	53.47	3.87	-21.84	35.50	Peak (NRB)	Vertical	100	0	43.0	-7.5	Pass	
2	106.90	51.17	3.92	-19.43	35.66	Peak (NRB)	Vertical	100	0	43.0	-7.3	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

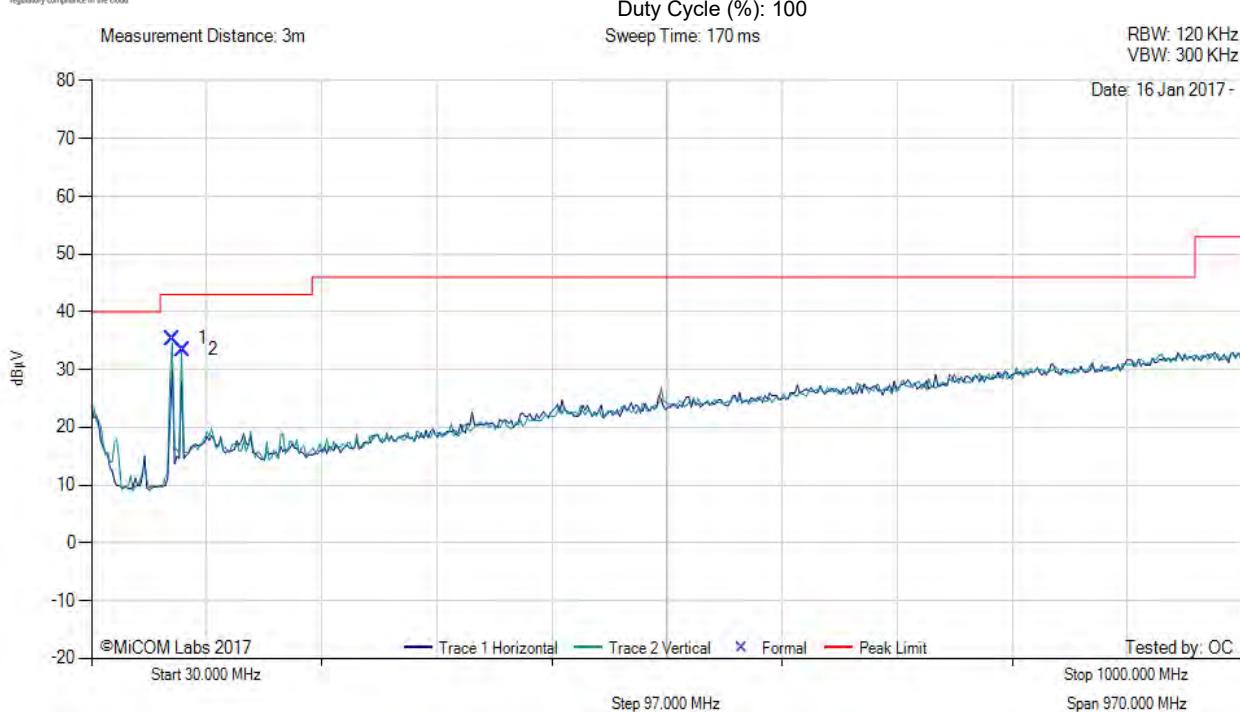


30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.13	53.30	3.87	-21.84	35.33	Peak (NRB)	Vertical	100	0	43.0	-7.7	Pass	
2	106.86	49.01	3.92	-19.43	33.50	Peak (NRB)	Vertical	100	0	43.0	-9.5	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

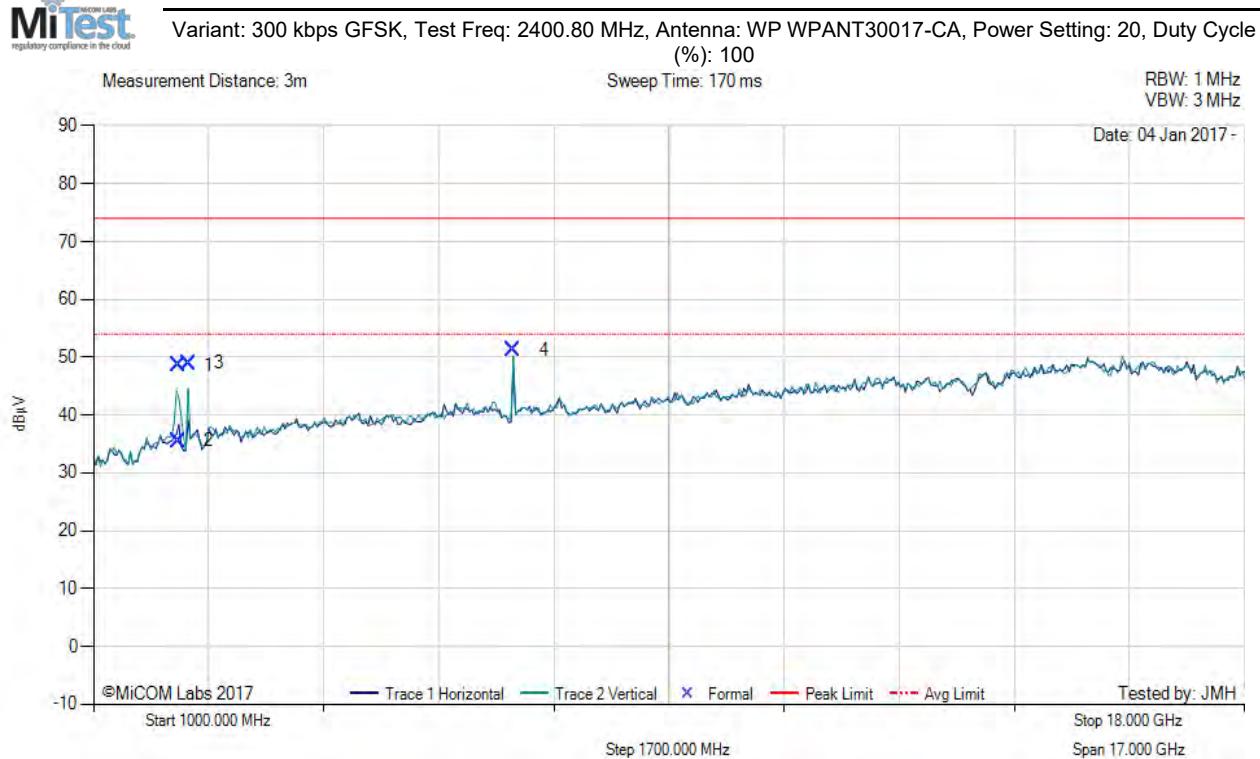

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2254.31	58.04	2.63	-12.11	48.56	Max Peak	Vertical	163	167	74.0	-25.4	Pass	
2	2254.31	44.99	2.63	-12.11	35.51	Max Avg	Vertical	163	167	54.0	-18.5	Pass	
3	2400.72	58.10	2.69	-11.83	48.96	Fundamental	Vertical	151	57	--	--	Pass	
4	7202.61	54.34	4.25	-7.35	51.24	Peak (NRB)	Vertical	151	88	--	--	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 300 kbps GFSK, Test Freq: 2440.00 MHz, Antenna: WP WPANT30017-CA, Power Setting: 20, Duty Cycle (%): 100

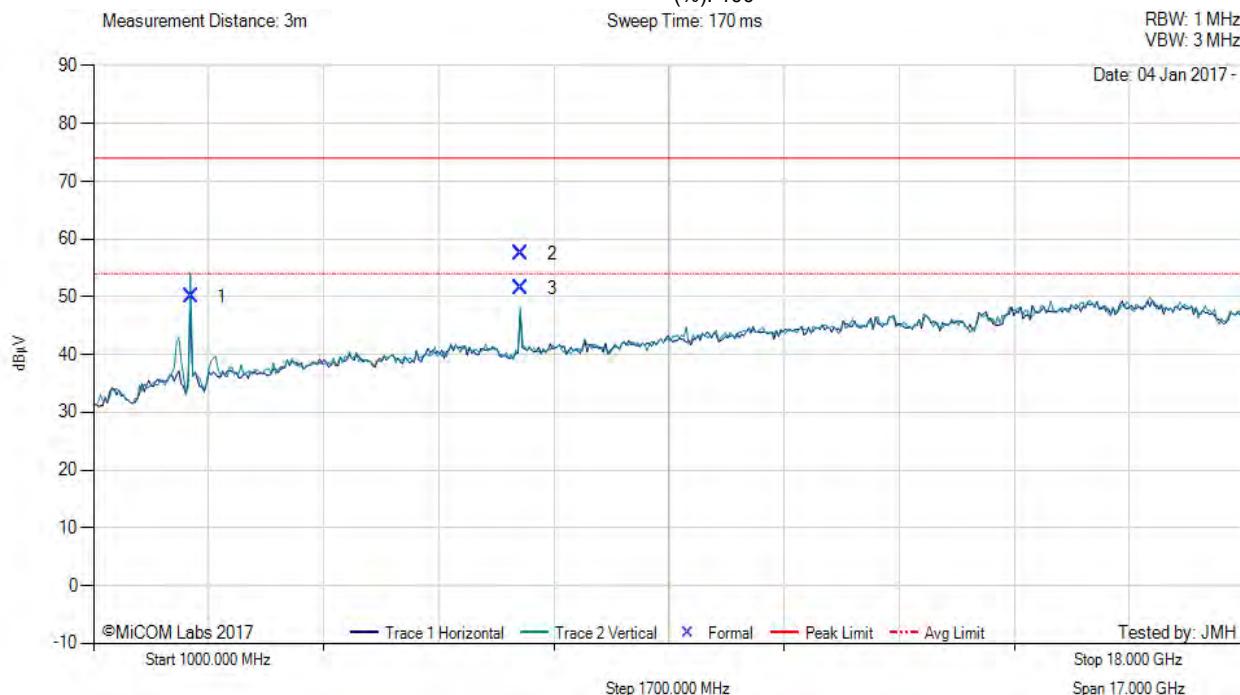

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2440.08	58.97	2.72	-11.72	49.97	Fundamental	Vertical	150	0	--	--	Pass	
2	7320.20	60.51	4.26	-7.27	57.50	Max Peak	Vertical	163	121	74.0	-16.5	Pass	
3	7320.20	54.44	4.26	-7.27	51.43	Max Avg	Vertical	163	121	54.0	-2.6	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

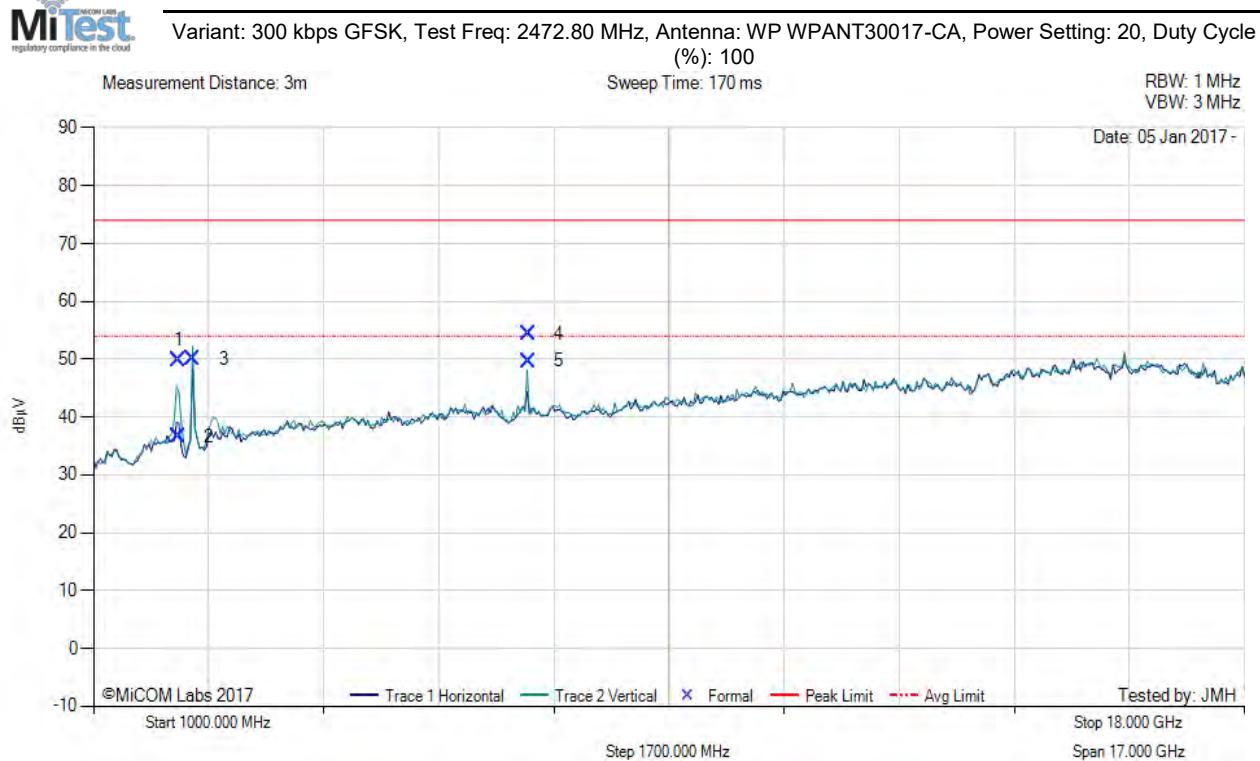

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2250.74	59.34	2.63	-12.10	49.87	Max Peak	Vertical	194	311	74.0	-24.1	Pass	
2	2250.74	46.17	2.63	-12.10	36.70	Max Avg	Vertical	194	311	54.0	-17.3	Pass	
3	2472.83	59.00	2.71	-11.66	50.05	Fundamental	Vertical	200	1	--	--	Pass	
4	7418.35	57.13	4.33	-7.14	54.32	Max Peak	Vertical	196	322	74.0	-19.7	Pass	
5	7418.35	52.52	4.33	-7.14	49.71	Max Avg	Vertical	196	322	54.0	-4.3	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2400.80 MHz, Antenna: WP WPANT30017-CA, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

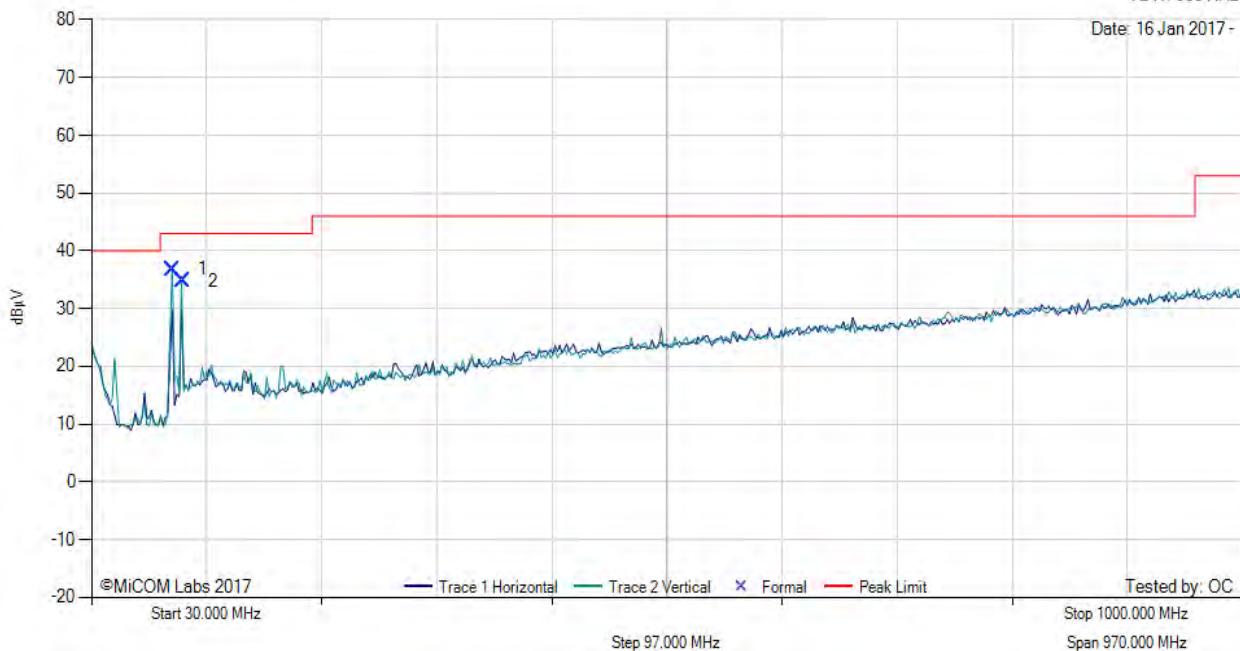

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.16	54.78	3.87	-21.84	36.81	Peak (NRB)	Vertical	100	66	43.0	-6.2	Pass	
2	106.98	50.31	3.92	-19.43	34.80	Peak (NRB)	Vertical	100	0	43.0	-8.2	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

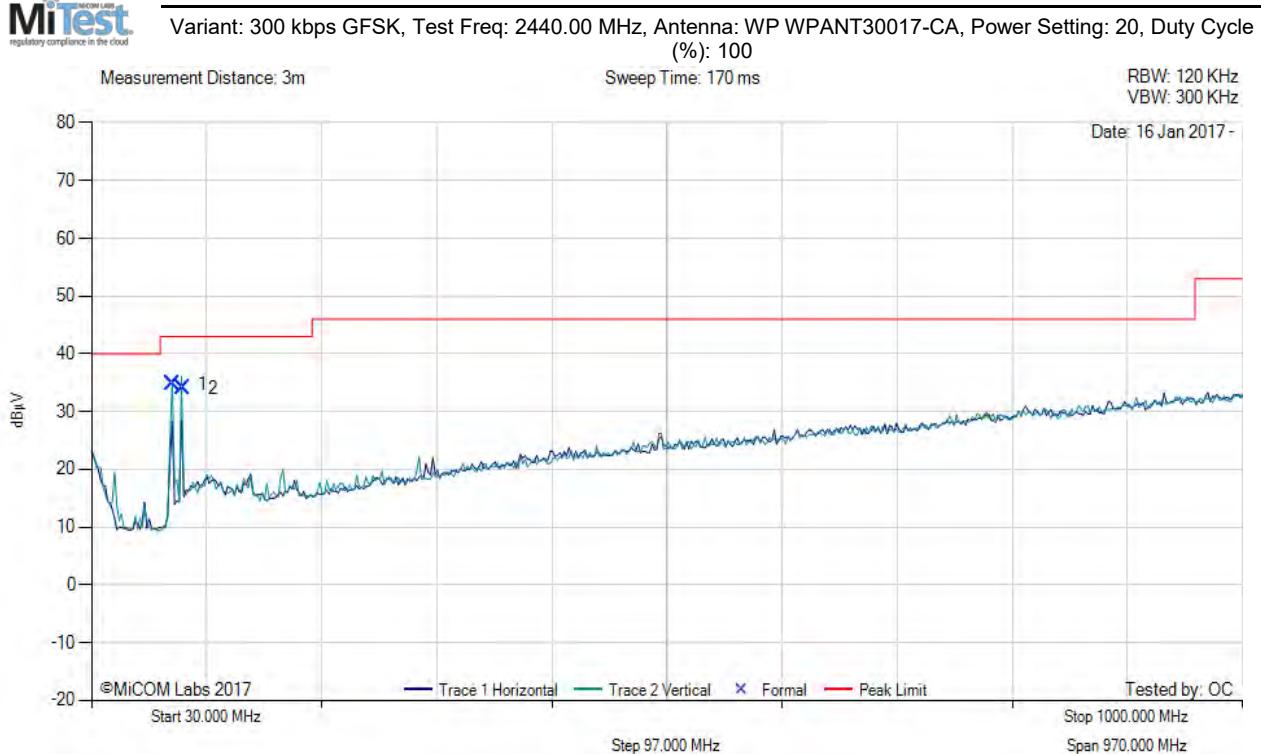

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.07	52.67	3.87	-21.84	34.70	Peak (NRB)	Vertical	100	0	43.0	-8.3	Pass	
2	106.89	49.64	3.92	-19.43	34.13	Peak (NRB)	Vertical	100	33	43.0	-8.9	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)




TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2472.80 MHz, Antenna: WP WPANT30017-CA, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

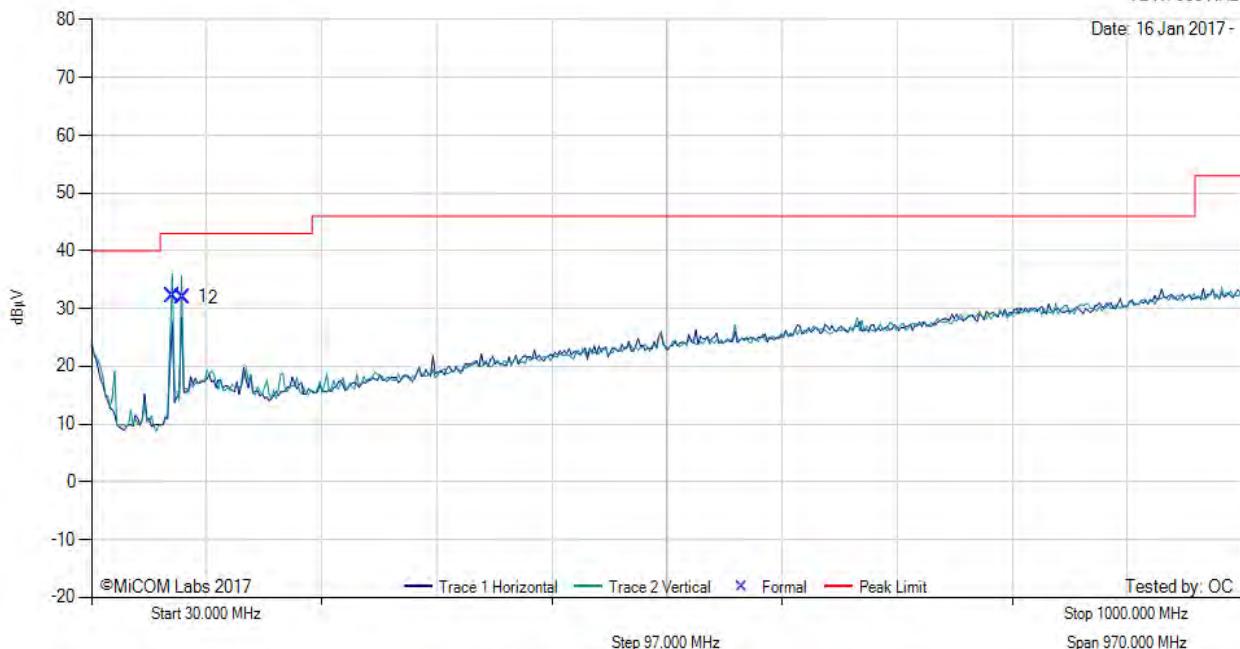

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.06	50.14	3.87	-21.84	32.17	Peak (NRB)	Vertical	100	0	43.0	-10.8	Pass	
2	106.88	47.42	3.92	-19.43	31.91	Peak (NRB)	Vertical	100	0	43.0	-11.1	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

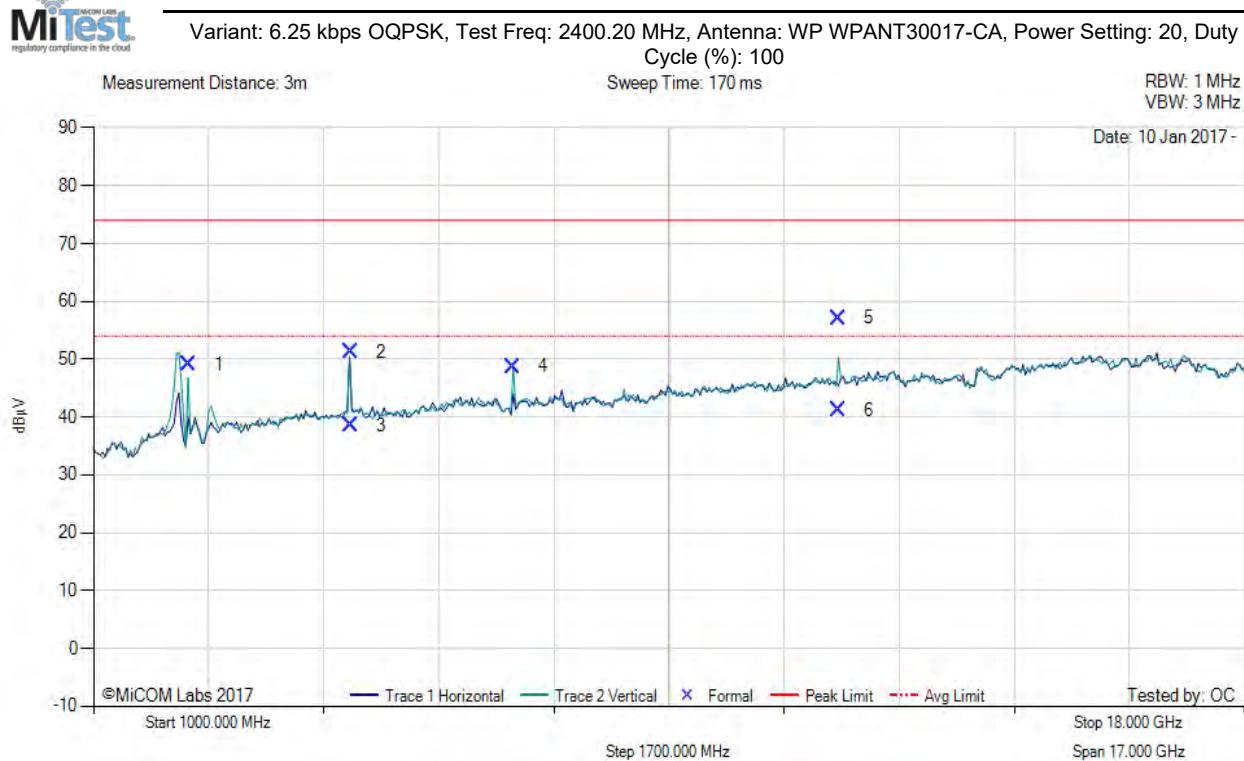

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2400.12	58.19	2.69	-11.84	49.04	Fundamental	Vertical	151	139	--	--	Pass	
2	4800.33	58.82	3.52	-11.12	51.22	Max Peak	Vertical	108	261	74.0	-22.8	Pass	
3	4800.33	46.18	3.52	-11.12	38.58	Max Avg	Vertical	108	261	54.0	-15.4	Pass	
4	7200.69	51.83	4.24	-7.35	48.72	Peak (NRB)	Vertical	151	63	74.0	-25.3	Pass	
5	12001.16	56.91	5.37	-5.17	57.11	Max Peak	Vertical	185	252	74.0	-16.9	Pass	
6	12001.16	40.96	5.37	-5.17	41.16	Max Avg	Vertical	185	252	54.0	-12.8	Pass	


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

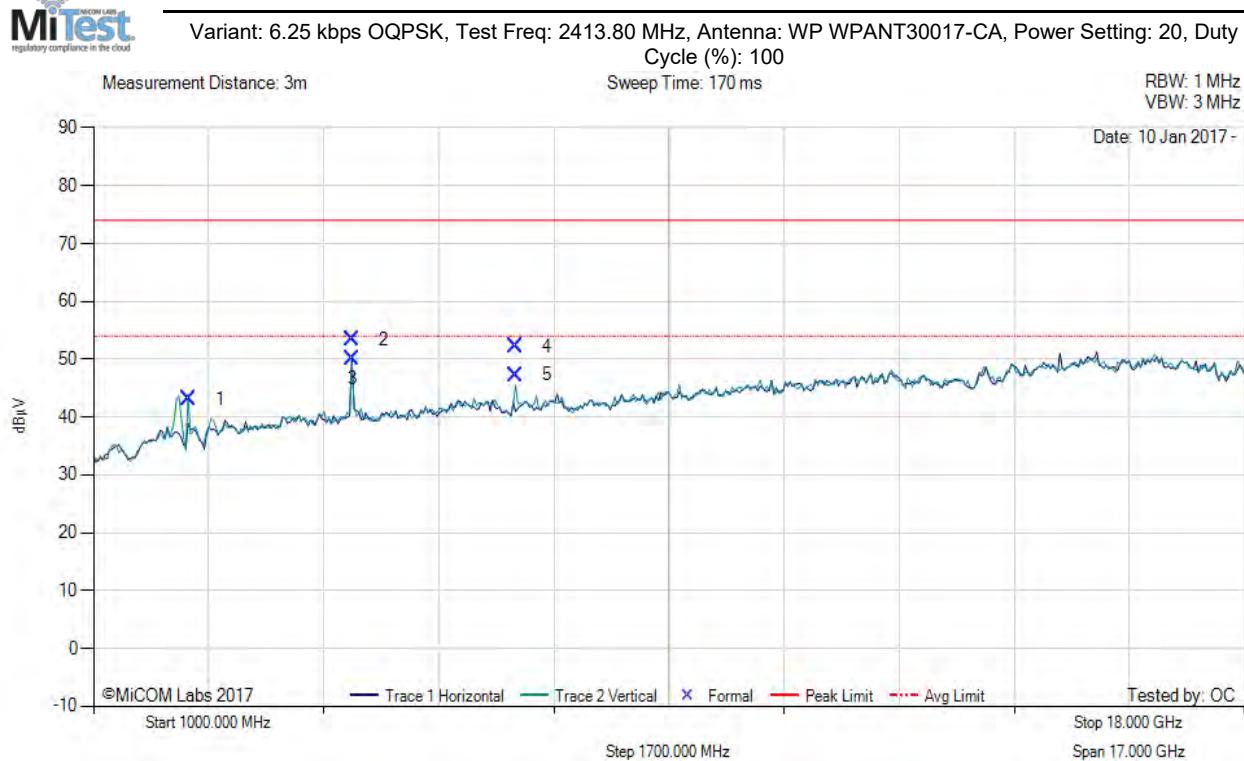

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail		
1	2413.85	52.22	2.70	-11.79	43.13	Fundamental	Vertical	151	135	--	--	Pass		
2	4827.50	60.99	3.55	-11.15	53.39	Max Peak	Horizontal	121	315	74.0	-20.6	Pass		
3	4827.50	57.75	3.55	-11.15	50.15	Max Avg	Horizontal	121	315	54.0	-3.9	Pass		
4	7241.47	55.24	4.24	-7.34	52.14	Max Peak	Vertical	141	282	74.0	-21.9	Pass		
5	7241.47	50.43	4.24	-7.34	47.33	Max Avg	Vertical	141	282	54.0	-6.7	Pass		


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

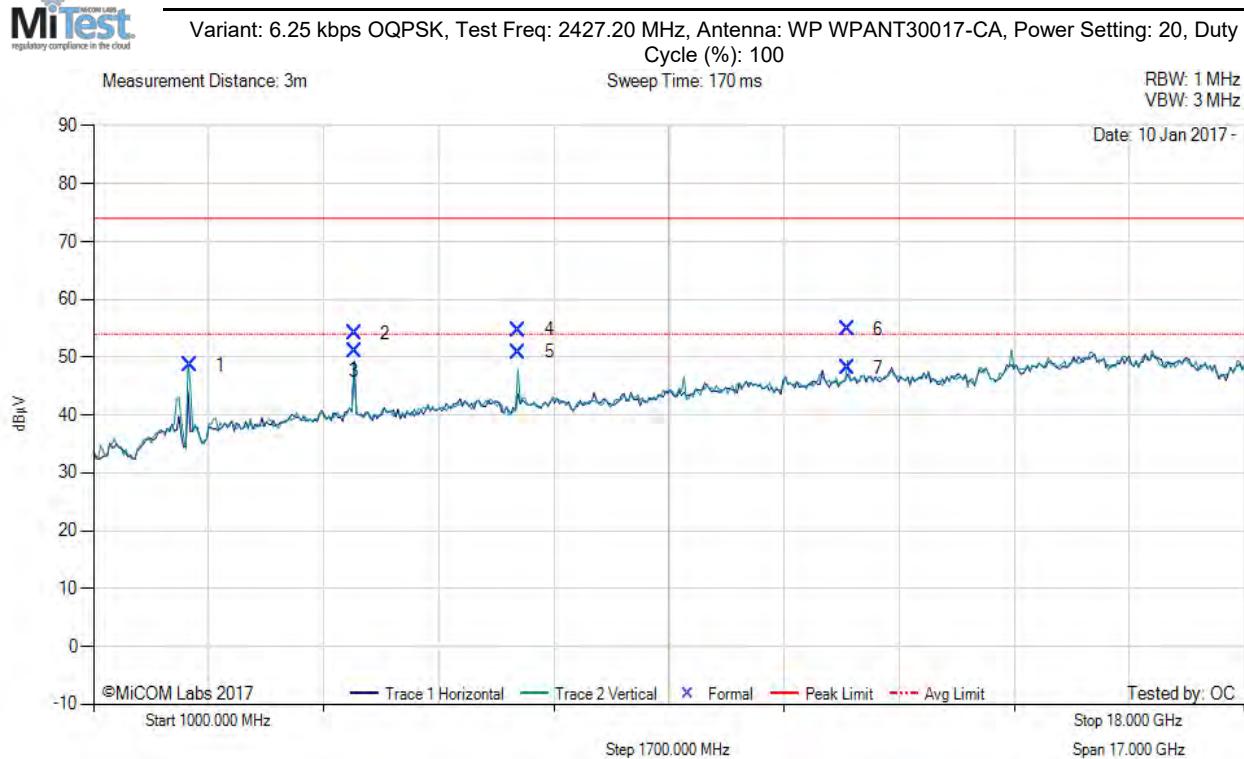

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2427.22	57.71	2.71	-11.75	48.67	Fundamental	Vertical	151	96	--	--	Pass	
2	4854.44	61.70	3.60	-11.20	54.10	Max Peak	Horizontal	142	315	74.0	-19.9	Pass	
3	4854.44	58.75	3.60	-11.20	51.15	Max Avg	Horizontal	142	315	54.0	-2.9	Pass	
4	7281.59	57.79	4.27	-7.32	54.74	Max Peak	Vertical	142	292	74.0	-19.3	Pass	
5	7281.59	53.92	4.27	-7.32	50.87	Max Avg	Vertical	142	292	54.0	-3.1	Pass	
6	12136.03	54.46	5.44	-5.12	54.78	Max Peak	Vertical	150	281	74.0	-19.2	Pass	
7	12136.03	47.76	5.44	-5.12	48.08	Max Avg	Vertical	150	281	54.0	-5.9	Pass	

**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 300 kbps GFSK, Test Freq: 2400.80 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%): 100

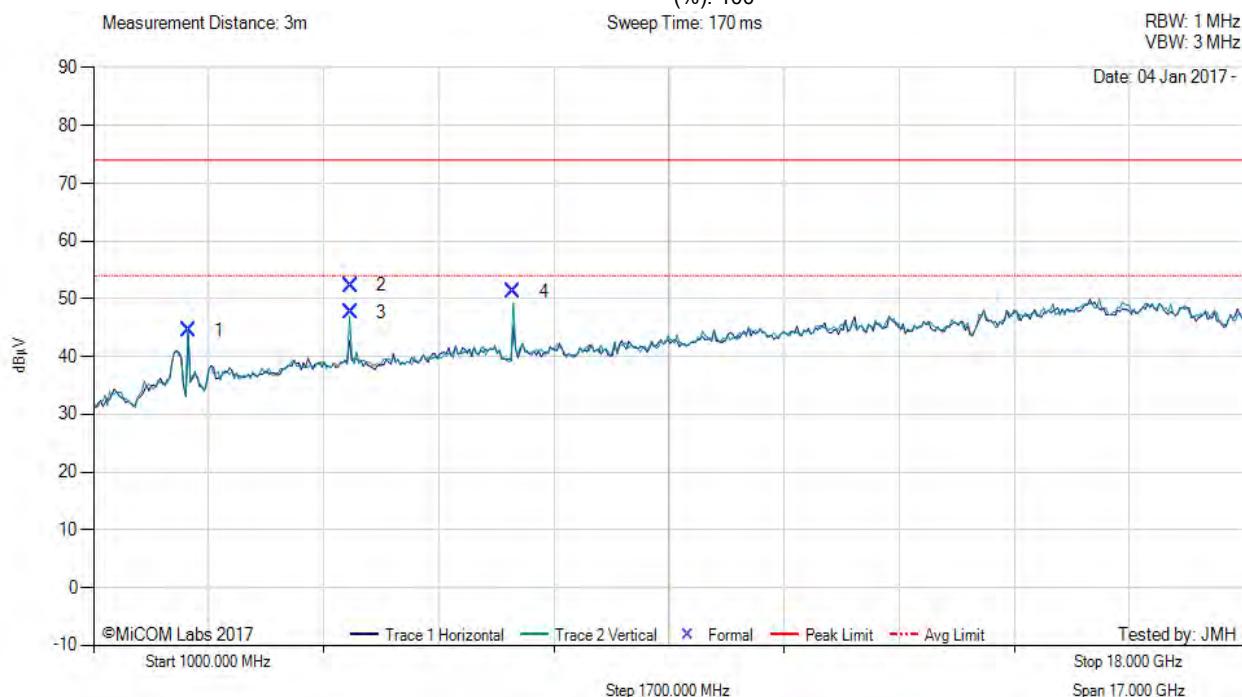

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2400.86	53.64	2.69	-11.83	44.50	Fundamental	Vertical	151	96	--	--	Pass	
2	4801.73	59.92	3.51	-11.12	52.31	Max Peak	Vertical	154	133	74.0	-21.7	Pass	
3	4801.73	55.22	3.51	-11.12	47.61	Max Avg	Vertical	154	133	54.0	-6.4	Pass	
4	7202.09	54.35	4.24	-7.35	51.24	Peak (NRB)	Vertical	151	96	--	--	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 300 kbps GFSK, Test Freq: 2440.00 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%): 100

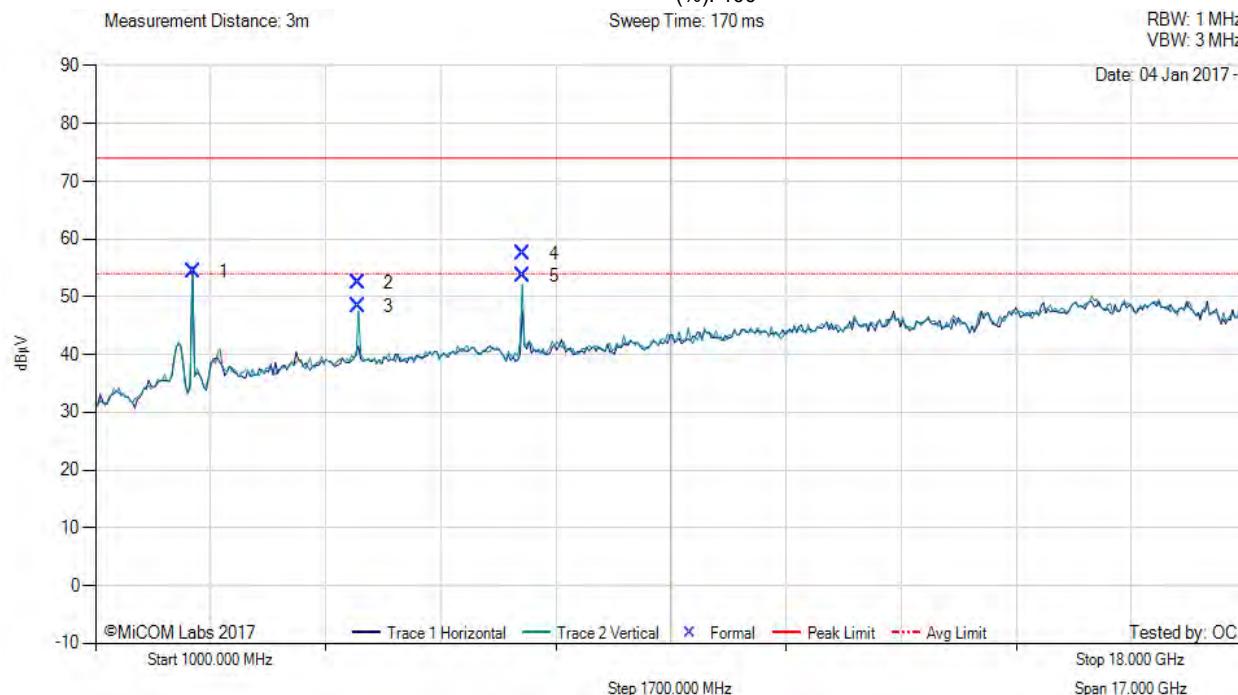

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2439.96	63.43	2.72	-11.72	54.43	Fundamental	Horizontal	100	99	--	--	Pass	
2	4879.84	60.07	3.60	-11.25	52.42	Max Peak	Vertical	179	144	74.0	-21.6	Pass	
3	4879.84	55.98	3.60	-11.25	48.33	Max Avg	Vertical	179	144	54.0	-5.7	Pass	
4	7320.04	60.43	4.26	-7.27	57.42	Max Peak	Vertical	195	181	74.0	-16.6	Pass	
5	7320.04	56.58	4.26	-7.27	53.57	Max Avg	Vertical	195	181	54.0	-0.4	Pass	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS

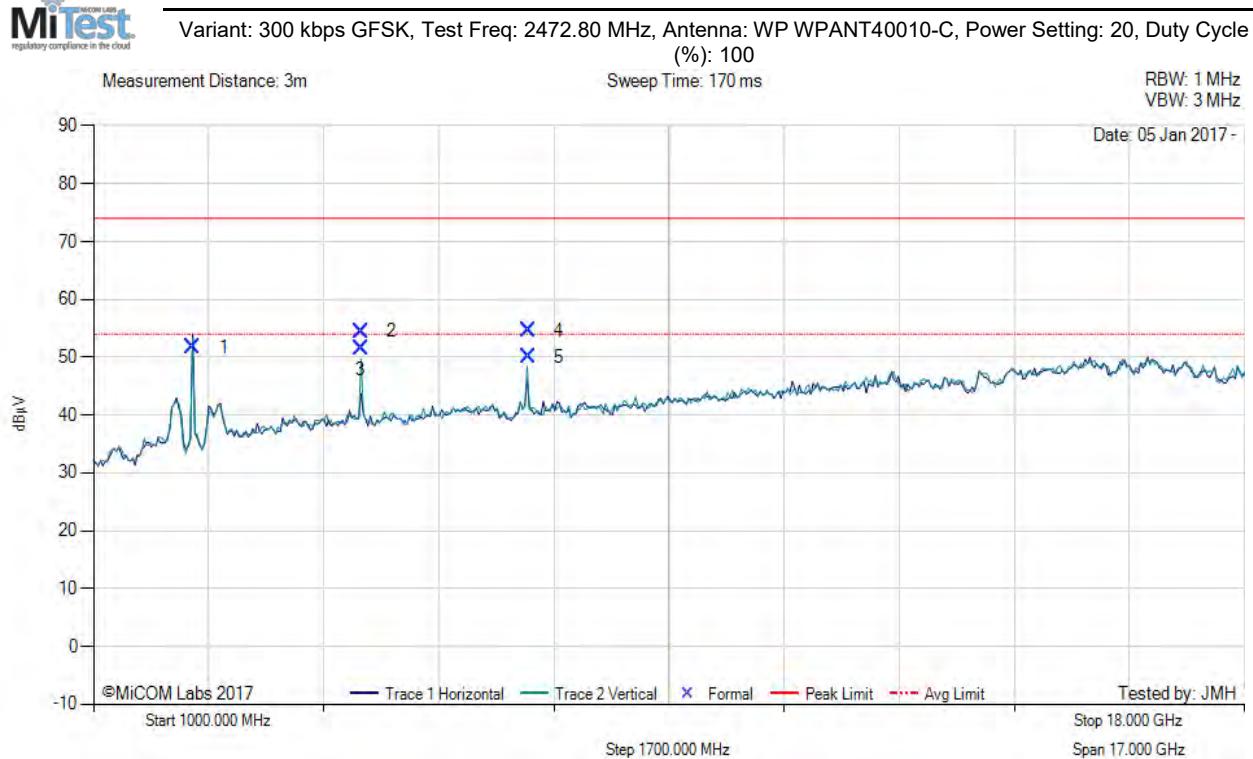

1000.00 - 18000.00 MHz														
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail		
1	2472.67	60.65	2.71	-11.66	51.70	Fundamental	Horizontal	101	47	--	--	Pass		
2	4945.65	62.36	3.55	-11.44	54.47	Max Peak	Vertical	169	182	74.0	-19.5	Pass		
3	4945.65	59.31	3.55	-11.44	51.42	Max Avg	Vertical	169	182	54.0	-2.6	Pass		
4	7418.49	57.39	4.33	-7.14	54.58	Max Peak	Vertical	176	90	74.0	-19.4	Pass		
5	7418.49	52.85	4.33	-7.14	50.04	Max Avg	Vertical	176	90	54.0	-4.0	Pass		

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2400.80 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

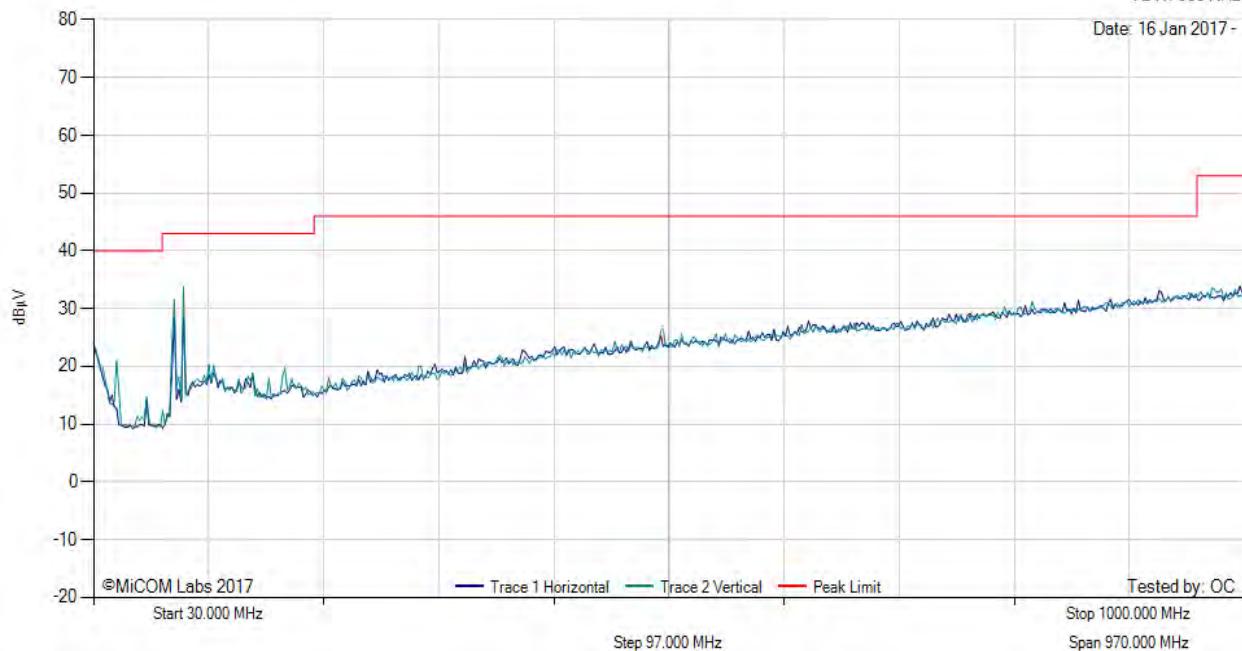

There are no emissions found within 6dB of the limit line.

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2440.00 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

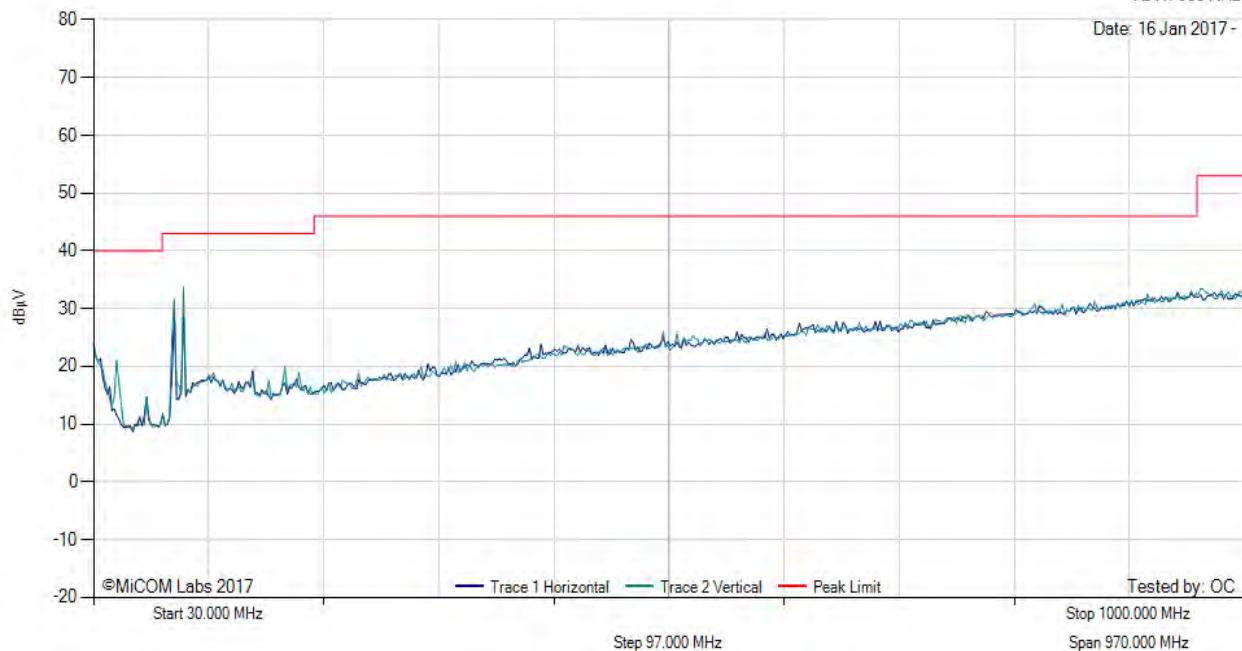

There are no emissions found within 6dB of the limit line.

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




TX Spurious & Restricted Band Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2472.80 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 120 KHz  
VBW: 300 KHz

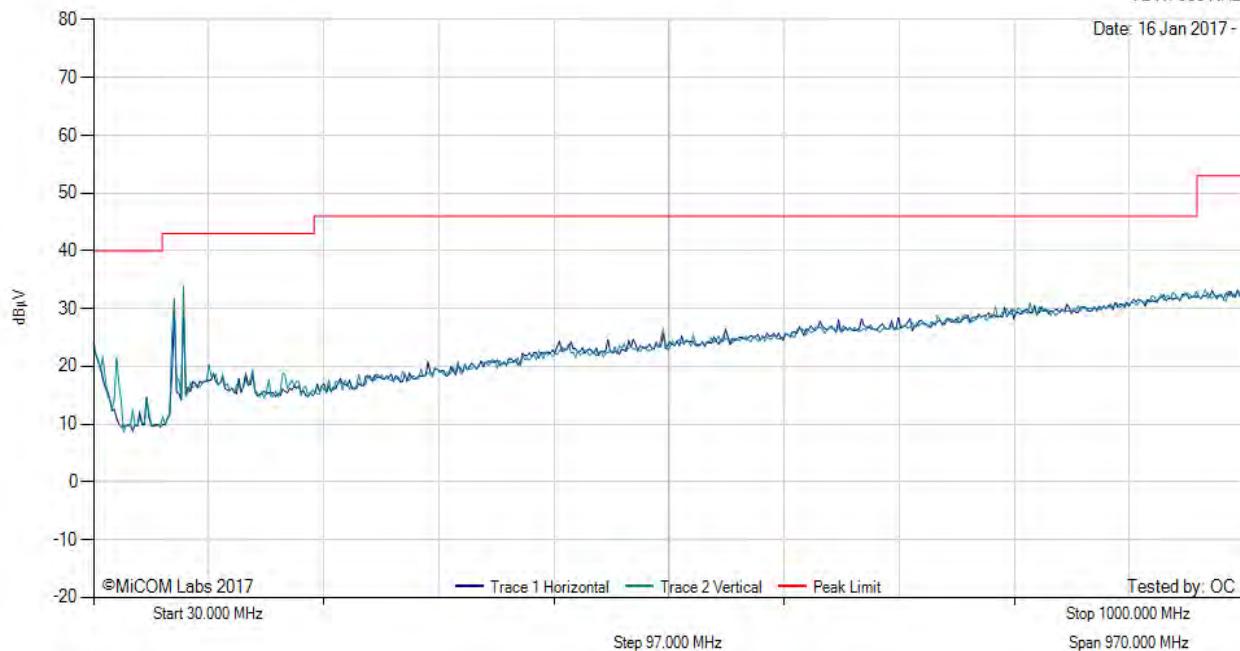

There are no emissions found within 6dB of the limit line.

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 6.25 kbps OQPSK, Test Freq: 2400.20 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

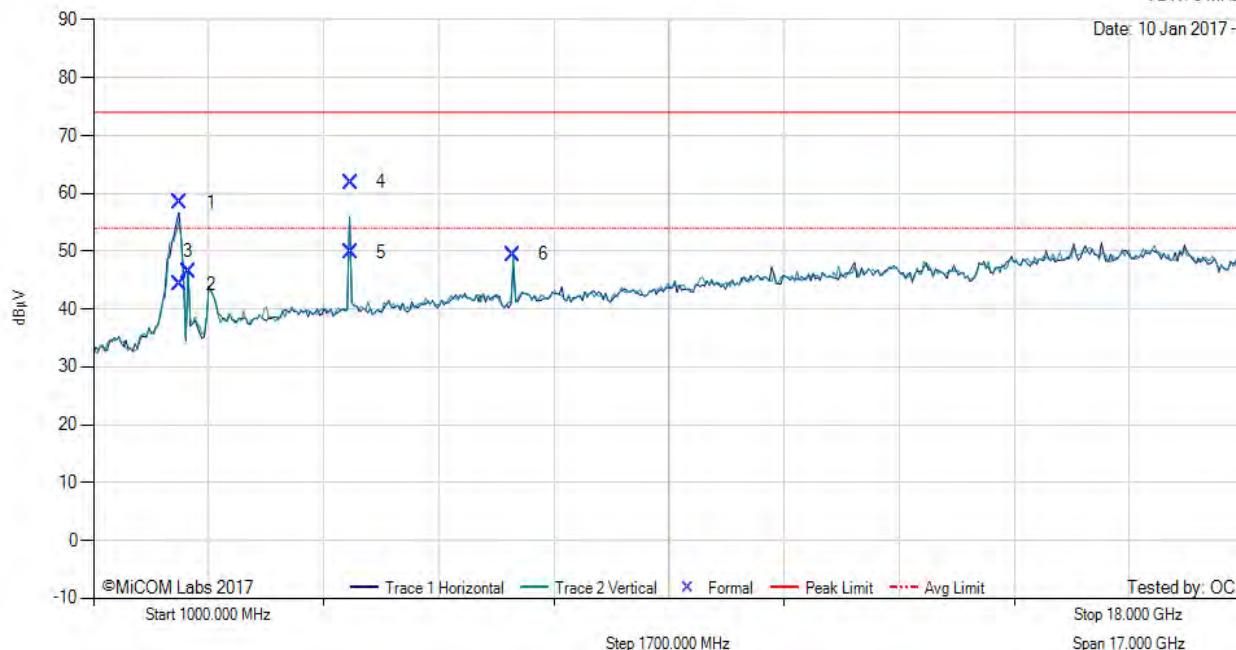

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2280.20	67.94	2.66	-12.15	58.45	Max Peak	Horizontal	110	276	74.0	-15.6	Pass	
2	2280.20	53.77	2.66	-12.15	44.28	Max Avg	Horizontal	110	276	54.0	-9.7	Pass	
3	2400.23	55.63	2.69	-11.84	46.48	Fundamental	Vertical	151	0	--	--	Pass	
4	4800.28	69.51	3.52	-11.12	61.91	Max Peak	Horizontal	111	267	74.0	-12.1	Pass	
5	4800.28	57.38	3.52	-11.12	49.78	Max Avg	Horizontal	111	267	54.0	-4.2	Pass	
6	7200.63	52.57	4.24	-7.35	49.46	Peak (NRB)	Vertical	151	118	74.0	-24.5	Pass	


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



TX SPURIOUS & RESTRICTED BAND EMISSIONS  
 Variant: 6.25 kbps OQPSK, Test Freq: 2413.80 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

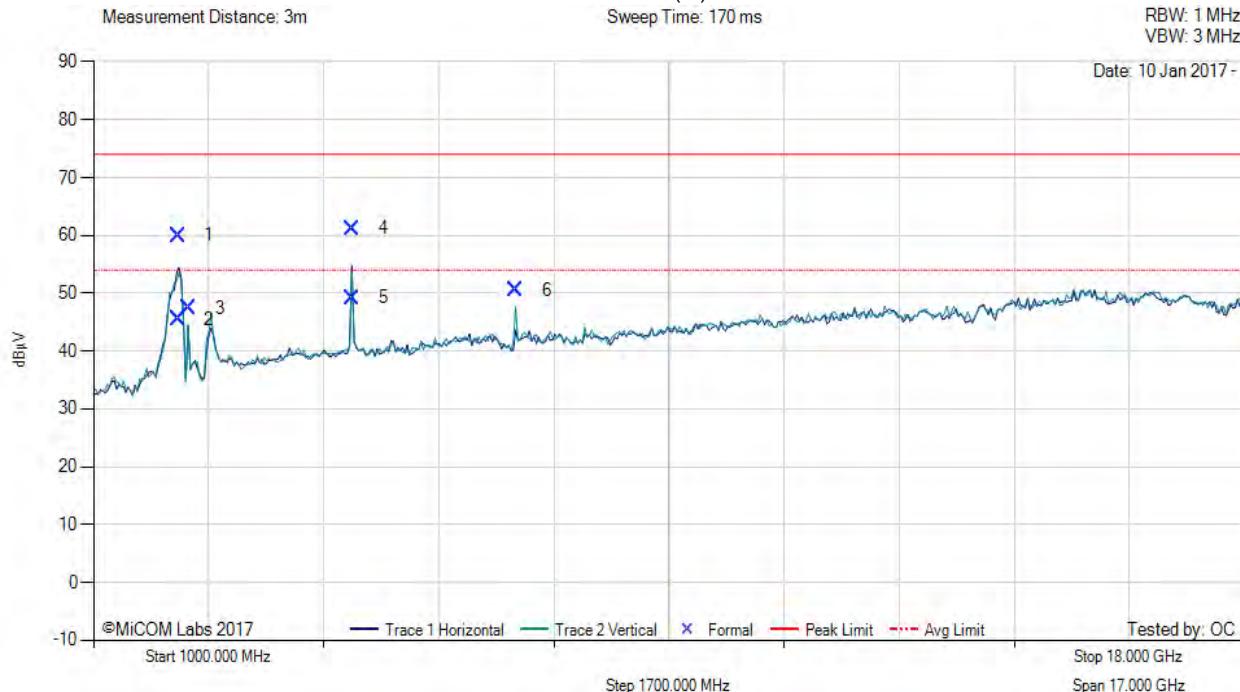

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2259.28	69.49	2.63	-12.11	60.01	Max Peak	Horizontal	174	261	74.0	-14.0	Pass	
2	2259.28	54.97	2.63	-12.11	45.49	Max Avg	Horizontal	174	261	54.0	-8.5	Pass	
3	2413.76	56.47	2.70	-11.79	47.38	Fundamental	Vertical	151	86	--	--	Pass	
4	4827.53	68.82	3.55	-11.15	61.22	Max Peak	Horizontal	102	262	74.0	-12.8	Pass	
5	4827.53	56.79	3.55	-11.15	49.19	Max Avg	Horizontal	102	262	54.0	-4.8	Pass	
6	7241.40	53.62	4.24	-7.34	50.52	Peak (NRB)	Vertical	151	74	74.0	-23.5	Pass	

**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### TX SPURIOUS & RESTRICTED BAND EMISSIONS


Variant: 6.25 kbps OQPSK, Test Freq: 2427.20 MHz, Antenna: WP WPANT40010-C, Power Setting: 20, Duty Cycle (%) 100

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

Date: 10 Jan 2017 -

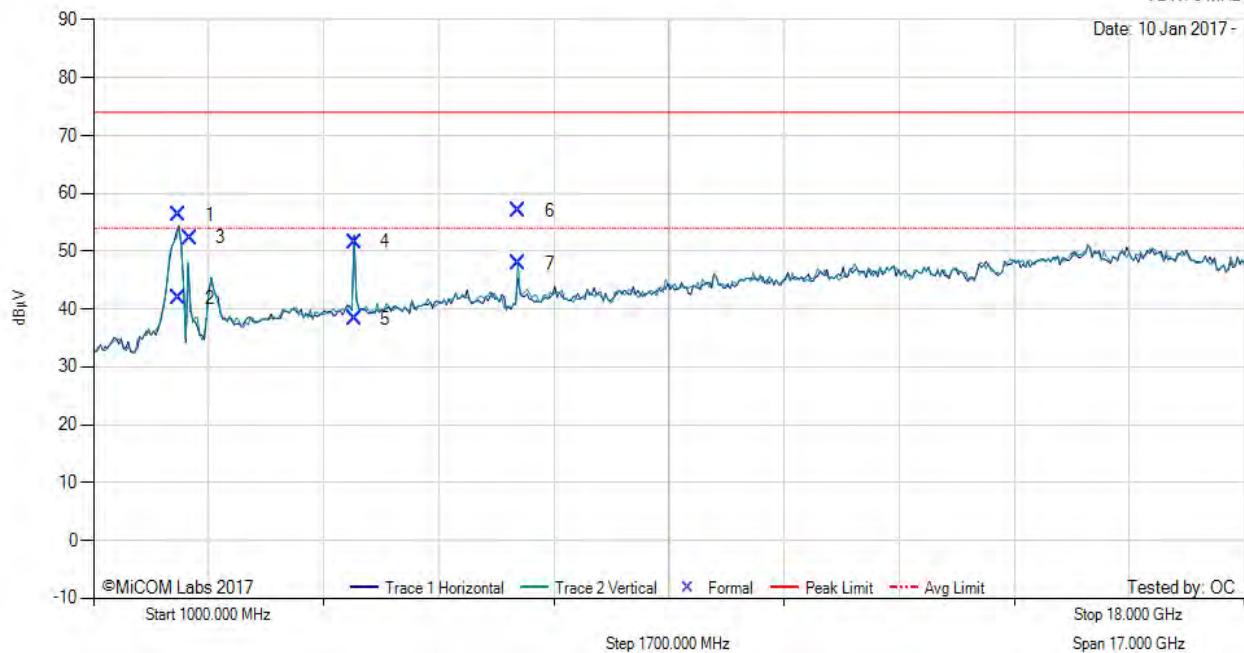


1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2263.29	65.74	2.64	-12.12	56.26	Max Peak	Vertical	196	333	74.0	-17.7	Pass	
2	2263.29	51.42	2.64	-12.12	41.94	Max Avg	Vertical	196	333	54.0	-12.1	Pass	
3	2427.19	61.37	2.71	-11.75	52.33	Fundamental	Vertical	151	1	--	--	Pass	
4	4854.38	59.20	3.60	-11.20	51.60	Max Peak	Vertical	100	325	74.0	-22.4	Pass	
5	4854.38	45.95	3.60	-11.20	38.35	Max Avg	Vertical	100	325	54.0	-15.7	Pass	
6	7281.61	60.08	4.27	-7.32	57.03	Max Peak	Vertical	171	290	74.0	-17.0	Pass	
7	7281.61	50.97	4.27	-7.32	47.92	Max Avg	Vertical	171	290	54.0	-6.1	Pass	

**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

### A.1.1.2. Restricted Edge & Band-Edge Emissions

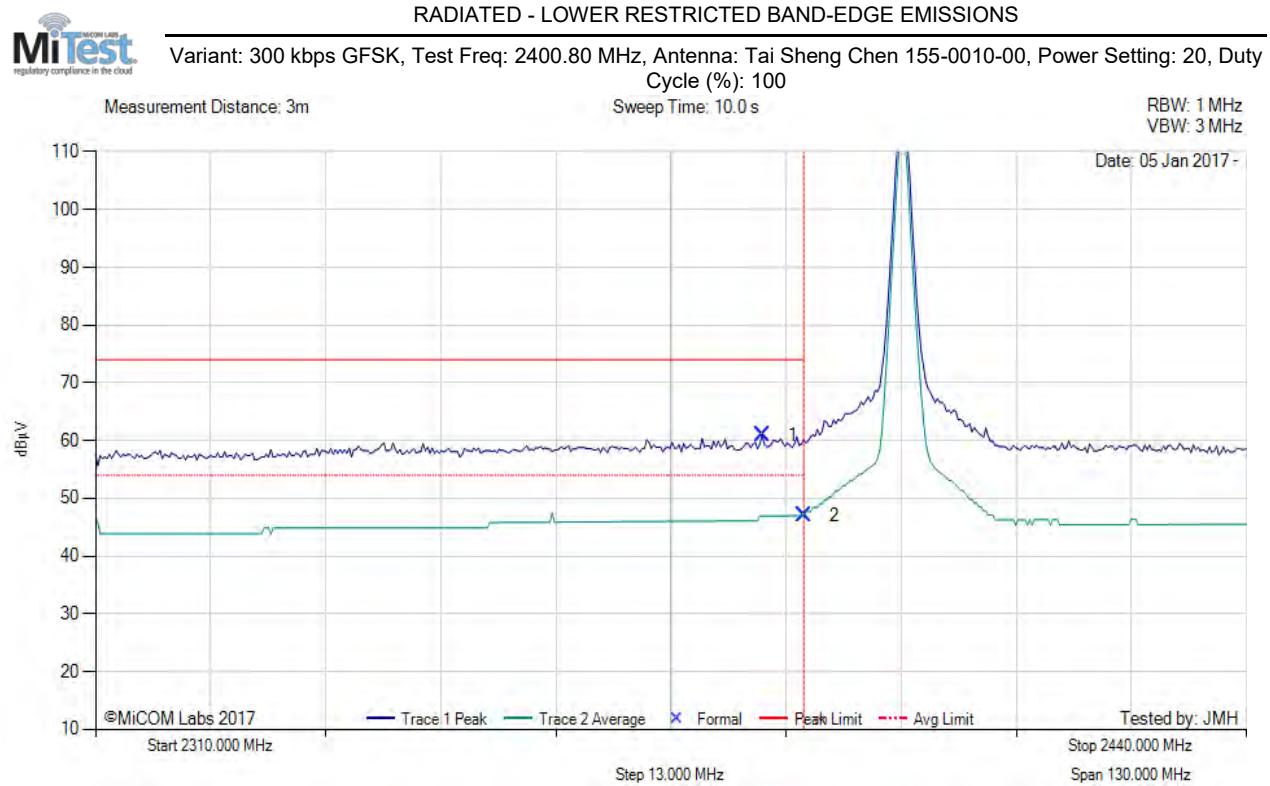


2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2385.31	26.25	2.68	32.00	60.93	Max Peak	Vertical	173	42	74.0	-13.1	Pass	
2	2390.00	12.26	2.69	32.04	46.99	Max Avg	Vertical	173	42	54.0	-7.0	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

## RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

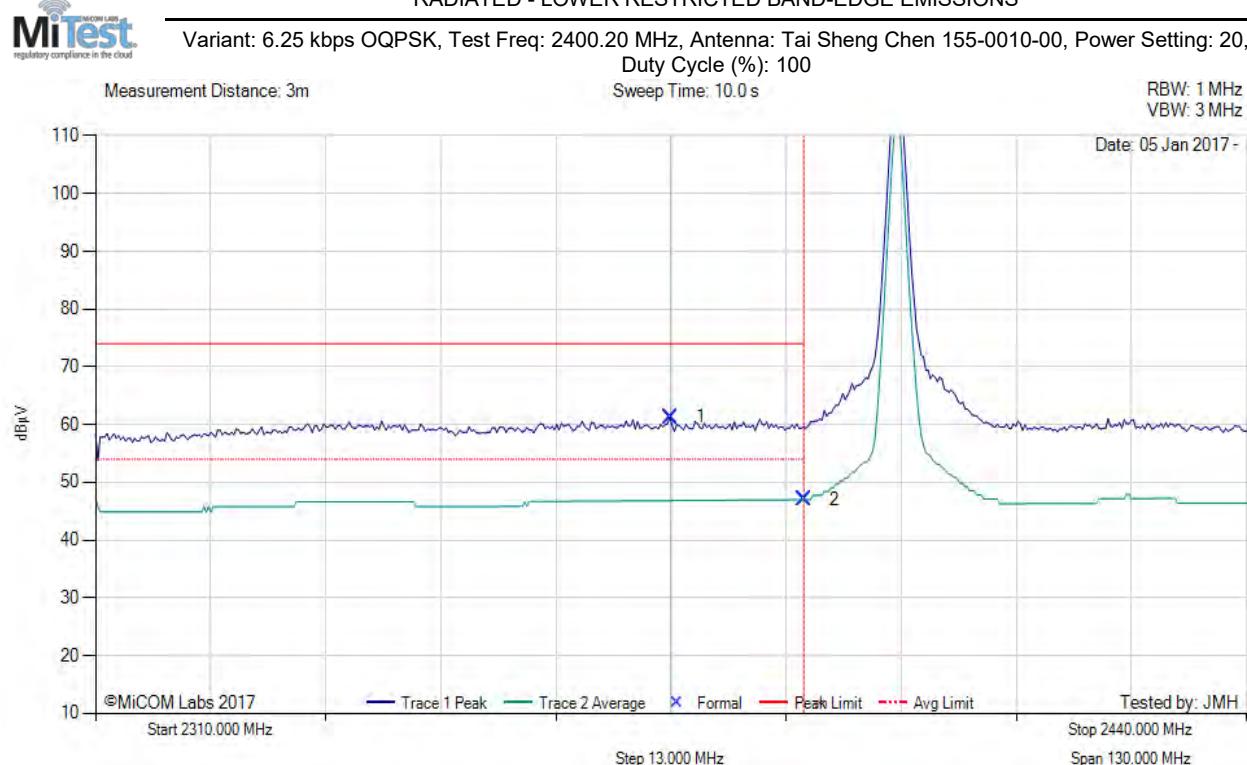

2310.00 - 2440.00 MHz												
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail
1	2374.89	26.68	2.70	31.91	61.29	Max Peak	Vertical	133	274	74.0	-12.7	Pass
2	2390.00	12.26	2.69	32.04	46.99	Max Avg	Vertical	133	274	54.0	-7.0	Pass
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--


**Test Notes:** GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 00135007000000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MICOM Labs personnel. All changes will be noted in the Document History section of the report.



### RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

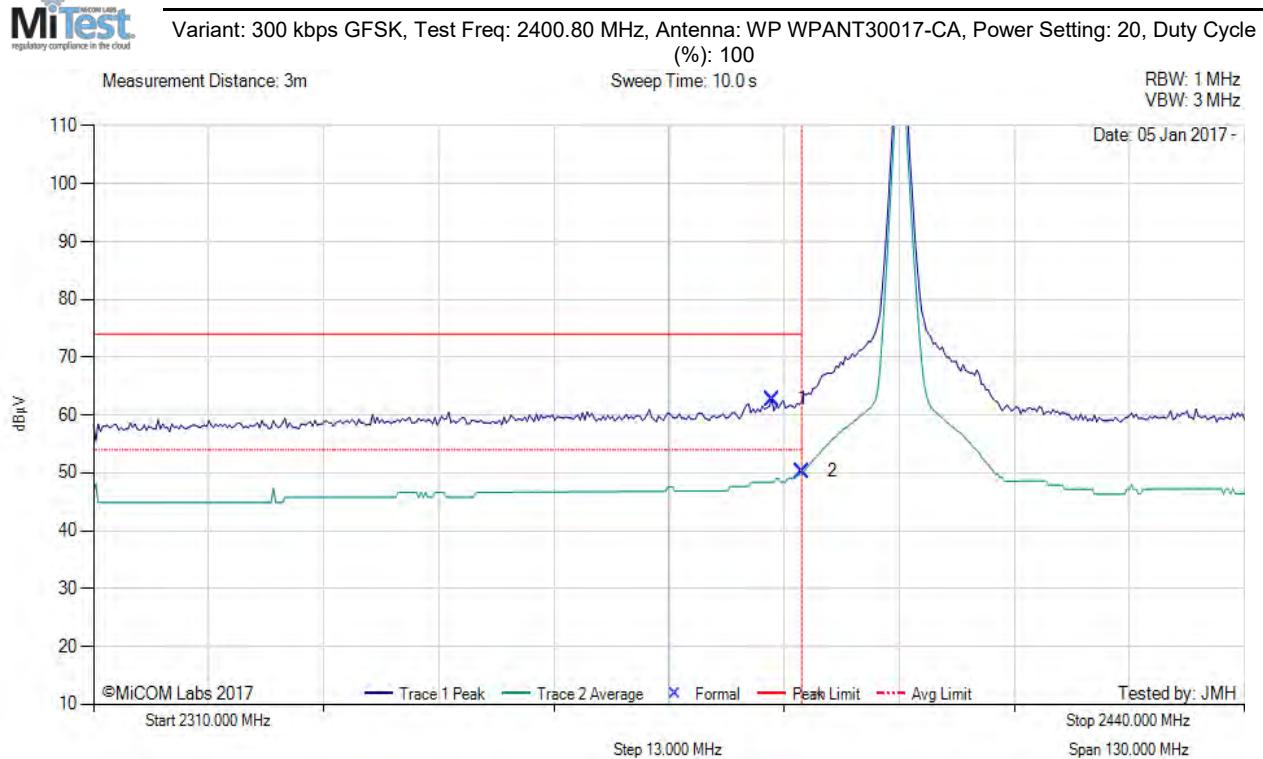

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2386.61	28.08	2.68	32.02	62.78	Max Peak	Vertical	193	191	74.0	-11.2	Pass	
2	2390.00	15.51	2.69	32.04	50.24	Max Avg	Vertical	193	191	54.0	-3.8	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

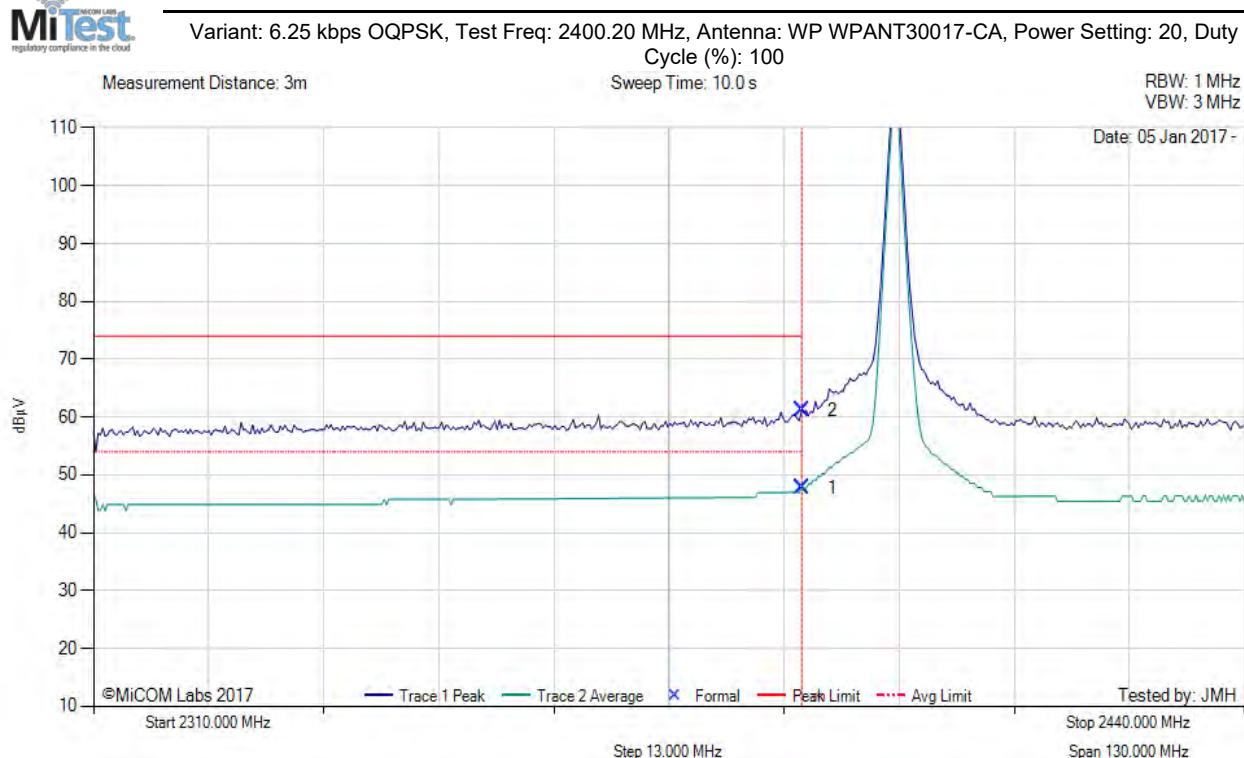

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail	
1	2390.00	13.01	2.69	32.04	47.74	Max Avg	Vertical	135	247	54.0	-6.3	Pass	
2	2390.00	26.39	2.69	32.04	61.12	Max Peak	Vertical	135	247	74.0	-12.9	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

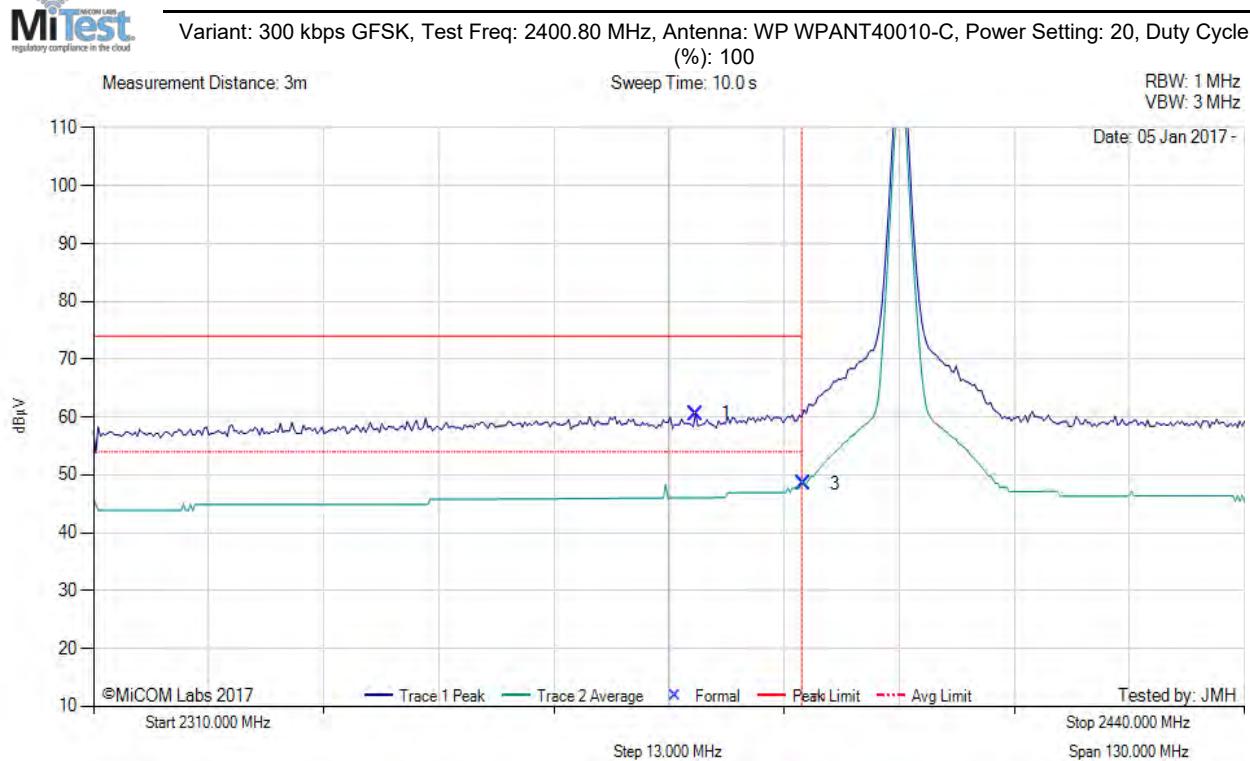

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2378.02	25.90	2.70	31.94	60.54	Max Peak	Vertical	101	12	74.0	-13.5	Pass	
3	2390.26	13.71	2.69	32.04	48.44	Max Avg	Vertical	101	12	54.0	-5.6	Pass	
2	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



### RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

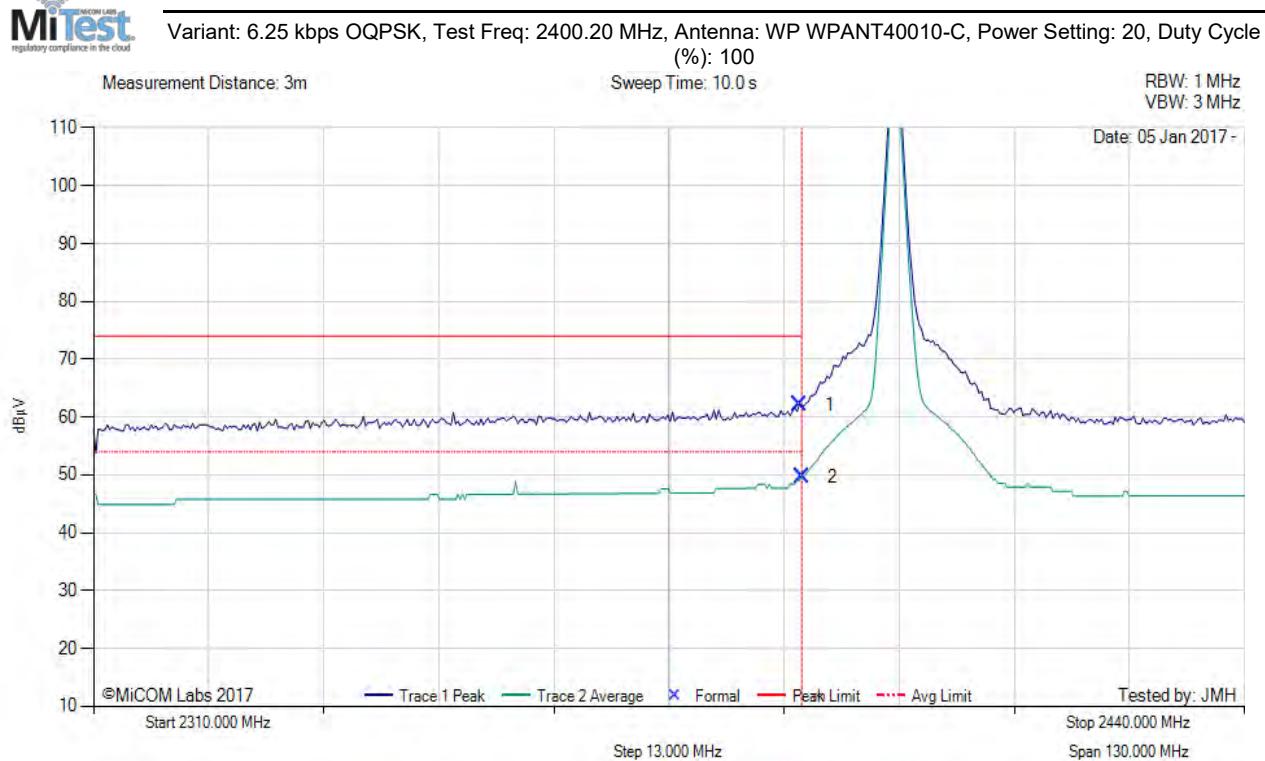

2310.00 - 2440.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	2389.74	27.41	2.69	32.04	62.14	Max Peak	Horizontal	152	132	74.0	-11.9	Pass	
2	2390.00	14.95	2.69	32.04	49.68	Max Avg	Horizontal	152	132	54.0	-4.3	Pass	
3	2390.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

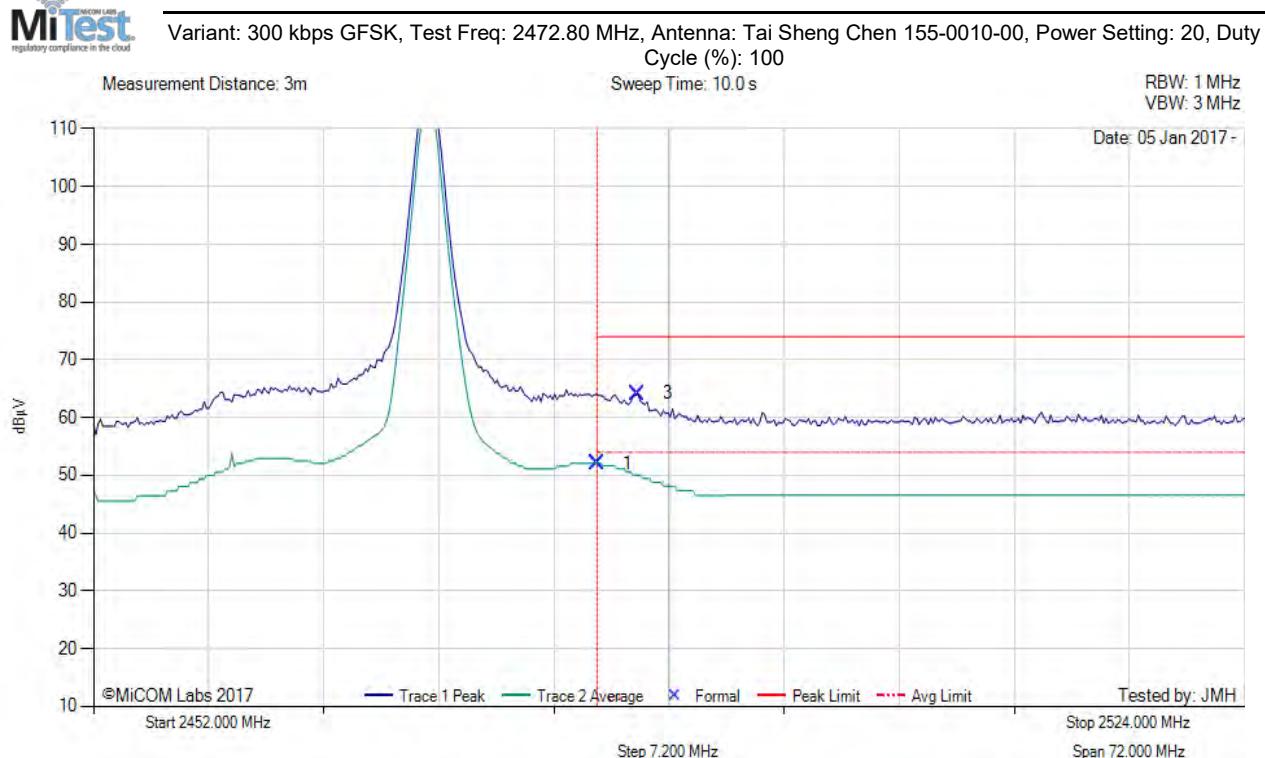

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2483.50	17.01	2.73	32.37	52.11	Max Avg	Vertical	142	53	54.0	-1.9	Pass	
3	2486.05	29.06	2.73	32.37	64.16	Max Peak	Vertical	142	53	74.0	-9.8	Pass	
2	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

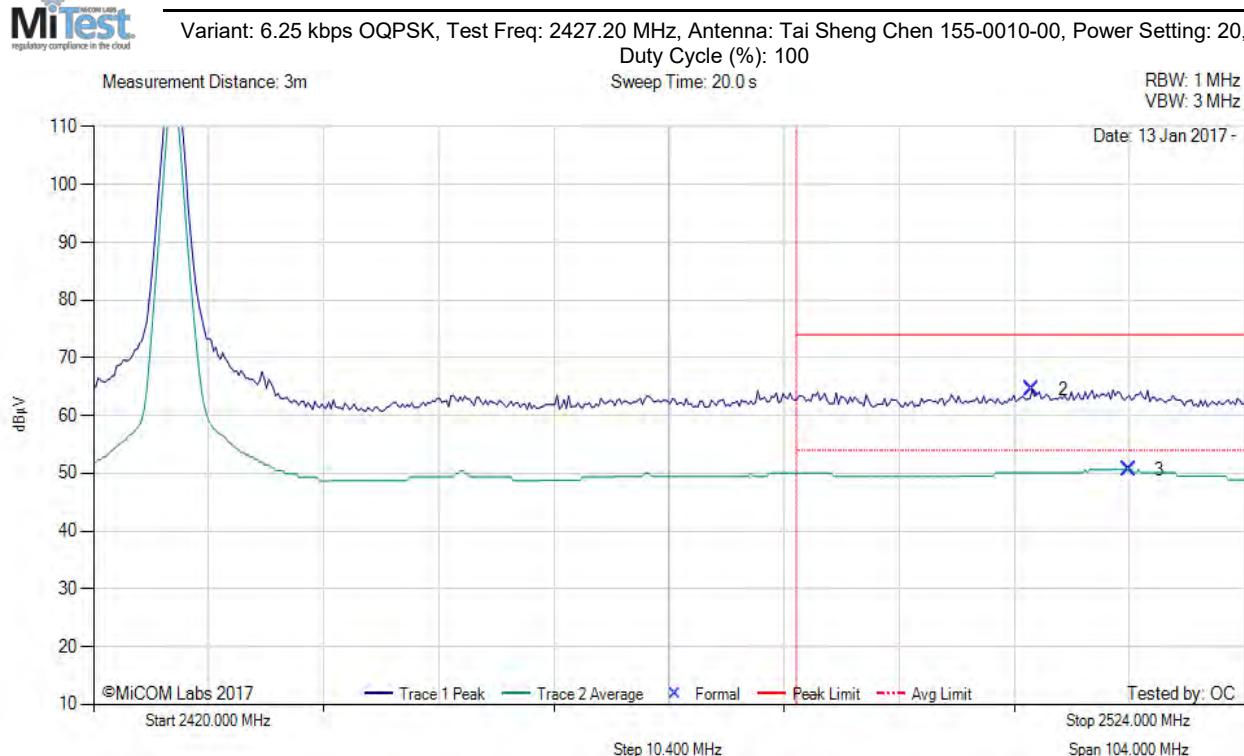

2420.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
2	2504.83	29.40	2.72	32.41	64.53	Max Peak	Horizontal	189	177	74.0	-9.5	Pass	
3	2513.58	15.50	2.74	32.43	50.67	Max Avg	Horizontal	189	177	54.0	-3.3	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

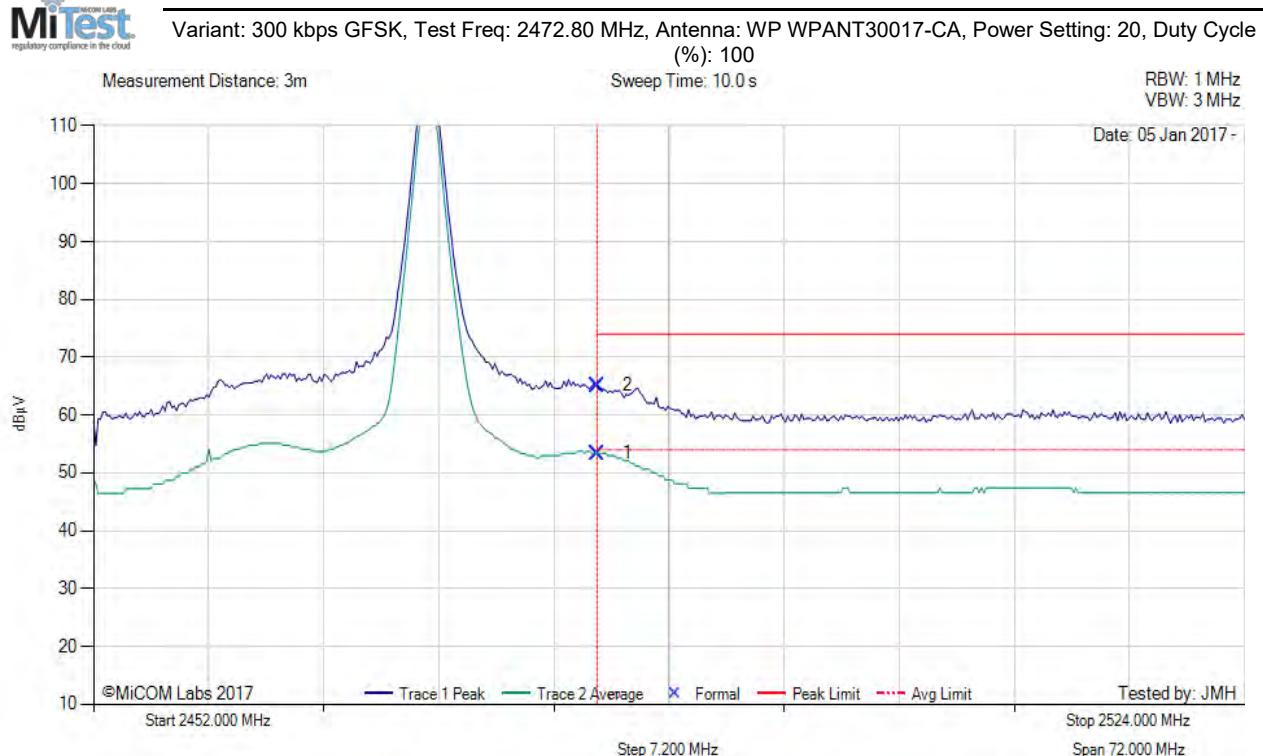

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2483.50	18.29	2.73	32.37	53.39	Max Avg	Vertical	194	203	54.0	-0.6	Pass	
2	2483.50	30.03	2.73	32.37	65.13	Max Peak	Vertical	194	203	74.0	-8.9	Pass	
3	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

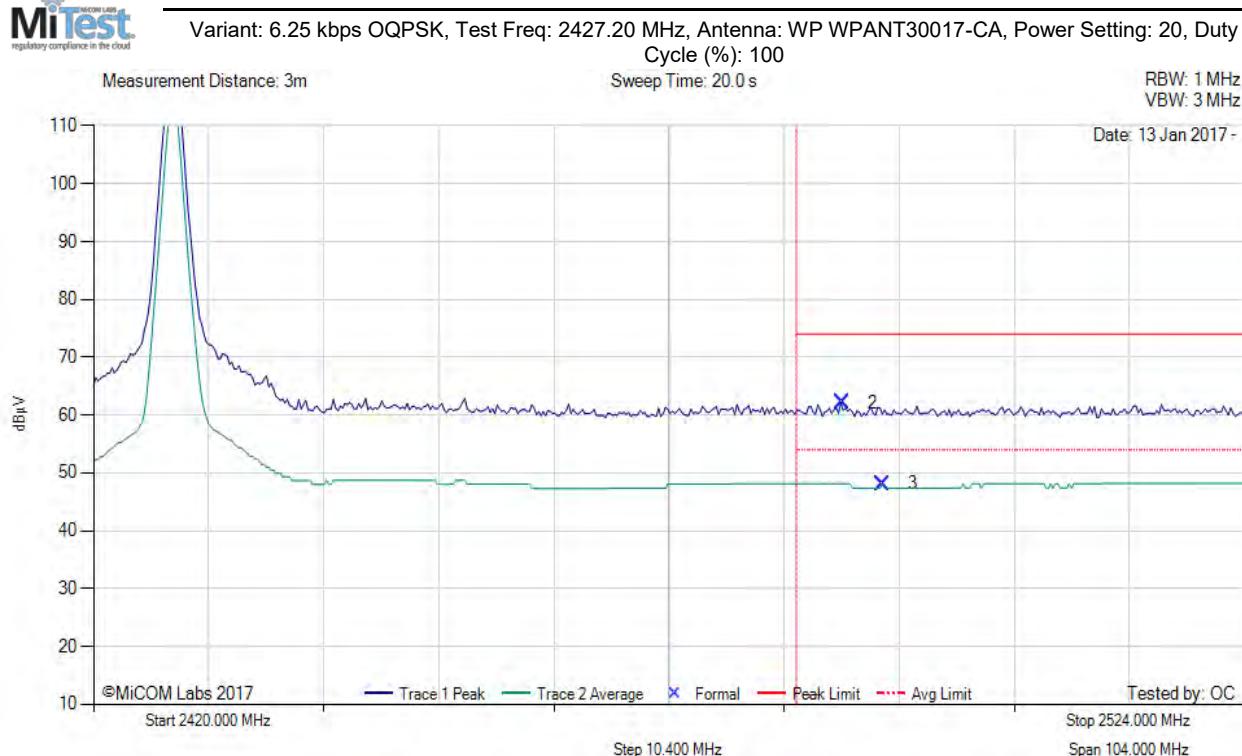

2420.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
2	2487.62	27.00	2.73	32.38	62.11	Max Peak	Vertical	189	76	74.0	-11.9	Pass	
3	2491.32	13.02	2.74	32.38	48.14	Max Avg	Vertical	189	76	54.0	-5.9	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

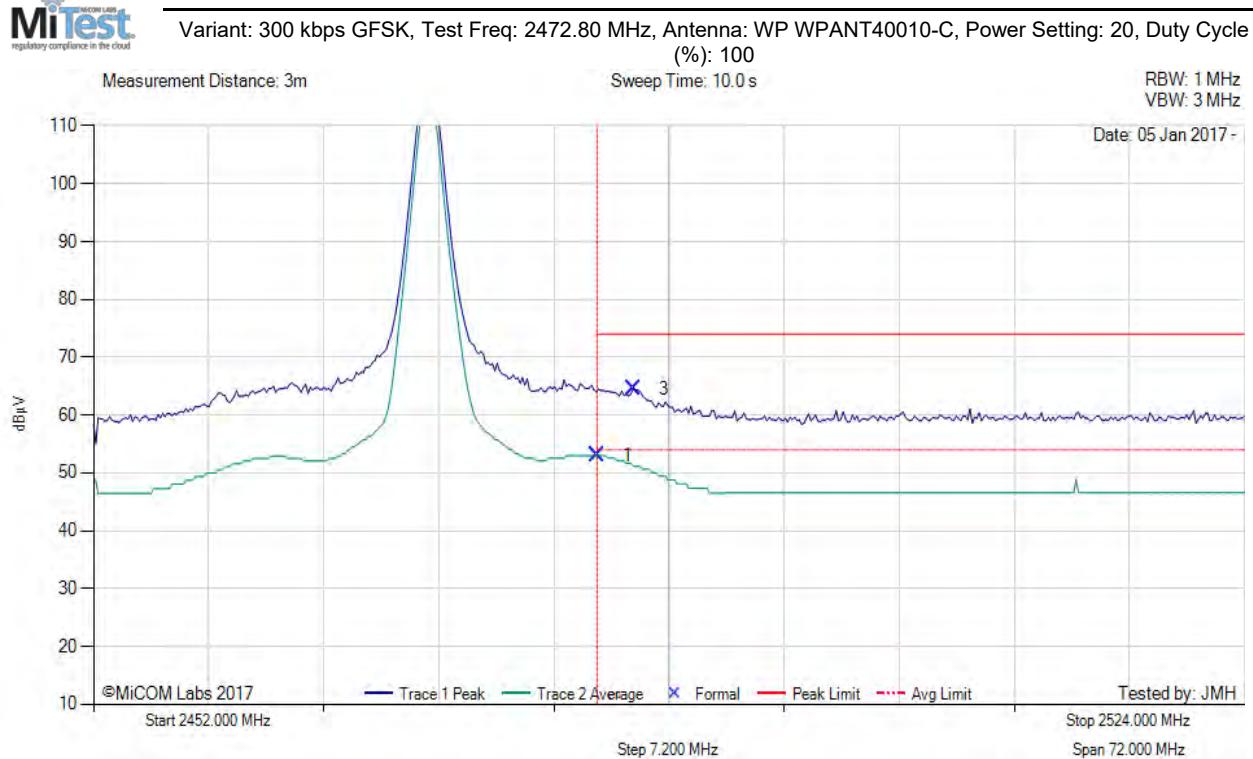

2452.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	2483.50	17.88	2.73	32.37	52.98	Max Avg	Vertical	104	369	54.0	-1.0	Pass	
3	2485.81	29.50	2.73	32.37	64.60	Max Peak	Vertical	104	369	74.0	-9.4	Pass	
2	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	


**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS

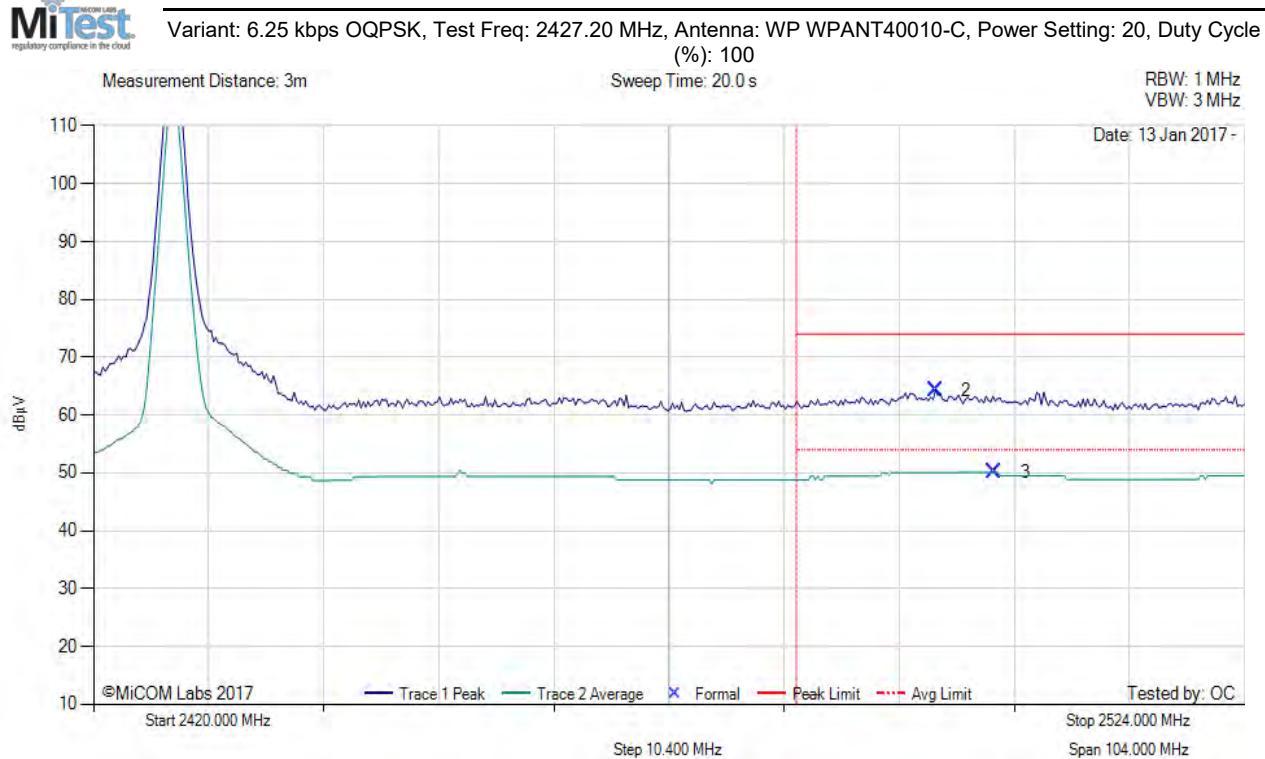


2420.00 - 2524.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
2	2496.12	29.16	2.74	32.39	64.29	Max Peak	Horizontal	164	28	74.0	-9.7	Pass	
3	2501.44	14.96	2.73	32.40	50.09	Max Avg	Horizontal	164	28	54.0	-3.9	Pass	
1	2483.50	--	--	--	--	Restricted-Band	--	--	--	--	--	--	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 150cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.


### A.1.2. Digital Emissions (0.03 - 1 GHz)

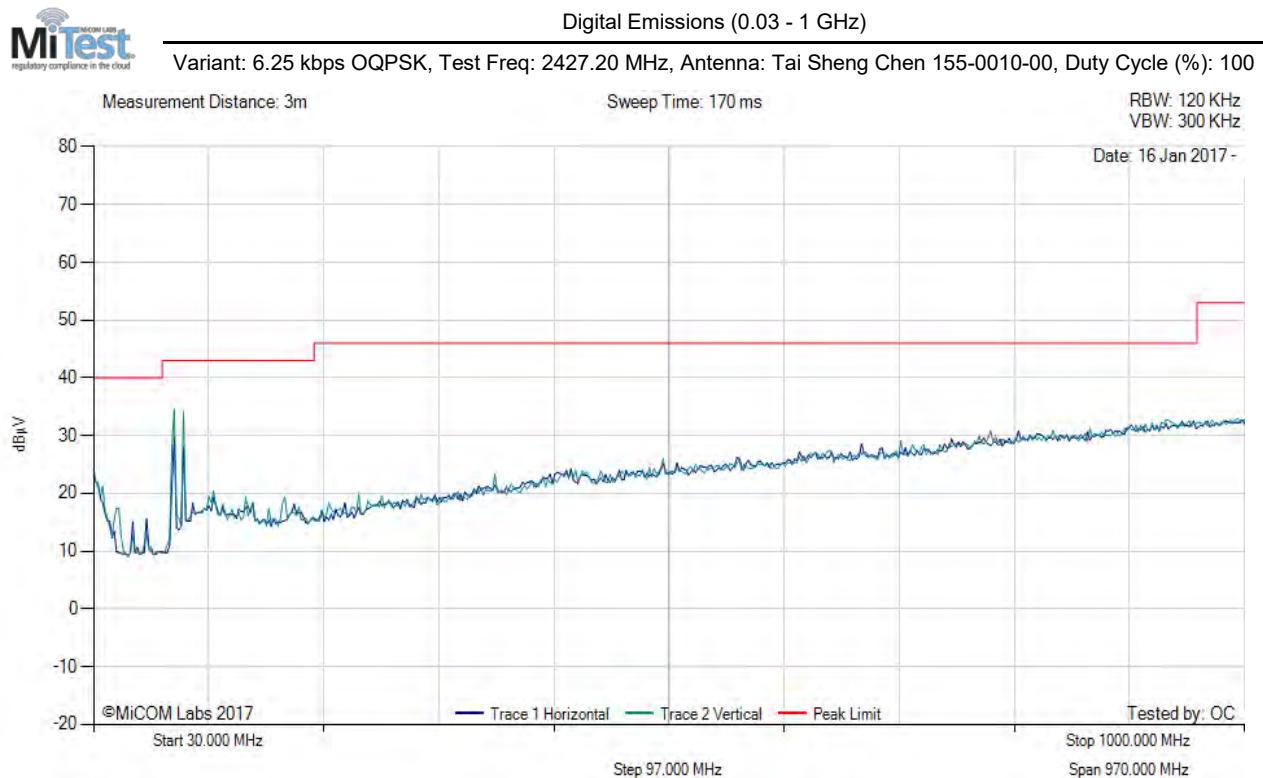

There are no emissions found within 6dB of the limit line.

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

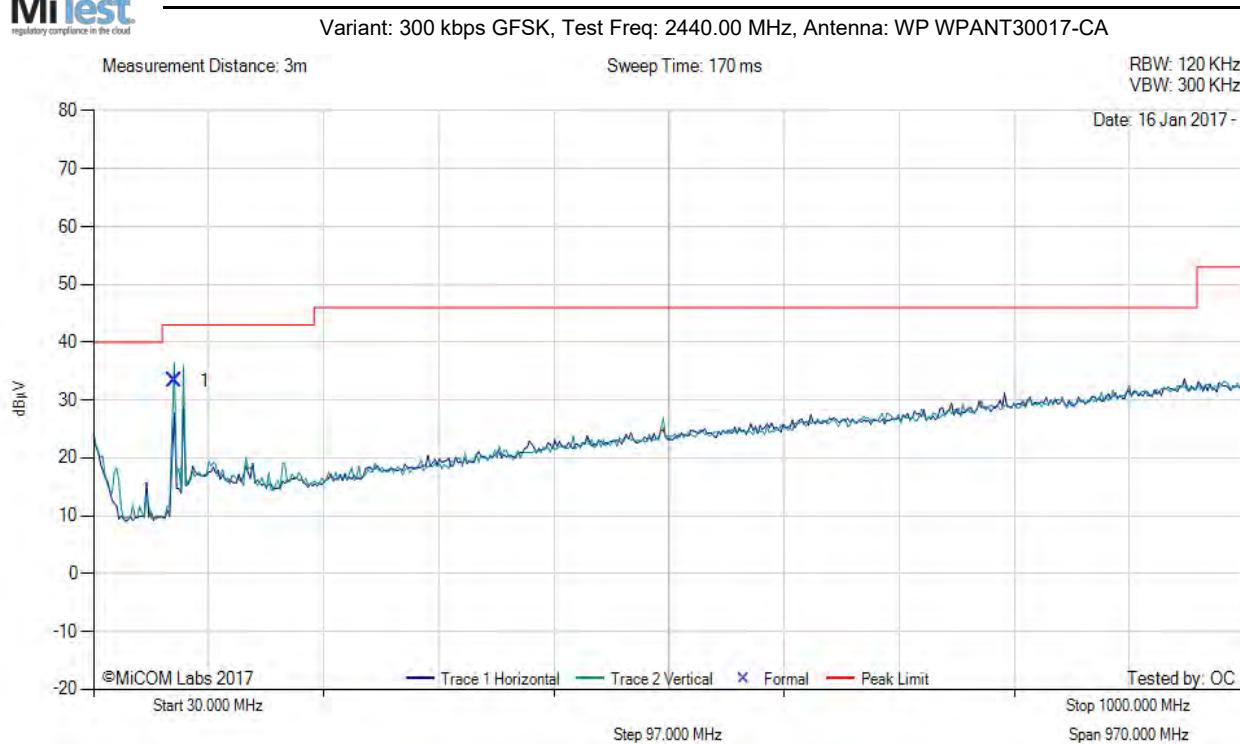


30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail	
1	98.18	51.36	3.87	-21.84	33.39	MaxQP	Vertical	100	327	43.0	-9.6	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

Digital Emissions (0.03 - 1 GHz)

Variant: 300 kbps GFSK, Test Freq: 2440.00 MHz, Antenna: WP WPANT40010-C

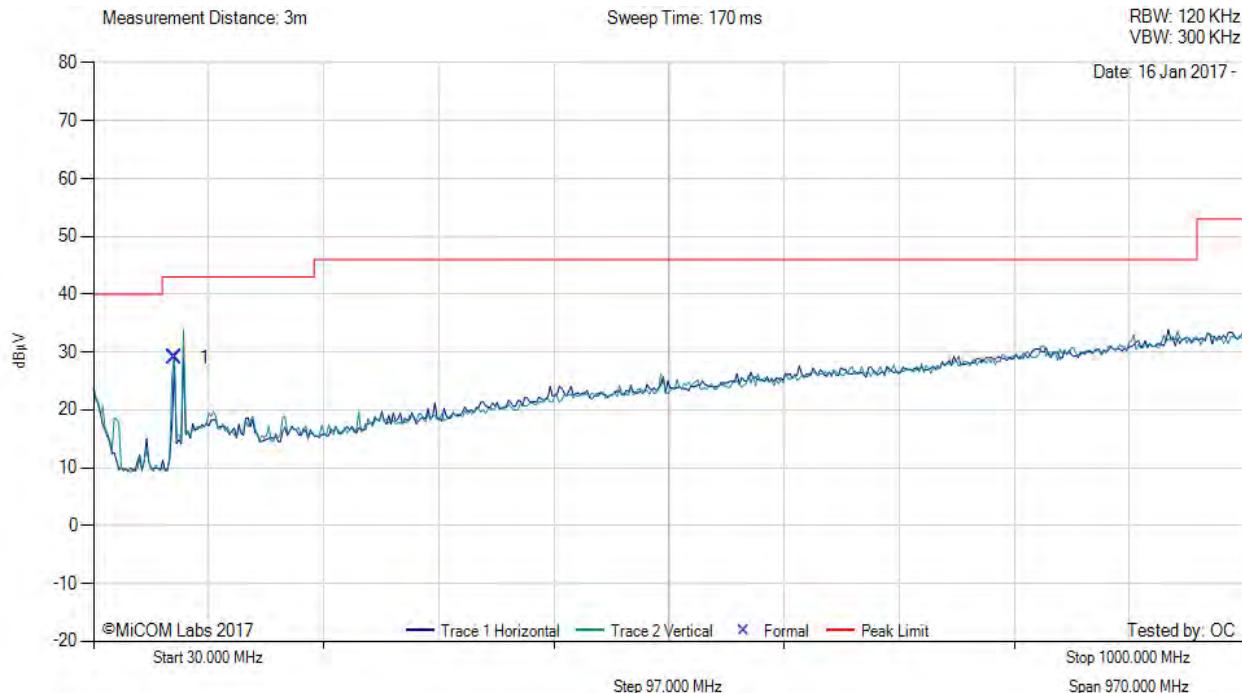

30.00 - 1000.00 MHz													
Num	Frequency MHz	Raw dB $\mu$ V	Cable Loss dB	AF dB	Level dB $\mu$ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB $\mu$ V/m	Margin dB	Pass /Fail	
1	98.07	46.95	3.87	-21.84	28.98	MaxQP	Vertical	100	31	43.0	-14.0	Pass	

**Test Notes:** Model: GEN 5 MicroAP 174-0763-00 Rev 02. S/N: 0013500700000F70. Placed on 80cm non-conductive table. DC powered.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)