



IEEE 802.11b- Body	Up Middle CH1	2
IEEE 802.11b- Body	Up Middle CH6	3
IEEE 802.11b- Body	Up Middle CH11	4
IEEE 802.11b- Body	Down Middle CH1	5
IEEE 802.11b- Body	Down Middle CH6	6
IEEE 802.11b- Body	Down Middle CH11	7
IEEE 802.11b- Body	Top Middle CH1	8
IEEE 802.11b- Body	Top Middle CH6	9
IEEE 802.11b- Body	Top Middle CH11	10



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Up Middle CH1

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.947$ mho/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Up Middle CH1/Area Scan (201x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 mW/g

IEEE 802.11b /802.11b Body Up Middle CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.268 mW/g

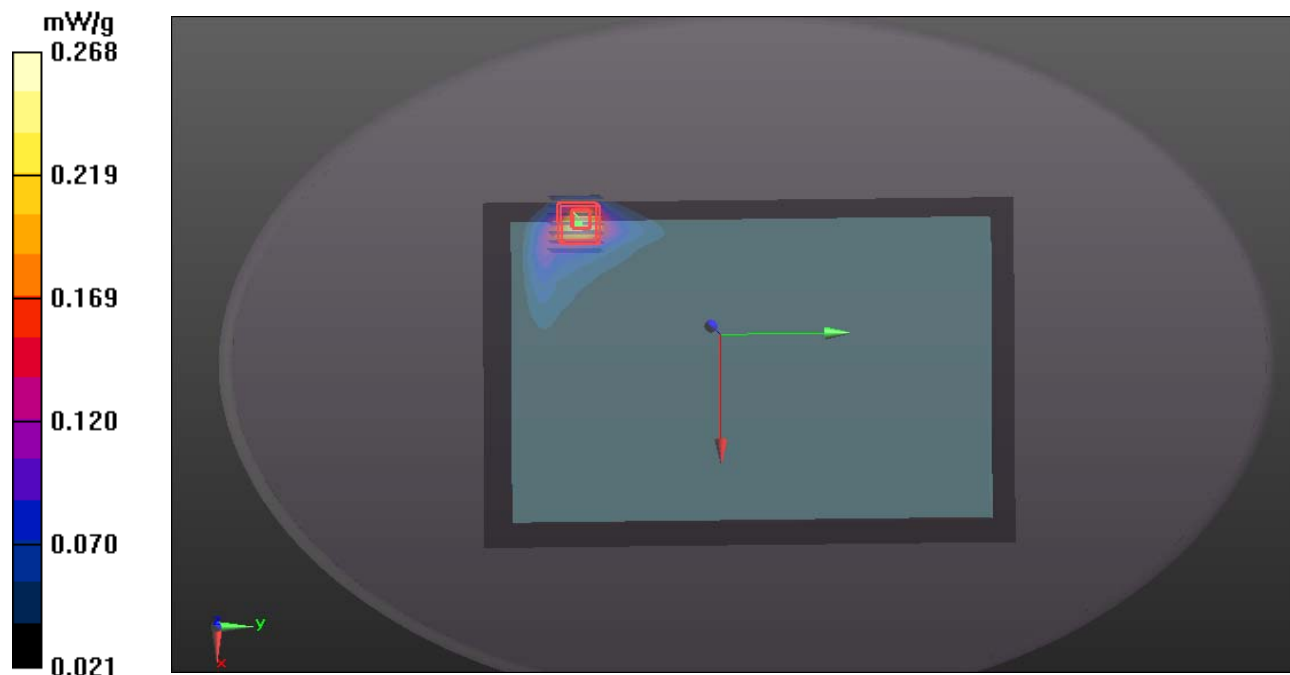



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Up Middle CH6

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.949$ mho/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body up Middle CH6/Area Scan (201x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body up Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

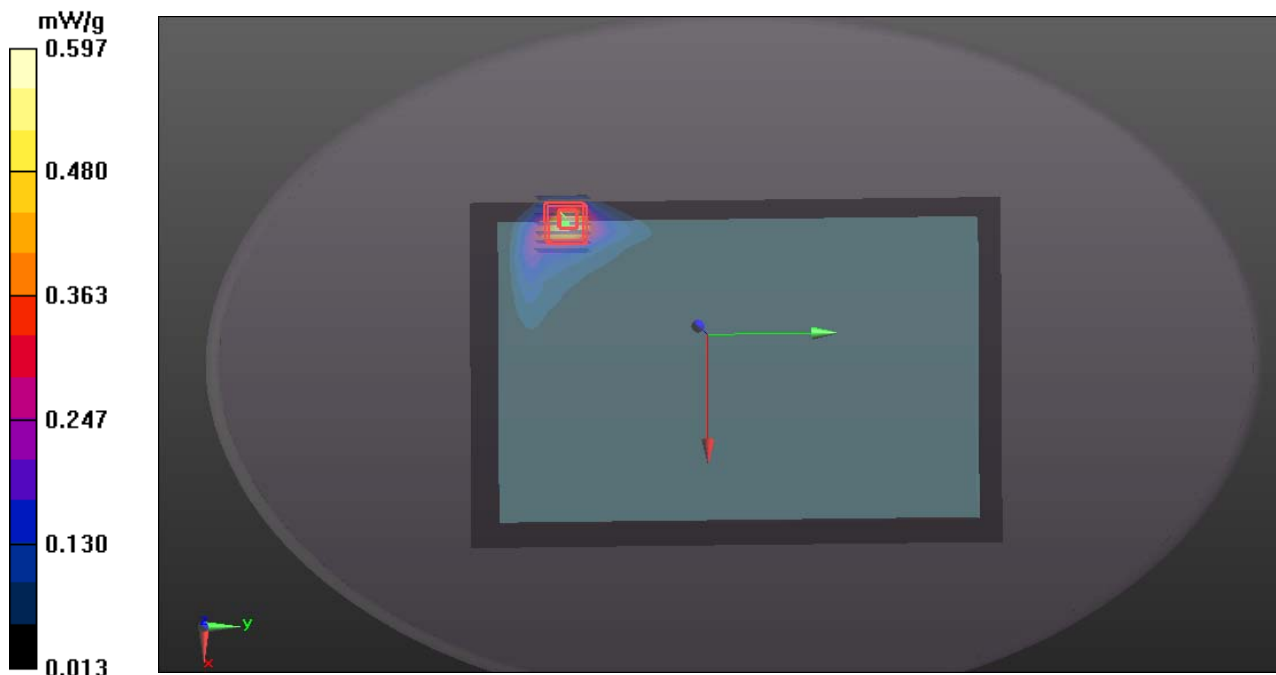



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Up Middle CH11

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.952$ mho/m; $\epsilon_r = 52.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body up Middle CH11/Area Scan (201x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.545 mW/g

IEEE 802.11b /802.11b Body up Middle CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

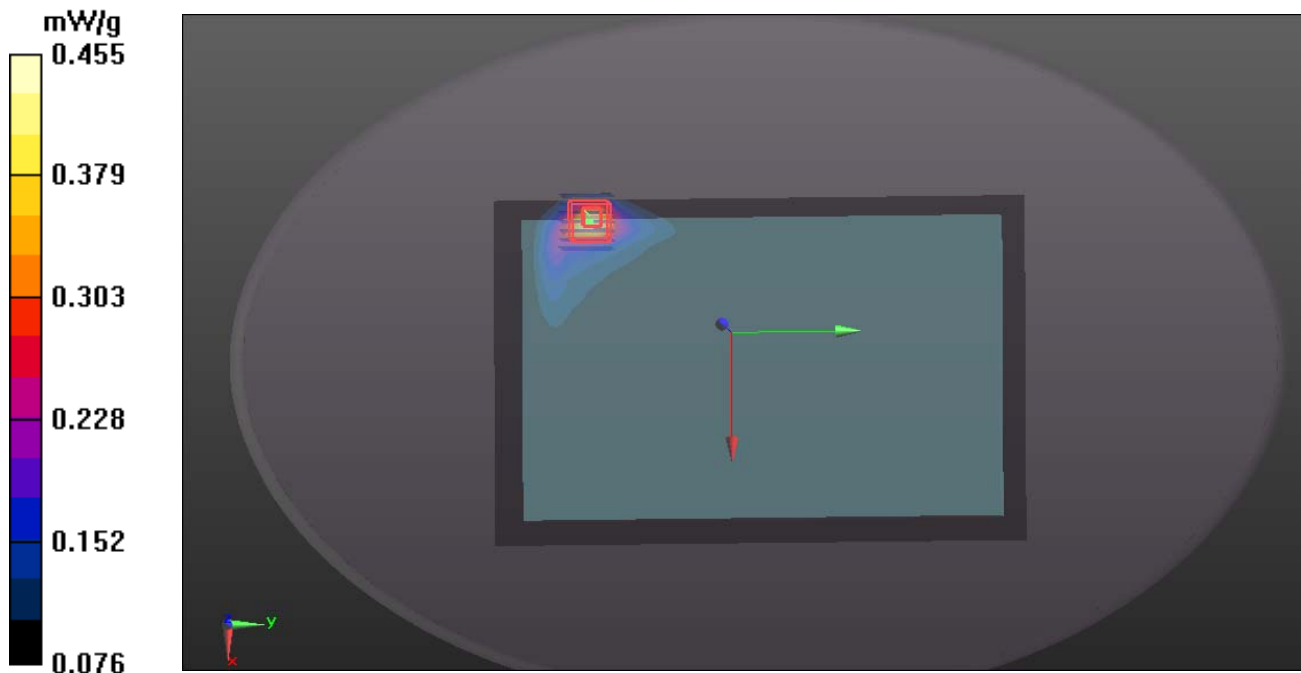



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Down Middle CH1

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.947$ mho/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Down Middle CH1/Area Scan (201x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.125 mW/g

IEEE 802.11b /802.11b Body Down Middle CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.785 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

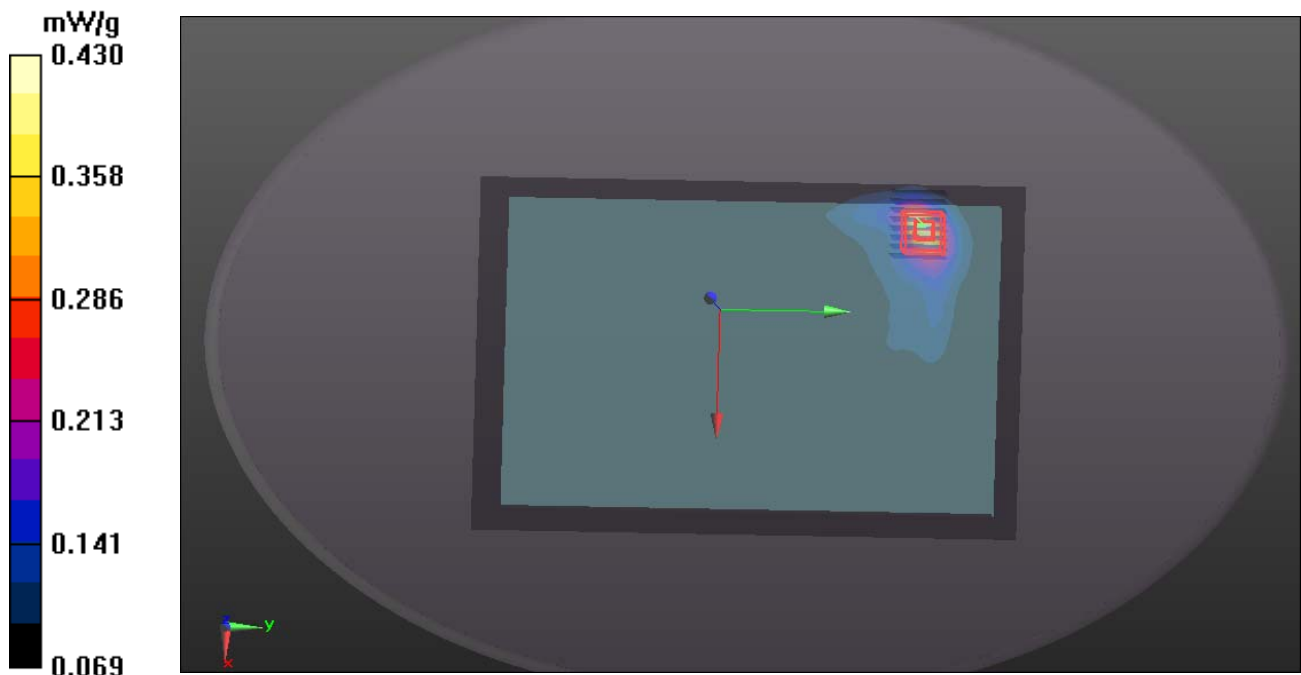



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Down Middle CH6

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.949$ mho/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Down Middle CH6/Area Scan (201x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body Down Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.250 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

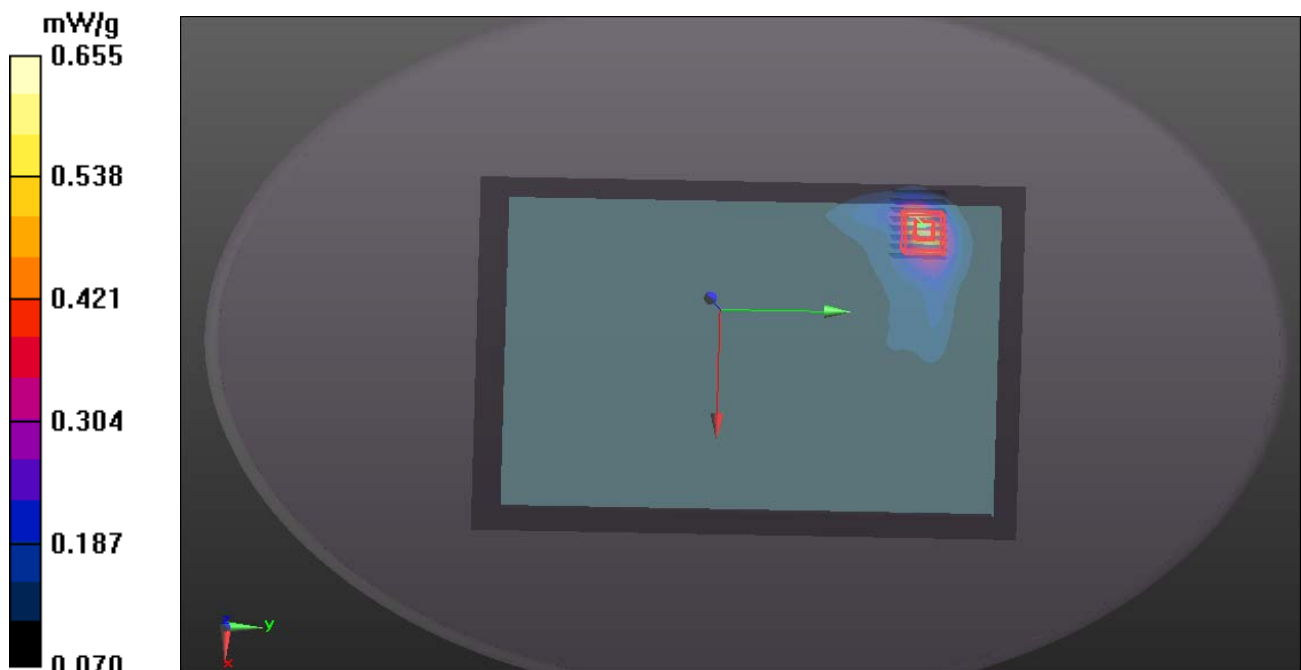



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Down Middle CH11

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.952$ mho/m; $\epsilon_r = 52.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Down Middle CH11/Area Scan (201x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body Down Middle CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.250 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

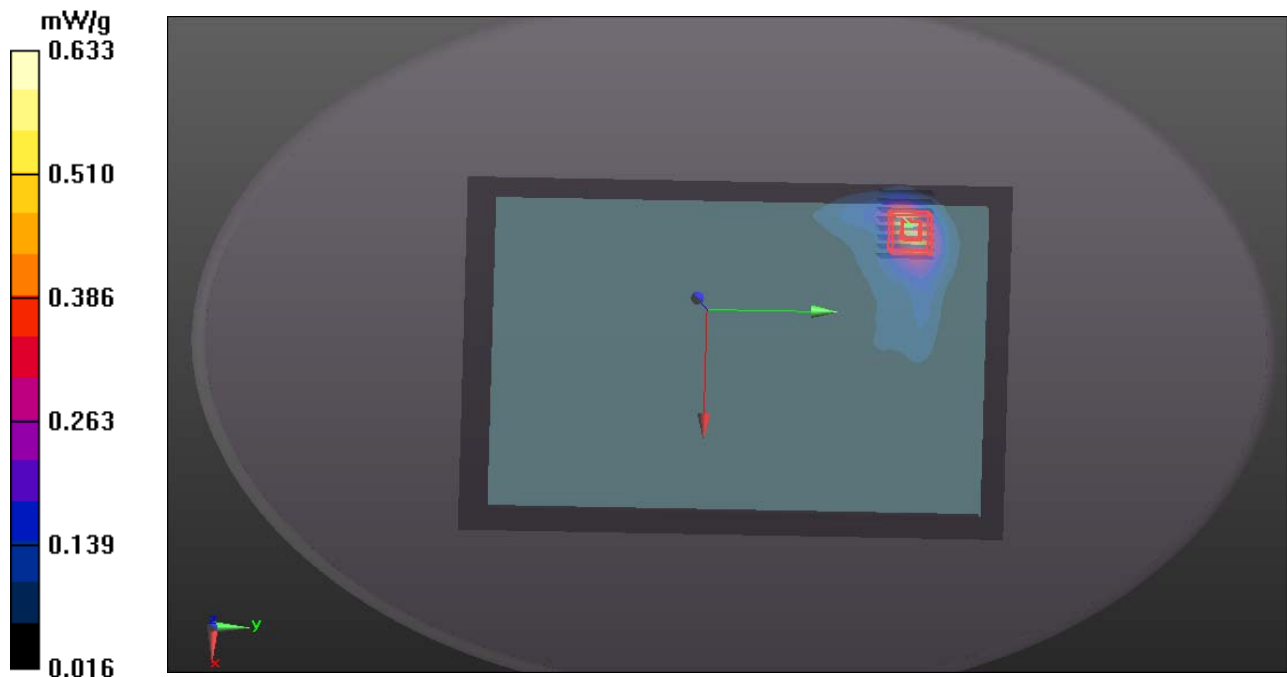



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Top Middle CH1

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.947$ mho/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Up Middle CH1/Area Scan (201x54x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 mW/g

IEEE 802.11b /802.11b Body Up Middle CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.628 mW/g

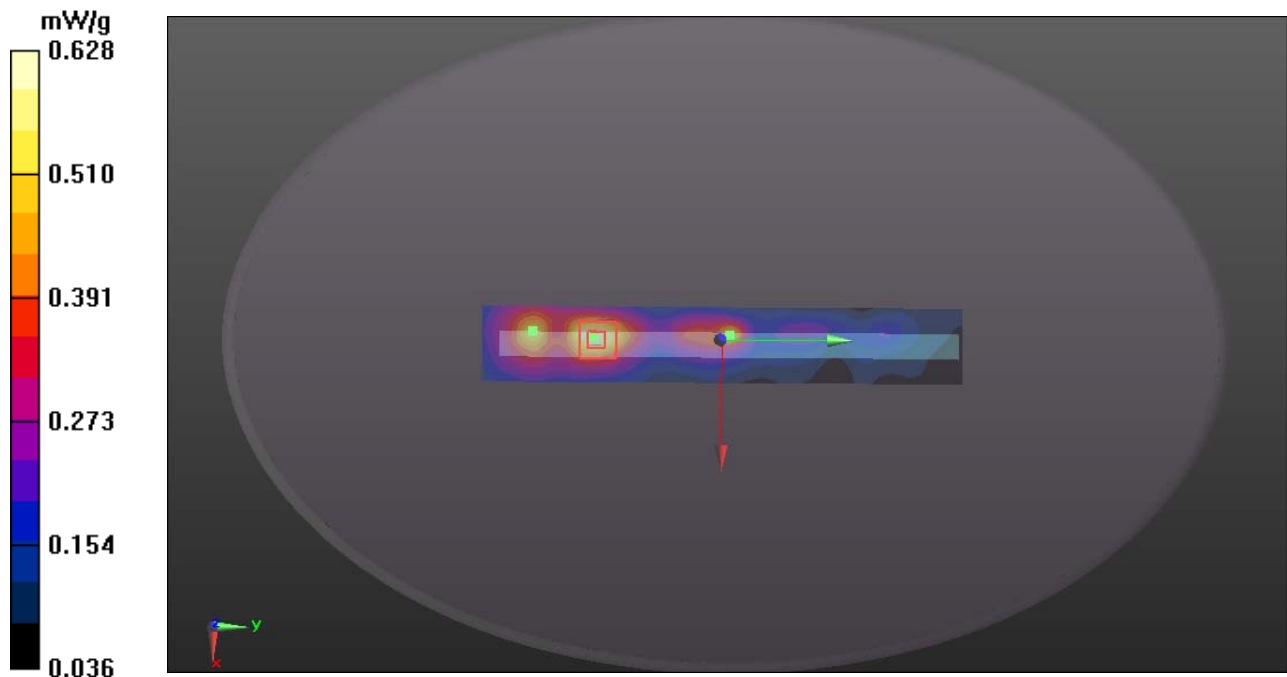



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Top Middle CH6

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.949$ mho/m; $\epsilon_r = 52.71$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Top Middle CH6/Area Scan (201x54x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body Top Middle CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.209 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

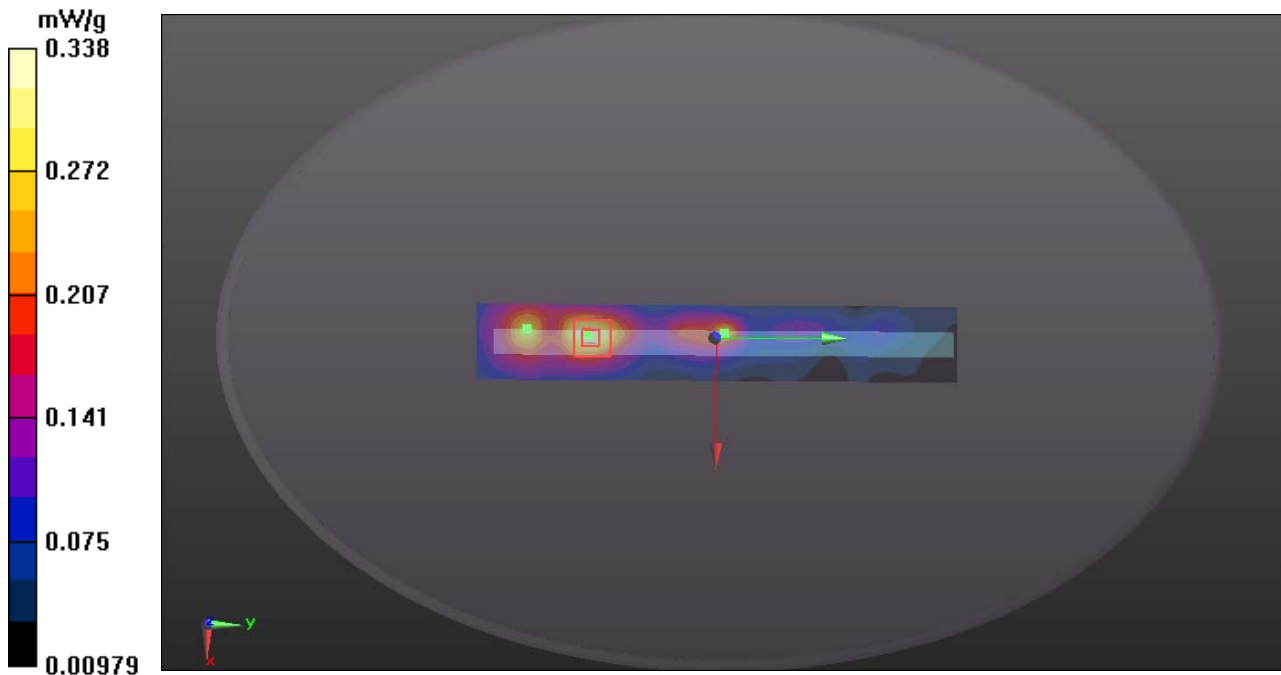



Test Laboratory: Compliance Certification Services Inc.

September 13, 2012

IEEE 802.11b- Body Top Middle CH11

DUT: Tablet PC; Type: VB736; Serial: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.952$ mho/m; $\epsilon_r = 52.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Top Middle CH11/Area Scan (201x54x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.545 mW/g

IEEE 802.11b /802.11b Body Top Middle CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.202mW/g

Maximum value of SAR (measured) = 0.678 mW/g

