



World Standardization Certification & Testing CO., LTD
World Standardization Safety and EMC Testing Centre

FCC ID TEST REPORT

for

Digitizer Monitor

MODEL: VDD21501

Trade Mark: N/A

FCC ID: OX6VDD21501

Test Report Number: WSCT12070461E_FCC 15B

Issued Date: July 31, 2012

Issued for:

**ViewMate Electronic Technology Limited
6F, BuildingL, SectionE, Block71, Baoan District, Shenzhen, China**

Issued by:

**World Standardization Certification & Testing CO., LTD.
Building A, Baoshi Road, Baoshi Science & Technology Park,
Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755-26996192
FAX: +86-755-26996253**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing CO., LTD. This document may be altered or revised by World Standardization Certification & Testing CO., LTD. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	WSCT12070461E_FCC 15B	Initial Issue	ALL	Kallen Wang



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	4
2 EUT DESCRIPTION	5
3 TEST METHODOLOGY.....	6
3.1. DECISION OF FINAL TEST MODE.....	6
3.2. Justification.....	6
3.3. Configuration of Test Setup.....	6
4 SETUP OF EQUIPMENT UNDER TEST	7
4.1. DESCRIPTION OF SUPPORT UNITS	7
4.2. CONFIGURATION OF SYSTEM UNDER TEST	7
5 FACILITIES AND ACCREDITATIONS.....	8
5.1. FACILITIES	8
5.2. ACCREDITATIONS.....	8
5.3. MEASUREMENT UNCERTAINTY.....	9
6 CONDUCTED EMISSION MEASUREMENT.....	10
6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
6.2. TEST INSTRUMENTS	10
6.3. TEST PROCEDURES	11
6.4. TEST SETUP	12
6.5. TEST RESULTS.....	12
7 RADIATED EMISSION MEASUREMENT	17
7.1. LIMITS OF RADIATED EMISSION MEASUREMENT	17
7.2. TEST INSTRUMENTS	17
7.3. TEST PROCEDURES	18
7.4. TEST SETUP	20
7.5. TEST RESULTS.....	21
8 PHOTOGRAPHS OF THE TEST CONFIGURATION	27
9 PHOTOGRAPHS OF EUT	29



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

1 TEST RESULT CERTIFICATION

Product: Digitizer Monitor

Model: VDD21501

Trade Mark: N/A

Applicant: **ViemMate Electronic Technology Limited**

6F, BuildingL, SectionE, Block71, Baoan District, Shenzhen, China

Manufacturer: **ViemMate Electronic Technology Limited**

6F, BuildingL, SectionE, Block71, Baoan District, Shenzhen, China

Tested Date: July 26, 2012 ~ July 31, 2012

Test Voltage: AC 120V/60Hz

EMISSION

Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B, ANSI C63.4-2003	Conducted (Main Port)	PASS	Meet Class B limit
	Radiated	PASS	Meet Class B limit

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

Deviation from Applicable Standard

None

The above equipment has been tested by World Standardization Certification & Testing Co., Ltd and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: _____

Date: July 31, 2012

(Jack Ma)

Approved By: _____

Date: July 31, 2012

(Kallen Wang)



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

2 EUT DESCRIPTION

Product	Digitizer Monitor
Trade Mark	N/A
Model	VDD21501
Applicant	ViemMate Electronic Technology Limited
EUT Type	<input checked="" type="checkbox"/> Engineering Sample <input type="checkbox"/> Product Sample <input type="checkbox"/> Mass Product Sample
Serial Number	N/A
AC/DC ADAPTOR	MODEL:KA-48A120400 Input: AC100-240V 50/60Hz 1.2A Max. Output: DC12V 4A
DC Line	Unshielded, 1.2m
VGA Line	Unshielded, 1.5m

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
DC In Port	1	1
VGA	1	1
HDMI	1	1

Models difference

N/A

3 TEST METHODOLOGY

3.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode		
Emission	Conducted Emission	Mode 1 :PC by VGA Mode 2: PC by HDMI
	Radiated Emission	Mode 1 :PC by VGA Mode 2: PC by HDMI

After the preliminary scan, the following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode 1 :PC by VGA Mode 2: PC by HDMI
	Radiated Emission	Mode 1 :PC by VGA Mode 2: PC by HDMI

Then, the EUT configuration and cable configuration of the above highest emission mode was chosen for all final test items.


3.2. Justification

1. Set up EUT with the relative support equipments.
2. Make sure the EUT worked normally during the test.

(H pattern program is used for the Monitor testing).

3.3. Configuration of Test Setup

Evaluation for "xyz" 3 directions.

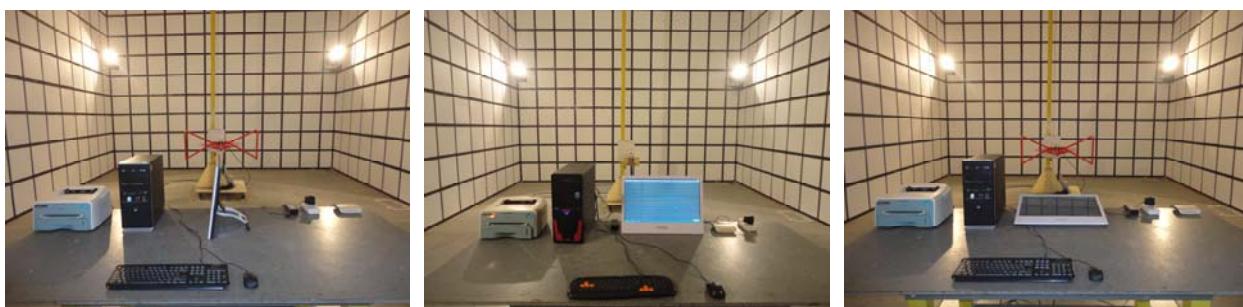

4 SETUP OF EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	PC	dx2700	CNG7140T7P	N/A	HP	N/A	N/A
3	Keyboard	SK-2880	435302-AA1	N/A	HP	N/A	N/A
4	Mouse	N/A	N/A	N/A	HP	N/A	N/A
8	Printer	R2900	N/A	N/A	EPSON	N/A	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.2. CONFIGURATION OF SYSTEM UNDER TEST

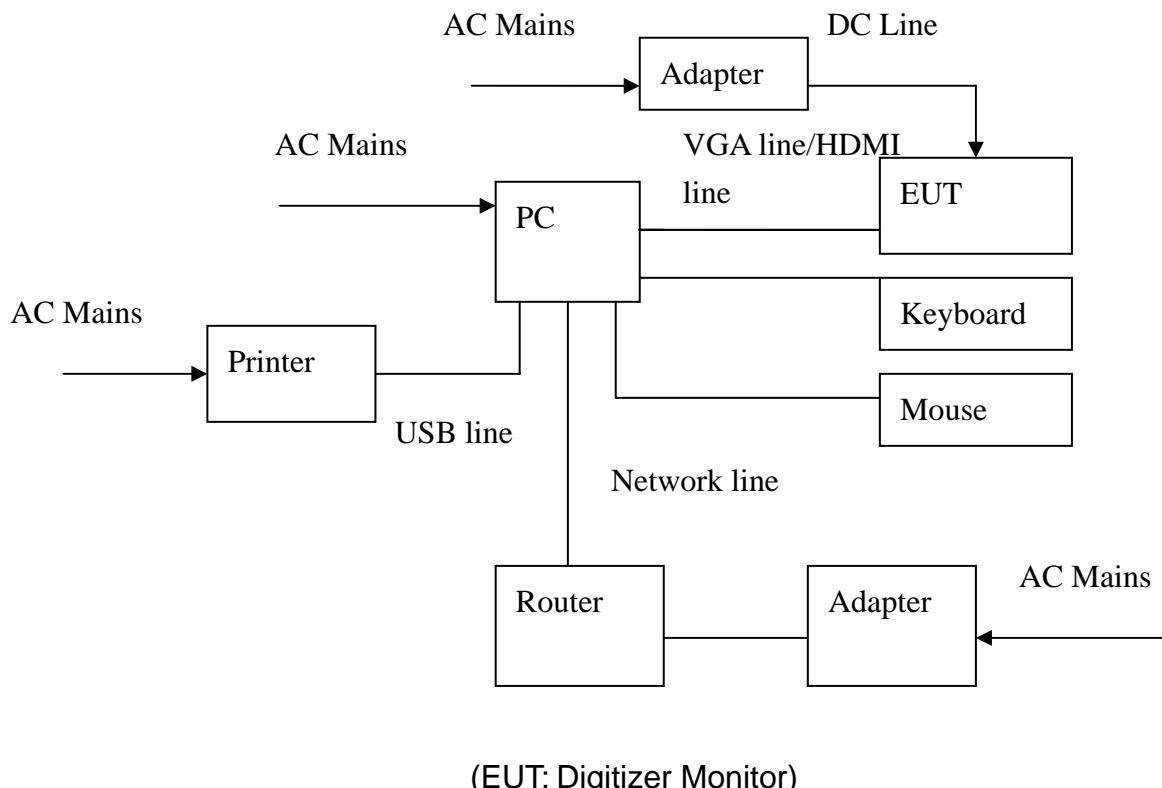

(EUT: Digitizer Monitor)



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
**Building A, Baoshi Road, Baoshi Science & Technology Park, Bao'an District,
Shenzhen, Guangdong, China**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC (The certificate registration number is 131628)
Japan	TIMCO (The certificate registration number is Q2012033001)
Canada	VCCI (The certificate registration number is C-4128, R-2662)
Germany	INDUSTRY CANADA (The certificated registration number is 7700A-1)
	TUV (The certificate registration number is UA50138086-0001,UA50138086-0002)
	EMCC (The certificated registration number is #080380)
	PHOENIX (The certificated registration number is 702777a)
	Eurofins
China	CNAS (The certificated registration number is L3732)
Switzerland	SGS (The certificated registration number is SZE0005409, SZE0005408)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.wsct-cert.org>



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty	
Conducted emissions	150kHz~30MHz	+/- 3.59dB	
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
		1000MHz~25000 MHz	+/- 5.01dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB
		1000MHz~25000 MHz	+/- 5.01dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

6 CONDUCTED EMISSION MEASUREMENT

6.1. LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system shall not exceed the level of field strengths specified above.

6.2. TEST INSTRUMENTS

Conducted Emission Shielding Room Test Site 843				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	12/16/2012
LISN	AFJ	LS16	16010222119	12/16/2012
LISN	Meestec	AN3016	04/10040	12/22/2012

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.



6.3. TEST PROCEDURES

Procedure of Preliminary Test

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.


Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

6.4. TEST SETUP

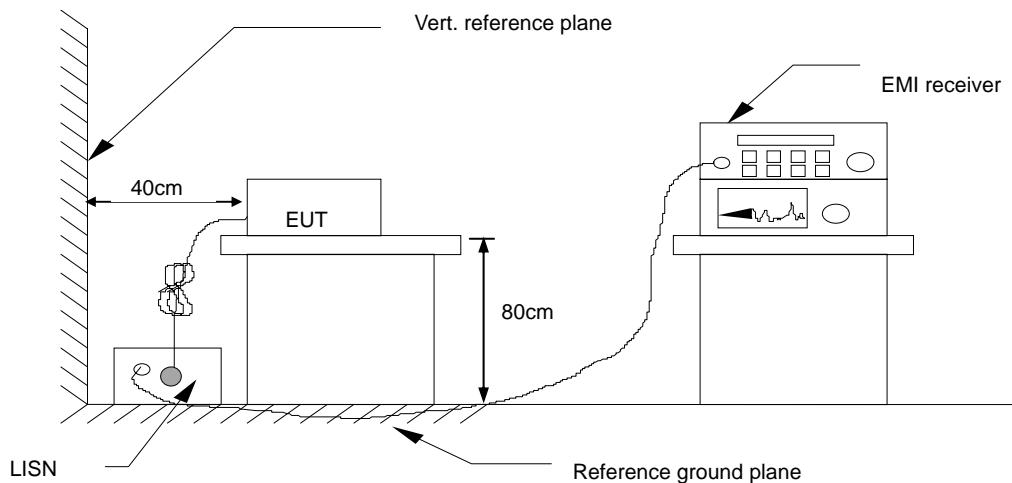

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

6.5. TEST RESULTS

Model No.	VDD21501	6dB Bandwidth	120 KHz
Environmental Conditions	26°C, 60% RH	Test Mode	PC by VGA/PC by HDMI
Detector Function	Peak / Quasi-peak/AV	Test Result	Pass
Test By	Jack Ma		

NOTE: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. “--” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level(dBuV) = Receiver reading

Corr. Factor (dB) = Attenuator Factor+ Cable loss

Level (dBuV) = Reading level(dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Q.P.=Quasi-Peak

Please refer to following diagram for individual


Conducted Emission Measurement

File : ViewMate

Data : #23

Date: 2012-7-26

Time: 20:02:06

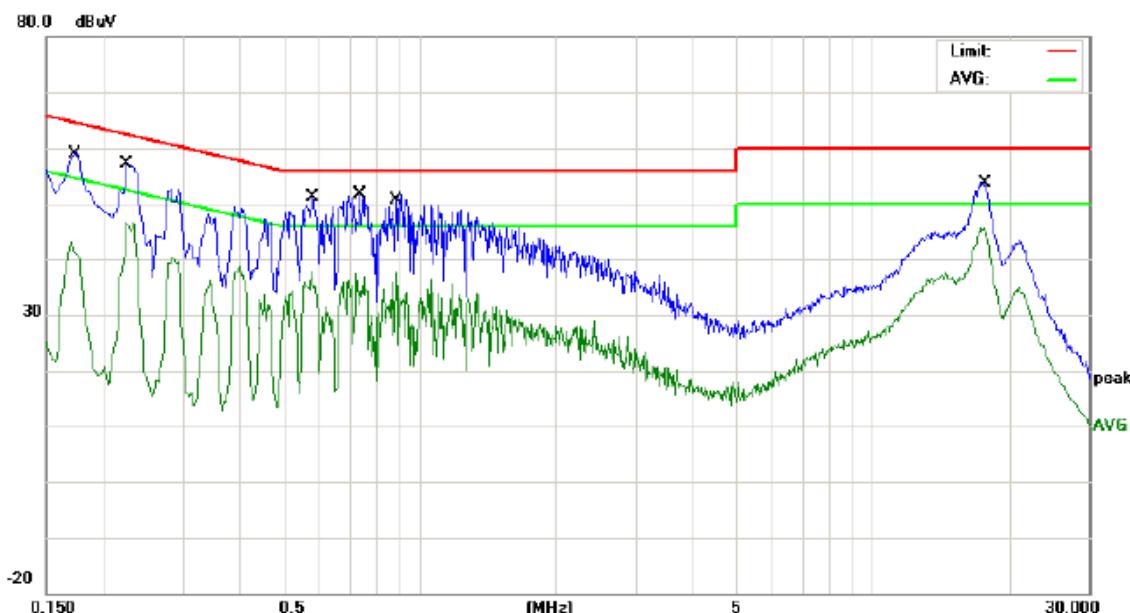

Site 843 Shielded Room

 Phase: *L1*

Temperature: 26

Limit: FCC Part15 B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Digitizer Monitor

M/N: VDD21501

Mode: PC by VGA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1712	48.07	10.39	58.46	64.90	-6.44	QP	
2		0.1712	32.15	10.39	42.54	54.90	-12.36	AVG	
3		0.2280	46.41	10.40	56.81	62.52	-5.71	QP	
4		0.2280	35.41	10.40	45.81	52.52	-6.71	AVG	
5		0.5820	40.40	10.65	51.05	56.00	-4.95	QP	
6		0.5820	24.83	10.65	35.48	46.00	-10.52	AVG	
7		0.7300	35.90	10.78	46.68	56.00	-9.32	QP	
8		0.7300	24.25	10.78	35.03	46.00	-10.97	AVG	
9		0.8860	39.83	10.89	50.72	56.00	-5.28	QP	
10		0.8860	26.62	10.89	37.51	46.00	-8.49	AVG	
11		17.5820	42.86	10.38	53.24	60.00	-6.76	QP	
12	*	17.5820	35.17	10.38	45.55	50.00	-4.45	AVG	

*:Maximum data x:Over limit l:over margin

(Reference Only)


Conducted Emission Measurement

File : ViewMate

Data : #22

Date: 2012-7-26

Time: 20:00:01

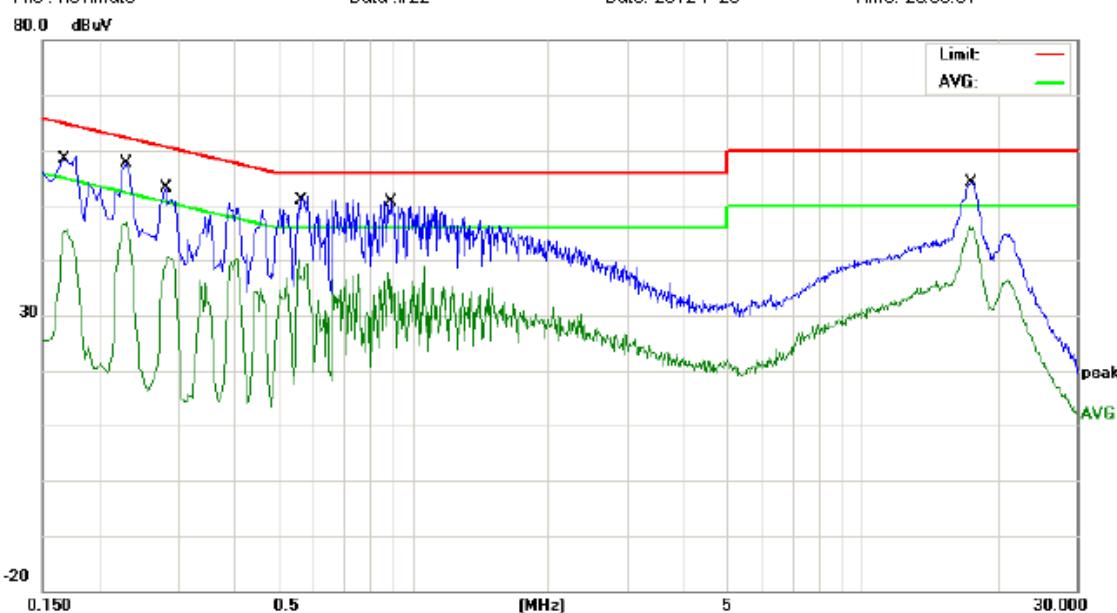

Site 843 Shielded Room

 Phase: **N**

Temperature 26

Limit: FCC Part15 B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Digitizer Monitor

M/N: VDD21501

Mode: PC by VGA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1		0.1685	47.71	10.39	58.10	65.03	-6.93	QP	
2		0.1685	35.01	10.39	45.40	55.03	-9.63	AVG	
3		0.2280	46.65	10.40	57.05	62.52	-5.47	QP	
4		0.2280	36.30	10.40	46.70	52.52	-5.82	AVG	
5		0.2819	42.62	10.59	53.21	60.76	-7.55	QP	
6		0.2819	29.04	10.59	39.63	50.76	-11.13	AVG	
7		0.5580	39.49	10.57	50.06	56.00	-5.94	QP	
8		0.5580	29.49	10.57	40.06	46.00	-5.94	AVG	
9		0.8980	39.57	10.94	50.51	56.00	-5.49	QP	
10		0.8980	24.38	10.94	35.32	46.00	-10.68	AVG	
11		17.4540	43.52	10.39	53.91	60.00	-6.09	QP	
12	*	17.4540	35.70	10.39	46.09	50.00	-3.91	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Conducted Emission Measurement

File : ViewMate

Data : #23

Date: 2012-7-30

Time: 20:02:06

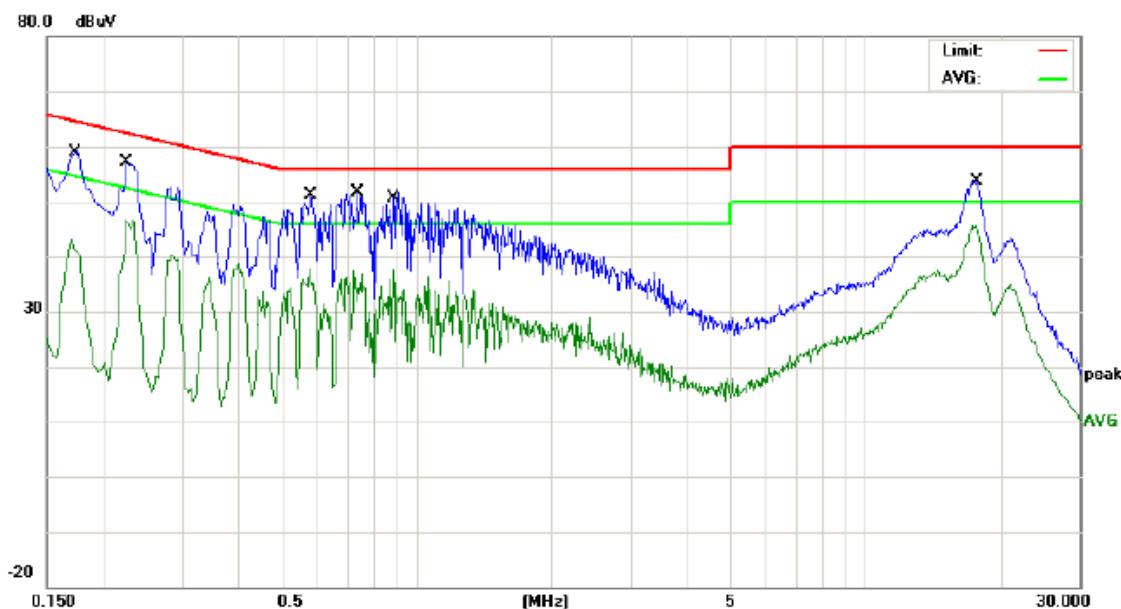

Site 843 Shielded Room

Phase: *L1*

Temperature: 26

Limit: FCC Part15 B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Digitizer Monitor

M/N: VDD21501

Mode: PC by HDMI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1		0.1712	48.07	10.39	58.46	64.90	-6.44	QP	
2		0.1712	32.15	10.39	42.54	54.90	-12.36	AVG	
3		0.2280	46.41	10.40	56.81	62.52	-5.71	QP	
4		0.2280	35.41	10.40	45.81	52.52	-6.71	AVG	
5		0.5820	40.40	10.65	51.05	56.00	-4.95	QP	
6		0.5820	24.83	10.65	35.48	46.00	-10.52	AVG	
7		0.7300	35.90	10.78	46.68	56.00	-9.32	QP	
8		0.7300	24.25	10.78	35.03	46.00	-10.97	AVG	
9		0.8860	39.83	10.89	50.72	56.00	-5.28	QP	
10		0.8860	26.62	10.89	37.51	46.00	-8.49	AVG	
11		17.5820	42.86	10.38	53.24	60.00	-6.76	QP	
12	*	17.5820	35.17	10.38	45.55	50.00	-4.45	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Conducted Emission Measurement


File : ViewMate

Data : #22

Date: 2012-7-30

Time: 20:00:01

80.0 dBuV

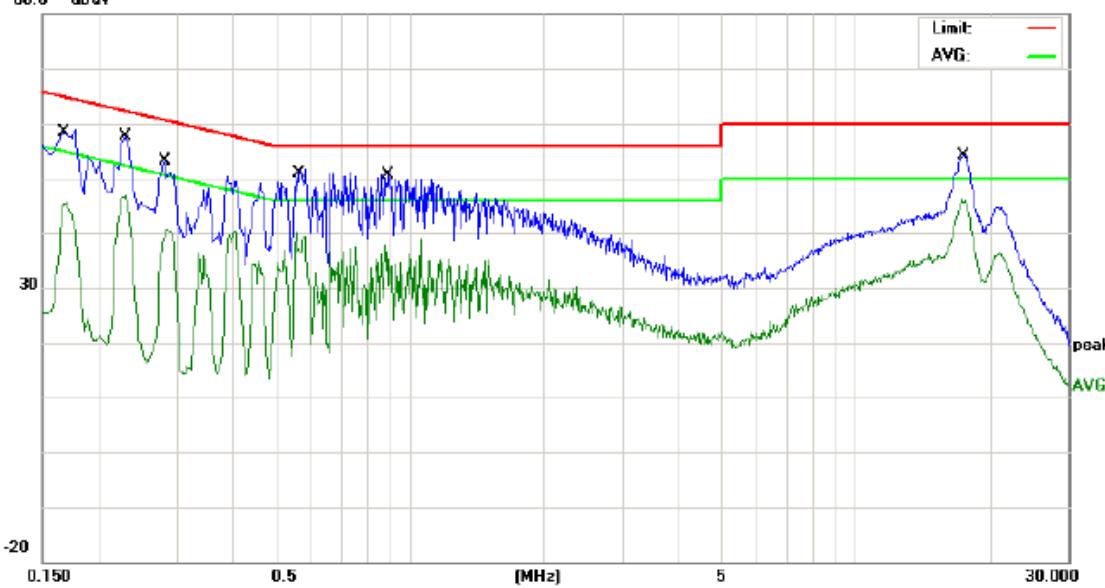

Site 843 Shielded Room

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Digitizer Monitor

M/N: VDD21501

Mode: PC by HDMI

Note:

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1		0.1685	47.71	10.39	58.10	65.03	-6.93	QP
2		0.1685	35.01	10.39	45.40	55.03	-9.63	AVG
3		0.2280	46.65	10.40	57.05	62.52	-5.47	QP
4		0.2280	36.30	10.40	46.70	52.52	-5.82	AVG
5		0.2819	42.62	10.59	53.21	60.76	-7.55	QP
6		0.2819	29.04	10.59	39.63	50.76	-11.13	AVG
7		0.5580	39.49	10.57	50.06	56.00	-5.94	QP
8		0.5580	29.49	10.57	40.06	46.00	-5.94	AVG
9		0.8980	39.57	10.94	50.51	56.00	-5.49	QP
10		0.8980	24.38	10.94	35.32	46.00	-10.68	AVG
11		17.4540	43.52	10.39	53.91	60.00	-6.09	QP
12 *		17.4540	35.70	10.39	46.09	50.00	-3.91	AVG

*:Maximum data x:Over limit l:over margin

(Reference Only)



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

7 RADIATED EMISSION MEASUREMENT

7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	dBuV/m (At 3m)
	Class B
30~88	40.00
88~216	43.50
216~960	46.00
960~1000	54.00

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

7.2. TEST INSTRUMENTS

Radiated Emission Test Site 966				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	12/16/2012
Spectrum Analyzer	R&S	FSU	100114	12/14/2012
Pre Amplifier	H.P.	HP8447E	2945A02715	12/16/2012
Bilog Antenna	SUNOL Sciences	JB3	A021907	12/26/2012
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	12/09/2012
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.

7.3. TEST PROCEDURES

Procedure of Preliminary Test

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per ANSI C63.4.

All I/O cables were positioned to simulate typical usage as per ANSI C63.4.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT and worse cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

When measuring emissions above 1GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beam width, the measurement antenna shall be aligned with the EUT.



Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

For the measurement above 1GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the "cone of radiation" from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

The antenna may have to be higher or lower than the EUT, depending on the EUT's size and mounting height, but the antenna should be restricted to a range of height of from 1m to 4m above the ground or reference ground plane.

If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of the measurements.


using the procedures above to measure with peak detector function, if the result comply with the average limit specified by the appropriate regulation, record the EUT arrangement, mode of operation, and cable positions used for final radiated emission measurement , this can be done with either diagrams or photographs.

Set the detector function of the measuring instrument to average mode, using the procedures above and remeasure only those emissions that complied with the peak limits but exceeded the average limits.


Recorded at least the six highest emissions.

7.4. TEST SETUP

Below 1GHz

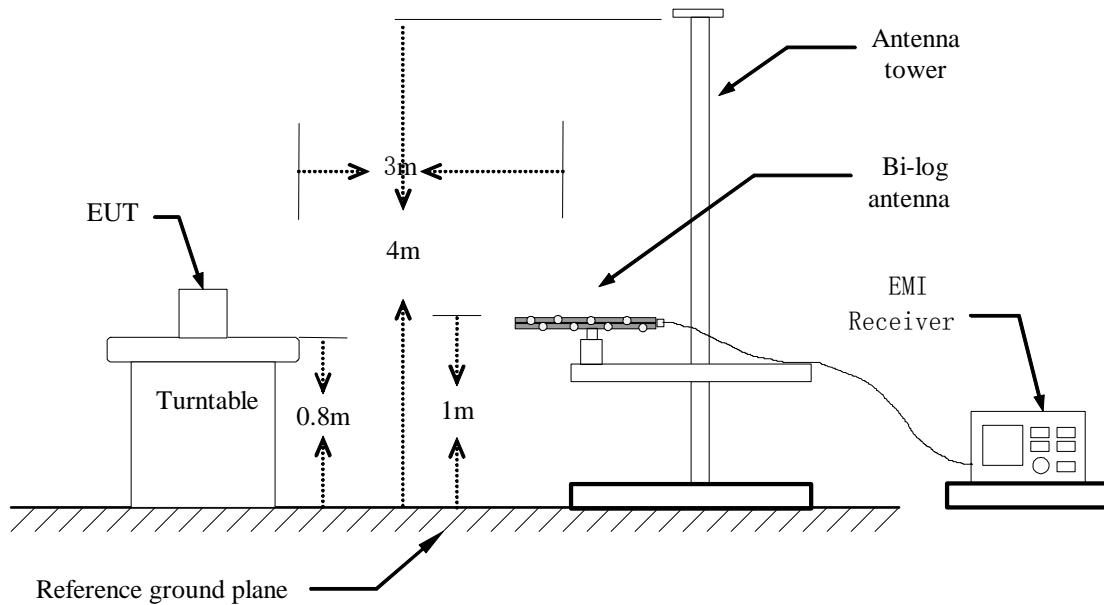

Above 1GHz

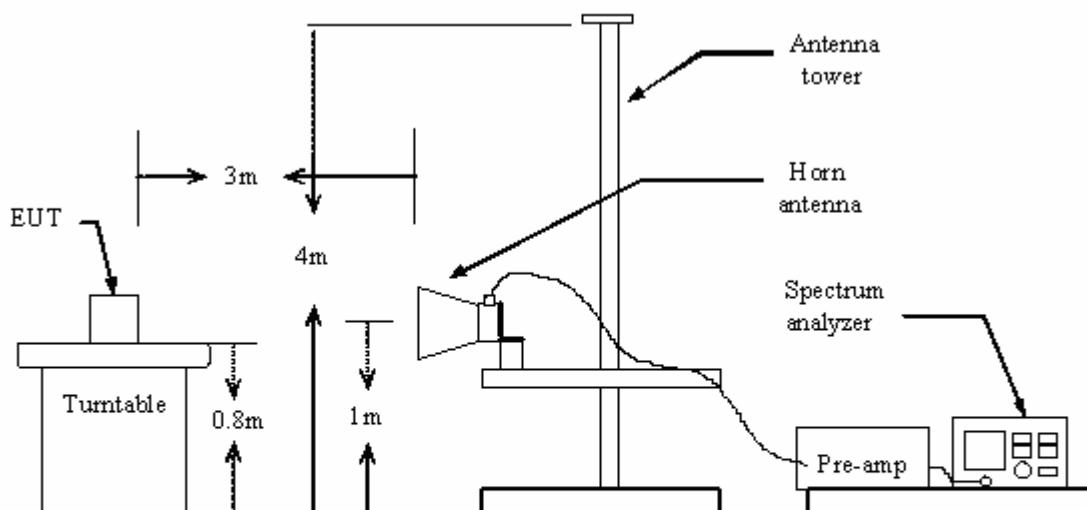

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

7.5. TEST RESULTS

Model No.	VDD21501	Test Mode	PC by VGA/PC by HDMI
Environmental Conditions	26°C, 55% RH	6dB Bandwidth	120 KHz
Antenna Pole	Vertical / Horizontal	Antenna Distance	3m
Detector Function	Peak / Quasi-peak	Test Result	Pass

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading


Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Please refer to following diagram for individual

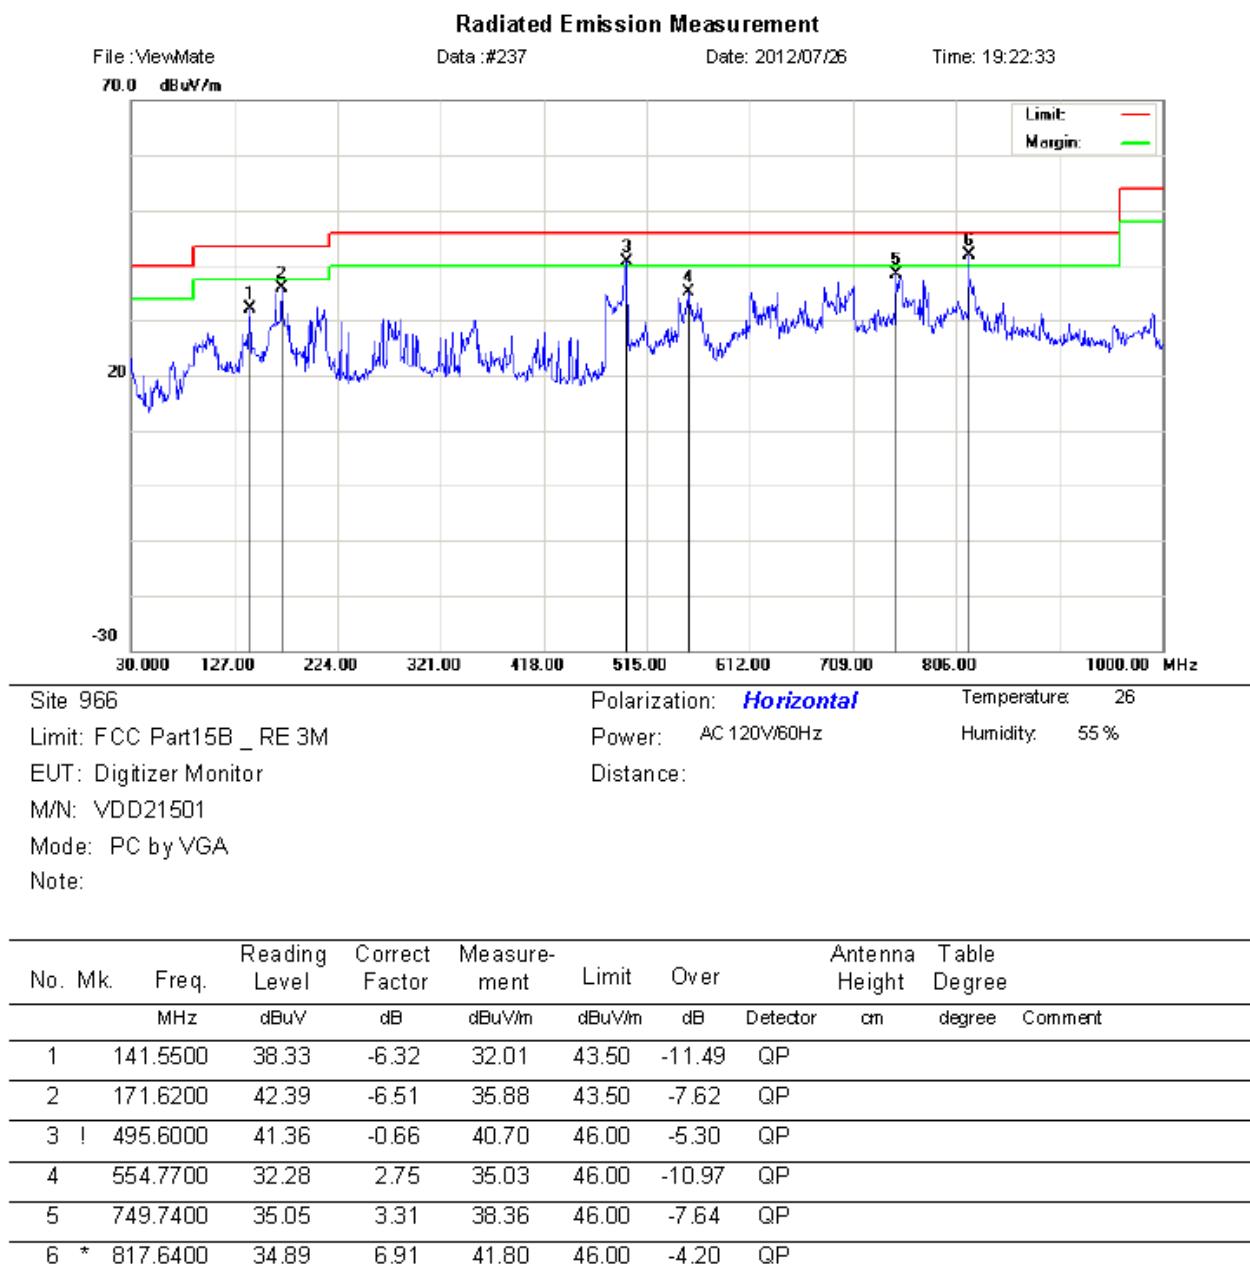

*:Maximum data x:Over limit !:over margin

(Reference Only)

Radiated Emission Measurement

File : ViewMate

Data : #238

Date: 2012/07/26

Time: 19:24:17

70.0 dBuV/m



Site 966

 Polarization: **Vertical**

Temperature 26

Limit: FCC Part15B _ RE 3M

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Digitizer Monitor

Distance:

M/N: VDD21501

Mode: PC by VGA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		141.5500	41.60	-5.02	36.58	43.50	-6.92	QP		
2		211.3900	42.94	-5.66	37.28	43.50	-6.22	QP		
3	!	340.4000	43.71	-3.16	40.55	46.00	-5.45	QP		
4		412.1800	35.41	0.67	36.08	46.00	-9.92	QP		
5	*	495.6000	43.09	-0.66	42.43	46.00	-3.57	QP		
6	!	638.1900	36.90	3.69	40.59	46.00	-5.41	QP		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Radiated Emission Measurement


File : ViewMate

Data : #245

Date: 2012/07/27

Time: 09:13:51

70.0 dBuV/m

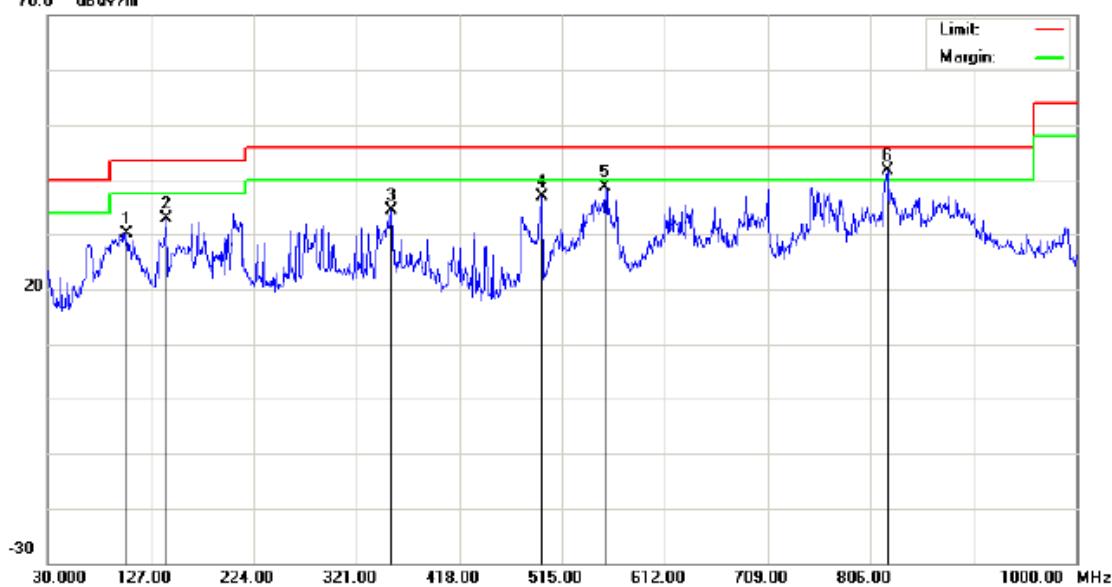

Site: 966

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15B _ RE 3M

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Digitizer Monitor

Distance:

M/N: VDD21501

Mode: PC by HDMI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		104.6899	36.95	-6.93	30.02	43.50	-13.48	QP		
2		141.5500	39.13	-6.32	32.81	43.50	-10.69	QP		
3		353.9800	37.39	-3.07	34.32	46.00	-11.68	QP		
4		496.5699	37.46	-0.54	36.92	46.00	-9.08	QP		
5		555.7400	35.73	2.79	38.52	46.00	-7.48	QP		
6	*	821.5198	34.92	6.74	41.66	46.00	-4.34	QP		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Radiated Emission Measurement


File : ViewMate

Data : #244

Date: 2012/07/27

Time: 09:11:18

70.0 dBuV/m

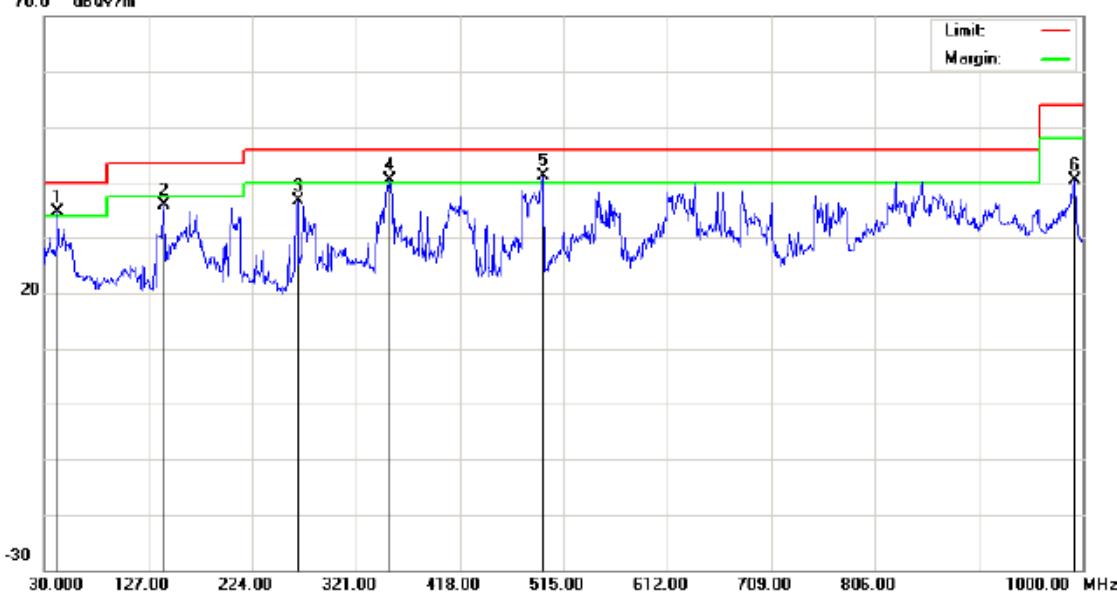

Site 966

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15B _ RE 3M

Power: AC 120V/60Hz

Humidity: 55 %

EUT: Digitizer Monitor

Distance:

M/N: VDD21501

Mode: PC by HDMI

Note:

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level dBuV	Factor dB	ment dBuV/m			Height cm	Degree degree	Comment
1	I	42.6099	43.85	-9.19	34.66	40.00	-5.34	QP		
2		141.5500	40.90	-5.02	35.88	43.50	-7.62	QP		
3		266.6800	39.91	-3.40	36.51	46.00	-9.49	QP		
4	I	353.0099	43.10	-2.80	40.30	46.00	-5.70	QP		
5	*	495.6000	41.73	-0.66	41.07	46.00	-4.93	QP		
6		993.2100	32.83	7.54	40.37	54.00	-13.63	QP		

*:Maximum data x:Over limit !:over margin

(Reference Only)



Report reference No.: WSCT12070461E_FCC 15B

Issued: July 31, 2012

Revised: None

Test Result Above 1GHz

Frequency (MHz)	Ant. Pol.	Corr.Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin	Note	Result
1508.00	H	27.81	55.15	74.00	-18.85	Peak	Pass
1508.00	H	27.81	42.87	54.00	-11.13	AV	Pass
1602.00	V	28.48	57.22	74.00	-16.78	Peak	Pass
1602.00	V	28.48	44.90	54.00	-9.10	AV	Pass

Note: 1. Level = Correction factor + Meter Reading

2. Correction factor=antenna factor + cable loss - preamplifier gain.


3. – means to the measure is no necessary, due to the PK value comply with AV limits.


8 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST BELOW 1GHz

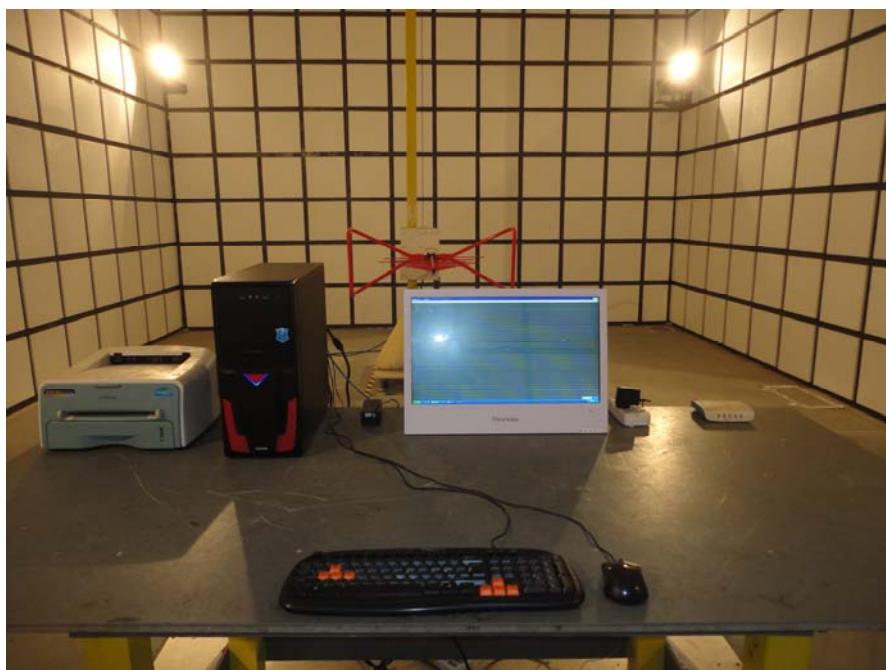

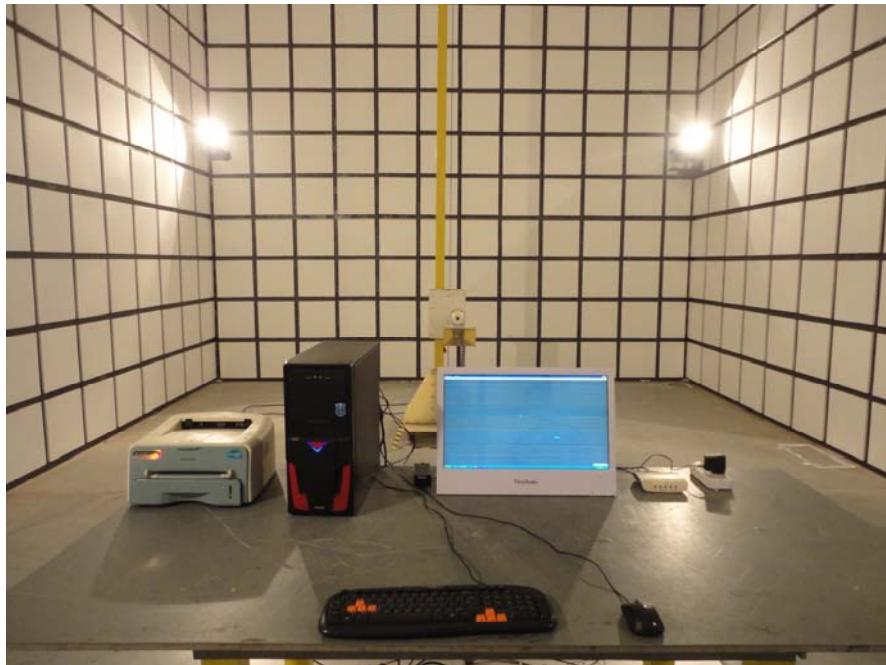RADIATED EMISSION TEST ABOVE 1GHz**PC by VGA**

PC by HDMI**9 PHOTOGRAPHS OF EUT**

Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of Adapter



Appearance photograph of Adapter




Appearance photograph of Adapter



Internal photograph of EUT




Internal photograph of EUT

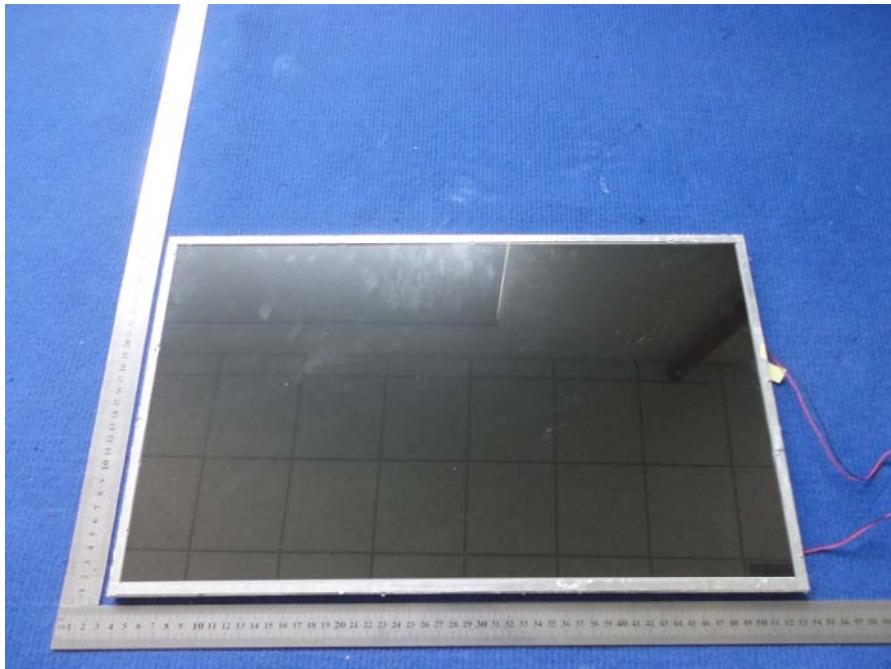

Internal photograph of EUT



PCB photograph of EUT

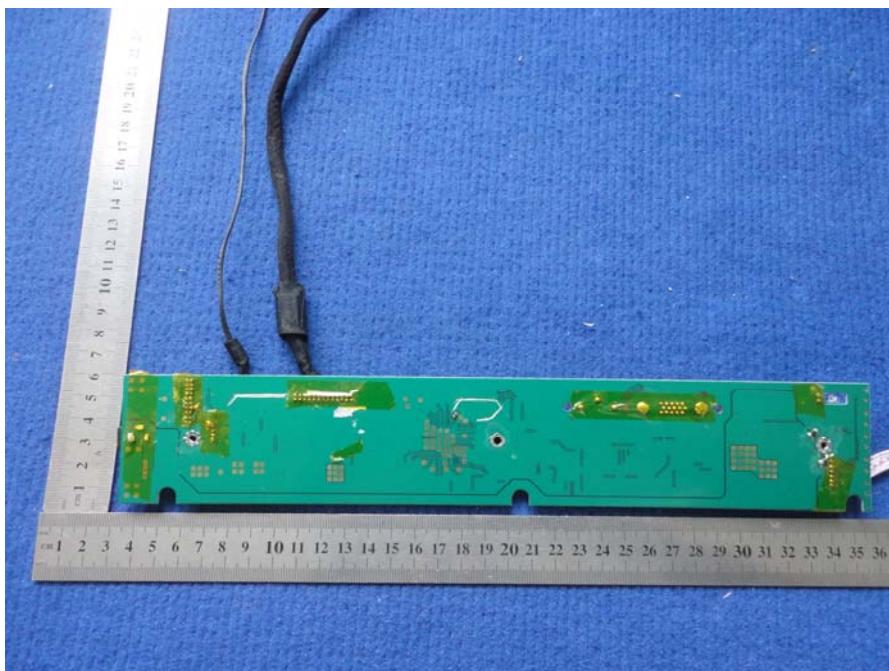

PCB photograph of EUT

