



FCC TEST REPORT

REPORT NO.: 070120FIA01

MODEL NO.: AER07

RECEIVED: Feb. 12, 2007

TESTED: Feb. 12 ~ Mar. 10, 2007

ISSUED: Mar. 10, 2007

APPLICANT: Targus Group International, Inc.

ADDRESS: 1211 North Miller Street, Anaheim, CA 92806 USA

ISSUED BY: ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No.1618, Yishan rd., 201103,
Shanghai, China

This test report consists of 24 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.

ADT (Shanghai) Corporation.



V 1.0

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	5
3.3	DESCRIPTION OF SUPPORT UNITS	7
3.4	DESCRIPTION OF SUPPORT UNITS	7
4	EMISSION TEST	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST RESULTS	8
4.2	DEACTIVATION TIME	9
4.2.1	LIMITS OF DEACTIVATION TIME MEASUREMENT	9
4.2.2	TEST INSTRUMENTS	9
4.2.3	TEST PROCEDURES	9
4.2.4	DEVIATION FROM TEST STANDARD	9
4.2.5	TEST SETUP	9
4.2.6	TEST RESULTS	10
4.3	RADIATED EMISSION MEASUREMENT	13
4.3.1	LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.3.2	TEST INSTRUMENTS	15
4.3.3	TEST PROCEDURE	16
4.3.4	DEVIATION FROM TEST STANDARD	16
4.3.5	TEST SETUP	17
4.3.6	EUT OPERATING CONDITIONS	17
4.3.7	TEST RESULTS	18
4.4	20DB OCCUPIED BANDWIDTH MEASUREMENT	22
4.4.1	LIMITS OF BAND EDGES MEASUREMENT	22
4.4.2	TEST INSTRUMENTS	22
4.4.3	TEST PROCEDURES	22
4.4.4	DEVIATION FROM TEST STANDARD	22
4.4.5	TEST SETUP	22
4.4.6	TEST RESULTS	23
5	APPENDIX - INFORMATION ON THE TESTING LABORATORY	24



1 CERTIFICATION

PRODUCT: Wireless Sport Remote for ipod
MODEL NO.: AER07
BRAND NAME: Targus
APPLICANT: Targus Group International, Inc.
TESTED: Feb. 12 ~ Mar. 10, 2007
TEST ITEM: ENGINEERING SAMPLE
STANDARDS: FCC Part 15:2005,
Subpart C (Section 15.209 and 15.231),
ANSI C63.4-2003

We, **ADT (Shanghai) Corporation**, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

TECHNICAL

ACCEPTANCE :

A handwritten signature of Bright Tong.

, **DATE:** MAR. 10, 2007

Bright Tong
Engineering Supervisor

APPROVED BY :

A handwritten signature of Wallace Pan.

, **DATE:** MAR. 10, 2007

Wallace Pan
Director of Operations

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remarks
15.207	Conducted Emission Test	N/A	
15.231(a)	De-activation Time	PASS	Meet the requirement of limit
15.209 15.231(b)	Radiated Emission Test	PASS	Minimum passing margin is -10.27 dB at 1830.30 MHz
15.231(c)	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Value
Conducted emissions	1.8dB
Radiated emissions	3.2dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Sport Remote for ipod
MODEL NO.	AER07
POWER SUPPLY	3 Vdc from battery
MODULATION TYPE	FM
CARRIER FREQUENCY OF EACH CHANNEL	915 MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Soldered on PCB
DATA CABLE SUPPLIED	N/A
I/O PORTS	N/A

NOTE: The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel is provided to this EUT:

Channel	Frequency
1	915 MHz

Five buttons are provided to this EUT:

No.	Button
1	Volume UP
2	Previous Track (hold for Fast Rewind)
3	Volume Down
4	Play/ Pause (hold to turn iPod off)
5	Next Track (hold for Fast Forward)

Test Mode Applicability AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	De-a T	RE	20dB OBM	
A	-	√	√	√	Continuously transmitting

Where PLC: Power Line Conducted Emission

De-a T: De-activation Time

RE: Radiated Emission

20dB OBM: 20dB Occupied Bandwidth Measurement

De-activation Time:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	FM	X

Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	FM	X

20dB Occupied Bandwidth Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	FM	X

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT is a Wireless Sport Remote for ipod. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


FCC Part 15, Subpart C. (15.231)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

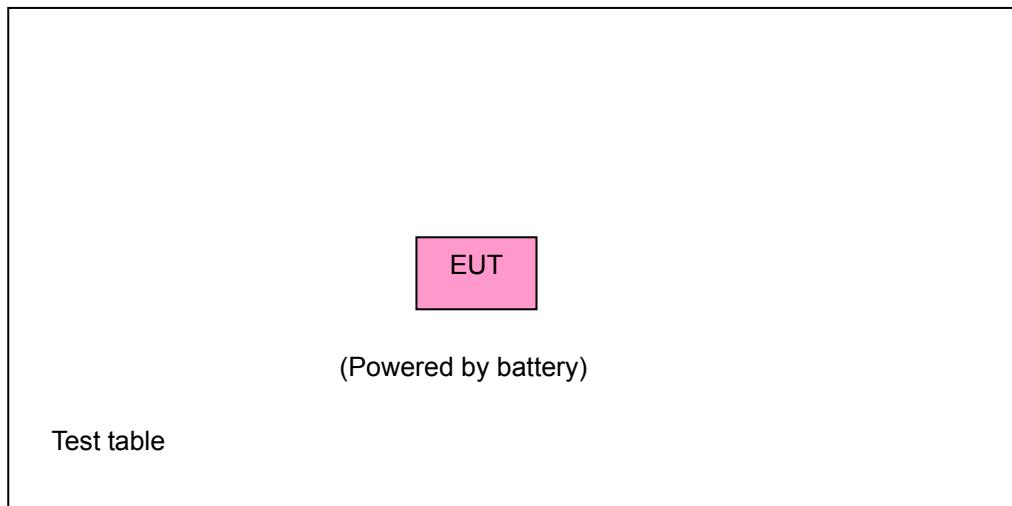

Note: When doing the test, fresh battery was used.

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTES: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST RESULTS

Since the EUT does not AC power port, the test item is not applicable.

4.2 DEACTIVATION TIME

4.2.1 LIMITS OF DEACTIVATION TIME MEASUREMENT

TEST STANDARD:

FCC Part 15: 2005, Subpart C (Section: 15.231(a))

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP	E1S1002	Mar. 16, 2007

NOTE: The calibration interval of the above test instruments is 12 months.


4.2.3 TEST PROCEDURES

- 1 The EUT was placed on the turning table.
- 2 The signal was coupled to the spectrum analyzer through an antenna.
- 3 The transmission duration was measured and recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.


4.2.5 TEST SETUP

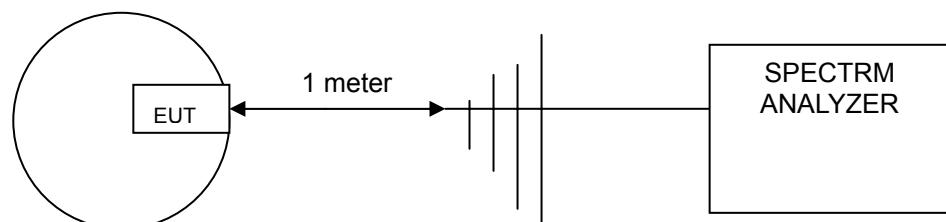

4.2.6 TEST RESULTS

Push button	Frequency (MHz)	Transmission duration (sec)	Maximum limit (sec)	Pass / Fail
1	915	0.32	5	PASS
2	915	0.33	5	PASS
3	915	0.36	5	PASS
4	915	0.35	5	PASS
5	915	0.35	5	PASS


Button 1

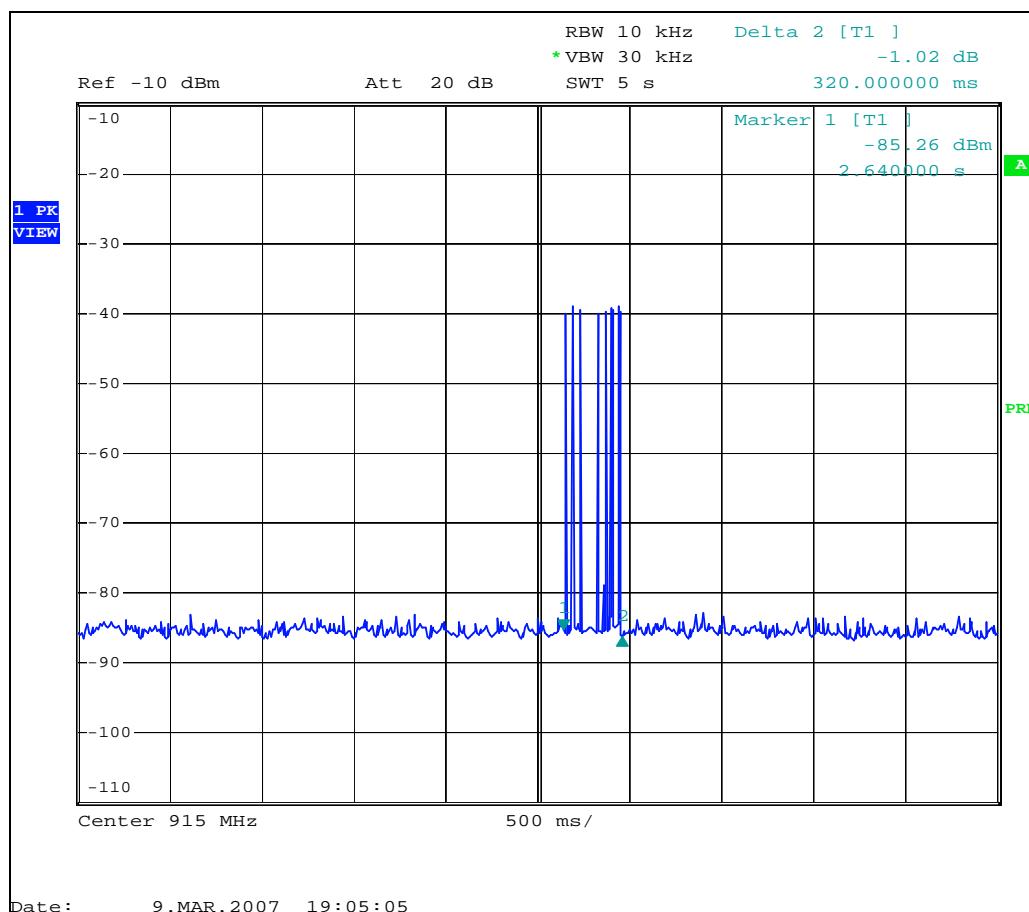


FCC ID: OXM000007



Button 2

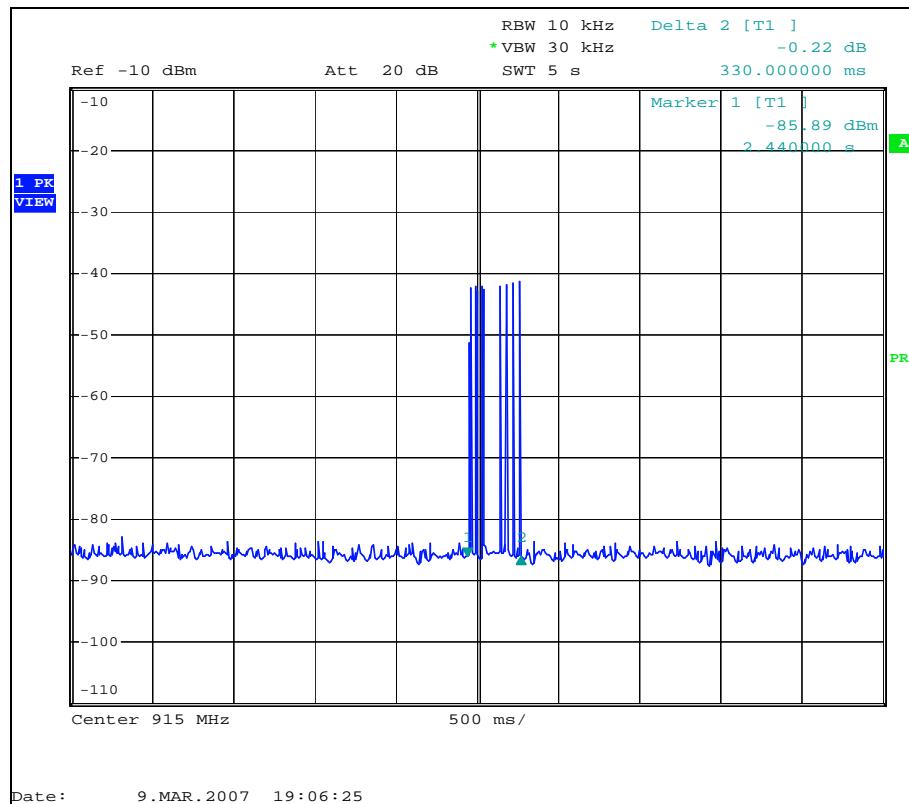


Button 3

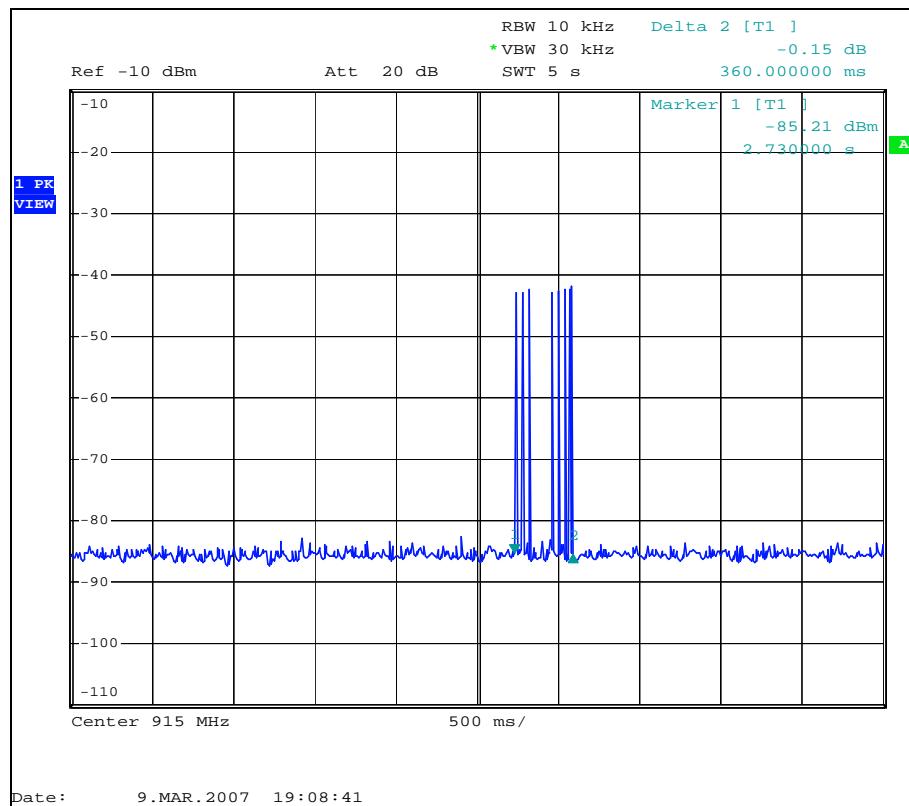


FCC ID: OXM000007



Button 4

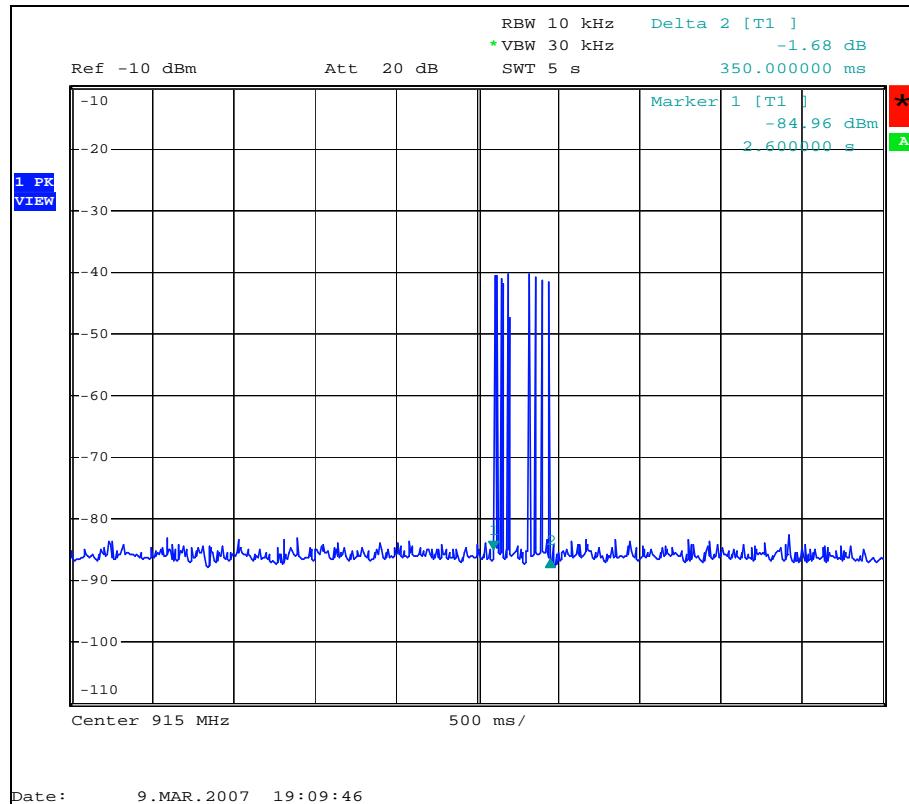

Button 5

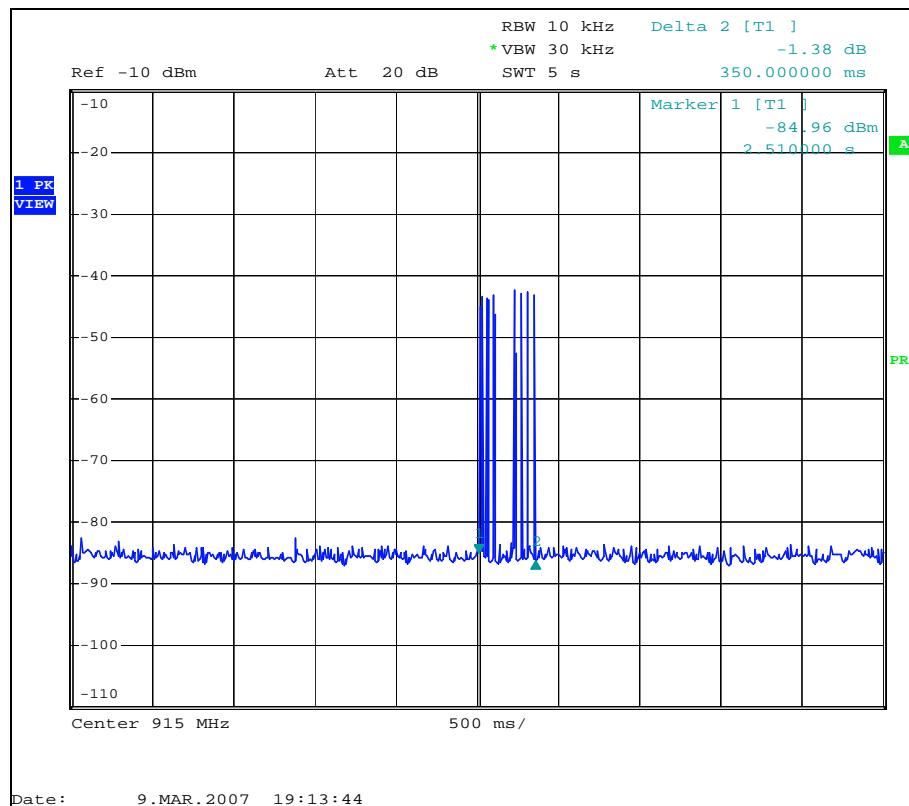

4.3 RADIATED EMISSION MEASUREMENT

4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15: 2005, Subpart C (Section: 15.205)

FCC Part 15: 2005, Subpart C (Section: 15.209)

FCC Part 15: 2005, Subpart C (Section: 15.231(b))

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

NOTE:

- (1) Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F)-6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F)-7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
- (2) The above field strength limits are specified at a distance of 3meters. The tighter limits apply at the band edges.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Apr. 19, 2007
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Sept. 26, 2007
Preamplifier Agilent	8447D	E1A2001	Jan. 27, 2008
Preamplifier Agilent	8449B	E1A2002	Jan. 27, 2008
Double Ridged Broadband Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Feb. 15, 2008
Spectrum Analyzer Agilent	E4403B	E1S1001	Jan. 13, 2008
Signal Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 16, 2007
RF signal cable Woken	RG-402	E1CBH01	May. 30, 2007
RF signal cable Woken	RG-402	E1CBH05	May. 30, 2007
RF signal cable Woken	RG-402	E1CBH07	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL02	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL03	May. 30, 2007
RF signal cable Woken	RG-412	E1CBL04	May. 30, 2007
Software ADT	ADT_Radiated_V7.5	N/A	N/A

NOTE:

1. The calibration interval of the above test instruments is 12 months.
2. “*” = These equipment are used for the final measurement.
3. The horn antenna and Agilent preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The Spectrum Analyzer (model: FSP) and RF signal cable (SERIAL: E1CBH16&E1CBH20) are used only for the measurement of emission frequency above 1GHz if tested.

4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

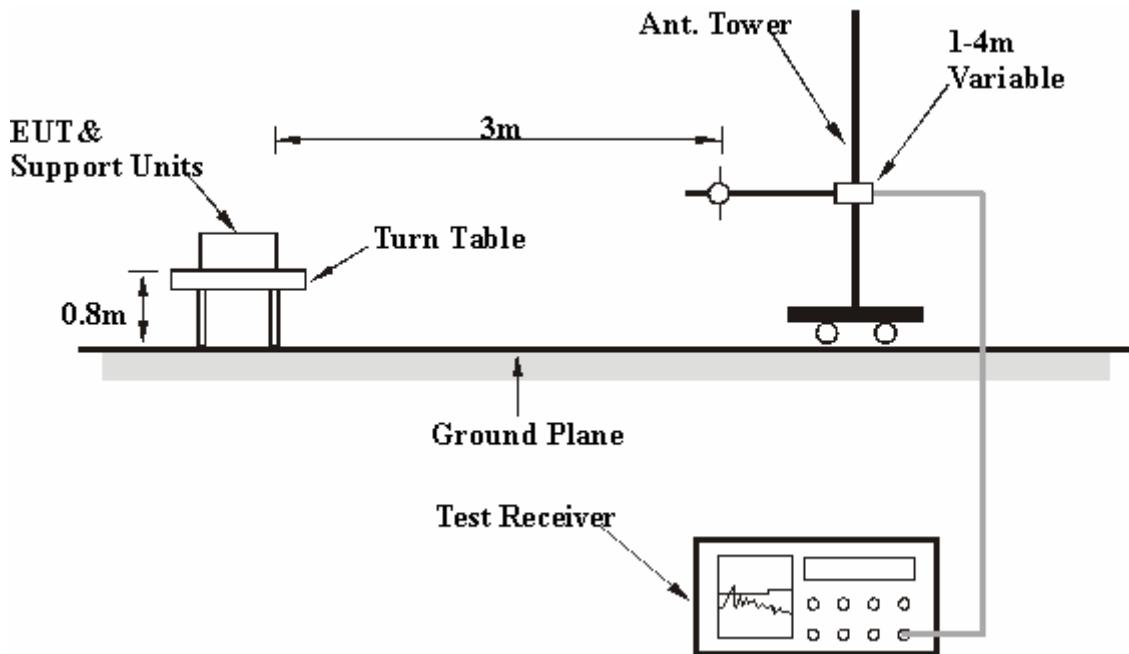

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.3.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	Wireless Sport Remote for ipod	MODEL NO.	AER07
CHANNEL	Channel 1	FREQUENCY RANGE	30 ~ 1000 MHz
MODULATION TYPE	FM	INPUT POWER (SYSTEM)	3 Vdc from battery
ENVIRONMENTAL CONDITIONS	20 deg. C, 65% RH, 1000 hPa	DETECTOR FUNCTION	Quasi-Peak / Peak/Average
TESTED BY	Bright		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	46.98 QP	15.49	-7.31	8.19	40.00	-31.81	100	214
2	156.10 QP	17.03	-6.92	10.11	43.50	-33.39	100	109
3	369.50 QP	18.02	-6.22	11.79	46.00	-34.21	100	177
4	493.18 QP	20.77	-6.47	14.30	46.00	-31.70	100	143
5	660.50 QP	24.01	-6.46	17.55	46.00	-28.45	100	250
6	793.87 QP	25.77	-6.26	19.51	46.00	-26.49	100	80
7*	915.11 PK	27.50	40.95	68.45	101.90	-33.45	400	19
7*	915.11 AV	27.50	22.58	50.08	81.90	-31.82	400	19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	289.48 QP	16.20	-7.17	9.03	46.00	-36.97	100	96
2	425.27 QP	19.49	-6.90	12.59	46.00	-33.41	100	130
3	534.40 QP	21.65	-7.18	14.47	46.00	-31.53	100	164
4	699.30 QP	24.57	-6.88	17.68	46.00	-28.32	100	209
5	776.9 QP	25.64	-7.37	18.26	46.00	-27.74	100	80
6	871.48 QP	26.49	-7.12	19.37	46.00	-26.63	100	61
7*	914.98 PK	27.50	51.94	79.44	101.90	-22.46	400	20
7*	914.98 AV	27.50	33.57	61.07	81.90	-20.83	400	20

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” = Fundamental frequency
6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)
Where the duty factor is calculated from following formula:
20log(Duty cycle) = 20log (4.02*3/100ms) = - 18.37dB
Please see page 21 for plotted duty.

About 1GHz Worst-Case Data

EUT	Wireless Sport Remote for ipod	MODEL NO.	AER07
CHANNEL	Channel 1	FREQUENCY RANGE	1 GHz ~ 10 GHz
MODULATION TYPE	FM	INPUT POWER (SYSTEM)	3 Vdc from battery
ENVIRONMENTAL CONDITIONS	20 deg. C, 65% RH, 1000 hPa	DETECTOR FUNCTION	Quasi-Peak / Peak/Average
TESTED BY	Bright		



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	1830.42 PK	29.75	35.58	65.33	81.90	-16.57	100	0
1	1830.42 AV	29.75	17.21	46.96	61.90	-14.94	100	0
2	2745.00 PK	32.85	20.32	53.18	74.00	-20.82	100	19
2	2745.00 AV	32.85	1.95	34.81	54.00	-19.19	100	19
3	3660.00 PK	34.13	16.26	50.39	74.00	-23.61	100	19
3	3660.00 AV	34.13	-2.11	32.02	54.00	-21.98	100	19
4	4575.00 PK	37.77	13.27	51.04	74.00	-22.96	100	19
4	4575.00 AV	37.77	-5.10	32.67	54.00	-21.33	100	19
5	5490.00 PK	38.98	10.88	49.86	81.90	-32.04	100	19
5	5490.00 AV	38.98	-7.49	31.49	61.90	-30.41	100	19
6	6405.00 PK	41.70	11.28	52.98	81.90	-28.92	100	19
6	6405.00 AV	41.70	-7.09	34.61	61.90	-27.29	100	19
7	7320.00 PK	44.65	11.01	55.67	74.00	-18.33	100	19
7	7320.00 AV	44.65	-7.36	37.30	54.00	-16.70	100	19
8	8235.00 PK	45.19	11.41	56.60	74.00	-17.40	100	19
8	8235.00 AV	45.19	-6.96	38.23	54.00	-15.77	100	19
9	9150.00 PK	46.72	9.22	55.94	74.00	-18.06	100	19
9	9150.00 AV	46.72	-9.15	37.57	54.00	-16.43	100	19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	1830.30 PK	29.75	40.25	70.00	81.90	-11.90	100	0
1	1830.30 AV	29.75	21.88	51.63	61.90	-10.27	100	0
2	2745.00 PK	32.85	17.01	49.86	74.00	-24.14	100	19
2	2745.00 AV	32.85	-1.36	31.49	54.00	-22.51	100	19
3	3660.00 PK	34.13	15.10	49.23	74.00	-24.77	100	19
3	3660.00 AV	34.13	-3.27	30.86	54.00	-23.14	100	19
4	4575.00 PK	37.77	12.46	50.23	74.00	-23.77	100	20
4	4575.00 AV	37.77	-5.91	31.86	54.00	-22.14	100	20
5	5490.00 PK	38.98	11.91	50.89	81.90	-31.01	100	20
5	5490.00 AV	38.98	-6.46	32.52	61.90	-29.38	100	20
6	6405.00 PK	41.70	11.89	53.59	81.90	-28.31	100	20
6	6405.00 AV	41.70	-6.48	35.22	61.90	-26.68	100	20
7	7320.00 PK	44.65	12.58	57.23	74.00	-16.77	100	20
7	7320.00 AV	44.65	-5.79	38.86	54.00	-15.14	100	20
8	8235.00 PK	45.19	11.99	57.18	74.00	-16.82	100	20
8	8235.00 AV	45.19	-6.38	38.81	54.00	-15.19	100	20
9	9150.00 PK	46.72	9.89	56.61	74.00	-17.39	100	20
9	9150.00 AV	46.72	-8.48	38.24	54.00	-15.76	100	20

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*” = Fundamental frequency
6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)
Where the duty factor is calculated from following formula:
20log(Duty cycle) = 20log (4.02*3/100ms) = - 18.37dB
Please see page 21 for plotted duty.

FCC ID: OXM000007

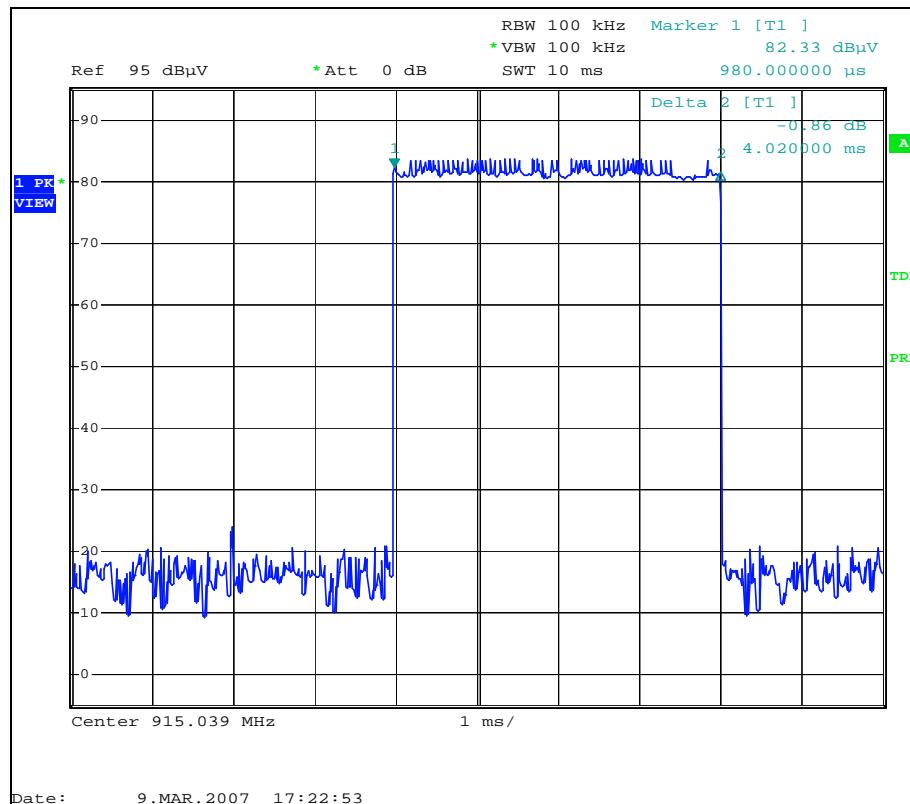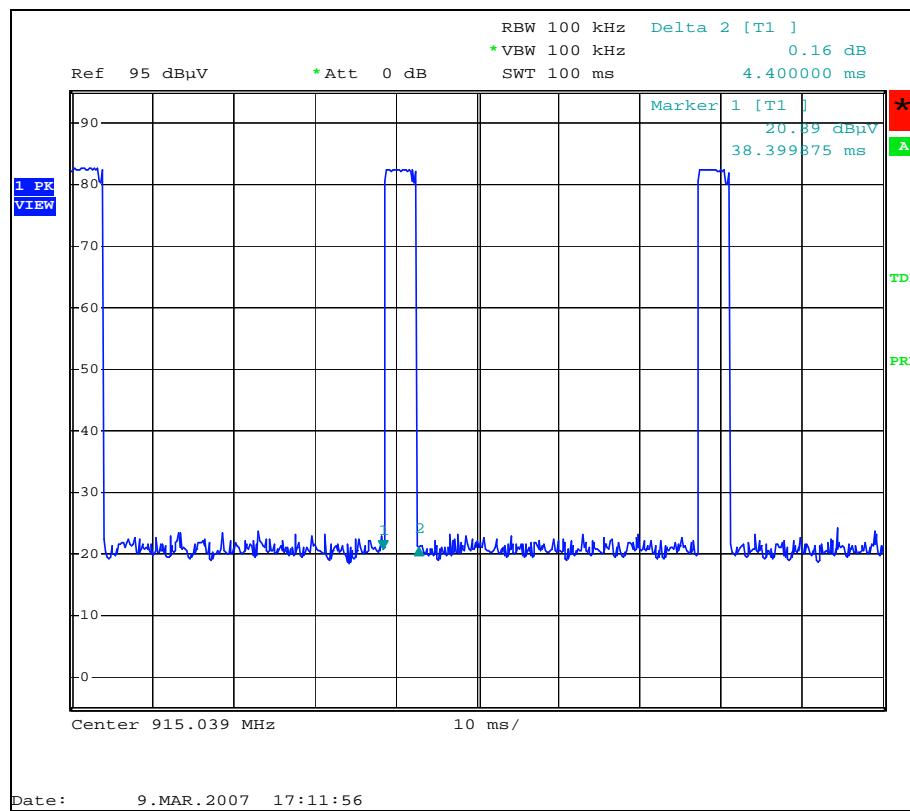

4.4 20DB OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF BAND EDGES MEASUREMENT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

Fundamental Frequency (MHz)	Limit of 20 dB Bandwidth(MHz)
915	4.575

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP	E1S1002	Mar. 16, 2007

NOTE: The calibration interval of the above test instruments is 12 months.


4.4.3 TEST PROCEDURES

1. The EUT was placed on the turning table.
2. The signal was coupled to the spectrum analyzer through an antenna.
3. Set the resolution bandwidth to 100 kHz and video bandwidth to 100 kHz then select Peak function to scan the channel frequency.
4. The 20dB bandwidth was measured and recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.


4.4.5 TEST SETUP

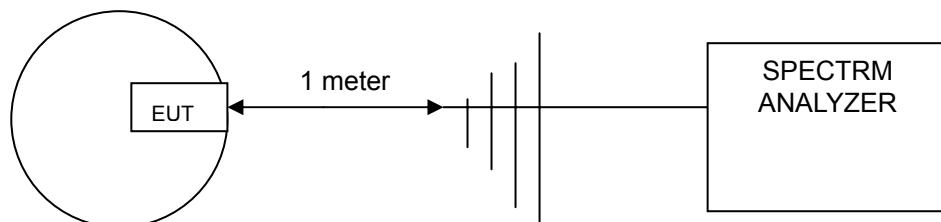

4.4.6 TEST RESULTS

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (MHz)	Pass / Fail
915	318	4.575	PASS

The plot of test result is attached as below.

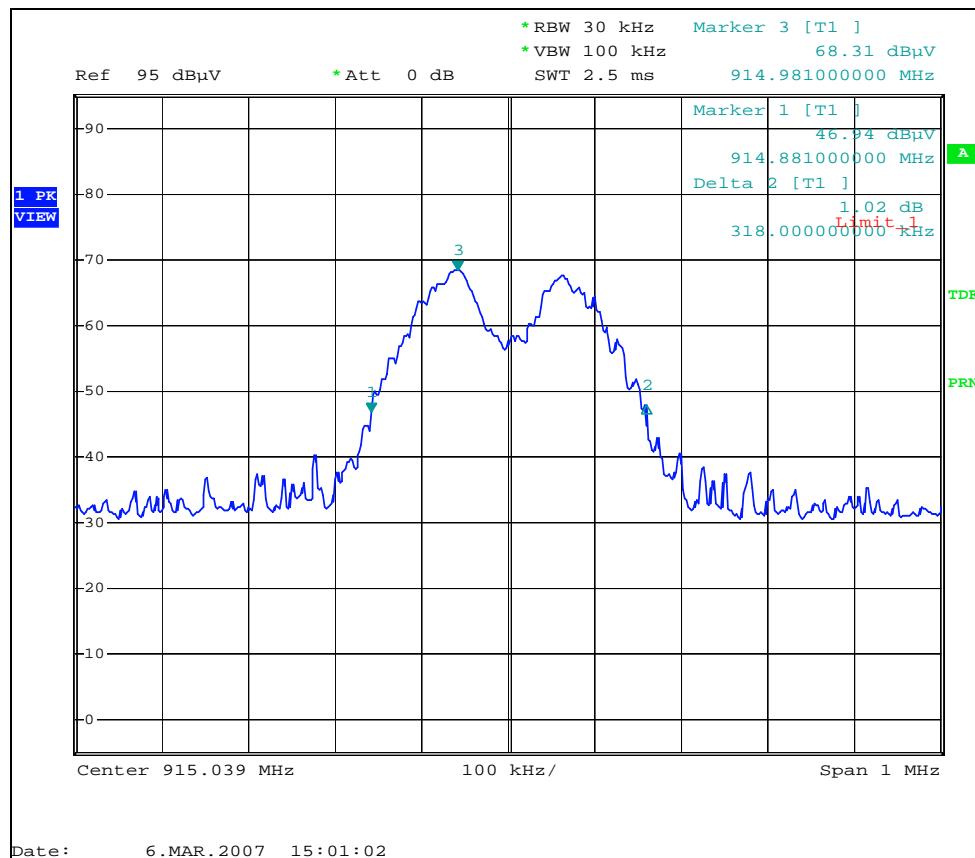

5 APPENDIX - INFORMATION ON THE TESTING LABORATORY

We, ADT (Shanghai) Corp., was founded in 2003 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratory is accredited and approved by the following approval agencies according to ISO / IEC 17025 (2005).

The client should not use it to claim product endorsement by CNLS, A2LA, or any government agency.

Japan	VCCI
USA	FCC, A2LA
Norway	DNV
China	CNAS



Copies of accreditation certificates of our laboratory obtained from approval agencies can be downloaded from our web site: www.cnadt.com

If you have any comments, please feel free to contact us at the following:

ADT (Shanghai) Corporation

TEL :86-21-6465-9091

Fax : 86-21-6465-9092

Email: service@adt-sh.com

Web Site: www.cnadt.com