



FCC Test Report

Issued Date : Jul. 15, 2009

Project No. : 0907C032

Equipment : 2.4G wireless Presenter

Model Name : AMP13

Applicant : Targus Group International, Inc

Address : 1211 North Miller Street Anaheim, CA 92806 United States

Manufacturer : Sysgration(Shenzhen) Ltd.

Address : Egongling Village, Pinghu Town, Longgang Dist. Shenzhen City, China

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Test:

Jul. 08, 2009 ~ Jul. 14, 2009

Testing Engineer:

(Josh Lin)

Technical Manager:

(Jeff Yang)

Authorized Signatory:

(Andy Chiu)

NEUTRON ENGINEERING INC.

B1, No.37, Lane 365, Yang Guang St., NeiHu

District 114., Taipei, Taiwan

TEL : (02) 2657-3299 FAX : (02) 2657-3331



Lab Code: 200145-0



R-2669 R-2829
C-2918



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	4
2 . SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.7 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2 MEASUREMENT INSTRUMENTS LIST	18
4.2.3 TEST PROCEDURE	18
4.2.4 DEVIATION FROM TEST STANDARD	18
4.2.5 TEST SETUP	19
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS (30~1000MHZ)	20
4.2.8 TEST RESULTS (ABOVE 1000 MHZ)	22
5 . EUT TEST PHOTO	24



1. CERTIFICATION

Equipment: 2.4G wireless Presenter

Brand Name: Targus

Model Name: AMP13

Applicant: Targus Group International, Inc

Factory: Sysgration(Shenzhen) Ltd.

Address: Egongling Village, Pinghu Town, Longgang Dist. Shenzhen City. China

Date of Test: Jul. 08, 2009 ~ Jul. 14, 2009

Standards: FCC Part 15, Subpart B, Class B

CISPR 22: 1997+A1: 2000, Class B

ANSI C63.4-2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCE-1-0907C032) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B CISPR 22:1997+A1: 2000	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/OS02** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95%** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G wireless Presenter															
Brand Name	Targus															
Model Name	AMP13															
Model Difference	N/A															
OEM Model Name	N/A															
OEM Brand	N/A															
Product Description	<p>The EUT is a 2.4G wireless Presenter.</p> <table border="1"><tr><td>Product Type</td><td>Low Power Communication Device</td></tr><tr><td>Operation Frequency:</td><td>2412~2472 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Number Of Channel</td><td>5CH</td></tr><tr><td>Antenna Designation:</td><td>Printed antenna</td></tr><tr><td>Antenna Gain(Peak)</td><td>-0.32 dBi</td></tr><tr><td>Output Power:</td><td>77.85 dBuV/m (AV Max.)</td></tr></table>		Product Type	Low Power Communication Device	Operation Frequency:	2412~2472 MHz	Modulation Type:	GFSK	Number Of Channel	5CH	Antenna Designation:	Printed antenna	Antenna Gain(Peak)	-0.32 dBi	Output Power:	77.85 dBuV/m (AV Max.)
Product Type	Low Power Communication Device															
Operation Frequency:	2412~2472 MHz															
Modulation Type:	GFSK															
Number Of Channel	5CH															
Antenna Designation:	Printed antenna															
Antenna Gain(Peak)	-0.32 dBi															
Output Power:	77.85 dBuV/m (AV Max.)															
	<p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>															
Power Source	DC Voltage supplied from 1*AAA size Battery DC Voltage supplied from Host system.															
Power Rating	DC 1.5V (Mouse) AC 120V/60Hz (Dongle)															
Connecting I/O Port(s)	Please refer to the User's Manual															
Products Covered	N/A															
EUT Modification(s)	N/A															

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz
	2	2427 MHz
	3	2452 MHz
	4	2467 MHz
	5	2472 MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed Antenna	N/A	-0.32



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link with Dongle

For Conducted Test	
Final Test Mode	Description
Mode 1	Normal Link with Dongle


For Radiated Test	
Final Test Mode	Description
Mode 1	Normal Link with Dongle

Note:

- (1) The EUT used the new battery



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

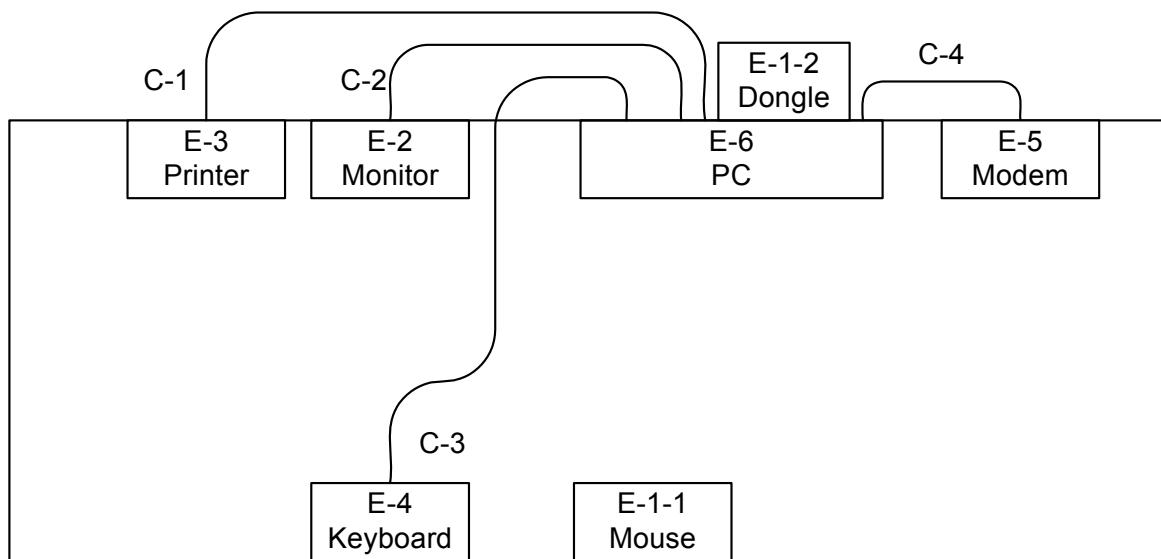

C-1 Parallel Cable
C-2 D-Sub Cable
C-3 PS/2 Cable
C-4 RS232 Cable

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1-1	2.4G wireless Presenter	Targus	AMP13	OXM000020	N/A	TX
E-1-2	Wireless Dongle	Targus	AMP13	DOC	N/A	RX
E-2	19" LCD Monitor	Samsung	SyncMaster 193P	DOC	DI19H4JXC05517A	
E-3	Printer	SII	DPU-414	DOC	1045105A	
E-4	PS/2 K/B	Logitech	Y-SJ17(AC K260A)	DOC	SYU44664880	
E-5	Modem	ACEEX	DM-1414V	DOC	8041708	
E-6	PC	IBM	8175-I5V	DOC	99MYG14	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.8M	
C-2	YES	YES	1.5M	
C-3	YES	NO	1.5M	
C-4	YES	NO	1.5M	

Note:

- (1) The support equipment was authorized by Declaration of Conformity.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Cable	N/A	SR03_C_01 &02	N/A	Aug. 19, 2009
2	LISN	EMCO	3816/2	00042991	Jan. 21, 2010
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Dec. 28, 2009
4	50Ω BNC TYPE Terminator	N/A	N/A	01	May 25, 2011
5	LISN	Rolf Heine	NNB-2/16Z	98053	Dec. 28, 2009
6	EMI Test Receiver	R&S	ESCI	100082	Mar. 17, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

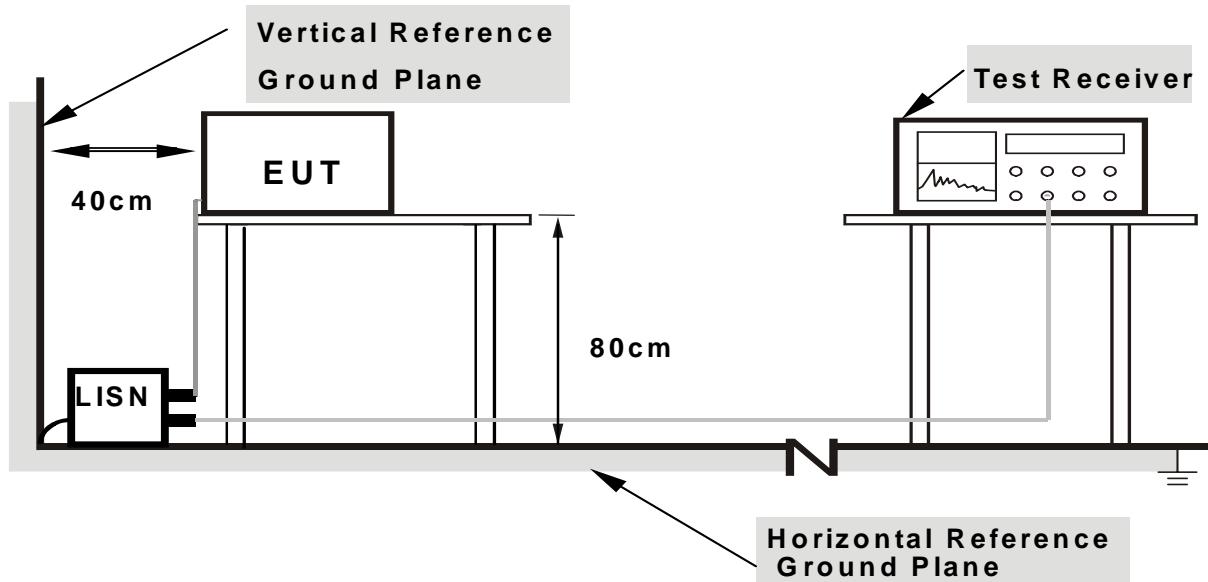

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



4.1.7 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The program contained on a PC hard disk and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:


**4.1.6 TEST RESULTS**

EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	28 °C	Relative Humidity :	50 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link with dongle		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.15	Line	49.65	*	66.00	56.00	-16.35	(QP)
0.92	Line	34.11	*	56.00	46.00	-21.89	(QP)
1.22	Line	31.05	*	56.00	46.00	-24.95	(QP)
2.74	Line	30.58	*	56.00	46.00	-25.42	(QP)
13.95	Line	31.90	*	60.00	50.00	-28.10	(QP)
24.10	Line	30.50	*	60.00	50.00	-29.50	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of "Note". If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

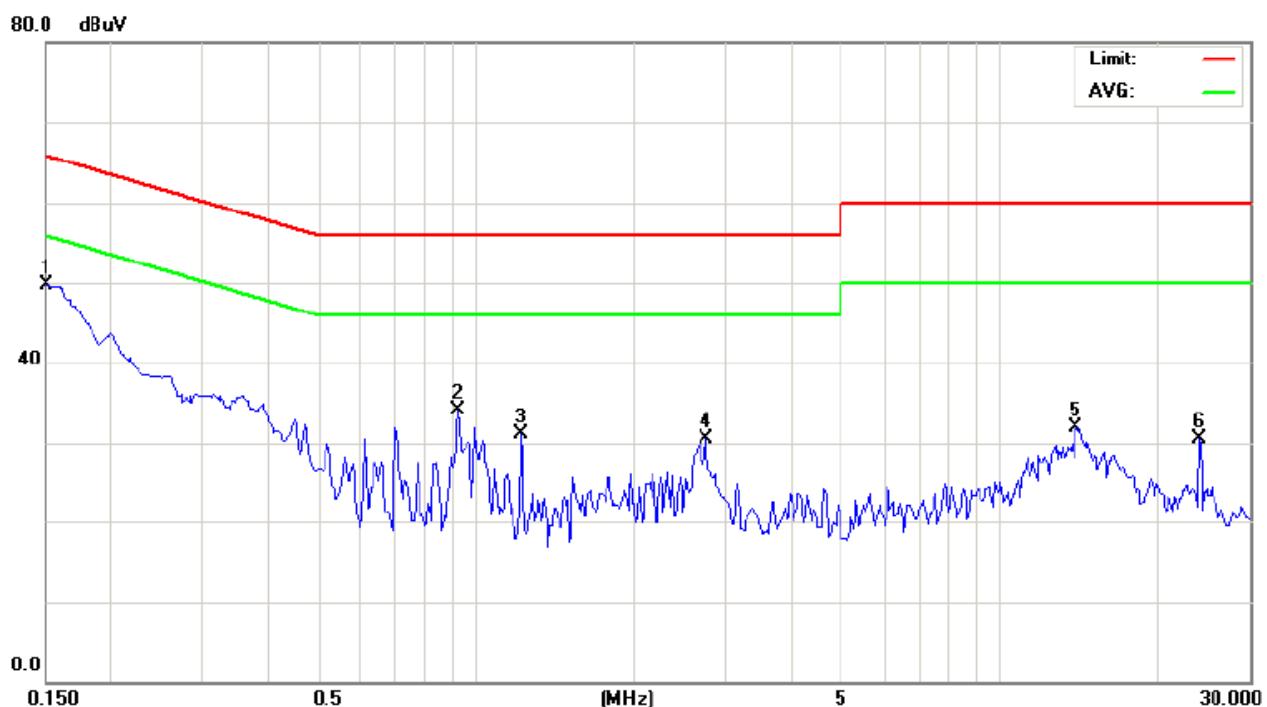




EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	28 °C	Relative Humidity :	50 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Normal Link with dongle		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.15	Neutral	51.08	*	66.00	56.00	-14.92	(QP)
0.19	Neutral	48.88	*	64.04	54.04	-15.16	(QP)
1.00	Neutral	36.10	*	56.00	46.00	-19.90	(QP)
2.63	Neutral	31.16	*	56.00	46.00	-24.84	(QP)
13.95	Neutral	31.95	*	60.00	50.00	-28.05	(QP)
15.64	Neutral	31.23	*	60.00	50.00	-28.77	(QP)

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

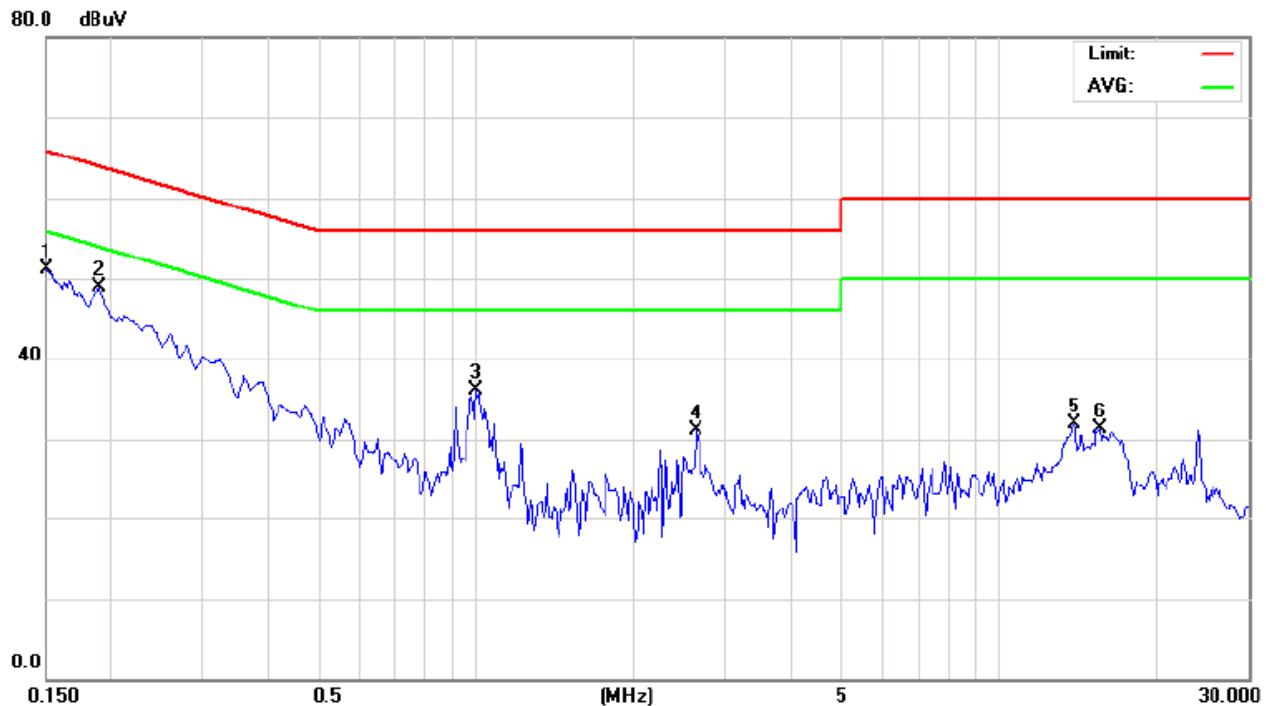



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes:

- (1) The limit for radiated test was performed according to as following:
CISPR 22/ FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3176	Jul. 24, 2009
2	Test Cable	N/A	LMR-400	N/A	Jan. 05, 2010
3	Test Cable	N/A	OS01-1	01	Jun. 23, 2010
4	Pre-Amplifier	Anritsu	MH648A	M09961	Dec. 29, 2009
5	Positioning Controller (OS01)	MF	MF7802	N/A	N/A
6	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
7	Spectrum Analyzer (1G)	R&S	FSP-40	100129	Sep. 09, 2009
8	EMI Measuring Receiver	SHCAFFNER	SCR 3501	408	Nov. 24.2009

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

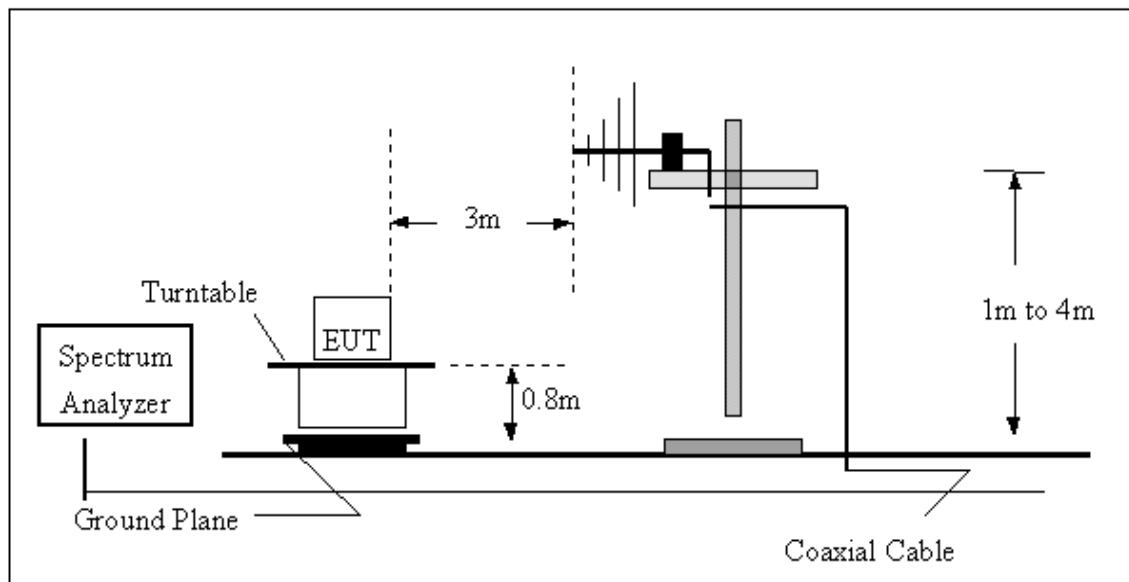

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

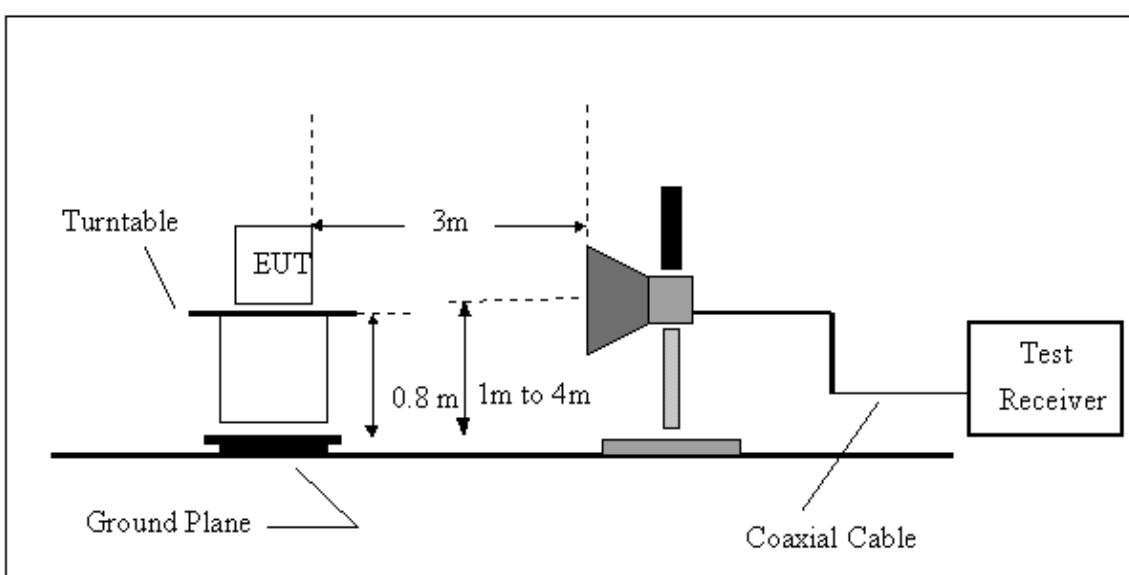

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.2.7 TEST RESULTS (30~1000MHZ)**

EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	23 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Mode 1		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
65.22	V	38.91	-10.93	27.98	40.00	- 12.02	
97.65	V	37.23	-13.80	23.43	43.50	- 20.07	
114.64	V	36.29	-10.43	25.86	43.50	- 17.64	
245.66	V	40.26	-10.26	30.00	46.00	- 16.00	
666.78	V	33.06	1.00	34.06	46.00	- 11.94	
923.45	V	30.62	4.43	35.05	46.00	- 10.95	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

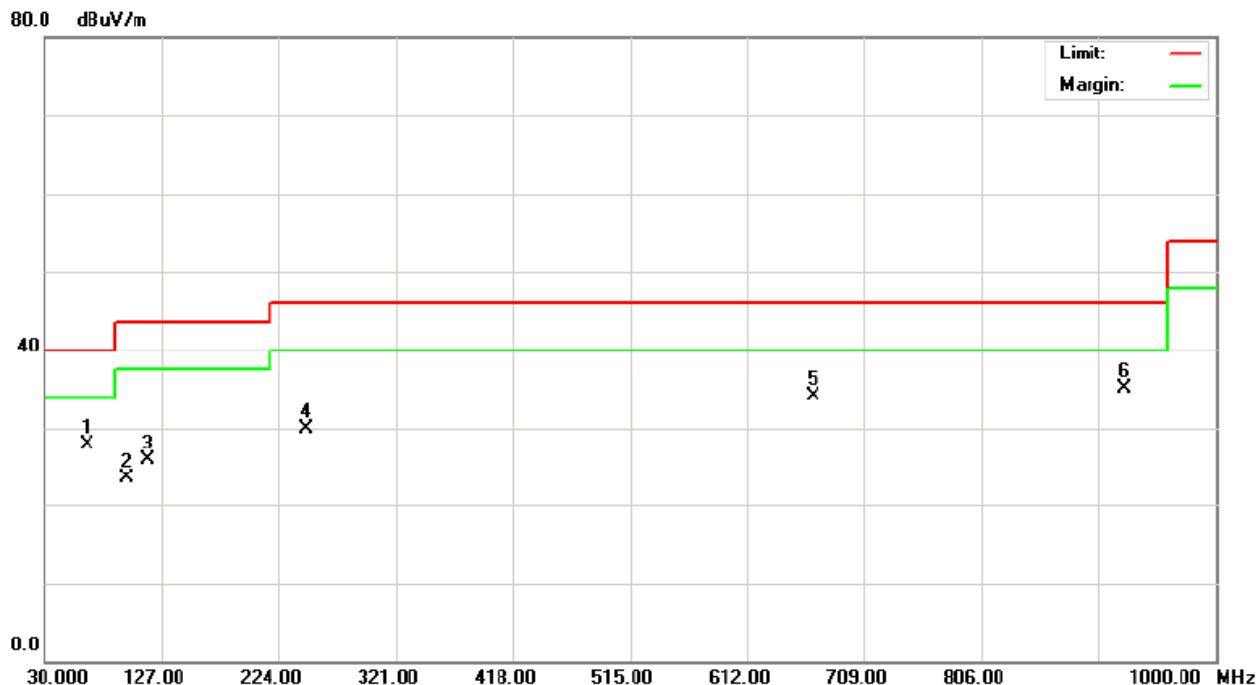



EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	23 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	Mode 1		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
65.22	H	41.01	-10.93	30.08	40.00	- 9.92	
134.87	H	37.06	-9.50	27.56	43.50	- 15.94	
254.75	H	33.91	-9.83	24.08	46.00	- 21.92	
341.34	H	42.06	-7.07	34.99	46.00	- 11.01	
400.21	H	33.51	-5.08	28.43	46.00	- 17.57	
663.43	H	23.11	0.94	24.05	46.00	- 21.95	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .




**4.2.8 TEST RESULTS (ABOVE 1000 MHZ)**

EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	29 °C	Relative Humidity :	50 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	RX Mode		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1643.55	V	46.65	37.85	-4.31	42.34	33.54	74.00	54.00	X/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 1000MHz to 6000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

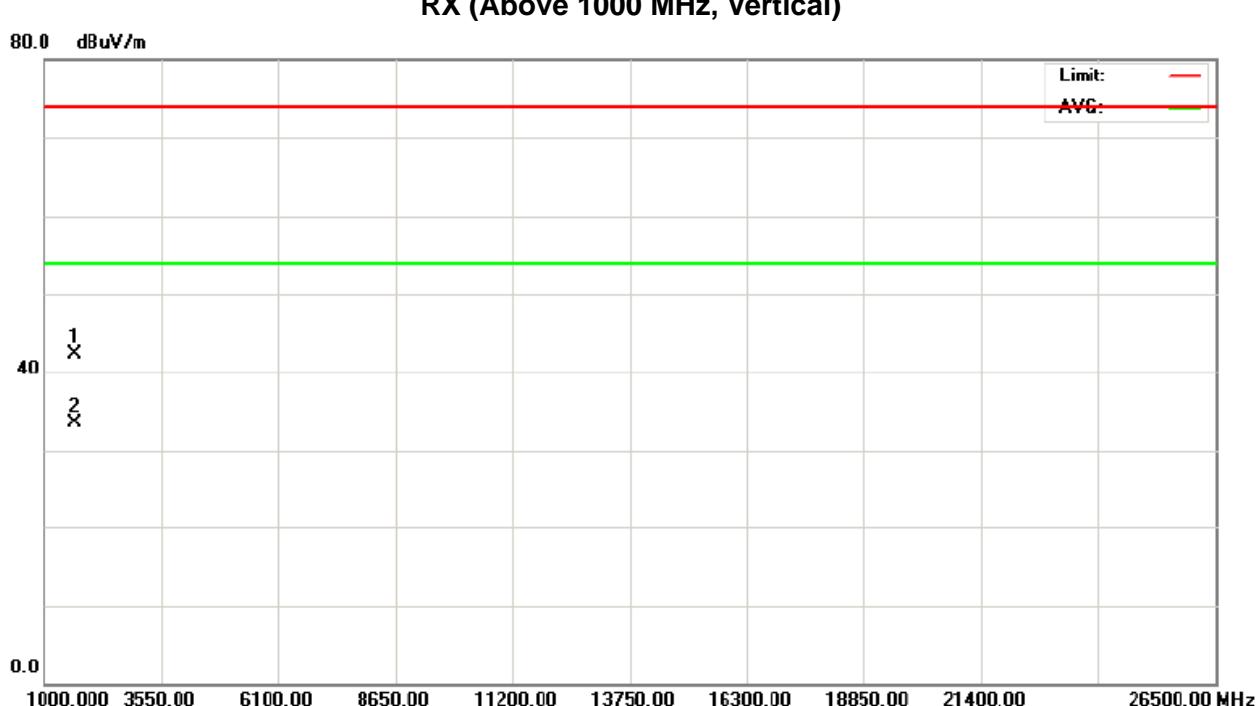RX (Above 1000 MHz, Vertical)




EUT :	2.4G wireless Presenter	Model Name. :	AMP13
Temperature :	29 °C	Relative Humidity :	50 %
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	RX Mode		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1643.55	H	46.43	39.63	-4.31	42.12	35.32	74.00	54.00	X/H

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (2) Measuring frequency range from 1000MHz to 6000MHz or the 10th harmonic of highest fundamental frequency . "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

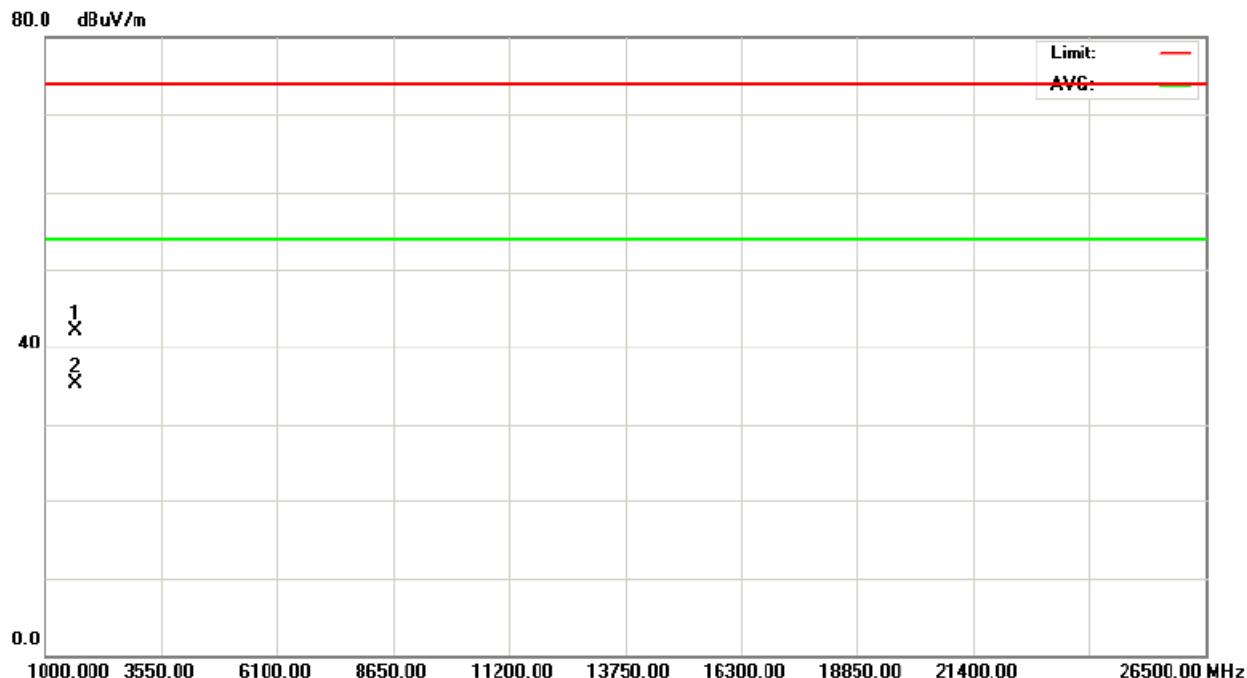RX (Above 1000 MHz, Horizontal)



5. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

