

# FCC TEST REPORT

**REPORT NO.:** RF121001D11  
**MODEL NO.:** AMW066R  
**FCC ID:** OXM000045  
**RECEIVED:** Oct. 1, 2012  
**TESTED:** Oct. 4 ~ 11, 2012  
**ISSUED:** Oct. 18, 2012

**APPLICANT:** Targus Group International, Inc.

**ADDRESS:** 1211 North Miller Street, Anaheim, California,  
92806, United States

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|                                                                                              |    |
|----------------------------------------------------------------------------------------------|----|
| RELEASE CONTROL RECORD .....                                                                 | 3  |
| 1. CERTIFICATION.....                                                                        | 4  |
| 2. SUMMARY OF TEST RESULTS .....                                                             | 5  |
| 2.1 MEASUREMENT UNCERTAINTY .....                                                            | 5  |
| 3. GENERAL INFORMATION .....                                                                 | 6  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                                                         | 6  |
| 3.2 DESCRIPTION OF TEST MODES .....                                                          | 7  |
| 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....                                 | 8  |
| 3.3 DESCRIPTION OF SUPPORT UNITS .....                                                       | 10 |
| 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST.....                                                | 11 |
| 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....                                            | 12 |
| 4. TEST TYPES AND RESULTS .....                                                              | 13 |
| 4.1 CONDUCTED EMISSION MEASUREMENT.....                                                      | 13 |
| 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....                                         | 13 |
| 4.1.2 TEST INSTRUMENTS.....                                                                  | 14 |
| 4.1.3 TEST PROCEDURES .....                                                                  | 14 |
| 4.1.4 DEVIATION FROM TEST STANDARD.....                                                      | 15 |
| 4.1.5 TEST SETUP.....                                                                        | 15 |
| 4.1.6 EUT OPERATING CONDITIONS .....                                                         | 15 |
| 4.1.7 TEST RESULTS .....                                                                     | 16 |
| 4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT .....                                        | 20 |
| 4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT .....                            | 20 |
| 4.2.2 TEST INSTRUMENTS.....                                                                  | 21 |
| 4.2.3 TEST PROCEDURES .....                                                                  | 22 |
| 4.2.4 DEVIATION FROM TEST STANDARD.....                                                      | 22 |
| 4.2.5 TEST SETUP.....                                                                        | 23 |
| 4.2.6 EUT OPERATING CONDITIONS .....                                                         | 23 |
| 4.2.7 TEST RESULTS .....                                                                     | 24 |
| 5. PHOTOGRAPHS OF THE TEST CONFIGURATION .....                                               | 30 |
| 6. INFORMATION ON THE TESTING LABORATORIES.....                                              | 31 |
| 7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING<br>CHANGES TO THE EUT BY THE LAB..... | 32 |



## RELEASE CONTROL RECORD

| ISSUE NO.   | REASON FOR CHANGE | DATE ISSUED   |
|-------------|-------------------|---------------|
| RF121001D11 | Original release  | Oct. 18, 2012 |

## 1. CERTIFICATION

**PRODUCT:** Targus Wireless USB Receiver

**BRAND:** Targus

**MODEL NO.:** AMW066R

**APPLICANT:** Targus Group International, Inc.

**TESTED:** Oct. 4 ~ 11, 2012

**TEST SAMPLE:** MASS-PRODUCTION

**STANDARDS:** FCC Part 15, Subpart C (Section 15.249)

ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Oct. 18, 2012  
( Annie Chang / Supervisor )

**APPROVED BY :** Ken Liu , **DATE:** Oct. 18, 2012  
( Ken Liu / Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249) |                                                                                                                                                                    |        |                                                                                  |
|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------------------------------------------------------------------|
| STANDARD PARAGRAPH                                        | TEST TYPE                                                                                                                                                          | RESULT | REMARK                                                                           |
| 15.207                                                    | Conducted Emission Test                                                                                                                                            | PASS   | Meet the requirement of limit. Minimum passing margin is -11.91dB at 0.50156MHz. |
| 15.209<br>15.249<br>15.249 (d)                            | Radiated Emission Test<br>Band Edge Measurement<br>Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209 | PASS   | Meet the requirement of limit. Minimum passing margin is -8.4dB at 2390.00MHz.   |

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Measurement         | Frequency      | Uncertainty |
|---------------------|----------------|-------------|
| Conducted emissions | 150kHz ~ 30MHz | 2.41 dB     |
| Radiated emissions  | 30MHz ~ 1GHz   | 3.78 dB     |
|                     | Above 1GHz     | 3.36 dB     |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                            |                               |
|----------------------------|-------------------------------|
| <b>EUT</b>                 | Targus Wireless USB Receiver  |
| <b>MODEL NO.</b>           | AMW066R                       |
| <b>POWER SUPPLY</b>        | 5.0Vdc from host equipment    |
| <b>MODULATION TYPE</b>     | GFSK                          |
| <b>OPERATING FREQUENCY</b> | 2402MHz ~ 2479MHz             |
| <b>NUMBER OF CHANNEL</b>   | 78                            |
| <b>ANTENNA TYPE</b>        | Chip antenna with 2.0dBi gain |
| <b>DATA CABLE</b>          | Shielded USB cable (0.1m)     |
| <b>I/O PORT</b>            | USB port                      |
| <b>ACCESSORY DEVICES</b>   | N/A                           |

**NOTE:**

1. The EUT is a Targus Wireless USB Receiver.
2. The battery of Targus Wireless Mouse with Presenter (Brand: Targus, Model: AMW066, FCC ID: OXM000044) can be charged by EUT. The USB function on EUT is for battery charging only, no data transmitting and/or receiving function involved.
3. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

## 3.2 DESCRIPTION OF TEST MODES

78 channels are provided to this EUT:

| CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0       | 2402           | 20      | 2422           | 40      | 2442           | 60      | 2462           |
| 1       | 2403           | 21      | 2423           | 41      | 2443           | 61      | 2463           |
| 2       | 2404           | 22      | 2424           | 42      | 2444           | 62      | 2464           |
| 3       | 2405           | 23      | 2425           | 43      | 2445           | 63      | 2465           |
| 4       | 2406           | 24      | 2426           | 44      | 2446           | 64      | 2466           |
| 5       | 2407           | 25      | 2427           | 45      | 2447           | 65      | 2467           |
| 6       | 2408           | 26      | 2428           | 46      | 2448           | 66      | 2468           |
| 7       | 2409           | 27      | 2429           | 47      | 2449           | 67      | 2469           |
| 8       | 2410           | 28      | 2430           | 48      | 2450           | 68      | 2470           |
| 9       | 2411           | 29      | 2431           | 49      | 2451           | 69      | 2471           |
| 10      | 2412           | 30      | 2432           | 50      | 2452           | 70      | 2472           |
| 11      | 2413           | 31      | 2433           | 51      | 2453           | 71      | 2473           |
| 12      | 2414           | 32      | 2434           | 52      | 2454           | 72      | 2474           |
| 13      | 2415           | 33      | 2435           | 53      | 2455           | 73      | 2475           |
| 14      | 2416           | 34      | 2436           | 54      | 2456           | 74      | 2476           |
| 15      | 2417           | 35      | 2437           | 55      | 2457           | 75      | 2477           |
| 16      | 2418           | 36      | 2438           | 56      | 2458           | 76      | 2478           |
| 17      | 2419           | 37      | 2439           | 57      | 2459           | 77      | 2479           |
| 18      | 2420           | 38      | 2440           | 58      | 2460           |         |                |
| 19      | 2421           | 39      | 2441           | 59      | 2461           |         |                |

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO |       |       |    | DESCRIPTION |
|--------------------|---------------|-------|-------|----|-------------|
|                    | PLC           | RE≥1G | RE<1G | BM |             |
| A                  | √             | √     | √     | √  | Operating   |
| B                  | √             | -     | √     | -  | Charging    |

Where **PLC**: Power Line Conducted Emission

**RE≥1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**BM**: Bandedge Measurement

**NOTE**: “-” means no effect.

#### POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|-------------------|----------------|-----------------|
| A                  | 0 to 77           | 0              | GFSK            |
| B                  | -                 | -              | -               |

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|-------------------|----------------|-----------------|
| A                  | 0 to 77           | 0, 37, 77      | GFSK            |

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|-------------------|----------------|-----------------|
| A                  | 0 to 77           | 0              | GFSK            |
| B                  | -                 | -              | -               |



### **BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|-------------------|----------------|-----------------|
| A                  | 0 to 77           | 0, 77          | GFSK            |

### **TEST CONDITION:**

| APPLICABLE TO | EUT CONFIGURE MODE | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY |
|---------------|--------------------|--------------------------|----------------------|-----------|
| PLC           | A                  | 26deg. C, 80% RH         | 120Vac, 60Hz         | Chad Lee  |
|               | B                  | 25deg. C, 75% RH         | 120Vac, 60Hz         | Chad Lee  |
| RE<1G         | A                  | 25deg. C, 75% RH         | 120Vac, 60Hz         | Chad Lee  |
|               | B                  | 26deg. C, 79% RH         | 120Vac, 60Hz         | Chad Lee  |
| RE≥1G         | A                  | 25deg. C, 75% RH         | 120Vac, 60Hz         | Chad Lee  |
| BM            | A                  | 25deg. C, 75% RH         | 120Vac, 60Hz         | Chad Lee  |

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| NO. | PRODUCT                              | BRAND  | MODEL NO. | SERIAL NO. | FCC ID           |
|-----|--------------------------------------|--------|-----------|------------|------------------|
| 1   | NOTEBOOK COMPUTER                    | DELL   | PP27L     | 8SNZ12S    | FCC DoC Approved |
| 2   | Targus Wireless Mouse with Presenter | Targus | AMW066    | N/A        | OXM000044        |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | N/A                                                 |
| 2   | N/A                                                 |


**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).  
2. The support unit 2 was provided by client.

### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

For Mode A:

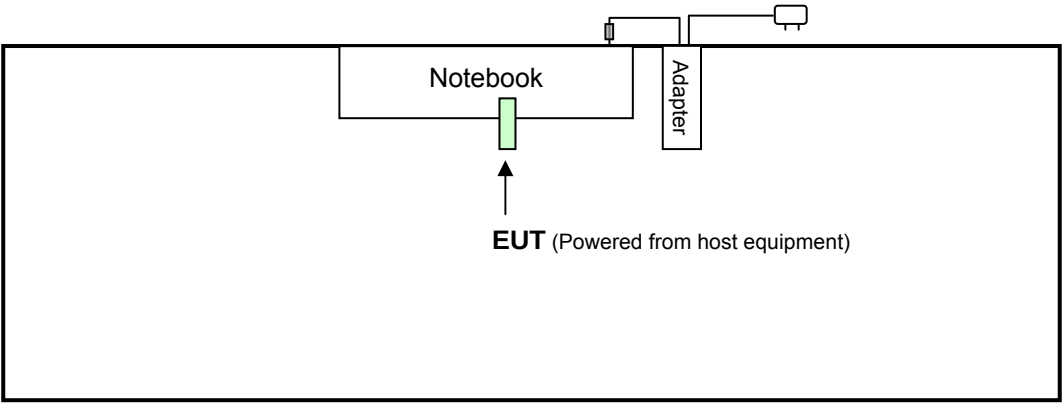

For Mode B:

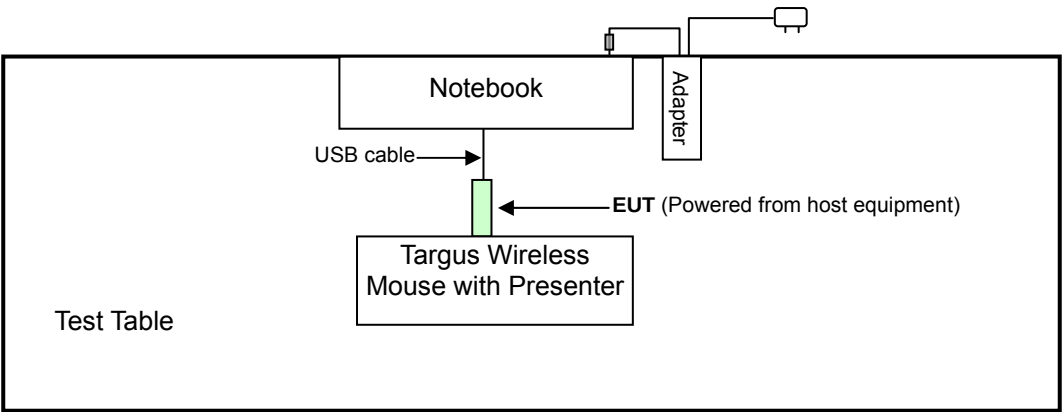

### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (Section 15.249)**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The product has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 ~ 0.5                  | 66 to 56                     | 56 to 46 |
| 0.5 ~ 5                     | 56                           | 46       |
| 5 ~ 30                      | 60                           | 50       |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                                 | MODEL NO.       | SERIAL NO.   | CALIBRATED DATE | CALIBRATED UNTIL |
|------------------------------------------------------------|-----------------|--------------|-----------------|------------------|
| ROHDE & SCHWARZ Test Receiver                              | ESCS 30         | 100276       | Jan. 04, 2012   | Jan. 03, 2013    |
| ROHDE & SCHWARZ Artificial Mains Network (for EUT)         | ESH3-Z5         | 100219       | Nov. 24, 2011   | Nov. 23, 2012    |
| LISN With Adapter (for EUT)                                | AD10            | C10Ada-001   | Nov. 24, 2011   | Nov. 23, 2012    |
| ROHDE & SCHWARZ Artificial Mains Network (for peripherals) | ESH3-Z5         | 100218       | Dec. 08, 2011   | Dec. 07, 2012    |
| Software                                                   | ADT_Cond_V7.3.7 | NA           | NA              | NA               |
| Software                                                   | ADT_ISN_V7.3.7  | NA           | NA              | NA               |
| RF cable (JYEBAO)                                          | 5D-FB           | Cable-C10.01 | Feb. 20, 2012   | Feb. 19, 2013    |
| SUHNER Terminator (For ROHDE & SCHWARZ LISN)               | 65BNC-5001      | E1-010773    | Feb. 22, 2012   | Feb. 21, 2013    |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 10.
  3. The VCCI Site Registration No. C-1852.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

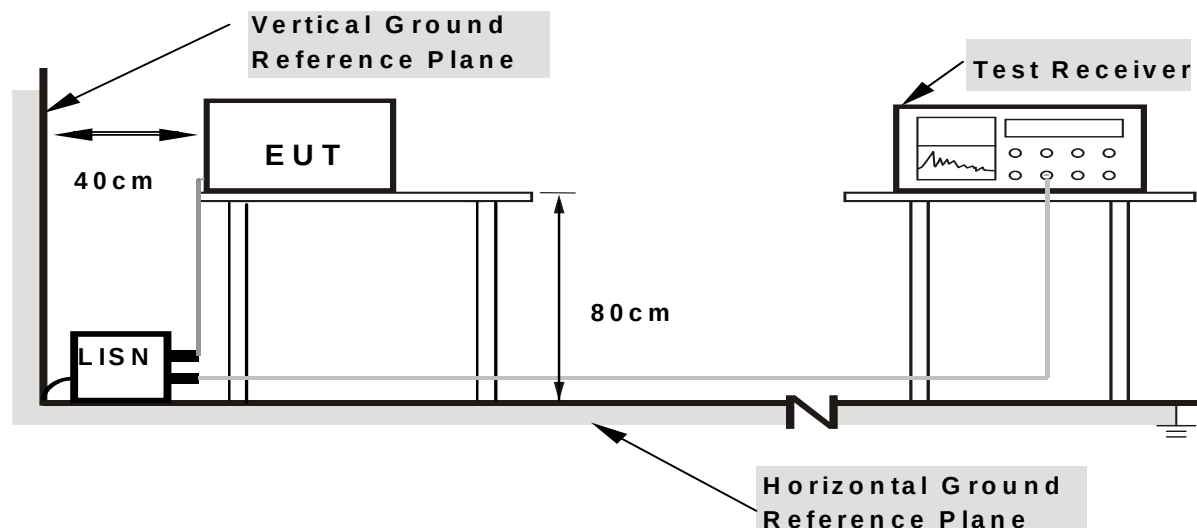

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

##### For Mode A:

Set the EUT under transmission condition continuously at specific channel frequency.

##### For Mode B:

Connected the Targus Wireless Mouse with Presenter to Notebook via EUT with an USB cable, and set the Targus Wireless Mouse with Presenter under charging condition.


## 4.1.7 TEST RESULTS

|               |      |         |           |
|---------------|------|---------|-----------|
| 6dB BANDWIDTH | 9kHz | PHASE   | Line 1    |
| TEST MODE     | A    | CHANNEL | Channel 0 |

| No | Freq.    | Corr.  | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    | [MHz]    | Factor | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |          | (dB)   | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.50156  | 0.20   | 43.89         | -   | 44.09          | -   | 56.00     | 46.00 | -11.91 | -   |
| 2  | 0.62200  | 0.20   | 43.23         | -   | 43.43          | -   | 56.00     | 46.00 | -12.57 | -   |
| 3  | 0.87288  | 0.22   | 39.87         | -   | 40.09          | -   | 56.00     | 46.00 | -15.91 | -   |
| 4  | 1.60929  | 0.27   | 34.20         | -   | 34.47          | -   | 56.00     | 46.00 | -21.53 | -   |
| 5  | 18.26300 | 1.18   | 31.21         | -   | 32.39          | -   | 60.00     | 50.00 | -27.61 | -   |
| 6  | 18.26447 | 1.18   | 31.21         | -   | 32.39          | -   | 60.00     | 50.00 | -27.61 | -   |

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

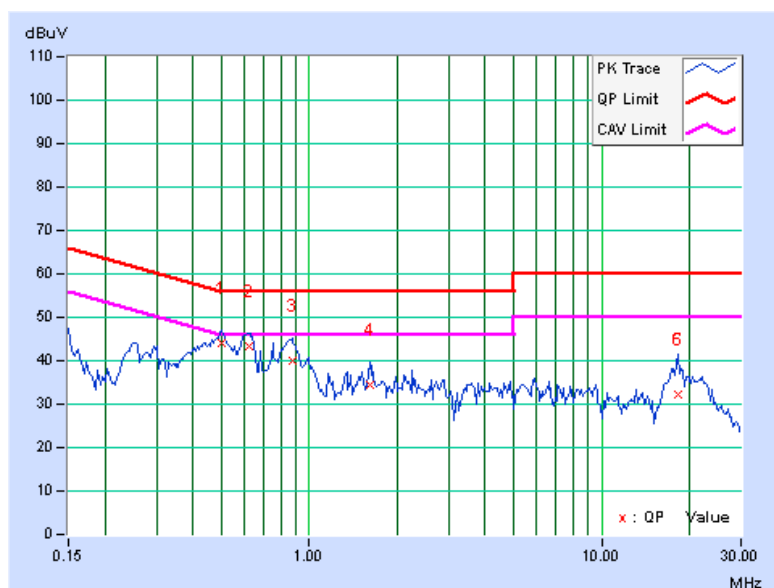




|               |      |         |           |
|---------------|------|---------|-----------|
| 6dB BANDWIDTH | 9kHz | PHASE   | Line 2    |
| TEST MODE     | A    | CHANNEL | Channel 0 |

| No | Freq.    | Corr. Factor | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------|--------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    | [MHz]    |              | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |          | (dB)         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.29476  | 0.17         | 41.22         | -   | 41.39          | -   | 60.39     | 50.39 | -19.00 | -   |
| 2  | 0.50545  | 0.20         | 42.09         | -   | 42.29          | -   | 56.00     | 46.00 | -13.71 | -   |
| 3  | 0.75379  | 0.21         | 39.23         | -   | 39.44          | -   | 56.00     | 46.00 | -16.56 | -   |
| 4  | 1.49210  | 0.25         | 35.47         | -   | 35.72          | -   | 56.00     | 46.00 | -20.28 | -   |
| 5  | 1.62491  | 0.26         | 34.13         | -   | 34.39          | -   | 56.00     | 46.00 | -21.61 | -   |
| 6  | 18.15234 | 0.88         | 28.31         | -   | 29.19          | -   | 60.00     | 50.00 | -30.81 | -   |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

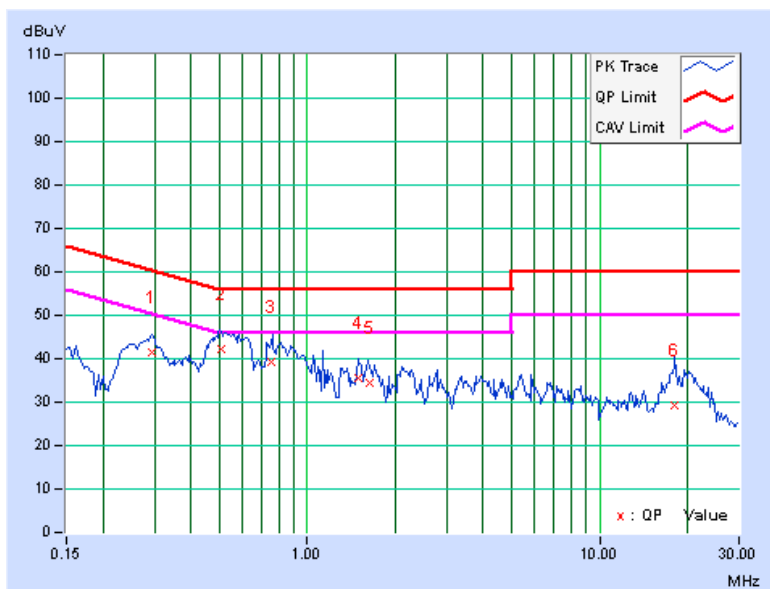


|               |      |       |        |
|---------------|------|-------|--------|
| 6dB BANDWIDTH | 9kHz | PHASE | Line 1 |
| TEST MODE     | B    |       |        |

| No | Freq.    | Corr. Factor | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------|--------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    | [MHz]    |              | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |          | (dB)         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.38828  | 0.19         | 41.76         | -   | 41.95          | -   | 58.10     | 48.10 | -16.15 | -   |
| 2  | 0.51082  | 0.20         | 43.06         | -   | 43.26          | -   | 56.00     | 46.00 | -12.74 | -   |
| 3  | 0.63956  | 0.21         | 42.18         | -   | 42.39          | -   | 56.00     | 46.00 | -13.61 | -   |
| 4  | 0.74573  | 0.21         | 39.06         | -   | 39.27          | -   | 56.00     | 46.00 | -16.73 | -   |
| 5  | 0.91961  | 0.22         | 37.90         | -   | 38.12          | -   | 56.00     | 46.00 | -17.88 | -   |
| 6  | 18.07489 | 1.17         | 29.91         | -   | 31.08          | -   | 60.00     | 50.00 | -28.92 | -   |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

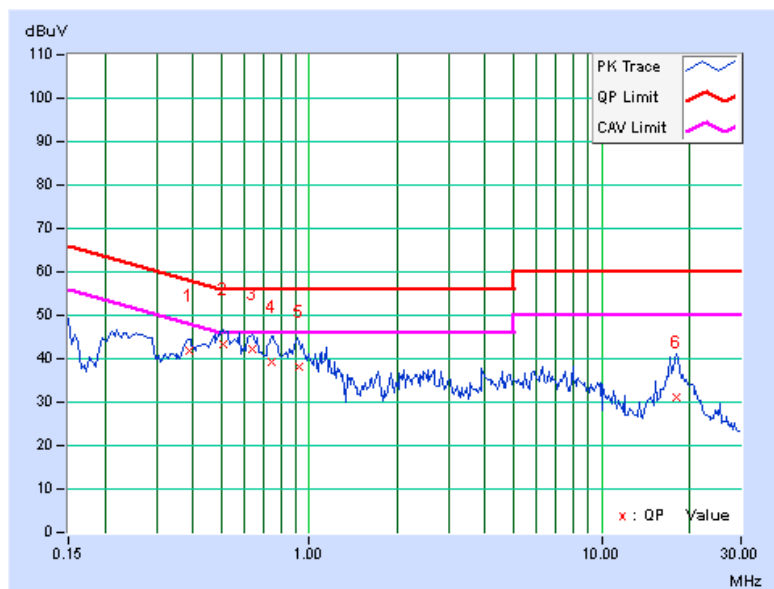


|               |      |       |        |
|---------------|------|-------|--------|
| 6dB BANDWIDTH | 9kHz | PHASE | Line 2 |
| TEST MODE     | B    |       |        |

| No | Freq.    | Corr. Factor | Reading Value |     | Emission Level |     | Limit     |       | Margin |     |
|----|----------|--------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
|    | [MHz]    |              | [dB (uV)]     |     | [dB (uV)]      |     | [dB (uV)] |       | (dB)   |     |
|    |          | (dB)         | Q.P.          | AV. | Q.P.           | AV. | Q.P.      | AV.   | Q.P.   | AV. |
| 1  | 0.50547  | 0.20         | 41.36         | -   | 41.56          | -   | 56.00     | 46.00 | -14.44 | -   |
| 2  | 0.57578  | 0.20         | 42.91         | -   | 43.11          | -   | 56.00     | 46.00 | -12.89 | -   |
| 3  | 0.75156  | 0.21         | 38.54         | -   | 38.75          | -   | 56.00     | 46.00 | -17.25 | -   |
| 4  | 0.88047  | 0.22         | 35.62         | -   | 35.84          | -   | 56.00     | 46.00 | -20.16 | -   |
| 5  | 5.90625  | 0.46         | 28.11         | -   | 28.57          | -   | 60.00     | 50.00 | -31.43 | -   |
| 6  | 19.81250 | 0.92         | 28.56         | -   | 29.48          | -   | 60.00     | 50.00 | -30.52 | -   |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

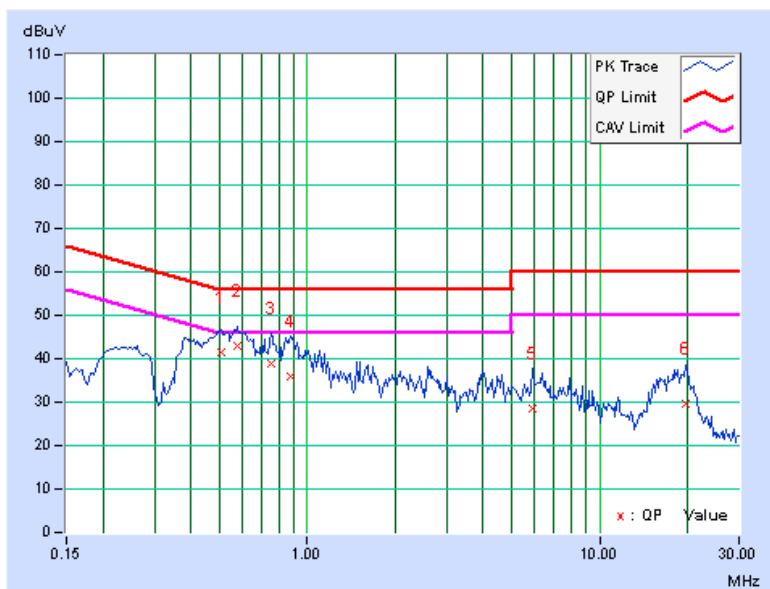

## 4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

| Fundamental Frequency | Field Strength of Fundamental (millivolts/meter) | Field Strength of Harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902 ~ 928 MHz         | 50                                               | 500                                            |
| 2400 ~ 2483.5 MHz     | 50                                               | 500                                            |
| 5725 ~ 5875 MHz       | 50                                               | 500                                            |
| 24 ~ 24.25 GHz        | 250                                              | 2500                                           |

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | $2400/F(\text{kHz})$              | 300                           |
| 0.490 ~ 1.705     | $24000/F(\text{kHz})$             | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                   | MODEL NO.                    | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------------------------|------------------------------|------------|-----------------|------------------|
| HP Preamplifier                              | 8447D                        | 2432A03504 | Feb. 29, 2012   | Feb. 28, 2013    |
| HP Preamplifier                              | 8449B                        | 3008A01201 | Feb. 29, 2012   | Feb. 28, 2013    |
| Agilent Spectrum Analyzer                    | E4446A                       | MY46180403 | Jun. 13, 2012   | Jun. 12, 2013    |
| ROHDE & SCHWARZ Test Receiver                | ESCS 30                      | 838251/021 | Oct. 14, 2011   | Oct. 13, 2012    |
| Schwarzbeck Antenna                          | VULB 9168                    | 137        | Apr. 03, 2012   | Apr. 02, 2013    |
| Schwarzbeck Antenna                          | VHBA 9123                    | 480        | May 22, 2012    | May 21, 2013     |
| ADT. Turn Table                              | TT100                        | 0306       | NA              | NA               |
| ADT. Tower                                   | AT100                        | 0306       | NA              | NA               |
| Software                                     | ADT_Radiated_V<br>7.6.15.9.2 | NA         | NA              | NA               |
| SUHNER RF cable                              | SF102                        | CABLE-CH6  | Aug. 19, 2012   | Aug. 18, 2013    |
| Schwarzbeck Horn Antenna                     | BBHA 9120-D1                 | D130       | May 18, 2012    | May 17, 2013     |
| Highpass filter<br>Wainwright<br>Instruments | WHK<br>3.1/18G-10SS          | SN 8       | NA              | NA               |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

## 4.2.5 TEST SETUP

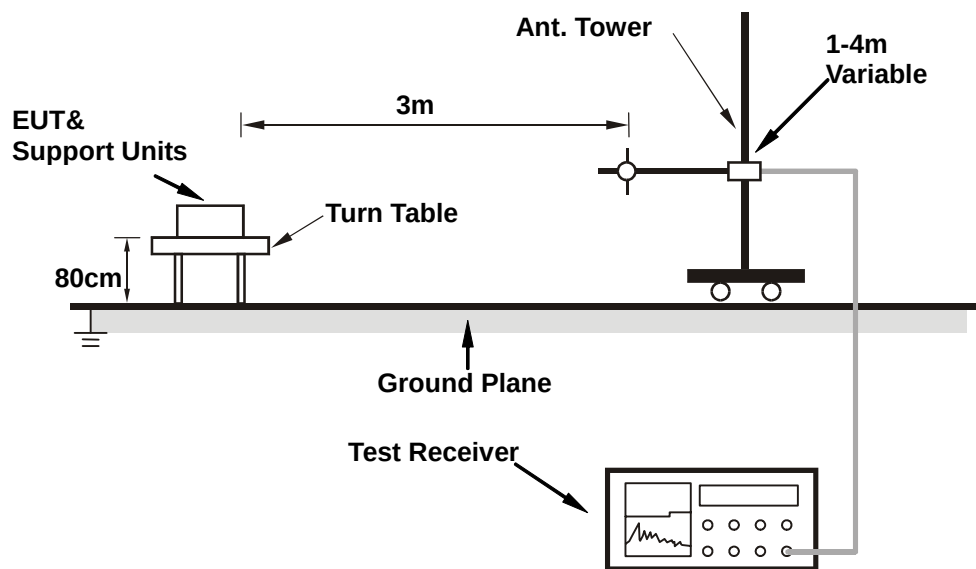

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

## 4.2.7 TEST RESULTS

### ABOVE 1GHz DATA

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |
| TEST MODE       | A            |                      |              |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                               |                   |             |                       |                            |                     |                                |
|-----------------------------------------------------|-------------|-------------------------------|-------------------|-------------|-----------------------|----------------------------|---------------------|--------------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00     | 55.8 PK                       | 74.0              | -18.2       | 1.05 H                | 291                        | 25.58               | 30.24                          |
| 2                                                   | 2390.00     | 45.6 AV                       | 54.0              | -8.4        | 1.05 H                | 291                        | 15.36               | 30.24                          |
| 3                                                   | 2400.00     | 52.6 PK                       | 74.0              | -21.5       | 1.05 H                | 291                        | 22.26               | 30.29                          |
| 4                                                   | 2400.00     | 19.5 AV                       | 54.0              | -34.6       | 1.05 H                | 291                        | -10.84              | 30.29                          |
| 5                                                   | *2402.00    | 92.8 PK                       | 114.0             | -21.3       | 1.05 H                | 291                        | 62.45               | 30.30                          |
| 6                                                   | *2402.00    | 59.7 AV                       | 94.0              | -34.4       | 1.05 H                | 291                        | 29.35               | 30.30                          |
| 7                                                   | 4804.00     | 44.5 PK                       | 74.0              | -29.5       | 1.00 H                | 6                          | 7.95                | 36.59                          |
| 8                                                   | 4804.00     | 11.4 AV                       | 54.0              | -42.6       | 1.00 H                | 6                          | -25.15              | 36.59                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                               |                   |             |                       |                            |                     |                                |
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 2390.00     | 54.3 PK                       | 74.0              | -19.7       | 1.00 V                | 239                        | 24.09               | 30.24                          |
| 2                                                   | 2390.00     | 44.4 AV                       | 54.0              | -9.6        | 1.00 V                | 239                        | 14.14               | 30.24                          |
| 3                                                   | 2400.00     | 52.4 PK                       | 74.0              | -21.6       | 1.00 V                | 239                        | 22.14               | 30.29                          |
| 4                                                   | 2400.00     | 19.3 AV                       | 54.0              | -34.7       | 1.00 V                | 239                        | -10.96              | 30.29                          |
| 5                                                   | *2402.00    | 92.6 PK                       | 114.0             | -21.4       | 1.00 V                | 239                        | 62.33               | 30.30                          |
| 6                                                   | *2402.00    | 59.5 AV                       | 94.0              | -34.5       | 1.00 V                | 239                        | 29.23               | 30.30                          |
| 7                                                   | 4804.00     | 51.1 PK                       | 74.0              | -22.9       | 1.00 V                | 332                        | 14.47               | 36.59                          |
| 8                                                   | 4804.00     | 18.0 AV                       | 54.0              | -36.0       | 1.00 V                | 332                        | -18.63              | 36.59                          |

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* ” : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  

$$20 \log (\text{Duty cycle}) = 20 \log (0.16 \text{ ms} / 7.2 \text{ ms}) = -33.1 \text{ dB}$$
Please see page 27 for plotted duty.



|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 37 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |
| TEST MODE       | A             |                      |              |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                               |                   |             |                       |                            |                     |                                |
|-----------------------------------------------------|-------------|-------------------------------|-------------------|-------------|-----------------------|----------------------------|---------------------|--------------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2439.00    | 91.7 PK                       | 114.0             | -22.3       | 1.00 H                | 292                        | 61.28               | 30.42                          |
| 2                                                   | *2439.00    | 58.6 AV                       | 94.0              | -35.4       | 1.00 H                | 292                        | 28.18               | 30.42                          |
| 3                                                   | 4878.00     | 46.6 PK                       | 74.0              | -27.4       | 1.00 H                | 16                         | 9.83                | 36.78                          |
| 4                                                   | 4878.00     | 13.5 AV                       | 54.0              | -40.5       | 1.00 H                | 16                         | -23.27              | 36.78                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                               |                   |             |                       |                            |                     |                                |
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2439.00    | 91.7 PK                       | 114.0             | -22.3       | 1.00 V                | 210                        | 61.24               | 30.42                          |
| 2                                                   | *2439.00    | 58.6 AV                       | 94.0              | -35.4       | 1.00 V                | 210                        | 28.14               | 30.42                          |
| 3                                                   | 4878.00     | 52.0 PK                       | 74.0              | -22.1       | 1.00 V                | 243                        | 15.17               | 36.78                          |
| 4                                                   | 4878.00     | 18.9 AV                       | 54.0              | -35.2       | 1.00 V                | 243                        | -17.93              | 36.78                          |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  

$$20 \log (\text{Duty cycle}) = 20 \log (0.16 \text{ ms} / 7.2 \text{ ms}) = -33.1 \text{ dB}$$
Please see page 27 for plotted duty.


|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 77 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |
| TEST MODE       | A             |                      |              |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                               |                   |             |                       |                            |                     |                                |
|-----------------------------------------------------|-------------|-------------------------------|-------------------|-------------|-----------------------|----------------------------|---------------------|--------------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2479.00    | 92.9 PK                       | 114.0             | -21.1       | 1.00 H                | 295                        | 62.33               | 30.56                          |
| 2                                                   | *2479.00    | 59.8 AV                       | 94.0              | -34.2       | 1.00 H                | 295                        | 29.23               | 30.56                          |
| 3                                                   | 2483.50     | 46.1 PK                       | 74.0              | -27.9       | 1.00 H                | 295                        | 15.52               | 30.57                          |
| 4                                                   | 2483.50     | 13.0 AV                       | 54.0              | -41.0       | 1.00 H                | 295                        | -17.58              | 30.57                          |
| 5                                                   | 4958.00     | 45.0 PK                       | 74.0              | -29.0       | 1.00 H                | 5                          | 8.04                | 36.98                          |
| 6                                                   | 4958.00     | 11.9 AV                       | 54.0              | -42.1       | 1.00 H                | 5                          | -25.06              | 36.98                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                               |                   |             |                       |                            |                     |                                |
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | *2479.00    | 92.5 PK                       | 114.0             | -21.6       | 1.00 V                | 262                        | 61.89               | 30.56                          |
| 2                                                   | *2479.00    | 59.4 AV                       | 94.0              | -34.7       | 1.00 V                | 262                        | 28.79               | 30.56                          |
| 3                                                   | 2483.50     | 45.7 PK                       | 74.0              | -28.4       | 1.00 V                | 253                        | 15.08               | 30.57                          |
| 4                                                   | 2483.50     | 12.6 AV                       | 54.0              | -41.5       | 1.00 V                | 253                        | -18.02              | 30.57                          |
| 5                                                   | 4958.00     | 52.0 PK                       | 74.0              | -22.0       | 1.00 V                | 253                        | 14.99               | 36.98                          |
| 6                                                   | 4958.00     | 18.9 AV                       | 54.0              | -35.1       | 1.00 V                | 253                        | -18.11              | 36.98                          |

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:  

$$20 \log (\text{Duty cycle}) = 20 \log (0.16 \text{ ms} / 7.2 \text{ ms}) = -33.1 \text{ dB}$$
Please see page 27 for plotted duty.

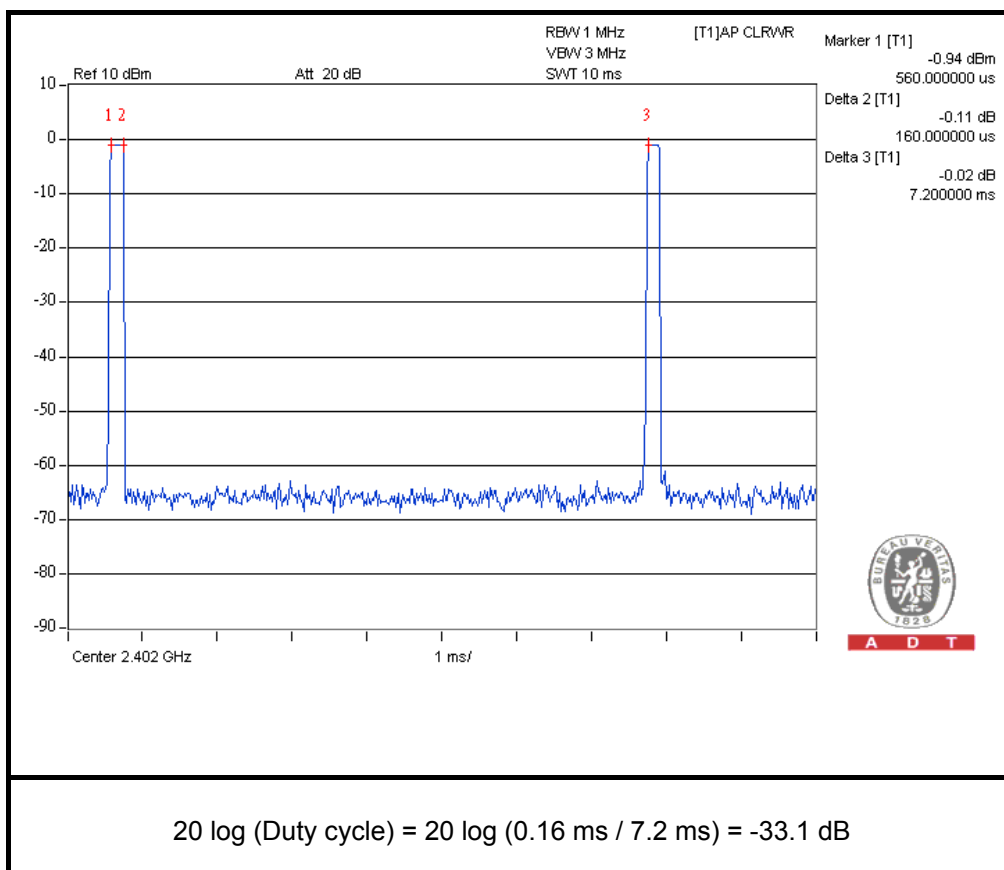

# BELOW 1GHz WORST-CASE DATA

|                 |               |                      |            |
|-----------------|---------------|----------------------|------------|
| CHANNEL         | TX Channel 0  | DETECTOR<br>FUNCTION | Quasi-Peak |
| FREQUENCY RANGE | Below 1000MHz |                      |            |
| TEST MODE       | A             |                      |            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                               |                   |             |                       |                            |                     |                                |
|-----------------------------------------------------|-------------|-------------------------------|-------------------|-------------|-----------------------|----------------------------|---------------------|--------------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 806.00      | 26.5 QP                       | 46.0              | -19.5       | 1.23 H                | 99                         | -0.06               | 26.60                          |
| 2                                                   | 815.70      | 27.5 QP                       | 46.0              | -18.5       | 1.59 H                | 101                        | 0.71                | 26.75                          |
| 3                                                   | 839.95      | 30.1 QP                       | 46.0              | -15.9       | 1.84 H                | 258                        | 2.96                | 27.13                          |
| 4                                                   | 888.45      | 32.4 QP                       | 46.0              | -13.6       | 1.36 H                | 95                         | 4.61                | 27.79                          |
| 5                                                   | 935.33      | 31.7 QP                       | 46.0              | -14.3       | 1.11 H                | 285                        | 3.45                | 28.27                          |
| 6                                                   | 959.58      | 30.9 QP                       | 46.0              | -15.1       | 1.00 H                | 106                        | 2.39                | 28.51                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                               |                   |             |                       |                            |                     |                                |
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 772.05      | 26.4 QP                       | 46.0              | -19.6       | 1.15 V                | 9                          | 0.44                | 25.93                          |
| 2                                                   | 780.13      | 26.5 QP                       | 46.0              | -19.5       | 1.63 V                | 91                         | 0.41                | 26.10                          |
| 3                                                   | 822.17      | 27.3 QP                       | 46.0              | -18.7       | 1.84 V                | 188                        | 0.49                | 26.85                          |
| 4                                                   | 846.42      | 27.0 QP                       | 46.0              | -19.0       | 1.36 V                | 325                        | -0.24               | 27.23                          |
| 5                                                   | 888.45      | 28.1 QP                       | 46.0              | -17.9       | 1.25 V                | 161                        | 0.28                | 27.79                          |
| 6                                                   | 914.32      | 27.5 QP                       | 46.0              | -18.5       | 1.30 V                | 323                        | -0.57               | 28.07                          |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

|                 |               |                      |            |
|-----------------|---------------|----------------------|------------|
| FREQUENCY RANGE | Below 1000MHz | DETECTOR<br>FUNCTION | Quasi-Peak |
| TEST MODE       | B             |                      |            |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |             |                               |                   |             |                       |                            |                     |                                |
|-----------------------------------------------------|-------------|-------------------------------|-------------------|-------------|-----------------------|----------------------------|---------------------|--------------------------------|
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 75.27       | 22.4 QP                       | 40.0              | -17.6       | 1.07 H                | 195                        | 11.41               | 11.00                          |
| 2                                                   | 135.08      | 29.9 QP                       | 43.5              | -13.6       | 1.02 H                | 321                        | 16.52               | 13.39                          |
| 3                                                   | 219.15      | 28.3 QP                       | 46.0              | -17.7       | 1.08 H                | 200                        | 16.28               | 12.03                          |
| 4                                                   | 259.57      | 30.3 QP                       | 46.0              | -15.7       | 1.00 H                | 234                        | 16.39               | 13.87                          |
| 5                                                   | 348.48      | 28.9 QP                       | 46.0              | -17.1       | 1.50 H                | 10                         | 11.94               | 16.98                          |
| 6                                                   | 416.38      | 31.5 QP                       | 46.0              | -14.5       | 1.03 H                | 1                          | 12.76               | 18.73                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |             |                               |                   |             |                       |                            |                     |                                |
| NO.                                                 | FREQ. (MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN (dB) | ANTENNA<br>HEIGHT (m) | TABLE<br>ANGLE<br>(Degree) | RAW VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1                                                   | 47.78       | 29.6 QP                       | 40.0              | -10.4       | 1.11 V                | 101                        | 15.46               | 14.11                          |
| 2                                                   | 75.27       | 27.6 QP                       | 40.0              | -12.4       | 1.07 V                | 226                        | 16.58               | 11.00                          |
| 3                                                   | 418.00      | 30.6 QP                       | 46.0              | -15.4       | 1.24 V                | 263                        | 11.85               | 18.78                          |
| 4                                                   | 796.30      | 28.9 QP                       | 46.0              | -17.1       | 1.25 V                | 265                        | 2.50                | 26.43                          |
| 5                                                   | 906.23      | 28.4 QP                       | 46.0              | -17.7       | 1.12 V                | 183                        | 0.35                | 28.00                          |
| 6                                                   | 959.58      | 28.3 QP                       | 46.0              | -17.7       | 1.24 V                | 10                         | -0.25               | 28.51                          |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## **7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

---END---