

Amber Helm Development L.C.

92723 Michigan Hwy-152

Sister Lakes, Michigan 49047 USA

Contact: joeb@ahde.com, +1 (734) 252-9505

PRPLZ-WR2523RFr2

Issued: June 9, 2025

EMC Test Report

regarding

USA: CFR Title 47, Part 15.247/15.109 (Emissions)

Canada: IC RSS-247v3/GENe (Emissions)

for



PrecoLink

Category: Wireless Bridge

Judgments:

Aligns with FCC 15.247, ISED RSS-247v3

Testing Completed: June 6, 2025



Prepared for:


Sensata / Preco Electronics

10335 W Emerald St, Boise Idaho 83704

Phone: +1 (208) 323-7132, Fax:

Contact: Quincy Holton, qholton@sensata.com

Data Rec./Rev. by:

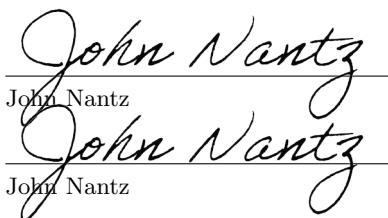
John Nantz

Rpt. Prep./Rev. by:


John Nantz

Rpt. Auth. by:


Dr. Joseph Brunett, EMC-002790-NE

Date of Issue:

June 9, 2025

Revision History

Rev. No.	Date	Details	Revised By
r0	June 9, 2025	Initial Release.	J. Nantz
r1	June 27, 2025	Minor Corrections.	J. Nantz
r2	June 30, 2025	Corrected EIRP/TXSPUR tables.	J. Nantz

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	4
1.1 Laboratory Authorization	4
1.2 Report Retention	4
1.3 Subcontracted Testing	4
1.4 Test Data	4
1.5 Limitation of Results	4
1.6 Copyright	4
1.7 Endorsements	4
1.8 Test Location	5
1.9 Traceability and Equipment Used	5
2 Test Specifications and Procedures	6
2.1 Test Specification and General Procedures	6
3 Configuration and Identification of the Equipment Under Test	7
3.1 Description and Declarations	7
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	8
3.1.5 Functional Exerciser	8
3.1.6 Modifications Made	8
3.1.7 Production Intent	8
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Power Supply Variation	12
4.2 Intentional Emissions	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation	13
4.2.2 Fundamental Emission Bandwidth	14
4.2.3 Effective Isotropic Radiated Power	18
4.2.4 Power Spectral Density	22
4.3 Unintentional Emissions	26
4.3.1 Restricted Band Transmit Chain Spurious Emissions	26
4.3.2 OOB Transmit Chain Spurious Emissions	28
4.3.3 Radiated Digital and Cabinet Spurious	29

5 Measurement Uncertainty and Accreditation Documents	30
---	----

List of Tables

1.8.0 Test Site List.	5
1.9.0 Equipment List.	5
3.1.0 EUT Declarations.	7
4.2.1 Pulsed Emission Characteristics (Duty Cycle).	13
4.2.2 Intentional Emission Bandwidth.	14
4.2.3 Tx. Power Results.	18
4.2.4 Power Spectral Density Results.	22
4.3.1 (i) Transmit Chain Spurious Emissions.	26
4.3.1 (ii) Transmit Chain Spurious Emissions.	27
4.3.1 (iii) Transmit Chain Spurious Emissions.	27
5.0.0 Measurement Uncertainty.	30

List of Figures

3.1.0 Photos of EUT.	7
3.1.1 EUT Test Configuration Diagram.	8
4.1.1 Radiated Emissions Diagram of the EUT.	10
4.1.1 Radiated Emissions Test Setup Photograph(s).	11
4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).	13
4.2.2 (i) Example Intentional Emission Bandwidth Plots.	15
4.2.2 (ii) Example Intentional Emission Bandwidth Plots.	16
4.2.2 (iii) Example Intentional Emission Bandwidth Plots.	17
4.2.3 (i) Conducted Power Measurement Plots.	19
4.2.3 (ii) Conducted Power Measurement Plots.	20
4.2.3 (iii) Conducted Power Measurement Plots.	21
4.2.4 (i) Power Spectral Density Plots.	23
4.2.4 (ii) Power Spectral Density Plots.	24
4.2.4 (iii) Power Spectral Density Plots.	25
4.3.2 Worst Case Transmitter OOB Emissions Measured.	28
5.0.0 Accreditation Documents	30

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until June 2035.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1.8.0 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1.8.0 Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSD

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 1.9.0. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards. All equipment is evaluated on a cycle no greater than 12 months following laboratory validation procedures and is calibrated following manufacturer recommended intervals.

Table 1.9.0 Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
EMI Receiver	R & S / ESW26	101313	RSESW2601	RS / Apr-2026
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2025
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2025
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / Sept-2025
3.5-3.5MM Coax	Coax / Coax	001	CAB018-WHT	AHD / Sept-2025
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2025
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / On Use
6dB Attenuator	Pasternack / PE7087-6	1	ATTEN01	AHD / On-Use

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Sensata / Preco Electronics is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Sensata / Preco Electronics PrecoLink for compliance to:

Country/Region/Manu.	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247/15.109
Canada	ISED Canada	IC RSS-247v3/GENE

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	”Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”
ANSI C63.10:2020	”American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
KDB 558074 D01 v05r02	”GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES ”
KDB 662911 D01v02r01	”Emissions Testing of Transmitters with Multiple Outputs in the Same Band”
KDB 662911 D02 v01	”MIMO with Cross-Polarized Antenna”
WR-ITP0102RA	”AHD Internal Document - Radiated Emissions Test Method”
WR-ITP0101LC	”AHD Internal Document - Conducted Emissions Test Method”
ICES-003; Issue 7 (2020)	”Information Technology Equipment (ITE) - Limits and methods of measurement”

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is an aftermarket Vehicular Wireless Bridge containing a Zigbee transceiver. The EUT is approximately 14 x 14 x 4 cm in dimension, and is depicted in Figure 3.1.0. It is powered by 13.5 VDC Vehicle Power System. In use, the EUT transfers CAN bus information wirelessly from one end of a vehicle to the other. Table 3.1.0 outlines provider declared EUT specifications.



Figure 3.1.0 Photos of EUT.

Table 3.1.0 EUT Declarations.

General Declarations

Equipment Type:	Wireless Bridge
Country of Origin:	Not Declared
Nominal Supply:	13.5 VDC
Oper. Temp Range:	-40°C to +85°C
Frequency Range:	2405 – 2475 MHz
Antenna Dimension:	Max: 12 cm x 1.5 cm x 1.5 cm
Antenna Type:	SMA Dipole and 2 x PCB trace PIFA's
Antenna Gain:	ANT1, ANT2 PIFA: 2.0 dBi, ANT3 Ext Dipole: 3.0 dBi.
Number of Channels:	15
Channel Spacing:	5 MHz
Alignment Range:	Not Declared
Type of Modulation:	O-QPSK

United States

FCC ID Number:	OXZPCLK2025
Classification:	DTS

Canada

IC Number:	20379-PCLK2025
Classification:	Other

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 3.1.1 .

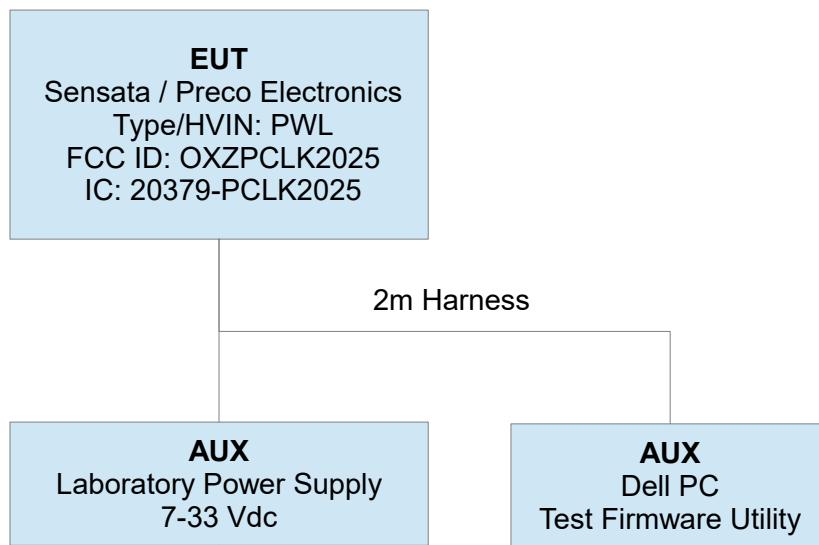


Figure 3.1.1 EUT Test Configuration Diagram.

3.1.2 Modes of Operation

The EUT operates as a IEEE 802.15.4 Zigbee DTS transceiver. The EUT radio can employ 1 of 3 antennas at a time, including two Internal PCB trace PIFA's and one external Dipole.

3.1.3 Variants

There is only a single hardware variant of the EUT.

3.1.4 Test Samples

Five samples of the EUT were provided in total: four normal operating samples (SN: 0002, 0003, 0004, and 0005), and one sample (SN: 0001) for conducted RF measurements populated with U.FL connectors for both internal antennas. The manufacturer provided software tools and firmware needed to place the EUT radio into test and normal operating modes via a CAN interface to a PC.

3.1.5 Functional Exerciser

Normal functionality was confirmed by measurement of transmitted signals.

3.1.6 Modifications Made

In order to meet band edge requirements, Channel 26 was omitted by the manufacturer, and a channel power setting table matrix is programmed for each antenna. See table 4.2.3 herein for specific settings.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

The EUT is professionally and permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003).

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 4.1.1. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

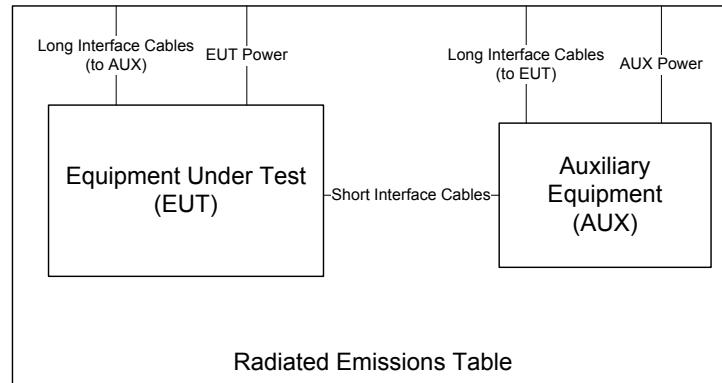


Figure 4.1.1 Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISED RSS-102.NS.MEAS are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.1.1.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

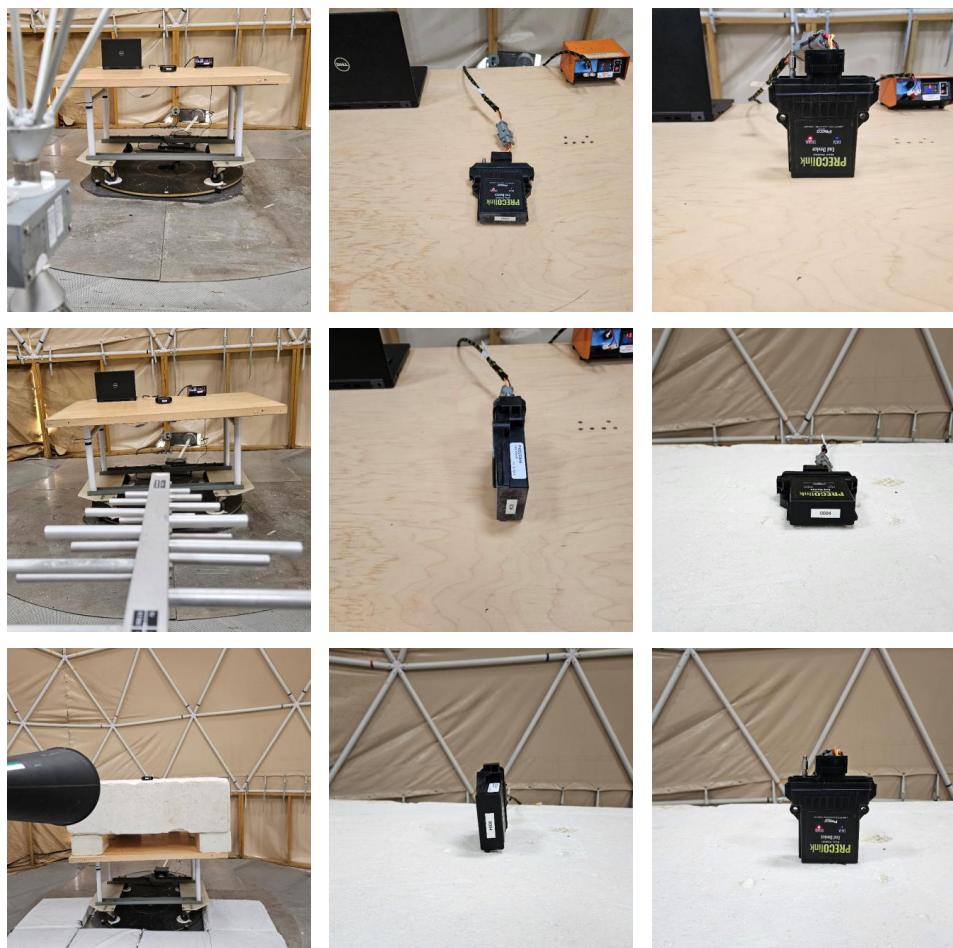


Figure 4.1.1 Radiated Emissions Test Setup Photograph(s).

4.1.2 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than $\pm 10\%$ of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.2 Intentional Emissions

4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4.2.1. Plots showing the measurements made to obtain these values are provided in Figure 4.2.1.

Table 4.2.1 Pulsed Emission Characteristics (Duty Cycle).

Test Date: 3-Jun-25
Test Engineer: John Nantz
EUT PRECO PrecoLink Zigbee
Meas. Distance: Conducted

Test Mode Pulsed Operation / Average Measurement Duty Cycle								
	Mode	Data Rate Mbps	Voltage V	Oper. Freq MHz	Pulse Length ms	Pulse Period ms	Duty Cycle %	Power Duty Correction dB
R0								
R1	Zigbee	0.25	13.5	2440	4.070	5.260	77	1.1
R2								
#	C1	C2	C3	C4	C5	C6	C7	C8

* Duty Cycle is measured in line with DTS guidance 558074 D01 v5 r02 section 6(b) for averaging only over full-power transmission pulses.

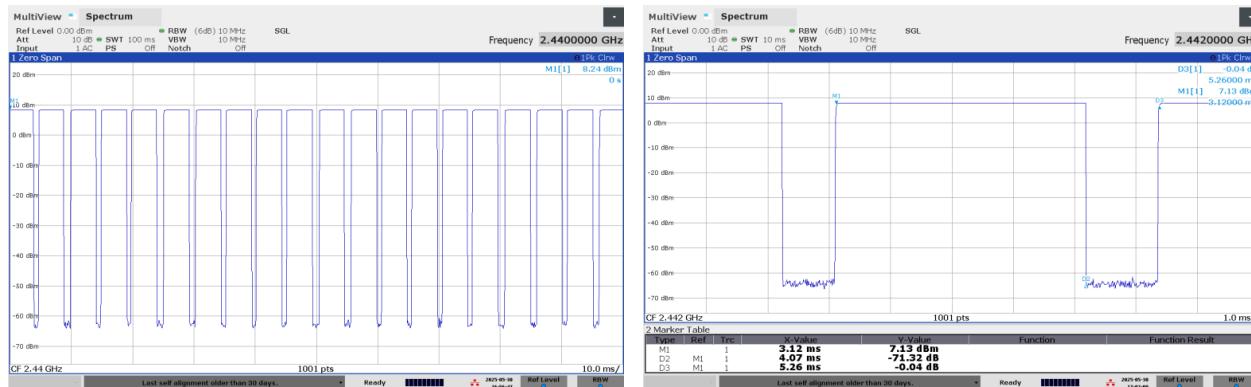


Figure 4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).

4.2.2 Fundamental Emission Bandwidth


Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 4.2.2. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 4.2.2.

Table 4.2.2 Intentional Emission Bandwidth.

Test Date: 3-Jun-25
Test Engineer: John Nantz
EUT PRECO PrecoLink Zigbee
Meas. Distance: Conducted

R0	Occupied Bandwidth								Pass/Fail
	Transmit Mode	Data Rate (Mbps)	Path	Voltage (V)	Oper. Freq (MHz)	6 dB BW (MHz)	6 dB BW Limit (MHz)	99% OBW (MHz)	
R1	Zigbee	0.25	ANT1	13.5	2405.0	1.56	0.50	2.26	Pass
R2					2465.0	1.58	0.50	2.31	Pass
R3					2470.0	1.62	0.50	2.34	Pass
R4					2475.0	1.59	0.50	2.31	Pass
R5		0.25	ANT2	13.5	2405.0	1.56	0.50	2.27	Pass
R6					2460.0	1.63	0.50	2.42	Pass
R7					2465.0	1.66	0.51	2.40	Pass
R8					2470.0	1.59	0.50	2.29	Pass
R9		0.25	ANT Ext	13.5	2475.0	1.60	0.50	2.31	Pass
R10					2405.0	1.56	0.50	2.30	Pass
R11					2465.0	1.67	0.50	2.45	Pass
R12					2470.0	1.59	0.50	2.31	Pass
R13					2475.0	1.61	0.50	2.47	Pass
#	C1	C2	C3	C4	C5	C6	C7	C8	C9

ANT 1

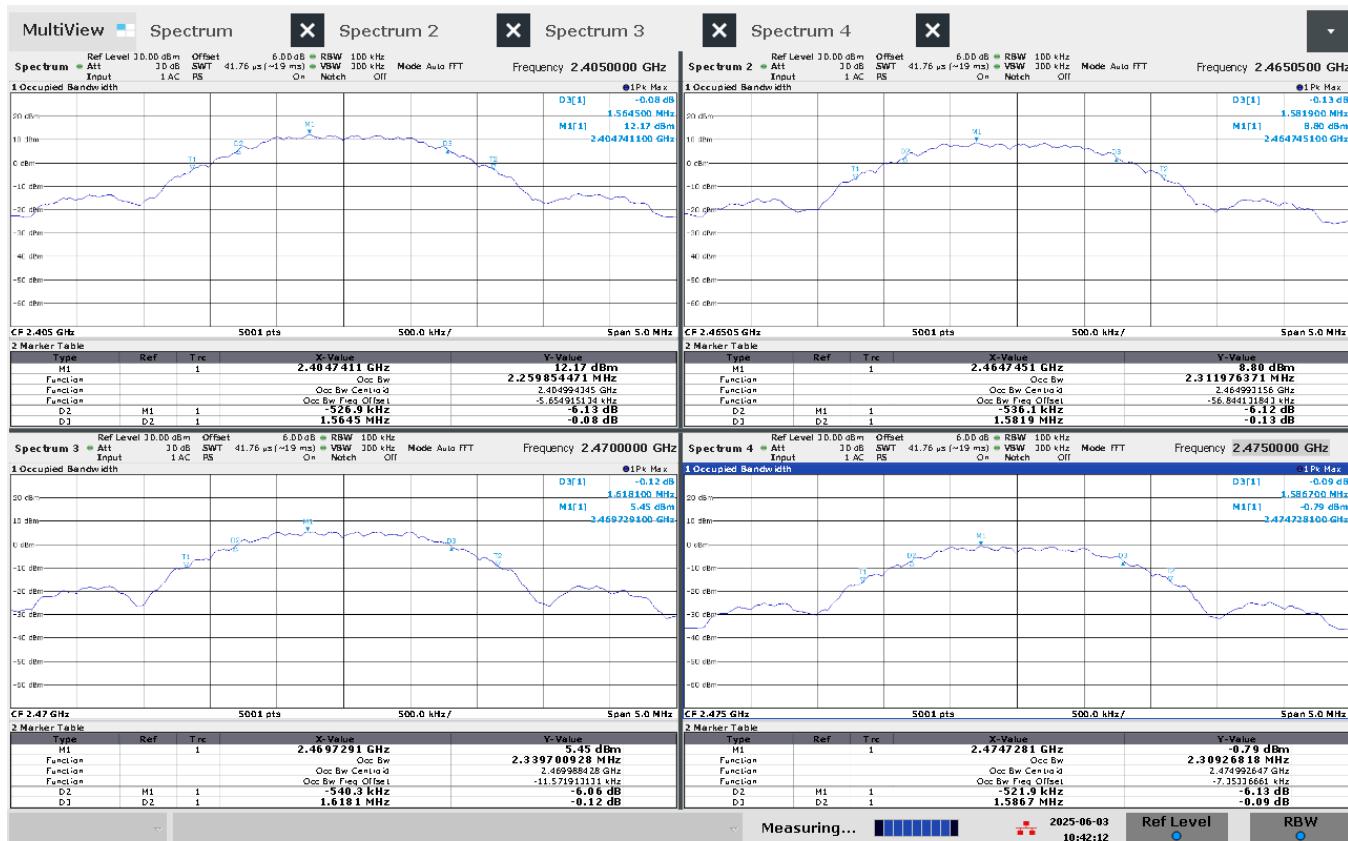

10:42:13 AM 06/03/2025

Figure 4.2.2 (i) Example Intentional Emission Bandwidth Plots.

ANT 2


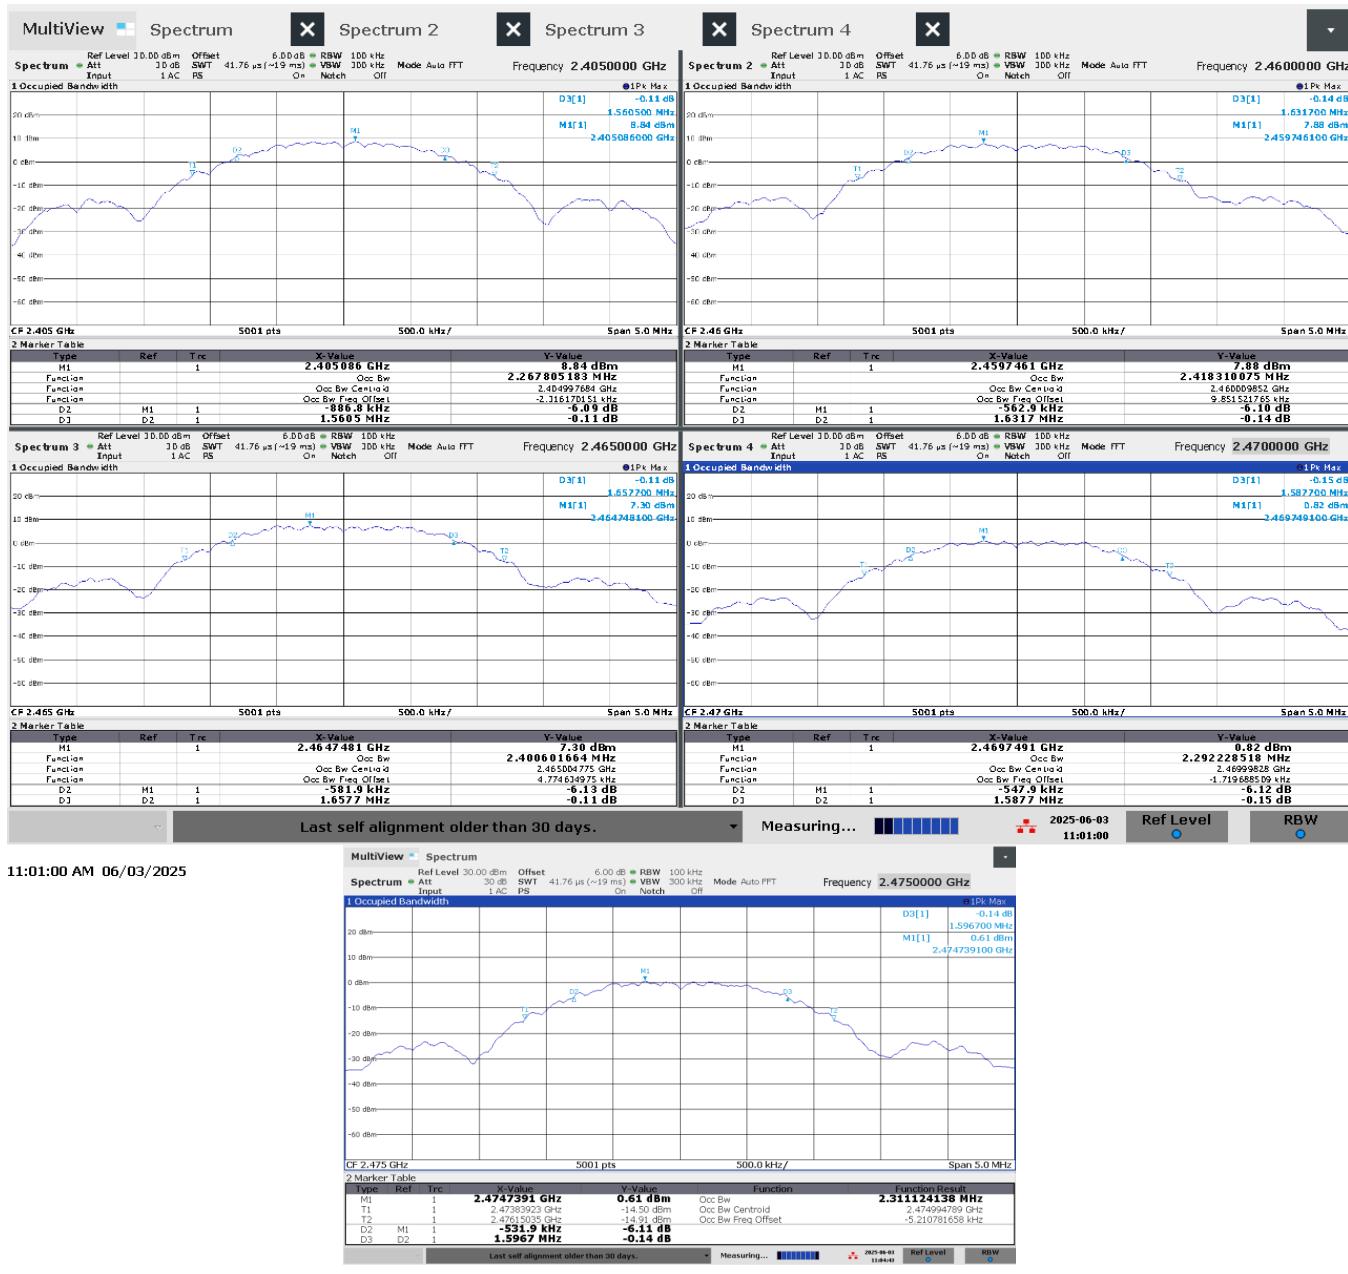


Figure 4.2.2 (ii) Example Intentional Emission Bandwidth Plots.

ANT EXT

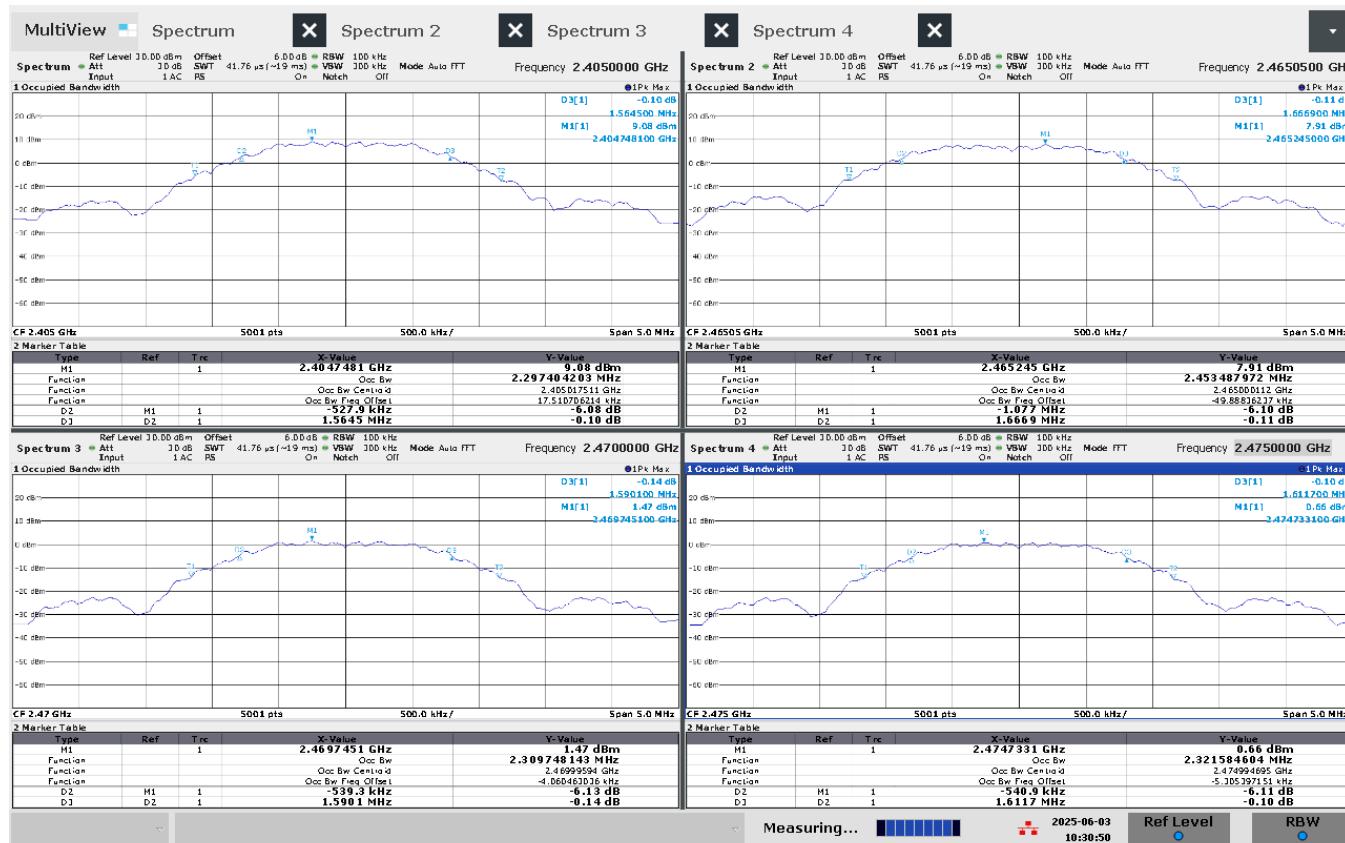

10:30:50 AM 06/03/2025

Figure 4.2.2 (iii) Example Intentional Emission Bandwidth Plots.

4.2.3 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 4.2.3 .

Table 4.2.3 Tx. Power Results.


CH#	PWR SETTINGS		
	ANT1	ANT2	ANT Ext.
11 - 21	37	36	36
22	37	36	36
23	37	35	36
24	36	32	32
25	32	32	32
26	N/A	N/A	N/A

Test Date: 3-Jun-25
 Test Engineer: John Nantz
 EUT: PRECO PrecoLink Zigbee
 Meas. Distance: Conducted

R0	Fundamental Power												
	Mode	Channel	Freq. MHz	Path	Pout (Pk) dBm	Pout (Avg) dBm	Duty dB	Pout + Duty dBm	Ant Gain dBi	EIRP (Avg) dBm	EIRP (Avg) Limit dBm	Pass dB	Comments
R1	Zigbee	11	2405.0	ANT1	14.3		0.0	14.3	2.0	16.3	36.0	19.7	SEE PWR SETTINGS TABLE ABOVE
R2		23	2465.0		11.3		0.0	11.3	2.0	13.3	36.0	22.7	
R3		24	2470.0		8.7		0.0	8.7	2.0	10.7	36.0	25.4	
R4		25	2475.0		2.0		0.0	2.0	2.0	4.0	36.0	32.0	
R5		11	2405.0	ANT2	12.4		0.0	12.4	0.7	13.1	36.0	22.9	
R6		22	2460.0		11.1		0.0	11.1	0.7	11.8	36.0	24.2	
R7		23	2465.0		10.9		0.0	10.9	0.7	11.6	36.0	24.4	
R8		24	2470.0		4.1		0.0	4.1	0.7	4.8	37.0	32.2	
R9		25	2475.0	ANT Ext.	3.8		0.0	3.8	0.7	4.5	38.0	33.5	
R10		11	2405.0		12.4		0.0	12.4	3.0	15.4	36.0	20.6	
R11		23	2465.0		11.8		0.0	11.8	3.0	14.8	36.0	21.2	
R12		24	2470.0		4.9		0.0	4.9	3.0	7.9	36.0	28.1	
R13		25	2475.0		4.5		0.0	4.5	3.0	7.5	36.0	28.5	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13

ROW COLUMN
 R0 C6 Measured conducted from radio conducted sample. Avg Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.2.2 / ANSI C63.10 11.9.2.2 (AVGSA-
 R0 C5 Measured conducted from radio conducted sample. Pk Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.1.3 / ANSI C63.10 11.9.1.1
 R0 C7 No duty cycle factor is employed, peak power is used to demonstrate compliance.
 R0 C9 Maximum Antenna Gain across Band. For MIMO (if applicable), Gain = Gain_dBi + 10*log10(N), N = 2 antennas. NOTE: EUT is SISO, Max. declared gain is 3 dBi.

ANT 1

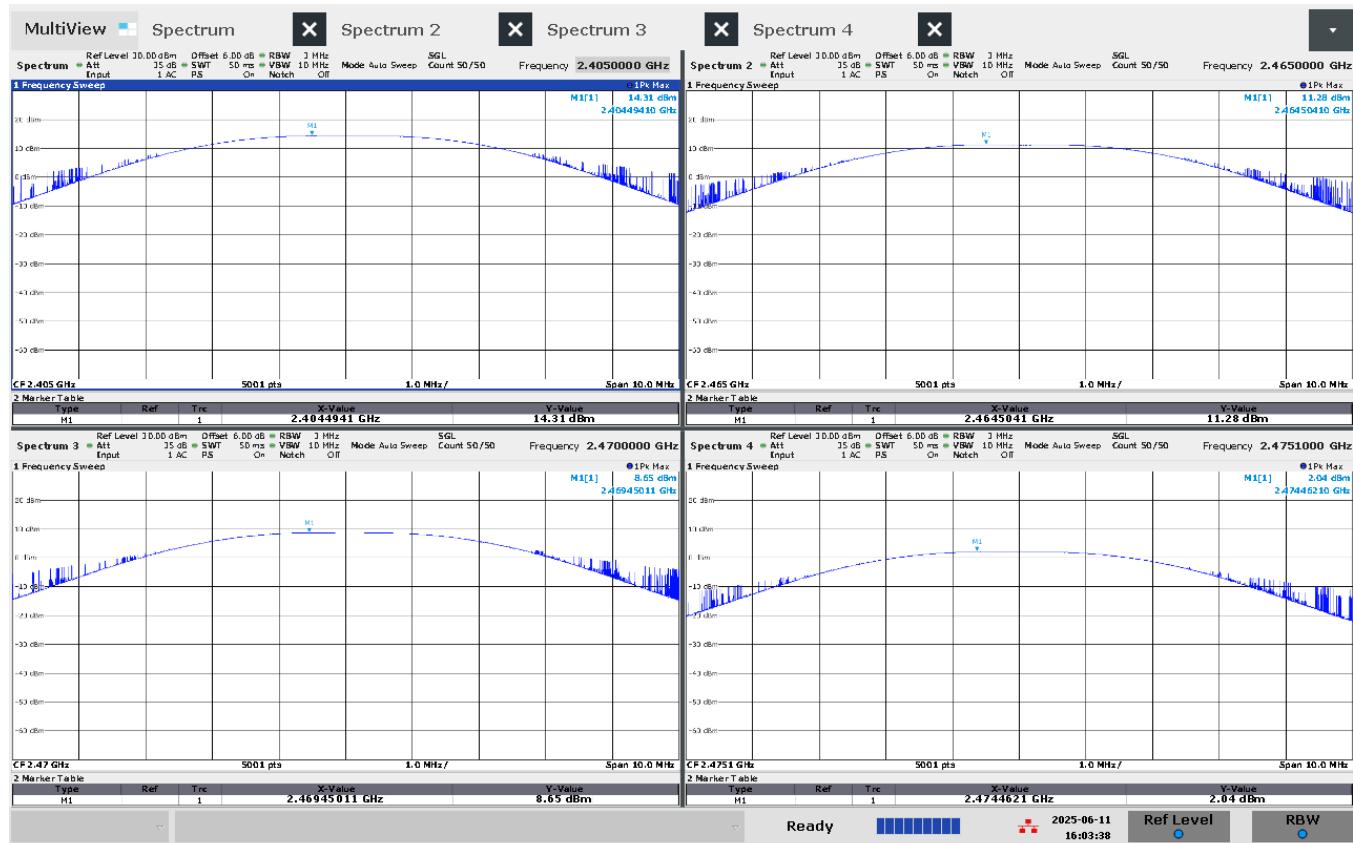

04:03:39 PM 06/11/2025

Figure 4.2.3 (i) Conducted Power Measurement Plots.

ANT 2


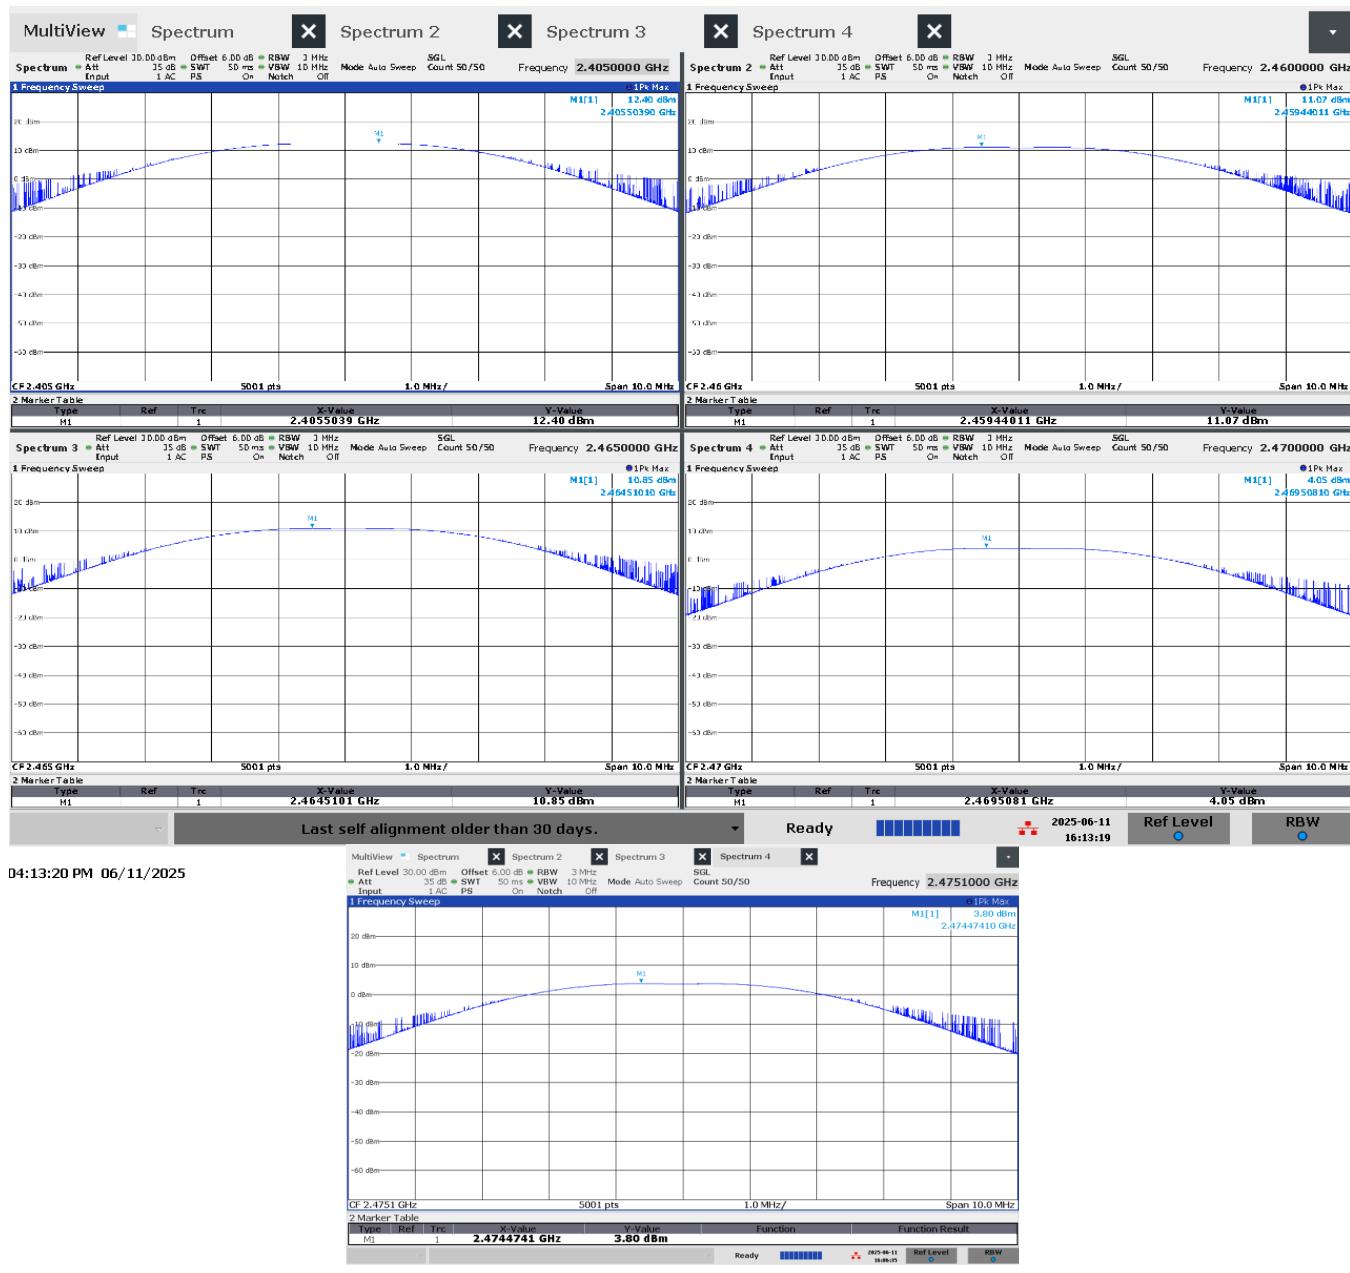


Figure 4.2.3 (ii) Conducted Power Measurement Plots.

ANT EXT

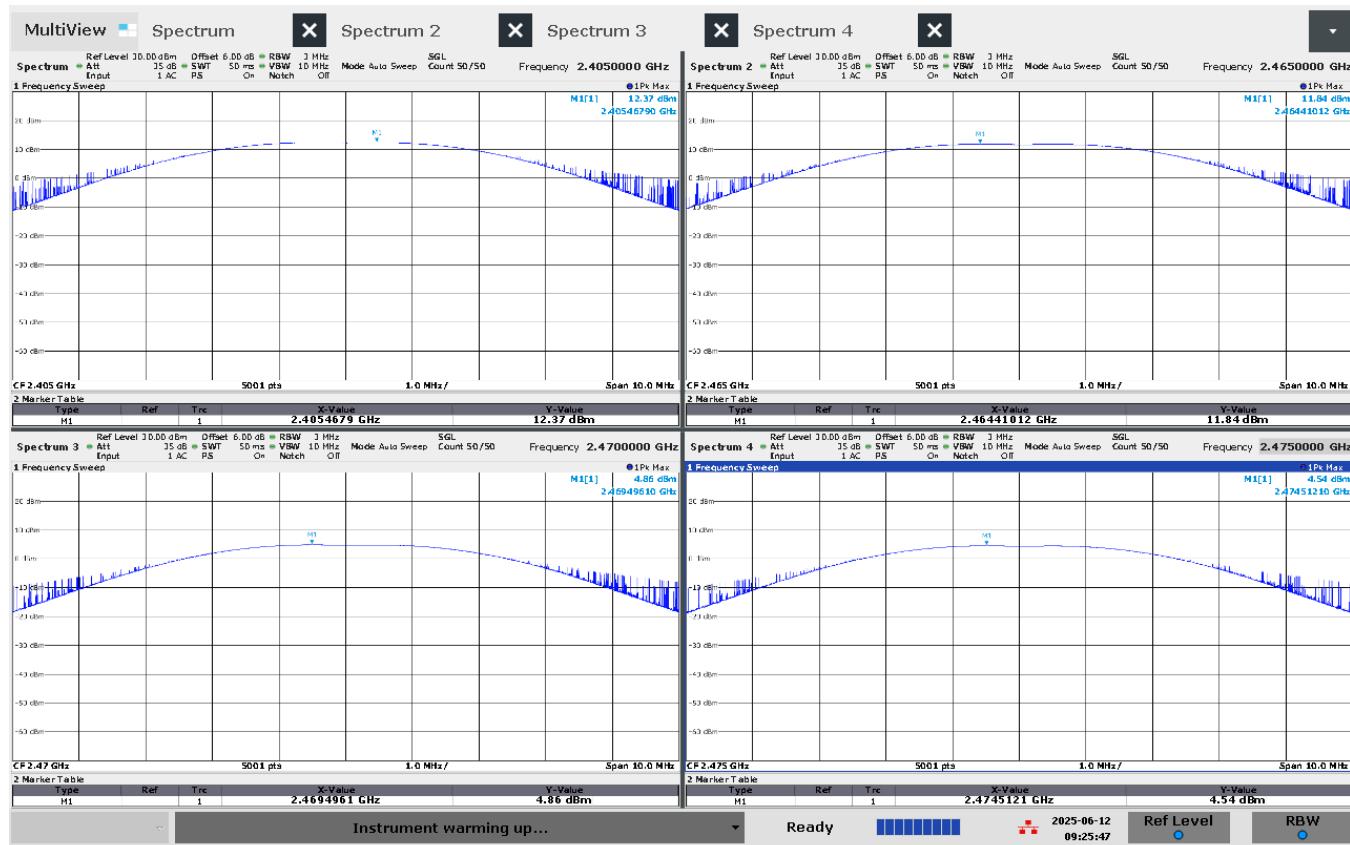

09:25:48 AM 06/12/2025

Figure 4.2.3 (iii) Conducted Power Measurement Plots.


4.2.4 Power Spectral Density

For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 4.2.4 . Plots showing how these measurements were made are depicted in Figure 4.2.4 .

Table 4.2.4 Power Spectral Density Results.

Frequency Range		Detector	IF Bandwidth	Video Bandwidth			Test Date:		3-Jun-25	
2400-2483.5		Pk	3 kHz	10 kHz			Test Engineer:		John Nantz	
						EUT: PRECO PrecoLink Zigbee				
						Meas. Distance: Conducted				
Power Spectral Density										
R0	Mode	Path	Channel	Frequency (MHz)	Ant. Used	PK PSDcond (meas) (dBm/3kHz)	Duty dB	PSDcond (calc) (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass By (dB)
R1	Zigbee	ANT1	11	2405	Cond.	3.3	0.0	3.3	8.00	4.7
R2			23	2465	Cond.	-0.9	0.0	-0.9	8.00	8.9
R3			24	2470	Cond.	-3.9	0.0	-3.9	8.00	11.9
R4			25	2475	Cond.	-9.5	0.0	-9.5	8.00	17.5
R5		ANT2	11	2405	Cond.	-2.9	0.0	-2.9	8.00	10.9
R6			22	2460	Cond.	-2.2	0.0	-2.2	8.00	10.2
R7			23	2465	Cond.	-2.7	0.0	-2.7	8.00	10.7
R8			24	2470	Cond.	-7.1	0.0	-7.1	9.00	16.1
R9		ANT Ext.	25	2475	Cond.	-7.9	0.0	-7.9	8.00	15.9
R10			11	2405	Cond.	-0.3	0.0	-0.3	8.00	8.3
R11			23	2465	Cond.	-2.5	0.0	-2.5	8.00	10.5
R12			24	2470	Cond.	-8.5	0.0	-8.5	8.00	16.5
R13			25	2475	Cond.	-7.8	0.0	-7.8	8.00	15.8
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
ROW	COLUMN									
R0		C6	PSD measured conducted following DTS guidance 558074 D01 v5 r02 8.4 / ANSI C63.10 11.10 PKPSD procedure.							
R0		C7	Not applicable for PKPSD measurements							

ANT 1

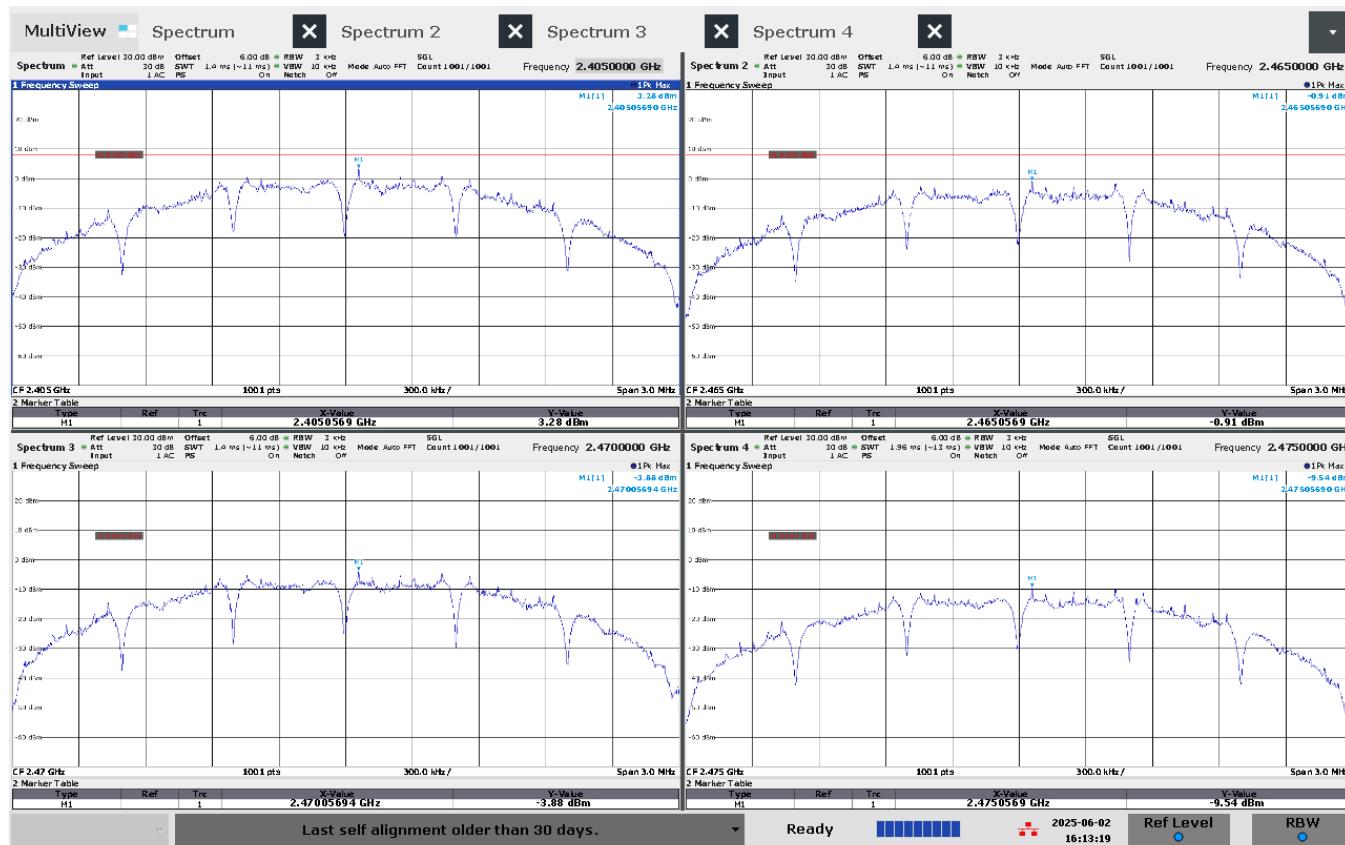

04:13:20 PM 06/02/2025

Figure 4.2.4 (i) Power Spectral Density Plots.

ANT 2


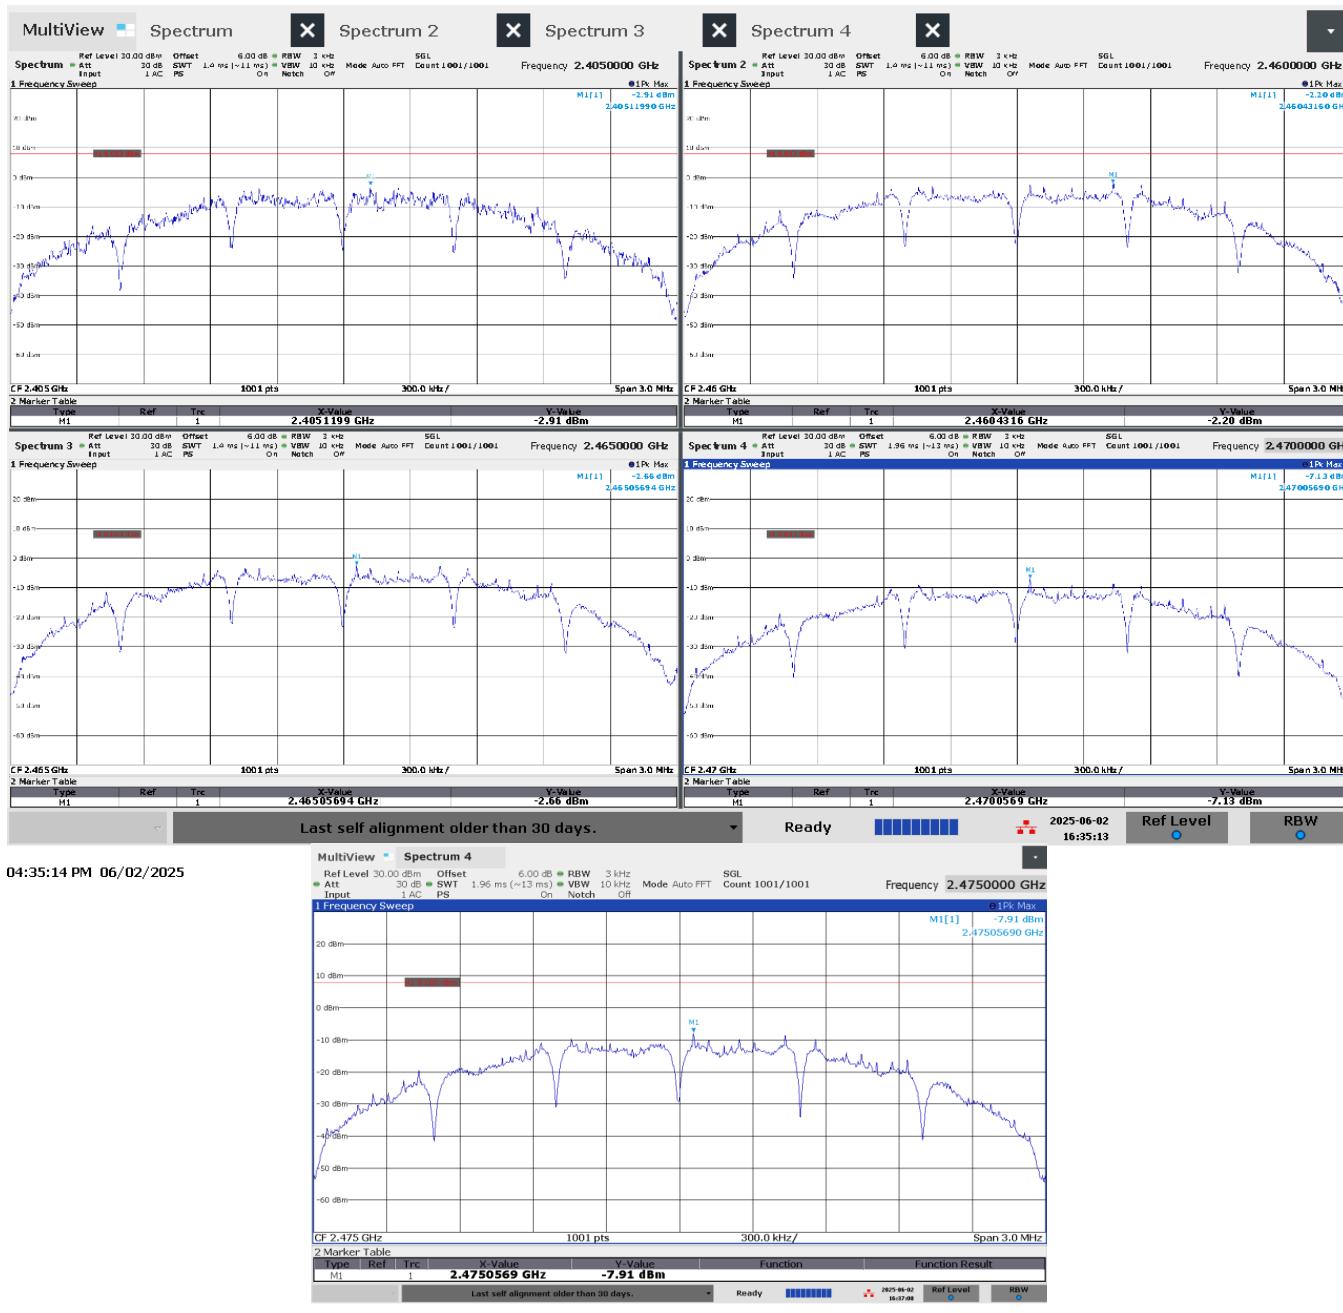


Figure 4.2.4 (ii) Power Spectral Density Plots.

ANT EXT

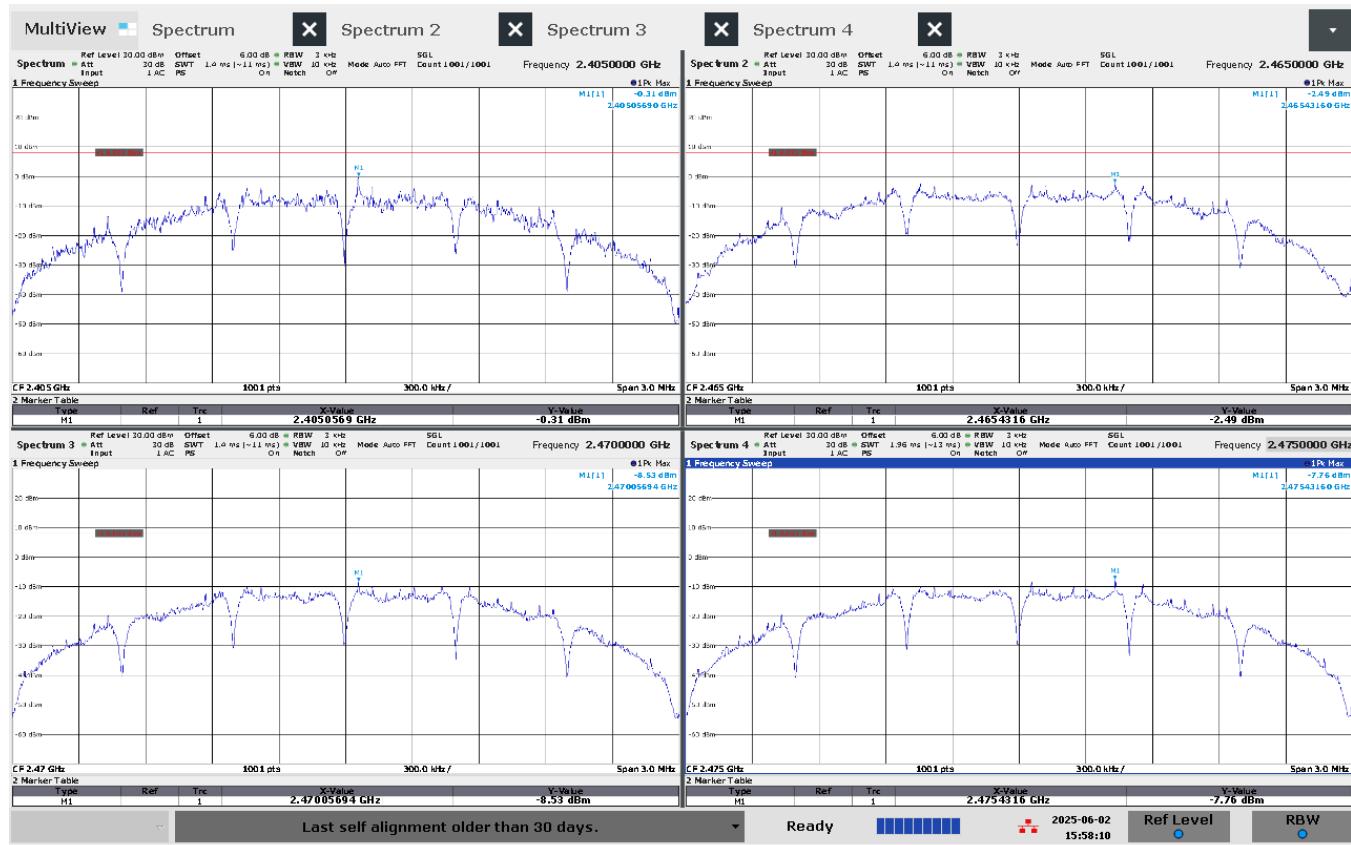

03:58:11 PM 06/02/2025

Figure 4.2.4 (iii) Power Spectral Density Plots.

4.3 Unintentional Emissions

4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 4.3.1. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 4.3.1 (i) Transmit Chain Spurious Emissions.

Frequency Range		Det	IF Bandwidth		Video Bandwidth		Test Date:		3-Jun-25						
30 >= f > 1000 MHz		Pk/QPk	100 kHz		300 kHz		Test Engineer:		John Nantz						
f < 1000 MHz		Pk/Avg	1 MHz		3 MHz		EUT:		PRECO PrecoLink Zigbee						
Meas. Distance: Conducted															
	Mode	Path	Frequency	Output Power	Ant	GR Factor	Avg Duty	Electric Field @ 3m			FCC/IC				
R0			Start MHz	Stop MHz	Pk dBm	Avg dBm	Gain dBi	Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m	Pass dB	Comments	
R1	Fundamental Restricted Band Edge (Low Side)														
R2	ZIGBEE	ANT1	2390.0	2390.0	-25.5	-44.3	2.0	0.0	1.1	71.7	74.0	52.9	54.0	1.1 max all - L,M,H channels	
R3	Fundamental Restricted Band Edge (High Side)														
R4	ZIGBEE	ANT1	2483.5	2483.5	-23.7	-50.9	2.0	0.0	1.1	73.5	74.0	46.3	54.0	0.5 max all - L,M,H channels	
R5															
R6	ZIGBEE	ANT1	30	88	-86.8		2.0	4.7	1.1	15.1			40	24.9 max all - L,M,H channels	
R7	ZIGBEE	ANT1	88	216	-87.8		2.0	4.7	1.1	14.1			43	28.9 max all - L,M,H channels	
R8	ZIGBEE	ANT1	216	1000	-86.8		2.0	4.7	1.1	15.1			46	30.9 max all - L,M,H channels	
R9	ZIGBEE	ANT1	1000.0	4000.0	-35.1	-43.4	2.0	0.0	1.1	62.1	74.0	53.8	54.0	0.2 max all - L,M,H channels	
R10	ZIGBEE	ANT1	4810.0	4810.0	-52.1	-61.7	2.0	0.0	1.1	46.2	74.0	36.6	54.0	17.4	
R11	ZIGBEE	ANT1	4890.0	4890.0	-58.3	-69.3	2.0	0.0	1.1	40.0	74.0	29.0	54.0	25.0	
R12	ZIGBEE	ANT1	4960.0	4960.0	-65.9	-78.2	2.0	0.0	1.1	32.4	74.0	20.1	54.0	33.9	
R13	ZIGBEE	ANT1	4000.0	6000.0	-51.0	-60.6	2.0	0.0	1.1	46.2	74.0	36.6	54.0	17.4 max all - L,M,H channels	
R14	ZIGBEE	ANT1	6000.0	8400.0	-61.7	-74.9	2.0	0.0	1.1	35.5	74.0	22.3	54.0	31.7 max all - L,M,H channels	
R15	ZIGBEE	ANT1	8400.0	12500.0	-62.6	-73.4	2.0	0.0	1.1	34.6	74.0	23.8	54.0	30.2 max all - L,M,H channels	
R16	ZIGBEE	ANT1	12500.0	26000.0	-56.3	-69.8	2.0	0.0	1.1	40.9	74.0	27.4	54.0	26.6 max all - L,M,H channels	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15
ROW	COLUMN														
R0	C5/C6	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12													
R0	C8	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (c)													
R0	C9	Computed according to ANSI C63.10-2013 section 11.12.2.5.2.1(g)													
R0	C10/C12	Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)													

Table 4.3.1 (ii) Transmit Chain Spurious Emissions.


Frequency Range		Det	IF Bandwidth		Video Bandwidth		Test Date:		3-Jun-25						
30 >= f > 1000 MHz		Pk/QPk	100 kHz		300 kHz		Test Engineer:		John Nantz						
f < 1000 MHz		Pk/Avg	1 MHz		3 MHz		EUT:		PRECO PrecoLink Zigbee						
Meas. Distance:															
R0	Mode	Path	Frequency	Output Power	Ant	GR Factor	Avg Duty	Electric Field @ 3m	Pass	FCC/IC					
			Start MHz	Stop MHz	Pk dBm	Avg dBm	Gain dBi	Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m	Comments		
R1	Fundamental Restricted Band Edge (Low Side)														
R2	ZIGBEE	ANT2	2390.0	2390.0	-26.1	-44.2	.7	0.0	1.1	69.8	74.0	51.7	54.0	2.3	max all - L,M,H channels
R3	Fundamental Restricted Band Edge (High Side)														
R4	ZIGBEE	ANT2	2483.5	2483.5	-22.7	-47.7	.7	0.0	1.1	73.2	74.0	48.2	54.0	0.8	max all - L,M,H channels
R5															
R6	ZIGBEE	ANT2	30	88	-85.5		.7	4.7	1.1	15.1			40	24.9	max all - L,M,H channels
R7	ZIGBEE	ANT2	88	216	-86.5		.7	4.7	1.1	14.1			43	28.9	max all - L,M,H channels
R8	ZIGBEE	ANT2	216	1000	-85.5		.7	4.7	1.1	15.1			46	30.9	max all - L,M,H channels
R9	ZIGBEE	ANT2	1000.0	4000.0	-34.6	-53.6	.7	0.0	1.1	60.6	74.0	42.3	54.0	11.7	max all - L,M,H channels
R10	ZIGBEE	ANT2	4810.0	4810.0	-53.5	-63.1	.7	0.0	1.1	43.5	74.0	33.9	54.0	20.1	
R11	ZIGBEE	ANT2	4890.0	4890.0	-56.2	-66.9	.7	0.0	1.1	40.8	74.0	30.1	54.0	23.9	
R12	ZIGBEE	ANT2	4960.0	4960.0	-63.8	-74.5	.7	0.0	1.1	33.2	74.0	22.5	54.0	31.5	
R13	ZIGBEE	ANT2	4000.0	6000.0	-52.4	-62.0	.7	0.0	1.1	43.5	74.0	33.9	54.0	20.1	max all - L,M,H channels
R14	ZIGBEE	ANT2	6000.0	8400.0	-55.7	-66.2	.7	0.0	1.1	40.2	74.0	29.7	54.0	24.3	max all - L,M,H channels
R15	ZIGBEE	ANT2	8400.0	12500.0	-59.6	-72.3	.7	0.0	1.1	36.3	74.0	23.6	54.0	30.4	max all - L,M,H channels
R16	ZIGBEE	ANT2	12500.0	26000.0	-55.0	-68.5	.7	0.0	1.1	40.9	74.0	27.4	54.0	26.6	max all - L,M,H channels
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15
ROW	COLUMN														
R0	C5/C6	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12													
R0	C8	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (c)													
R0	C9	Computed according to ANSI C63.10-2013 section 11.12.2.5.2.1(i)													
R0	C10/C12	Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)													

Table 4.3.1 (iii) Transmit Chain Spurious Emissions.

Frequency Range		Det	IF Bandwidth		Video Bandwidth		Test Date:		3-Jun-25						
30 >= f > 1000 MHz		Pk/QPk	100 kHz		300 kHz		Test Engineer:		John Nantz						
f < 1000 MHz		Pk/Avg	1 MHz		3 MHz		EUT:		PRECO PrecoLink Zigbee						
Meas. Distance:															
R0	Mode	Path	Frequency	Output Power	Ant	GR Factor	Avg Duty	Electric Field @ 3m	Pass	FCC/IC					
			Start MHz	Stop MHz	Pk dBm	Avg dBm	Gain dBi	Factor dB	Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m	Comments		
R1	Fundamental Restricted Band Edge (Low Side)														
R2	ZIGBEE	ANT Ext.	2390.0	2390.0	-26.6	-46.5	3.0	0.0	1.1	71.6	74.0	51.7	54.0	2.3	max all - L,M,H channels
R3	Fundamental Restricted Band Edge (High Side)														
R4	ZIGBEE	ANT Ext.	2483.5	2483.5	-24.9	-51.2	3.0	0.0	1.1	73.3	74.0	47.0	54.0	0.7	max all - L,M,H channels
R5															
R6	ZIGBEE	ANT Ext.	30	88	-87.8		3.0	4.7	1.1	15.1			40	24.9	max all - L,M,H channels
R7	ZIGBEE	ANT Ext.	88	216	-86.6		3.0	4.7	1.1	16.3			43	26.7	max all - L,M,H channels
R8	ZIGBEE	ANT Ext.	216	1000	-87.8		3.0	4.7	1.1	15.1			46	30.9	max all - L,M,H channels
R9	ZIGBEE	ANT Ext.	1000.0	4000.0	-37.1	-45.8	3.0	0.0	1.1	61.1	74.0	52.4	54.0	1.6	max all - L,M,H channels
R10	ZIGBEE	ANT Ext.	4810.0	4810.0	-55.5	-65.3	3.0	0.0	1.1	43.8	74.0	34.0	54.0	20.0	
R11	ZIGBEE	ANT Ext.	4890.0	4890.0	-58.1	-68.1	3.0	0.0	1.1	41.2	74.0	31.2	54.0	22.8	
R12	ZIGBEE	ANT Ext.	4960.0	4960.0	-62.4	-74.6	3.0	0.0	1.1	36.9	74.0	24.7	54.0	29.3	
R13	ZIGBEE	ANT Ext.	4000.0	6000.0	-54.4	-64.2	3.0	0.0	1.1	43.8	74.0	34.0	54.0	20.0	max all - L,M,H channels
R14	ZIGBEE	ANT Ext.	6000.0	8400.0	-61.9	-75.8	3.0	0.0	1.1	36.3	74.0	22.4	54.0	31.6	max all - L,M,H channels
R15	ZIGBEE	ANT Ext.	8400.0	12500.0	-64.0	-76.8	3.0	0.0	1.1	34.2	74.0	21.4	54.0	32.6	max all - L,M,H channels
R16	ZIGBEE	ANT Ext.	12500.0	26000.0	-57.6	-70.4	3.0	0.0	1.1	40.6	74.0	27.8	54.0	26.2	max all - L,M,H channels
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15
ROW	COLUMN														
R0	C5/C6	Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12													
R0	C8	Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (c)													
R0	C9	Computed according to ANSI C63.10-2013 section 11.12.2.5.2.1(i)													
R0	C10/C12	Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)													

4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 4.3.2 below.

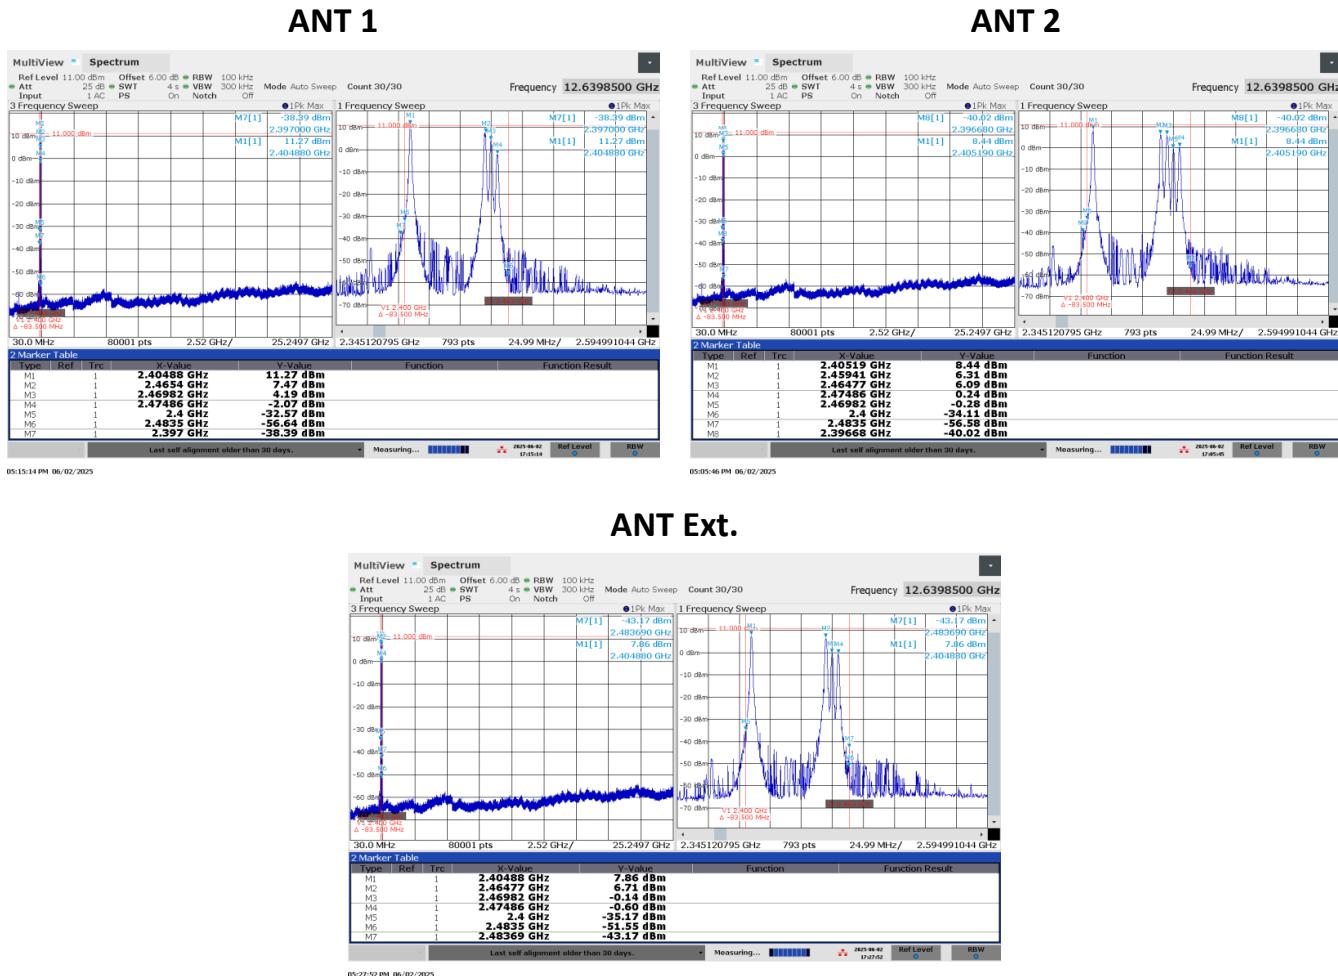

NOTE: Peak power measurements were made therefore OOB spurious limits are -20dBc in alignment with FCC Part 15.247, paragraph (d).

Figure 4.3.2 Worst Case Transmitter OOB Emissions Measured.

4.3.3 Radiated Digital and Cabinet Spurious

The results for the measurement of digital and cabinet spurious emissions are not reported herein as all emissions were greater than 20 dB below the regulatory limit. Emissions from digital components are measured to 1 GHz, or to five times the maximum crystal or oscillator operating frequency, whichever is greater. Cabinet emissions are measured up to the highest frequency tested during conducted measurements.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 5.0.0 Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency Conducted Emm. Amplitude	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ $\pm1.9 \text{ dB}$
Radiated Emm. Amplitude ($f < 30 \text{ MHz}$)	$\pm3.1 \text{ dB}$
Radiated Emm. Amplitude ($30 - 200 \text{ MHz}$)	$\pm4.0 \text{ dB}$
Radiated Emm. Amplitude ($200 - 1000 \text{ MHz}$)	$\pm5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 5.0.0 Accreditation Documents