

Date: 2000-06-18

No.: HM104846

## **TEST REPORT**

Page 1 of 21

### **FCC PART 15 SUBPART C CERTIFICATION REPORT**

#### **FOR LOW POWER TRANSMITTER**

#### **TEST REPORT No.: HM104846**

Equipment Under Test [EUT]:

FM Wireless Microphone

Model Number:

68138

Applicant:

Superior Focus International (Asia) Ltd.

FCC ID :

OY268138

Date: 2000-06-18

No.: HM104846

# **TEST REPORT**

**Page 2 of 21**

## **CONTENT:**

Cover	Page 1 of 21
Content	Page 2-3 of 21
Conclusion	Page 4 of 21

### **1.0 General Details**

1.1	Test Laboratory	Page 5 of 21
1.2	Applicant Details	Page 5 of 21
	Applicant	
	HKSTC Code Number for Applicant	
	Manufacturer	
1.3	Equipment Under Test [EUT]	Page 6 of 21
	Description of EUT operation	
1.4	Date of Order	Page 6 of 21
1.5	Submitted Sample	Page 6 of 21
1.6	Test Duration	Page 6 of 21
1.7	Country of Origin	Page 6 of 21
1.8	Additional Information of EUT	Page 7 of 21

### **2.0 Technical Details**

2.1	Investigations Requested	Page 8 of 21
2.2	Test Standards and Results Summary	Page 8 of 21

### **3.0 Test Results**

3.1	Emission	Page 9-14 of 21
3.2	Bandwidth Measurement	Page 15-17 of 21

Date: 2000-06-18

No.: HM104846

## **TEST REPORT**

Page 3 of 21

### **Appendix A**

List of Measurement Equipment

Page 18 of 21

### **Appendix B**

Modification Method

Page 19 of 21

### **Appendix C**

Photographs

Page 20-21 of 21

Date: 2000-06-18

No.: HM104846

## **TEST REPORT**

Page 4 of 21

### **CONCLUSION**

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

---

Law Man Kit

Testing Engineer

---

Steven Tsang

Verify by

---

Patrick Wong

Patrick Wong  
for Managing Director

Date: 2000-06-18

## **TEST REPORT**

Page 5 of 21

No.: HM104846

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Applicant Details**

##### **Applicant**

Superior Focus International (Asia) Ltd.  
Unit 1011, Houston Centre, 63 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.

Telephone: 852 25628662  
Fax: 852 25612118

**HKSTC Code Number for Applicant**

**SUF007**

##### **Manufacturer**

Superior Focus International (Asia) Ltd.  
Unit 1011, Houston Centre, 63 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong.

Telephone: 852 25628662  
Fax: 852 25612118

Date: 2000-06-18

## **TEST REPORT**

Page 6 of 21

No.: HM104846

### **1.3 Equipment Under Test [EUT]**

#### **Description of Sample**

Product: FM Wireless Microphone  
Manufacturer: Superior Focus International (Asia) Ltd.  
Brand Name: Kidz FOCUS  
Model Number: 68138  
Input Voltage: 3Vd.c ("AA" size battery x 2)

#### **1.3.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Superior Focus International (Asia) Ltd., 90.489-104.39MHz FM Wireless Microphone. The EUT continues to transmit while switch on. It is voice transmission, Modulation by Mic. and tape is frequency modulation.

### **1.4 Date of Order**

2001-05-22

### **1.5 Submitted Sample(s):**

2 Samples per model

### **1.6 Test Duration**

2001-06-13

### **1.7 Country of Origin**

China

Date: 2000-06-18

# **TEST REPORT**

Page 7 of 21

No.: HM104846

## **1.8 Additional Information of EUT**

	Submitted	Not Available
User Manual	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part List	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Circuit Diagram	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Printed Circuit Board [PCB] Layout	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Rating Label	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Block diagram	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC ID Label	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Date: 2000-06-18

# **TEST REPORT**

Page 8 of 21

No.: HM104846

## **2.0 Technical Details**

### **2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:1992 for FCC Certification.

### **2.2 Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Test Result			
			Class / Severity	Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.239	ANSI C63.4: 1992	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4: 1992	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions on AC, 0.45MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4: 1992	Class B	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Note: N/A - Not Applicable

Date: 2000-06-18

# **TEST REPORT**

Page 9 of 21

No.: HM104846

## **3.0 Test Results**

### **3.1 Emission**

#### **3.1.1 Radiated Emissions**

Test Requirement:

FCC 47CFR 15.239 & 15.209

Test Method:

ANSI C63.4: 1992

Test Date:

2000-06-13

Mode of Operation:


On mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigate all operating modes, rotated about all 3 axis (X, Y & Z) to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

#### **Test Setup:**

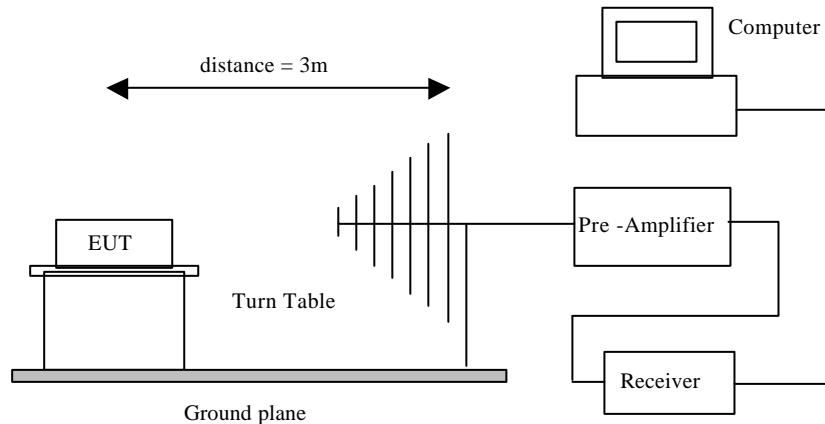

Date: 2000-06-18

# TEST REPORT

Page 10 of 21

No.: HM104846

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:

Frequency Range of Fundamental [MHz]	Peak Limits [ $\mu$ V/m]	Average Limits [ $\mu$ V/m]
88-108	2,500	250

Results:

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
90.489	26.7	13.5	40.2	102.3	2,500.0	Horizontal

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
92.55	32.1	13.6	45.7	192.8	2,500.0	Horizontal

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
104.39	29.8	15.5	45.3	184.1	2,500.0	Horizontal

Date: 2000-06-18

## **TEST REPORT**

Page 11 of 21

No.: HM104846

### **Results:**

<b>Field Strength of Fundamental Emissions</b>						
<b>Average Value *</b>						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
90.489	26.5	13.5	40.0	100.0	250.0	Horizontal

<b>Field Strength of Fundamental Emissions</b>						
<b>Average Value *</b>						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
92.55	31.5	13.6	45.1	179.8	250.0	Horizontal

<b>Field Strength of Fundamental Emissions</b>						
<b>Average Value *</b>						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
104.39	29.7	15.5	45.2	181.9	250.0	Horizontal

### **Remarks:**

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 300MHz  $\pm 3.7\text{dB}$   
300MHz to 1GHz  $+3.0\text{dB} / -2.7\text{dB}$

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth = 3MHz  
Video Bandwidth 1Hz

**Date: 2000-06-18**

# TEST REPORT

Page 12 of 21

No.: HM104846

Limited for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

## Results:

Date: 2000-06-18

# **TEST REPORT**

Page 13 of 21

No.: HM104846


## **3.1.1 Conducted Emissions (0.45MHz to 30MHz)**

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4: 1992
Test Date:	2000-06-13
Mode of Operation:	Not Applicable

### **Test Method:**

The test was performed in accordance with ANSI C63.4:1992, with the following: an initial measurement was performed in peak and average detection mode on the live line. Any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

### **Test Setup:**

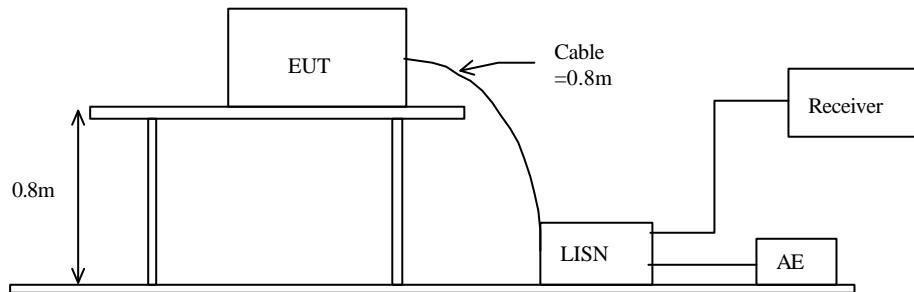

Date: 2000-06-18

## **TEST REPORT**

Page 14 of 21

No.: HM104846

### **Limit for Conducted Emissions (FCC 47 CFR 15.207):**

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
0.45-30	250

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak ) in the following diagram labelled as (QP).

### **Results:**

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

### **Remarks:**

Calculated measurement uncertainty =  $\pm 2.3$ dB

Date: 2000-06-18

## **TEST REPORT**

Page 15 of 21

No.: HM104846

### **3.2 26dB Bandwidth of Fundamental Emission**

Test Requirement:

FCC 47 CFR 15.239

Test Method:

ANSI C63.4: 1992 (Section 13.1.7)

Test Date:

2000-06-13

Mode of Operation:

On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

Date: 2000-06-18

# TEST REPORT

Page 16 of 21

No.: HM104846


## Limits for 26 dB Bandwidth of Fundamental Emission:

Frequency Range [MHz]	26dB Bandwidth [KHz]	FCC Limits * [KHz]
92.55 (Worst)	44.8	200

## Results:

The following figure is the measured bandwidth of Fundamental Emission.

### 26dB Bandwidth of Fundamental Emission

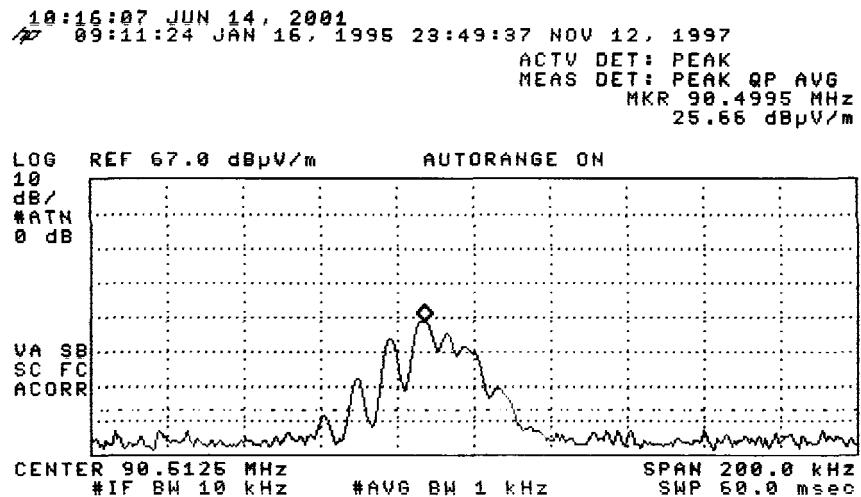


Date: 2000-06-18

## TEST REPORT


Page 17 of 21

No.: HM104846

### 26dB Bandwidth of Fundamental Emission

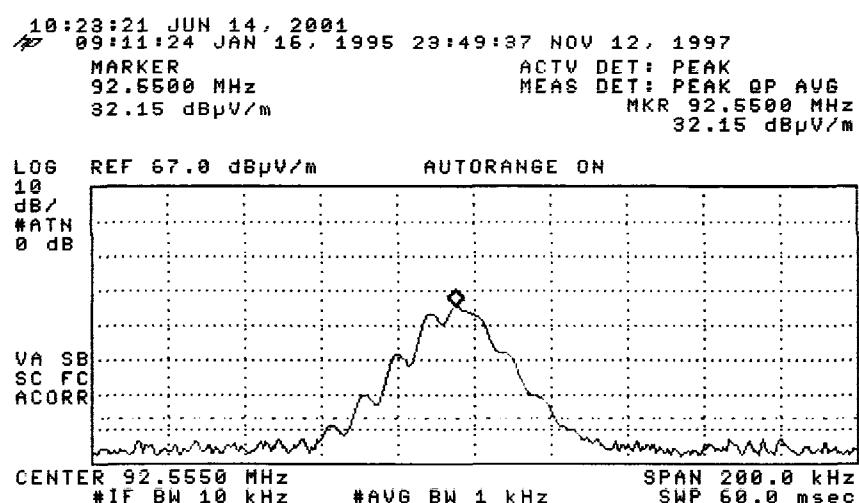

### 26dB Bandwidth of Fundamental Emission

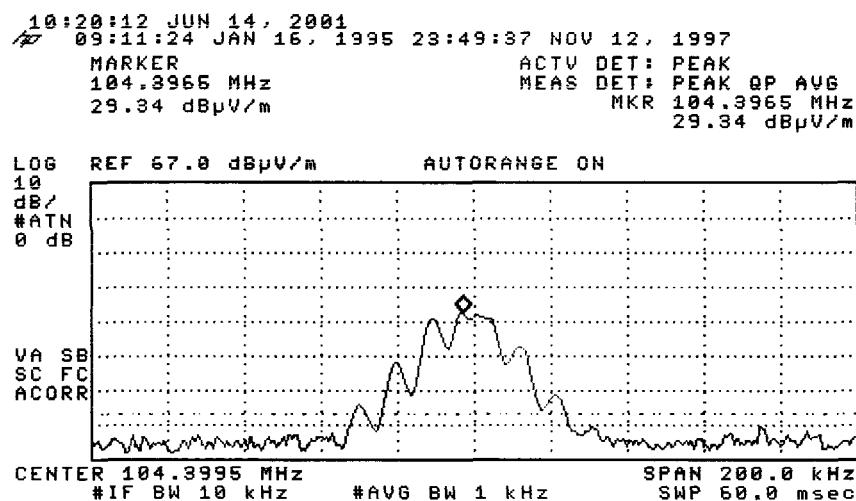

Date: 2000-06-18

# **TEST REPORT**

Page 18 of 21

No.: HM104846

## **Appendix A**

### **Test Equipment Audit**

#### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL.
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	18/07/00
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	18/07/00
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	18/07/00
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	18/07/00
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	18/07/00
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	18/07/00
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	CM
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	10/07/00
EM017	ANTENNA	ARA INC.	LPB-2513/A	1069	17/02/00
EM020	HORN ANTENNA	EMCO	3115	4032	09/08/00
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	30/03/98
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	15/02/01
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	31/05/00

#### **Conducted Emission**


EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	10/09/00
EM002	LISN	EMCO	3825-2	9005-1657	27/07/99
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	31/08/00
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	31/05/00
EM120	EMI TEST RECEIVER	R&S	ESHS10	1004.0401.10	04/09/00
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	N/A
EM142	PLUSE LIMITER	R & S	ESH3Z2	357.8810.52	29/01/00

Remarks:

CM      Corrective Maintenance  
N/A     Not Applicable or Not Available  
TBD    To Be Determined

**Appendix B****Modification Method:**

1. Change the resistance of R4 from  $22k\Omega$  to  $16k\Omega$ .
2. Change the coil L5 from four turns to three turns.
3. Change the capacitance of C5 from  $15pF$  to  $25pF$ .
4. Decrease the length of the antenna from original to 25cm.
5. Press or pull the coil L5 to tune the correction the bandwidth.

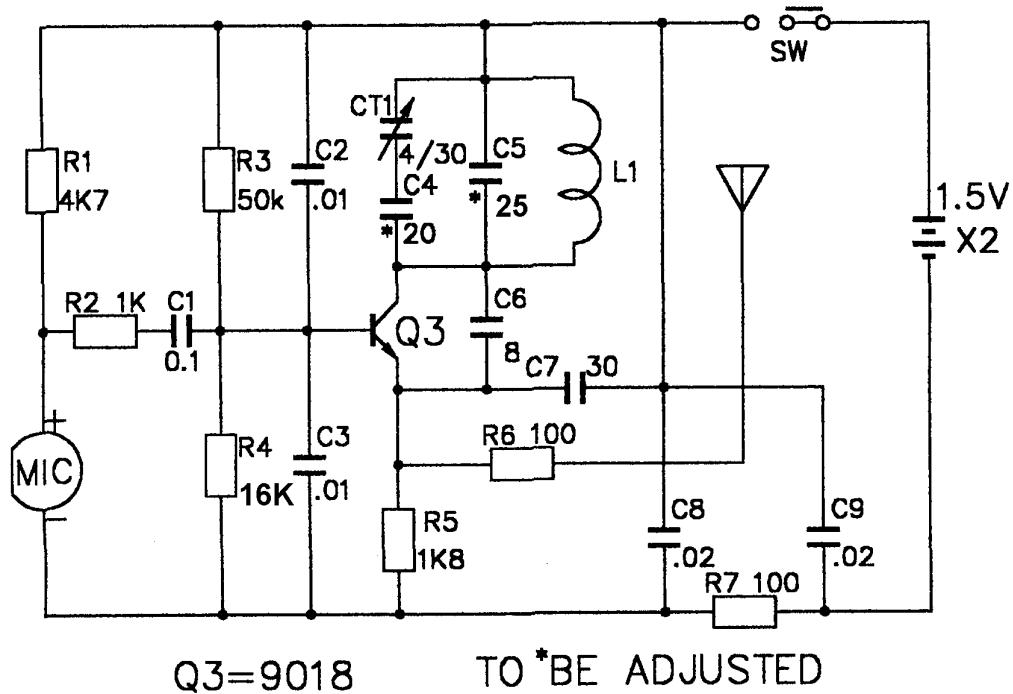

Date: 2000-06-18  
No.: HM104846

## **TEST REPORT**

Page 20 of 21

### **Appendix C**

#### **Photographs of EUT**


**Front View of the product**




**Rear View of the product**



**Inner Circuit Top View**

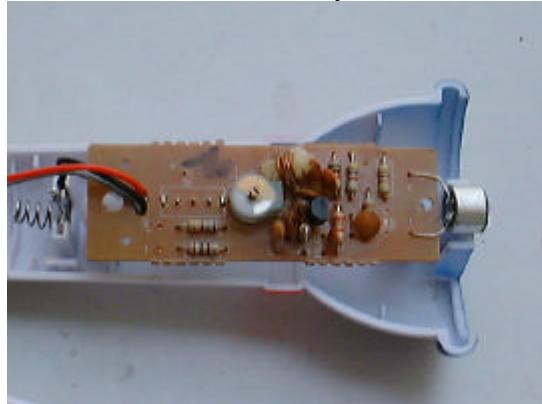

**Inner Circuit Bottom View**

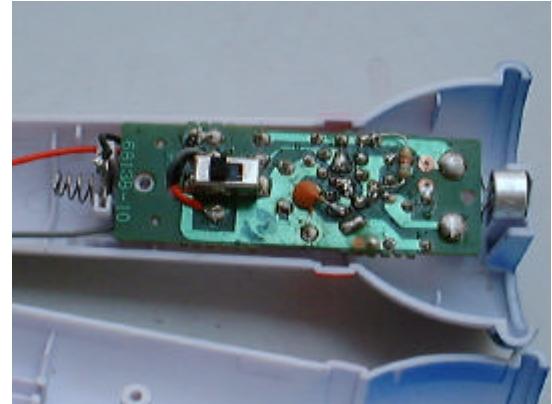

Date: 2000-06-18

No.: HM104846

## **TEST REPORT**

Page 21 of 21

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**



End of Document