


Si4010-C2

Functional Block Diagram

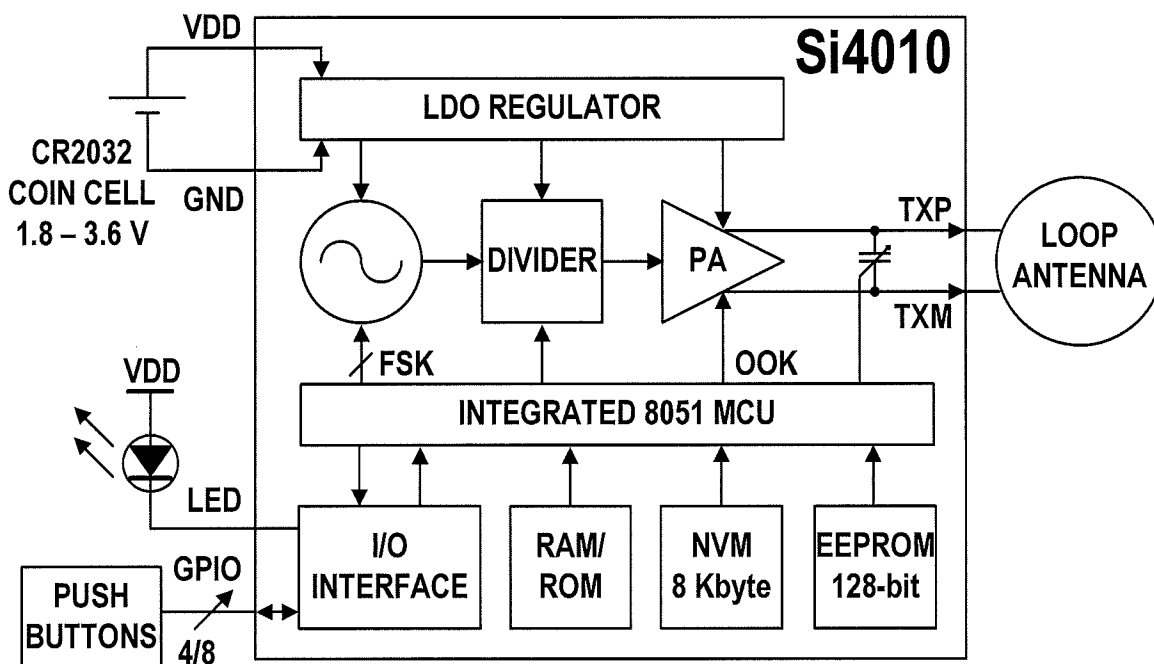

INTERNAL PROCESSOR CLOCK = 24MHz

INTERNAL RF CLOCK = 3.9GHz

FREQUENCY AND MODULATION SET BY FIRMWARE.
NO ADJUSTMENT OR CALIBRATION REQUIRED