



FCC ID: OYGTSSRE3TC

## EMI -- TEST REPORT

- FCC Part 15.231 -

<b>Test Report No. :</b>	<b>T31593-04-01HU</b>	02 July 2008 Date of issue
--------------------------	-----------------------	-------------------------------

**Type / Model Name** : Wheel Electronic / TSSRE3Tc

**Product Description** : Tire Safety System

**Applicant** : BERU AG

**Address** : Mörikestrasse 155  
71636 Ludwigsburg

**Manufacturer** : BERU AG

**Address** : Mörikestrasse 155  
71636 Ludwigsburg

**Licence holder** : BERU AG

**Address** : Mörikestrasse 155  
71636 Ludwigsburg

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>Positive</b>
----------------------------------------------------------------------------------	-----------------



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>5</b>
3.1	PHOTO DOCUMENTATION OF THE EUT	5
3.2	POWER SUPPLY SYSTEM UTILISED	8
3.3	SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	8
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>9</b>
4.1	ADDRESS OF THE TEST LABORATORY	9
4.2	ENVIRONMENTAL CONDITIONS	9
4.3	STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.4	MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	9
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS FOR 315 MHZ TRANSMITTER</u></b>	<b>11</b>
5.1	CONDUCTED EMISSIONS	11
5.2	RADIATED POWER OF THE FUNDAMENTAL WAVE	12
5.3	RADIATED EMISSIONS (ELECTRIC FIELD) 30 MHZ – 18 GHZ	14
5.4	CORRECTION FOR PULSE OPERATION (DUTY CYCLE)	19
5.5	EMISSION BANDWIDTH	22
5.6	SIGNAL DEACTIVATION	24
<b>6</b>	<b><u>TEST CONDITIONS AND RESULTS FOR 125 KHZ RECEIVER</u></b>	<b>26</b>
6.1	CONDUCTED EMISSIONS	26
6.2	RADIATED EMISSIONS (ELECTRIC FIELD)	27
<b>7</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>30</b>

## **1 TEST STANDARDS**

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (October, 2007)

Part 15, Subpart C, Section 15.231	Periodic operation in the band 40.66-40.70 MHz and above 70 MHz §15.231(a) Signal deactivation §15.231(b) Radiated emissions, Fundamental & Harmonics §15.231(c) Emission Bandwidth
Part 15, Subpart C, Section 15.35(c)	Correction for Pulse Operation (Duty Cycle)
Part 15, Subpart C, Section 15.207(a)	AC Line conducted emissions
Part 15, Subpart C, Section 15.209(a)	Radiated emissions, general requirements

FCC Rules and Regulations Part 15 Subpart B - Intentional Radiators (October 01, 2006)

Part 15, Subpart B, Section 15.107(a)	AC Line conducted emissions
Part 15, Subpart B, Section 15.109(a)	Radiated emissions, general requirements
Part 15, Subpart B, Section 15.111(a)	Antenna power conduction

## 2 SUMMARY

### GENERAL REMARKS:

The Wheel electronic consists of a 125 kHz Receiver and a 315 MHz Transmitter therefore contains this test report the transmitter tests according to FCC Part 15, Subpart C, Section 15.231 and the receiver tests according to FCC Part 15, Subpart B.

All radiated tests have been performed on samples which are in original state. For activating the EuT it has been laid into a pressure box where it was possible to change the pressure.

All other tests have been performed at PCB without any cabinet where it was possible to activate the EuT when we switch on the DC power with an external DC Power supply.

### FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 05. March 2007

Testing concluded on : 12. March 2007

Checked by:

Tested by:

\_\_\_\_\_  
Thomas Weise  
Dipl.-Ing.(FH)  
Laboratory Manager

\_\_\_\_\_  
Huber Markus

FCC ID: OYGTSSRE3TC

### 3 EQUIPMENT UNDER TEST

#### 3.1 Photo documentation of the EuT

Wheel Electronic / TSSRE3Tc

External Photo

Top view



Wheel Electronic / TSSRE3Tc


External Photo

Rear view



FCC ID: OYGTSSRE3TC


**Wheel Electronic / TSSRE3Tc**  
Internal Photo  
Top view of PCB

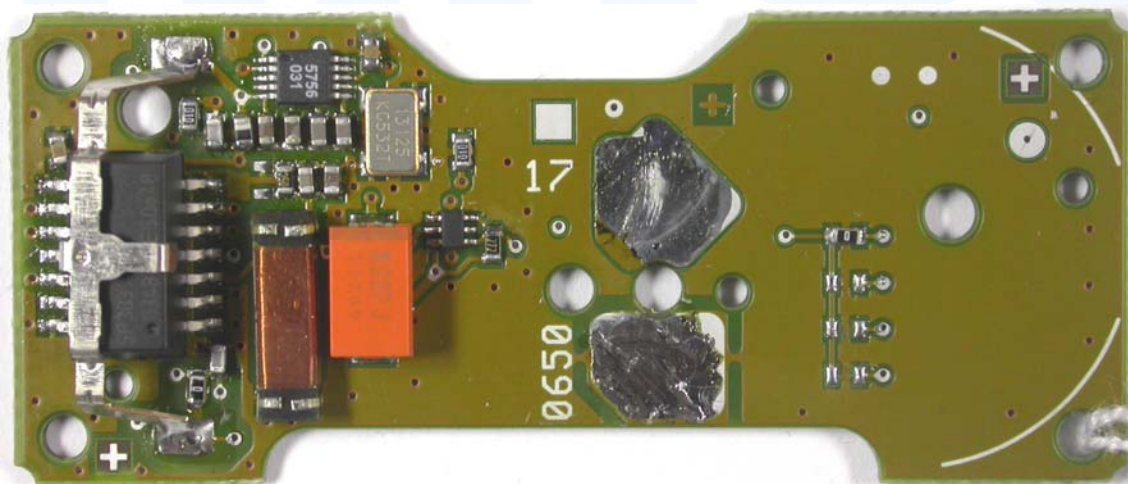




FCC ID: OYGTSSRE3TC

**Wheel Electronic / TSSRE3Tc**  
Internal Photo  
Part view of PCB

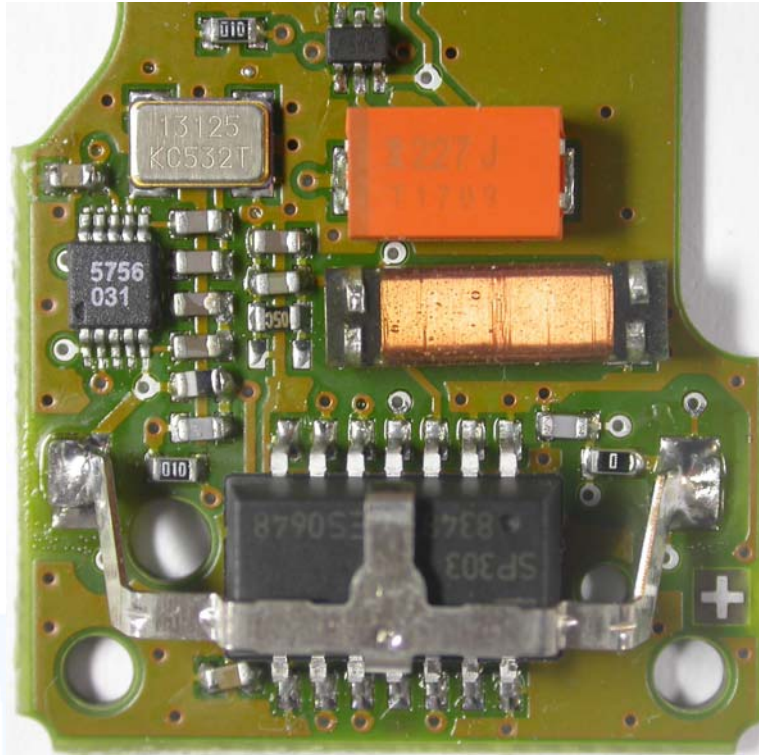

**Wheel Electronic / TSSRE3Tc**  
Internal Photo  
Rear view of PCB

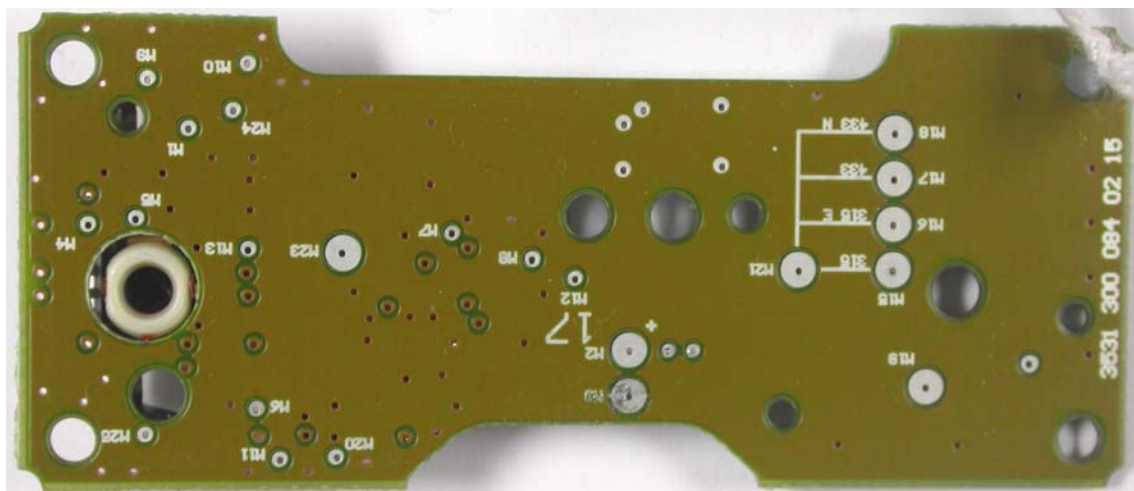

### 3.2 Power supply system utilised

Power supply voltage : 3.0 V / DC

### 3.3 Short description of the Equipment under Test (EuT)

The Wheel electronics measure the tire pressure and the air temperature in the tire and send these via a set radio route together with the residual battery life and the code (ID) to the digital antenna. For exactly description please refer to the technical documents.

Number of tested samples: 2  
Serial number: see Photo documentation of the EuT under Point 3 / Equipment Under Test

#### EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX-mode at frequency 315 MHz

---

- RX-mode at frequency 125 kHz

---

#### EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

#### The following peripheral devices and interface cables were connected during the measurements:

- Pressure Box Model : Supplies by the manufacturer
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_



## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**mikes-testingpartners gmbh**  
**Ohmstrasse 2-4**  
**94342 Strasskirchen**  
**Germany**

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### **4.4 Measurement Protocol for FCC, VCCI and AUSTEL**

#### **4.4.1 GENERAL INFORMATION**

##### **4.4.1.1 Test Methodology**

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1997), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1997). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

#### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum disturbances from the unit.

#### 4.4.2 **DETAILS OF TEST PROCEDURES**

##### General Standard Information

The test methods used comply with CISPR Publication 22 (1997), EN 55022 (2001) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

mikes

## **5 TEST CONDITIONS AND RESULTS FOR 315 MHZ Transmitter**

### **5.1 Conducted emissions**

For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**

Test location:

#### **5.1.2 Photo documentation of the test set-up**

#### **5.1.3 Description of Measurement**

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the DC power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

**Remarks:** The measurement is not applicable because the EuT is not powered by the system, but  
it is separated powered by a 3.0 V battery.

## 5.2 Radiated power of the fundamental wave



For test instruments and accessories used see section 6 Part CPR 2.

### 5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

### 5.2.2 Photo documentation of the test set-up

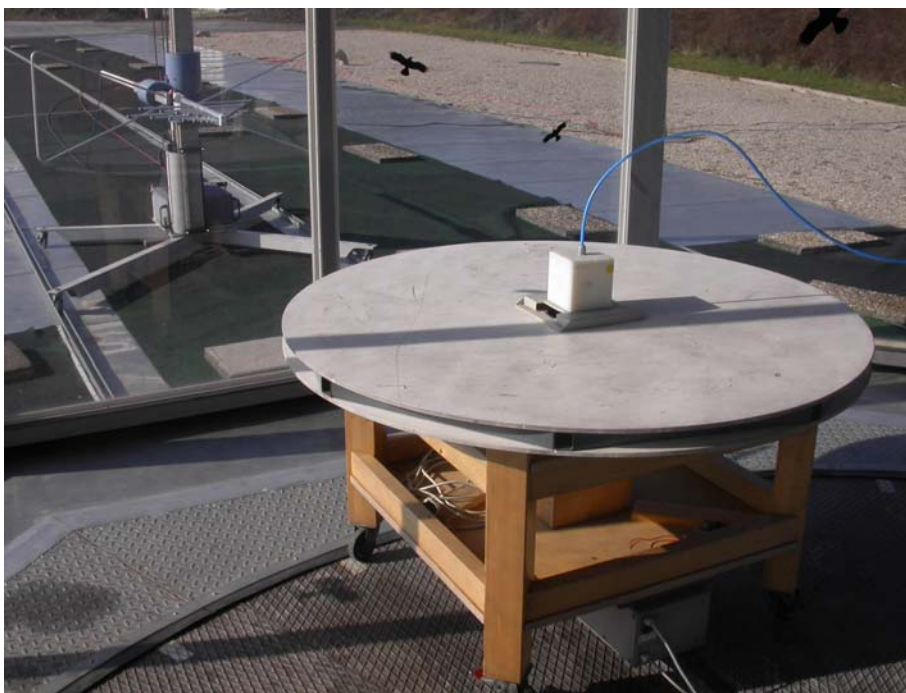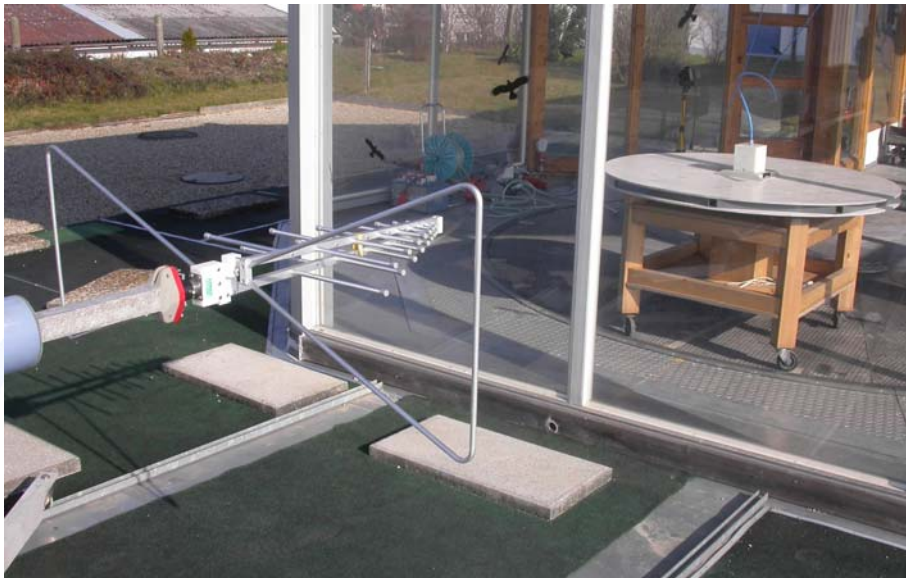

**5.2.3 Description of Measurement**

The radiated power of the fundamental wave from the EUT is measured in the frequency range of 30 to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization`s and the EuT are rotated 360 degrees.

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The resolution bandwidth during the measurement is as follows:  
30 MHz – 1000 MHz: ResBW: 120 kHz

**5.2.4 Test result**

Frequency [MHz]	L: QP [dBµV]	L: AV [dBµV]	L: PK [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	L: PK [dBµV/m]	Limit [dBµV/m]	Delta [dB]
315.0	48.9	14.3	53.4	120	16.3	65.2	30.6	69.7	75.6	-10.4

Limit according to FCC Subpart 15.231(b)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	(µV/m)	dB (µV/m)	(µV/m)	dB (µV/m)
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	<b>375 to 1250*</b>	<b>51,4 to 61,9*</b>
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

The requirements are **FULFILLED**.

Remarks:

---



---



---



---



FCC ID: OYGTSSRE3TC

### 5.3 Radiated emissions (electric field) 30 MHz – 18 GHz


For test instruments and accessories used see section 6 Part SER 2, SER 3.

#### 5.3.1 Description of the test location

Test location: OATS1  
Anechoic Chamber A2


Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up

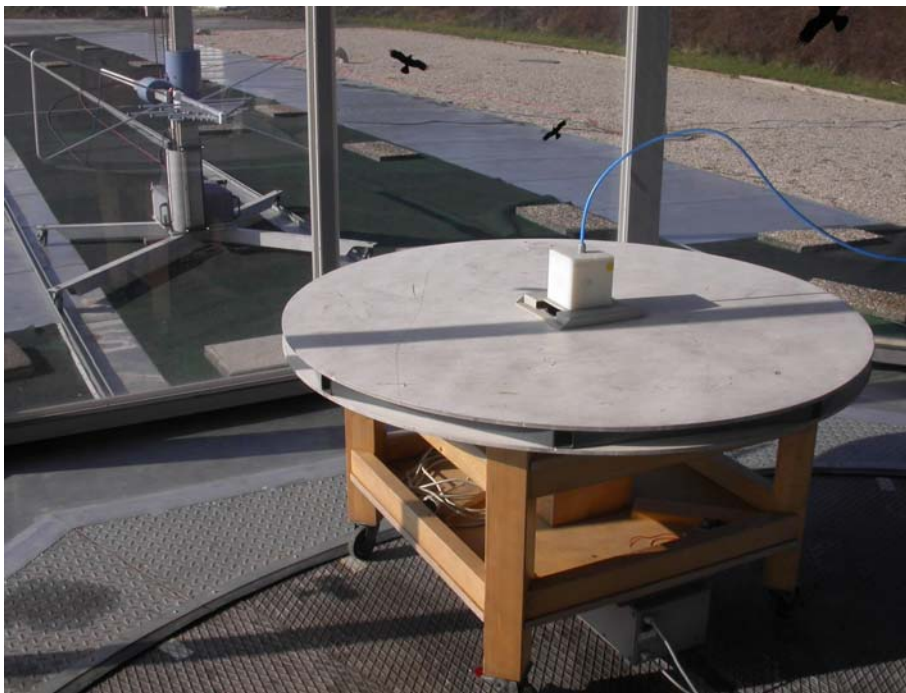



FCC ID: OYGTSSRE3TC

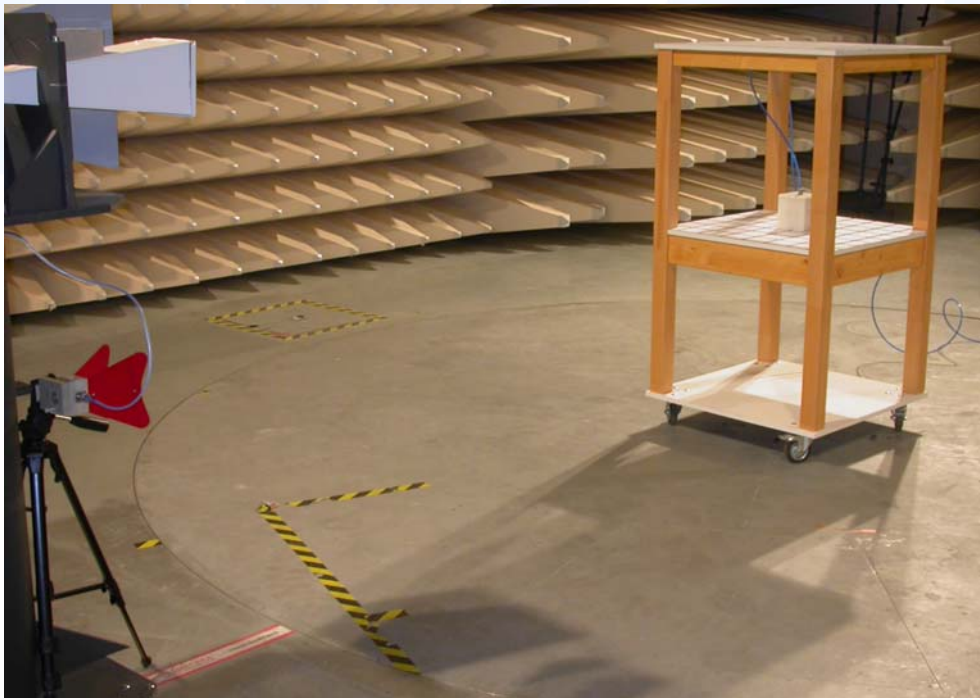

### 5.3.3 Description of Measurement

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization`s and the EuT are rotated 360 degrees.

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3 horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: ResBW: 120 kHz  
1000 MHz – 18000 MHz ResBW: 1 MHz

### 5.3.4 Test result

#### Testresult in detail:(<1GHz)

Frequency [MHz]	L: QP [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]
630.0	12.1	120	23.4	35.5	55.6	-20.1
945.0	3.1	120	27.8	30.9	55.6	-24.7

**Testresult in detail:(>1GHz)**

Frequency [MHz]	L: PK [dBµV]	Corr. Duty Cycle [dB]	L: AV [dBµV]	Band width [kHz]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	Limit AV [dBµV/m]	Delta [dB]
1295	60.1	-19.45	40.65	1000	-14.3	45.8	26.35	55.6	-29.25
1610	59.7	-19.45	40.25	1000	-13.8	45.9	26.45	54.0	-27.55
1925	51.9	-19.45	32.45	1000	-11.6	40.3	20.85	55.6	-34.75
2240	56.4	-19.45	36.95	1000	-10.1	46.3	26.85	54.0	-27.15
2870	53.2	-19.45	33.75	1000	-8.7	44.5	25.05	54.0	-28.95
3185	62.6	-19.45	43.15	1000	-7.3	55.3	35.85	55.6	-19.75

Limit according to FCC Subpart 15.231(b) Subpart 15.209(a) / Subpart 15.205(a)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	(µV/m)	dB (µV/m)	(µV/m)	dB (µV/m)
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	<b>375 to 1250*</b>	<b>51,4 to 61,9*</b>
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in the table above or to the general limits shown in the table below according to § 15.209, whichever limit permits a higher field strength.

Frequency [MHz]	15.209 Limits [µV/m]	15.209 Limits [dBµV/m]
30-88	100	40
88-216	150	43,5
<b>216-960</b>	<b>200</b>	<b>46</b>
<b>Above 960</b>	<b>500</b>	<b>54</b>

Besides is a limit according to §15.35(b) on the radio frequency emissions, as measured with a peak detector, corresponding to 20 dB above the maximum permitted average limits.

**Restricted bands of operation:**

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are **FULFILLED**.

**Remarks:** During the test, the Eut was set into continuous transmitting mode.

The measurement was performed up to the 10<sup>th</sup> harmonic (3150 MHz).


## 5.4 Correction for Pulse Operation (Duty Cycle)

For test instruments and accessories used see section 6 Part DC.

### 5.4.1 Description of the test location

Test location: AREA4

### 5.4.2 Photo documentation of the test set-up

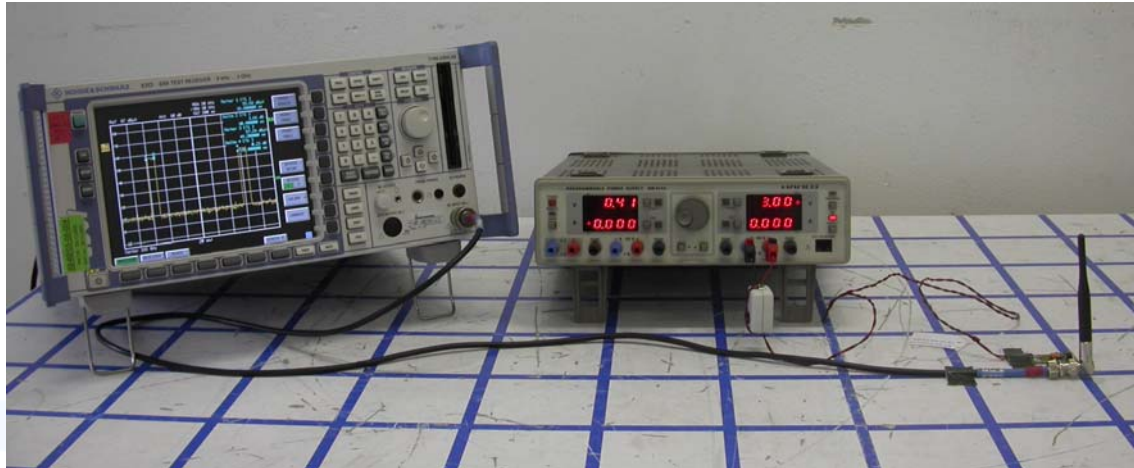

### 5.4.3 Description of Measurement

The Duty cycle factor, expressed in dB, is arrived by taking the following formula:

$$KE = 20 \log [(t_{iB} \cdot p) / T_w]$$

- KE: pulse operation correction factor [dB]
- $t_{iw}$ : pulse duration for one complete pulse track [msec]
- $t_{iB}$ : pulse duration for one pulse [ $\mu$ sec]
- $T_w$ : a period of the pulse track [msec]
- $p$ : number of pulses in one train

### 5.4.4 Test result


Duty cycle	$t_{iw}$ [msec]	$T_w$ [msec]	$t_{iB}$ [msec]	$p$	KE [dB / %]
Real Duty cycle					
Within 100 msec		100	10.65	1	-19.45 / 10.65

**Remarks:** The pulse train [ $T_w$ ] exceeds 100 ms, therefore the duty cycle have been calculated by averaging the sum of the pulsewidths over the 100 ms width with the highest average value.

For detailed results, please see the test protocol below.


5.4.5 Test protocol

**Correction for Pulse Operation (Duty Cycle)**  
FCC Part 15 Subpart 15.35(c)

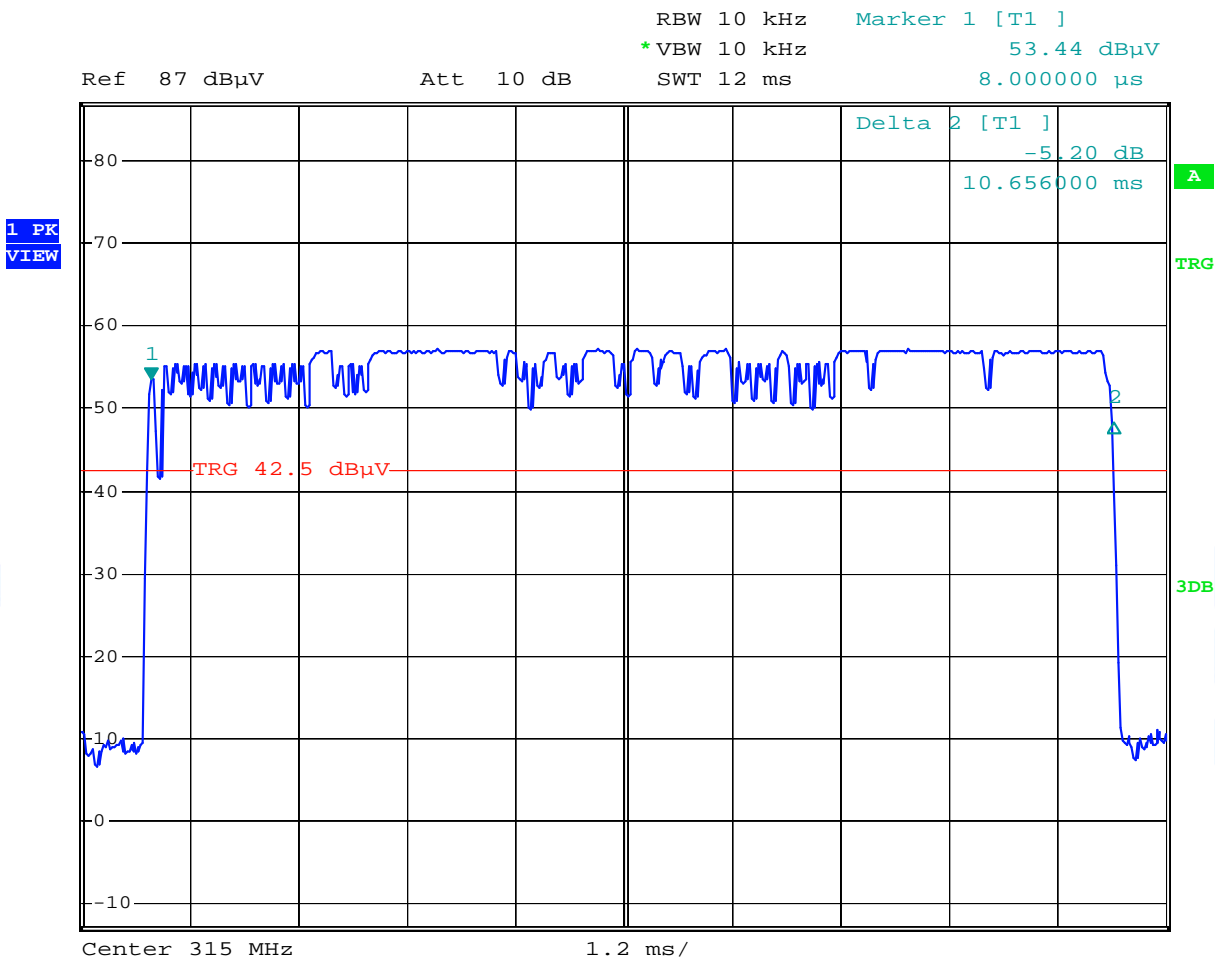



FCC ID: OYGTSSRE3TC

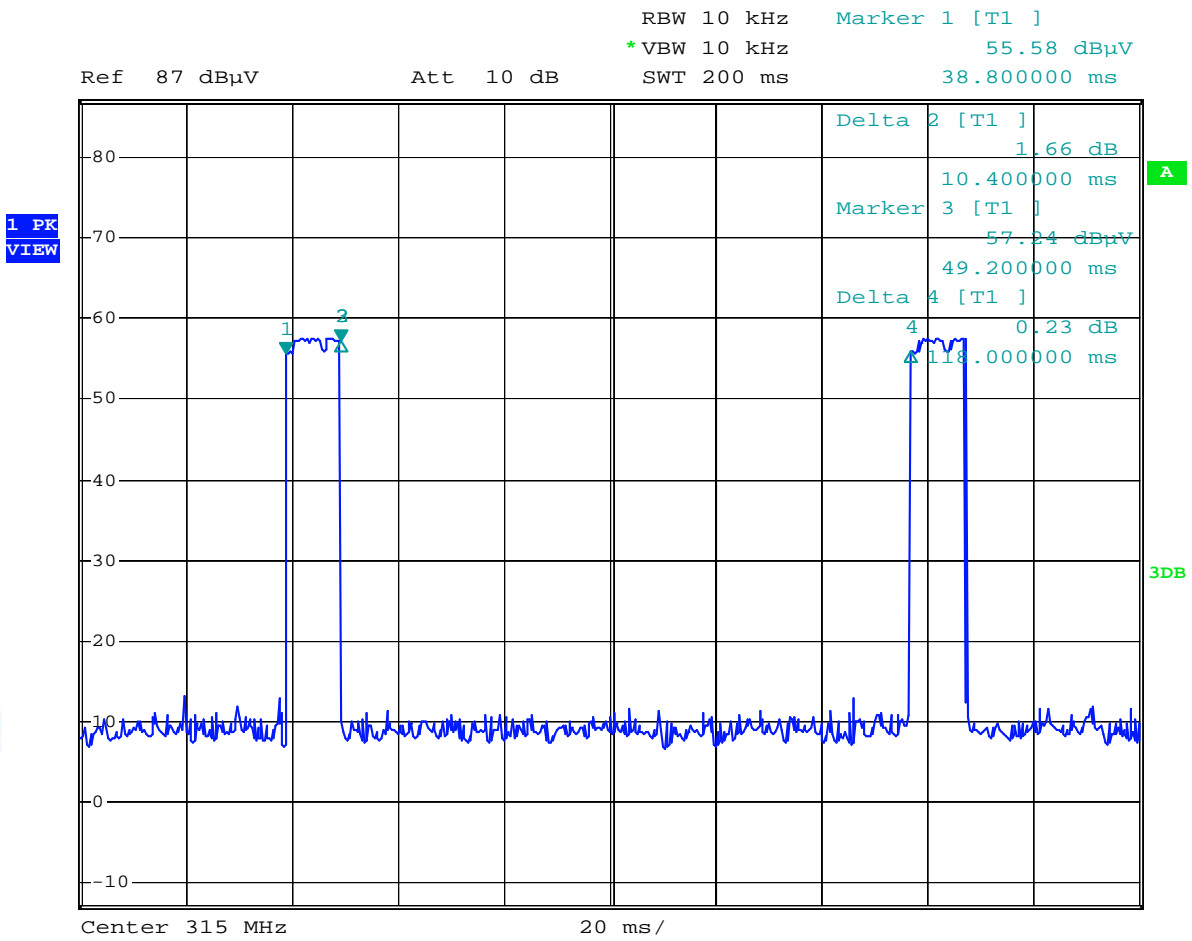

## 5.5 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

### 5.5.1 Description of the test location

Test location: AREA4

### 5.5.2 Photo documentation of the test set-up



### 5.5.3 Test result

Fundamental [MHz]	20dB Bandwidth F1 [MHz]	20dB Bandwidth F2 [MHz]	Measured Bandwidth [kHz]	LIMIT Fundamental f*0,0025 [kHz]
315.0	314.9469	315.0603	113.4	787.5

Limit according to FCC Part 15 Subpart 15.231(c):

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.


The requirements are **FULFILLED**.

**Remarks:** For detailed results, please see the test protocol below.

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

5.5.4 Test protocol

**Emission Bandwidth**  
FCC Part 15 Subpart 15.231(c)

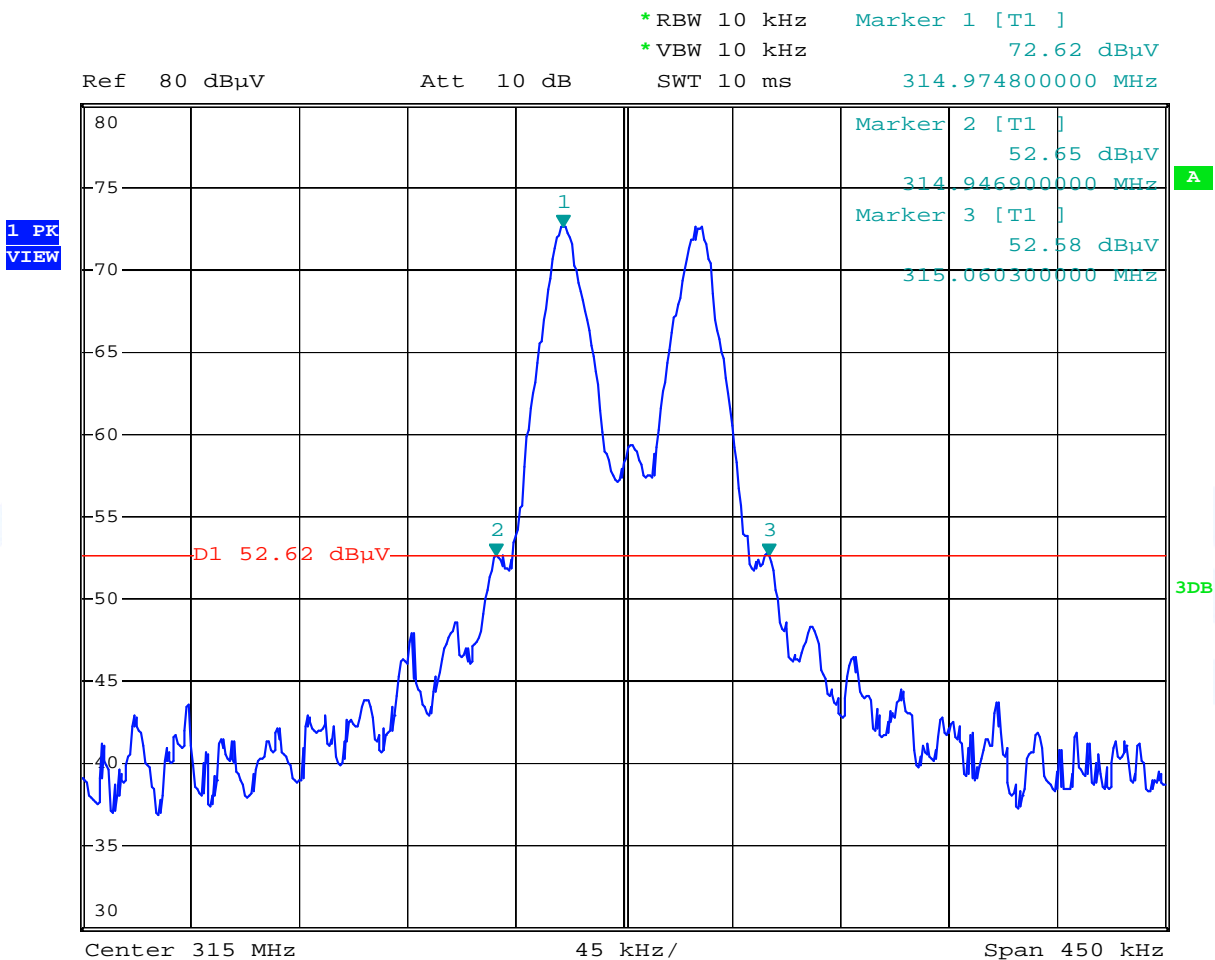


## 5.6 Signal deactivation

For test instruments and accessories used see section 6 Part MB.

### 5.6.1 Description of the test location

Test location: AREA4

### 5.6.2 Photo documentation of the test set-up

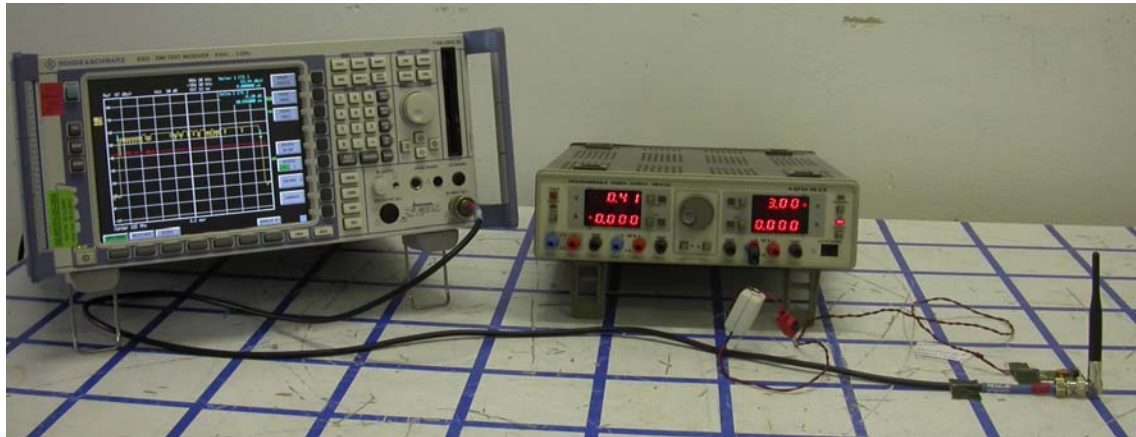

### 5.6.3 Test result

The duration of the transmission is 10,35 milliseconds each time the Trigger Transmitter TSSTSc triggered the EuT which meets the requirement of ceasing transmission within 5 seconds.

Limit according to FCC Part 15 Subpart 15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

The requirements are **FULFILLED**.

**Remarks:** For detailed test results, please see the test protocol below.  
\_\_\_\_\_  
\_\_\_\_\_



## 6 TEST CONDITIONS AND RESULTS FOR 125 KHz Receiver

### 6.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

#### 6.1.1 Description of the test location

Test location:

#### 6.1.2 Photo documentation of the test set-up

#### 6.1.3 Description of Measurement

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the DC power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

**Remarks:** The measurement is not applicable because the EuT is not powered by the system, but  
it is separated powered by a 3,0 V battery.  
 \_\_\_\_\_  
 \_\_\_\_\_



## 6.2 Radiated emissions (electric field)

For test instruments and accessories used see section 6 Part **SER 1**.

### 6.2.1 Description of the test location

Test location: OATS1

### 6.2.2 Photo documentation of the test set-up



**6.2.3 Description of Measurement**

Radiated emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization`s and the EuT are rotated 360 degrees.

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

The resolution bandwidth during the measurement is as follows:

0,009 MHz – 30 MHz	ResBW: 10 kHz
30 MHz – 1000 MHz:	ResBW: 120 kHz
Above 1000 MHz	ResBW: 1 MHz

**6.2.4 Test result**

**Testresult in detail:(<1GHz)**

Frequency [MHz]	L: QP [dBµV]	L: AV [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	Limit [dBµV/m]	Delta [dB]
0,009-30			0,2 - 10		< 30			

FCC ID: OYGTSSRE3TC

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ )	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

Limit according to FCC Part 15 Subpart 15.109(a)

Frequency [MHz]	15.109 Limits [ $\mu\text{V/m}$ ]	15.109 Limits [dB $\mu\text{V/m}$ ]
30-88	100	40
88-216	150	43,5
<b>216-960</b>	<b>200</b>	<b>46</b>
<b>Above 960</b>	<b>500</b>	<b>54</b>

The requirements are **FULFILLED**.

**Remarks:** According to FCC Part 15.33(b), the measurement was performed up to 30 MHz.

---

## 7 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test Report No: T31593-04-01HU  
 Beginning of Testing: 05 März 2007  
 End of Testing: 12 März 2007

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.
CPR 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B/+11N-50-10-5/+11N		RF Cable 33m	Huber + Suhner
	02-02/50-05-031			
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
DC	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-004
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
MB	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-004
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-001
	HM-8142	Power Supply	A.H.-Systems Inc.	02-02/50-05-047
SER 1	FMZB 1516	Magnetic Field Antenna	Schwarzbeck Mess-Elektronik	01-02/24-01-018
	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-004
	S10162-B/+11N-50-10	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
SER 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B/+11N-50-10	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
SER 3	R 3162	Spectrum Analyzer	Advantest	02-02/11-05-003
	AFS4-01000400-10-10P-4	RF Amplifier 1-4 GHz	PARZICH GMBH	02-02/17-05-003
	AMF-4F-04001200-15-10P	RF Amplifier 4-12 GHz	PARZICH GMBH	02-02/17-05-004
	AFS5-12001800-18-10P-6	RF Amplifier 12-18 GHz	PARZICH GMBH	02-02/17-06-002
	3117	Horn Antenna 1-18 GHz	EMCO Elektronik GmbH	02-02/24-05-009
	Sucoflex N-1600-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-073
	Sucoflex N-2000-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-075

Test Report No: T31593-04-01HU  
 Beginning of Testing: 05 März 2007  
 End of Testing: 12 März 2007

Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
<b>CPR2</b>				
02-02/03-05-006	07/24/2008	07/24/2007		
02-02/24-05-005	05/06/2011	05/06/2008	08/21/2008	02/21/2008
02-02/50-05-031				
02-02/50-05-033				
02-02/50-05-113				
<b>DC</b>				
02-02/03-05-004	01/08/2009	01/08/2008		
02-02/13-05-001	09/03/2008	09/03/2007		
02-02/50-05-047				
<b>MB</b>				
02-02/03-05-004	01/08/2009	01/08/2008		
02-02/13-05-001	09/03/2008	09/03/2007		
02-02/50-05-047				
<b>SER 1</b>				
01-02/24-01-018	02/20/2009	02/20/2008		
02-02/03-05-004	01/08/2009	01/08/2008		
02-02/50-05-031				
02-02/50-05-033				
02-02/50-05-113				
<b>SER 2</b>				
02-02/03-05-006	07/24/2008	07/24/2007		
02-02/24-05-005	05/06/2011	05/06/2008	08/21/2008	02/21/2008
02-02/50-05-031				
02-02/50-05-033				
02-02/50-05-113				
<b>SER 3</b>				
02-02/11-05-003	09/17/2009	09/17/2007	09/17/2008	09/17/2007
02-02/17-05-003				
02-02/24-05-006	10/28/2008	04/28/2008		
02-02/50-05-075				
02-02/50-05-088				