

5.2 Radiated power of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 2.

5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.2.2 Photo documentation of the test set-up



FCC ID: OYG 0532 201 009 00 00

5.3 Radiated emissions (electric field) 30 MHz – 18 GHz

For test instruments and accessories used see section 6 Part SER 2, SER 3.


5.3.1 Description of the test location

Test location: OATS1
Anechoic Chamber A2

5.3.2 Photo documentation of the test set-up



FCC ID: OYG 0532 201 009 00 00

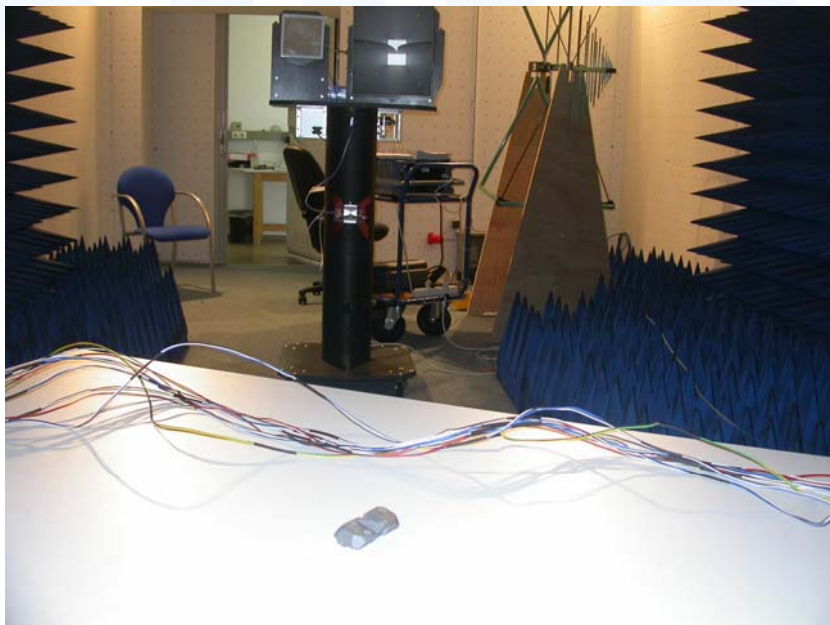

File No. **T30159-00-03XF**, page **16** of **32**

5.4 Correction for Pulse Operation (Duty Cycle)

For test instruments and accessories used see section 6 Part DC.

5.4.1 Description of the test location

Test location: AREA4

5.4.2 Photo documentation of the test set-up



5.4.3 Description of Measurement

The Duty cycle factor, expressed in dB, is arrived by taking the following formula:

$$KE = 20 \log [(t_{IB} \cdot p) / T_w]$$

KE: pulse operation correction factor [dB]
 t_{IW} pulse duration for one complete pulse track [msec]
 t_{IB} pulse duration for one pulse [μ sec]
 T_w a period of the pulse track [msec]
 p number of pulses in one train

5.5 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

5.5.1 Description of the test location

Test location: AREA4

5.5.2 Photo documentation of the test set-up



5.5.3 Test result

Fundamental [MHz]	20dB Bandwidth F1 [MHz]	20dB Bandwidth F2 [MHz]	Measured Bandwidth [kHz]	LIMIT Fundamental f*0,0025 [kHz]
433,92	433,8750	433,9911	116,1	1084,8

Limit according to FCC Part 15 Subpart 15.231(c):

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The requirements are

Remarks: For detailed results, please see the test protocol below.

5.6 Signal deactivation

For test instruments and accessories used see section 6 Part MB.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up



5.6.3 Test result

The duration of the transmission is 10,00 milliseconds each time which meets the requirement of ceasing transmission automatically within 5 seconds after activation.

Limit according to FCC Part 15 Subpart 15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

The requirements are **FULFILLED**.

Remarks: For detailed test result, please see the test protocol below.

6.2 Radiated emissions (electric field)

For test instruments and accessories used see section 6 Part SER 2.

6.2.1 Description of the test location

Test location: OATS1

6.2.2 Photo documentation of the test set-up

