



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822  
 Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>



Dates of Tests: : Aug 6 ~ 20, 2012  
 Test Report S/N: LR500111208F  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**OYJGP-1000T**

APPLICANT

**NTT WORKS CO.,LTD.**

## TEST REPORT

**Equipment Class** : Part 15 Security/Remote Control Transmitter  
**Manufacturing Description** : Wireless Calling System  
**Manufacturer** : NTT WORKS CO.,LTD.  
**Model name** : GP-1000T  
**Test Device Serial No.:** : Identification  
**Rule Part(s)** : FCC Part 15 Subpart C ; ANSI C-63.4-2003  
**Frequency Range** : 433.42 MHz  
**Data of issue** : August 21, 2012

This test report is issued under the authority of:

Kyu-Hyun Lee, Manager

The test was supervised by:

Jung-Moo Her, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION'S -----	3
2. INFORMATION'S ABOUT TEST ITEM -----	4
3. ANTENNA REQUIREMENTS -----	5
4. TEST REPORT	6
4.1 SUMMARY OF TESTS -----	6
4.2 TEST LIMITS -----	7
4.3 TRANSMITTER REQUIREMENTS	8
4.3.1 CONDUCTED EMISSION -----	8
4.3.2 RADIATED EMISSION -----	11

## **APPENDIX**

APPENDIX 1 BANDWIDTH OF EMISSION -----	14
APPENDIX 2 THE EMITTING TIME OF FUNDAMENTAL FREQUENCY -----	16
APPENDIX 3 TEST EQUIPMENT USED FOR TESTS -----	18

## 1. General information's

### **1-1 Test Performed**

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### **1-2 Accredited agencies**

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2012-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2013-04-24	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	2013-04-13	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing

## 2. Information's about test item

### **2-1 Client & Manufacturer**

Company name : NTT WORKS CO.,LTD.  
 Address : 413-9 NTTWORKS Bldg, Galhyun-Dong, Eunpyong- Gu, Seoul, Korea  
 Telephone / Facsimile : TEL No : +82-2-387-3190 / FAX No : +82-2-352-8672

### **2-2 Equipment Under Test (EUT)**

Trade name : SYSCALL  
 Model name : GP-1000T  
 Serial number : Identification  
 Date of receipt : Aug 2, 2012  
 EUT condition : Pre-production, not damaged  
 Antenna type : Dipole Antenna  
 Frequency Range : 433.42 MHz  
 RF Output Power : Below 10 mW  
 Type of Modulation : FSK  
 Power Source : DC 12.0V By Adapter  
 Firmware version : V1.0

### **2-3 Ancillary Equipment**

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

### **3. Antenna Requirements**

#### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The Antenna Connector and the Whip Antenna of NTT WORKS meet the requirements of Part 15.203 for a unique connector at each location

Conclusion:

The **NTT WORKS FCC ID: OYJGP-1000T** unit complies with the requirement of §15.203.

## 4. Test Report

### 4.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
FCC Part 15.205/209	Restricted Bands of Operation	Radiated	C
FCC Part 15.231 a)	Operation mode		C <sup>2)</sup>
FCC Part 15.231 b)	Radiated emissions		C
FCC Part 15.231 c)	20dB Bandwidth		C
15.207 /15.107	AC Conducted Emissions	Line Conducted	NA <sup>3)</sup>

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2 The emitting time of fundamental frequency is less than 5seconds.

Refer to the APPENDIX 2.

Note 3: This device is only operated by battery.

Note 4: The data in this test report are traceable to the national or international standards.

#### A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

**Note 1:** The sample was tested according to the following specification:

FCC Parts 15 Subpart C ; ANSI C-63.4-2003

## 4.2 Test Limits

### Section 15.231. Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz.

(a) The provisions of this Section are restricted to periodic operation within the band 40.66 - 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

### Reviewed Results:

Rule Part No.	Description of Rule	Yes	No	N/A
Part 15.231(a)	Continuous transmission		No	
Part 15.231(a)	Control Signals		No	
Part 15.231(a)	Data transmission with control signal	Yes		
Part 15.231(a)(1)	Manually operated	Yes		
	Automatically deactivate within 5 seconds of being released			N/A
Part 15.231(a)(2)	Automatically operated	Yes		
	Deactivate within 5 seconds after activation	Yes		
Part 15.231(a)(3)	Periodic transmission at regular predetermined intervals		No	
	Polling or supervision transmission, including data, to determine system integrity or transmitters used in security or safety applications requires no total duration of transmission not exceeding 2s/hr.	Yes		
Part 15.231(a)(4)	Operation involving fire, security, or safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.		No	

## 4.3 Transmitter requirements

### 4.3.1 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: **Complies**

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions

#### Minimum Standard: FCC Part 15.107


Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	79 dBuV	66 dBuV
0.5 ~ 30	73 dBuV	60 dBuV

\* Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Conducted Emissions – LINE

243 Jibug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-3236008,9  
Fax :+82-31-3236010

EUT / Model No. : GP-1000T Phase : LINE  
-----  
Test Mode : Tx mode Test Power : 120 / 60  
Temp./Humi. : 22 / 49 Test Engineer : Ko Gun  
-----

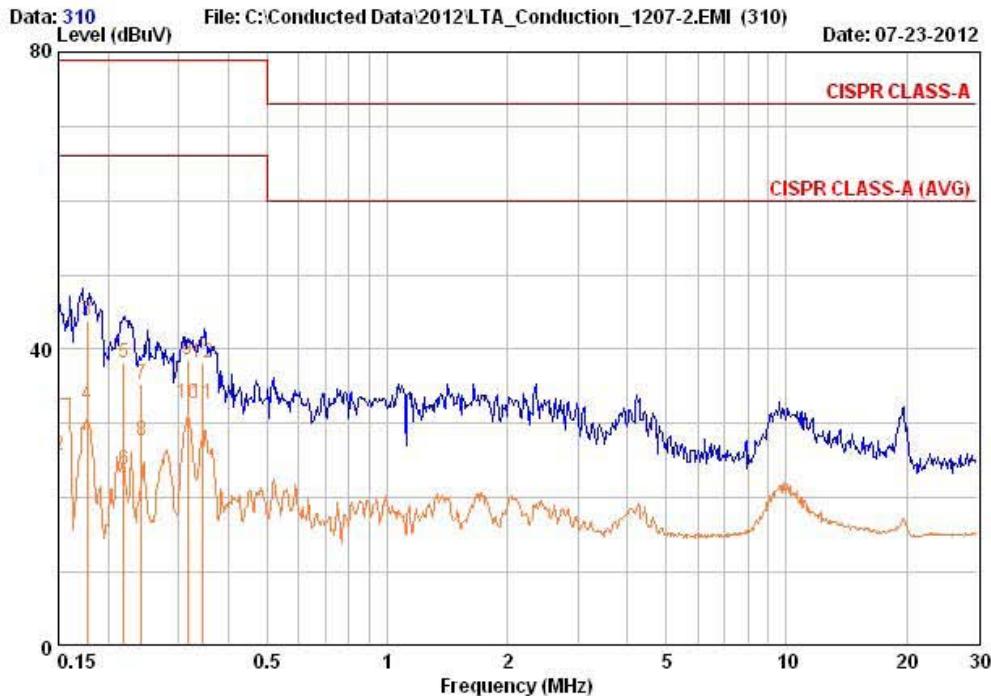


Freq MHz	RD QP	RD AV	C. F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.150	30.74	16.04	9.67	40.41	25.71	79.00	66.00	38.59	40.29
0.177	34.14	22.94	9.64	43.78	32.58	79.00	66.00	35.22	33.42
0.218	28.54	14.14	9.59	38.13	23.73	79.00	66.00	40.87	42.27
0.242	25.83	18.03	9.57	35.41	27.61	79.00	66.00	43.59	38.39
0.316	29.03	23.13	9.59	38.62	32.72	79.00	66.00	40.38	33.28
0.345	28.53	23.03	9.60	38.13	32.63	79.00	66.00	40.87	33.37

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

Conducted Emissions – NEUTRAL

243 Jubug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-3236008,9  
Fax :+82-31-3236010

EUT / Model No. : GP-1000T Phase : NEUTRAL  
-----  
Test Mode : Tx mode Test Power : 120 / 60  
Temp./Humi. : 22 / 49 Test Engineer : Ko Gun  
-----

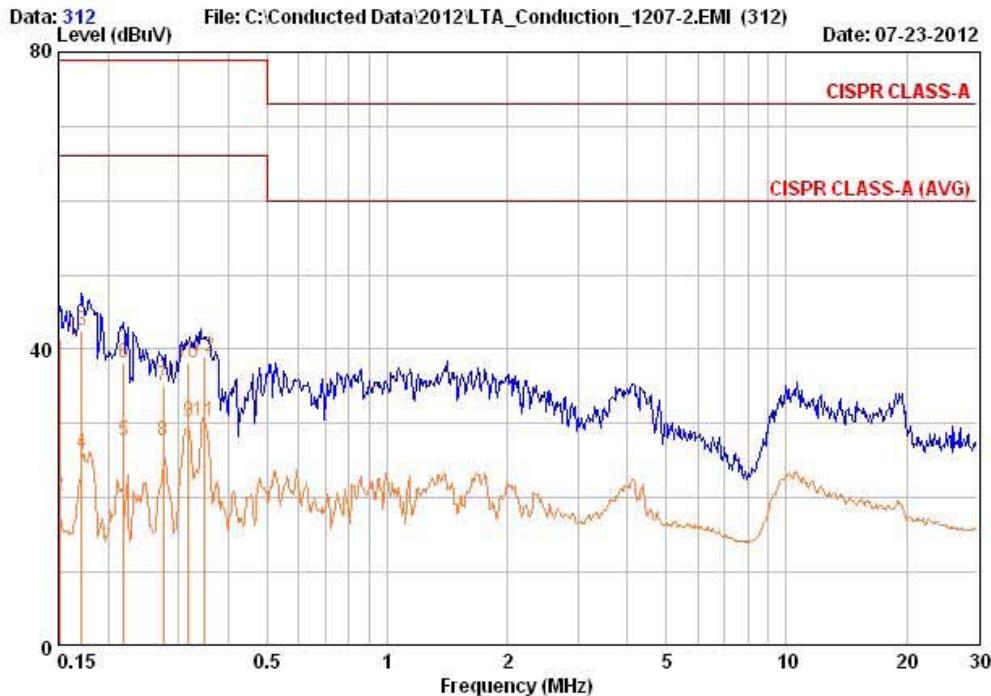

Freq MHz	RD QP		RD AV		C. F dB	Result dBuV	Result QP		Limit dBuV	Limit QP	Margin dB	Margin dB
	dBuV	dBuV	dBuV	dBuV			dBuV	dBuV				
0.151	31.74	10.74	9.60	41.34	41.34	20.34	79.00	66.00	37.66	37.66	45.66	45.66
0.171	33.04	16.34	9.56	42.60	42.60	25.90	79.00	66.00	36.40	36.40	40.10	40.10
0.218	28.54	18.04	9.57	38.10	38.10	27.60	79.00	66.00	40.90	40.90	38.40	38.40
0.275	25.53	18.03	9.60	35.13	35.13	27.63	79.00	66.00	43.87	43.87	38.37	38.37
0.317	28.53	20.73	9.57	38.10	38.10	30.30	79.00	66.00	40.90	40.90	35.70	35.70
0.347	29.33	20.73	9.60	38.93	38.93	30.33	79.00	66.00	40.07	40.07	35.67	35.67

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

### 4.3.2 Radiated Emission

#### Definition:

The field strength of emissions from intentional radiators was measured.

Test method	: FCC Part 15.205 / 209
Transmit Frequency	: 433.42 MHz
Frequency Range	: 30 MHz ~ 10 <sup>th</sup> harmonic.
Bandwidth	: 120 kHz (F < 1GHz) 1 MHz (F > 1GHz)
Distance of antenna	: 3 meters
Test mode	: Tx mode
Result	: <b>Complies</b>

#### Measurement Data:

- No other emissions were detected at a level greater than 20dB below limit.
- Refer to the next page.

#### Field Strength Limit of fundamental and Harmonics: Part 15.231(b)

Frequency (MHz)	Limit @ 3m
433.42	41.6667(433.42) – 7083.3333 = 10975 uV/m = 80.8 dBuV/m (Average) 100.8dBuV/m (Peak)
Harmonics	60.8 dBuV/m (The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.)

#### Part 15.209 LIMIT:

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100**
88 ~ 216	150**
216 ~ 960	200**
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Measurement Data:**

<b>Frequency</b> [MHz]	<b>Reading</b> [dBuV/m]		<b>Pol.</b>	<b>Correction Factor</b>	<b>Limits</b> [dBuV/m]		<b>Result</b> [dBuV/m]		<b>Margin</b> [dB]	
	<b>AV</b>	<b>Peak</b>			<b>AV</b>	<b>Peak</b>	<b>AV</b>	<b>Peak</b>	<b>AV</b>	<b>Peak</b>
433.43	83.63	84.22	V	-7.46	80.8	100.8	76.17	76.76	4.63	24.04
866.84	51.54	55.58	V	1.18	60.8	80.8	52.72	56.76	8.08	24.04
1300.28	48.82	52.81	V	-4.75	60.8	80.8	44.07	48.06	16.73	32.74
1733.65	49.02	52.56	V	-3.30	60.8	80.8	45.72	49.26	15.08	31.54

\*restricted band of operation §15.205

\* Result level = Reading value + Antenna factor – Amp Gain + Cable Loss

\* This EUT was tested in 3 orthogonal positions and the worst-case data was presented.

**Note 1:** No other emission were detected at a level greater than 20 dB below limit.

**Note 2:** All readings above 1GHz were taken using a peak detector function at a distance of 3 meters.

**Note 3:** 433.43MHz is Fundamental Frequency

Radiated Emissions


243 Jibug-ri, yangji-Myeon, Youngin-si,  
Gyeonggi-do 449-822 Korea  
Tel :+82-31-3236008,9  
Fax :+82-31-3236010

EUT/Model No.: GP-1000T

TEST MODE: Tx mode

Temp Humi : 28 / 57


Tested by: Ko Gun

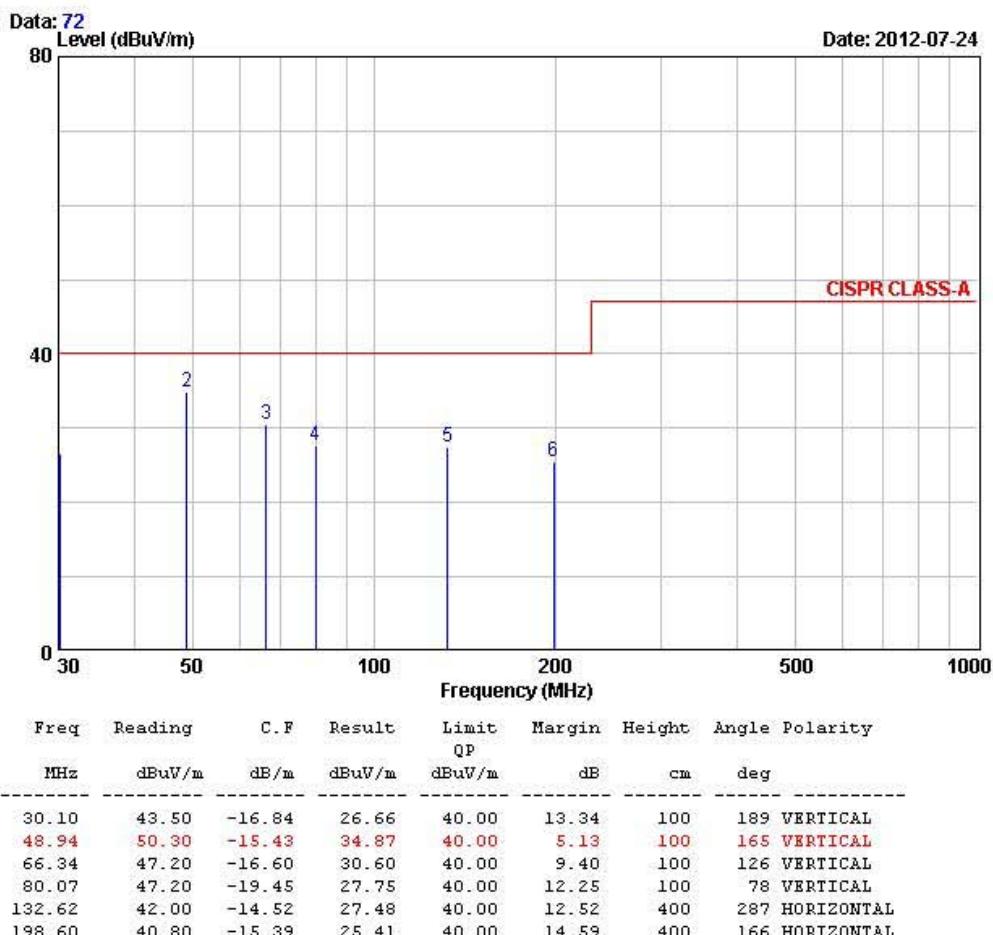

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

## APPENDIX 1



### BANDWIDTH OF EMISSION

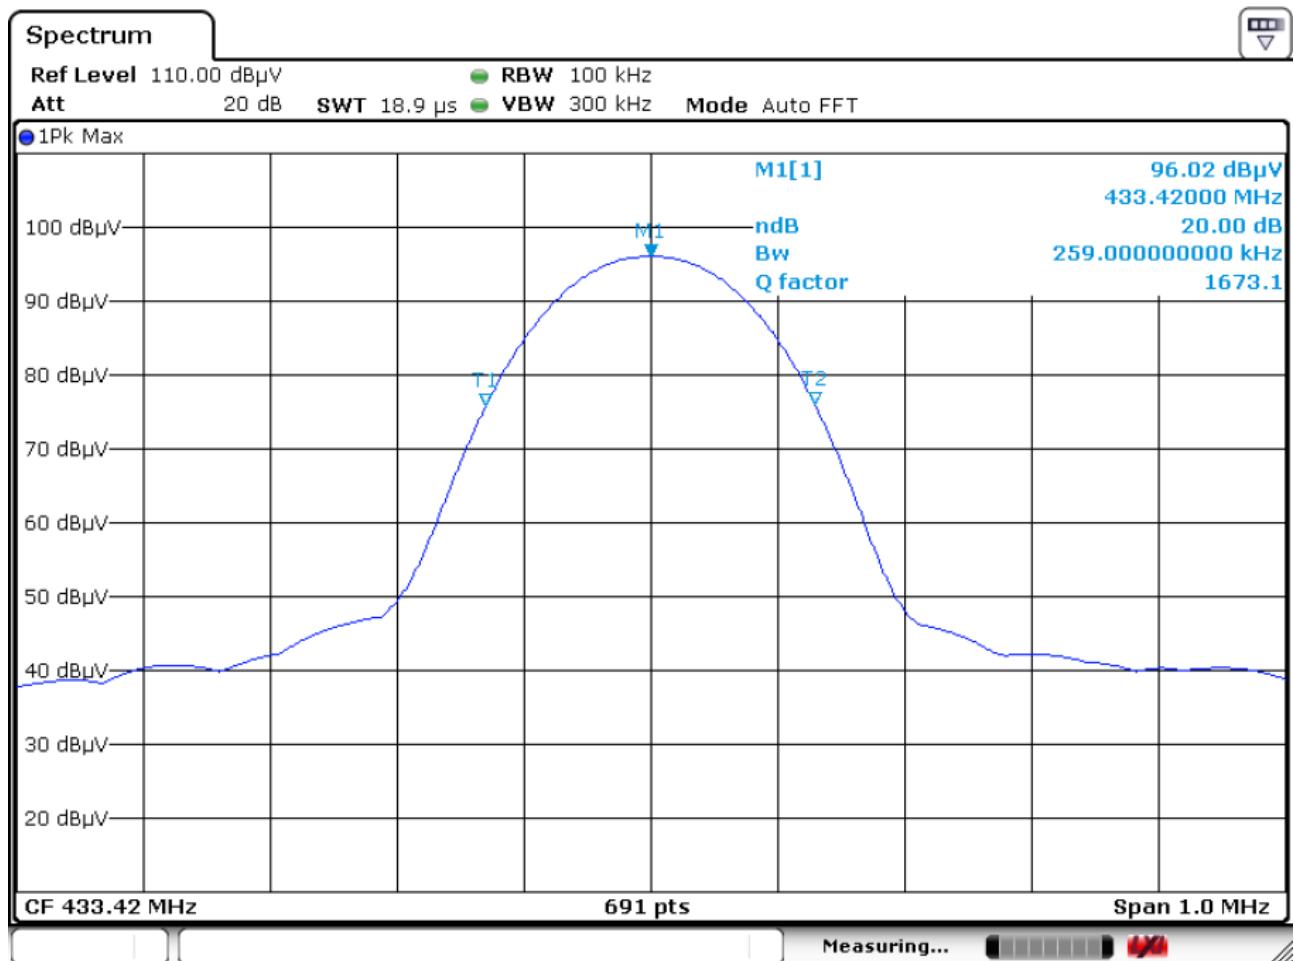

APPENDIX 2

**THE EMITTING TIME OF FUNDAMENTAL FREQUENCY**

## The Emitting time of Fundamental Frequency

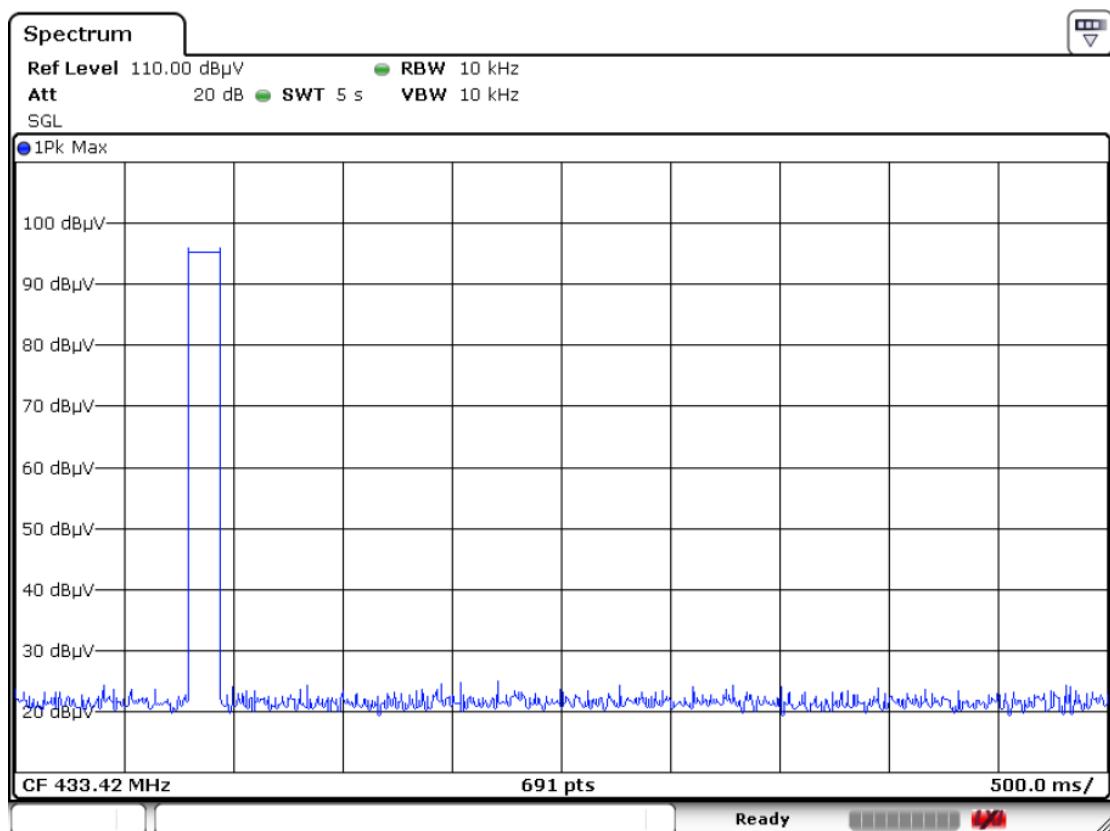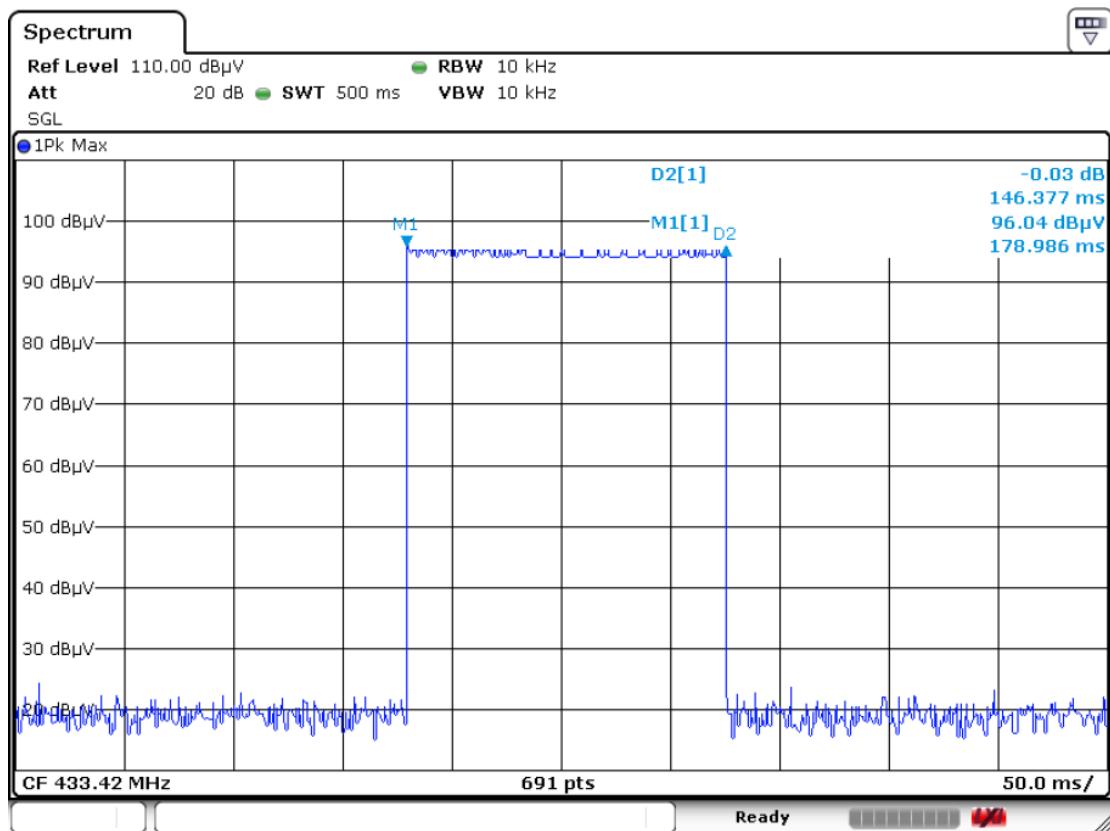

Note . The above plots is the worst case plots generated with the full data rate.

## APPENDIX 3

### TEST EQUIPMENT USED FOR TESTS

	<b>Description</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Manufacturer</b>	<b>Interval</b>	<b>Last Cal. Date</b>
1	Spectrum Analyzer (~30GHz)	FSV-30	100757	R&S	1 year	2012-01-10
2	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2012-03-26
3	Signal Generator (1~20GHz)	83711B	US34490456	HP	1 year	2012-03-26
4	Attenuator (3dB)	8491A	37822	HP	2 year	2010-10-08
5	Attenuator (10dB)	8491A	63196	HP	2 year	2010-10-08
6	Attenuator (30dB)	8498A	3318A10929	HP	2 year	2011-01-05
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2012-03-26
8	EMI Test Receiver (~1GHz)	ESCI7	100722	R&S	1 year	2011-10-07
9	RF Amplifier (~1.3GHz)	8447D	2439A09058	HP	2 year	2010-10-08
10	RF Amplifier (1~18GHz)	8449B	3008A02126	HP	2 year	2012-03-26
11	Horn Antenna (1~18GHz)	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2010-12-24
12	Horn Antenna (18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2010-11-25
13	Horn Antenna (18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2010-11-25
14	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	2 year	2010-10-07
15	Dipole Antenna	VHA9103	2116	SCHWARZBECK	2 year	2010-11-25
16	Dipole Antenna	VHA9103	2117	SCHWARZBECK	2 year	2010-11-25
17	Dipole Antenna	VHA9105	2261	SCHWARZBECK	2 year	2010-11-25
18	Dipole Antenna	VHA9105	2262	SCHWARZBECK	2 year	2010-11-25
19	Hygro-Thermograph	THB-36	0041557-01	ISUZU	2 year	2013-04-26
20	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
21	Power Divider	11636A	6243	HP	2 year	2010-10-08
22	DC Power Supply	6622A	3448A03079	HP	-	-
23	Frequency Counter	5342A	2826A12411	HP	1 year	2012-03-26
24	Power Meter	EPM-441A	GB32481702	HP	1 year	2012-03-26
25	Power Sensor	8481A	US41030291	HP	1 year	2011-10-07
26	Audio Analyzer	8903B	3729A18901	HP	1 year	2011-10-07
27	Modulation Analyzer	8901B	3749A05878	HP	1 year	2011-10-07
28	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2011-10-07
29	Stop Watch	HS-3	601Q09R	CASIO	2 year	2012-03-26
30	LISN	ENV216	100408	R&S	1 year	2011-10-07
31	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
32	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-
33	Loop Antenna	FMZB 1516	151602/94	SCHWARZBECK	2 year	2011-04-05