
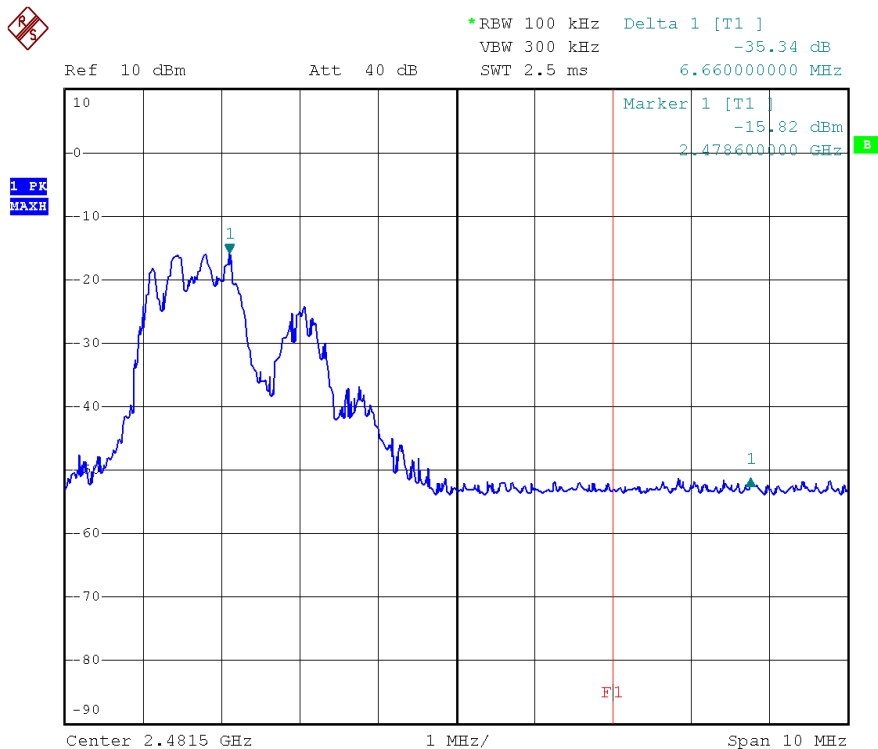


# INTERTEK TESTING SERVICES

Report No.: HK11110731-2  
Sample No.: 1/1

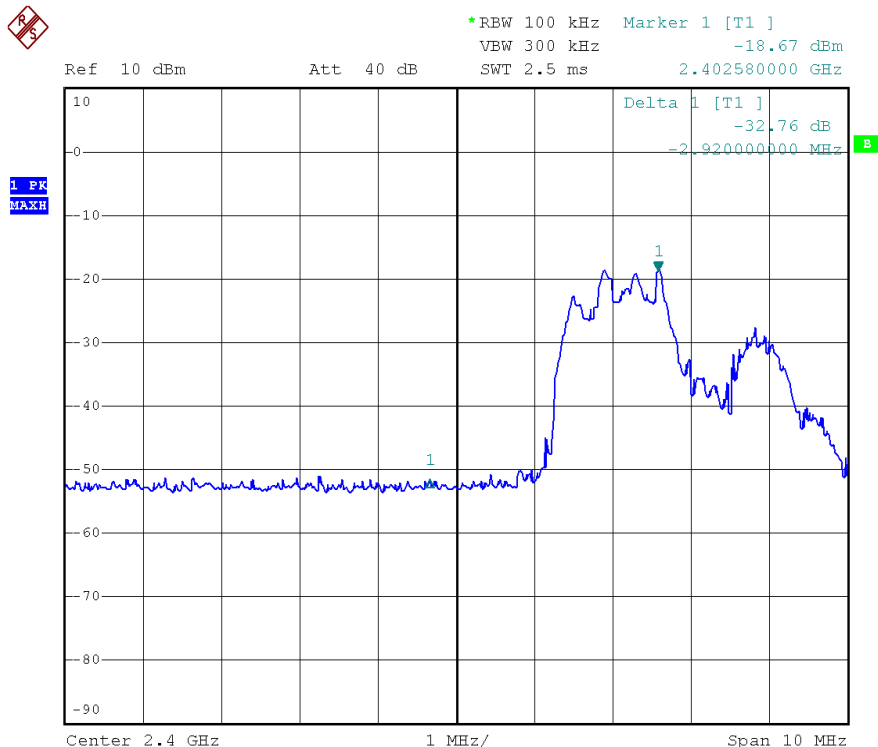

**Lower bandedge (2402MHz)**  
 OATS = 90.7dBuV/m  
 Field Strength (Peak)  
 = 90.7 - 32.8 dBuV/m  
 = 57.9 dBuV/m  
 (Limit 74dBuV/m)

Field Strength (Average)  
 = 57.9 - AF dBuV/m  
 = 57.9 - 27.1 dBuV/m  
 = 30.8 dBuV/m  
 (Limit 54dBuV/m)

**Upper Bandedge (2478MHz)**  
 OATS = 101.1dBuV/m  
 Field Strength (Peak)  
 = 90.7 - 35.3 dBuV/m  
 = 55.4 dBuV/m  
 (Limit 74dBuV/m)

Field Strength (Average)  
 = 55.4 - AF dBuV/m  
 = 55.4 - 27.1 dBuV/m  
 = 28.3 dBuV/m  
 (Limit 54dBuV/m)

**Bandwidth / Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass/Fail)**