



B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-49.21	5.0	-	51.02	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-57.65	5.0	0.57	43.15	Average	54	Pass
NVNT	a	5180	Ant0	5148.2	-45.36	5.0	-	54.87	Peak	68.2	Pass
NVNT	a	5180	Ant0	5146.1	-54.72	5.0	0.57	46.08	Average	54	Pass
NVNT	a	5180	Ant0	5150	-45.85	5.0	-	54.38	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-55.37	5.0	0.57	45.43	Average	54	Pass
NVNT	a	5240	Ant0	5350	-49.39	5.0	-	50.84	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-57.26	5.0	0.57	43.54	Average	54	Pass
NVNT	a	5240	Ant0	5423.04	-46.59	5.0	-	53.64	Peak	68.2	Pass
NVNT	a	5240	Ant0	5373.84	-56.58	5.0	0.57	44.22	Average	54	Pass
NVNT	a	5240	Ant0	5460	-49.7	5.0	-	50.53	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-57.31	5.0	0.57	43.49	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-50.14	5.0	-	50.09	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-57.58	5.0	0.66	43.31	Average	54	Pass
NVNT	n20	5180	Ant0	5148.9	-42.55	5.0	-	57.68	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5146.1	-54.9	5.0	0.66	45.99	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-44.8	5.0	-	55.43	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-54.26	5.0	0.66	46.63	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-48.5	5.0	-	51.73	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-57.58	5.0	0.66	43.31	Average	54	Pass
NVNT	n20	5240	Ant0	5382.24	-45.92	5.0	-	54.31	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5399.76	-56.46	5.0	0.66	44.43	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-47.78	5.0	-	52.45	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-57.18	5.0	0.66	43.71	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-48.93	5.0	-	51.30	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-57.6	5.0	1.18	43.81	Average	54	Pass
NVNT	n40	5190	Ant0	5149.7	-36.13	5.0	-	64.10	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5148.97	-53.6	5.0	1.18	47.81	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-36.13	5.0	-	64.10	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-54.3	5.0	1.18	47.11	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-48.95	5.0	-	51.28	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-57.12	5.0	1.08	44.19	Average	54	Pass
NVNT	n40	5230	Ant0	5414.91	-46.15	5.0	-	54.08	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5380.62	-56.24	5.0	1.08	45.07	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-48.63	5.0	-	51.60	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-57.13	5.0	1.08	44.18	Average	54	Pass





NVNT	ac20	5180	Ant0	4500	-49.77	5.0	-	50.46	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	4500	-57.72	5.0	0.66	43.17	Average	54	Pass
NVNT	ac20	5180	Ant0	5149.6	-44.47	5.0	-	55.76	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5145.4	-54.75	5.0	0.66	46.14	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-46.48	5.0	-	53.75	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-54.58	5.0	0.66	46.31	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-50.31	5.0	-	49.92	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-57.05	5.0	0.65	43.83	Average	54	Pass
NVNT	ac20	5240	Ant0	5367.84	-46.32	5.0	-	53.91	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5379.84	-56.53	5.0	0.65	44.35	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-48.99	5.0	-	51.24	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-57.58	5.0	0.65	43.30	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-49.51	5.0	-	50.72	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-57.75	5.0	1.11	43.59	Average	54	Pass
NVNT	ac40	5190	Ant0	5148.97	-44.37	5.0	-	55.86	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-54.27	5.0	1.11	47.07	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-44.9	5.0	-	55.33	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-54.27	5.0	1.11	47.07	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-50.4	5.0	-	49.83	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-56.99	5.0	1.7	44.94	Average	54	Pass
NVNT	ac40	5230	Ant0	5395.74	-46.14	5.0	-	54.09	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5352	-56.44	5.0	1.7	45.49	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-47.35	5.0	-	52.88	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-56.69	5.0	1.7	45.24	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-48.94	5.0	-	51.29	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-56.52	5.0	1.75	45.46	Average	54	Pass
NVNT	ac80	5210	Ant0	5385.75	-45.96	5.0	-	54.27	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5381.13	-55.99	5.0	1.75	45.99	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-48.62	5.0	-	51.61	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-56.76	5.0	1.75	45.22	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-49.34	5.0	-	50.89	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-58.12	5.0	1.75	43.86	Average	54	Pass
NVNT	ac80	5210	Ant0	5149.38	-44.36	5.0	-	55.87	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5146.22	-54.05	5.0	1.75	47.93	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-44.82	5.0	-	55.41	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-54.16	5.0	1.75	47.82	Average	54	Pass





Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-49.76	5.0	-	50.47	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-58.15	5.0	0.57	42.65	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-43.43	5.0	-	56.80	Peak	68.2	Pass
NVNT	a	5180	Ant1	5147.5	-54.33	5.0	0.57	46.47	Average	54	Pass
NVNT	a	5180	Ant1	5150	-42.52	5.0	-	57.71	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-54.42	5.0	0.57	46.38	Average	54	Pass
NVNT	a	5240	Ant1	5350	-49.44	5.0	-	50.79	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-57.24	5.0	0.84	43.83	Average	54	Pass
NVNT	a	5240	Ant1	5388.24	-46.48	5.0	-	53.75	Peak	68.2	Pass
NVNT	a	5240	Ant1	5400	-56.53	5.0	0.84	44.54	Average	54	Pass
NVNT	a	5240	Ant1	5460	-49.12	5.0	-	51.11	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-57.76	5.0	0.84	43.31	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-49.11	5.0	-	51.12	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.36	5.0	0.66	43.53	Average	54	Pass
NVNT	n20	5180	Ant1	5148.9	-44.66	5.0	-	55.57	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5148.9	-53.83	5.0	0.66	47.06	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-45.56	5.0	-	54.67	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-54.48	5.0	0.66	46.41	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-49.99	5.0	-	50.24	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-57.04	5.0	0.7	43.89	Average	54	Pass
NVNT	n20	5240	Ant1	5386.56	-46.06	5.0	-	54.17	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350.56	-56.46	5.0	0.7	44.47	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-50.58	5.0	-	49.65	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.38	5.0	0.7	43.55	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-47.57	5.0	-	52.66	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-58.03	5.0	1.13	43.33	Average	54	Pass
NVNT	n40	5190	Ant1	5148.24	-43.37	5.0	-	56.86	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5148.97	-53.78	5.0	1.13	47.58	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-44.22	5.0	-	56.01	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-53.88	5.0	1.13	47.48	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-50.09	5.0	-	50.14	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.08	5.0	1.13	44.28	Average	54	Pass
NVNT	n40	5230	Ant1	5366.85	-45.85	5.0	-	54.38	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5380.62	-56.16	5.0	1.13	45.20	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-49.15	5.0	-	51.08	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-57.4	5.0	1.13	43.96	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-48.61	5.0	-	51.62	Peak	68.2	Pass





NVNT	ac20	5180	Ant1	4500	-57.93	5.0	0.96	43.26	Average	54	Pass
NVNT	ac20	5180	Ant1	5149.6	-45.05	5.0	-	55.18	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5148.2	-54.85	5.0	0.96	46.34	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-44.99	5.0	-	55.24	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-55.45	5.0	0.96	45.74	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-49.9	5.0	-	50.33	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.66	5.0	0.24	42.81	Average	54	Pass
NVNT	ac20	5240	Ant1	5415.6	-46.56	5.0	-	53.67	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5377.44	-56.65	5.0	0.24	43.82	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-48.7	5.0	-	51.53	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-57.77	5.0	0.24	42.70	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-50.16	5.0	-	50.07	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-57.05	5.0	1.12	44.30	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.97	-40.59	5.0	-	59.64	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-53.47	5.0	1.12	47.88	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-42.76	5.0	-	57.47	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-53.47	5.0	1.12	47.88	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-47.75	5.0	-	52.48	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-57.44	5.0	1.12	43.91	Average	54	Pass
NVNT	ac40	5230	Ant1	5457.57	-46.15	5.0	-	54.08	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5369.55	-56.38	5.0	1.12	44.97	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-48.46	5.0	-	51.77	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-57.25	5.0	1.12	44.10	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-48.92	5.0	-	51.31	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-56.39	5.0	2.28	46.12	Average	54	Pass
NVNT	ac80	5210	Ant1	5418.09	-45.74	5.0	-	54.49	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5355.06	-55.97	5.0	2.28	46.54	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-47.72	5.0	-	52.51	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-56.72	5.0	2.28	45.79	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-50.32	5.0	-	49.91	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-57.8	5.0	2.28	44.71	Average	54	Pass
NVNT	ac80	5210	Ant1	5147.8	-42.95	5.0	-	57.28	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5149.38	-53.99	5.0	2.28	48.52	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-43.38	5.0	-	56.85	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-54.37	5.0	2.28	48.14	Average	54	Pass





MIMO

Condition	Mode	Frequency (MHz)	Ant0 Power (dBm)	Ant1 Power (dBm)	Gain (dBi)	Total E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	n20	5180	-50.14	-49.11	8.01	56.68	Peak	68.2	Pass
NVNT	n20	5180	-57.58	-57.36	8.01	48.81	Average	54	Pass
NVNT	n20	5180	-42.55	-44.66	8.01	62.80	Peak	68.2	Pass
NVNT	n20	5180	-54.9	-53.83	8.01	51.95	Average	54	Pass
NVNT	n20	5180	-44.8	-45.56	8.01	61.11	Peak	68.2	Pass
NVNT	n20	5180	-54.26	-54.48	8.01	51.91	Average	54	Pass
NVNT	n20	5240	-48.5	-49.99	8.01	57.10	Peak	68.2	Pass
NVNT	n20	5240	-57.58	-57.04	8.01	48.98	Average	54	Pass
NVNT	n20	5240	-45.92	-46.06	8.01	60.29	Peak	68.2	Pass
NVNT	n20	5240	-56.46	-56.46	8.01	49.82	Average	54	Pass
NVNT	n20	5240	-47.78	-50.58	8.01	57.32	Peak	68.2	Pass
NVNT	n20	5240	-57.18	-57.38	8.01	49.00	Average	54	Pass
NVNT	n40	5190	-48.93	-47.57	8.01	58.08	Peak	68.2	Pass
NVNT	n40	5190	-57.6	-58.03	8.01	48.47	Average	54	Pass
NVNT	n40	5190	-36.13	-43.37	8.01	67.89	Peak	68.2	Pass
NVNT	n40	5190	-53.6	-53.78	8.01	52.59	Average	54	Pass
NVNT	n40	5190	-36.13	-44.22	8.01	67.76	Peak	68.2	Pass
NVNT	n40	5190	-54.3	-53.88	8.01	52.19	Average	54	Pass
NVNT	n40	5230	-48.95	-50.09	8.01	56.80	Peak	68.2	Pass
NVNT	n40	5230	-57.12	-57.08	8.01	49.18	Average	54	Pass
NVNT	n40	5230	-46.15	-45.85	8.01	60.28	Peak	68.2	Pass
NVNT	n40	5230	-56.24	-56.16	8.01	50.08	Average	54	Pass
NVNT	n40	5230	-48.63	-49.15	8.01	57.40	Peak	68.2	Pass
NVNT	n40	5230	-57.13	-57.4	8.01	49.02	Average	54	Pass
NVNT	ac20	5180	-49.77	-48.61	8.01	57.13	Peak	68.2	Pass
NVNT	ac20	5180	-57.72	-57.93	8.01	48.45	Average	54	Pass
NVNT	ac20	5180	-44.47	-45.05	8.01	61.53	Peak	68.2	Pass
NVNT	ac20	5180	-54.75	-54.85	8.01	51.48	Average	54	Pass
NVNT	ac20	5180	-46.48	-44.99	8.01	60.61	Peak	68.2	Pass
NVNT	ac20	5180	-54.58	-55.45	8.01	51.28	Average	54	Pass
NVNT	ac20	5240	-50.31	-49.9	8.01	56.18	Peak	68.2	Pass
NVNT	ac20	5240	-57.05	-57.66	8.01	48.93	Average	54	Pass
NVNT	ac20	5240	-46.32	-46.56	8.01	59.84	Peak	68.2	Pass
NVNT	ac20	5240	-56.53	-56.65	8.01	49.69	Average	54	Pass
NVNT	ac20	5240	-48.99	-48.7	8.01	57.44	Peak	68.2	Pass
NVNT	ac20	5240	-57.58	-57.77	8.01	48.60	Average	54	Pass
NVNT	ac40	5190	-49.51	-50.16	8.01	56.46	Peak	68.2	Pass
NVNT	ac40	5190	-57.75	-57.05	8.01	48.89	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




NVNT	ac40	5190	-44.37	-40.59	8.01	64.20	Peak	68.2	Pass
NVNT	ac40	5190	-54.27	-53.47	8.01	52.43	Average	54	Pass
NVNT	ac40	5190	-44.9	-42.76	8.01	62.58	Peak	68.2	Pass
NVNT	ac40	5190	-54.27	-53.47	8.01	52.43	Average	54	Pass
NVNT	ac40	5230	-50.4	-47.75	8.01	57.40	Peak	68.2	Pass
NVNT	ac40	5230	-56.99	-57.44	8.01	49.07	Average	54	Pass
NVNT	ac40	5230	-46.14	-46.15	8.01	60.13	Peak	68.2	Pass
NVNT	ac40	5230	-56.44	-56.38	8.01	49.87	Average	54	Pass
NVNT	ac40	5230	-47.35	-48.46	8.01	58.41	Peak	68.2	Pass
NVNT	ac40	5230	-56.69	-57.25	8.01	49.32	Average	54	Pass
NVNT	ac80	5210	-48.94	-48.92	8.01	57.35	Peak	68.2	Pass
NVNT	ac80	5210	-56.52	-56.39	8.01	49.82	Average	54	Pass
NVNT	ac80	5210	-45.96	-45.74	8.01	60.43	Peak	68.2	Pass
NVNT	ac80	5210	-55.99	-55.97	8.01	50.30	Average	54	Pass
NVNT	ac80	5210	-48.62	-47.72	8.01	58.13	Peak	68.2	Pass
NVNT	ac80	5210	-56.76	-56.72	8.01	49.54	Average	54	Pass
NVNT	ac80	5210	-49.34	-50.32	8.01	56.48	Peak	68.2	Pass
NVNT	ac80	5210	-58.12	-57.8	8.01	48.32	Average	54	Pass
NVNT	ac80	5210	-44.36	-42.95	8.01	62.68	Peak	68.2	Pass
NVNT	ac80	5210	-54.05	-53.99	8.01	52.26	Average	54	Pass
NVNT	ac80	5210	-44.82	-43.38	8.01	62.24	Peak	68.2	Pass
NVNT	ac80	5210	-54.16	-54.37	8.01	52.01	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

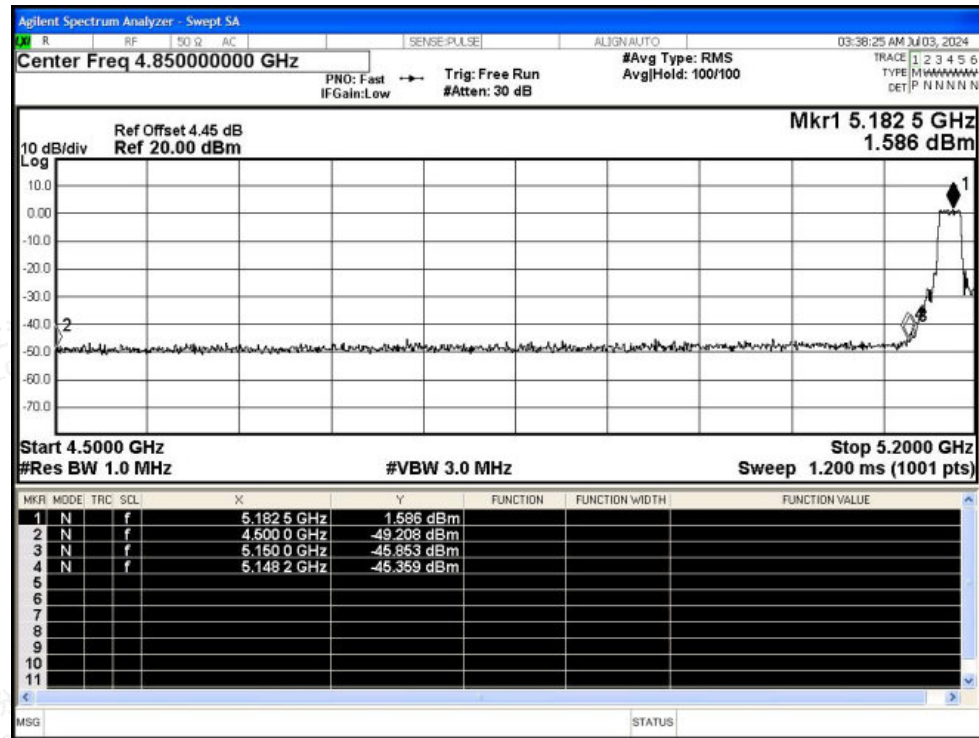

Restrict Band NVNT a 5180MHz Ant0 Average

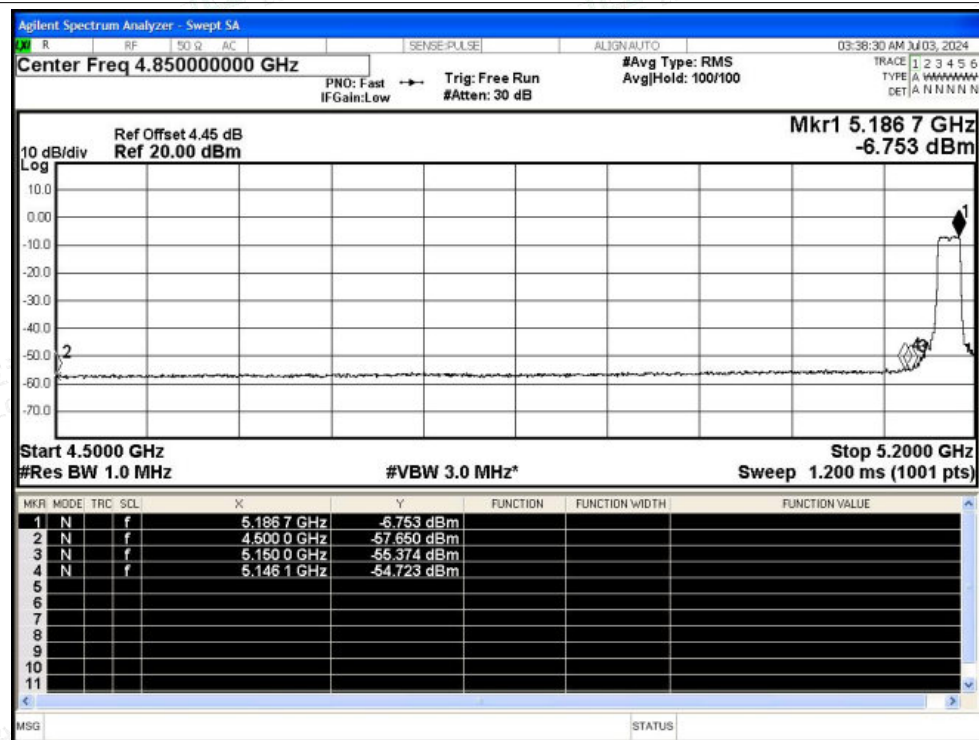

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5240MHz Ant0 Peak

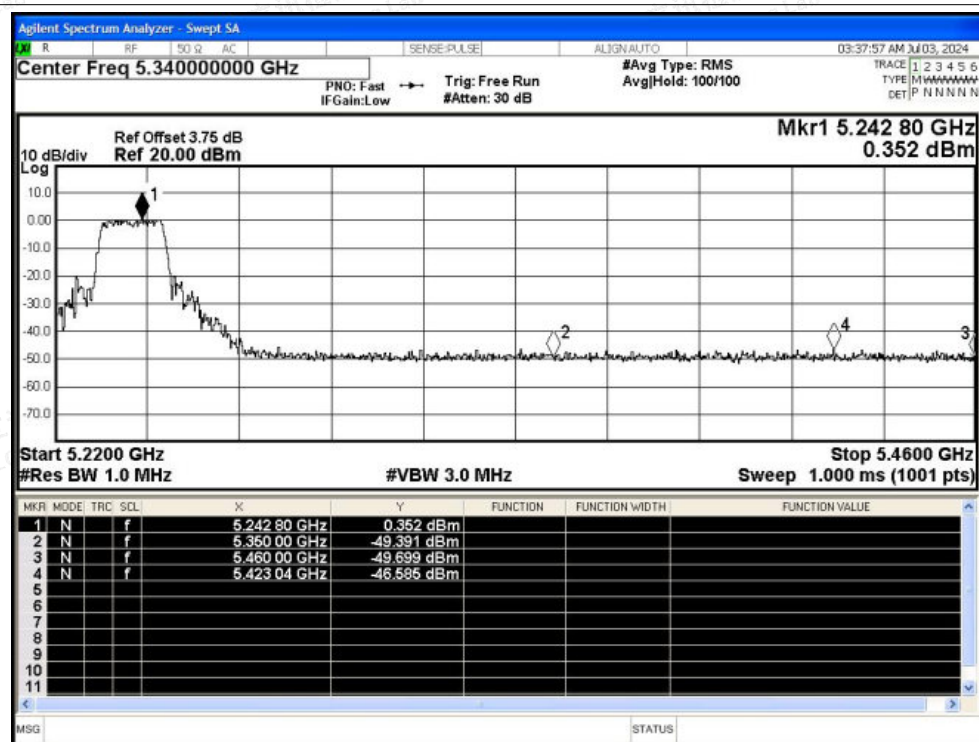


Restrict Band NVNT a 5240MHz Ant0 Average

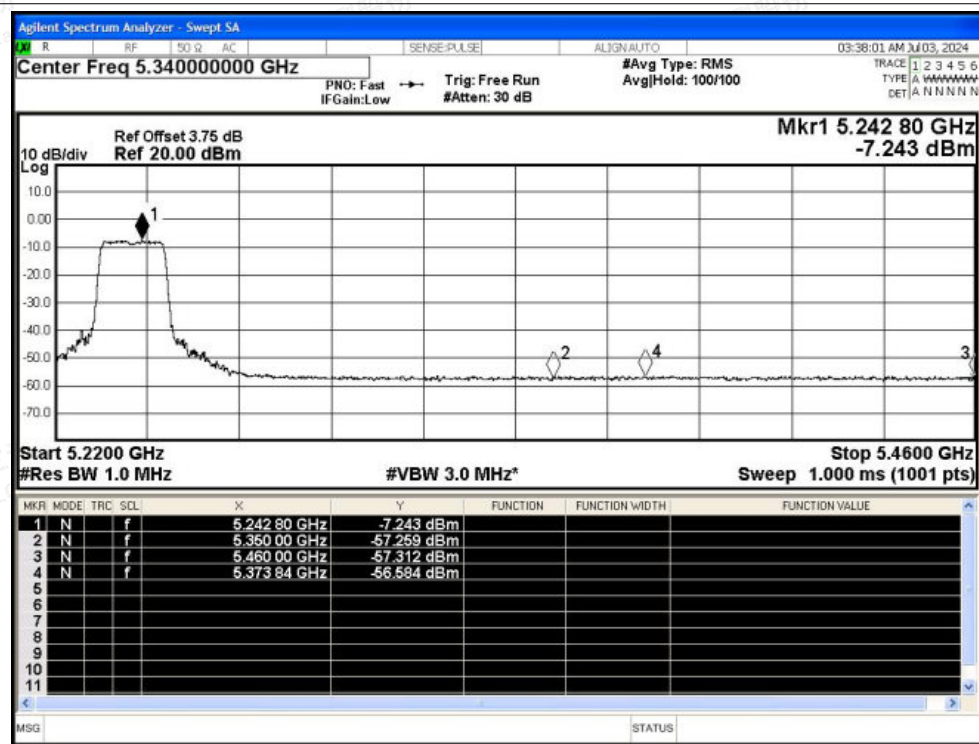




Restrict Band NVNT n20 5180MHz Ant0 Peak

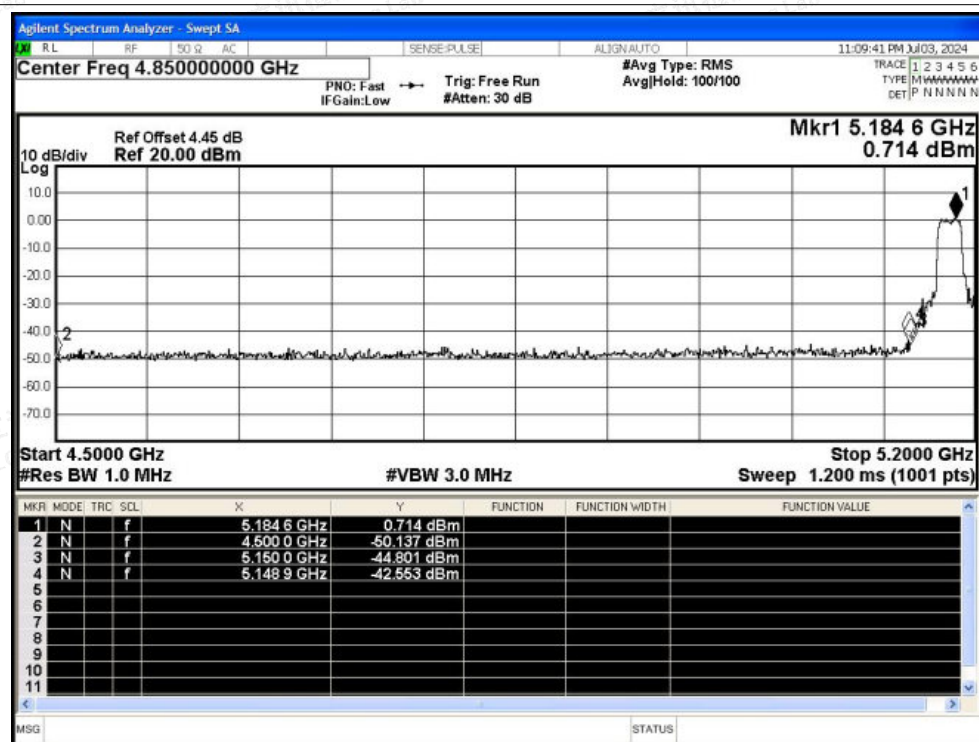


Restrict Band NVNT n20 5180MHz Ant0 Average

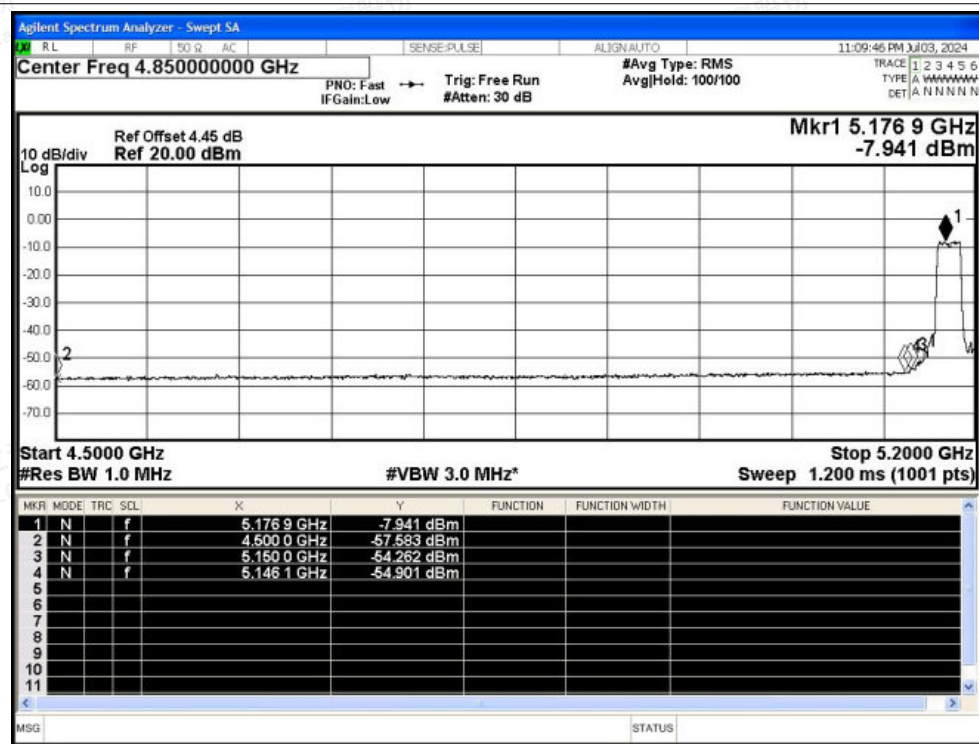




Restrict Band NVNT n20 5240MHz Ant0 Peak

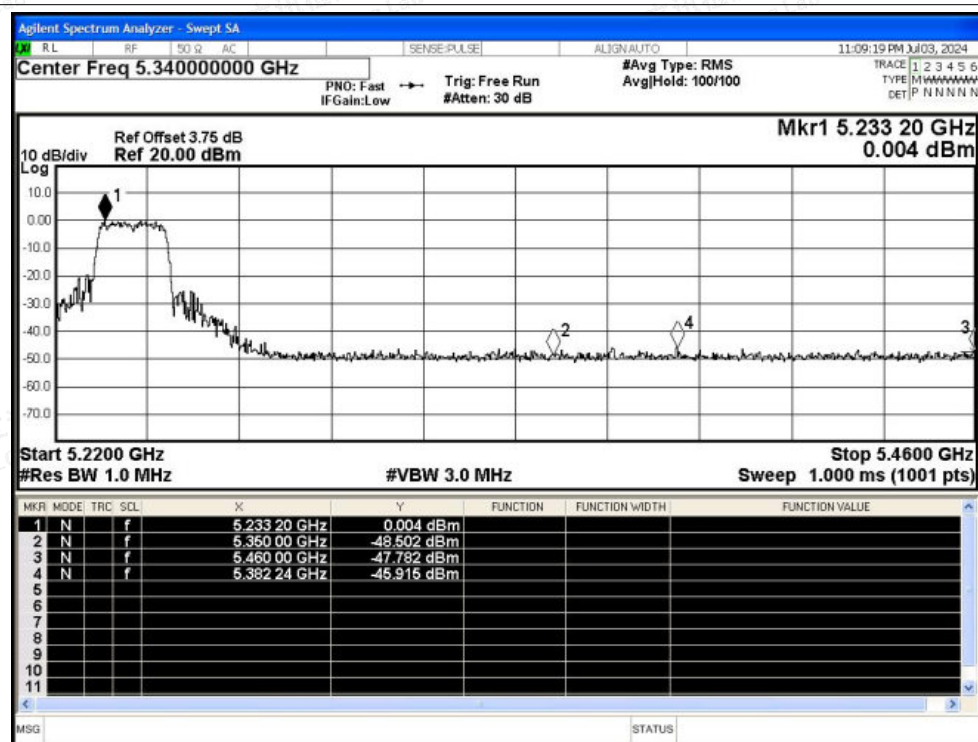


Restrict Band NVNT n20 5240MHz Ant0 Average

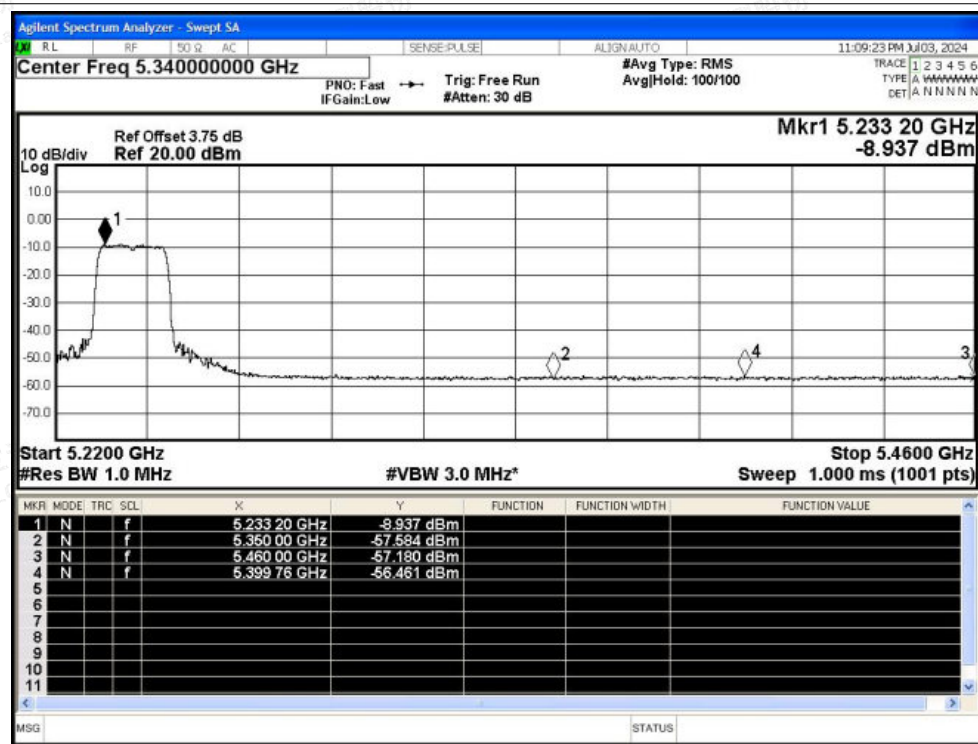




Restrict Band NVNT n40 5190MHz Ant0 Peak

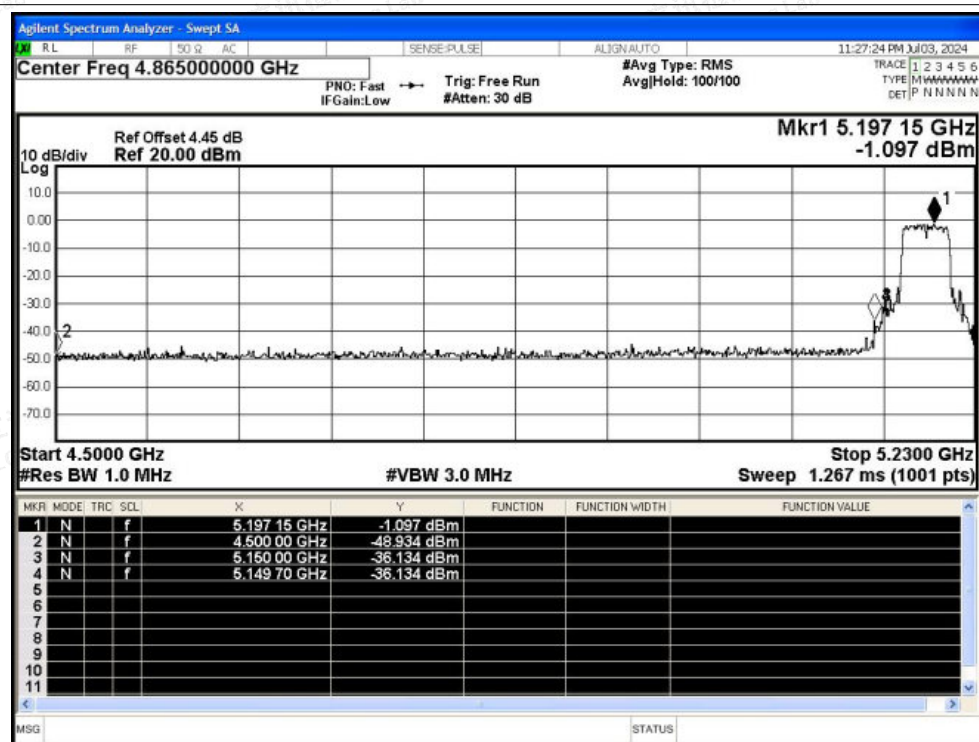


Restrict Band NVNT n40 5190MHz Ant0 Average

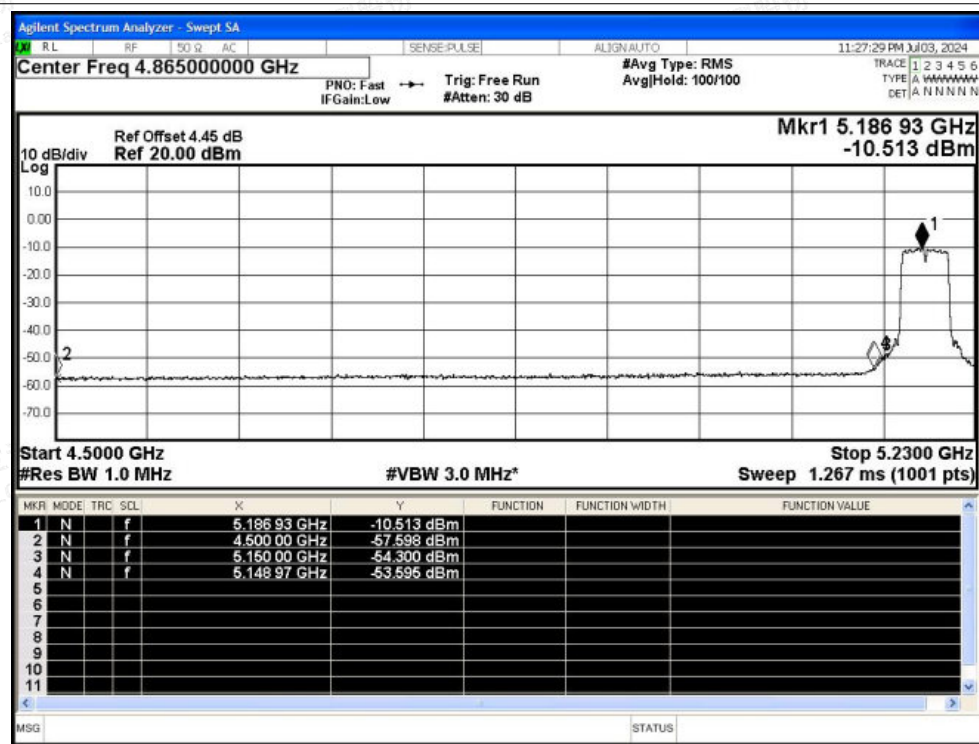




Restrict Band NVNT n40 5230MHz Ant0 Peak

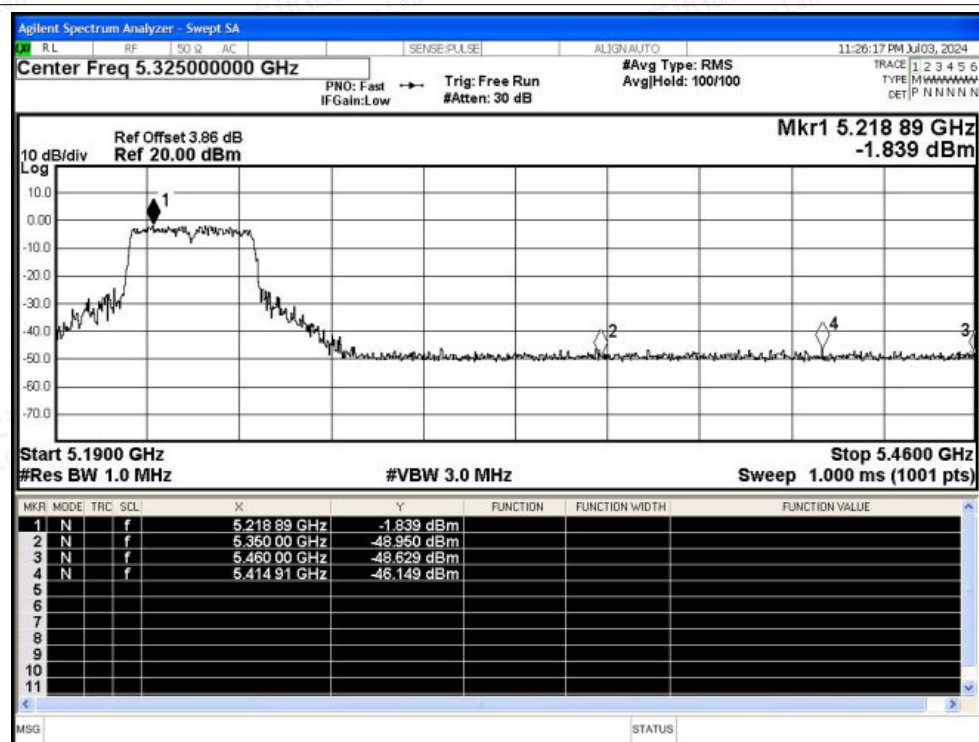


Restrict Band NVNT n40 5230MHz Ant0 Average

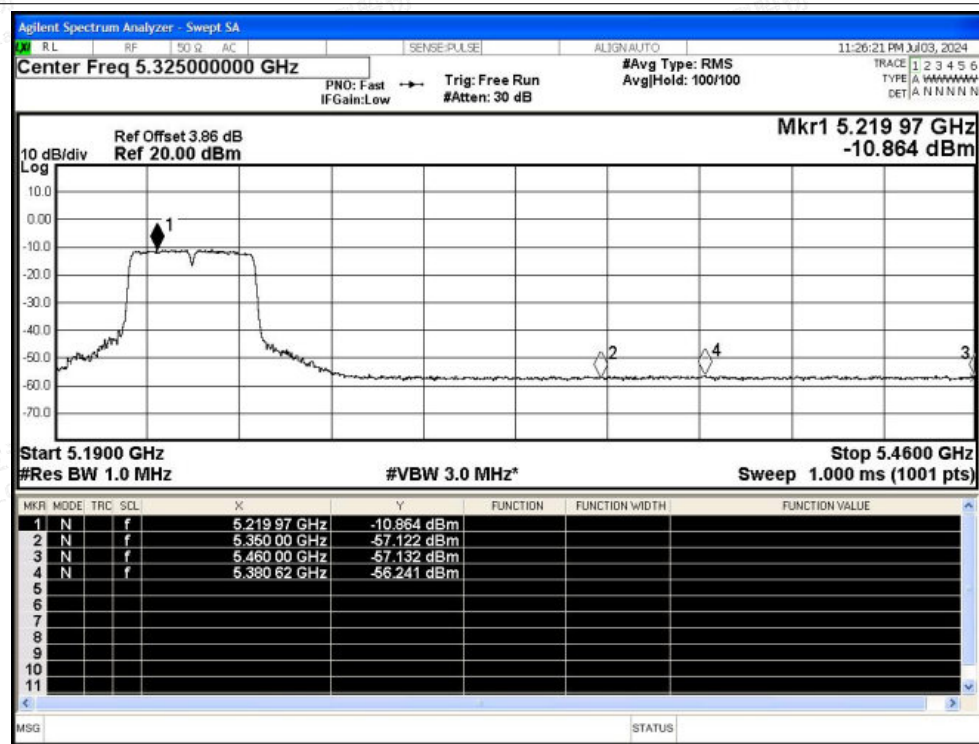




Restrict Band NVNT ac20 5180MHz Ant0 Peak

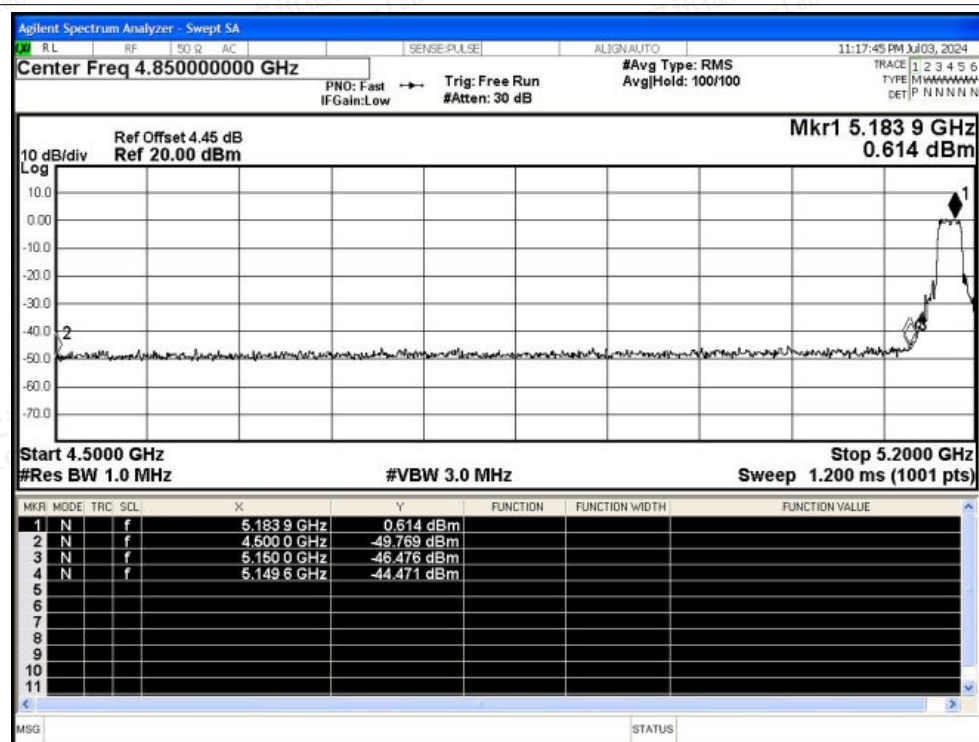


Restrict Band NVNT ac20 5180MHz Ant0 Average

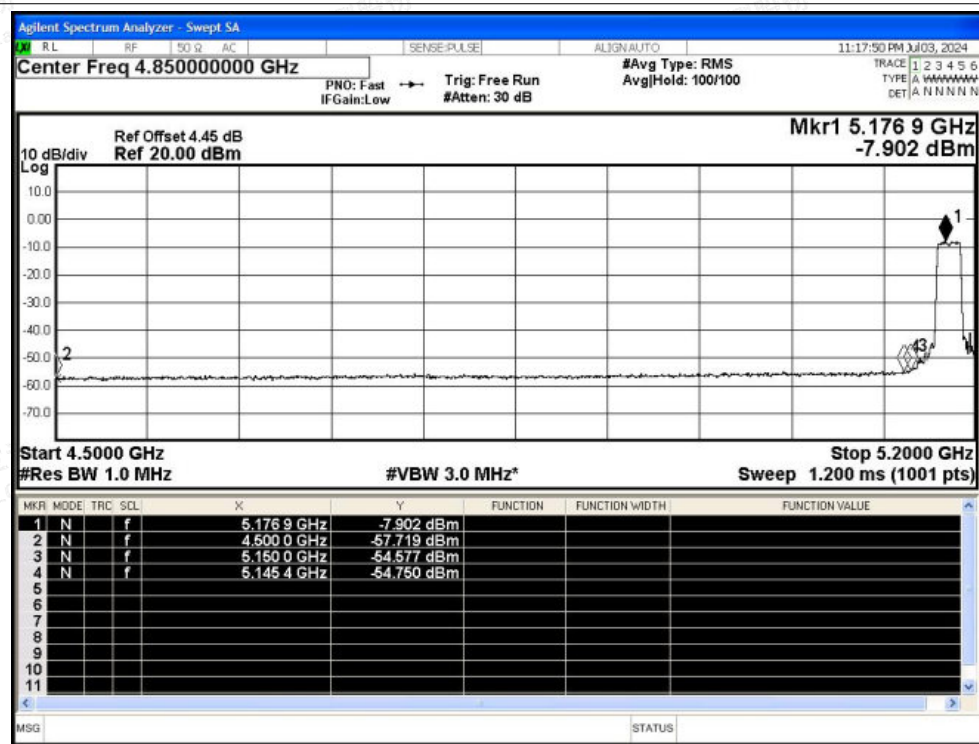




Restrict Band NVNT ac20 5240MHz Ant0 Peak

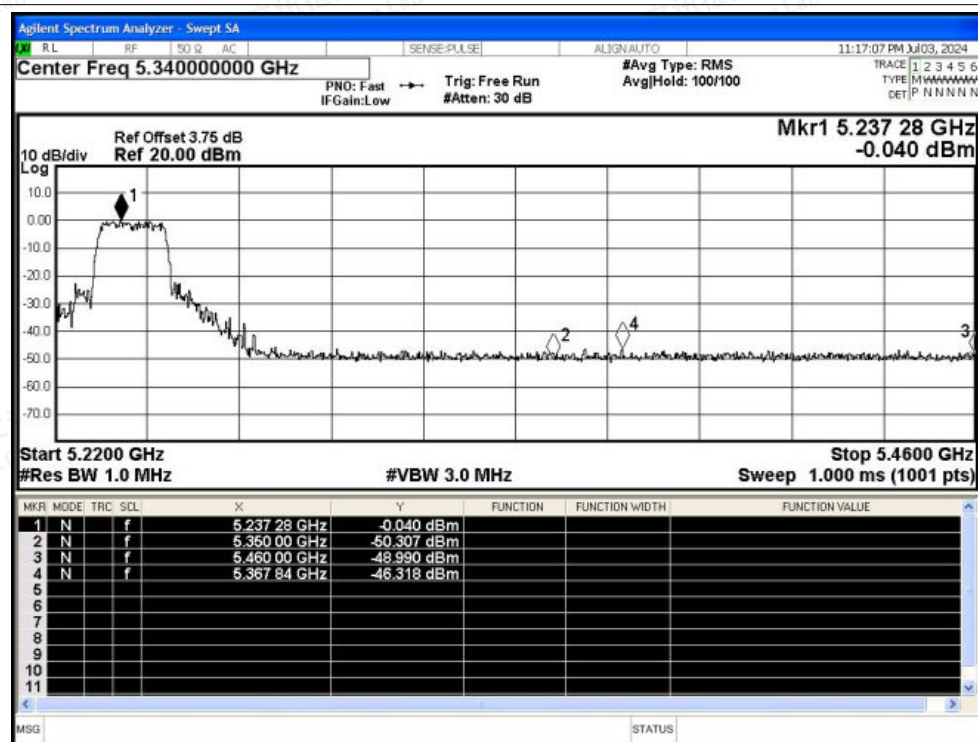


Restrict Band NVNT ac20 5240MHz Ant0 Average

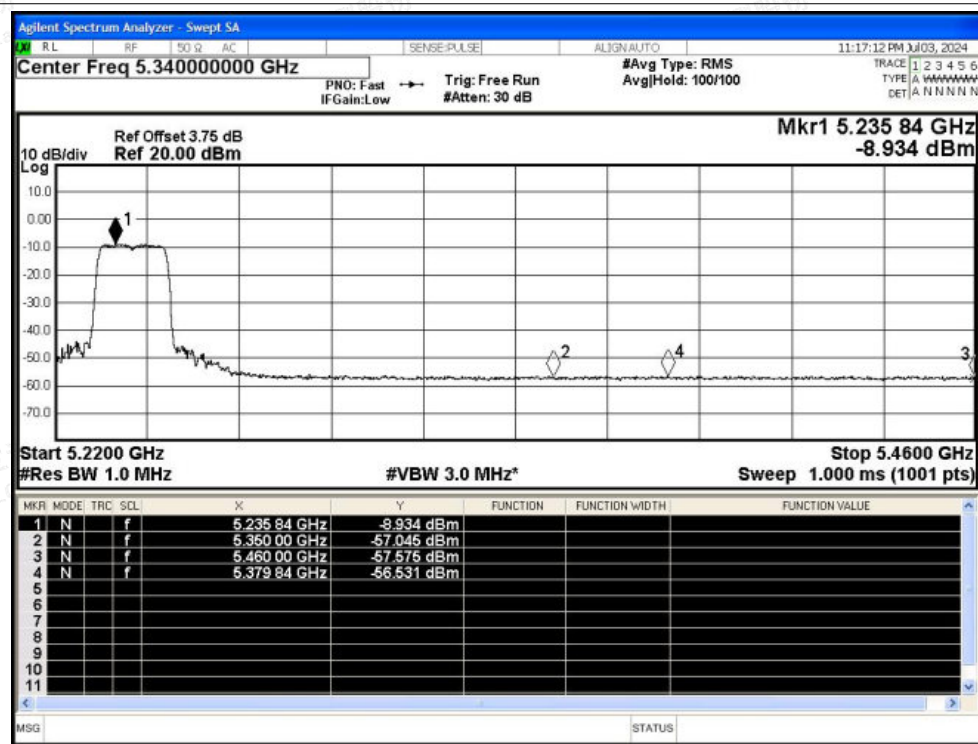




Restrict Band NVNT ac40 5190MHz Ant0 Peak

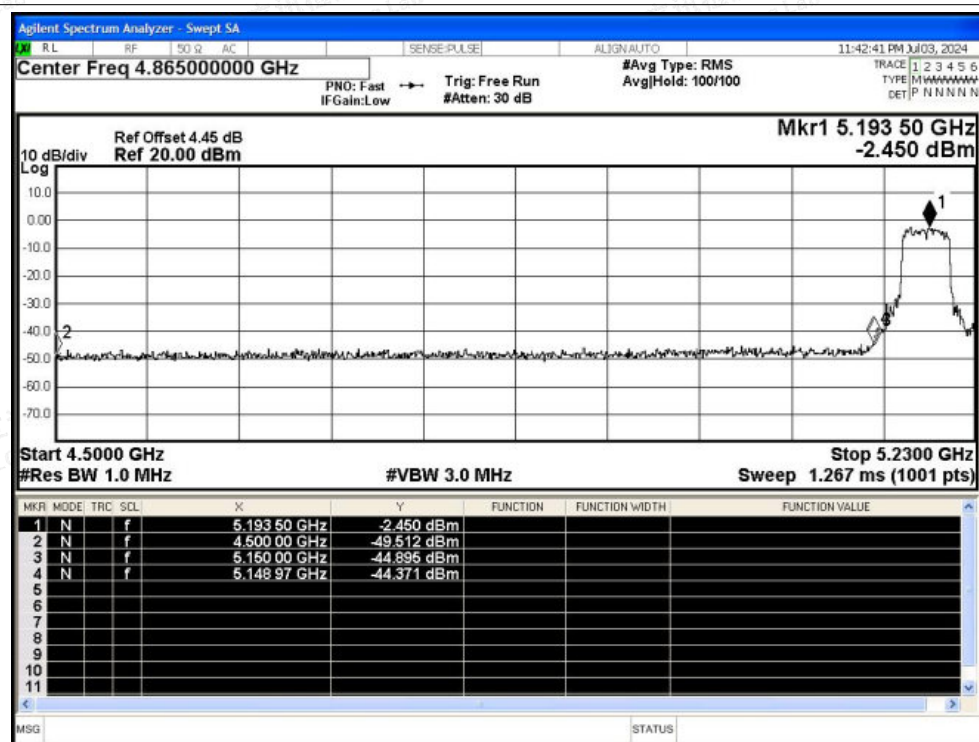


Restrict Band NVNT ac40 5190MHz Ant0 Average

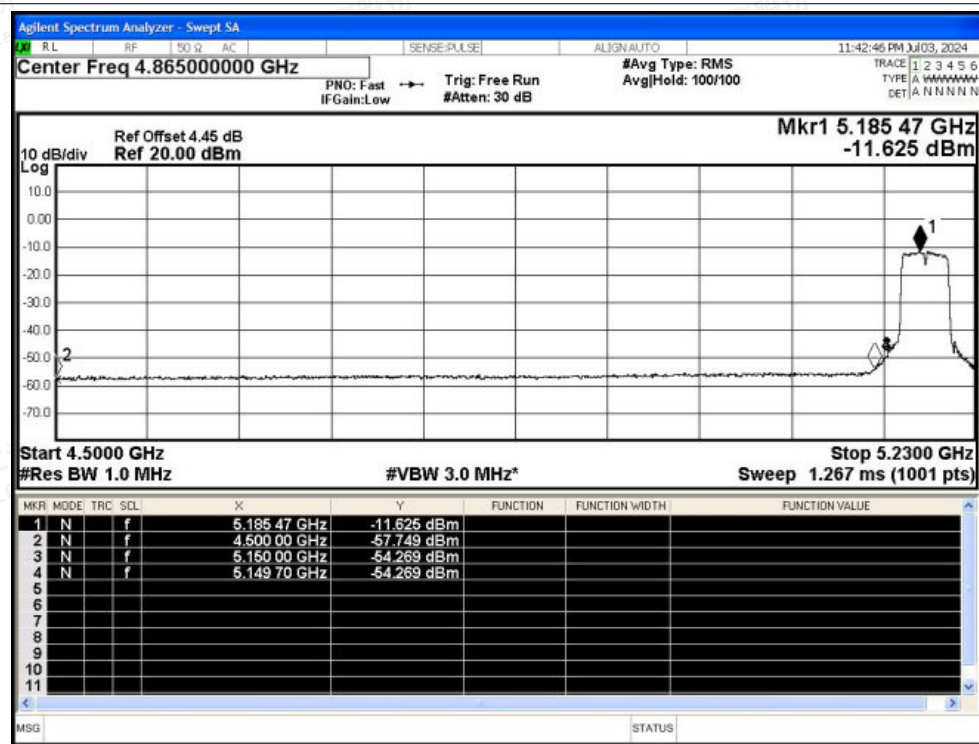




Restrict Band NVNT ac40 5230MHz Ant0 Peak

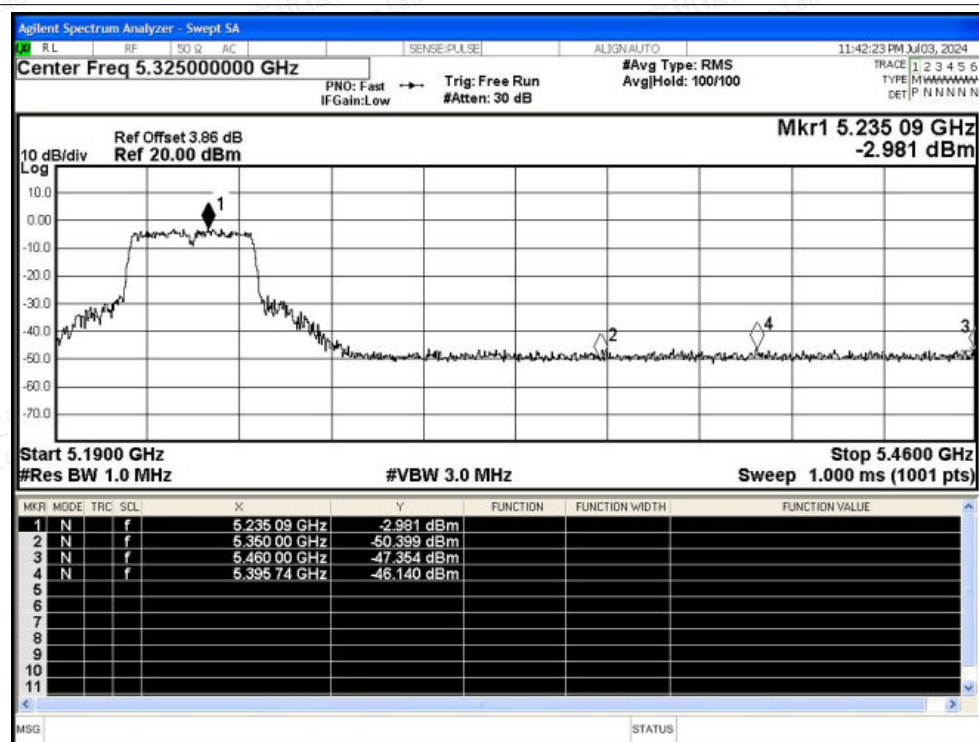


Restrict Band NVNT ac40 5230MHz Ant0 Average

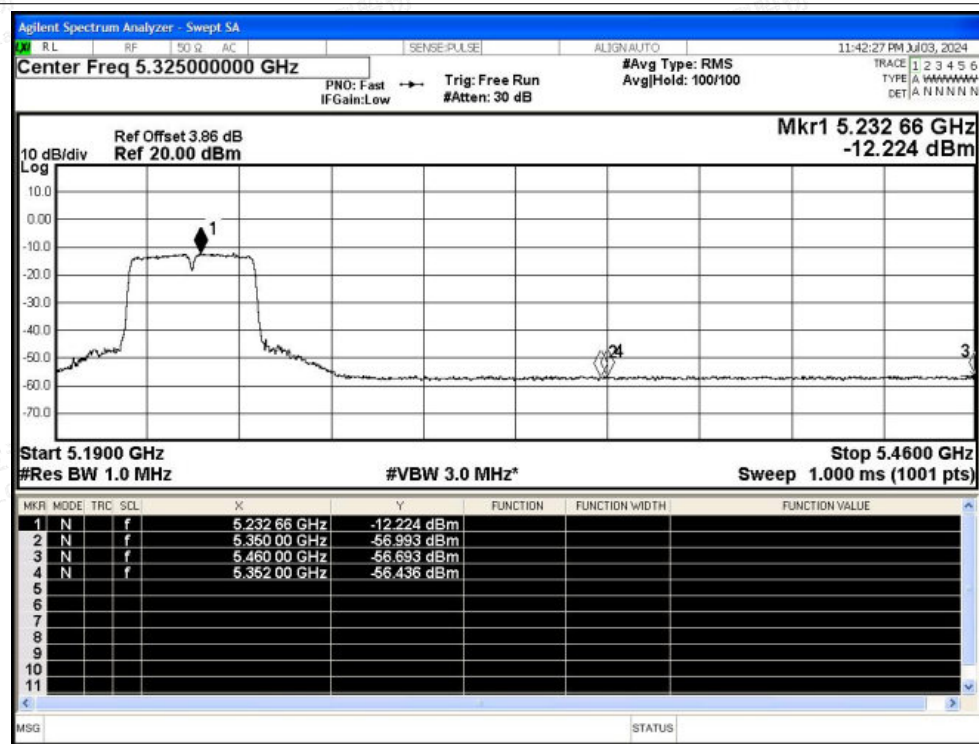




Restrict Band NVNT ac80 5210MHz Ant0 Peak

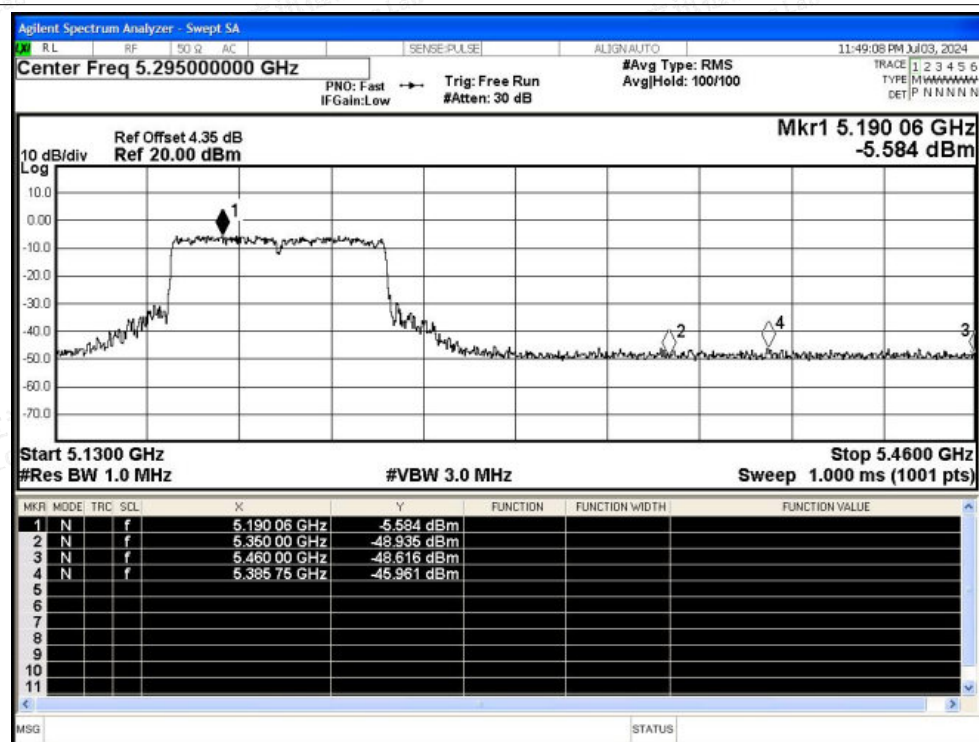


Restrict Band NVNT ac80 5210MHz Ant0 Average

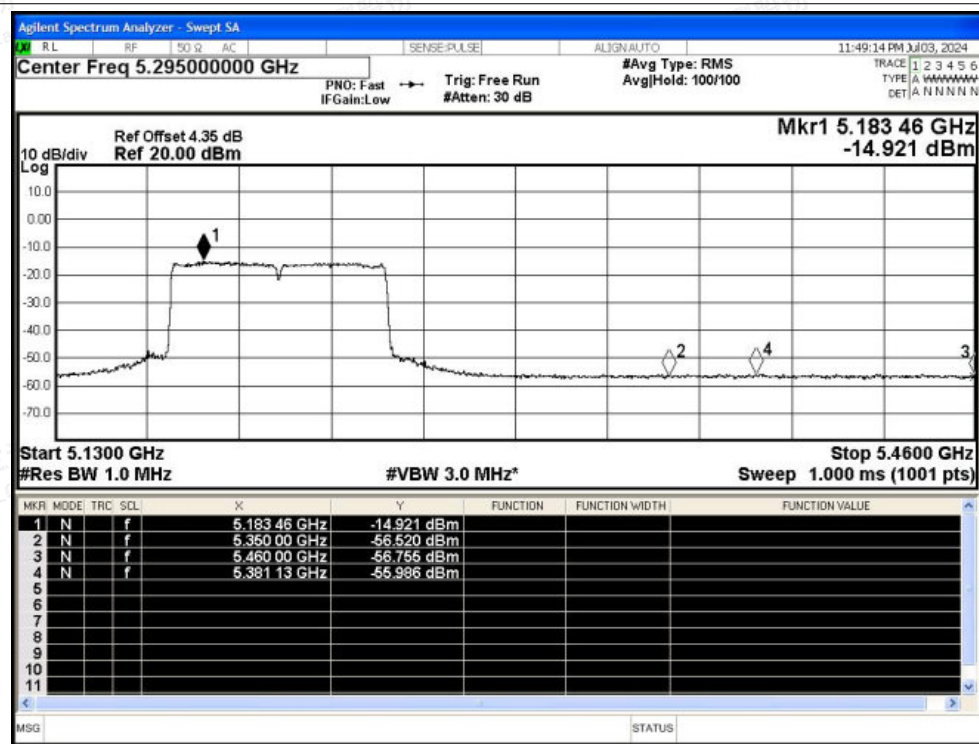




Restrict Band NVNT ac80 5210MHz Ant0 Peak

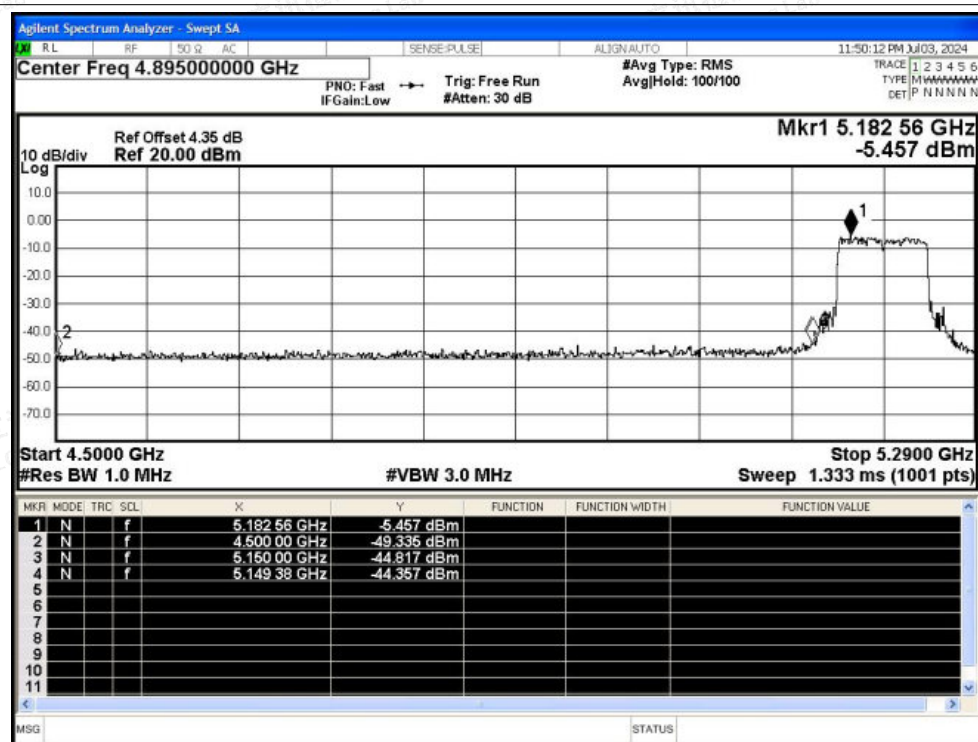

Restrict Band NVNT ac80 5210MHz Ant0 Average

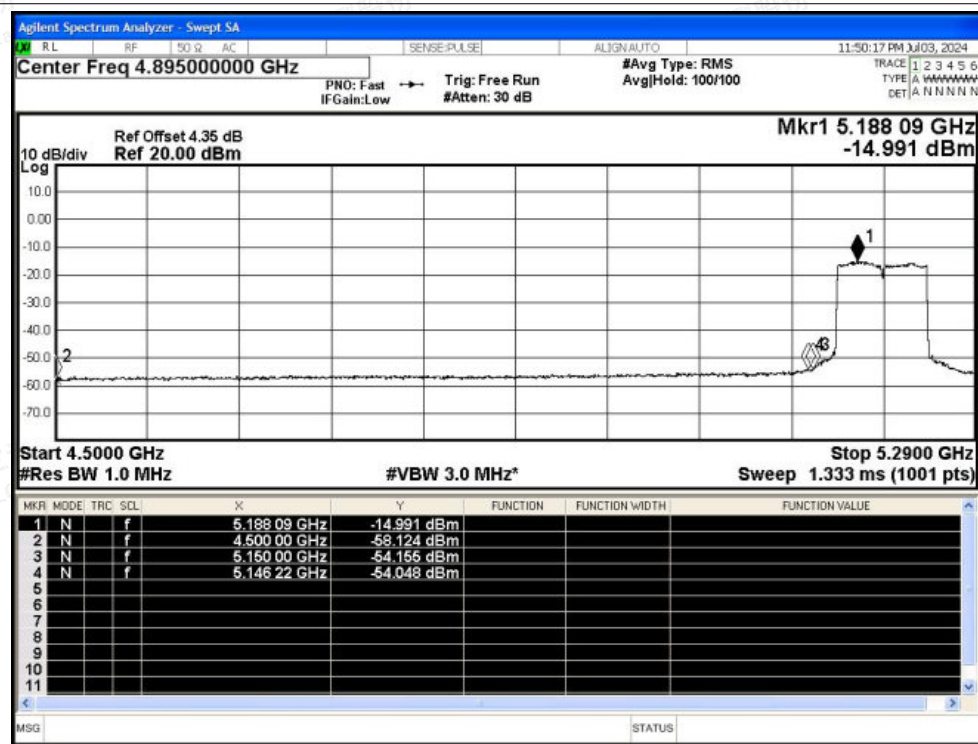

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

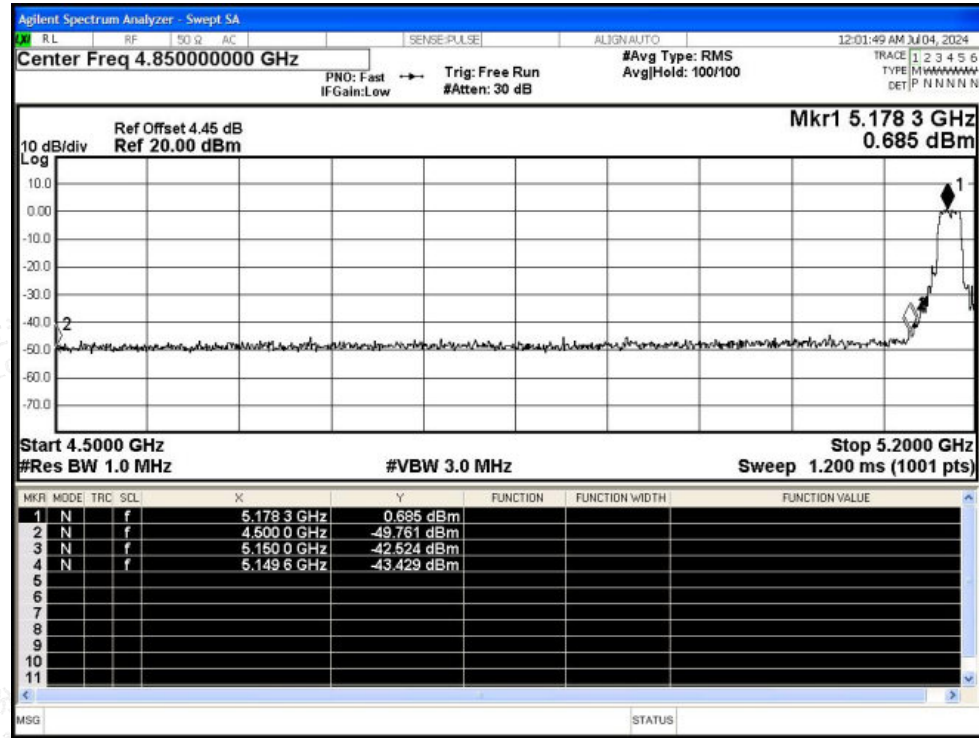


Restrict Band NVNT a 5180MHz Ant1 Average

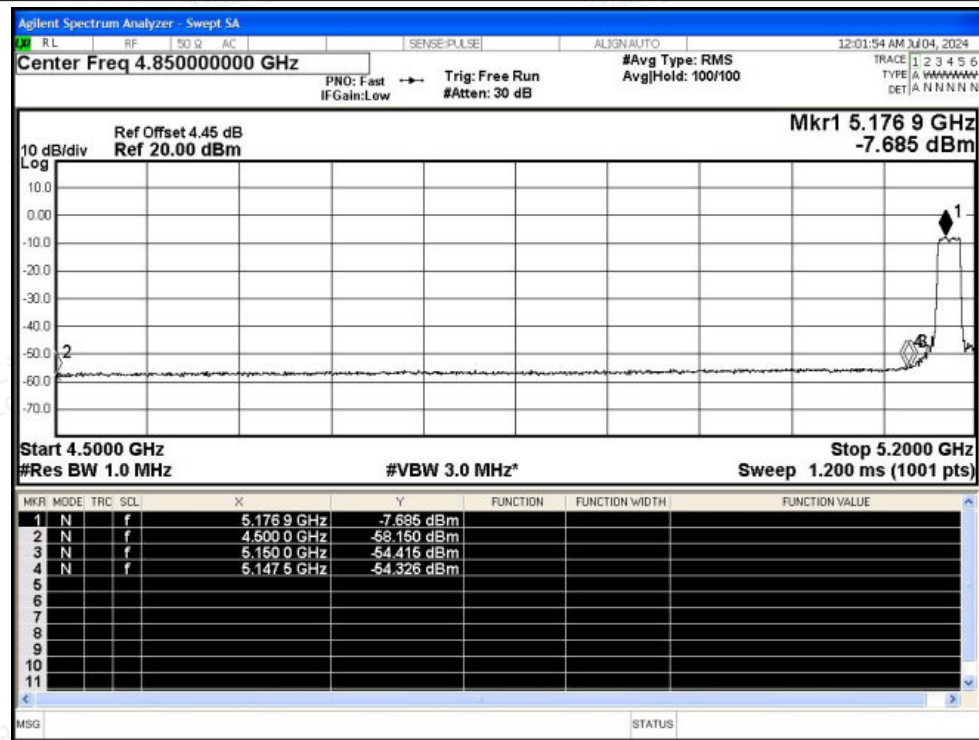




Restrict Band NVNT a 5240MHz Ant1 Peak

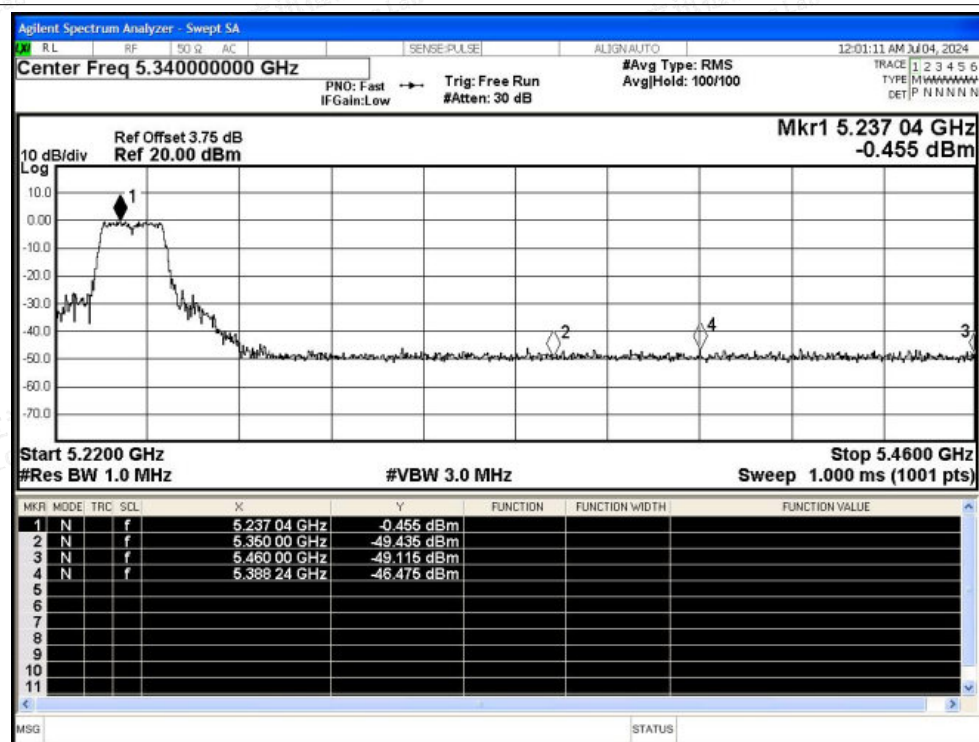


Restrict Band NVNT a 5240MHz Ant1 Average

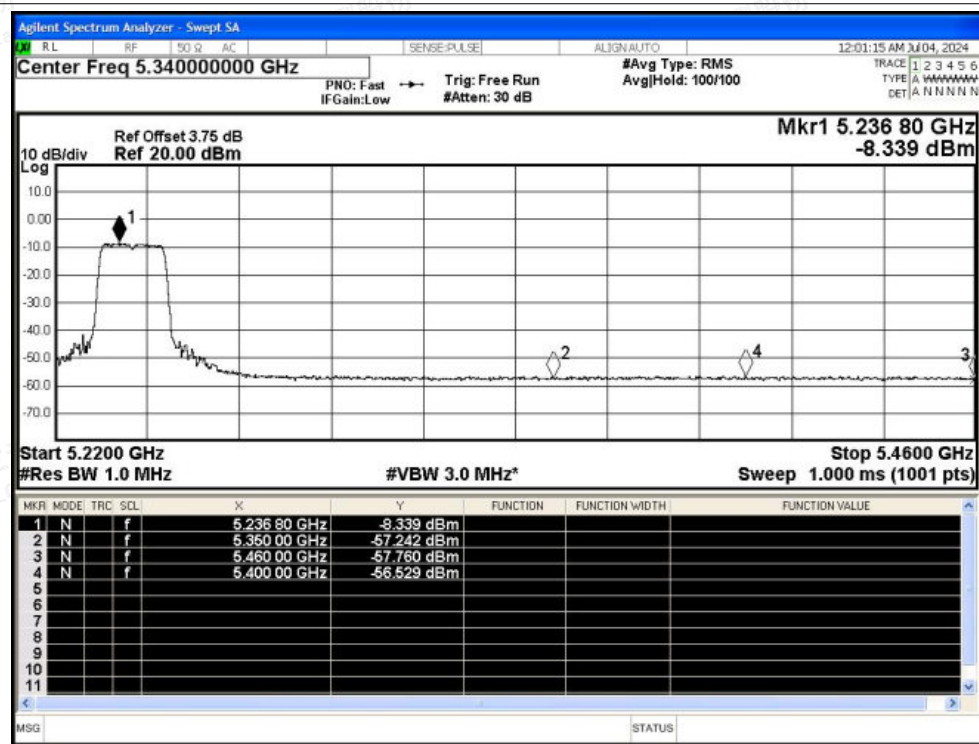




Restrict Band NVNT n20 5180MHz Ant1 Peak

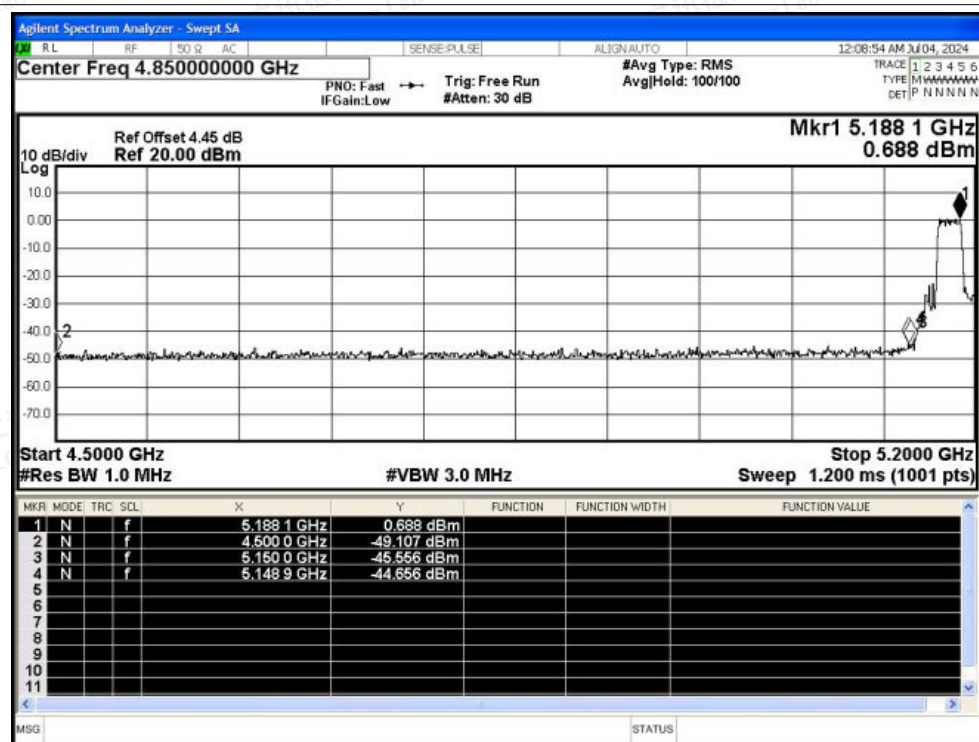


Restrict Band NVNT n20 5180MHz Ant1 Average

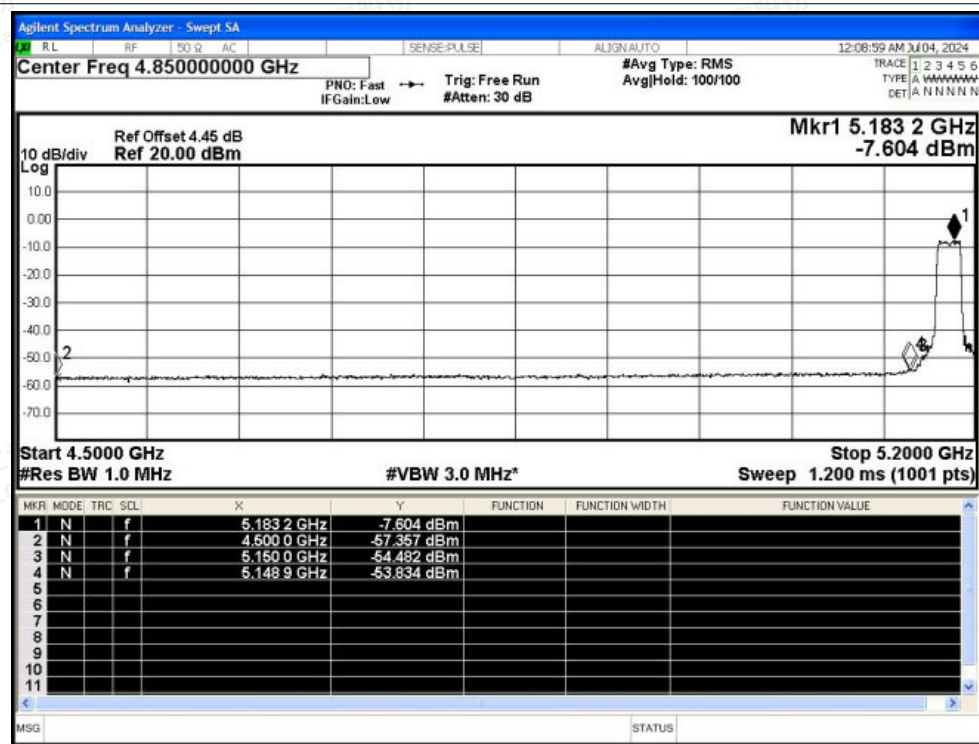




Restrict Band NVNT n20 5240MHz Ant1 Peak

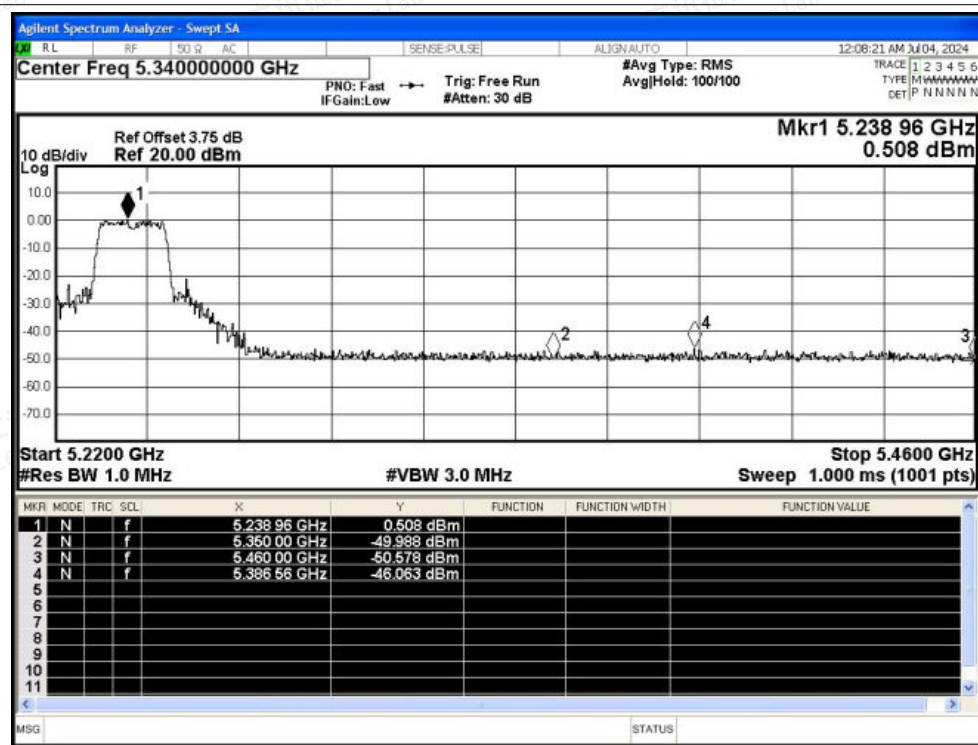


Restrict Band NVNT n20 5240MHz Ant1 Average

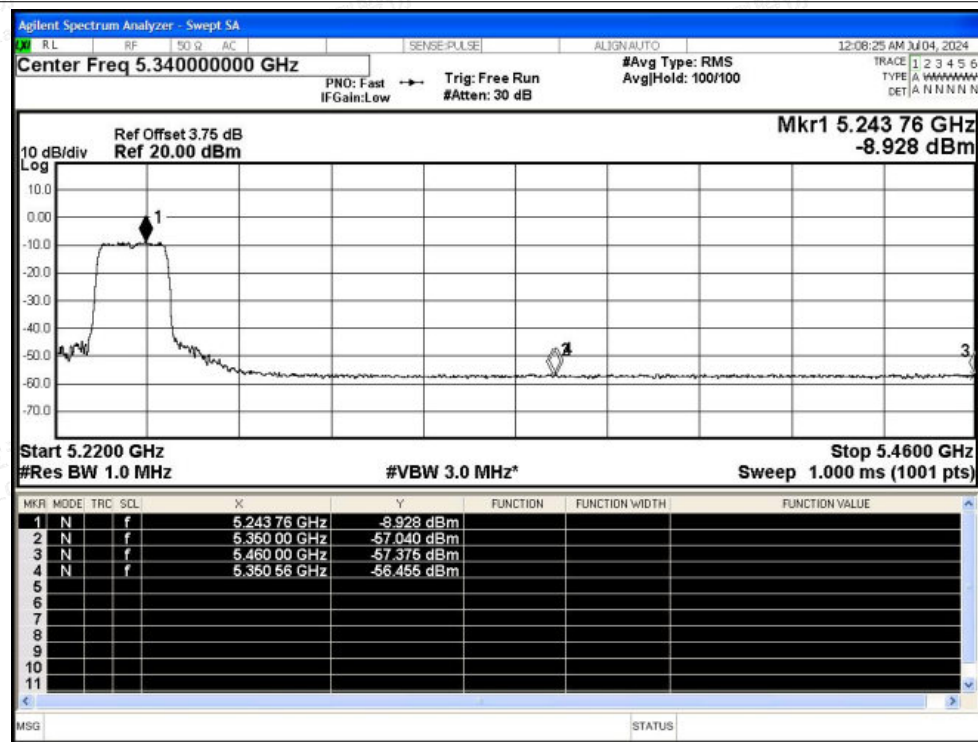




Restrict Band NVNT n40 5190MHz Ant1 Peak

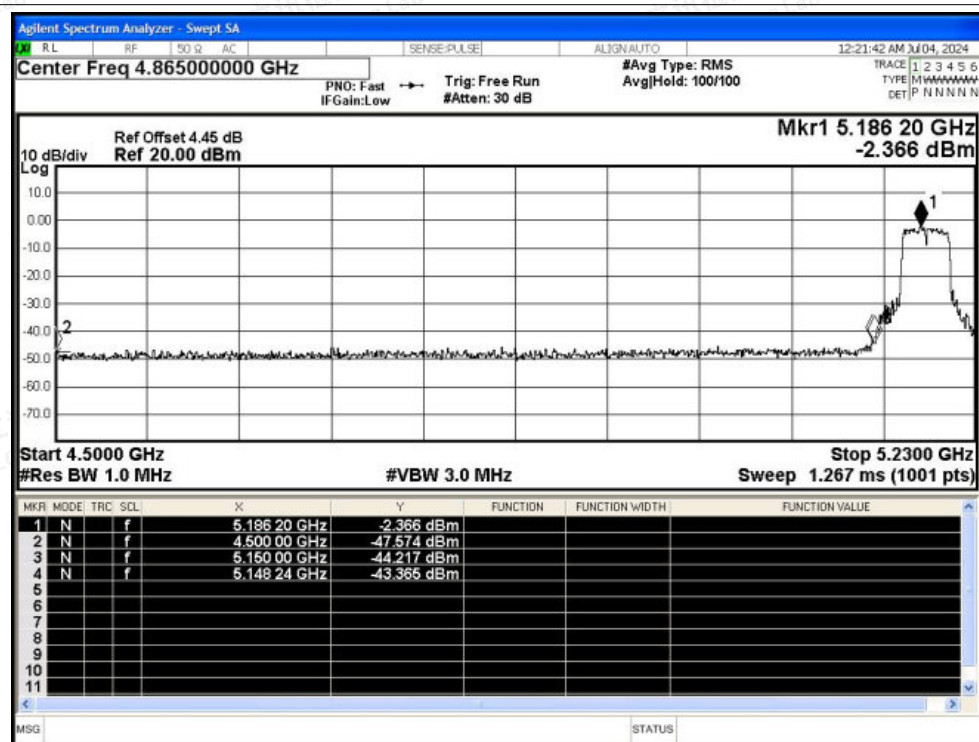


Restrict Band NVNT n40 5190MHz Ant1 Average

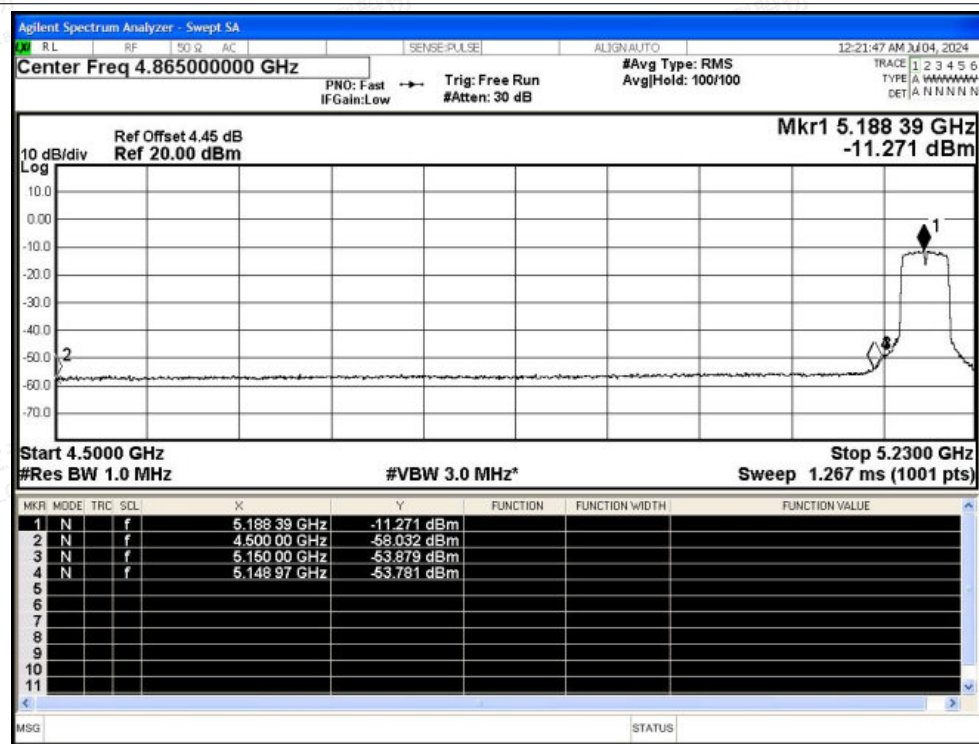




Restrict Band NVNT n40 5230MHz Ant1 Peak

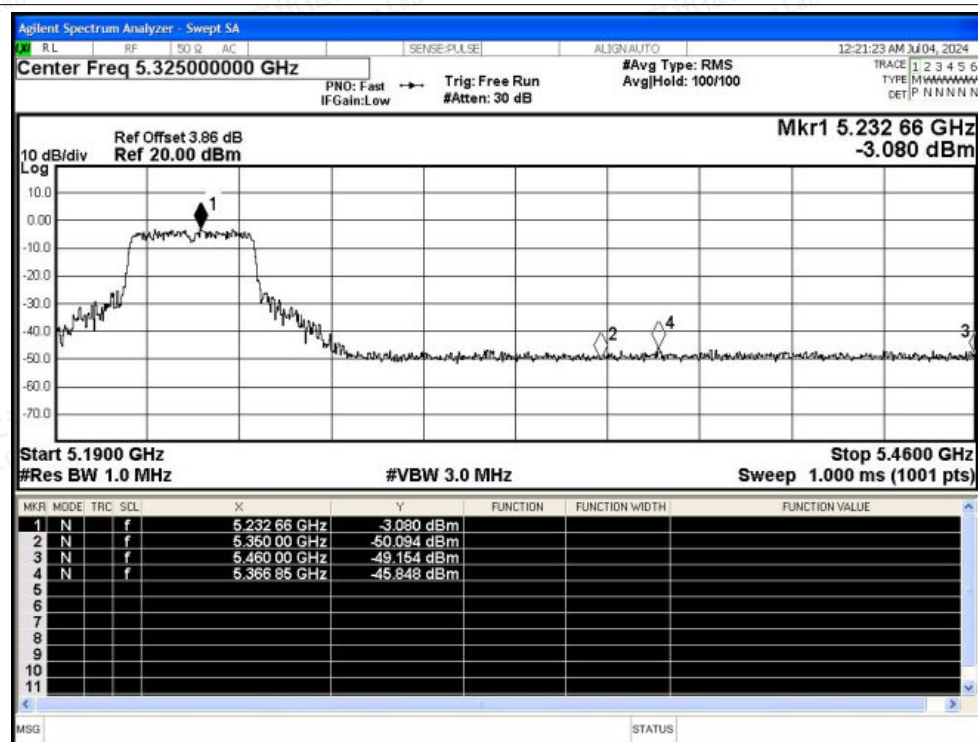


Restrict Band NVNT n40 5230MHz Ant1 Average

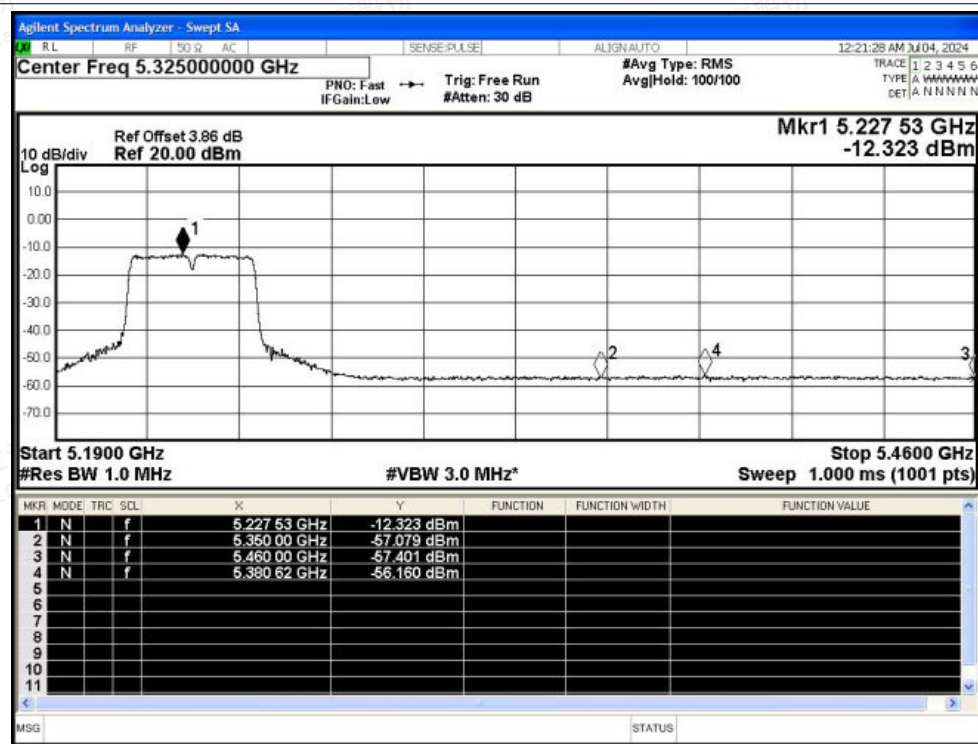




Restrict Band NVNT ac20 5180MHz Ant1 Peak

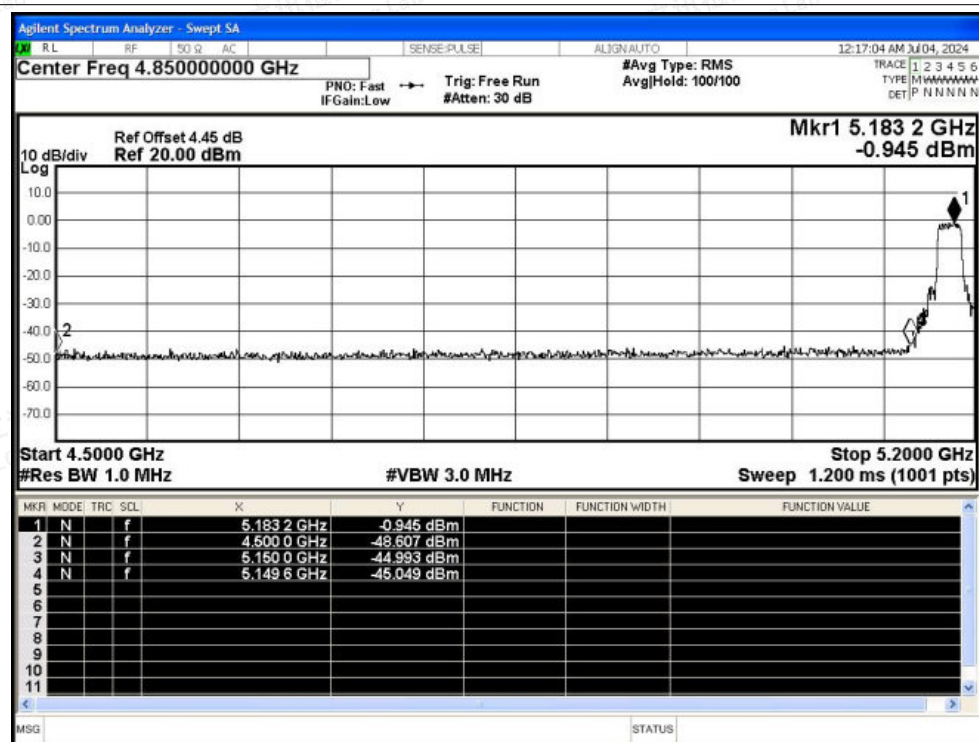


Restrict Band NVNT ac20 5180MHz Ant1 Average

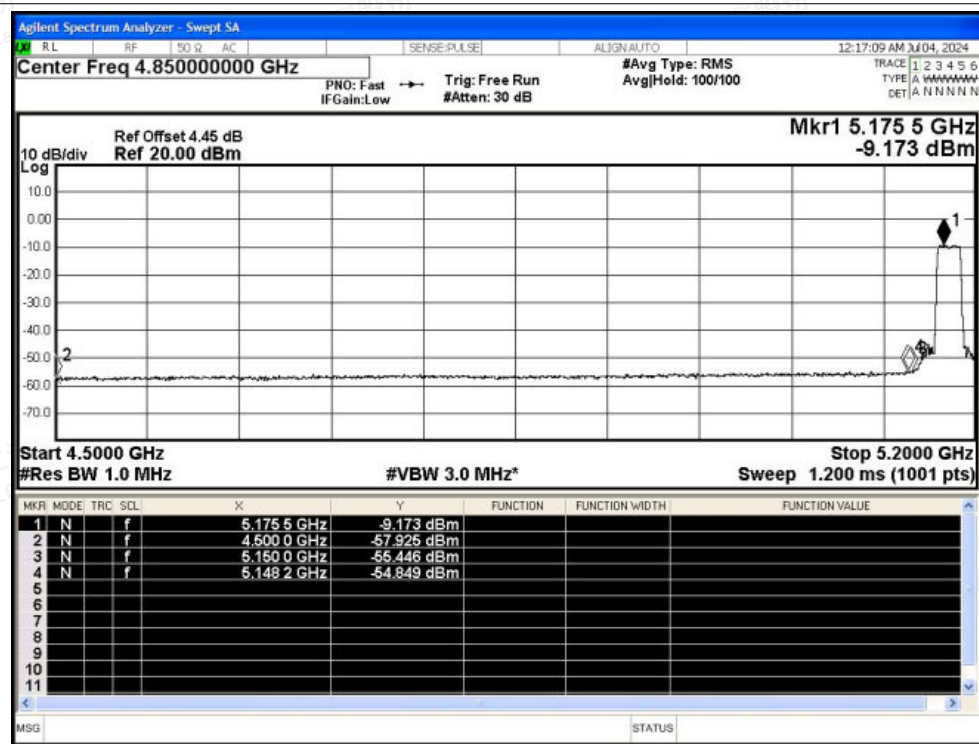




Restrict Band NVNT ac20 5240MHz Ant1 Peak

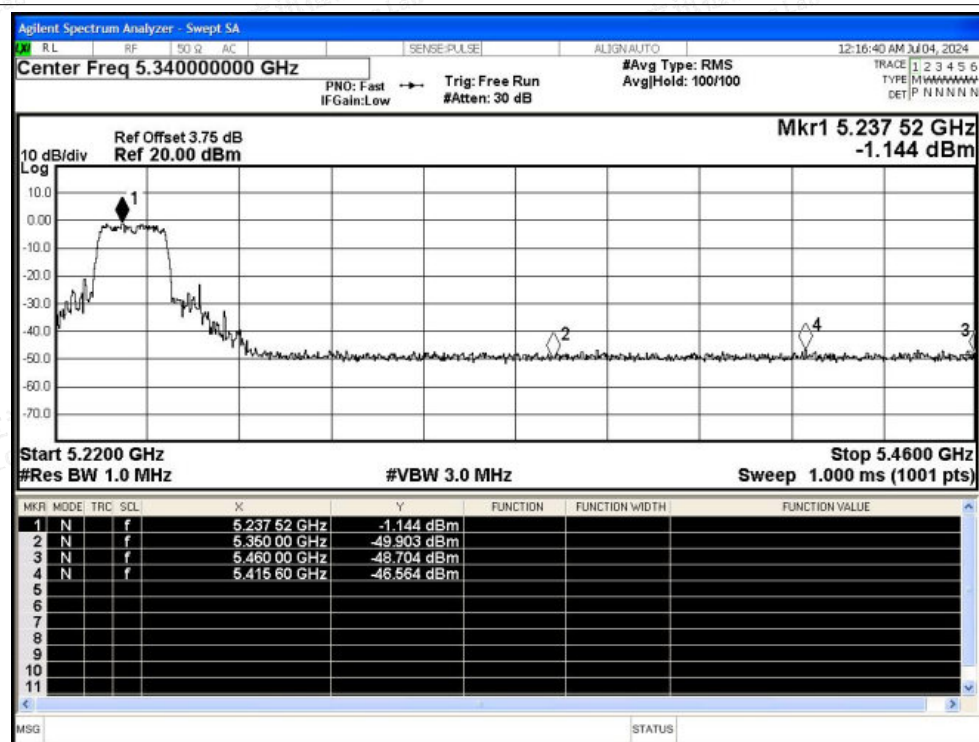


Restrict Band NVNT ac20 5240MHz Ant1 Average

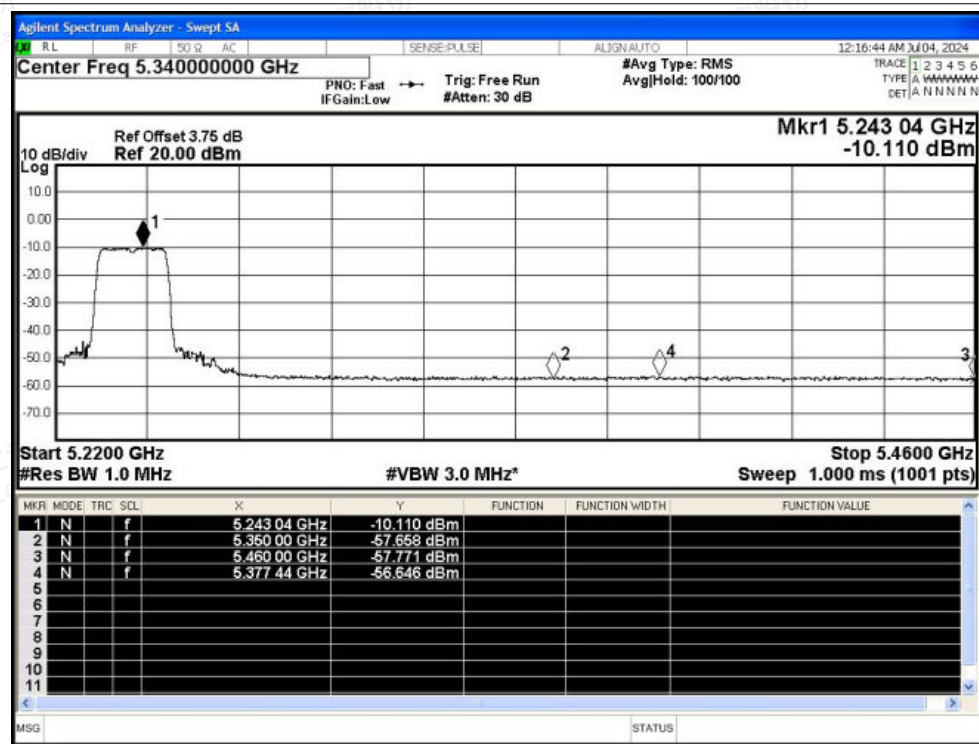




Restrict Band NVNT ac40 5190MHz Ant1 Peak

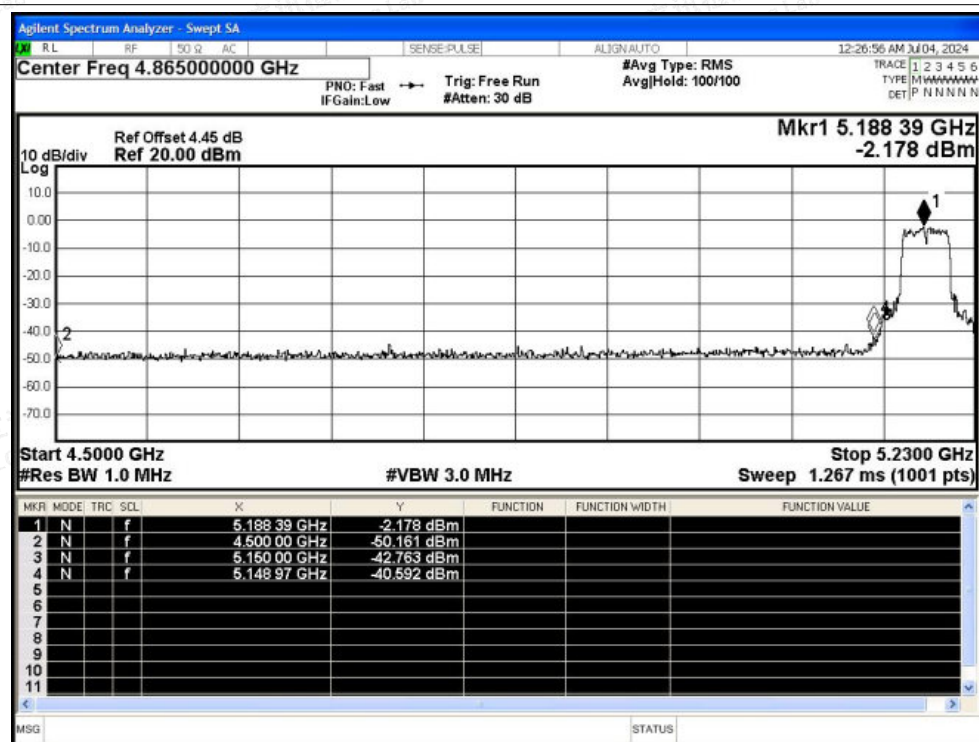


Restrict Band NVNT ac40 5190MHz Ant1 Average

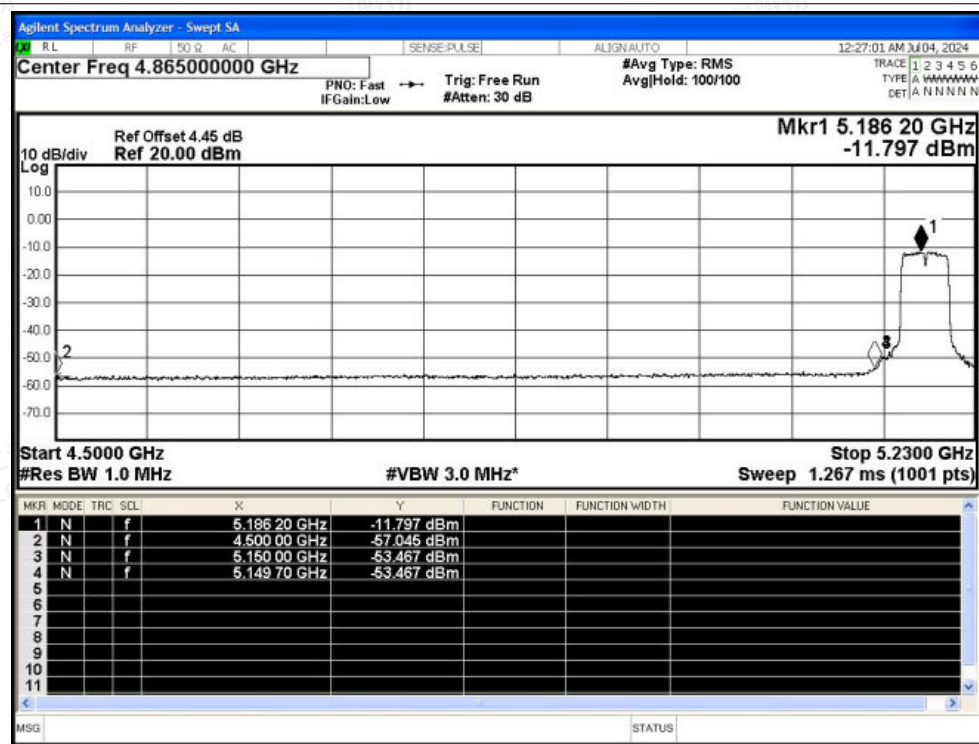




Restrict Band NVNT ac40 5230MHz Ant1 Peak

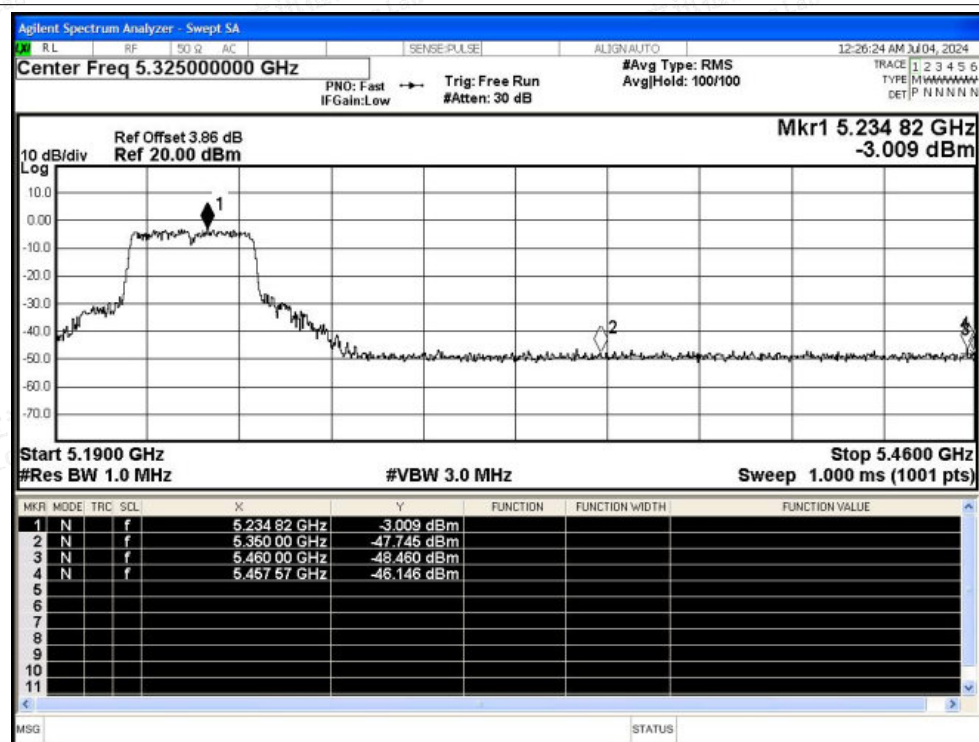


Restrict Band NVNT ac40 5230MHz Ant1 Average

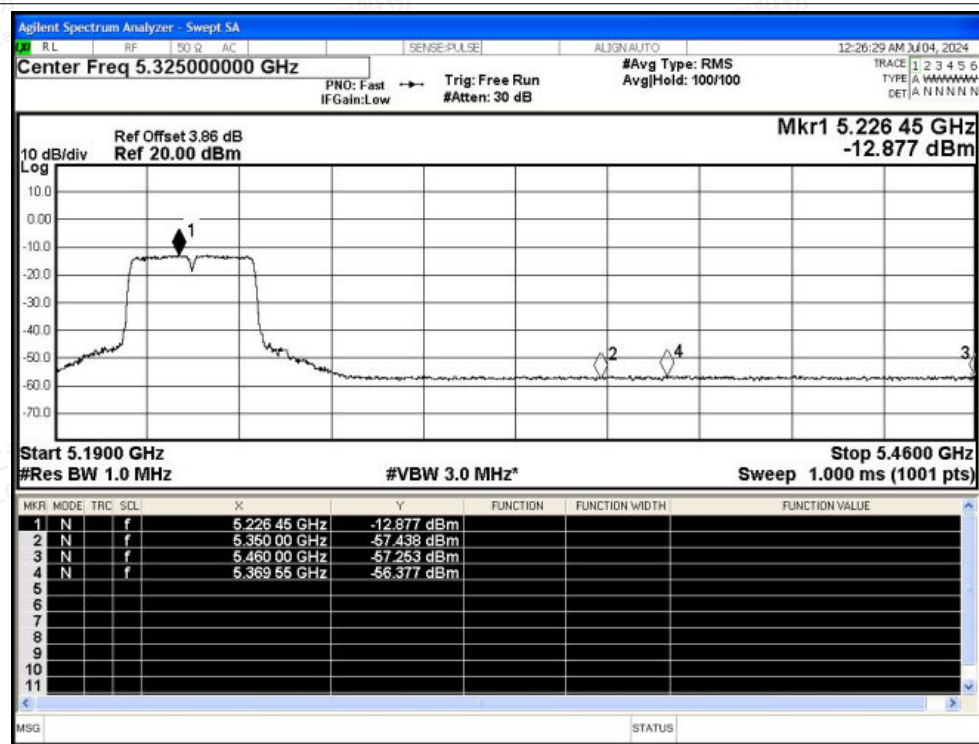




Restrict Band NVNT ac80 5210MHz Ant1 Peak

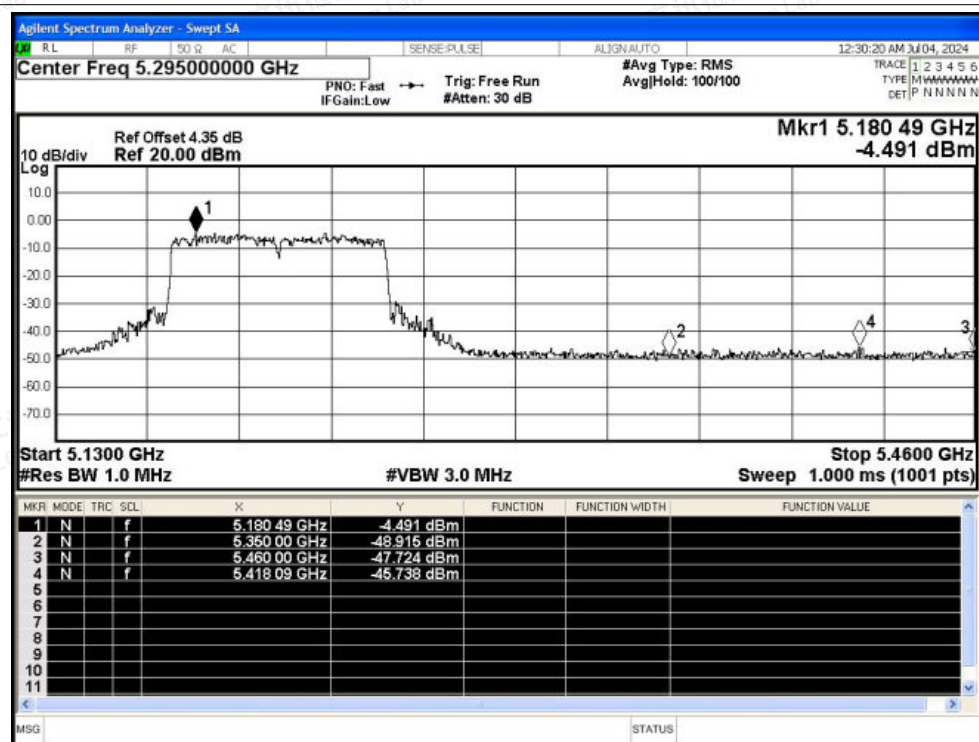


Restrict Band NVNT ac80 5210MHz Ant1 Average

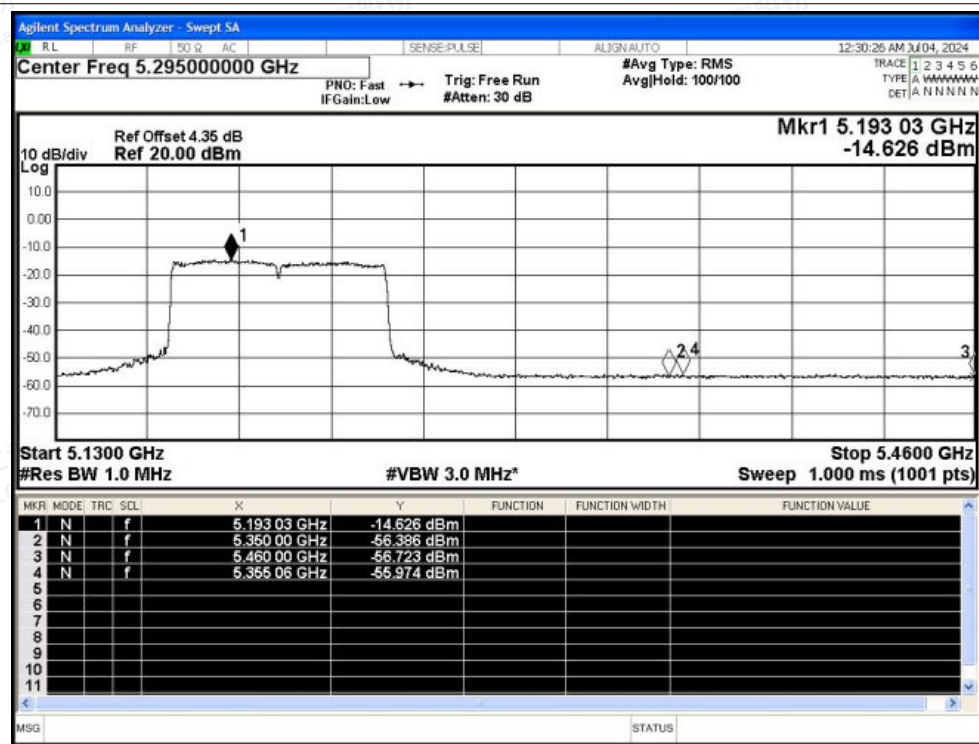




Restrict Band NVNT ac80 5210MHz Ant1 Peak

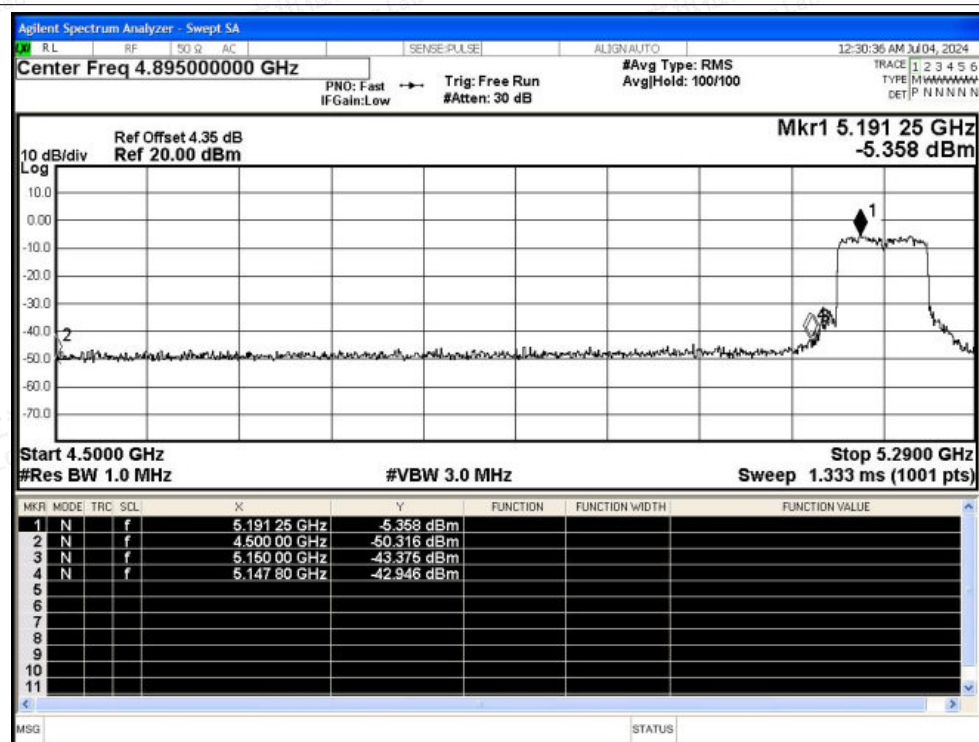

Restrict Band NVNT ac80 5210MHz Ant1 Average

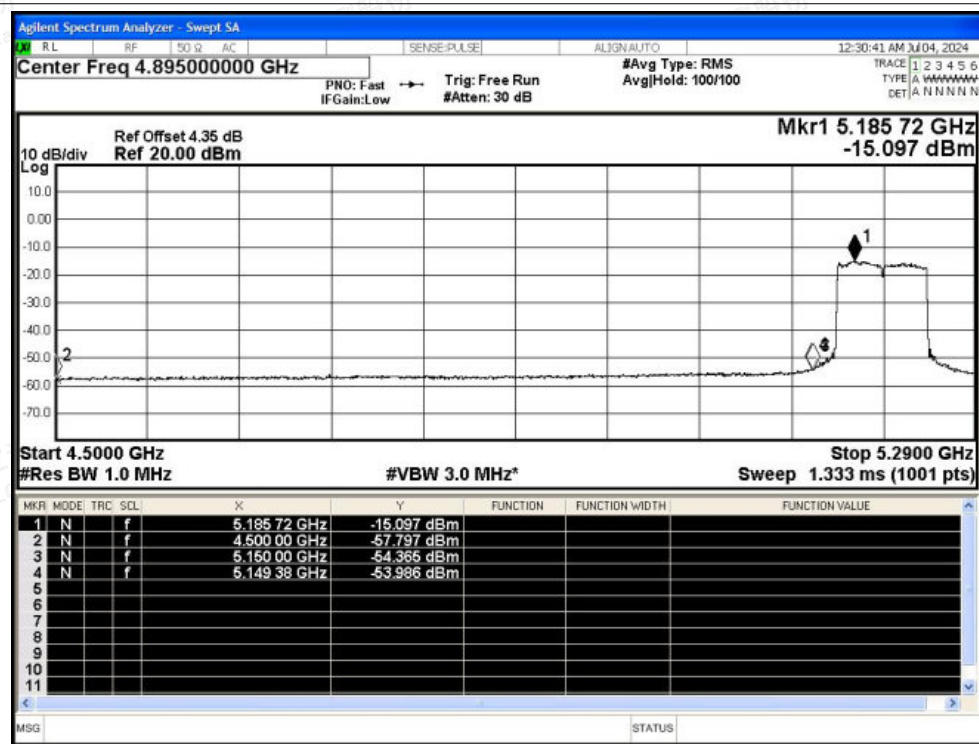



B.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant0	5180	0	0	25	Pass
NVNT	ac20	5200	Ant0	5199.96	-40000	-7.69	25	Pass
NVNT	ac20	5240	Ant0	5239.96	-40000	-7.63	25	Pass
NVNT	ac40	5190	Ant0	5190	0	0	25	Pass
NVNT	ac40	5230	Ant0	5229.92	-80000	-15.3	25	Pass
NVNT	ac80	5210	Ant0	5210	0	0	25	Pass






Test Graphs

Freq. Stability NVNT ac20 5180MHz Ant0

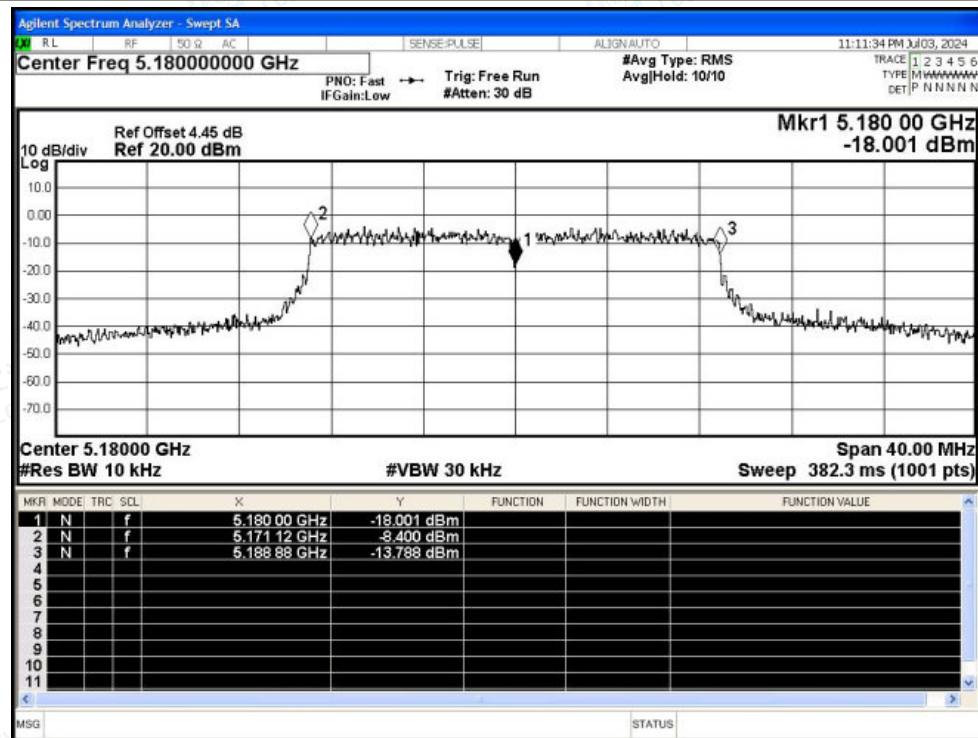


Freq. Stability NVNT ac20 5200MHz Ant0

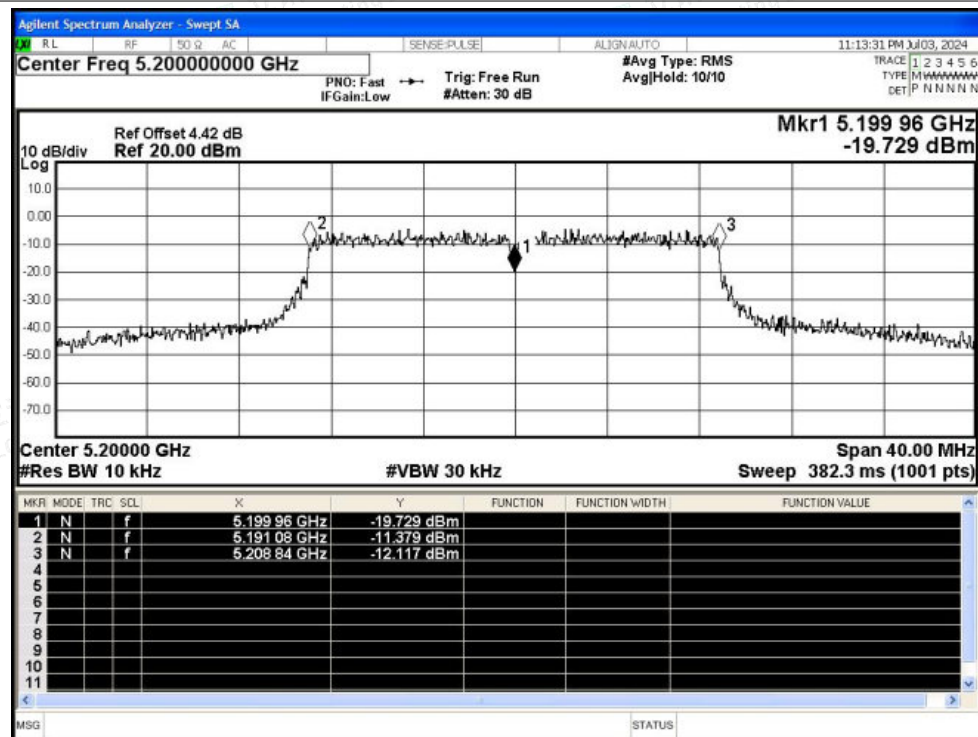




Freq. Stability NVNT ac20 5240MHz Ant0

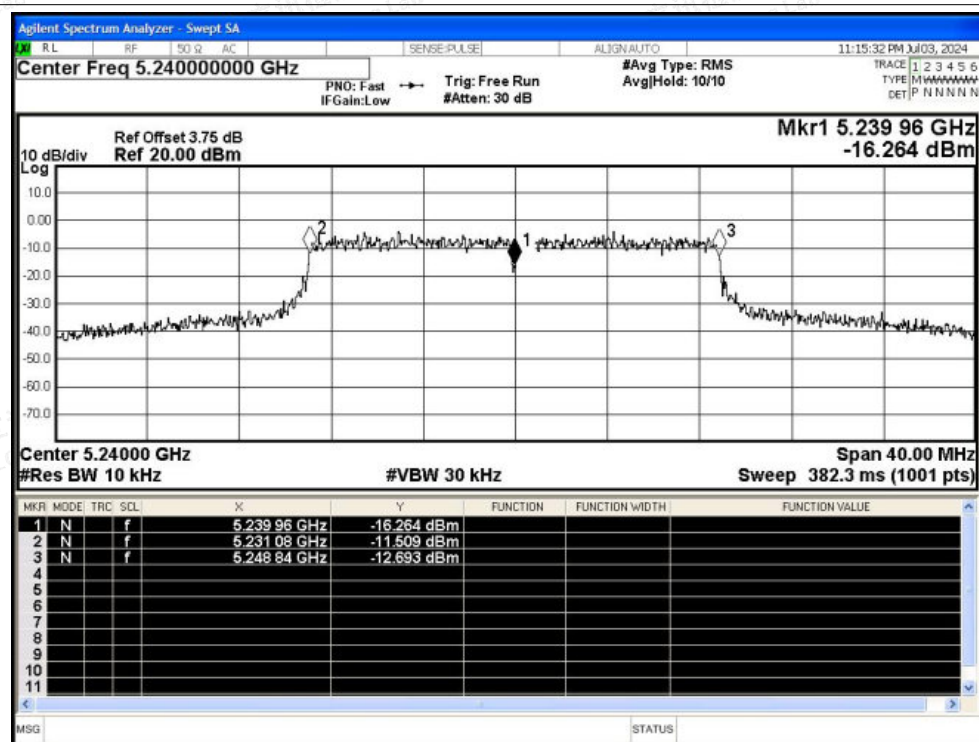


Freq. Stability NVNT ac40 5190MHz Ant0

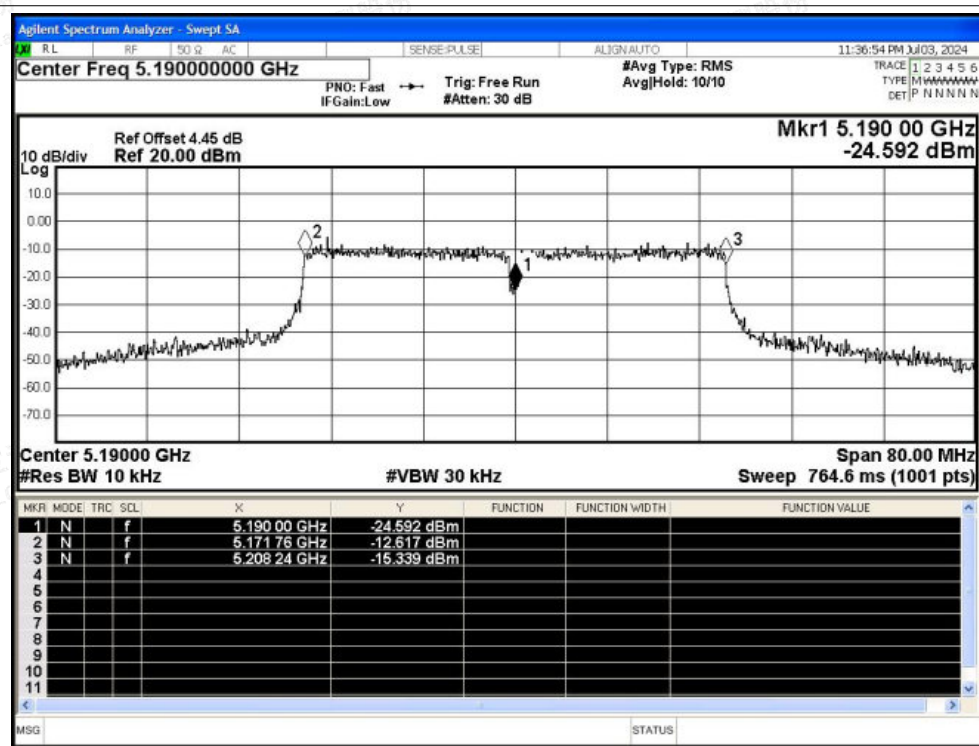




Freq. Stability NVNT ac40 5230MHz Ant0

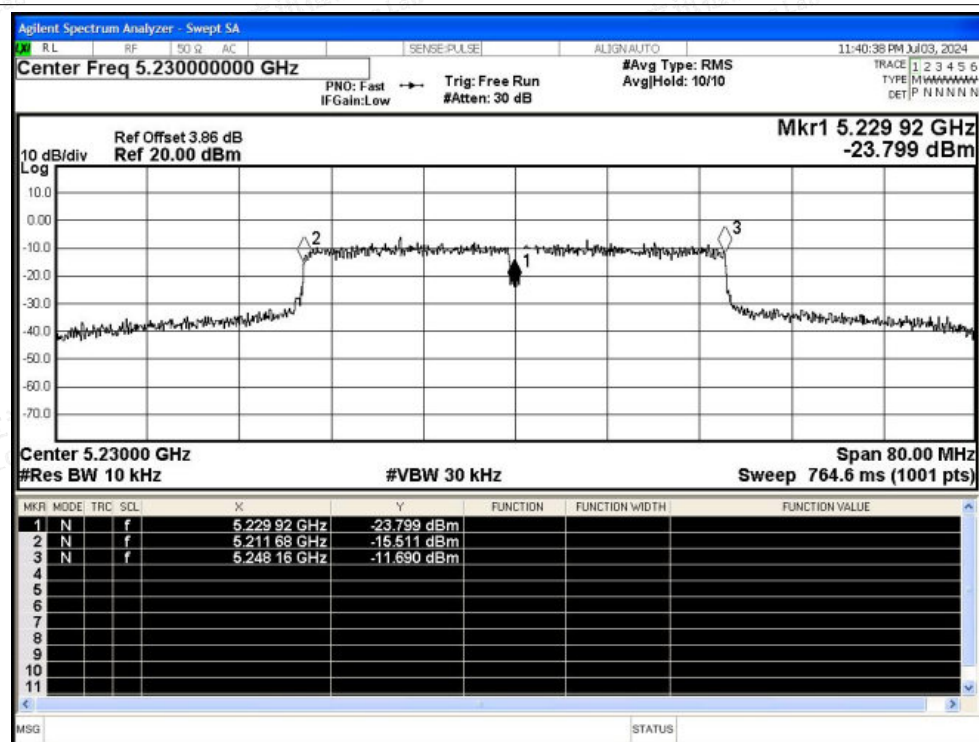

Freq. Stability NVNT ac80 5210MHz Ant0

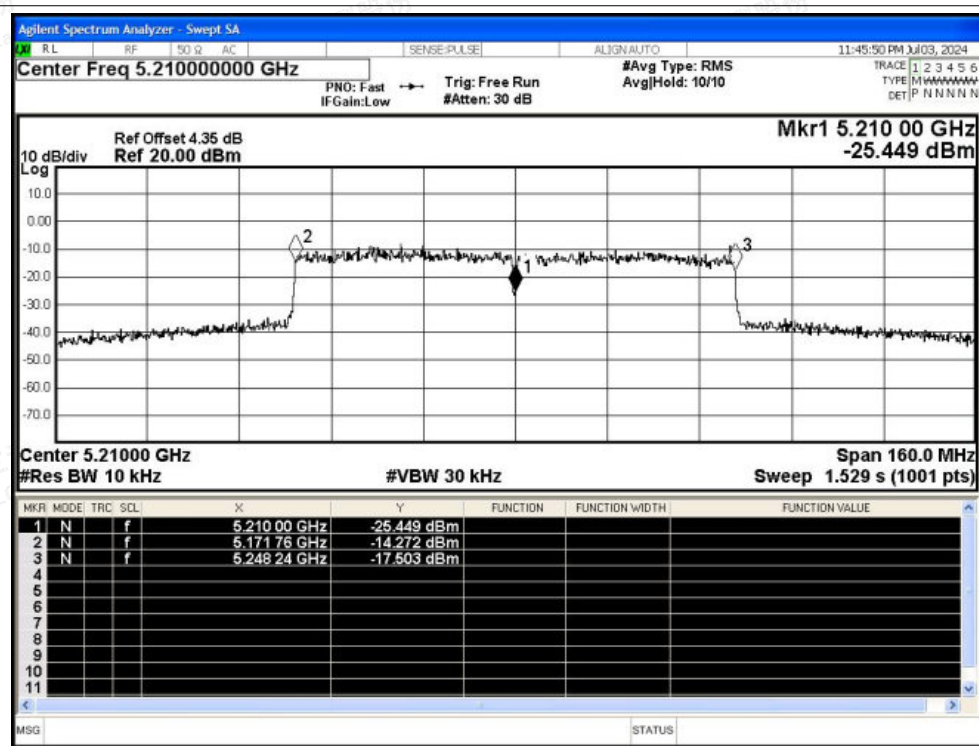



Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
NVNT	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
NVNT	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity