

D	C	B	A	NO.	DESCRIPTION	PART NO.	MATERIAL	Q'TY	SURFACE TREATMENT	REMARK
					LABEL	OFE	백색 P. E. T	.	.	.

5

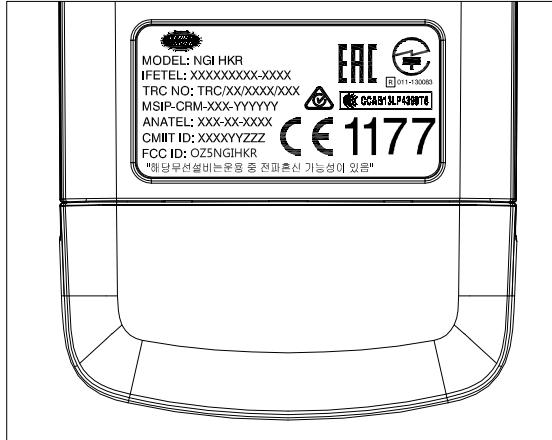


10



15

LABEL 부착 위치

**JAGUAR**

MODEL: NGI HKR

IFETEL: XXXXXXXXXX-XXXX

TRC NO: TRC/XX/XXXX/XXXX

MSIP-CRM-XXX-YYYYYY

ANATEL: XXX-XX-XXXX

CMIIT ID: XXXYYZZZ

FCC ID: OZ5NGIHKR

"해당무선설비는운용 중 전파혼신 가능성이 있음"



CCAB13LP4390T8

LAND ROVER

MODEL: NGI HKR

IFETEL: XXXXXXXXXX-XXXX

TRC NO: TRC/XX/XXXX/XXXX

MSIP-CRM-XXX-YYYYYY

ANATEL: XXX-XX-XXXX

CMIIT ID: XXXYYZZZ

FCC ID: OZ5NGIHKR

"해당무선설비는운용 중 전파혼신 가능성이 있음"



CCAB13LP4390T8

SCALE 2:1

LABEL	MATERIAL	백색 P. E. T 0.075t
EXCEPT FOR DESIGNATE PRINT COLOR	SILVER	
EXCEPT FOR DESIGNATE GROUND COLOR	DIC-582(BLACK)	
COATING	UV COATING	

Appointment

- That product specification acts in design appointment Film and specification.
- That keeps written size. (Non-appointment tolerance : ± 0.2)
- That noxious defect does not exist in external appearance (Press Burr, Scratch, Dirt sticking, Decolorization etc.)
- That printing specification accords with the limit of sample and plan and there must be no defect, such as printing spreading and eccentricity etc...
- Printing contate state has to be astisfied with this film standard (1 Kg, 20 times, Stroke:30mm). (A whole surface printing)
- Submit sample before mass-producing product, then acquire design approval. That doubt item inquires in design re-approval.
- In case of amendment happening, that notifies in design. Then acquire
- All raw materials that purvey by wisdom electron. Subsidiary materials and parts should be harmless in environment in Ohsung company's requirement, Cd, Pb, Hg, Cr6+, PBB, PBDE 6 element must not exceed standard PPM that decide in this firm.

DATE	AUTHORIZED	CHANGED DETAILS					CHANGED BASIS
SCALE	1 : 1	UNIT	MM	LIMIT	± 0.1	DESCRIPTION	
Drafter	Checked	Approved				LABEL	
MIN. S. B						MODEL NAME	OTMF-B306TYPE
2014.01.04							
OH SUNG ELECTRONICS CO., LTD.	REF. NO.	NGI				P/NO.	OFE
	STOCK NO.						