

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant: OHSUNG ELECTRONICS CO., LTD.**#181 Gongdan-dong , Gumi-si, Gyeongbuk****Republic of Korea.****Attn : Mr. Hak-Ki Kim / General Manager****Date of Issue: Dec. 14, 2016****Order Number: GETEC-C1-16-414****Test Report Number: GETEC-E3-16-052****Test Site: GUMI UNIVERSITY EMC CENTER****FCC Registration Number: 269701****FCC ID. : OZ5URCDMSOUT****Applicant : OHSUNG ELECTRONICS CO.,LTD.**

Rule Part(s) : FCC Part 15 Subpart B
Equipment Class : Class B computing device peripheral (JBP)
EUT Type : Stream Injector Output Device
Type of Authority : Certification
Model Name : DMS-OUT
Trade Name : UNIVERSAL remote control

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 (2014) / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Sang Hyun Park, Associate Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,

Jae-Hoon Jeong, Technical Manager
GUMI UNIVERSITY EMC CENTER



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	6
4. DESCRIPTION OF TESTS.....	7
4.1 TEST CONDITION.....	7
4.2 CONDUCTED EMISSION	8
4.3 RADIATED EMISSION.....	9
5. CONDUCTED EMISSION.....	10
5.1 OPERATING ENVIRONMENT	10
5.2 TEST SET-UP	10
5.3 MEASUREMENT UNCERTAINTY.....	10
5.4 LIMIT	11
5.5 TEST EQUIPMENT USED.....	11
5.6 TEST DATA FOR CONDUCTED EMISSION	11
6. RADIATED EMISSION	14
6.1 OPERATING ENVIRONMENT	14
6.2 TEST SET-UP	14
6.3 MEASUREMENT UNCERTAINTY.....	14
6.4 LIMIT	15
6.5 TEST EQUIPMENT USED.....	16
6.6 TEST DATA FOR RADIATED EMISSION	16
11. SAMPLE CALCULATIONS	21
11.1 EXAMPLE 1 :	21
11.2 EXAMPLE 2 :	21
12. RECOMMENDATION & CONCLUSION.....	22
APPENDIX A – ATESTSTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: OHSUNG ELECTRONICS CO.,LTD.

Applicant Address: #181, Gongdan 1-dong, Gumi-si, Gyeongsangbuk-do, Republic of Korea

Manufacturer: OHSUNG ELECTRONICS CO.,LTD.

Manufacturer Address: #181, Gongdan 1-dong, Gumi-si, Gyeongsangbuk-do, Republic of Korea

Contact Person: Mr. Hak-Ki Kim / General Manager

Telephone Number: +82-54-468-7281 **Fax Number:** +82-54-461-8368

● FCC ID	OZ5URCDMSOUT
● EUT Type	Stream Injector Output Device
● Equipment Class	Class B computing device peripheral (JBP)
● Model Name	DMS-OUT
● Trade Name	UNIVERSAL remote control
● Serial Number	Prototype
● Rule Part(s)	FCC Part 15 Subpart B
● Type of Authority	Certification
● Test Procedure(s)	ANSI C63.4 (2014)
● Dates of Test	Nov. 23 ~ Dec. 14, 2016
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.
● Test Report Number	GETEC-E3-16-052
● Date of Issue	Dec. 14, 2016

EUT Type: Stream Injector Output Device

FCC ID.: OZ5URCDMSOUT






2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **OHSUNG ELECTRONICS CO.,LTD. Stream Injector Output Device (Model Name: DMS-OUT)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.

This test site is one of the highest point of Gumi UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

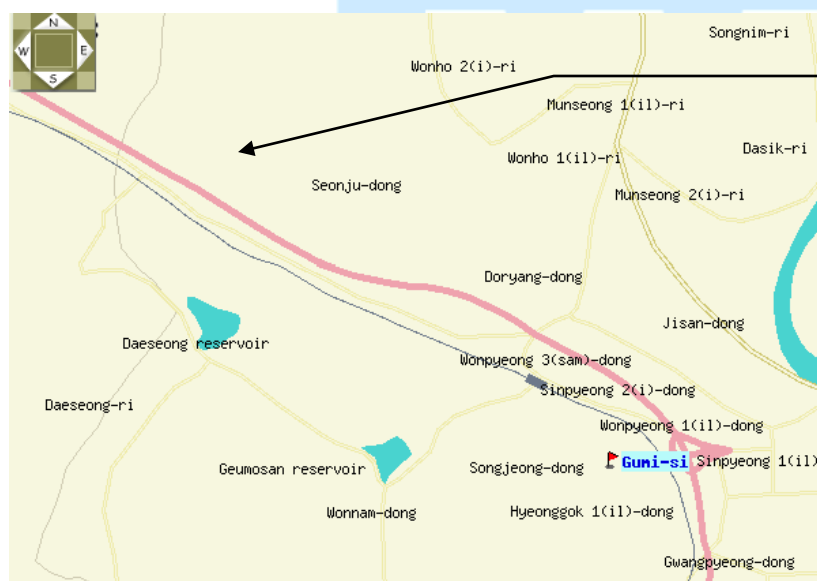

GUMI UNIVERSITY EMC CENTER
37 Yaeun-ro, Gumi-si,
Gyeongsangbuk-do, 730-711,
Republic of Korea
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **OHSUNG Electronics Co.,Ltd.**
Stream Injector Output Device (Model Name: DMS-OUT) FCC ID.: OZ5URCDMSOUT

Type of product	Stream Injector Output Device
Model Name	DMS-OUT
Power	DC 5V(Standard PoE Injector or PoE Switch(purchased separately)
Microprocessor	Coretex-A5 600MHz
Memory	128 MB NAND, 128 MB RAM
Network	One 10/100 Ethernet port (PoE)
Weight	5.8 oz
Size	4.6" x 4.6" x 1.2"



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
Stream Injector Input Device	OHSUNG ELECTRONICS CO.,LTD.	DMS-IN	S/N: None FCC ID.: OZ5URCDMSIN
TP-Link network	TP-LINK Technologies Co., Ltd	TL-SG1008P	S/N: None FCC ID.: None
Wireless router	EFM networks	N8004	S/N: N8004 11062501912 FCC ID.: Verification
DVD Player	LG Electronics inc	LC-954	S/N: None FCC ID.: Verification

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
AC-DC Adapter ¹⁾	Dongguan MLF Tech Co., Ltd	MLF-A250501000CU	-

1)Input: 100 – 240V , 50/60Hz 0.4A ; Output 5 V, 1A

3.2.3 Used Cable(s)

Cable Name	Condition	Description
LAN cable	Connected to the EUT and Network	10.00 m shielded
Multi tap	Connected to the AC Adapter and AC Power Source	1.80 m Unshielded
AC-DC adapter	Connected to the EUT and Multi tap	1.80 m shielded
Analog audio	Connected to the EUT and DMS out	3.00 m shielded
Digital audio	Connected to the EUT and DMS out	3.00 m shielded
Optical audio	Connected to the EUT and DMS out	3.00 m Unshielded

3.3 Modification Item(s)

- None




4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The test conditions of the noted test mode(s) in this test report are;

- Test Voltage / Frequency : AC 120 V / 60 Hz
- Test Mode(s)
 - . Network communication
- Operating test pattern
 - . Conducted Emission: The EUT was communication via LAN port to Network
 - . Radiated Emission: The EUT was communication via LAN port to Network

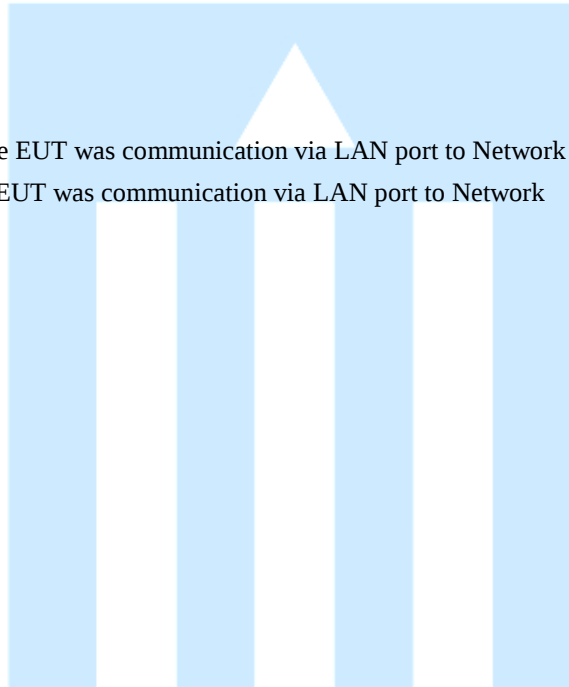



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure.
(FCC Test Film Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.4 m in height and 0.8 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

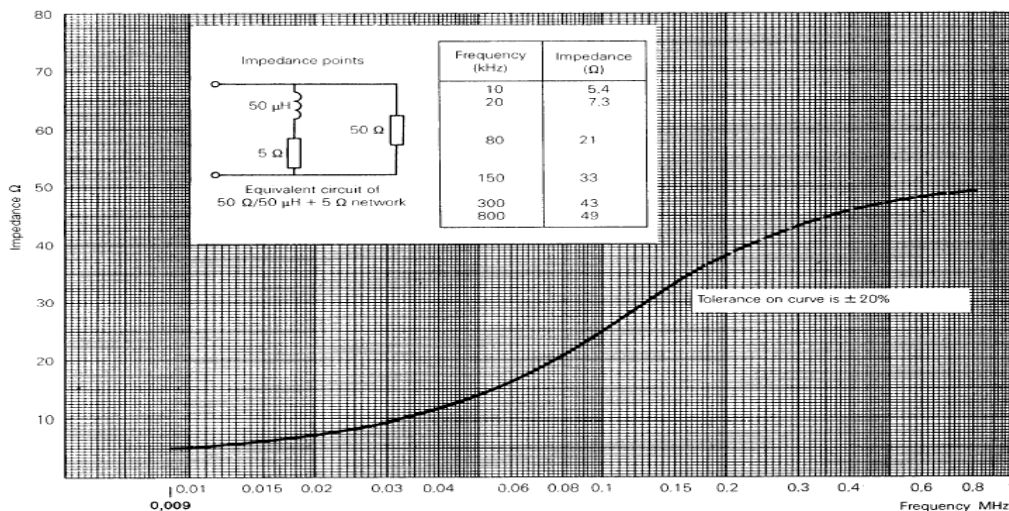


Fig 2. Impedance of LISN



4.3 Radiated Emission

Exploratory Radiated measurements were conducted at the 3 m or 10 m semi anechoic chamber in order to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Final measurements of below 1 GHz were made at 3 m or 10 m Chamber (FCC Test Firm Registration No.: 269701) or Open area test site (FCC Test Firm Registration No.: 269701) that complies with CISPR 16/ANSI C63.4.

Above 1 GHz final measurements were conducted at the 3m Chamber (FCC Test Firm Registration No.: 269701) only.

For measurements above 1GHz, the bottom side of 3 m chamber was installed with absorbers in order to meet SVSWR Limit.

Exploratory measurements were scanned using Peak mode of EMI Test receiver and final measurements were measured with Quasi-Peak mode (Below 1 GHz) and Peak & Average mode (Above 1 GHz).

The measurements were performed by rotating the EUT 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

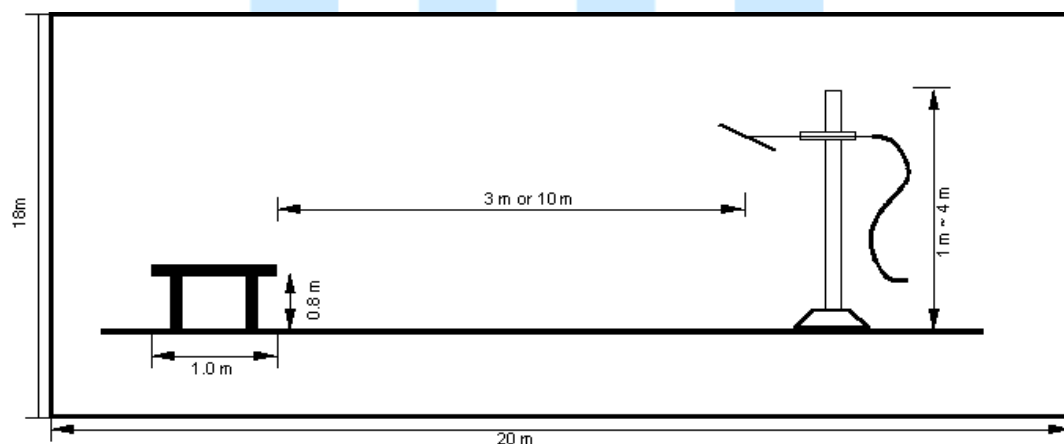


Fig 3. Dimensions of test site (Below 1 GHz)

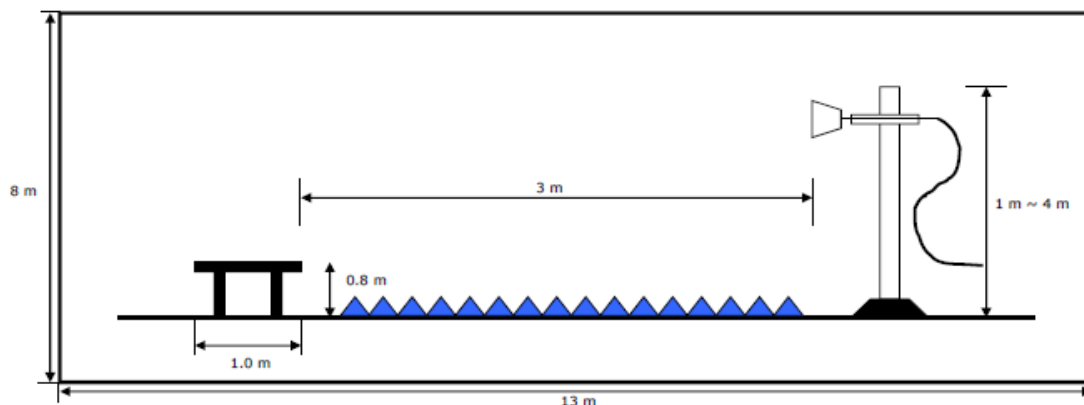


Fig 4. Dimensions of test site (Above 1 GHz)



5. Conducted Emission

5.1 Operating Environment

Temperature : 23.3 °C
Relative Humidity : 37.3 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.4 m heights above the floor, 0.8 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.85 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results



5.4 Limit

RFI Conducted	FCC Limit(dBμV) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 18, 2017
■ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 19, 2017
■ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 19, 2017
□ - ISN T8	TESEQ.GmbH	ISN	24568	Apr. 22, 2017
□ - ST 08	TESEQ.GmbH	ISN	42870	Jun. 09, 2017
■ - EMC 32	Rohde & Schwarz	Software	Ver 8.53	N/A

5.6 Test data for Conducted Emission

- Test Date : Nov. 29~30, 2016
- Resolution Bandwidth : 9 kHz
- Frequency Range : 0.15 MHz ~ 30 MHz
- Line : L1: Live, N: Neutral



- Operating condition: Network Communication mode (PoE Injector)

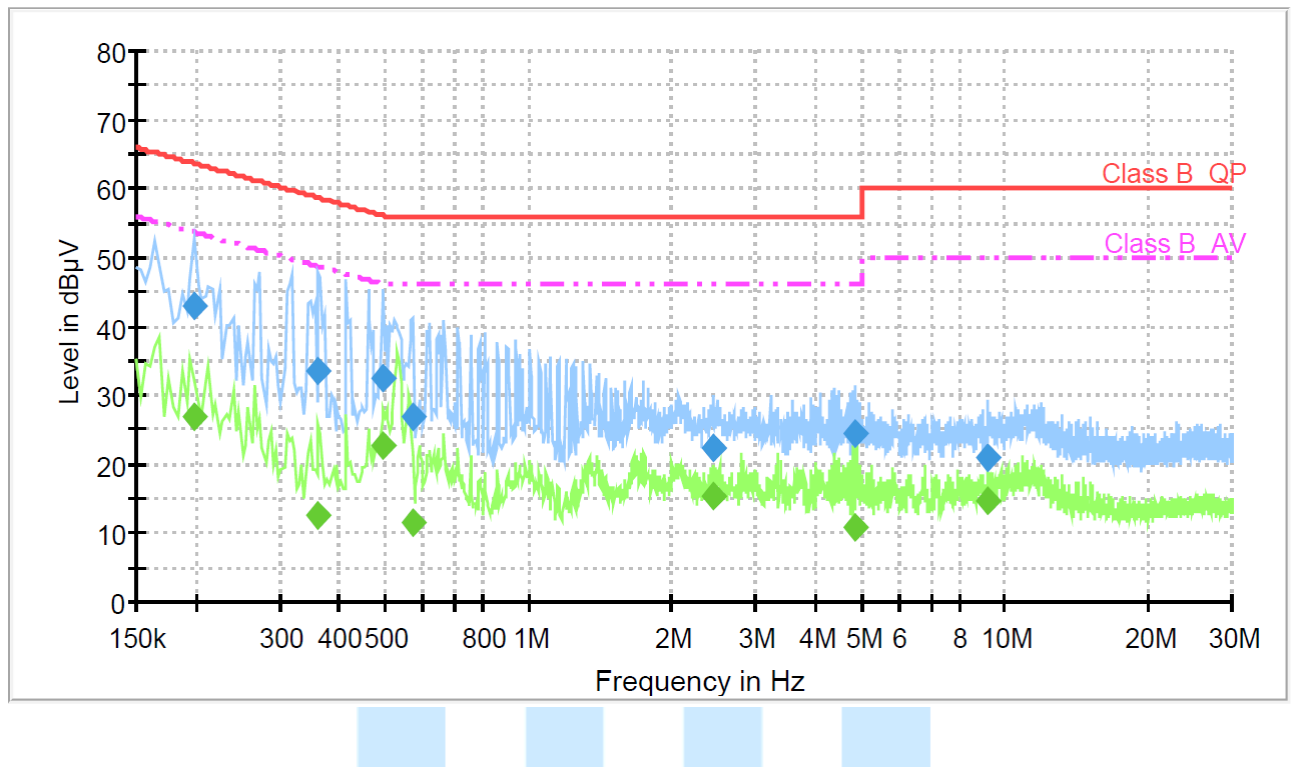

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.198506	42.9	100.0	9.000	Off	N	9.6	20.7	63.7	
0.362681	33.4	100.0	9.000	Off	N	9.7	25.3	58.7	
0.497006	32.4	100.0	9.000	Off	L1	9.6	23.6	56.0	
0.571631	26.9	100.0	9.000	Off	L1	9.7	29.1	56.0	
2.440988	22.5	100.0	9.000	Off	N	9.7	33.5	56.0	
4.832719	24.4	100.0	9.000	Off	L1	9.8	31.6	56.0	
9.235594	21.1	100.0	9.000	Off	L1	9.9	38.9	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.198506	26.8	100.0	9.000	Off	N	9.6	26.8	53.7	
0.362681	12.5	100.0	9.000	Off	N	9.7	36.2	48.7	
0.497006	22.8	100.0	9.000	Off	L1	9.6	23.3	46.0	
0.571631	11.6	100.0	9.000	Off	L1	9.7	34.4	46.0	
2.440988	15.3	100.0	9.000	Off	N	9.7	30.7	46.0	
4.832719	10.8	100.0	9.000	Off	L1	9.8	35.2	46.0	
9.235594	14.7	100.0	9.000	Off	L1	9.9	35.3	50.0	

< Fig 5. Graph of continuous disturbance >



- Operating condition: Network Communication mode (AC-DC Adapter)

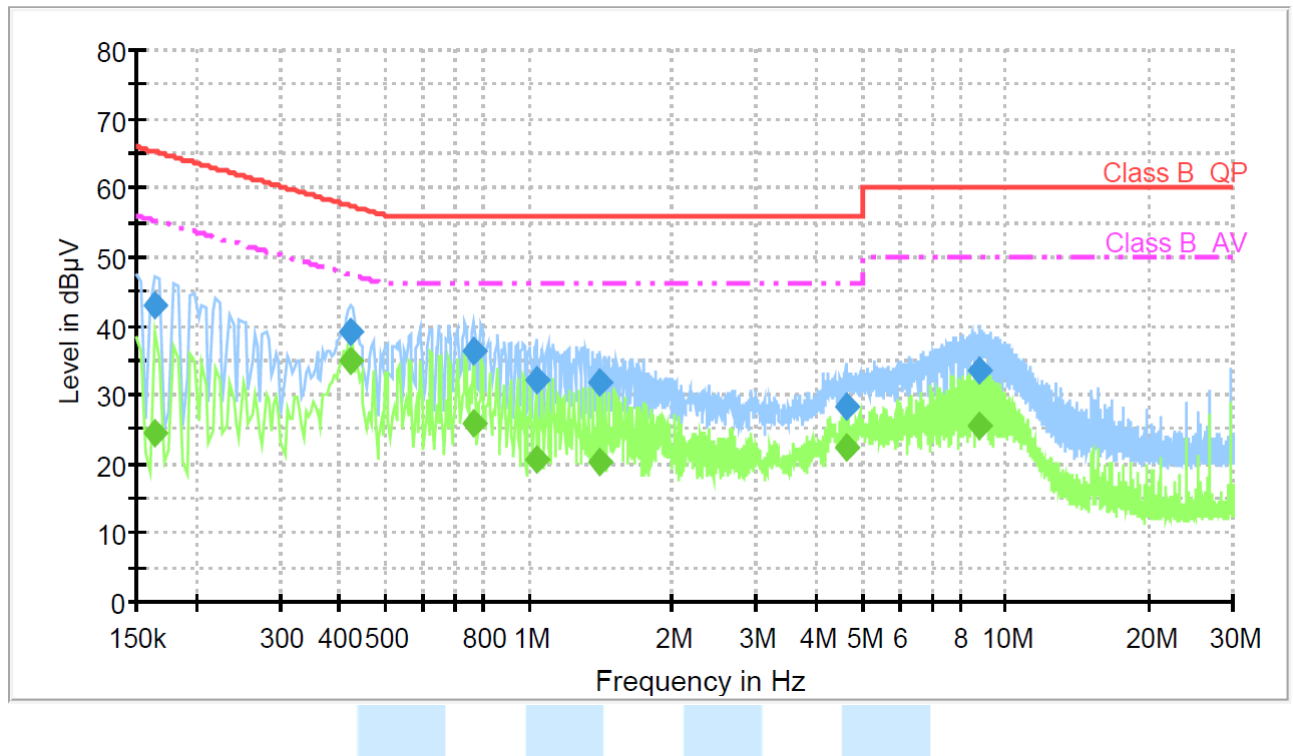

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164925	43.0	100.0	9.000	Off	N	9.6	22.3	65.2	
0.422381	39.3	100.0	9.000	Off	L1	9.6	18.1	57.4	
0.769388	36.3	100.0	9.000	Off	L1	9.7	19.7	56.0	
1.034306	32.0	100.0	9.000	Off	L1	9.7	24.0	56.0	
1.403700	31.8	100.0	9.000	Off	L1	9.7	24.2	56.0	
4.612575	28.4	100.0	9.000	Off	L1	9.8	27.6	56.0	
8.757994	33.4	100.0	9.000	Off	L1	9.9	26.6	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164925	24.6	100.0	9.000	Off	N	9.6	30.6	55.2	
0.422381	34.8	100.0	9.000	Off	L1	9.6	12.6	47.4	
0.769388	25.9	100.0	9.000	Off	L1	9.7	20.1	46.0	
1.034306	20.6	100.0	9.000	Off	L1	9.7	25.4	46.0	
1.403700	20.3	100.0	9.000	Off	L1	9.7	25.7	46.0	
4.612575	22.4	100.0	9.000	Off	L1	9.8	23.6	46.0	
8.757994	25.3	100.0	9.000	Off	L1	9.9	24.7	50.0	

< Fig 6. Graph of continuous disturbance >



6. Radiated Emission

6.1 Operating Environment

Temperature : 21.0 °C
Relative Humidity : 40.9 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m & 10 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 1.0 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

Test Items(3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.78 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	5.06 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.03 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.42 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 18 000 MHz, 3 m)	5.64 dB	Confidence level of approximately 95 % ($k = 2$)
Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.36 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.37 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	4.49 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	4.47 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.27 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results

EUT Type: Stream Injector Output Device

FCC ID.: OZ5URCDMSOUT





6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0

Frequency (MHz)	FCC Class B Peak Limit @ 3 m dB μ V/m	FCC Class B Average Limit@ 3 m dB μ V/m
> 1 000	74.0	54.0

Frequency (MHz)	CISPR Class B Peak Limit @ 3 m dB μ V/m	CISPR Class B Average Limit@ 3 m dB μ V/m
> 1 000	70.0	50.0



6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
□ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	Apr. 18, 2017
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Jul. 20, 2017
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 18, 2017
■ - VULB9160	Schwarzbeck	Broad Band Test Antenna	3193	Mar. 28, 2018
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	Oct. 13, 2017
■ - MCU066	matur GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	matur GmbH	Turntable	1390307	N/A
■ - AM 4.0	matur GmbH	Antenna Mast	1390308	N/A
■ - CO3000	Innco system GmbH	Position Controller	1390306	N/A
■ - DT3000	Innco system GmbH	Turntable	1390307	N/A
■ - MA4000-EP	Innco system GmbH	Antenna Mast	1390308	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	Jan. 05, 2017
■ - 87405A	Agilent	Preamplifier	MY39500777	Jan. 05, 2017
■ - EMC 32	Rohde & Schwarz	Software	Ver.9.26.01	N/A

6.6 Test data for Radiated Emission

- Test Date : Nov 23~Dec.14,2016
 -. Measurement Distance : 3 m, 10 m
 -. Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz(600 MHz). The measurement was made up to 5 000 MHz.


-. Measurement

Frequency range	30 MHz ~ 1 GHz	Above 1 GHz
Detector mode	Quasi peak	Peak / Average
Resolution bandwidth	120 kHz	1 MHz



-, 30 MHz ~ 1 GHz

▪ Operating condition: Network Communication mode(PoE Injector)

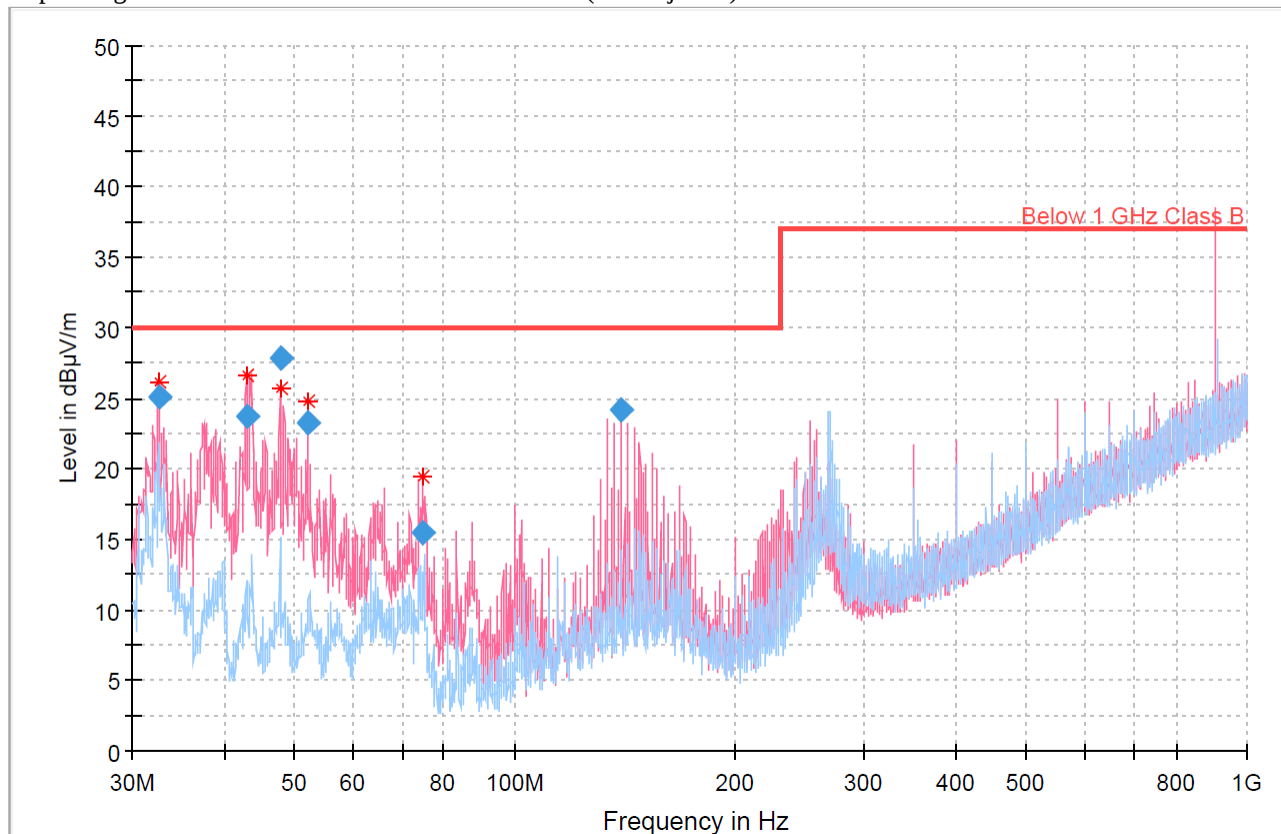


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.599	25.01	30.00	4.99	10000.0	120.000	225.0	V	173.0	-13.0
42.919	23.69	30.00	6.31	10000.0	120.000	381.0	V	129.0	-11.8
47.792	27.84	30.00	2.16	10000.0	120.000	184.4	V	23.0	-11.5
52.202	23.24	30.00	6.76	10000.0	120.000	197.5	V	133.0	-11.4
74.799	15.45	30.00	14.55	10000.0	120.000	125.0	V	268.0	-13.9
139.701	24.12	30.00	5.88	10000.0	120.000	125.1	V	111.0	-10.1

< Fig 7. Radiated emission result (30 MHz ~ 1 000 MHz) >



- Operating condition: Network Communication mode(AC-DC Adapter)

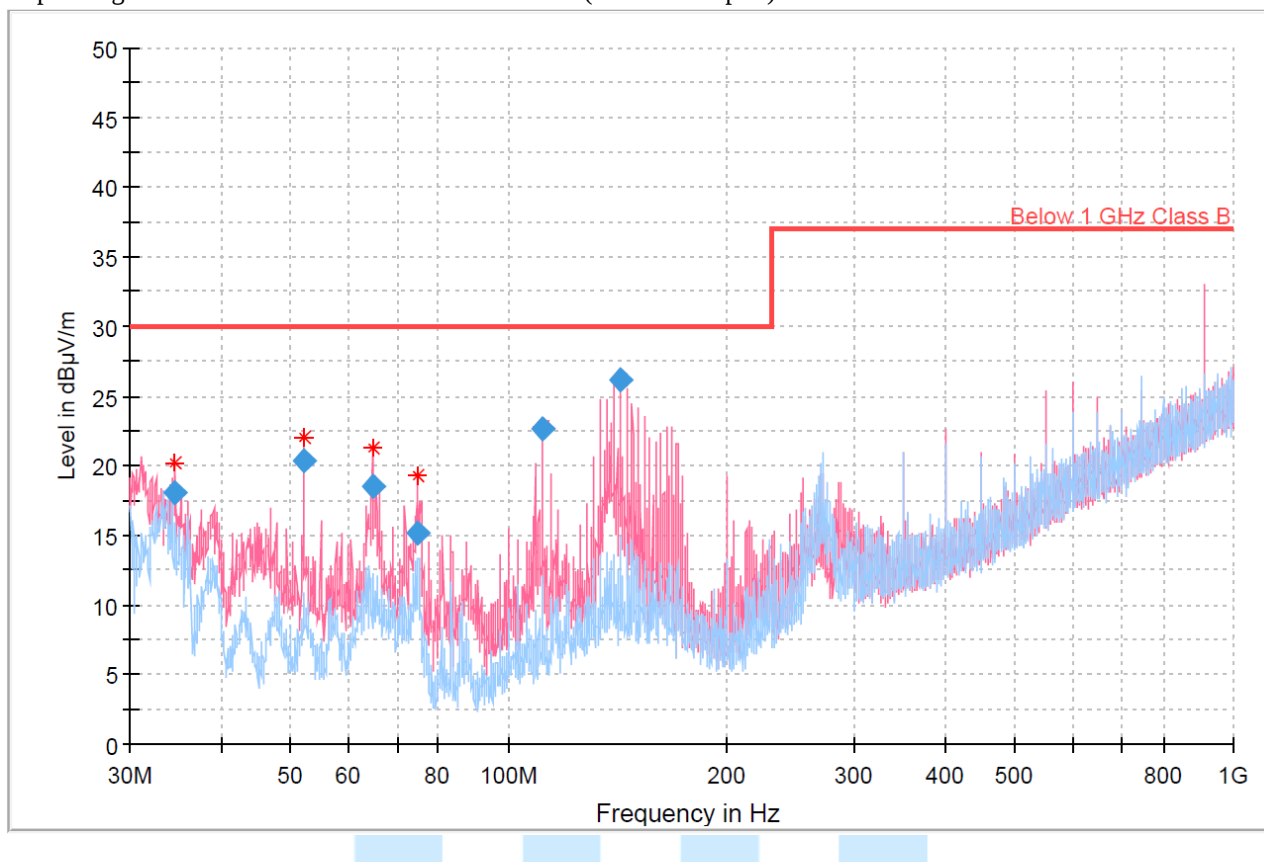

Final Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
34.610	18.01	30.00	11.99	10000.0	120.000	279.4	V	102.0	-12.9
52.197	20.32	30.00	9.68	10000.0	120.000	125.1	V	303.0	-11.4
64.792	18.49	30.00	11.51	10000.0	120.000	199.2	V	323.0	-12.2
74.877	15.11	30.00	14.89	10000.0	120.000	199.2	V	29.0	-13.9
111.494	22.56	30.00	7.44	10000.0	120.000	184.1	V	48.0	-12.5
142.526	26.20	30.00	3.80	10000.0	120.000	104.7	V	74.0	-10.0

< Fig 8. Radiated emission result (30 MHz ~ 1 000 MHz) >



-. 1 GHz ~ 5 GHz

▪ Operating condition: Network Communication mode(PoE Injector)

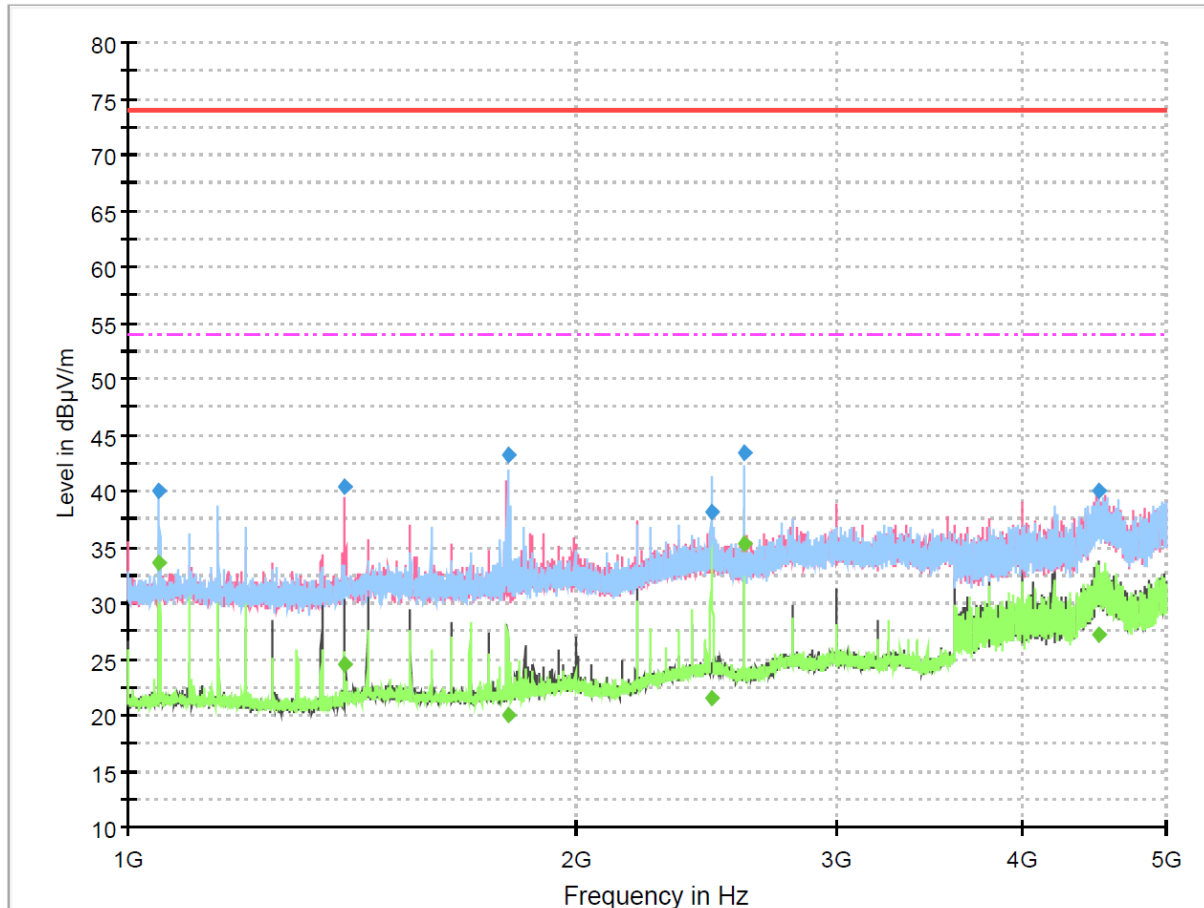


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1050.000000	40.04	---	74.00	33.96	1000.0	1000.000	125.0	H	330.0	-13.6
1050.000000	---	33.58	54.00	20.42	1000.0	1000.000	125.0	H	330.0	-13.6
1400.000000	---	24.54	54.00	29.46	1000.0	1000.000	106.0	V	30.0	-12.8
1400.000000	40.33	---	74.00	33.67	1000.0	1000.000	106.0	V	30.0	-12.8
1800.937500	---	20.06	54.00	33.94	1000.0	1000.000	100.0	H	39.0	-11.9
1800.937500	43.19	---	74.00	30.81	1000.0	1000.000	100.0	H	39.0	-11.9
2470.000000	38.08	---	74.00	35.92	1000.0	1000.000	225.0	H	240.0	-9.7
2470.000000	---	21.60	54.00	32.40	1000.0	1000.000	225.0	H	240.0	-9.7
2599.687500	---	35.32	54.00	18.68	1000.0	1000.000	100.0	H	38.0	-9.5
2599.687500	43.37	---	74.00	30.63	1000.0	1000.000	100.0	H	38.0	-9.5
4506.875000	---	27.13	54.00	26.87	1000.0	1000.000	225.0	H	17.0	-3.3
4506.875000	39.91	---	74.00	34.09	1000.0	1000.000	225.0	H	17.0	-3.3

< Fig 9. Radiated emission result (1 000 MHz ~5 000 MHz) >



- Operating condition: Network Communication mode(AC-DC Adapter)

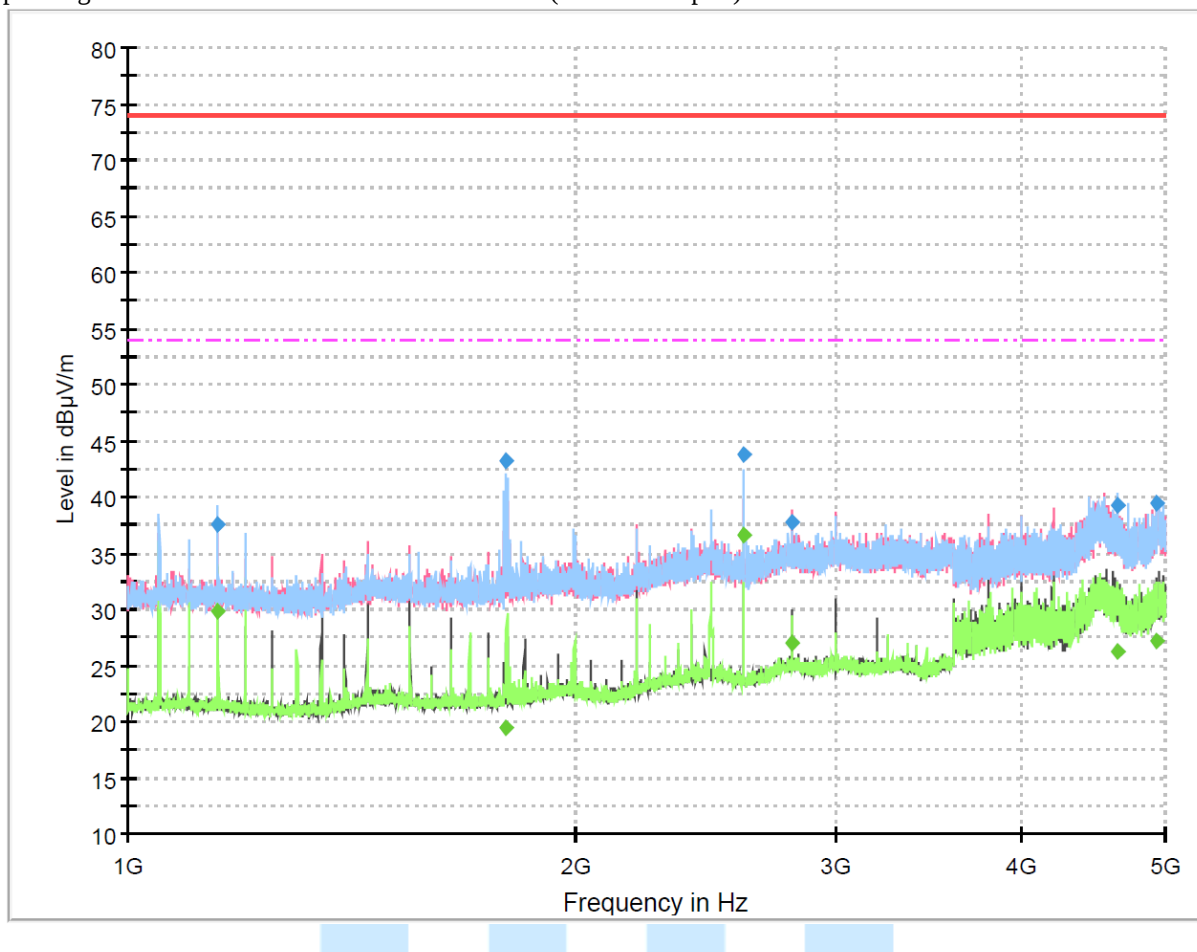

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1149.687500	---	29.82	54.00	24.18	1000.0	1000.000	113.0	H	327.0	-13.4
1149.687500	37.62	---	74.00	36.38	1000.0	1000.000	113.0	H	327.0	-13.4
1798.437500	43.19	---	74.00	30.81	1000.0	1000.000	107.0	H	-33.0	-11.9
1798.437500	---	19.47	54.00	34.53	1000.0	1000.000	107.0	H	-33.0	-11.9
2600.000000	---	36.69	54.00	17.31	1000.0	1000.000	100.0	H	37.0	-9.5
2600.000000	43.75	---	74.00	30.25	1000.0	1000.000	100.0	H	37.0	-9.5
2800.312500	---	27.02	54.00	26.98	1000.0	1000.000	106.0	V	297.0	-8.9
2800.312500	37.82	---	74.00	36.18	1000.0	1000.000	106.0	V	297.0	-8.9
4639.062500	---	26.19	54.00	27.81	1000.0	1000.000	107.0	H	-29.0	-5.1
4639.062500	39.16	---	74.00	34.84	1000.0	1000.000	107.0	H	-29.0	-5.1
4934.687500	39.47	---	74.00	34.53	1000.0	1000.000	106.0	V	180.0	-3.3
4934.687500	---	27.13	54.00	26.87	1000.0	1000.000	106.0	V	180.0	-3.3

< Fig 10. Radiated emission result (1 000 MHz ~5 000 MHz) >




11. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

11.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

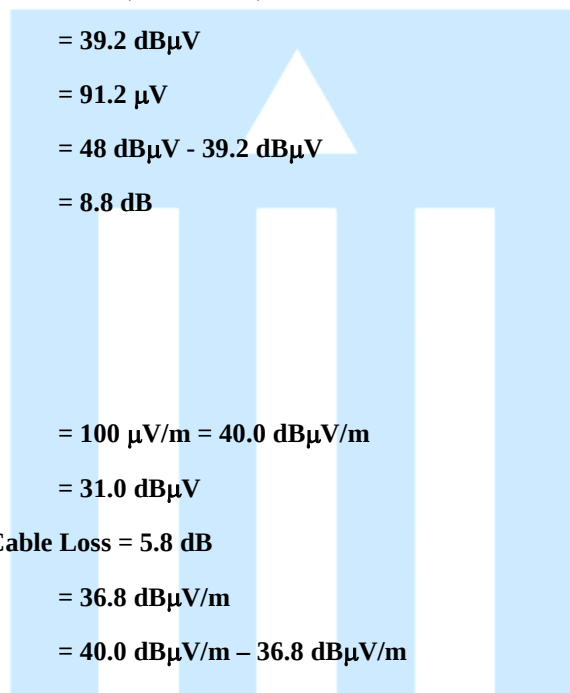

11.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



12. Recommendation & Conclusion

The data collected shows that the **OHSUNG ELECTRONICS CO.,LTD.**

Stream Injector Output Device (Model Name: DMS-OUT) was complies with §15.107, 15.109 of the FCC Rules.

- The end -

