



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E057R-059
Applicant : OH SUNG ELECTRONICS CO., LTD.
Address : #181 Gongdan-dong, Gumi, Gyeong Buk, Korea
Manufacturer : OH SUNG ELECTRONICS CO., LTD.
Address : #181 Gongdan-dong, Gumi, Gyeong Buk, Korea
Type of Equipment : REMOTE CONTROLLER
FCC ID : OZ5URCMX-950
Model Name : MX-950
Serial number : N/A
Total page of Report : 11 pages (including this page)
Date of Incoming : March 21, 2005
Date of issuing : July 19, 2005

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, SECTION 15.101**.

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:

Young-Min, Choi / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by:

Y. K. Kwon / Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION	4
2.2 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY.....	5
3. SYSTEM TEST CONFIGURATION.....	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE	5
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	6
3.5 EQUIPMENT MODIFICATIONS	6
3.6 CONFIGURATION OF TEST SYSTEM	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	7
4.2 RADIATED EMISSIONS TESTS	7
5. FINAL RESULT OF MEASUREMENT	8
5.1 CONDUCTED EMISSION TEST	8
5.2 RADIATED EMISSION TEST.....	10
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : OH SUNG ELECTRONICS CO., LTD.
ADDRESS : #181 Gongdan-dong, Gumi, Gyeong Buk, Korea
CONTACT PERSON : Kwang-Jae Ok / Team Leader of Q.C.
TELEPHONE NO : +82-54-468-0831
FCC ID : OZ5URCMX-950
MODEL NO/NAME : MX-950
SERIAL NUMBER : N/A
DATE : July 19, 2005

EQUIPMENT CLASS	JBP – Part 15 Class B Computing Device Peripheral
E.U.T. DESCRIPTION	REMOTE CONTROLLER
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The OH SUNG ELECTRONICS CO., LTD., Model MX-950 (referred to as the EUT in this report) is a remote controller. The EUT consists of cradle for charging and receiver, Model MFR-250. The EUT sends radio signal to the receiver and them the receiver converts the signal to the infrared signals that control audio and/or video components. Also the EUT can be programmed via a windows PC equipped with a USB port using supplied software, MX-3000 Editor. The associated receiver is manufactured by OH SUNG ELECTRONICS CO., LTD., Model No: MRF-250, FCC ID: OZ5URCMRF250. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
TX FREQUENCY	418.00 MHz
MODULATION	ASK
USED MICROPROCESSOR	206MHz RISC
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	12.0 and 418.0 MHz
ANTENNA TYPE	Built-in on the PCB in the EUT
TRANSMISSION TIME	Not longer than 1 sec
RATED SUPPLY VOLTAGE	DC 5V, 2A from AC/DC Adapter or Lithium Ion Battery
NUMBER OF LAYERS	6 LAYERS
USED AC/DC ADAPTER	Model: 061-052000-UF, MFR: Xiang Fa Electronics Co., Ltd.
EXTERNAL CONNECTOR	DC Input, Charger Signal, and USB Port

* Remark: This equipment automatically deactivates the transmitter within not more than 1 second of being released.

Model Differences:

- No other model differences have been mentioned

2.2 Related Submittal(s) / Grant(s)

- None



2.3 Test System Details

The EUT was tested with the following all equipment used in the tested systems are:

Model	Manufacturer	FCC ID	Description	Connected to
MX-950	OH SUNG ELECTRONICS CO., LTD.	OZ5URCMX-950	Transmitter	Notebook PC
N/A	N/A	N/A	Charger	EUT
061-052000-UF	Xiang Fa Electronics(D.G.)Co., Ltd	N/A	AC/DC Adapter	Charger
PP05LC	DELL Computer Corp.	DoC	Notebook PC	-
2225C	HP	DSI6XU2225	Printer	Notebook PC
020-0470	Cardinal	GDE0196	Modem	Notebook PC

2.4 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	PNCCA0653A	N/A
LCD Panel	N/A	N/A	N/A
Keypad Board	N/A	PFFFA0655B	N/A
Charger Board	N/A	PBAFA0678B	N/A

3.2 EUT exercise Software

After connecting the EUT to the USB port of personal computer, data were continuously read and written from the HDD of the PC to the EUT.



3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
REMOTE CONTROLLER (EUT)	-	-	-
Charger	N	-	1.5(P)
AC/DC Adapter	N	N	1.5(P), 1.0(D)
Notebook PC	N	-	1.5(P)
Printer	N	Y	1.5(P), 1.5(D)
Modem	N	Y	1.5(P), 1.5(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
REMOTE CONTROLLER (EUT)	Y	BOTH END	Y	BOTH END
Charger	N	N/A	N/A	-
AC/DC Adapter	N	N/A	Y	BOTH END
Notebook PC	-	-	-	-
Printer	N	N/A	Y	BOTH END
Modem	N	N/A	Y	BOTH END

3.5 Equipment Modifications

- None



3.6 Configuration of Test System

Line Conducted Test: The battery in the EUT was charged and the power line of the charger was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4/2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and written via USB	X
Charging mode	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and written via USB	X
Charging mode	

**5. FINAL RESULT OF MEASURMENT****5.1 Conducted Emission Test**

Humidity Level : 40 % Temperature: 21 °C
 Limits apply to : FCC CFR 47, PART 15, Subpart B
 Result : PASSED BY -14.41 dB at 0.17 MHz under peak detector mode.

EUT : REMOTE CONTROLLER Date: March 25, 2005
 Operating Condition : Data were continuously read and written via USB.

Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission Level	Detector Mode	Limits		Emission level	Limits	
0.17	N	50.80	P	65.21	-14.41	-	-	-
0.39	H	35.28	P	58.17	-22.89			
1.21	H	30.18	P	56.00	-25.82	-	-	-
1.23	N	31.84	P	56.00	-24.16	-	-	-
2.56	N	27.95	P	56.00	-28.05	-	-	-
4.54	N	27.56	P	56.00	-28.44	-	-	-

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral Line. "P": Peak Detector mode, "Q.P": Quasi-Peak Detector mode

See next page for an overview sweep performed with peak and average detector.

Tested by: Ki-Hong, Nam / Test Engineer




ONETECH

Testing & Evaluation Lab.

Page 9 of 11

FCC ID. : OZ5URCMX-950

Report No.: E057R-059

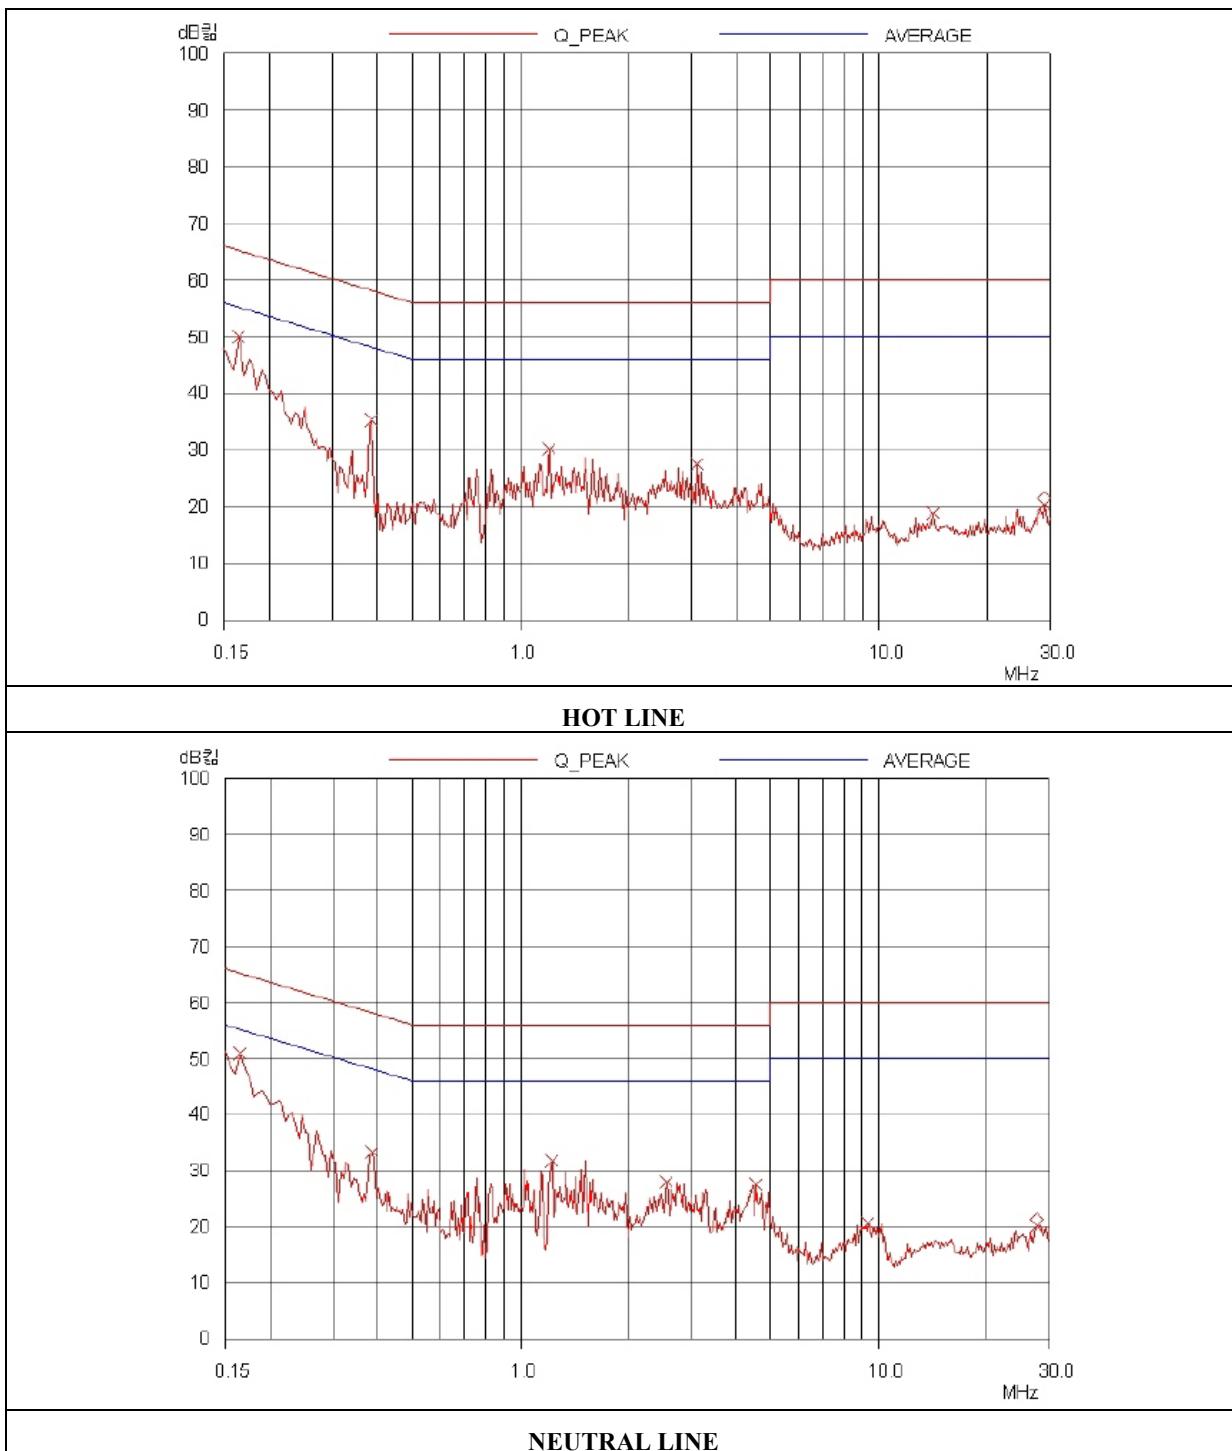

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do 464-860, Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>45 %</u>	Temperature: <u>19°C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B</u>	
Type of Test	: <u>Intentional Radiator</u>	
Result	: <u>PASSED BY -3.52 dB at 559.09 MHz</u>	

EUT	: REMOTE CONTROLLER	Date: June 30, 2005
Operating Condition	: Data were continuously read and written via USB.	
Frequency range	: 30MHz – 2000MHz	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	

Radiated Emission		Ant.	Correction Factors		Total	FCC LIMIT	
Freq. (MHz)	Amplitude (dBuV)	Pol.	Antenna (dB/m)	Cable (dB)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
152.10	17.60	H	15.10	2.32	35.02	43.52	-8.50
203.46	16.62	H	15.97	2.83	35.42	43.52	-8.10
253.85	20.96	V	17.06	3.42	41.44	46.02	-4.58
305.21	21.67	V	13.81	3.84	39.32	46.02	-6.70
406.95	17.80	V	15.64	4.41	37.85	46.02	-8.17
457.34	19.94	H	16.83	4.65	41.42	46.02	-4.60
508.70	17.82	H	17.43	5.47	40.72	46.02	-5.30
559.09	18.70	V	18.50	5.30	42.50	46.02	-3.52
660.84	15.92	H	19.55	5.85	41.32	46.02	-4.70

*Remark: "H": Horizontal Polarization, "V": Vertical Polarization

~ 7/8.

Tested by: Gi-Hong, Nam / Test Engineer



ONETECH

Testing & Evaluation Lab.

Page 11 of 11

FCC ID. : OZ5URCMX-950

Report No.: E057R-059

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-004 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do 464-860, Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/05	12MONTH	■
3.	Spectrum analyzer	HP	85680B	3001A04955	APR/05	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	MAR/05	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	MAR/05	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	MAR/05	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	APR/05	12MONTH	
8.	Biconical antenna	EMCO	3110	9003-1121	FEB/05	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/05		■
9.	Log Periodic antenna	EMCO	3146	9001-2614	FEB/05	12MONTH	
				9109-3217	MAY/05		
		Schwarzbeck	9108-A(494)	62281001	FEB/05		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/05	12MONTH	
				9109-1869	JUL/05		■
		Schwarzbeck	NSLK 8128	8128-216	JUN/05		■
11.	Position Controller	HP GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HP GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HP GmbH	MA240	N/A	N/A	N/A	■