

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer: Ohsung Electronics Co., Ltd.
#181 Gongdan-dong, Gumi-si, Gyeongsangbuk-do
Kyeongsangbuk-do, 712-837, Republic of Korea
South Korea
Attn: Mr. Hak Ki, Kim / General Manager

Date of Issue: October 04, 2016
Order Number: GETEC-C1-16-340
Test Report Number: GETEC-E3-16-048
Test Site: GUMI UNIVERSITY EMC CENTER
(FCC Test Firm Registration No.: 269701)

FCC ID. : OZ5URCTDC7100CG

Applicant : Ohsung Electronics Co., Ltd.

Rule Part(s)	: FCC Part 18
Test Method	: FCC/OET MP-5
EUT Type	: Wireless Charger
Equipment Class	: Part 18 Consumer Device(8CC)
Type of Authority	: Certification
Model Name	: TDC-7100CG
Trade Mark	: URC

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,


Soon-Hoon Jeong, Senior Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,


Jae-Hoon Jeong, Technical Manager
GUMI UNIVERSITY EMC CENTER



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 DEFINITION OF MODELS.....	5
3.3 SUPPORT EQUIPMENT / CABLES USED	6
3.4 MODIFICATION ITEM(S).....	6
4. DESCRIPTION OF TESTS.....	7
4.1 TEST CONDITION.....	7
5. CONDUCTED EMISSION.....	9
5.1 OPERATING ENVIRONMENT	10
5.2 TEST SET-UP	10
5.3 MEASUREMENT UNCERTAINTY.....	10
5.4 LIMIT	11
5.5 TEST EQUIPMENT USED.....	11
5.6 TEST DATA FOR CONDUCTED EMISSION	11
6. RADIATED EMISSION	15
6.1 OPERATING ENVIRONMENT	15
6.2 TEST SET-UP	15
6.3 MEASUREMENT UNCERTAINTY.....	16
6.4 LIMIT	17
6.5 TEST EQUIPMENT USED.....	17
6.6 TEST DATA FOR RADIATED EMISSION	18
7. SAMPLE CALCULATIONS.....	21
7.1 EXAMPLE 1 :	21
7.2 EXAMPLE 2 :	21
8. RECOMMENDATION & CONCLUSION.....	21

APPENDIX A – ATTESTATION STATEMENT

APPENDIX B – LABELLING

APPENDIX C – BLOCK DIAGRAM

APPENDIX D – SCHEMATIC DIAGRAM

APPENDIX E – TEST SETUP PHOTOGRAPH

APPENDIX F – EXTERNAL PHOTOGRAPH

APPENDIX G – INTERNAL PHOTOGRAPH

APPENDIX H – USER'S MANUAL

APPENDIX I – OPERATIONAL DESCRIPTION

APPENDIX J – PART LIST



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: Ohsung Electronics Co., Ltd.
Applicant Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, South Korea
Applicant: Ohsung Electronics Co., Ltd.
Applicant Address: #141 Gongdan-dong, Gumi-si, Gyeongbuk, South Korea
Contact Person: Mr.Hak Ki, Kim / General Manager
Tel. Number: +82-54-468-7281 **Fax Number:** +82-54-461-8368

● FCC ID.	OZ5URCTDC7100
● EUT Type	Wireless Charger
● Model Name	TDC-7100CG
● Rule Part(s)	FCC Part 18
● Test Method	FCC/OET MP-5
● Type of Authority	Certification
● Test Procedure(s)	FCC/OET MP-5
● Dates of Test	August 18 ~ September 21, 2016
● Place of Test	GUMI UNIVERSITY EMC CENTER (FCC Test Firm Registration Number: 269701) 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Republic of Korea.
● Test Report Number	GETEC-E3-16-048
● Dates of Issue	October 04, 2016



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions emanating from **Ohsung Electronics Co., Ltd.. Wireless Charger. (Model name: TDC-7100CG)**

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**.

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 730-711, Gyeongnam 641-713, Korea

This test site is one of the highest point of GUMI UNIVERSITY at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2009)

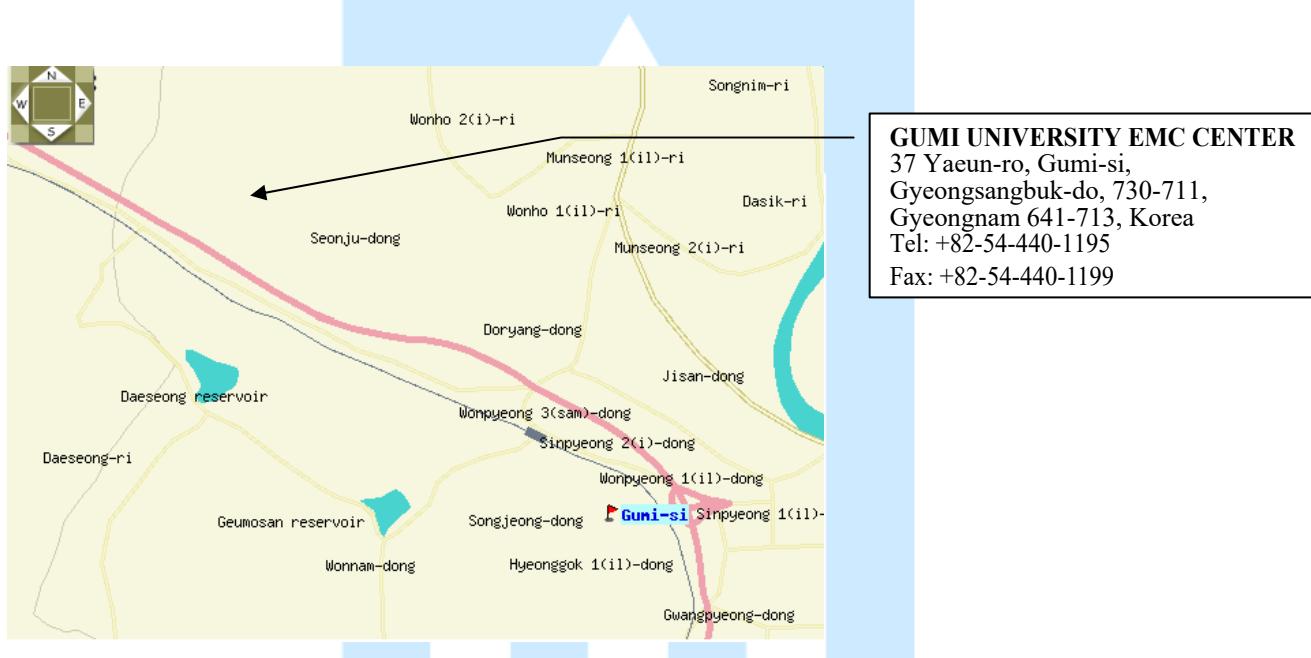


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **OHSUNG Electronics Co., Ltd. Wireless Charger.(Model Name: TDC-7100CG) FCC ID.: OZ5URCTDC7100CG**

Type of Equipment	Wireless Charger
Model Name	TDC-7100CG
Serial Number	Prototype
RF Frequency	115 kHz ~ 205 kHz
External connector	DC input 1 EA
Input Power	DC 5.0 V, 2 A
Transmission Power	DC 5W (Maximum 5 V, 1 A)
AC/DC Adaptor	Input : AC 100 ~ 230 V 50 Hz / 60 Hz, 0.4 A Output : DC 5 V, 2 A
Antenna type	A11 1-Layer Coil
Size(W x H x T)	200 (mm) x 125 (mm) x 17 (mm) (W x L x T) mm ³
Operating Temperature	: 0 °C ~ +55 °C
Hardware Version	: PRC-110_V2.3
Software Version	: Qi_Tx_A11_OS_KR_KT_1.0.90

3.2 Definition of models

- None.



3.3 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
Wireless charger RX module(5W, 2.5W, 1W)	Partron Co., Ltd.	Proto type	S/N: None. FCC ID.: None.
Wireless Remote Controller	Ohsung Electronics Co., Ltd.	TDC-7100	S/N: None. FCC ID.: None.

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
Wireless Charger	Ohsung Electronics Co., Ltd.	TDC-7100CG	S/N: None. FCC ID.: None.
AC/DC Adaptor	MEILE GROUP LTD	MLF-B250502000UU	S/N: 160806001 FCC ID.: None.

3.3.3 Used Cable(s)

Cable Name	Condition	Description
USB cable	Connected to the EUT and AC/DC Adaptor	1.00 m Unshielded with a ferrite core

3.4 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 120 V / 60 Hz

※ The supplying power of this device is DC 5.0 V from a AC/DC Adaptor.

- Operating condition during the test(s) :

This device has been tested in the configurations of charging mode

Charging Current	Support Equipment	Comment
1 000 mA	Wireless charger RX load(5W)	With Register load
500 mA	Wireless charger RX load(2.5W)	With Register load
200 mA	Wireless charger RX load(1.0W)	With Register load
0% < Battery state	TDC-7100	With charging device
50% Battery state	TDC-7100	With charging device



4.2 General Test Procedures


Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which is fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the turntable was turned from 0 degrees to 360 degrees. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2009).

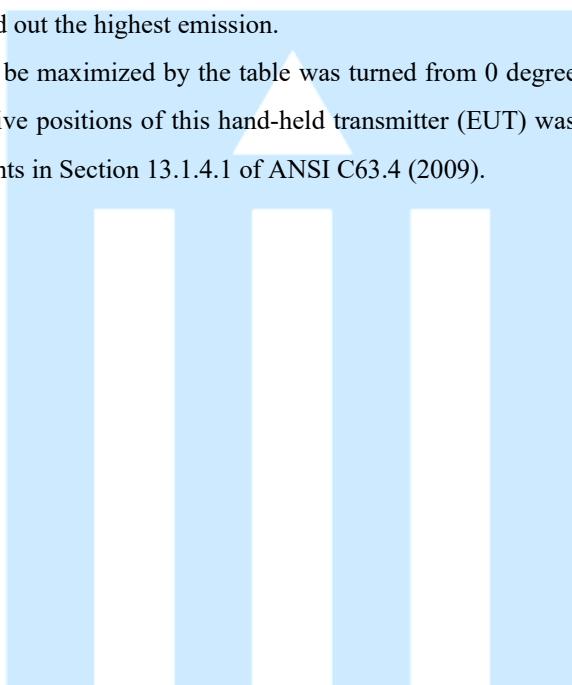



5. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

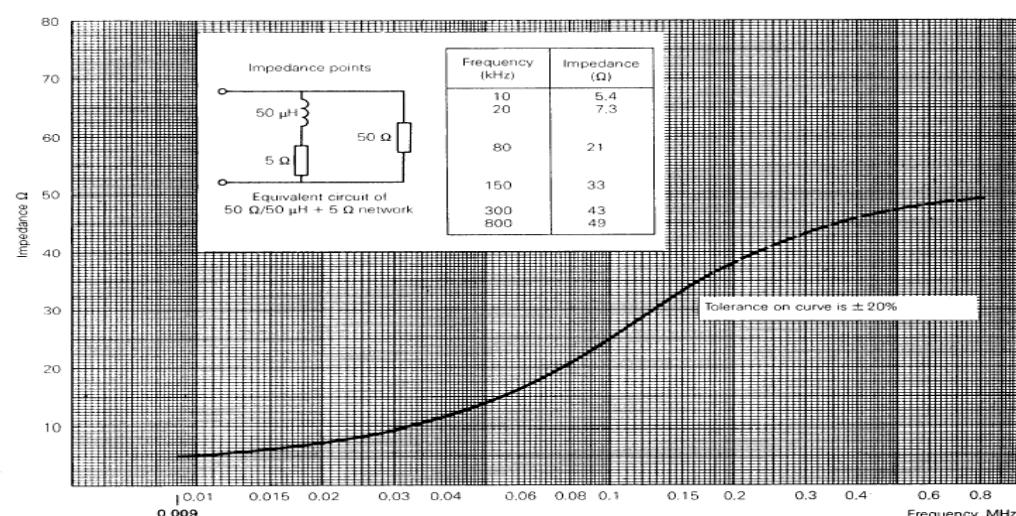


Fig 2. Impedance of LISN



5.1 Operating Environment

Temperature : 26.6 °C
Relative Humidity : 47.6 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.85 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m)	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

5.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCI	Rohde & Schwarz	EMI test receiver	100237	Apr 18, 2017
■ - ENV216	Rohde & Schwarz	LISN	100173	Apr 19, 2017
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr 19, 2017
□ - ISN T8	TESEQ. GmbH	ISN	24568	Apr 22, 2017

5.6 Test data for Conducted Emission

- Test Date : August 17, 2016
- Test Procedure(s) : FCC/OET MP-5
- Operating Condition : Register load & Changing device charging mode
- Frequency rage : 150 kHz ~ 30 MHz
- Comment : -.



- Operating condition: it test EUT with Register load(5W)

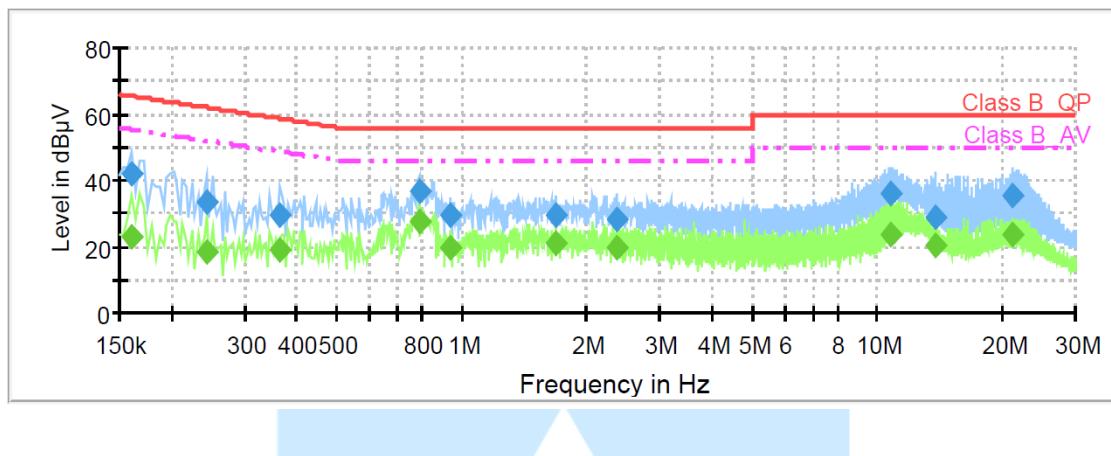

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161194	42.1	100.0	9.000	Off	N	9.6	23.3	65.4	
0.243281	33.7	100.0	9.000	Off	N	9.7	28.2	62.0	
0.366412	29.7	100.0	9.000	Off	N	9.7	28.9	58.6	
0.791775	36.8	100.0	9.000	Off	L1	9.7	19.2	56.0	
0.937294	29.3	100.0	9.000	Off	N	9.7	26.7	56.0	
1.683544	29.2	100.0	9.000	Off	L1	9.7	26.8	56.0	
2.347706	28.0	100.0	9.000	Off	N	9.7	28.0	56.0	
10.836300	35.8	100.0	9.000	Off	N	9.9	24.2	60.0	
13.817569	28.7	100.0	9.000	Off	L1	9.9	31.3	60.0	
21.138281	35.6	100.0	9.000	Off	N	10.0	24.4	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.161194	23.0	100.0	9.000	Off	N	9.6	32.4	55.4	
0.243281	18.0	100.0	9.000	Off	N	9.7	33.9	52.0	
0.366412	18.8	100.0	9.000	Off	N	9.7	29.8	48.6	
0.791775	27.9	100.0	9.000	Off	L1	9.7	18.1	46.0	
0.937294	19.5	100.0	9.000	Off	N	9.7	26.5	46.0	
1.683544	20.7	100.0	9.000	Off	L1	9.7	25.3	46.0	
2.347706	19.8	100.0	9.000	Off	N	9.7	26.2	46.0	
10.836300	23.5	100.0	9.000	Off	N	9.9	26.5	50.0	
13.817569	20.5	100.0	9.000	Off	L1	9.9	29.5	50.0	
21.138281	23.5	100.0	9.000	Off	N	10.0	26.5	50.0	

< Fig 5. Graph of continuous disturbance >



- Operating condition: it test EUT with Register load(2.5W)

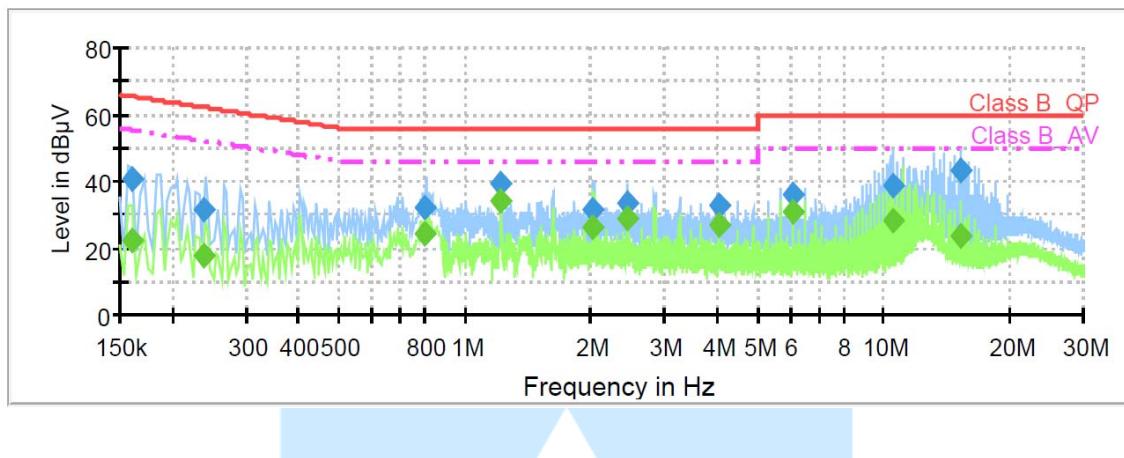

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.160071	40.9	100.0	9.000	Off	L1	9.6	24.5	65.5	
0.237926	31.4	100.0	9.000	Off	N	9.6	30.7	62.2	
0.800081	32.0	100.0	9.000	Off	N	9.7	24.0	56.0	
1.218203	39.2	100.0	9.000	Off	L1	9.7	16.8	56.0	
2.027213	31.5	100.0	9.000	Off	N	9.7	24.5	56.0	
2.442518	33.4	100.0	9.000	Off	N	9.7	22.6	56.0	
4.064415	32.7	100.0	9.000	Off	L1	9.8	23.3	56.0	
6.098137	36.1	100.0	9.000	Off	L1	9.8	23.9	60.0	
10.570740	38.4	100.0	9.000	Off	N	9.9	21.6	60.0	
15.239718	43.2	100.0	9.000	Off	N	9.9	16.8	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.160071	22.6	100.0	9.000	Off	L1	9.6	32.8	55.5	
0.237926	17.9	100.0	9.000	Off	N	9.6	34.3	52.2	
0.800081	24.1	100.0	9.000	Off	N	9.7	21.9	46.0	
1.218203	33.8	100.0	9.000	Off	L1	9.7	12.2	46.0	
2.027213	26.1	100.0	9.000	Off	N	9.7	19.9	46.0	
2.442518	28.7	100.0	9.000	Off	N	9.7	17.3	46.0	
4.064415	26.9	100.0	9.000	Off	L1	9.8	19.1	46.0	
6.098137	30.8	100.0	9.000	Off	L1	9.8	19.2	50.0	
10.570740	28.1	100.0	9.000	Off	N	9.9	21.9	50.0	
15.239718	23.6	100.0	9.000	Off	N	9.9	26.4	50.0	

< Fig 5. Graph of continuous disturbance >



- Operating condition: it test EUT with Register load(1 W)

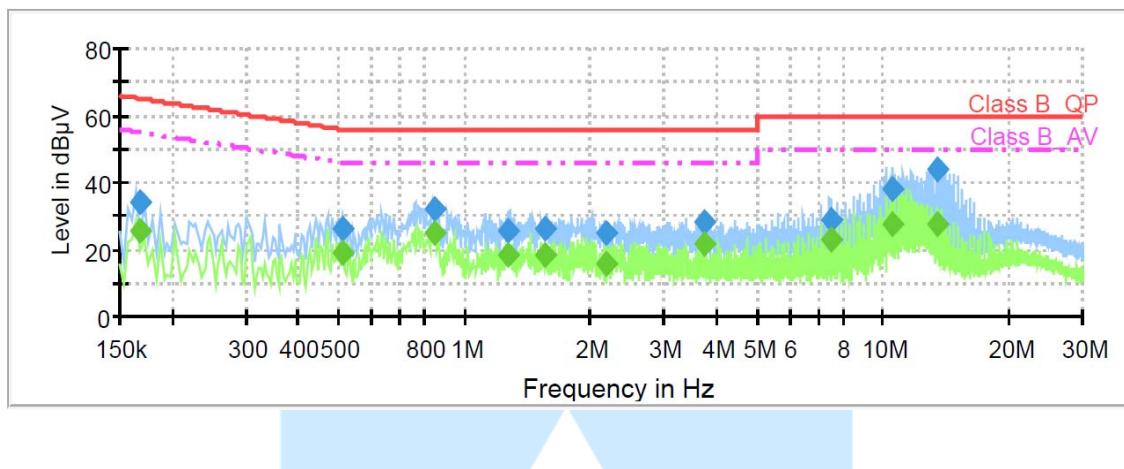

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.167521	34.1	100.0	9.000	Off	L1	9.6	30.9	65.1	
0.512764	26.3	100.0	9.000	Off	L1	9.6	29.7	56.0	
0.850882	32.0	100.0	9.000	Off	L1	9.7	24.0	56.0	
1.278064	25.3	100.0	9.000	Off	N	9.7	30.7	56.0	
1.561628	26.3	100.0	9.000	Off	L1	9.7	29.7	56.0	
2.170687	24.8	100.0	9.000	Off	L1	9.7	31.2	56.0	
3.738573	28.4	100.0	9.000	Off	L1	9.8	27.6	56.0	
7.480512	29.1	100.0	9.000	Off	L1	9.8	30.9	60.0	
10.530979	38.2	100.0	9.000	Off	L1	9.9	21.8	60.0	
13.422394	44.1	100.0	9.000	Off	N	9.9	15.9	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.167521	25.5	100.0	9.000	Off	L1	9.6	29.6	55.1	
0.512764	18.7	100.0	9.000	Off	L1	9.6	27.3	46.0	
0.850882	24.8	100.0	9.000	Off	L1	9.7	21.2	46.0	
1.278064	18.2	100.0	9.000	Off	N	9.7	27.8	46.0	
1.561628	18.5	100.0	9.000	Off	L1	9.7	27.5	46.0	
2.170687	15.4	100.0	9.000	Off	L1	9.7	30.6	46.0	
3.738573	21.8	100.0	9.000	Off	L1	9.8	24.2	46.0	
7.480512	23.3	100.0	9.000	Off	L1	9.8	26.7	50.0	
10.530979	27.5	100.0	9.000	Off	L1	9.9	22.5	50.0	
13.422394	27.8	100.0	9.000	Off	N	9.9	22.2	50.0	

< Fig 5. Graph of continuous disturbance >



6. Radiated Emission

6.1 Operating Environment

Temperature : 21.8 °C
Relative Humidity : 49.3 % R.H.

6.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16/ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

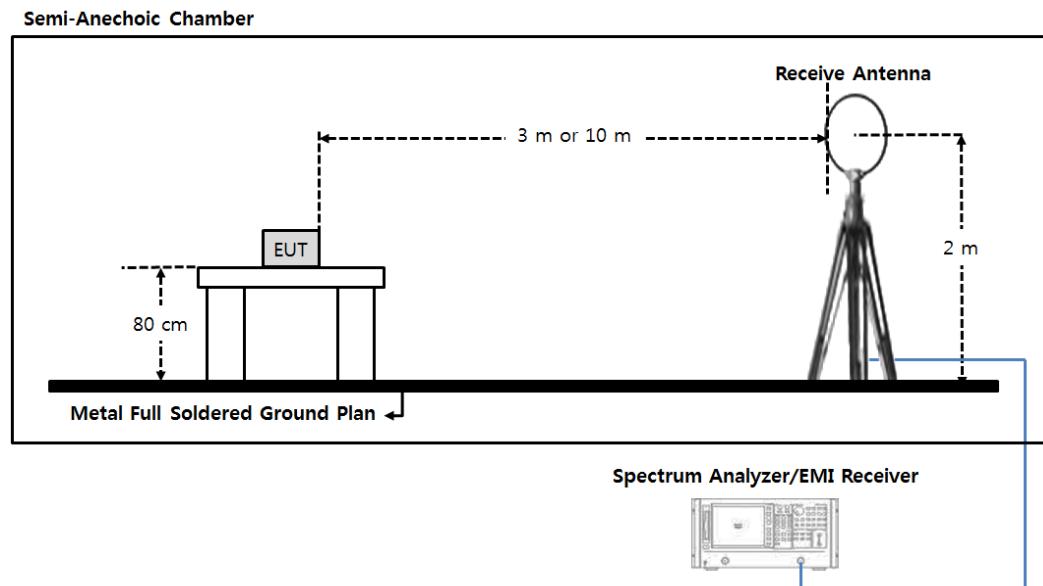


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

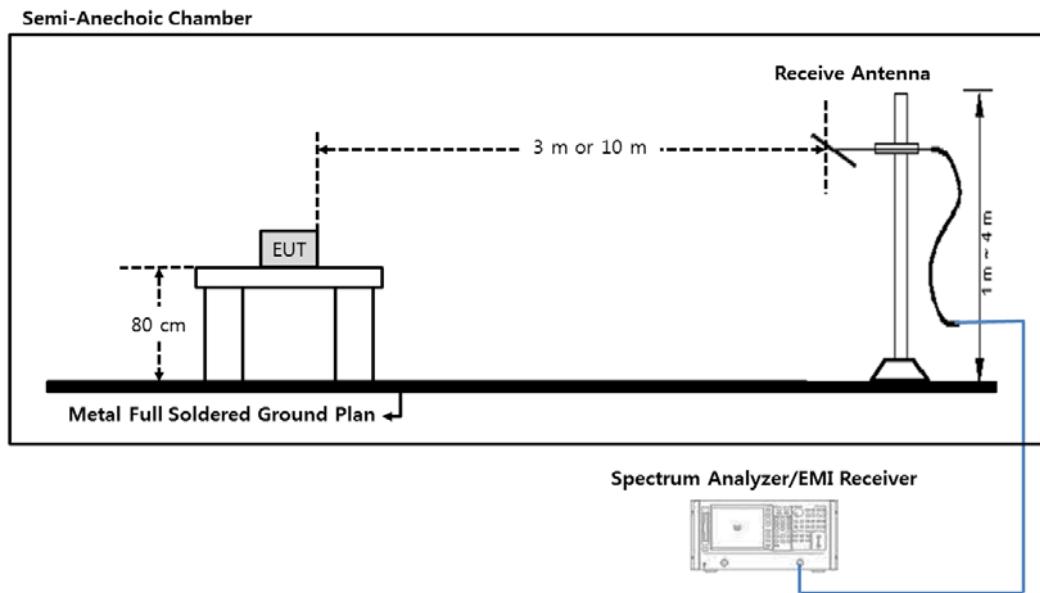


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement".

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.66 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.65 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	5.32 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 18 000 MHz, 3 m)	5.45 dB	Confidence level of approximately 95 % ($k = 2$)



6.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (μ V/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	<u>Any non-ISM frequency</u>	<u>Below 500</u> 500 or more	<u>15</u> $15 \times \text{SQRT}(\text{power}/500)$	<u>300</u> ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 ⁽²⁾	1,600 ⁽²⁾
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/F(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴ 30 ⁴ 30

Note.

- 1) Field strength may not exceed 10 μ V/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 μ V/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	Apr. 18, 2017
■ - ESU40	Rohde & Schwarz	EMI Test Receiver	100266	Jun. 20, 2017
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Dec.21, 2017
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
□ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A

All test equipment used is calibrated on a regular basis.



6.6 Test data for Radiated Emission

- Test Date : Sep. 27, 2016
- Measurement Distance : 3 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

- Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Peak	Peak
Resolution bandwidth	200 Hz	9 kHz

- Measurement Data: Wireless charging with register load (5 W)

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]
S	0.049	PK	V2	31.99	19.33	80	-28.68	23.52	-52.20
S	0.051	PK	V2	27.43	19.33	80	-33.24	23.52	-56.76
S	0.059	PK	V2	31.68	19.32	80	-29.00	23.52	-52.52
F	0.170	PK	V2	50.53	19.22	80	-10.25	23.52	-33.77
S	0.450	PK	V1	30.94	19.10	80	-29.96	23.52	-53.48
S	1.731	PK	V1	25.77	19.23	80	-35.00	23.52	-58.52

- Measurement Data: Wireless charging with register load (2.5 W)

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]
S	0.030	PK	V2	28.80	19.34	80	-31.86	23.52	55.38
S	0.330	PK	V2	26.74	19.10	80	-34.16	23.52	57.68
S	0.060	PK	V2	25.15	19.32	80	-35.53	23.52	59.05
S	0.090	PK	V2	24.41	19.27	80	-36.32	23.52	59.84
F	0.198	PK	V2	46.60	19.19	80	-14.21	23.52	37.73
S	0.470	PK	V1	31.32	19.10	80	-29.58	23.52	53.10



- Measurement Data: Wireless charging with register load (1 W)

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]
S	0.013	PK	V2	26.47	19.76	80	-33.77	23.52	57.29
S	0.022	PK	V2	24.81	19.54	80	-35.65	23.52	59.17
S	0.045	PK	V2	22.53	19.33	80	-38.14	23.52	61.66
S	0.067	PK	V2	22.04	19.31	80	-38.65	23.52	62.17
F	0.205	PK	V2	45.32	19.19	80	-15.49	23.52	39.01
S	3.601	PK	V2	29.47	19.36	80	-31.17	23.52	54.69

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 "F"=Fundamental / "S"=Spurious / "*" = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a peak detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 300 m: $40 \log(300/3) = 80 \text{ dB}$

Note.5 Sample calculation

T.F = AF + CL - AG

Field Strength = Reading + T.F - D.C.F

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

D.C.F = Distance Correction Factor

Note. 6 "V1" = Vertical and perpendicular to the centerline / "V2"=Vertical and parallel to the centerline

"H"= horizontal(parallel to the ground)



- Measurement Data: Wireless charging with charging device(TDC-7100) (0 % battery state)

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]
S	0.010	PK	V2	32.14	19.84	80	-28.02	23.52	-51.54
S	0.071	PK	V2	27.42	19.30	80	-33.28	23.52	-56.80
S	0.106	PK	V2	24.09	19.26	80	-36.65	23.52	-60.17
S	0.142	PK	V2	20.03	19.24	80	-40.73	23.52	-64.25
F	0.236	PK	V2	46.83	19.16	80	-14.01	23.52	-37.53

- Measurement Data: Wireless charging with charging device(TDC-7100) (50 % battery state)

Note.2	Frequency [MHz]	Detector mode	ANT Pol.	Reading [dBuV]	T.F [dB/m]	D.C.F	Field Strength [dBuV/m]	Limits [dBuV/m]	Margin [dB]
S	0.010	PK	V1	37.10	19.84	80	-23.06	23.52	-46.58
S	0.037	PK	V1	29.38	19.34	80	-31.28	23.52	-54.80
S	0.075	PK	V1	25.97	19.30	80	-34.73	23.52	-58.25
S	0.112	PK	V2	23.66	19.26	80	-37.08	23.52	-60.60
F	0.179	PK	V2	46.46	19.21	80	-14.33	23.52	-37.85
S	0.463	PK	V1	30.72	19.10	80	-30.18	23.52	-53.70

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 "F"=Fundamental / "S"=Spurious / "*" = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a peak detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F)

For 300 m: $40 \log(300/3) = 80 \text{ dB}$

Note.5 Sample calculation

T.F = AF + CL - AG

Field Strength = Reading + T.F - D.C.F

Margin = Limit - Field Strength

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

D.C.F = Distance Correction Factor

Note. 6 "V1" = Vertical and perpendicular to the centerline / "V2"=Vertical and parallel to the centerline

"H"= horizontal(parallel to the ground)



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \log_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV
	= 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ - 36.8 dB $\mu\text{V}/\text{m}$
	= 3.2 dB

8. Recommendation & Conclusion

The data collected shows that the **Ohsung Electronics Co., Ltd. Wireless Charger**(Model Name: TDC-7100CG) was complies with §18.305 and 18.307 of the FCC Rules.

- The end -