



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7, ANNEX 2
INDUSTRY CANADA RSS-GEN ISSUE 2**

CERTIFICATION TEST REPORT

FOR

ELECTROMAGNETIC INDUCTIVE RFID MODULE

MODEL NUMBER: V720S-HMC75

**FCC ID: OZGV720HMC75
IC ID: 850L-72HMC75**

REPORT NUMBER: 08U12248-1

ISSUE DATE: DECEMBER 1, 2008

Prepared for
**OMRON ELECTRONICS, LLC
ONE COMMERCE DRIVE
SCHAUMBURG, IL 60173, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	12/01/08	Initial Issue	F. Ibrahim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	6
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	6
5.3. <i>SOFTWARE AND FIRMWARE.....</i>	6
5.4. <i>WORST-CASE CONFIGURATION.....</i>	6
5.5. <i>MODIFICATIONS.....</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. APPLICABLE LIMITS AND TEST RESULTS	10
7.1. <i>RADIATED EMISSION.....</i>	10
7.1.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)</i>	12
7.1.2. <i>SPURIOUS EMISSIONS (30 - 1000 MHz).....</i>	13
7.2. <i>FREQUENCY STABILITY.....</i>	17
7.3. <i>99% BANDWIDTH</i>	19
8. SETUP PHOTOS.....	21

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: OMRON ELECTRONICS, LLC.
ONE COMMERCE DRIVE
SCHAUMBURG, IL 60173, U.S.A.

EUT DESCRIPTION: ELECTROMAGNETIC INDUCTIVE RFID MODULE

MODEL: OMORN

SERIAL NUMBER: 1118RB

DATE TESTED: NOVEMBER 13-15, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Passed
RSS-210 Issue 7 Annex 2 and RSS-GEN Issue 2	Passed
RSS-GEN ISSUE 2	Passed

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:

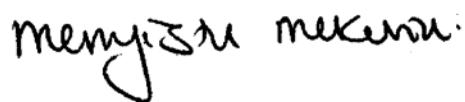

MENGISTU MEKURIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7 Annex 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a V720 series Electromagnetic Inductive RFID module that is manufactured by Omron Electronics, LLC.

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a permanently attached / Integral underground loop antenna with a gain of -62 dBi.

5.3. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Ver1.00.

5.4. WORST-CASE CONFIGURATION

The worst-case is EUT with highest output power. To determine the worst-case the X, Y, and Z orientations of the EUT were examined. Z-Position was turned out as a worst-case.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop PC	Toshiba	Satellite T2130CT	7522333
AC/DC Adapter	Radio Shack	N/A	273-1696
DC Power Supply	HP	E3610A	KR24104150


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	Mini-Jack	Un-Shielded	1.5 m	N/A
2	DC	1	Direct Connection	Un-Shielded	1.5 m	Ferrite on one end
3	Host Interface port	1	B10B-ZR-SM4-TF(LF)(SN)	Un-Shielded	0.2 m	N/A
4	Data	1	Direct Connection	Un-Shielded	1.0 m	N/A

TEST SETUP

The EUT is connected to a host laptop computer via ribbon cable. Test software exercised the EUT.

SETUP DIAGRAM FOR TESTS

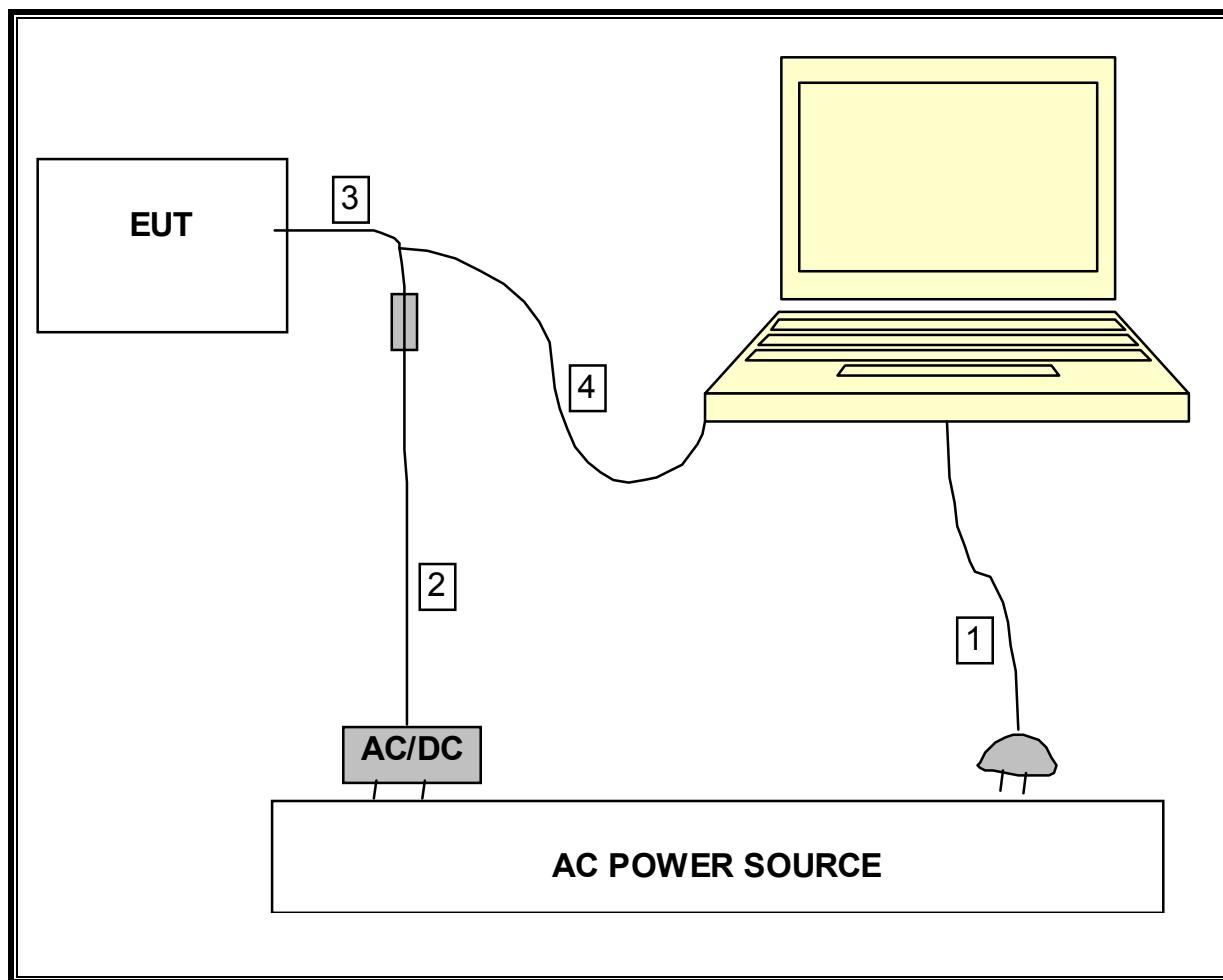

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	Cal Due
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	09/19/09
EMI Receiver, 2.9 GHz	Agilent / HP	8542E	C00957	09/19/09
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	03/31/09
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	02/11/09
Antenna, Conical Log Spiral	EMCO	3102	N/A	05/12/09
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	05/13/09
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4407B	C01101	01/22/09

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSION

TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated or used in the EUT is 13.56 MHz; therefore the frequency range was investigated from 9 kHz to 1000 MHz.

LIMIT

§15.225:

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (μ V/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz,

174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.


RESULTS

7.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

TRANSCEIVER SPURIOUS EMISSIONS BELOW 30 MHz


7.1.2. SPURIOUS EMISSIONS (30 - 1000 MHz)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

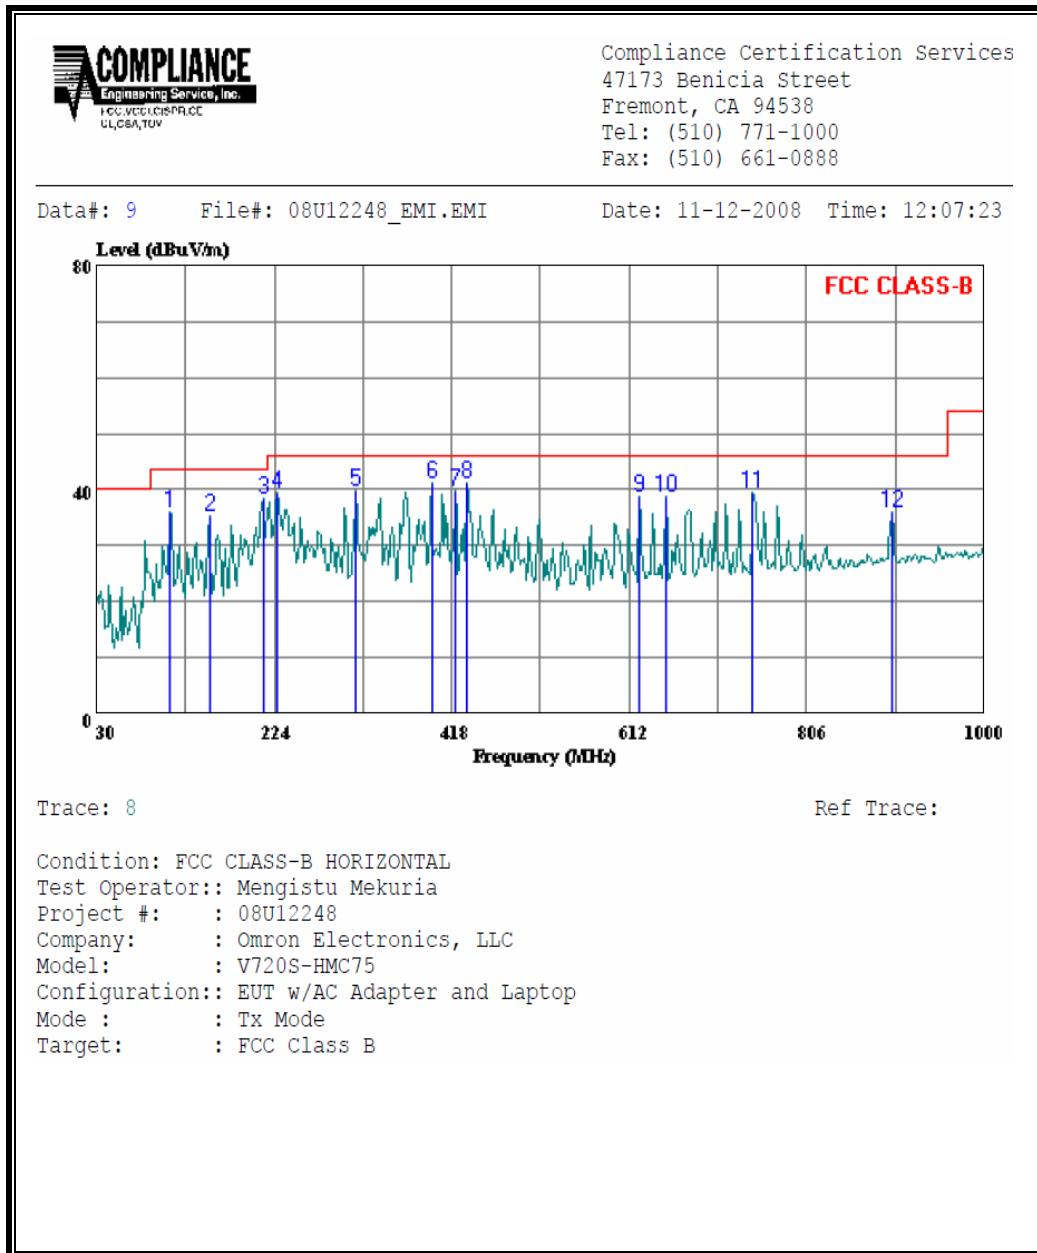

Freq	Read Level	Factor	Level	Limit	Over	Over Limit Remark	
				MHz	dBuV	dB	dBuV/m
1	109.540	50.82	-14.85	35.97	43.50	-7.53	Peak
2	153.190	49.35	-14.01	35.34	43.50	-8.16	Peak
3	211.390	51.55	-13.04	38.51	43.50	-4.99	Peak
4	225.940	52.54	-13.12	39.42	46.00	-6.58	Peak
5	313.240	50.35	-10.64	39.71	46.00	-6.29	Peak
6	395.690	49.37	-8.32	41.05	46.00	-4.95	Peak
7	421.880	47.23	-7.44	39.79	46.00	-6.21	Peak
8	434.490	48.06	-6.99	41.07	46.00	-4.93	Peak
9	623.640	41.15	-2.30	38.85	46.00	-7.15	Peak
10	652.740	40.41	-1.60	38.81	46.00	-7.19	Peak
11	746.830	39.39	0.17	39.56	46.00	-6.44	Peak
12	900.090	33.07	2.92	35.99	46.00	-10.01	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

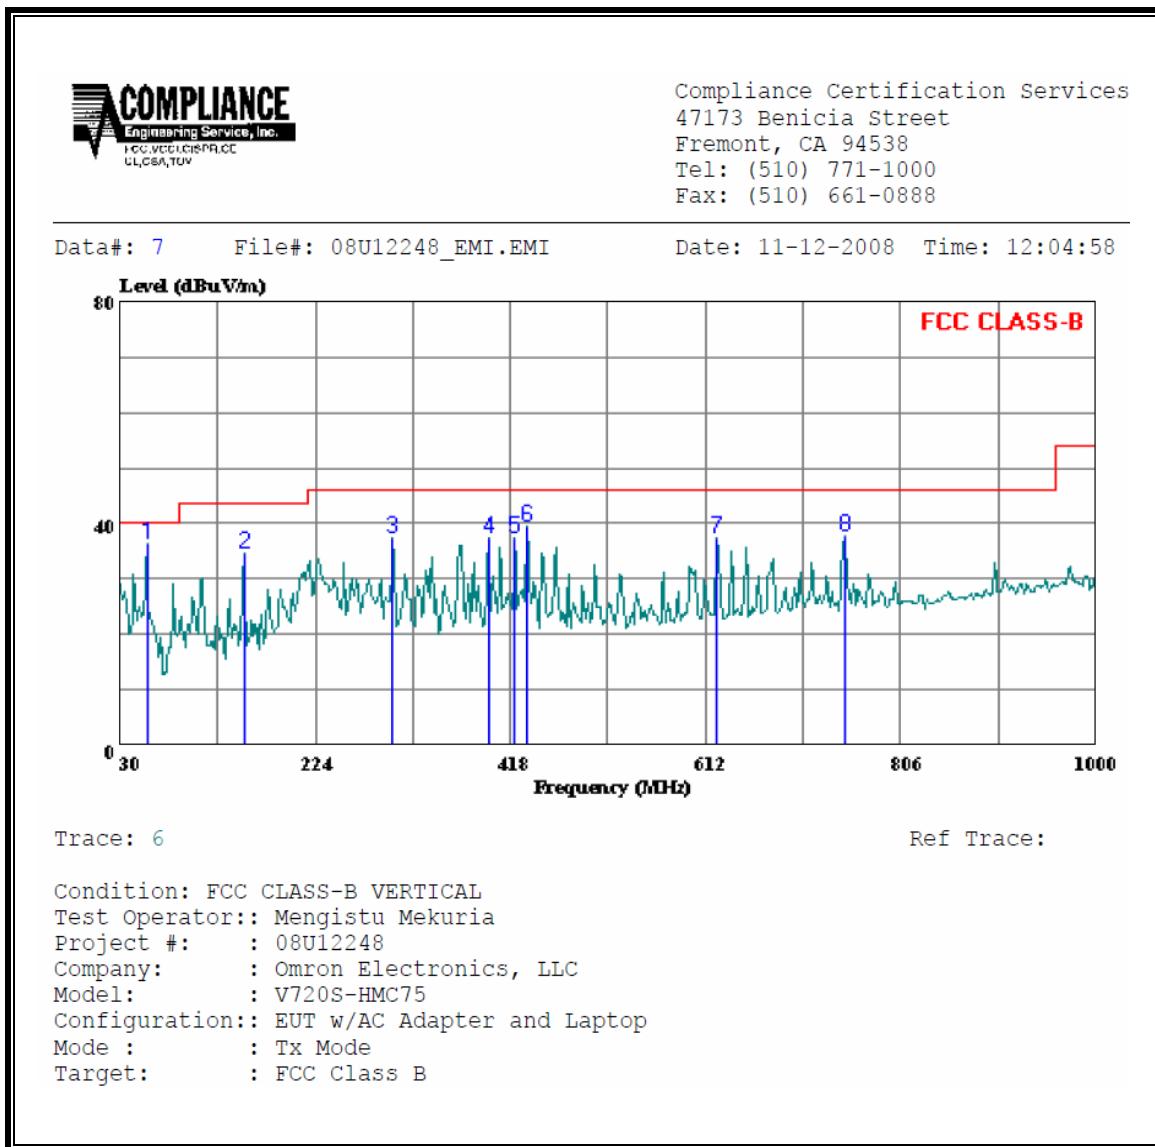

		Read		Limit	Over		
Freq	Level	Factor	Level	Line	Line	Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	56.190	56.08	-19.75	36.33	40.00	-3.67	Peak
2	153.190	48.69	-14.01	34.68	43.50	-8.82	Peak
3	300.630	48.40	-11.01	37.39	46.00	-8.61	Peak
4	395.690	45.62	-8.32	37.30	46.00	-8.70	Peak
5	421.880	44.78	-7.44	37.34	46.00	-8.66	Peak
6	434.490	46.63	-6.99	39.64	46.00	-6.36	Peak
7	623.640	39.77	-2.30	37.47	46.00	-8.53	Peak
8	749.740	37.49	0.18	37.67	46.00	-8.33	Peak

7.2. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clauses 2.3.1 and 2.3.2

RESULTS

Power Supply (Vdc)	Environment Temperature (°C)	Limit: 1.356 kHz		
		Frequency Deviation Measured with Time Elapse (MHz)	Delta (kHz)	Margin (kHz)
5.00	50	13.5601610	-0.073	-1.283
5.00	40	13.5601880	-0.046	-1.310
5.00	30	13.5602240	-0.010	-1.346
5.00	20	13.5602340	0.000	-1.356
5.00	10	13.5602780	0.044	-1.312
5.00	0	13.5602940	0.060	-1.296
5.00	-10	13.5602860	0.052	-1.304
5.00	-20	13.5602960	0.062	-1.294
4.50	20	13.5602250	-0.009	-1.347
5.50	20	13.5602440	0.010	-1.346

7.3. **99% BANDWIDTH**

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


Frequency (MHz)	99% Bandwidth kHz
13.56	9.4012

99% BANDWIDTH

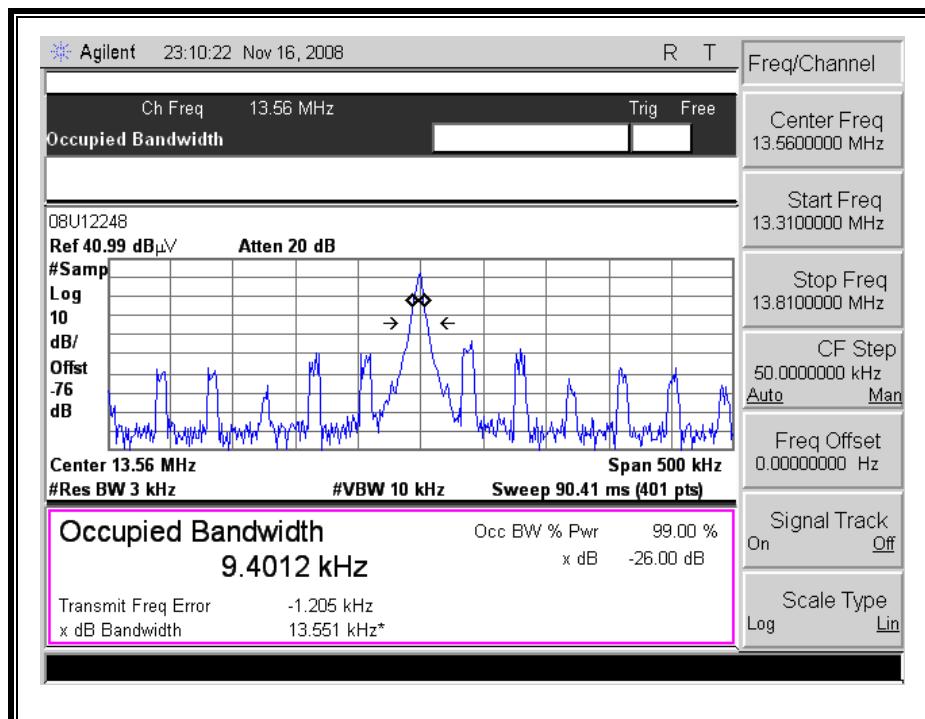

8. SETUP PHOTOS


RADIATED EMISSION (0.15-30 MHz)

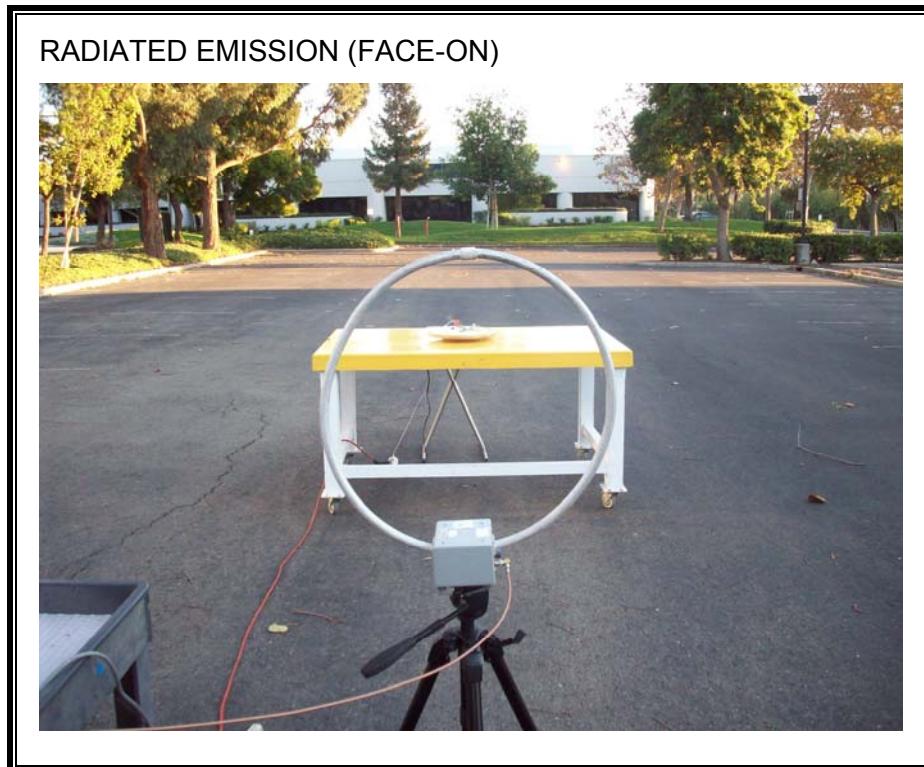

RADIATED EMISSION (FACE-OFF)




RADIATED EMISSION (X-POSITION)

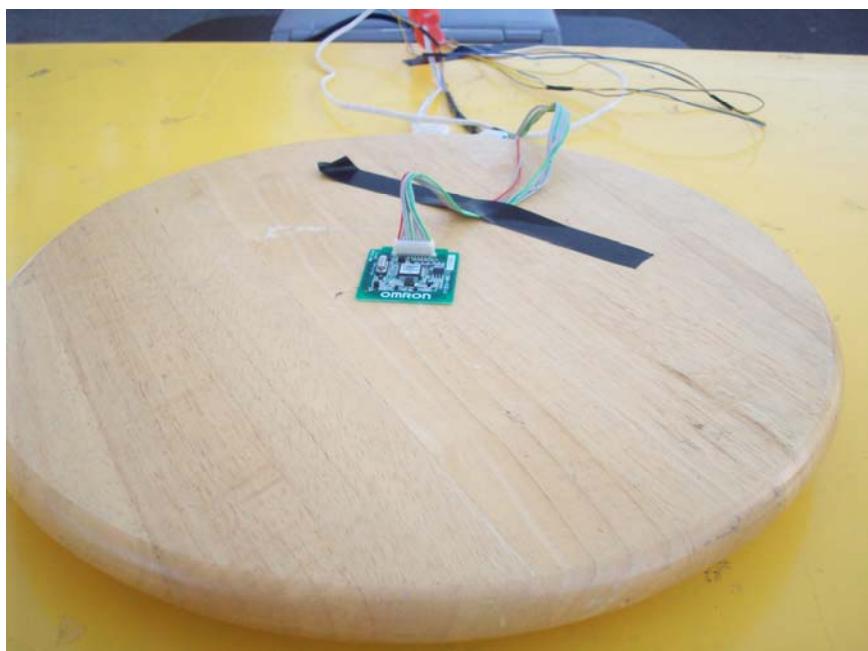


RADIATED EMISSION (Y-POSITION)




RADIATED EMISSION (Z-POSITION)

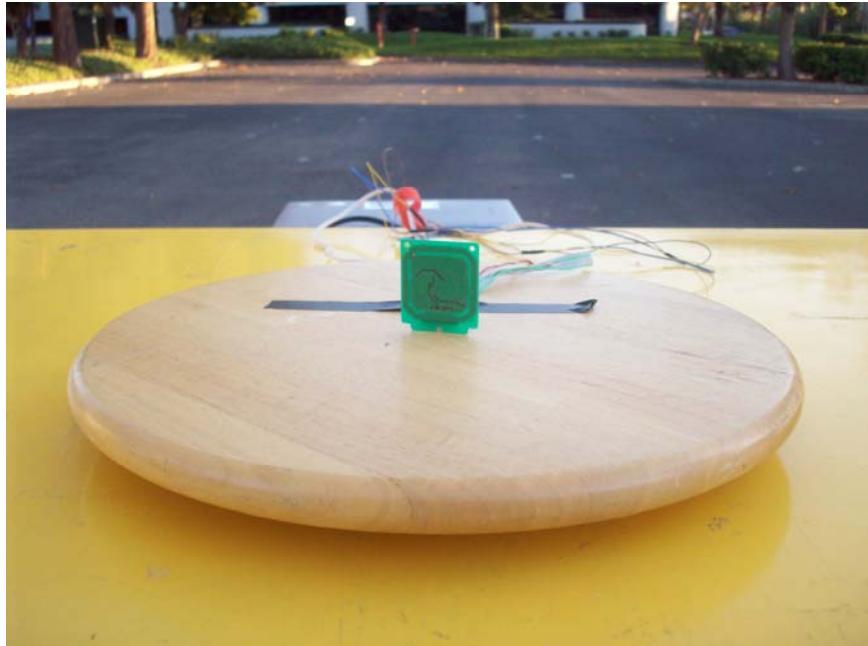

RADIATED EMISSION (30-1000 MHz)

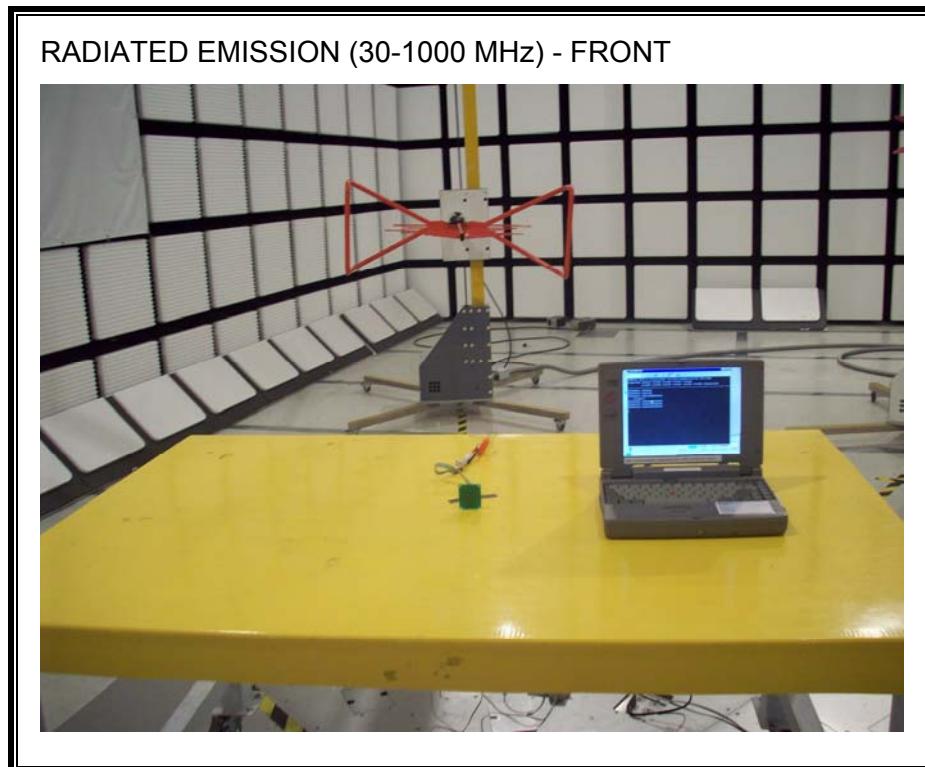

RADIATED EMISSION (30-1000 MHz) - BACK

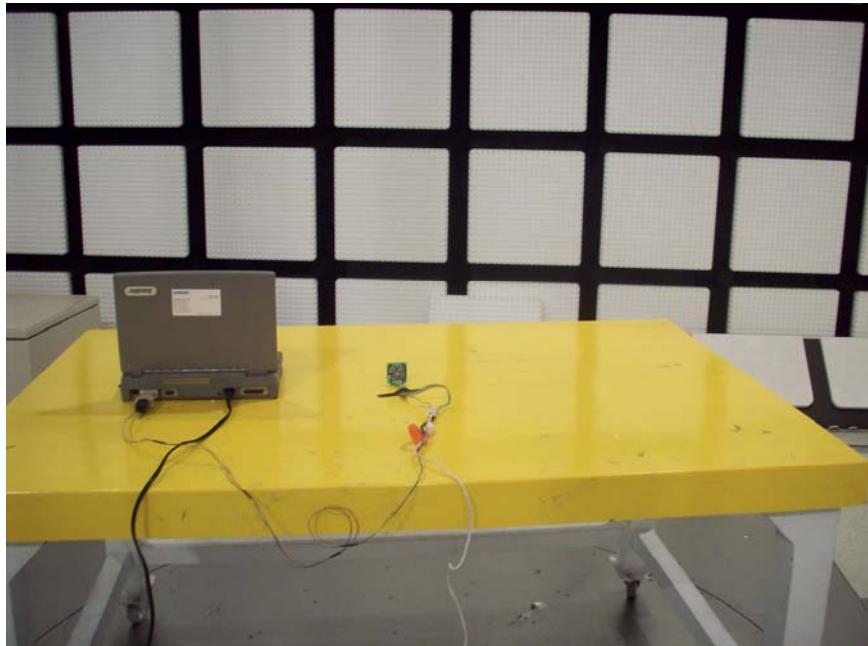

FREQUENCY TOLERANCE OVER EXTREME CONDITIONS

FREQUENCY TOLERANCE OVER EXTREME CONDITIONS



END OF REPORT