




BW: 320 MHz / Frequency: 6260 MHz

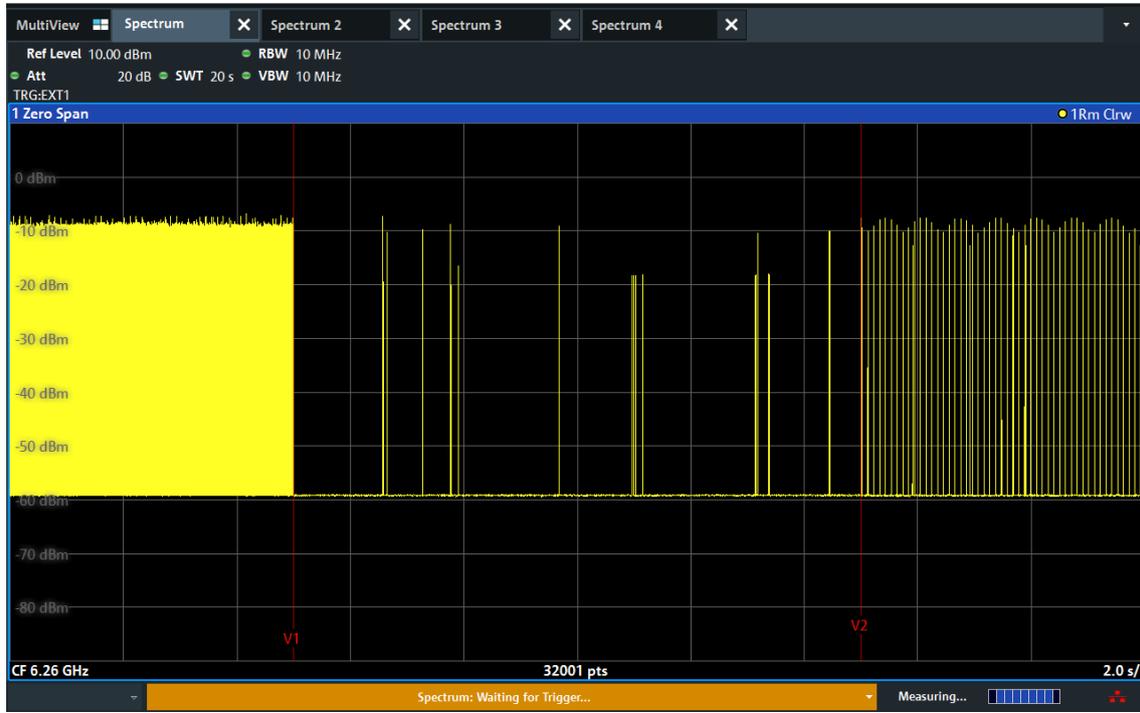

BW: 320 MHz / Frequency: 6270 MHz

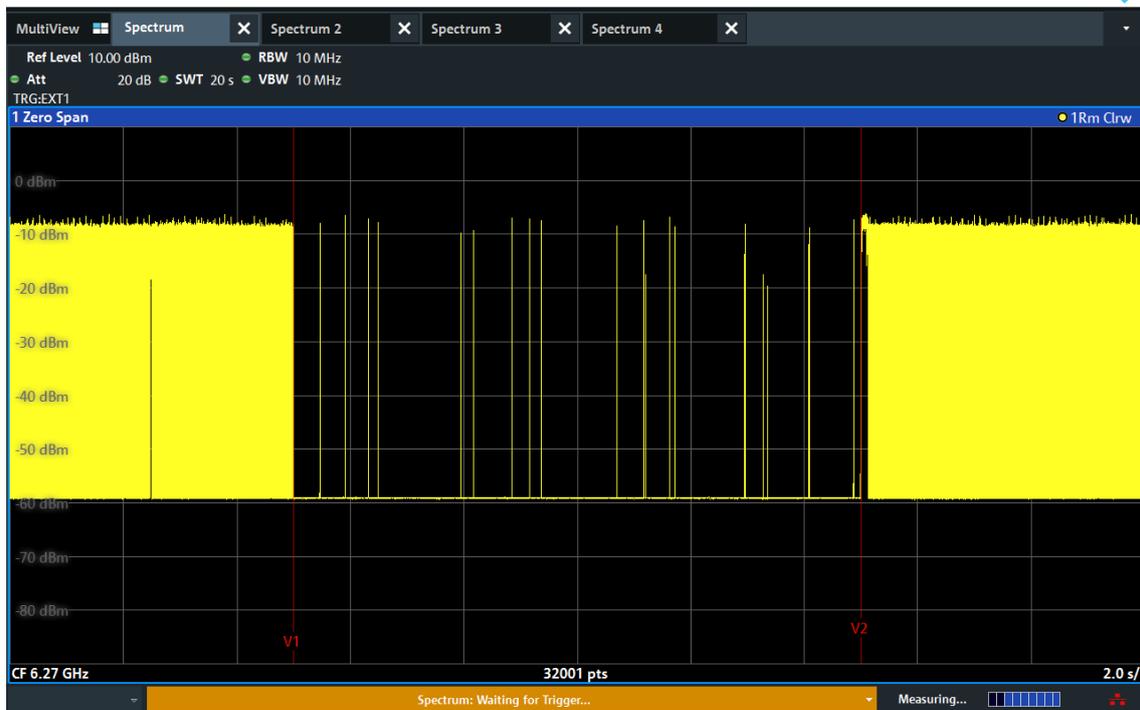

BW: 320 MHz / Frequency: 7060 MHz

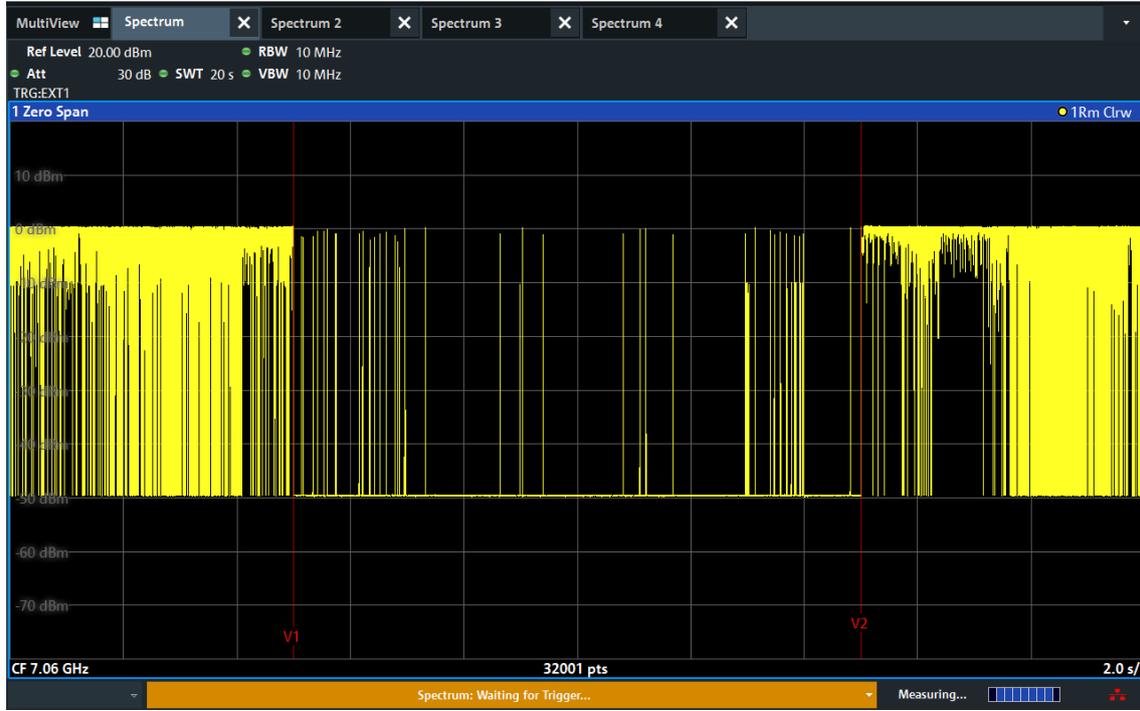

EUT ceased transmission

BW: 20 MHz / Frequency: 6194 MHz




BW: 20 MHz / Frequency: 6474 MHz



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 20 MHz / Frequency: 6694 MHz

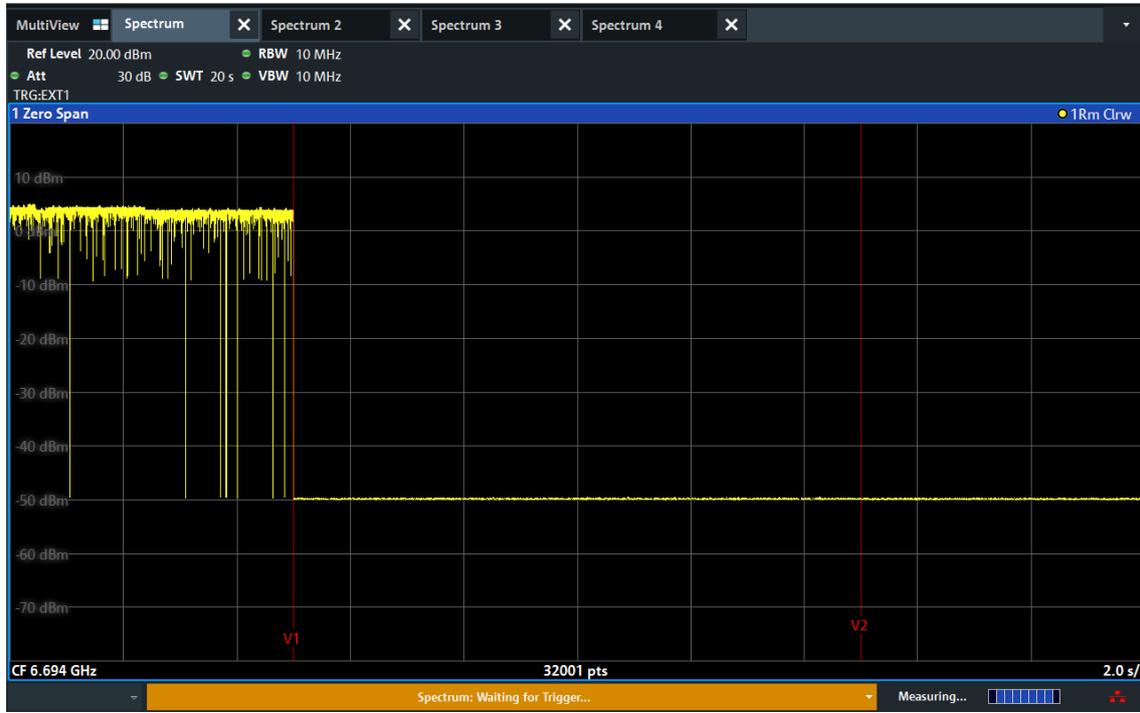


BW: 20 MHz / Frequency: 6994 MHz



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 5950 MHz

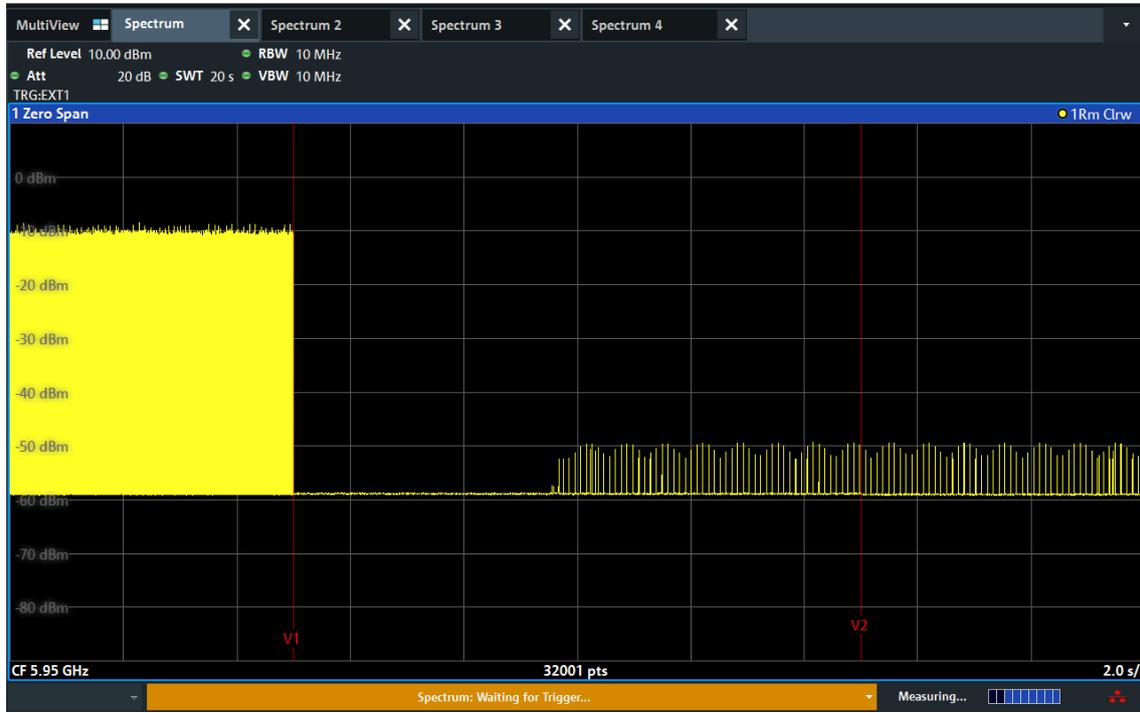


BW: 320 MHz / Frequency: 6100 MHz



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6260 MHz

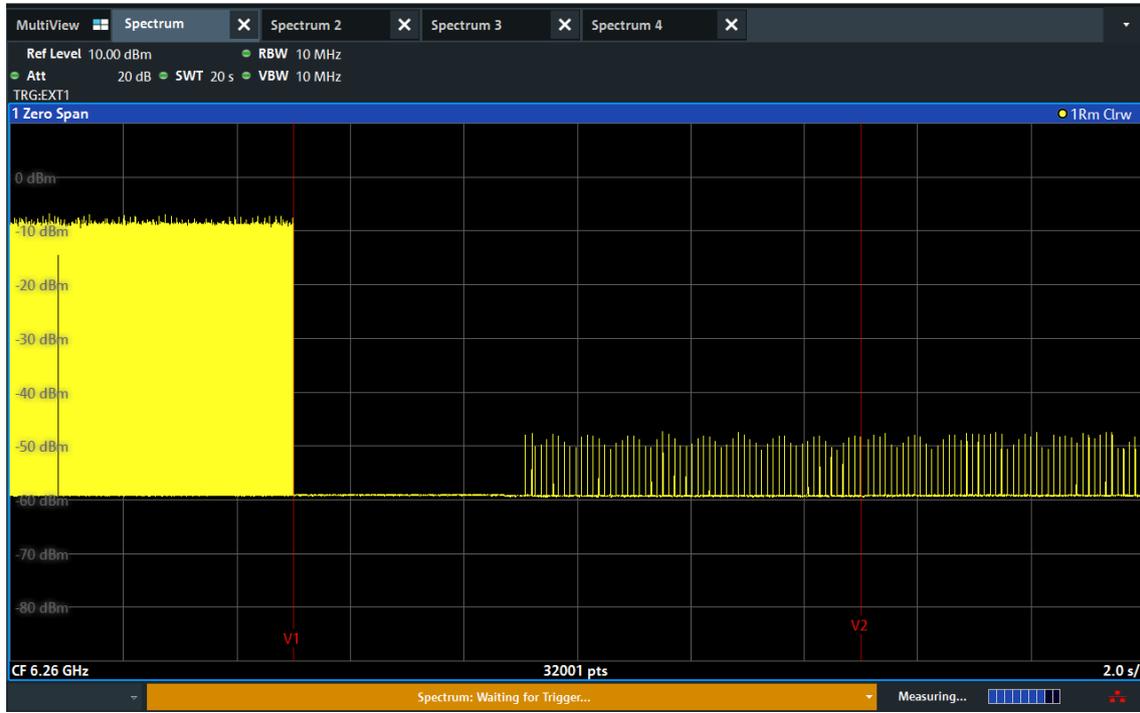


BW: 320 MHz / Frequency: 6270 MHz




Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6420 MHz

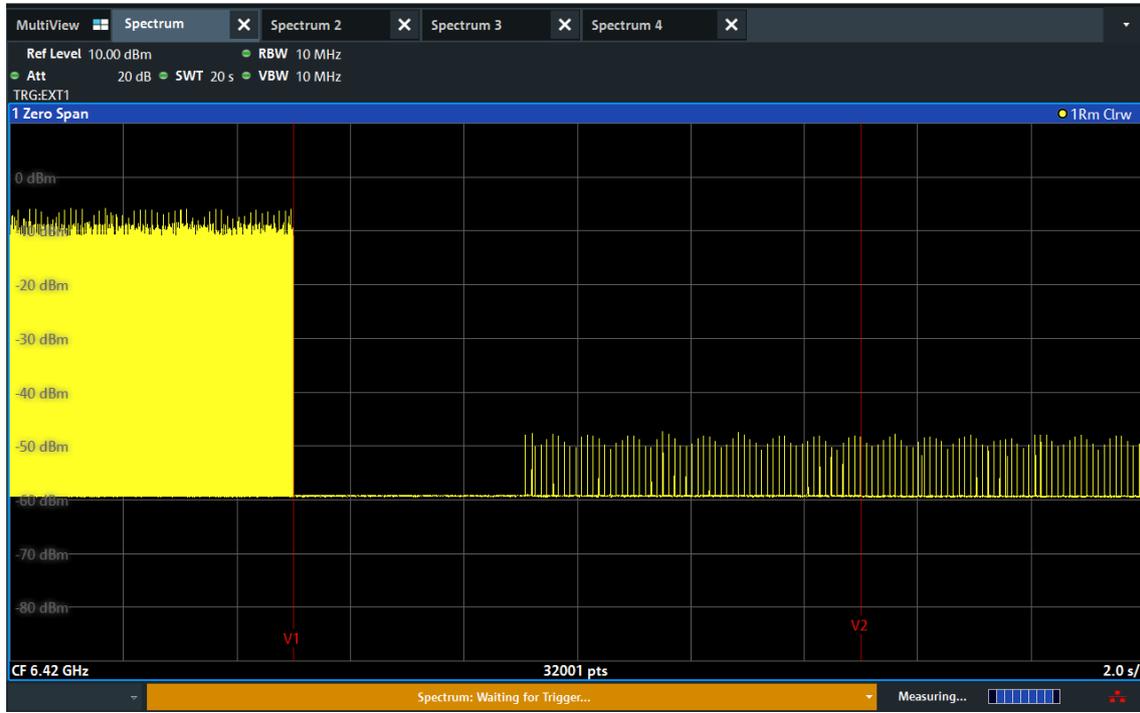


BW: 320 MHz / Frequency: 6580 MHz

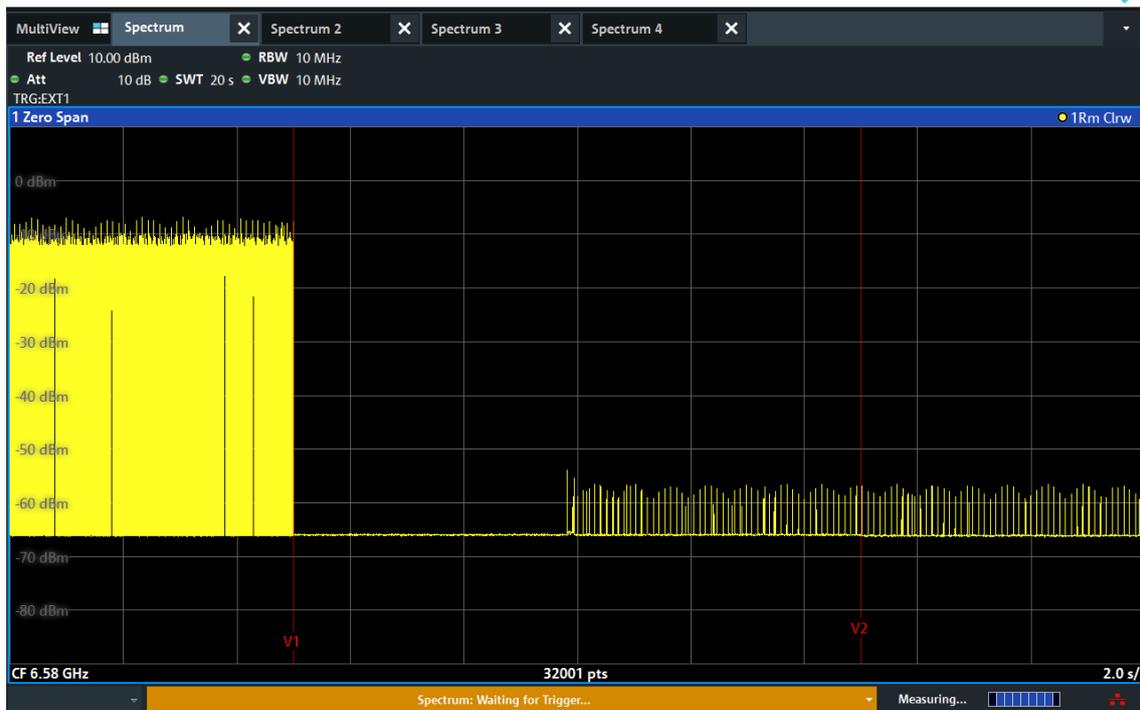

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


BW: 320 MHz / Frequency: 6750 MHz

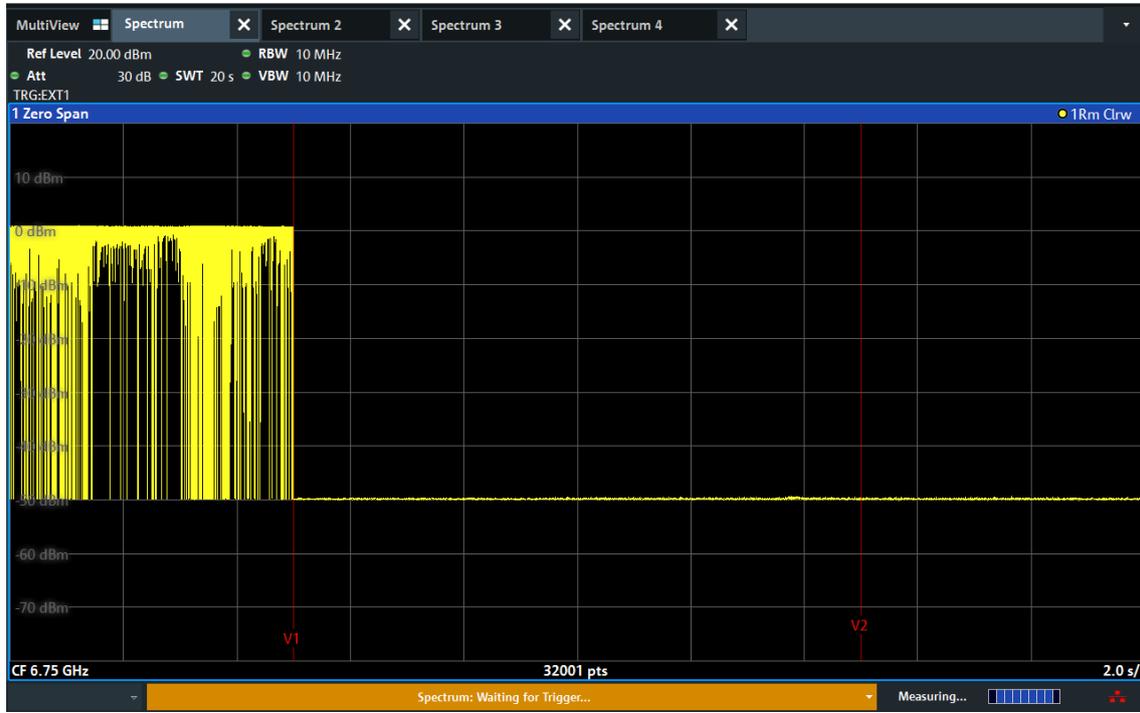

BW: 320 MHz / Frequency: 6900 MHz



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

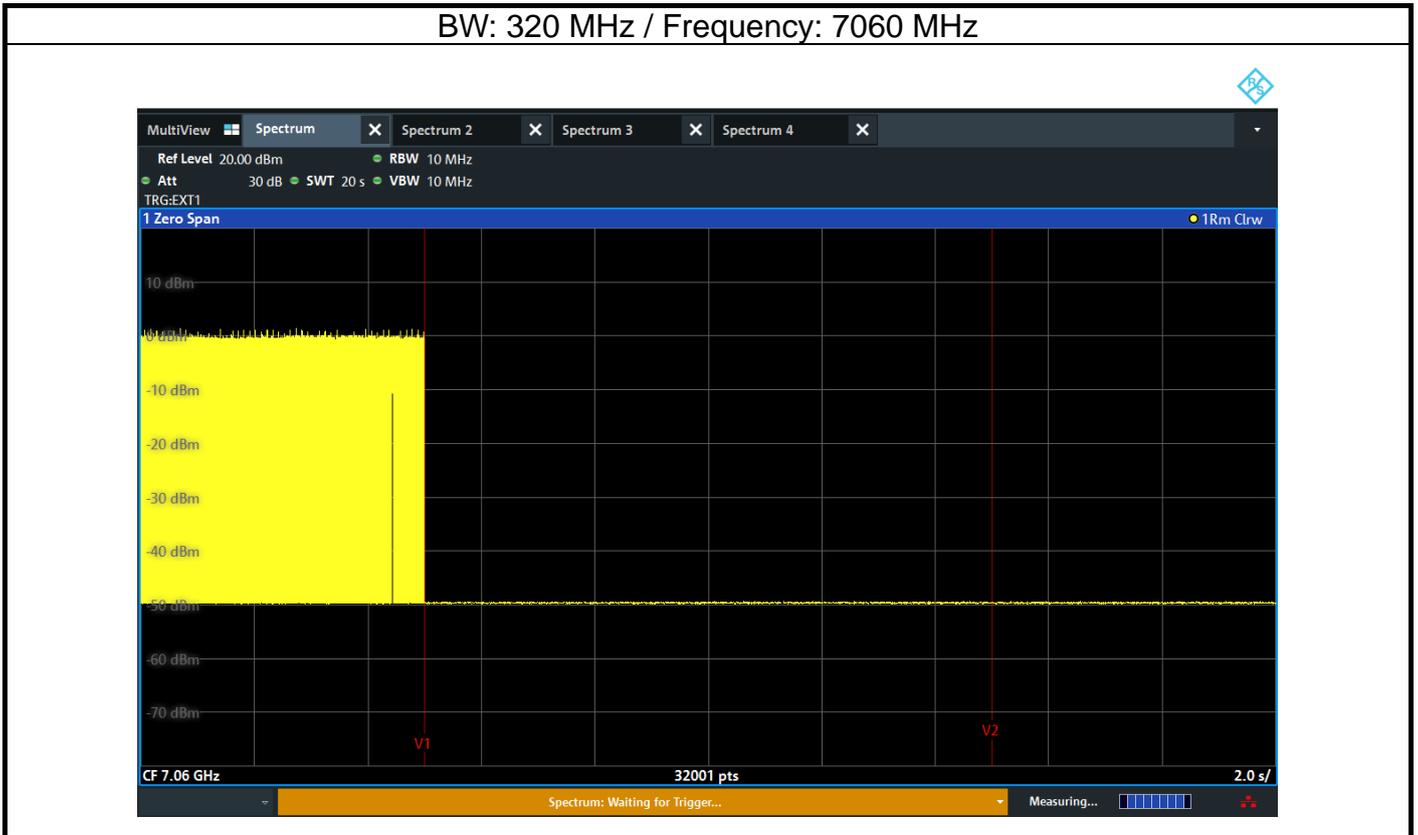


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.



Non-beamforming mode

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao Temperature: 26°C Humidity: 66%

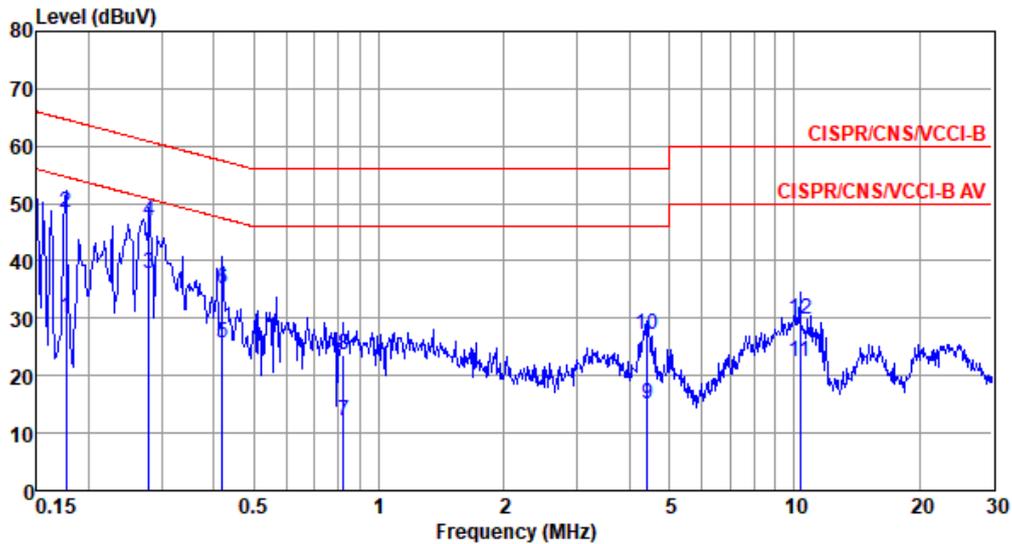


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	30.02	54.64	-24.62	20.06	9.64	0.08	0.24	Average
2	0.177	48.37	64.64	-16.27	38.41	9.64	0.08	0.24	QP
3*	0.279	37.88	50.85	-12.97	27.87	9.64	0.08	0.29	Average
4	0.279	46.79	60.85	-14.06	36.78	9.64	0.08	0.29	QP
5	0.419	25.64	47.46	-21.82	15.59	9.64	0.09	0.32	Average
6	0.419	35.02	57.46	-22.44	24.97	9.64	0.09	0.32	QP
7	0.822	12.20	46.00	-33.80	2.07	9.65	0.10	0.38	Average
8	0.822	23.75	56.00	-32.25	13.62	9.65	0.10	0.38	QP
9	4.430	14.98	46.00	-31.02	4.59	9.68	0.23	0.48	Average
10	4.430	27.23	56.00	-28.77	16.84	9.68	0.23	0.48	QP
11	10.342	22.57	50.00	-27.43	12.04	9.72	0.31	0.50	Average
12	10.342	29.79	60.00	-30.21	19.26	9.72	0.31	0.50	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao Temperature: 26°C Humidity: 66%

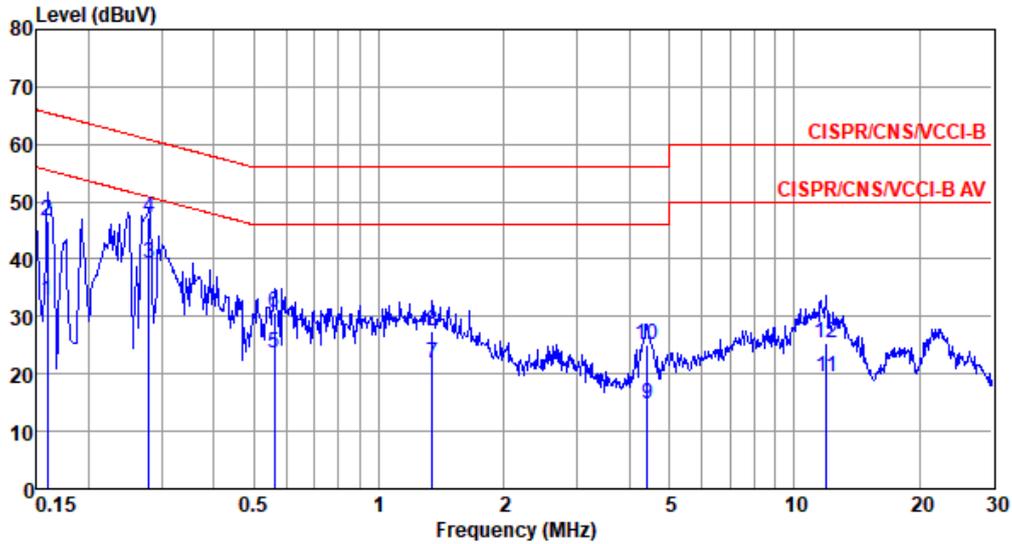

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	32.84	55.52	-22.68	22.97	9.64	0.08	0.15	Average
2	0.159	46.63	65.52	-18.89	36.76	9.64	0.08	0.15	QP
3*	0.279	39.36	50.85	-11.49	29.41	9.64	0.08	0.23	Average
4	0.279	47.12	60.85	-13.73	37.17	9.64	0.08	0.23	QP
5	0.561	23.57	46.00	-22.43	13.56	9.63	0.09	0.29	Average
6	0.561	30.71	56.00	-25.29	20.70	9.63	0.09	0.29	QP
7	1.345	21.72	46.00	-24.28	11.57	9.64	0.13	0.38	Average
8	1.345	27.43	56.00	-28.57	17.28	9.64	0.13	0.38	QP
9	4.430	14.87	46.00	-31.13	4.49	9.67	0.23	0.48	Average
10	4.430	25.23	56.00	-30.77	14.85	9.67	0.23	0.48	QP
11	11.933	19.58	50.00	-30.42	8.93	9.74	0.36	0.55	Average
12	11.933	25.28	60.00	-34.72	14.63	9.74	0.36	0.55	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Beamforming mode

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao Temperature: 26°C Humidity: 66%

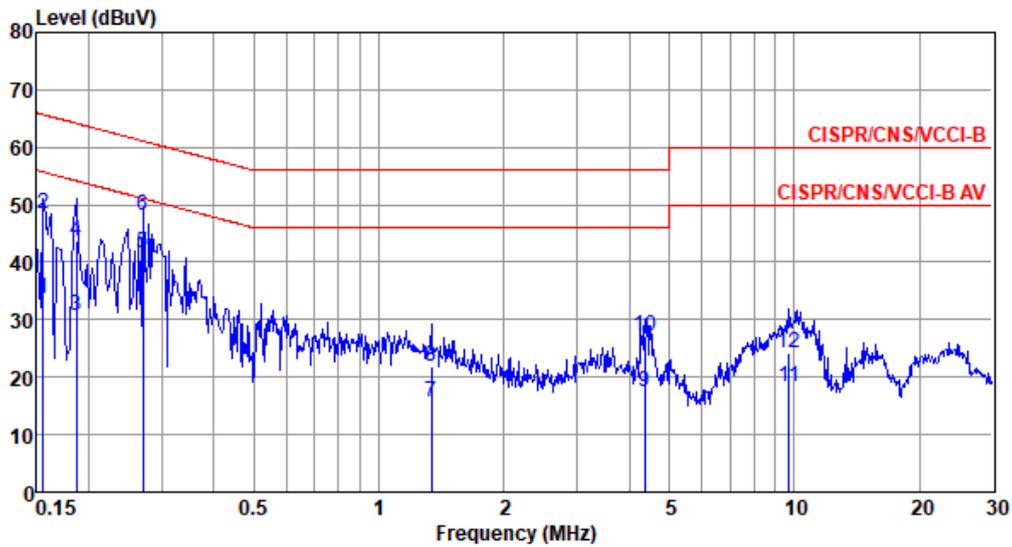


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	33.54	55.69	-22.15	23.59	9.65	0.08	0.22	Average
2	0.156	48.40	65.69	-17.29	38.45	9.65	0.08	0.22	QP
3	0.186	30.80	54.20	-23.40	20.83	9.64	0.08	0.25	Average
4	0.186	43.59	64.20	-20.61	33.62	9.64	0.08	0.25	QP
5*	0.270	41.53	51.12	-9.59	31.52	9.64	0.08	0.29	Average
6	0.270	47.98	61.12	-13.14	37.97	9.64	0.08	0.29	QP
7	1.338	15.63	46.00	-30.37	5.44	9.65	0.13	0.41	Average
8	1.338	21.95	56.00	-34.05	11.76	9.65	0.13	0.41	QP
9	4.361	17.41	46.00	-28.59	7.03	9.67	0.23	0.48	Average
10	4.361	27.19	56.00	-28.81	16.81	9.67	0.23	0.48	QP
11	9.705	18.28	50.00	-31.72	7.76	9.72	0.30	0.50	Average
12	9.705	24.27	60.00	-35.73	13.75	9.72	0.30	0.50	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao Temperature: 26°C Humidity: 66%

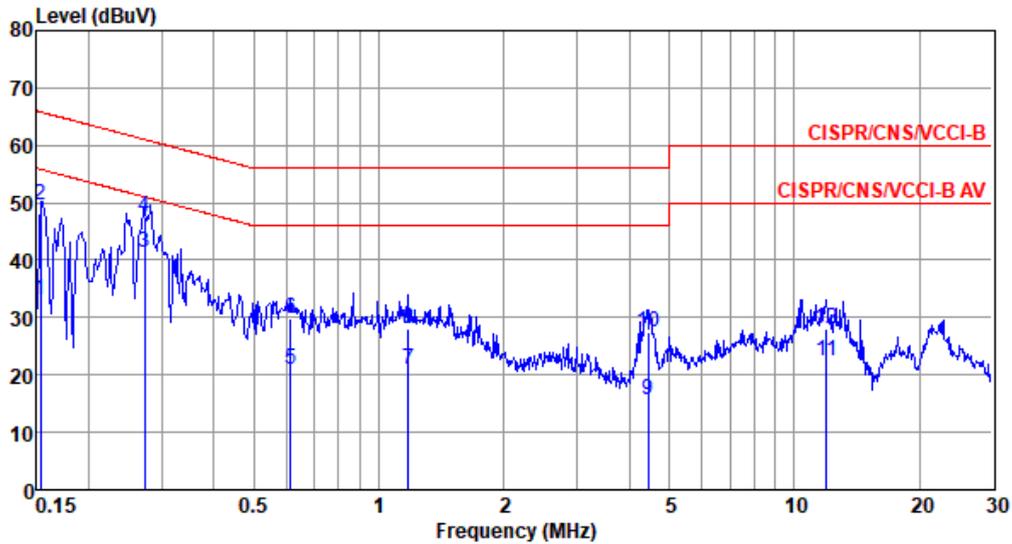

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	33.07	55.82	-22.75	23.21	9.64	0.08	0.14	Average
2	0.153	49.46	65.82	-16.36	39.60	9.64	0.08	0.14	QP
3*	0.273	41.46	51.03	-9.57	31.51	9.64	0.08	0.23	Average
4	0.273	47.63	61.03	-13.40	37.68	9.64	0.08	0.23	QP
5	0.614	20.88	46.00	-25.12	10.86	9.63	0.09	0.30	Average
6	0.614	29.75	56.00	-26.25	19.73	9.63	0.09	0.30	QP
7	1.178	20.95	46.00	-25.05	10.82	9.64	0.12	0.37	Average
8	1.178	28.07	56.00	-27.93	17.94	9.64	0.12	0.37	QP
9	4.454	15.58	46.00	-30.42	5.20	9.67	0.23	0.48	Average
10	4.454	27.41	56.00	-28.59	17.03	9.67	0.23	0.48	QP
11	11.933	22.36	50.00	-27.64	11.71	9.74	0.36	0.55	Average
12	11.933	28.11	60.00	-31.89	17.46	9.74	0.36	0.55	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).