




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	5570
Polarization	Vertical-Peak Value		

Test By :Sean Yu Temperature(°C):26 Humidity(%):61

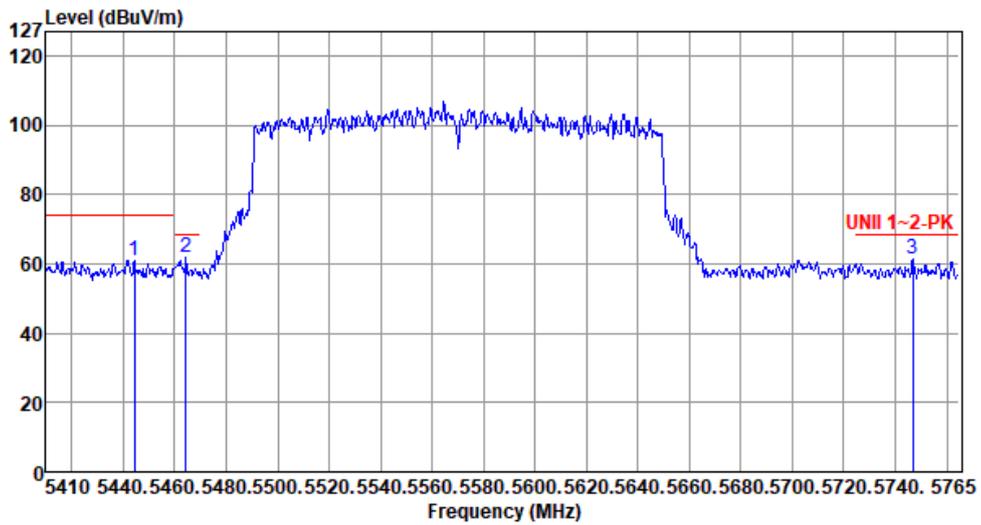


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5444.44	61.15	74.00	-12.85	60.94	0.21	Peak	111	2
2	5464.32	61.66	68.20	-6.54	61.41	0.25	Peak	111	2
3	5746.90	61.29	68.20	-6.91	60.57	0.72	Peak	111	2



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	5570
Polarization	Vertical -Average Value		

Test By :Sean Yu Temperature(°C):26 Humidity(%):61

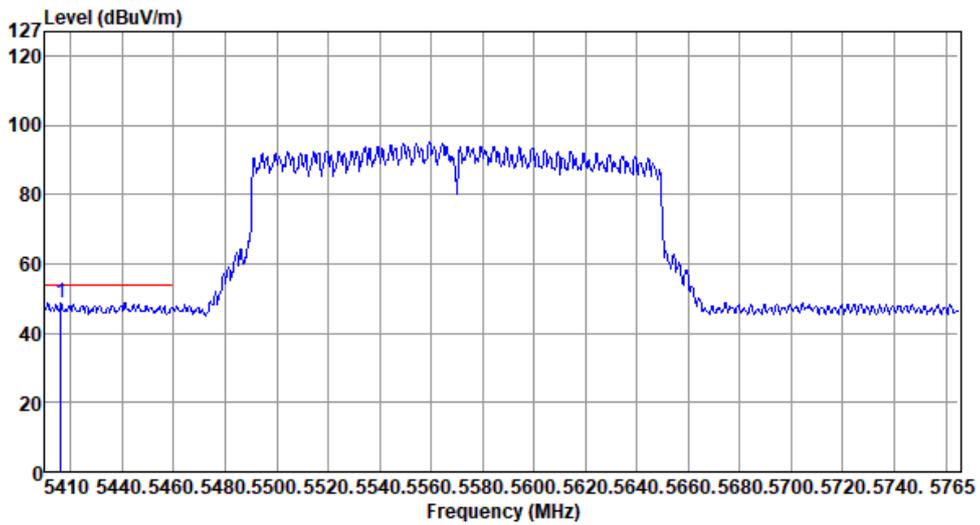

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5416.04	48.68	54.00	-5.32	48.53	0.15	Average	111	2




Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-9.15	-9.02	-8.84	-8.68
T20°CVmin	-9.69	-9.65	-9.99	-9.74
T40°CVnom	-13.53	-12.85	-12.78	-13.65
T30°CVnom	-13.42	-13.54	-13.29	-13.13
T20°CVnom	-9.90	-9.99	-9.54	-9.40
T10°CVnom	-6.89	-7.11	-5.99	-7.39
T0°CVnom	-5.30	-5.59	-4.60	-5.38
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-7.89	-8.17	-8.07	-8.33
T20°CVmin	-8.43	-8.04	-8.41	-7.82
T40°CVnom	-12.29	-12.17	-12.44	-11.78
T30°CVnom	-11.81	-11.48	-11.78	-11.48
T20°CVnom	-9.17	-9.46	-9.00	-9.45
T10°CVnom	-6.18	-5.84	-6.38	-6.26
T0°CVnom	-4.55	-3.95	-4.49	-4.50
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	



Modulation Mode	be EHT20-OFDMA	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

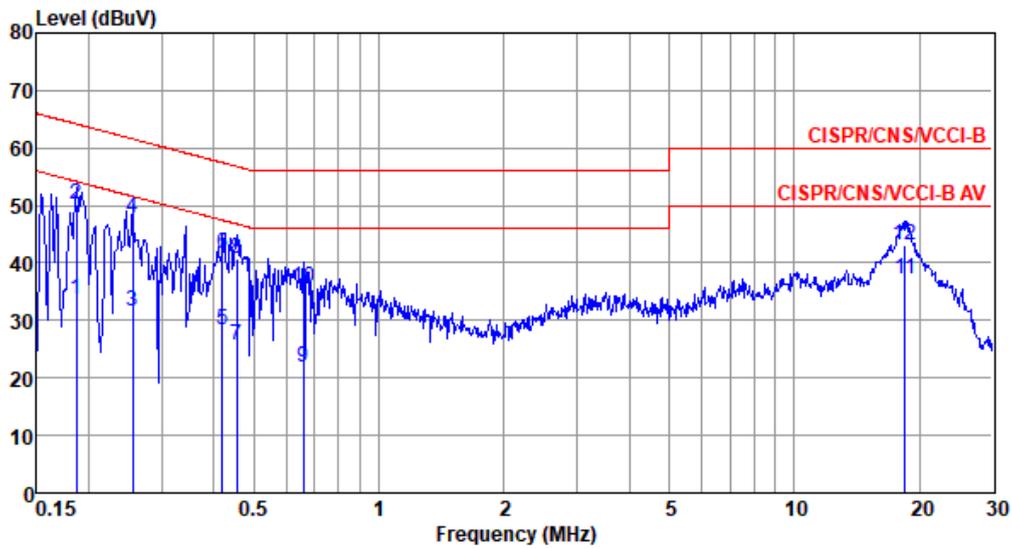


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	33.60	54.20	-20.60	23.63	9.64	0.08	0.25	Average
2	0.186	50.22	64.20	-13.98	40.25	9.64	0.08	0.25	QP
3	0.255	31.67	51.60	-19.93	21.67	9.64	0.08	0.28	Average
4	0.255	47.86	61.60	-13.74	37.86	9.64	0.08	0.28	QP
5	0.419	28.38	47.46	-19.08	18.33	9.64	0.09	0.32	Average
6	0.419	41.52	57.46	-15.94	31.47	9.64	0.09	0.32	QP
7	0.454	25.59	46.80	-21.21	15.53	9.64	0.09	0.33	Average
8	0.454	40.77	56.80	-16.03	30.71	9.64	0.09	0.33	QP
9	0.658	21.72	46.00	-24.28	11.61	9.65	0.10	0.36	Average
10	0.658	35.81	56.00	-20.19	25.70	9.65	0.10	0.36	QP
11*	18.524	37.25	50.00	-12.75	26.40	9.69	0.54	0.62	Average
12	18.524	42.97	60.00	-17.03	32.12	9.69	0.54	0.62	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT20-OFDMA	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

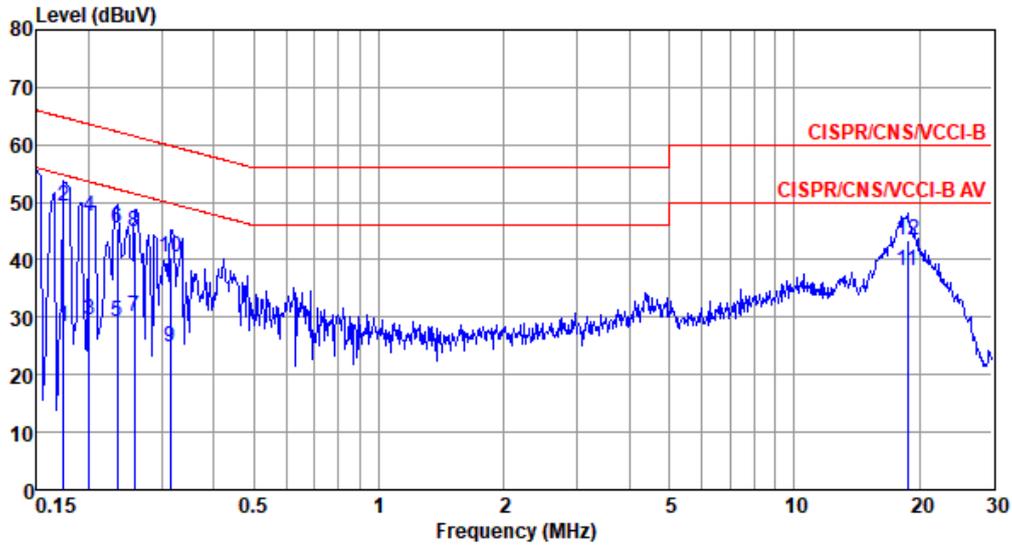


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.174	28.47	54.77	-26.30	18.58	9.64	0.08	0.17	Average
2	0.174	49.32	64.77	-15.45	39.43	9.64	0.08	0.17	QP
3	0.201	29.45	53.58	-24.13	19.53	9.64	0.08	0.20	Average
4	0.201	47.59	63.58	-15.99	37.67	9.64	0.08	0.20	QP
5	0.234	29.35	52.30	-22.95	19.42	9.64	0.08	0.21	Average
6	0.234	45.58	62.30	-16.72	35.65	9.64	0.08	0.21	QP
7	0.258	30.08	51.51	-21.43	20.14	9.64	0.08	0.22	Average
8	0.258	44.85	61.51	-16.66	34.91	9.64	0.08	0.22	QP
9	0.315	24.74	49.84	-25.10	14.78	9.63	0.09	0.24	Average
10	0.315	40.53	59.84	-19.31	30.57	9.63	0.09	0.24	QP
11*	18.721	37.97	50.00	-12.03	27.03	9.78	0.54	0.62	Average
12	18.721	43.41	60.00	-16.59	32.47	9.78	0.54	0.62	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

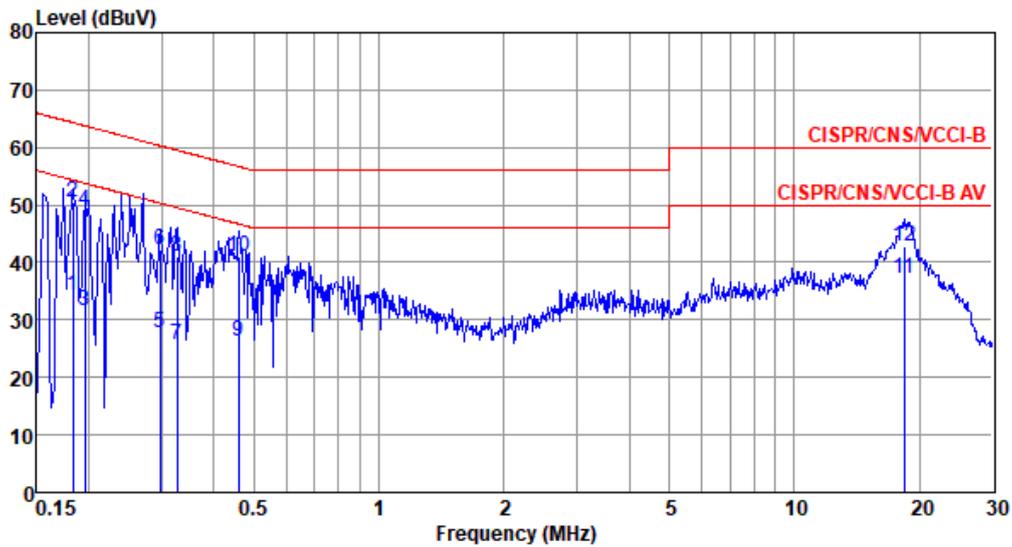


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.183	34.35	54.33	-19.98	24.38	9.64	0.08	0.25	Average
2	0.183	50.43	64.33	-13.90	40.46	9.64	0.08	0.25	QP
3	0.195	31.73	53.80	-22.07	21.75	9.64	0.08	0.26	Average
4	0.195	48.97	63.80	-14.83	38.99	9.64	0.08	0.26	QP
5	0.297	27.81	50.32	-22.51	17.79	9.64	0.09	0.29	Average
6	0.297	42.25	60.32	-18.07	32.23	9.64	0.09	0.29	QP
7	0.327	25.71	49.53	-23.82	15.68	9.64	0.09	0.30	Average
8	0.327	41.10	59.53	-18.43	31.07	9.64	0.09	0.30	QP
9	0.459	26.21	46.71	-20.50	16.15	9.64	0.09	0.33	Average
10	0.459	40.97	56.71	-15.74	30.91	9.64	0.09	0.33	QP
11*	18.426	37.28	50.00	-12.72	26.45	9.69	0.53	0.61	Average
12	18.426	42.87	60.00	-17.13	32.04	9.69	0.53	0.61	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Brad Wu Temperature: 23°C Humidity: 65%

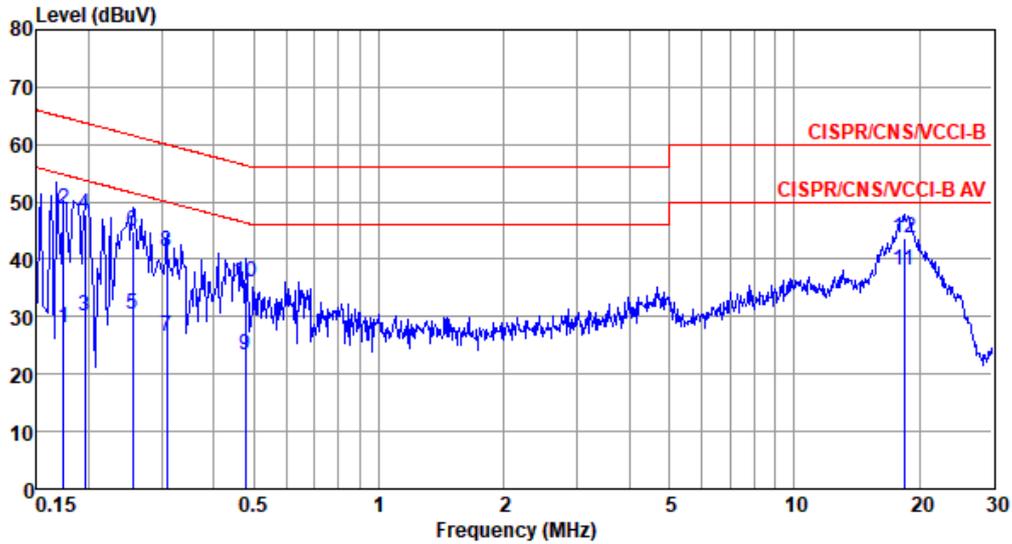

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.174	28.15	54.77	-26.62	18.26	9.64	0.08	0.17	Average
2	0.174	48.83	64.77	-15.94	38.94	9.64	0.08	0.17	QP
3	0.195	29.97	53.80	-23.83	20.06	9.64	0.08	0.19	Average
4	0.195	47.80	63.80	-16.00	37.89	9.64	0.08	0.19	QP
5	0.255	30.51	51.60	-21.09	20.57	9.64	0.08	0.22	Average
6	0.255	44.85	61.60	-16.75	34.91	9.64	0.08	0.22	QP
7	0.308	26.51	50.02	-23.51	16.55	9.63	0.09	0.24	Average
8	0.308	41.40	60.02	-18.62	31.44	9.63	0.09	0.24	QP
9	0.476	23.19	46.41	-23.22	13.19	9.63	0.09	0.28	Average
10	0.476	36.09	56.41	-20.32	26.09	9.63	0.09	0.28	QP
11*	18.426	38.00	50.00	-12.00	27.07	9.78	0.53	0.62	Average
12	18.426	43.79	60.00	-16.21	32.86	9.78	0.53	0.62	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).