




Plots of Injected signal (AWGN) level

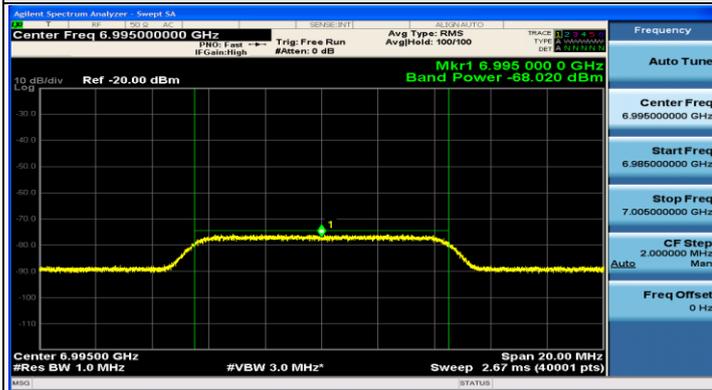


802.11be (EHT20) / CH209

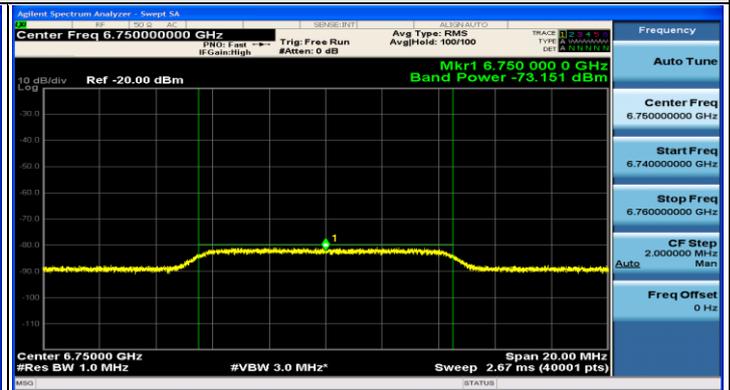

802.11be (EHT320) / CH191(Low Edge)

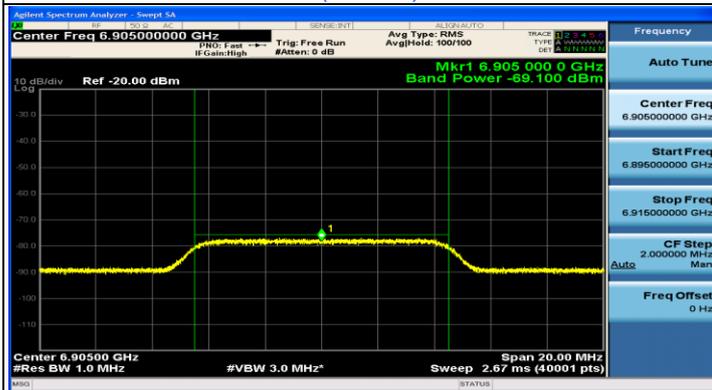


802.11be (EHT320) / CH191(Middle)

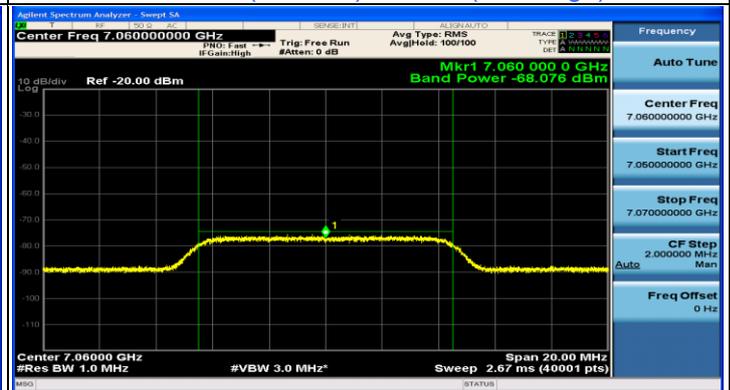


802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain

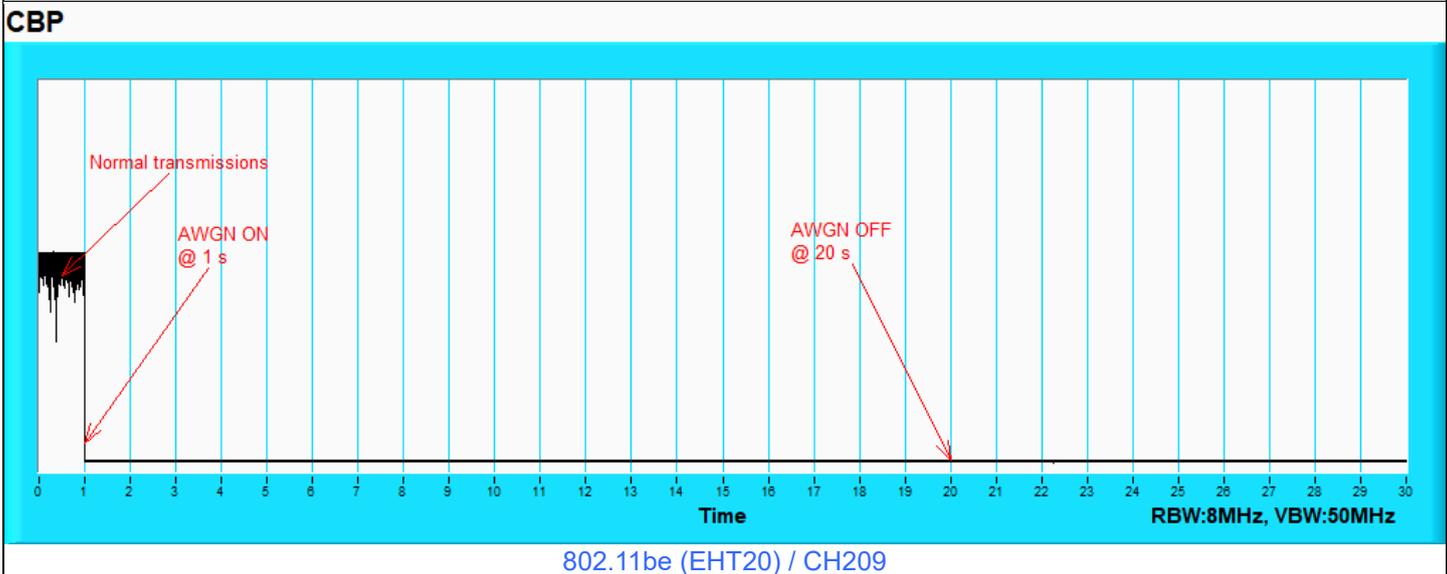


Plots of EUT ceased transmission in the time domain

CBP

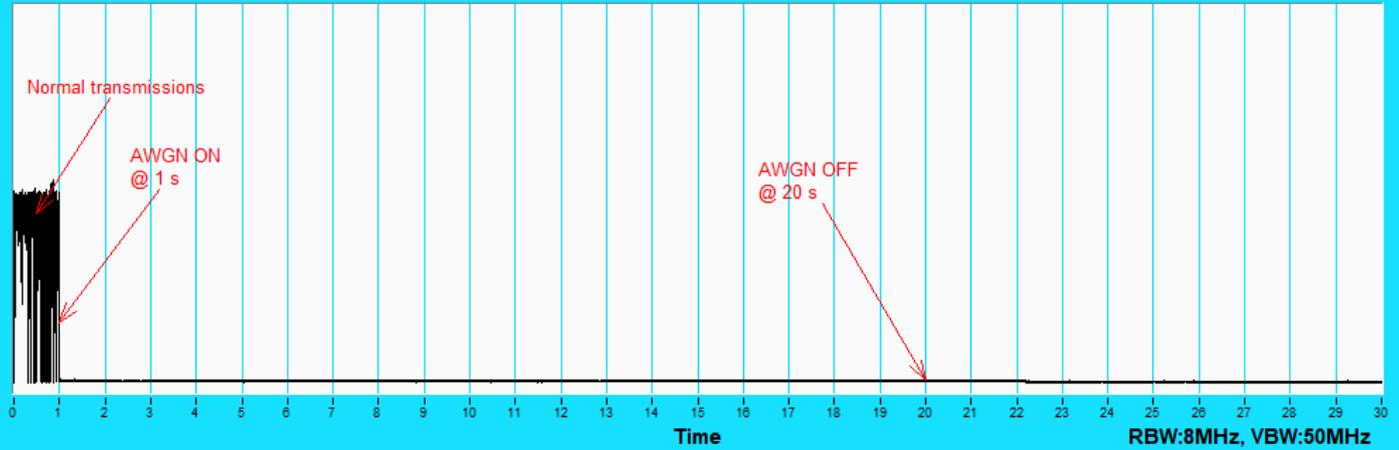


802.11be (EHT320) / CH191(Low Edge)

CBP

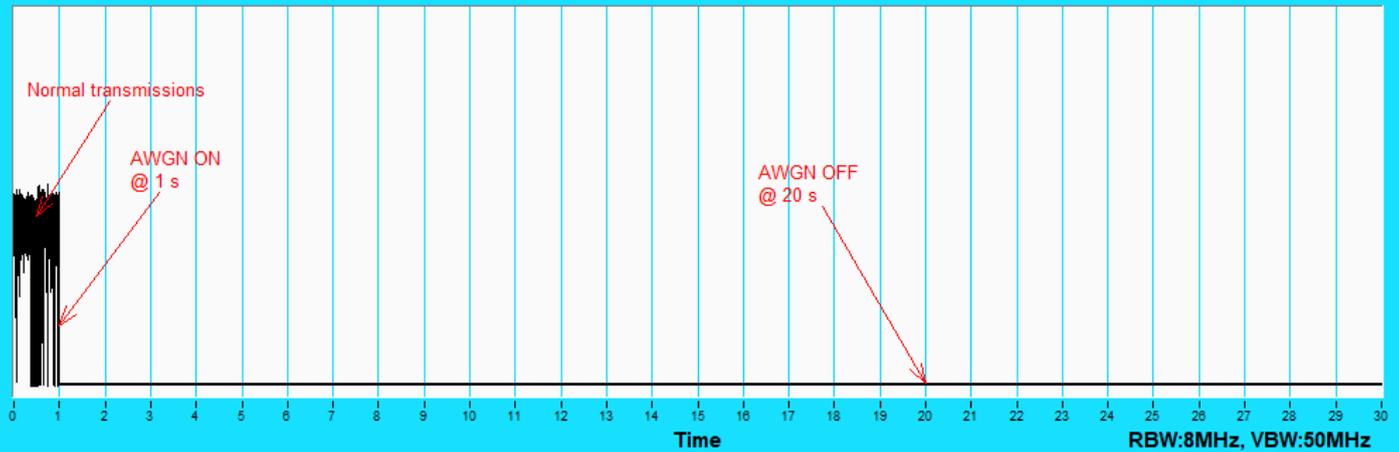

802.11be (EHT320) / CH191(Middle)

CBP

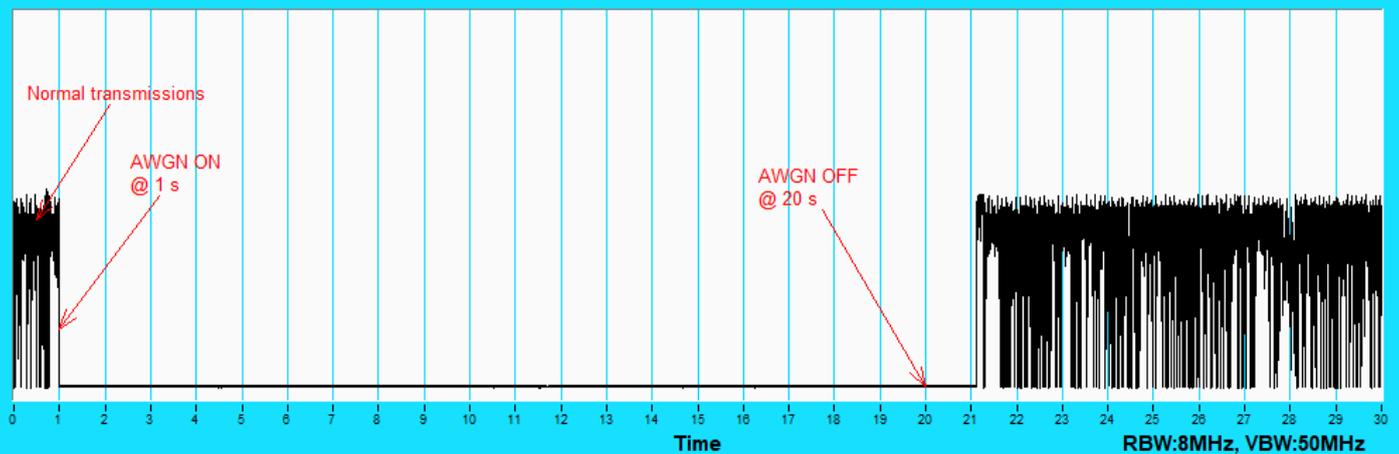

802.11be (EHT320) / CH191(High Edge)


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 68 % RH
Tested By	Edison Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.68	37.23	19.23	46.91	28.91	65.78	55.78	-18.87	-26.87
2	0.19000	9.70	32.36	19.29	42.06	28.99	64.04	54.04	-21.98	-25.05
3	0.36600	9.72	28.54	22.32	38.26	32.04	58.59	48.59	-20.33	-16.55
4	0.42132	9.72	33.03	30.81	42.75	40.53	57.42	47.42	-14.67	-6.89
5	2.53400	9.81	18.32	12.75	28.13	22.56	56.00	46.00	-27.87	-23.44
6	17.03400	10.04	17.99	13.30	28.03	23.34	60.00	50.00	-31.97	-26.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

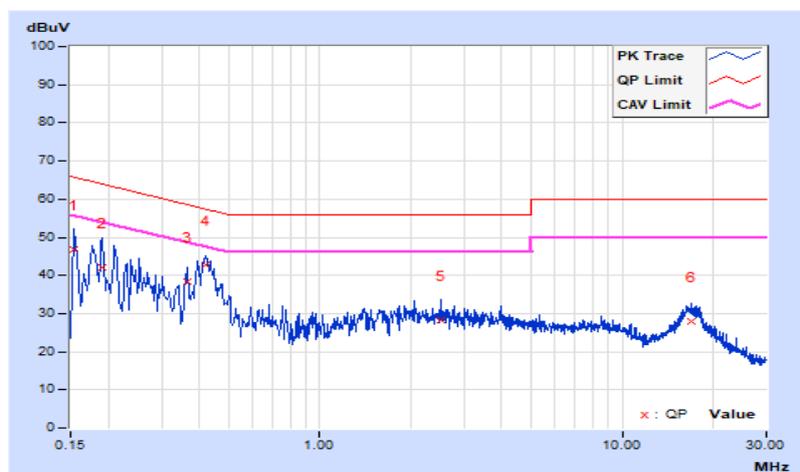


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 68 % RH
Tested By	Edison Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.66	36.28	19.30	45.94	28.96	65.57	55.57	-19.63	-26.61
2	0.17400	9.66	34.17	18.37	43.83	28.03	64.77	54.77	-20.94	-26.74
3	0.19800	9.66	32.05	17.77	41.71	27.43	63.69	53.69	-21.98	-26.26
4	0.41800	9.73	35.14	31.01	44.87	40.74	57.49	47.49	-12.62	-6.75
5	5.53000	9.90	16.00	10.78	25.90	20.68	60.00	50.00	-34.10	-29.32
6	16.69000	10.19	17.01	12.22	27.20	22.41	60.00	50.00	-32.80	-27.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

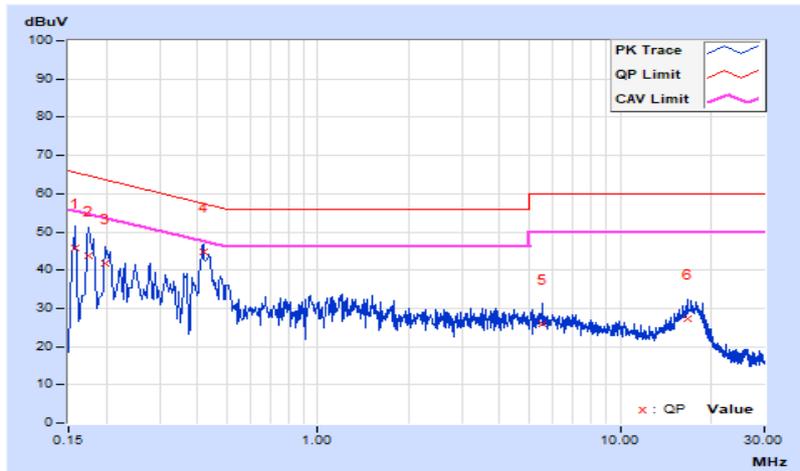


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.37	28.9 QP	40.0	-11.1	1.00 H	131	41.9	-13.0
2	98.87	25.9 QP	43.5	-17.6	1.25 H	268	43.4	-17.5
3	181.32	26.4 QP	43.5	-17.1	1.50 H	250	41.1	-14.7
4	240.49	26.9 QP	46.0	-19.1	1.00 H	271	41.2	-14.3
5	802.12	28.9 QP	46.0	-17.1	1.00 H	199	30.8	-1.9
6	944.71	32.3 QP	46.0	-13.7	1.50 H	347	32.1	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

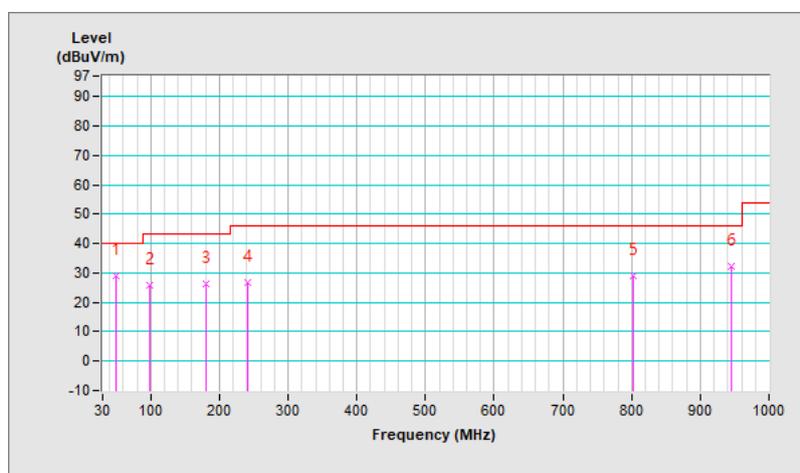


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	38.2 QP	40.0	-1.8	1.25 V	144	51.4	-13.2
2	143.49	26.7 QP	43.5	-16.8	1.00 V	345	39.6	-12.9
3	161.92	26.9 QP	43.5	-16.6	1.50 V	175	39.7	-12.8
4	220.12	24.5 QP	46.0	-21.5	1.00 V	159	40.7	-16.2
5	855.47	28.9 QP	46.0	-17.1	1.25 V	333	30.4	-1.5
6	944.71	32.5 QP	46.0	-13.5	1.00 V	48	32.3	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

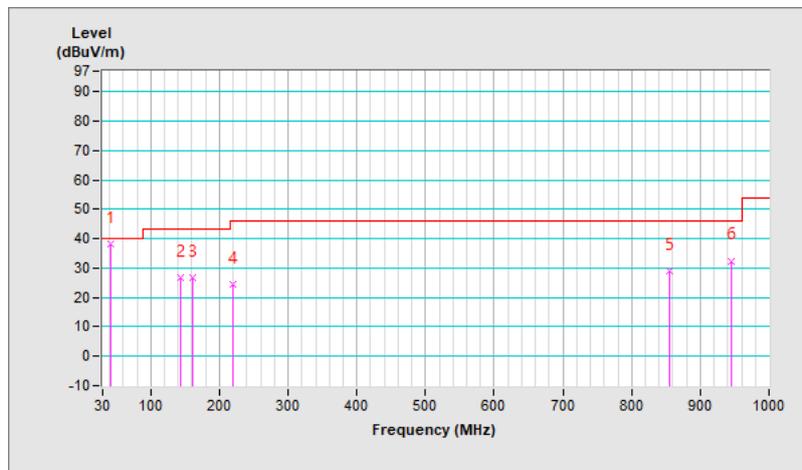

7.9 Unwanted Emissions above 1 GHz

CDD

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	2.52 H	7	52.7	5.9
2	#5925.00	44.6 AV	68.2	-23.6	2.52 H	7	38.7	5.9
3	*5955.00	108.5 PK			2.52 H	6	65.1	43.4
4	*5955.00	98.1 AV			2.52 H	6	54.7	43.4
5	11910.00	59.2 PK	74.0	-14.8	1.47 H	235	47.8	11.4
6	11910.00	46.2 AV	54.0	-7.8	1.47 H	235	34.8	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	2.49 V	263	51.6	5.9
2	#5925.00	44.2 AV	68.2	-24.0	2.49 V	263	38.3	5.9
3	*5955.00	106.3 PK			2.49 V	263	62.9	43.4
4	*5955.00	96.0 AV			2.49 V	263	52.6	43.4
5	11910.00	58.7 PK	74.0	-15.3	2.67 V	116	47.3	11.4
6	11910.00	45.3 AV	54.0	-8.7	2.67 V	116	33.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.6 PK			2.15 H	202	64.1	44.5
2	*6175.00	98.5 AV			2.15 H	202	54.0	44.5
3	12350.00	57.8 PK	74.0	-16.2	1.43 H	239	46.6	11.2
4	12350.00	44.9 AV	54.0	-9.1	1.43 H	239	33.7	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	106.7 PK			2.53 V	267	62.2	44.5
2	*6175.00	96.3 AV			2.53 V	267	51.8	44.5
3	12350.00	57.6 PK	74.0	-16.4	2.69 V	118	46.4	11.2
4	12350.00	44.7 AV	54.0	-9.3	2.69 V	118	33.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.6 PK			1.86 H	206	62.7	45.9
2	*6415.00	98.4 AV			1.86 H	206	52.5	45.9
3	#12830.00	58.6 PK	88.2	-29.6	1.52 H	239	47.3	11.3
4	#12830.00	45.5 AV	68.2	-22.7	1.52 H	239	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.5 PK			2.47 V	265	60.6	45.9
2	*6415.00	96.3 AV			2.47 V	265	50.4	45.9
3	#12830.00	58.1 PK	88.2	-30.1	2.69 V	123	46.8	11.3
4	#12830.00	45.0 AV	68.2	-23.2	2.69 V	123	33.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.5 PK			2.04 H	206	62.6	45.9
2	*6435.00	98.3 AV			2.04 H	206	52.4	45.9
3	#12870.00	58.3 PK	88.2	-29.9	1.57 H	236	46.9	11.4
4	#12870.00	45.1 AV	68.2	-23.1	1.57 H	236	33.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.4 PK			2.53 V	274	60.5	45.9
2	*6435.00	96.1 AV			2.53 V	274	50.2	45.9
3	#12870.00	58.0 PK	88.2	-30.2	2.71 V	128	46.6	11.4
4	#12870.00	44.9 AV	68.2	-23.3	2.71 V	128	33.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.4 PK			1.86 H	207	62.2	46.2
2	*6475.00	98.3 AV			1.86 H	207	52.1	46.2
3	#12950.00	58.4 PK	88.2	-29.8	1.53 H	247	47.2	11.2
4	#12950.00	45.3 AV	68.2	-22.9	1.53 H	247	34.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	106.5 PK			2.57 V	266	60.3	46.2
2	*6475.00	96.4 AV			2.57 V	266	50.2	46.2
3	#12950.00	58.3 PK	88.2	-29.9	2.76 V	118	47.1	11.2
4	#12950.00	45.1 AV	68.2	-23.1	2.76 V	118	33.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.9 PK			1.93 H	205	62.5	46.4
2	*6515.00	98.7 AV			1.93 H	205	52.3	46.4
3	#13030.00	58.6 PK	88.2	-29.6	1.56 H	255	47.4	11.2
4	#13030.00	45.5 AV	68.2	-22.7	1.56 H	255	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.8 PK			2.56 V	282	60.4	46.4
2	*6515.00	96.7 AV			2.56 V	282	50.3	46.4
3	#13030.00	58.1 PK	88.2	-30.1	2.73 V	119	46.9	11.2
4	#13030.00	45.0 AV	68.2	-23.2	2.73 V	119	33.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			1.80 H	201	62.0	46.4
2	*6535.00	98.7 AV			1.80 H	201	52.3	46.4
3	#13070.00	58.7 PK	88.2	-29.5	1.50 H	244	47.2	11.5
4	#13070.00	45.7 AV	68.2	-22.5	1.50 H	244	34.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.8 PK			2.46 V	276	60.4	46.4
2	*6535.00	96.5 AV			2.46 V	276	50.1	46.4
3	#13070.00	58.3 PK	88.2	-29.9	2.69 V	126	46.8	11.5
4	#13070.00	45.2 AV	68.2	-23.0	2.69 V	126	33.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.8 PK			1.83 H	201	62.2	46.6
2	*6695.00	98.7 AV			1.83 H	201	52.1	46.6
3	13390.00	58.3 PK	74.0	-15.7	1.56 H	249	47.1	11.2
4	13390.00	45.5 AV	54.0	-8.5	1.56 H	249	34.3	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			2.54 V	278	60.2	46.6
2	*6695.00	96.5 AV			2.54 V	278	49.9	46.6
3	13390.00	58.0 PK	74.0	-16.0	2.67 V	108	46.8	11.2
4	13390.00	45.0 AV	54.0	-9.0	2.67 V	108	33.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.7 PK			1.99 H	211	62.6	47.1
2	*6855.00	99.7 AV			1.99 H	211	52.6	47.1
3	#13710.00	58.5 PK	88.2	-29.7	1.55 H	251	47.5	11.0
4	#13710.00	45.6 AV	68.2	-22.6	1.55 H	251	34.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.9 PK			2.56 V	273	60.8	47.1
2	*6855.00	97.6 AV			2.56 V	273	50.5	47.1
3	#13710.00	58.1 PK	88.2	-30.1	2.69 V	117	47.1	11.0
4	#13710.00	44.9 AV	68.2	-23.3	2.69 V	117	33.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.2 PK			2.01 H	208	62.1	47.1
2	*6875.00	99.4 AV			2.01 H	208	52.3	47.1
3	#13750.00	58.3 PK	88.2	-29.9	1.56 H	255	47.2	11.1
4	#13750.00	45.6 AV	68.2	-22.6	1.56 H	255	34.5	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.5 PK			2.56 V	283	60.4	47.1
2	*6875.00	97.4 AV			2.56 V	283	50.3	47.1
3	#13750.00	58.0 PK	88.2	-30.2	2.77 V	124	46.9	11.1
4	#13750.00	44.8 AV	68.2	-23.4	2.77 V	124	33.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.7 PK			2.00 H	217	62.6	47.1
2	*6995.00	99.6 AV			2.00 H	217	52.5	47.1
3	#13990.00	59.5 PK	88.2	-28.7	1.60 H	259	47.5	12.0
4	#13990.00	46.6 AV	68.2	-21.6	1.60 H	259	34.6	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.7 PK			2.47 V	279	60.6	47.1
2	*6995.00	97.4 AV			2.47 V	279	50.3	47.1
3	#13990.00	59.1 PK	88.2	-29.1	2.71 V	128	47.1	12.0
4	#13990.00	46.0 AV	68.2	-22.2	2.71 V	128	34.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.6 PK			2.04 H	207	60.0	47.6
2	*7115.00	97.7 AV			2.04 H	207	50.1	47.6
3	#7125.00	87.4 PK	88.2	-0.8	2.04 H	207	77.7	9.7
4	#7125.00	67.9 AV	68.2	-0.3	2.04 H	207	58.2	9.7
5	#14230.00	59.0 PK	88.2	-29.2	1.51 H	247	47.5	11.5
6	#14230.00	45.8 AV	68.2	-22.4	1.51 H	247	34.3	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.1 PK			2.65 V	94	59.5	47.6
2	*7115.00	97.0 AV			2.65 V	94	49.4	47.6
3	#7125.00	86.4 PK	88.2	-1.8	2.65 V	94	76.7	9.7
4	#7125.00	67.0 AV	68.2	-1.2	2.65 V	94	57.3	9.7
5	#14230.00	58.7 PK	88.2	-29.5	2.83 V	134	47.2	11.5
6	#14230.00	45.7 AV	68.2	-22.5	2.83 V	134	34.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.8 PK	88.2	-29.4	3.19 H	22	52.9	5.9
2	#5925.00	44.7 AV	68.2	-23.5	3.19 H	22	38.8	5.9
3	*5955.00	111.3 PK			3.19 H	22	67.9	43.4
4	*5955.00	98.2 AV			3.19 H	22	54.8	43.4
5	11910.00	59.7 PK	74.0	-14.3	1.53 H	231	48.3	11.4
6	11910.00	46.7 AV	54.0	-7.3	1.53 H	231	35.3	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.2 PK	88.2	-30.0	2.47 V	268	52.3	5.9
2	#5925.00	44.1 AV	68.2	-24.1	2.47 V	268	38.2	5.9
3	*5955.00	109.2 PK			2.47 V	268	65.8	43.4
4	*5955.00	96.0 AV			2.47 V	268	52.6	43.4
5	11910.00	59.0 PK	74.0	-15.0	2.79 V	126	47.6	11.4
6	11910.00	46.0 AV	54.0	-8.0	2.79 V	126	34.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.6 PK			2.19 H	206	67.1	44.5
2	*6175.00	98.7 AV			2.19 H	206	54.2	44.5
3	12350.00	58.8 PK	74.0	-15.2	1.38 H	226	47.6	11.2
4	12350.00	45.6 AV	54.0	-8.4	1.38 H	226	34.4	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.3 PK			2.43 V	278	64.8	44.5
2	*6175.00	96.4 AV			2.43 V	278	51.9	44.5
3	12350.00	58.4 PK	74.0	-15.6	2.71 V	116	47.2	11.2
4	12350.00	45.4 AV	54.0	-8.6	2.71 V	116	34.2	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.6 PK			1.91 H	205	65.7	45.9
2	*6415.00	98.3 AV			1.91 H	205	52.4	45.9
3	#12830.00	58.8 PK	88.2	-29.4	1.42 H	236	47.5	11.3
4	#12830.00	45.6 AV	68.2	-22.6	1.42 H	236	34.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.3 PK			2.47 V	271	63.4	45.9
2	*6415.00	96.2 AV			2.47 V	271	50.3	45.9
3	#12830.00	58.2 PK	88.2	-30.0	2.79 V	107	46.9	11.3
4	#12830.00	45.2 AV	68.2	-23.0	2.79 V	107	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.7 PK			2.05 H	203	65.8	45.9
2	*6435.00	98.4 AV			2.05 H	203	52.5	45.9
3	#12870.00	58.9 PK	88.2	-29.3	1.42 H	235	47.5	11.4
4	#12870.00	45.8 AV	68.2	-22.4	1.42 H	235	34.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.6 PK			2.43 V	277	63.7	45.9
2	*6435.00	96.3 AV			2.43 V	277	50.4	45.9
3	#12870.00	58.5 PK	88.2	-29.7	2.68 V	125	47.1	11.4
4	#12870.00	45.3 AV	68.2	-22.9	2.68 V	125	33.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.9 PK			2.06 H	203	64.7	46.2
2	*6475.00	97.9 AV			2.06 H	203	51.7	46.2
3	#12950.00	58.8 PK	88.2	-29.4	1.46 H	234	47.6	11.2
4	#12950.00	45.6 AV	68.2	-22.6	1.46 H	234	34.4	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.1 PK			2.41 V	283	62.9	46.2
2	*6475.00	95.9 AV			2.41 V	283	49.7	46.2
3	#12950.00	58.2 PK	88.2	-30.0	2.71 V	105	47.0	11.2
4	#12950.00	45.1 AV	68.2	-23.1	2.71 V	105	33.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.3 PK			2.00 H	201	64.9	46.4
2	*6515.00	98.2 AV			2.00 H	201	51.8	46.4
3	#13030.00	58.6 PK	88.2	-29.6	1.52 H	237	47.4	11.2
4	#13030.00	45.4 AV	68.2	-22.8	1.52 H	237	34.2	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.2 PK			2.53 V	284	62.8	46.4
2	*6515.00	96.2 AV			2.53 V	284	49.8	46.4
3	#13030.00	58.1 PK	88.2	-30.1	2.82 V	104	46.9	11.2
4	#13030.00	45.0 AV	68.2	-23.2	2.82 V	104	33.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.7 PK			2.03 H	206	65.3	46.4
2	*6535.00	97.4 AV			2.03 H	206	51.0	46.4
3	#13070.00	59.1 PK	88.2	-29.1	1.40 H	222	47.6	11.5
4	#13070.00	46.0 AV	68.2	-22.2	1.40 H	222	34.5	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.7 PK			2.54 V	281	62.3	46.4
2	*6535.00	95.5 AV			2.54 V	281	49.1	46.4
3	#13070.00	58.7 PK	88.2	-29.5	2.82 V	126	47.2	11.5
4	#13070.00	45.7 AV	68.2	-22.5	2.82 V	126	34.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.2 PK			2.01 H	204	65.6	46.6
2	*6695.00	98.1 AV			2.03 H	204	51.5	46.6
3	13390.00	58.8 PK	74.0	-15.2	1.40 H	222	47.6	11.2
4	13390.00	45.7 AV	54.0	-8.3	1.40 H	222	34.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.0 PK			2.51 V	287	63.4	46.6
2	*6695.00	96.3 AV			2.51 V	287	49.7	46.6
3	13390.00	58.4 PK	74.0	-15.6	2.79 V	117	47.2	11.2
4	13390.00	45.5 AV	54.0	-8.5	2.79 V	117	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.1 PK			1.99 H	211	65.0	47.1
2	*6855.00	98.9 AV			1.99 H	211	51.8	47.1
3	#13710.00	58.5 PK	88.2	-29.7	1.41 H	208	47.5	11.0
4	#13710.00	45.5 AV	68.2	-22.7	1.41 H	208	34.5	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.3 PK			2.43 V	273	63.2	47.1
2	*6855.00	97.0 AV			2.43 V	273	49.9	47.1
3	#13710.00	57.9 PK	88.2	-30.3	2.69 V	117	46.9	11.0
4	#13710.00	44.8 AV	68.2	-23.4	2.69 V	117	33.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.5 PK			2.00 H	213	64.4	47.1
2	*6875.00	98.1 AV			2.00 H	213	51.0	47.1
3	#13750.00	58.3 PK	88.2	-29.9	1.52 H	207	47.2	11.1
4	#13750.00	45.4 AV	68.2	-22.8	1.52 H	207	34.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.6 PK			2.57 V	284	62.5	47.1
2	*6875.00	96.4 AV			2.57 V	284	49.3	47.1
3	#13750.00	57.8 PK	88.2	-30.4	2.83 V	125	46.7	11.1
4	#13750.00	44.7 AV	68.2	-23.5	2.83 V	125	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.8 PK			1.93 H	206	65.7	47.1
2	*6995.00	99.4 AV			1.93 H	206	52.3	47.1
3	#13990.00	59.6 PK	88.2	-28.6	1.55 H	200	47.6	12.0
4	#13990.00	46.7 AV	68.2	-21.5	1.55 H	200	34.7	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.7 PK			2.52 V	267	63.6	47.1
2	*6995.00	97.4 AV			2.52 V	267	50.3	47.1
3	#13990.00	59.2 PK	88.2	-29.0	2.81 V	113	47.2	12.0
4	#13990.00	46.1 AV	68.2	-22.1	2.81 V	113	34.1	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.5 PK			2.56 H	212	58.9	47.6
2	*7115.00	94.0 AV			2.56 H	212	46.4	47.6
3	#7125.00	78.6 PK	88.2	-9.6	2.56 H	212	68.9	9.7
4	#7125.00	68.1 AV	68.2	-0.1	2.56 H	212	58.4	9.7
5	#14230.00	58.8 PK	88.2	-29.4	1.51 H	208	47.3	11.5
6	#14230.00	46.0 AV	68.2	-22.2	1.51 H	208	34.5	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.1 PK			2.21 V	93	58.5	47.6
2	*7115.00	93.5 AV			2.21 V	93	45.9	47.6
3	#7125.00	77.3 PK	88.2	-10.9	2.21 V	93	67.6	9.7
4	#7125.00	65.5 AV	68.2	-2.7	2.21 V	93	55.8	9.7
5	#14230.00	58.3 PK	88.2	-29.9	2.71 V	123	46.8	11.5
6	#14230.00	45.2 AV	68.2	-23.0	2.71 V	123	33.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.8 PK	88.2	-29.4	2.50 H	200	52.9	5.9
2	#5925.00	44.6 AV	68.2	-23.6	2.50 H	200	38.7	5.9
3	*5965.00	111.3 PK			2.50 H	200	67.9	43.4
4	*5965.00	98.3 AV			2.50 H	200	54.9	43.4
5	11930.00	58.3 PK	74.0	-15.7	1.32 H	224	46.8	11.5
6	11930.00	45.2 AV	54.0	-8.8	1.32 H	224	33.7	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.1 PK	88.2	-30.1	2.43 V	212	52.2	5.9
2	#5925.00	44.0 AV	68.2	-24.2	2.43 V	212	38.1	5.9
3	*5965.00	108.9 PK			2.43 V	212	65.5	43.4
4	*5965.00	96.0 AV			2.43 V	212	52.6	43.4
5	11930.00	58.0 PK	74.0	-16.0	2.83 V	124	46.5	11.5
6	11930.00	44.9 AV	54.0	-9.1	2.83 V	124	33.4	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	111.3 PK			2.16 H	203	66.9	44.4
2	*6165.00	98.2 AV			2.16 H	203	53.8	44.4
3	12330.00	58.4 PK	74.0	-15.6	1.43 H	238	47.2	11.2
4	12330.00	45.4 AV	54.0	-8.6	1.43 H	238	34.2	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.0 PK			2.48 V	204	64.6	44.4
2	*6165.00	96.0 AV			2.48 V	204	51.6	44.4
3	12330.00	58.0 PK	74.0	-16.0	2.81 V	126	46.8	11.2
4	12330.00	44.9 AV	54.0	-9.1	2.81 V	126	33.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.7 PK			2.07 H	201	65.9	45.8
2	*6405.00	98.5 AV			2.07 H	201	52.7	45.8
3	#12810.00	58.6 PK	88.2	-29.6	1.46 H	221	47.3	11.3
4	#12810.00	45.5 AV	68.2	-22.7	1.46 H	221	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.3 PK			2.53 V	197	63.5	45.8
2	*6405.00	96.1 AV			2.53 V	197	50.3	45.8
3	#12810.00	58.2 PK	88.2	-30.0	2.83 V	125	46.9	11.3
4	#12810.00	45.2 AV	68.2	-23.0	2.83 V	125	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.7 PK			1.80 H	204	65.7	46.0
2	*6445.00	98.6 AV			1.80 H	204	52.6	46.0
3	#12890.00	58.8 PK	88.2	-29.4	1.31 H	219	47.4	11.4
4	#12890.00	45.7 AV	68.2	-22.5	1.31 H	219	34.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.4 PK			2.57 V	228	63.4	46.0
2	*6445.00	96.3 AV			2.57 V	228	50.3	46.0
3	#12890.00	58.2 PK	88.2	-30.0	2.87 V	114	46.8	11.4
4	#12890.00	45.1 AV	68.2	-23.1	2.87 V	114	33.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.8 PK			1.80 H	204	65.5	46.3
2	*6485.00	98.5 AV			1.80 H	204	52.2	46.3
3	#12970.00	58.7 PK	88.2	-29.5	1.52 H	232	47.6	11.1
4	#12970.00	45.5 AV	68.2	-22.7	1.52 H	232	34.4	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.6 PK			2.53 V	221	63.3	46.3
2	*6485.00	96.4 AV			2.53 V	221	50.1	46.3
3	#12970.00	58.2 PK	88.2	-30.0	2.79 V	122	47.1	11.1
4	#12970.00	45.1 AV	68.2	-23.1	2.79 V	122	34.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.0 PK			1.94 H	203	64.6	46.4
2	*6525.00	98.2 AV			1.94 H	203	51.8	46.4
3	#13050.00	58.7 PK	88.2	-29.5	1.41 H	229	47.4	11.3
4	#13050.00	45.6 AV	68.2	-22.6	1.41 H	229	34.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.9 PK			2.58 V	234	62.5	46.4
2	*6525.00	96.0 AV			2.58 V	234	49.6	46.4
3	#13050.00	58.1 PK	88.2	-30.1	2.89 V	132	46.8	11.3
4	#13050.00	45.1 AV	68.2	-23.1	2.89 V	132	33.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.3 PK			1.78 H	204	64.8	46.5
2	*6565.00	98.1 AV			1.78 H	204	51.6	46.5
3	#13130.00	59.1 PK	88.2	-29.1	N/A H	N/A	47.6	11.5
4	#13130.00	46.0 AV	68.2	-22.2	N/A H	N/A	34.5	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.2 PK			2.45 V	193	62.7	46.5
2	*6565.00	96.1 AV			2.45 V	193	49.6	46.5
3	#13130.00	58.6 PK	88.2	-29.6	2.71 V	120	47.1	11.5
4	#13130.00	45.5 AV	68.2	-22.7	2.71 V	120	34.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.5 PK			2.31 H	204	64.8	46.7
2	*6725.00	98.4 AV			2.31 H	204	51.7	46.7
3	#13450.00	58.4 PK	88.2	-29.8	1.42 H	224	47.3	11.1
4	#13450.00	45.2 AV	68.2	-23.0	1.42 H	224	34.1	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.6 PK			2.55 V	201	62.9	46.7
2	*6725.00	96.6 AV			2.55 V	201	49.9	46.7
3	#13450.00	57.8 PK	88.2	-30.4	2.88 V	121	46.7	11.1
4	#13450.00	44.9 AV	68.2	-23.3	2.88 V	121	33.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.5 PK			2.28 H	205	64.5	47.0
2	*6845.00	98.2 AV			2.28 H	205	51.2	47.0
3	#13690.00	58.5 PK	88.2	-29.7	1.44 H	237	47.5	11.0
4	#13690.00	45.3 AV	68.2	-22.9	1.44 H	237	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.6 PK			2.42 V	193	62.6	47.0
2	*6845.00	96.4 AV			2.42 V	193	49.4	47.0
3	#13690.00	58.1 PK	88.2	-30.1	2.76 V	113	47.1	11.0
4	#13690.00	44.9 AV	68.2	-23.3	2.76 V	113	33.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.4 PK			2.26 H	204	64.3	47.1
2	*6885.00	98.1 AV			2.26 H	204	51.0	47.1
3	#13770.00	58.4 PK	88.2	-29.8	1.35 H	226	47.3	11.1
4	#13770.00	45.2 AV	68.2	-23.0	1.35 H	226	34.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.7 PK			2.34 V	107	62.6	47.1
2	*6885.00	96.4 AV			2.34 V	107	49.3	47.1
3	#13770.00	57.9 PK	88.2	-30.3	2.81 V	127	46.8	11.1
4	#13770.00	44.7 AV	68.2	-23.5	2.81 V	127	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.8 PK			2.09 H	207	64.7	47.1
2	*7005.00	98.4 AV			2.09 H	207	51.3	47.1
3	#14010.00	59.3 PK	88.2	-28.9	1.41 H	223	47.3	12.0
4	#14010.00	46.1 AV	68.2	-22.1	1.41 H	223	34.1	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.2 PK			2.21 V	98	64.1	47.1
2	*7005.00	96.9 AV			2.21 V	98	49.8	47.1
3	#14010.00	58.7 PK	88.2	-29.5	2.83 V	132	46.7	12.0
4	#14010.00	45.5 AV	68.2	-22.7	2.83 V	132	33.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.4 PK			2.11 H	206	63.8	47.6
2	*7085.00	98.2 AV			2.11 H	206	50.6	47.6
3	#7125.00	62.0 PK	88.2	-26.2	2.11 H	206	52.3	9.7
4	#7125.00	48.8 AV	68.2	-19.4	2.11 H	206	39.1	9.7
5	#14170.00	58.7 PK	88.2	-29.5	1.44 H	231	47.1	11.6
6	#14170.00	45.5 AV	68.2	-22.7	1.44 H	231	33.9	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.4 PK			2.13 V	94	62.8	47.6
2	*7085.00	97.3 AV			2.13 V	94	49.7	47.6
3	#7125.00	61.3 PK	88.2	-26.9	2.13 V	94	51.6	9.7
4	#7125.00	48.0 AV	68.2	-20.2	2.13 V	94	38.3	9.7
5	#14170.00	58.2 PK	88.2	-30.0	2.85 V	129	46.6	11.6
6	#14170.00	45.2 AV	68.2	-23.0	2.85 V	129	33.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.2 PK	88.2	-28.0	2.13 H	205	54.3	5.9
2	#5925.00	47.4 AV	68.2	-20.8	2.13 H	205	41.5	5.9
3	*5985.00	111.5 PK			2.13 H	205	68.1	43.4
4	*5985.00	98.2 AV			2.13 H	205	54.8	43.4
5	11970.00	58.5 PK	74.0	-15.5	1.47 H	238	47.2	11.3
6	11970.00	45.2 AV	54.0	-8.8	1.47 H	238	33.9	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.5 PK	88.2	-28.7	2.47 V	253	53.6	5.9
2	#5925.00	46.1 AV	68.2	-22.1	2.47 V	253	40.2	5.9
3	*5985.00	109.1 PK			2.47 V	253	65.7	43.4
4	*5985.00	95.9 AV			2.47 V	253	52.5	43.4
5	11970.00	58.0 PK	74.0	-16.0	2.71 V	106	46.7	11.3
6	11970.00	44.9 AV	54.0	-9.1	2.71 V	106	33.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	111.5 PK			2.11 H	202	67.3	44.2
2	*6145.00	98.4 AV			2.11 H	202	54.2	44.2
3	12290.00	58.2 PK	74.0	-15.8	1.44 H	233	47.1	11.1
4	12290.00	44.9 AV	54.0	-9.1	1.44 H	233	33.8	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.4 PK			2.53 V	267	65.2	44.2
2	*6145.00	96.2 AV			2.53 V	267	52.0	44.2
3	12290.00	57.6 PK	74.0	-16.4	2.82 V	107	46.5	11.1
4	12290.00	44.5 AV	54.0	-9.5	2.82 V	107	33.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.6 PK			1.97 H	202	65.9	45.7
2	*6385.00	98.4 AV			1.97 H	202	52.7	45.7
3	#12770.00	58.3 PK	88.2	-29.9	1.53 H	227	46.9	11.4
4	#12770.00	45.1 AV	68.2	-23.1	1.53 H	227	33.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.3 PK			2.51 V	229	63.6	45.7
2	*6385.00	96.2 AV			2.51 V	229	50.5	45.7
3	#12770.00	57.9 PK	88.2	-30.3	2.77 V	105	46.5	11.4
4	#12770.00	44.8 AV	68.2	-23.4	2.77 V	105	33.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.9 PK			1.93 H	203	65.7	46.2
2	*6465.00	98.6 AV			1.93 H	203	52.4	46.2
3	#12930.00	58.2 PK	88.2	-30.0	1.31 H	236	46.9	11.3
4	#12930.00	45.1 AV	68.2	-23.1	1.31 H	236	33.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.8 PK			2.38 V	224	63.6	46.2
2	*6465.00	96.6 AV			2.38 V	224	50.4	46.2
3	#12930.00	57.7 PK	88.2	-30.5	2.81 V	115	46.4	11.3
4	#12930.00	44.7 AV	68.2	-23.5	2.81 V	115	33.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.6 PK			1.92 H	205	65.2	46.4
2	*6545.00	98.4 AV			1.92 H	205	52.0	46.4
3	#13090.00	58.4 PK	88.2	-29.8	1.48 H	236	46.8	11.6
4	#13090.00	45.4 AV	68.2	-22.8	1.48 H	236	33.8	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.7 PK			2.34 V	216	63.3	46.4
2	*6545.00	96.5 AV			2.34 V	216	50.1	46.4
3	#13090.00	58.1 PK	88.2	-30.1	2.87 V	116	46.5	11.6
4	#13090.00	45.0 AV	68.2	-23.2	2.87 V	116	33.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.8 PK			1.73 H	206	65.1	46.7
2	*6705.00	98.5 AV			1.73 H	206	51.8	46.7
3	#13410.00	58.4 PK	88.2	-29.8	1.48 H	232	47.1	11.3
4	#13410.00	45.1 AV	68.2	-23.1	1.48 H	232	33.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			2.26 V	191	64.2	46.7
2	*6705.00	96.6 AV			2.26 V	191	49.9	46.7
3	#13410.00	57.9 PK	88.2	-30.3	2.87 V	112	46.6	11.3
4	#13410.00	44.8 AV	68.2	-23.4	2.87 V	112	33.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.9 PK			2.32 H	206	64.8	47.1
2	*6865.00	98.5 AV			2.32 H	206	51.4	47.1
3	#13730.00	58.0 PK	88.2	-30.2	1.45 H	230	46.9	11.1
4	#13730.00	44.9 AV	68.2	-23.3	1.45 H	230	33.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.1 PK			2.24 V	191	63.0	47.1
2	*6865.00	96.9 AV			2.24 V	191	49.8	47.1
3	#13730.00	57.6 PK	88.2	-30.6	2.86 V	115	46.5	11.1
4	#13730.00	44.6 AV	68.2	-23.6	2.86 V	115	33.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.5 PK			2.21 H	205	64.3	47.2
2	*6945.00	98.1 AV			2.21 H	205	50.9	47.2
3	#13890.00	58.5 PK	88.2	-29.7	1.46 H	239	46.8	11.7
4	#13890.00	45.5 AV	68.2	-22.7	1.46 H	239	33.8	11.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.9 PK			2.27 V	103	62.7	47.2
2	*6945.00	96.6 AV			2.27 V	103	49.4	47.2
3	#13890.00	58.1 PK	88.2	-30.1	2.77 V	118	46.4	11.7
4	#13890.00	45.0 AV	68.2	-23.2	2.77 V	118	33.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.8 PK			2.12 H	207	64.5	47.3
2	*7025.00	98.6 AV			2.12 H	207	51.3	47.3
3	#7125.00	61.2 PK	88.2	-27.0	2.12 H	207	51.5	9.7
4	#7125.00	48.0 AV	68.2	-20.2	2.12 H	207	38.3	9.7
5	#14050.00	58.5 PK	88.2	-29.7	1.48 H	233	46.7	11.8
6	#14050.00	45.5 AV	68.2	-22.7	1.48 H	233	33.7	11.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.4 PK			2.23 V	97	63.1	47.3
2	*7025.00	97.2 AV			2.23 V	97	49.9	47.3
3	#7125.00	60.6 PK	88.2	-27.6	2.23 V	97	50.9	9.7
4	#7125.00	47.5 AV	68.2	-20.7	2.23 V	97	37.8	9.7
5	#14050.00	58.2 PK	88.2	-30.0	2.89 V	122	46.4	11.8
6	#14050.00	45.2 AV	68.2	-23.0	2.89 V	122	33.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.2 PK	88.2	-22.0	2.00 H	203	60.3	5.9
2	#5925.00	51.6 AV	68.2	-16.6	2.00 H	203	45.7	5.9
3	*6025.00	110.8 PK			2.00 H	203	67.2	43.6
4	*6025.00	98.9 AV			2.00 H	203	55.3	43.6
5	12050.00	59.7 PK	74.0	-14.3	1.47 H	238	48.3	11.4
6	12050.00	46.7 AV	54.0	-7.3	1.47 H	238	35.3	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.5 PK	88.2	-23.7	2.47 V	219	58.6	5.9
2	#5925.00	49.8 AV	68.2	-18.4	2.47 V	219	43.9	5.9
3	*6025.00	109.0 PK			2.47 V	219	65.4	43.6
4	*6025.00	97.0 AV			2.47 V	219	53.4	43.6
5	12050.00	59.0 PK	74.0	-15.0	2.79 V	117	47.6	11.4
6	12050.00	46.2 AV	54.0	-7.8	2.79 V	117	34.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.3 PK			2.09 H	205	66.8	44.5
2	*6185.00	98.5 AV			2.09 H	205	54.0	44.5
3	12370.00	58.6 PK	74.0	-15.4	1.47 H	235	47.5	11.1
4	12370.00	45.1 AV	54.0	-8.9	1.47 H	235	34.0	11.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.4 PK			2.42 V	211	64.9	44.5
2	*6185.00	96.8 AV			2.42 V	211	52.3	44.5
3	12370.00	58.2 PK	74.0	-15.8	2.67 V	123	47.1	11.1
4	12370.00	44.7 AV	54.0	-9.3	2.67 V	123	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.2 PK			1.86 H	203	65.7	45.5
2	*6345.00	98.2 AV			1.86 H	203	52.7	45.5
3	12690.00	58.7 PK	74.0	-15.3	1.50 H	238	47.3	11.4
4	12690.00	45.3 AV	54.0	-8.7	1.50 H	238	33.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.3 PK			2.37 V	226	63.8	45.5
2	*6345.00	96.4 AV			2.37 V	226	50.9	45.5
3	12690.00	58.2 PK	74.0	-15.8	2.71 V	109	46.8	11.4
4	12690.00	45.0 AV	54.0	-9.0	2.71 V	109	33.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.2 PK			1.91 H	205	64.8	46.4
2	*6505.00	98.2 AV			1.91 H	205	51.8	46.4
3	#13010.00	58.7 PK	88.2	-29.5	1.53 H	238	47.7	11.0
4	#13010.00	45.2 AV	68.2	-23.0	1.53 H	238	34.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.6 PK			2.53 V	214	63.2	46.4
2	*6505.00	96.5 AV			2.53 V	214	50.1	46.4
3	#13010.00	58.2 PK	88.2	-30.0	2.82 V	124	47.2	11.0
4	#13010.00	44.8 AV	68.2	-23.4	2.82 V	124	33.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.5 PK			2.54 H	206	64.9	46.6
2	*6665.00	98.4 AV			2.54 H	206	51.8	46.6
3	13330.00	59.2 PK	74.0	-14.8	1.52 H	231	47.8	11.4
4	13330.00	46.0 AV	54.0	-8.0	1.52 H	231	34.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.7 PK			2.46 V	229	63.1	46.6
2	*6665.00	96.8 AV			2.46 V	229	50.2	46.6
3	13330.00	58.5 PK	74.0	-15.5	2.73 V	115	47.1	11.4
4	13330.00	45.2 AV	54.0	-8.8	2.73 V	115	33.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.8 PK			2.44 H	206	64.9	46.9
2	*6825.00	98.2 AV			2.44 H	206	51.3	46.9
3	#13650.00	58.7 PK	88.2	-29.5	1.51 H	229	47.8	10.9
4	#13650.00	45.5 AV	68.2	-22.7	1.51 H	229	34.6	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.7 PK			2.56 V	218	62.8	46.9
2	*6825.00	96.6 AV			2.56 V	218	49.7	46.9
3	#13650.00	58.1 PK	88.2	-30.1	2.84 V	127	47.2	10.9
4	#13650.00	45.0 AV	68.2	-23.2	2.84 V	127	34.1	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.8 PK			2.04 H	205	64.6	47.2
2	*6985.00	98.2 AV			2.04 H	205	51.0	47.2
3	#7125.00	62.1 PK	88.2	-26.1	2.04 H	205	52.4	9.7
4	#7125.00	48.5 AV	68.2	-19.7	2.04 H	205	38.8	9.7
5	#13970.00	59.9 PK	88.2	-28.3	1.60 H	222	48.0	11.9
6	#13970.00	46.9 AV	68.2	-21.3	1.60 H	222	35.0	11.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.3 PK			2.52 V	216	63.1	47.2
2	*6985.00	97.0 AV			2.52 V	216	49.8	47.2
3	#7125.00	61.8 PK	88.2	-26.4	2.52 V	216	52.1	9.7
4	#7125.00	48.1 AV	68.2	-20.1	2.52 V	216	38.4	9.7
5	#13970.00	59.5 PK	88.2	-28.7	2.77 V	121	47.6	11.9
6	#13970.00	46.5 AV	68.2	-21.7	2.77 V	121	34.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.2 PK	68.2	-3.0	2.03 H	205	59.3	5.9
2	#5925.00	52.0 AV	54.0	-2.0	2.03 H	205	46.1	5.9
3	*6105.00	110.4 PK			2.03 H	205	66.4	44.0
4	*6105.00	98.4 AV			2.03 H	205	54.4	44.0
5	12210.00	58.0 PK	74.0	-16.0	1.55 H	233	47.0	11.0
6	12210.00	44.7 AV	54.0	-9.3	1.55 H	233	33.7	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	2.43 V	217	57.4	5.9
2	#5925.00	50.2 AV	68.2	-18.0	2.43 V	217	44.3	5.9
3	*6105.00	108.6 PK			2.43 V	217	64.6	44.0
4	*6105.00	96.3 AV			2.43 V	217	52.3	44.0
5	12210.00	57.7 PK	74.0	-16.3	2.68 V	106	46.7	11.0
6	12210.00	44.5 AV	54.0	-9.5	2.68 V	106	33.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.6 PK			2.01 H	205	66.6	45.0
2	*6265.00	98.1 AV			2.01 H	205	53.1	45.0
3	12530.00	59.0 PK	74.0	-15.0	1.56 H	255	47.4	11.6
4	12530.00	45.9 AV	54.0	-8.1	1.56 H	255	34.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	109.4 PK			2.57 V	232	64.4	45.0
2	*6265.00	96.2 AV			2.57 V	232	51.2	45.0
3	12530.00	58.5 PK	74.0	-15.5	2.83 V	124	46.9	11.6
4	12530.00	45.4 AV	54.0	-8.6	2.83 V	124	33.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.0 PK			2.02 H	204	65.1	45.9
2	*6425.00	98.2 AV			2.02 H	204	52.3	45.9
3	#12850.00	58.8 PK	88.2	-29.4	1.53 H	254	47.4	11.4
4	#12850.00	45.8 AV	68.2	-22.4	1.53 H	254	34.4	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.6 PK			2.46 V	204	62.7	45.9
2	*6425.00	95.7 AV			2.46 V	204	49.8	45.9
3	#12850.00	58.1 PK	88.2	-30.1	2.73 V	118	46.7	11.4
4	#12850.00	44.9 AV	68.2	-23.3	2.73 V	118	33.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.5 PK			1.94 H	206	65.0	46.5
2	*6585.00	98.5 AV			1.94 H	206	52.0	46.5
3	#13170.00	58.7 PK	88.2	-29.5	1.45 H	248	47.4	11.3
4	#13170.00	45.5 AV	68.2	-22.7	1.45 H	248	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	109.9 PK			2.51 V	221	63.4	46.5
2	*6585.00	96.7 AV			2.51 V	221	50.2	46.5
3	#13170.00	58.1 PK	88.2	-30.1	2.87 V	125	46.8	11.3
4	#13170.00	45.0 AV	68.2	-23.2	2.87 V	125	33.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.1 PK			1.86 H	203	64.4	46.7
2	*6745.00	98.9 AV			1.86 H	203	52.2	46.7
3	#13490.00	58.3 PK	88.2	-29.9	1.49 H	252	47.3	11.0
4	#13490.00	45.7 AV	68.2	-22.5	1.49 H	252	34.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.8 PK			2.46 V	212	63.1	46.7
2	*6745.00	97.2 AV			2.46 V	212	50.5	46.7
3	#13490.00	57.7 PK	88.2	-30.5	2.79 V	113	46.7	11.0
4	#13490.00	44.5 AV	68.2	-23.7	2.79 V	113	33.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	111.7 PK			1.86 H	203	64.6	47.1
2	*6905.00	99.4 AV			1.86 H	203	52.3	47.1
3	#7125.00	67.7 PK	88.2	-20.5	1.94 H	206	58.0	9.7
4	#7125.00	52.5 AV	68.2	-15.7	1.94 H	206	42.8	9.7
5	7250.00	64.3 PK	74.0	-9.7	1.94 H	206	54.5	9.8
6	7250.00	51.8 AV	54.0	-2.2	1.94 H	206	42.0	9.8
7	#13810.00	59.1 PK	88.2	-29.1	1.51 H	253	48.0	11.1
8	#13810.00	46.2 AV	68.2	-22.0	1.51 H	253	35.1	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.4 PK			2.49 V	218	63.3	47.1
2	*6905.00	98.0 AV			2.49 V	218	50.9	47.1
3	#7125.00	66.4 PK	88.2	-21.8	2.49 V	218	56.7	9.7
4	#7125.00	51.0 AV	68.2	-17.2	2.49 V	218	41.3	9.7
5	7250.00	63.4 PK	74.0	-10.6	2.49 V	218	53.6	9.8
6	7250.00	50.5 AV	54.0	-3.5	2.49 V	218	40.7	9.8
7	#13810.00	58.5 PK	88.2	-29.7	2.79 V	112	47.4	11.1
8	#13810.00	45.9 AV	68.2	-22.3	2.79 V	112	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Beamforming

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	2.62 H	229	51.0	5.9
2	#5925.00	43.7 AV	68.2	-24.5	2.62 H	229	37.8	5.9
3	*5955.00	110.2 PK			2.62 H	229	66.8	43.4
4	*5955.00	98.0 AV			2.62 H	229	54.6	43.4
5	11910.00	59.3 PK	74.0	-14.7	1.50 H	233	47.9	11.4
6	11910.00	46.1 AV	54.0	-7.9	1.50 H	233	34.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.5 PK	88.2	-31.7	1.47 V	81	50.6	5.9
2	#5925.00	43.3 AV	68.2	-24.9	1.47 V	81	37.4	5.9
3	*5955.00	109.2 PK			1.47 V	81	65.8	43.4
4	*5955.00	96.9 AV			1.47 V	81	53.5	43.4
5	11910.00	58.7 PK	74.0	-15.3	2.97 V	136	47.3	11.4
6	11910.00	45.7 AV	54.0	-8.3	2.97 V	136	34.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.5 PK			2.61 H	216	65.0	44.5
2	*6175.00	98.4 AV			2.61 H	216	53.9	44.5
3	12350.00	57.8 PK	74.0	-16.2	1.47 H	240	46.6	11.2
4	12350.00	44.9 AV	54.0	-9.1	1.47 H	240	33.7	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.3 PK			1.20 V	147	64.8	44.5
2	*6175.00	97.2 AV			1.20 V	147	52.7	44.5
3	12350.00	57.7 PK	74.0	-16.3	2.94 V	141	46.5	11.2
4	12350.00	44.6 AV	54.0	-9.4	2.94 V	141	33.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.9 PK			2.59 H	216	65.0	45.9
2	*6415.00	98.8 AV			2.59 H	216	52.9	45.9
3	#12830.00	58.3 PK	88.2	-29.9	1.44 H	248	47.0	11.3
4	#12830.00	44.8 AV	68.2	-23.4	1.44 H	248	33.5	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.1 PK			1.47 V	129	64.2	45.9
2	*6415.00	97.7 AV			1.47 V	129	51.8	45.9
3	#12830.00	57.8 PK	88.2	-30.4	2.98 V	135	46.5	11.3
4	#12830.00	44.6 AV	68.2	-23.6	2.98 V	135	33.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.2 PK			2.55 H	220	64.3	45.9
2	*6435.00	98.3 AV			2.55 H	220	52.4	45.9
3	#12870.00	58.2 PK	88.2	-30.0	1.51 H	233	46.8	11.4
4	#12870.00	44.7 AV	68.2	-23.5	1.51 H	233	33.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.5 PK			2.25 V	216	63.6	45.9
2	*6435.00	97.7 AV			2.25 V	216	51.8	45.9
3	#12870.00	57.7 PK	88.2	-30.5	2.93 V	146	46.3	11.4
4	#12870.00	44.6 AV	68.2	-23.6	2.93 V	146	33.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.1 PK			2.64 H	217	64.9	46.2
2	*6475.00	99.2 AV			2.64 H	217	53.0	46.2
3	#12950.00	57.8 PK	88.2	-30.4	1.44 H	239	46.6	11.2
4	#12950.00	45.0 AV	68.2	-23.2	1.44 H	239	33.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.3 PK			2.21 V	213	64.1	46.2
2	*6475.00	98.4 AV			2.21 V	213	52.2	46.2
3	#12950.00	57.6 PK	88.2	-30.6	3.03 V	139	46.4	11.2
4	#12950.00	44.7 AV	68.2	-23.5	3.03 V	139	33.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.4 PK			2.64 H	217	65.0	46.4
2	*6515.00	98.9 AV			2.64 H	217	52.5	46.4
3	#13030.00	58.0 PK	88.2	-30.2	1.50 H	231	46.8	11.2
4	#13030.00	45.1 AV	68.2	-23.1	1.50 H	231	33.9	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.7 PK			2.16 V	223	64.3	46.4
2	*6515.00	98.2 AV			2.16 V	223	51.8	46.4
3	#13030.00	57.6 PK	88.2	-30.6	2.93 V	132	46.4	11.2
4	#13030.00	44.5 AV	68.2	-23.7	2.93 V	132	33.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.8 PK			2.69 H	213	63.4	46.4
2	*6535.00	99.5 AV			2.69 H	213	53.1	46.4
3	#13070.00	58.4 PK	88.2	-29.8	1.47 H	230	46.9	11.5
4	#13070.00	45.5 AV	68.2	-22.7	1.47 H	230	34.0	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.3 PK			2.07 V	196	62.9	46.4
2	*6535.00	99.2 AV			2.07 V	196	52.8	46.4
3	#13070.00	58.2 PK	88.2	-30.0	3.07 V	139	46.7	11.5
4	#13070.00	45.2 AV	68.2	-23.0	3.07 V	139	33.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.4 PK			2.08 H	203	63.8	46.6
2	*6695.00	98.6 AV			2.08 H	203	52.0	46.6
3	13390.00	57.7 PK	74.0	-16.3	1.51 H	232	46.5	11.2
4	13390.00	45.2 AV	54.0	-8.8	1.51 H	232	34.0	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.8 PK			2.09 V	191	63.2	46.6
2	*6695.00	98.0 AV			2.09 V	191	51.4	46.6
3	13390.00	57.5 PK	74.0	-16.5	3.06 V	133	46.3	11.2
4	13390.00	44.6 AV	54.0	-9.4	3.06 V	133	33.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.1 PK			2.15 H	198	64.0	47.1
2	*6855.00	99.4 AV			2.15 H	198	52.3	47.1
3	#13710.00	57.8 PK	88.2	-30.4	1.47 H	238	46.8	11.0
4	#13710.00	45.2 AV	68.2	-23.0	1.47 H	238	34.2	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.5 PK			2.01 V	189	63.4	47.1
2	*6855.00	98.9 AV			2.01 V	189	51.8	47.1
3	#13710.00	57.6 PK	88.2	-30.6	3.08 V	127	46.6	11.0
4	#13710.00	44.9 AV	68.2	-23.3	3.08 V	127	33.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.1 PK			2.14 H	208	64.0	47.1
2	*6875.00	98.7 AV			2.14 H	208	51.6	47.1
3	#13750.00	58.1 PK	88.2	-30.1	1.49 H	235	47.0	11.1
4	#13750.00	45.4 AV	68.2	-22.8	1.49 H	235	34.3	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.4 PK			2.57 V	219	63.3	47.1
2	*6875.00	97.9 AV			2.57 V	219	50.8	47.1
3	#13750.00	57.7 PK	88.2	-30.5	3.02 V	149	46.6	11.1
4	#13750.00	44.7 AV	68.2	-23.5	3.02 V	149	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.9 PK			2.10 H	234	63.8	47.1
2	*6995.00	99.1 AV			2.10 H	234	52.0	47.1
3	#13990.00	59.2 PK	88.2	-29.0	1.56 H	243	47.2	12.0
4	#13990.00	46.6 AV	68.2	-21.6	1.56 H	243	34.6	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.4 PK			2.21 V	216	63.3	47.1
2	*6995.00	98.5 AV			2.21 V	216	51.4	47.1
3	#13990.00	58.7 PK	88.2	-29.5	3.07 V	135	46.7	12.0
4	#13990.00	45.7 AV	68.2	-22.5	3.07 V	135	33.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.1 PK			2.01 H	221	57.5	47.6
2	*7115.00	92.4 AV			2.01 H	221	44.8	47.6
3	#7125.00	78.5 PK	88.2	-9.7	2.01 H	221	68.8	9.7
4	#7125.00	68.1 AV	68.2	-0.1	2.01 H	221	58.4	9.7
5	#14230.00	59.2 PK	88.2	-29.0	1.55 H	247	47.7	11.5
6	#14230.00	46.3 AV	68.2	-21.9	1.55 H	247	34.8	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.5 PK			1.43 V	89	56.9	47.6
2	*7115.00	91.8 AV			1.43 V	89	44.2	47.6
3	#7125.00	75.8 PK	88.2	-12.4	1.43 V	89	66.1	9.7
4	#7125.00	65.5 AV	68.2	-2.7	1.43 V	89	55.8	9.7
5	#14230.00	58.8 PK	88.2	-29.4	2.98 V	137	47.3	11.5
6	#14230.00	45.7 AV	68.2	-22.5	2.98 V	137	34.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.0 PK	88.2	-21.2	2.03 H	231	61.1	5.9
2	#5925.00	45.3 AV	68.2	-22.9	2.03 H	231	39.4	5.9
3	*5965.00	110.8 PK			2.03 H	231	67.4	43.4
4	*5965.00	99.1 AV			2.03 H	231	55.7	43.4
5	11930.00	58.7 PK	74.0	-15.3	1.43 H	247	47.2	11.5
6	11930.00	45.6 AV	54.0	-8.4	1.43 H	247	34.1	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.3 PK	88.2	-23.9	2.68 V	76	58.4	5.9
2	#5925.00	45.1 AV	68.2	-23.1	2.68 V	76	39.2	5.9
3	*5965.00	109.8 PK			2.68 V	76	66.4	43.4
4	*5965.00	98.0 AV			2.68 V	76	54.6	43.4
5	11930.00	58.2 PK	74.0	-15.8	3.09 V	128	46.7	11.5
6	11930.00	45.1 AV	54.0	-8.9	3.09 V	128	33.6	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	110.9 PK			2.16 H	202	66.5	44.4
2	*6165.00	98.7 AV			2.16 H	202	54.3	44.4
3	12330.00	58.5 PK	74.0	-15.5	1.47 H	242	47.3	11.2
4	12330.00	45.5 AV	54.0	-8.5	1.47 H	242	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.8 PK			2.65 V	84	65.4	44.4
2	*6165.00	97.5 AV			2.65 V	84	53.1	44.4
3	12330.00	58.0 PK	74.0	-16.0	3.06 V	132	46.8	11.2
4	12330.00	45.0 AV	54.0	-9.0	3.06 V	132	33.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.0 PK			2.07 H	200	65.2	45.8
2	*6405.00	98.5 AV			2.07 H	200	52.7	45.8
3	#12810.00	58.7 PK	88.2	-29.5	1.52 H	234	47.4	11.3
4	#12810.00	45.5 AV	68.2	-22.7	1.52 H	234	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.0 PK			2.73 V	93	64.2	45.8
2	*6405.00	97.4 AV			2.73 V	93	51.6	45.8
3	#12810.00	58.2 PK	88.2	-30.0	3.05 V	142	46.9	11.3
4	#12810.00	45.0 AV	68.2	-23.2	3.05 V	142	33.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.9 PK			2.03 H	225	64.9	46.0
2	*6445.00	98.7 AV			2.03 H	225	52.7	46.0
3	#12890.00	58.6 PK	88.2	-29.6	1.39 H	236	47.2	11.4
4	#12890.00	45.5 AV	68.2	-22.7	1.39 H	236	34.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.9 PK			2.73 V	85	63.9	46.0
2	*6445.00	97.7 AV			2.73 V	85	51.7	46.0
3	#12890.00	58.1 PK	88.2	-30.1	3.01 V	132	46.7	11.4
4	#12890.00	45.0 AV	68.2	-23.2	3.01 V	132	33.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.6 PK			1.88 H	192	64.3	46.3
2	*6485.00	98.4 AV			1.88 H	192	52.1	46.3
3	#12970.00	58.5 PK	88.2	-29.7	1.46 H	247	47.4	11.1
4	#12970.00	45.4 AV	68.2	-22.8	1.46 H	247	34.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.1 PK			2.66 V	157	63.8	46.3
2	*6485.00	98.0 AV			2.66 V	157	51.7	46.3
3	#12970.00	57.9 PK	88.2	-30.3	3.07 V	134	46.8	11.1
4	#12970.00	44.9 AV	68.2	-23.3	3.07 V	134	33.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.8 PK			1.99 H	213	64.4	46.4
2	*6525.00	99.4 AV			1.99 H	213	53.0	46.4
3	#13050.00	58.9 PK	88.2	-29.3	1.38 H	245	47.6	11.3
4	#13050.00	45.7 AV	68.2	-22.5	1.38 H	245	34.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.1 PK			2.67 V	153	63.7	46.4
2	*6525.00	98.7 AV			2.67 V	153	52.3	46.4
3	#13050.00	58.3 PK	88.2	-29.9	3.09 V	136	47.0	11.3
4	#13050.00	45.2 AV	68.2	-23.0	3.09 V	136	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.1 PK			1.57 H	222	64.6	46.5
2	*6565.00	98.7 AV			1.57 H	222	52.2	46.5
3	#13130.00	58.8 PK	88.2	-29.4	1.42 H	248	47.3	11.5
4	#13130.00	45.8 AV	68.2	-22.4	1.42 H	248	34.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.4 PK			2.61 V	163	63.9	46.5
2	*6565.00	97.9 AV			2.61 V	163	51.4	46.5
3	#13130.00	58.2 PK	88.2	-30.0	2.96 V	154	46.7	11.5
4	#13130.00	45.0 AV	68.2	-23.2	2.96 V	154	33.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.5 PK			2.20 H	202	64.8	46.7
2	*6725.00	99.1 AV			2.20 H	202	52.4	46.7
3	#13450.00	58.5 PK	88.2	-29.7	1.38 H	241	47.4	11.1
4	#13450.00	45.4 AV	68.2	-22.8	1.38 H	241	34.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.6 PK			2.58 V	174	63.9	46.7
2	*6725.00	98.4 AV			2.58 V	174	51.7	46.7
3	#13450.00	57.9 PK	88.2	-30.3	3.00 V	152	46.8	11.1
4	#13450.00	45.0 AV	68.2	-23.2	3.00 V	152	33.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.1 PK			1.91 H	201	64.1	47.0
2	*6845.00	99.2 AV			1.91 H	201	52.2	47.0
3	#13690.00	58.4 PK	88.2	-29.8	1.39 H	247	47.4	11.0
4	#13690.00	45.3 AV	68.2	-22.9	1.39 H	247	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.4 PK			2.68 V	89	63.4	47.0
2	*6845.00	98.4 AV			2.68 V	89	51.4	47.0
3	#13690.00	57.9 PK	88.2	-30.3	3.04 V	150	46.9	11.0
4	#13690.00	44.8 AV	68.2	-23.4	3.04 V	150	33.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.9 PK			1.59 H	196	64.8	47.1
2	*6885.00	99.6 AV			1.59 H	196	52.5	47.1
3	#13770.00	58.6 PK	88.2	-29.6	1.35 H	242	47.5	11.1
4	#13770.00	45.5 AV	68.2	-22.7	1.35 H	242	34.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.0 PK			2.71 V	92	63.9	47.1
2	*6885.00	98.9 AV			2.71 V	92	51.8	47.1
3	#13770.00	58.0 PK	88.2	-30.2	3.09 V	153	46.9	11.1
4	#13770.00	44.9 AV	68.2	-23.3	3.09 V	153	33.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.7 PK			1.53 H	200	63.6	47.1
2	*7005.00	99.2 AV			1.53 H	200	52.1	47.1
3	#14010.00	59.2 PK	88.2	-29.0	1.37 H	239	47.2	12.0
4	#14010.00	46.0 AV	68.2	-22.2	1.37 H	239	34.0	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	109.9 PK			2.67 V	86	62.8	47.1
2	*7005.00	98.5 AV			2.67 V	86	51.4	47.1
3	#14010.00	58.5 PK	88.2	-29.7	3.05 V	154	46.5	12.0
4	#14010.00	45.4 AV	68.2	-22.8	3.05 V	154	33.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.0 PK			1.57 H	229	63.4	47.6
2	*7085.00	98.8 AV			1.57 H	229	51.2	47.6
3	#7125.00	67.8 PK	88.2	-20.4	1.57 H	229	58.1	9.7
4	#7125.00	49.0 AV	68.2	-19.2	1.57 H	229	39.3	9.7
5	#14170.00	58.9 PK	88.2	-29.3	1.34 H	249	47.3	11.6
6	#14170.00	45.7 AV	68.2	-22.5	1.34 H	249	34.1	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.2 PK			2.24 V	86	62.6	47.6
2	*7085.00	97.9 AV			2.24 V	86	50.3	47.6
3	#7125.00	67.5 PK	88.2	-20.7	2.24 V	86	57.8	9.7
4	#7125.00	49.0 AV	68.2	-19.2	2.24 V	86	39.3	9.7
5	#14170.00	58.2 PK	88.2	-30.0	3.08 V	155	46.6	11.6
6	#14170.00	45.0 AV	68.2	-23.2	3.08 V	155	33.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	2.25 H	199	66.1	5.9
2	#5925.00	47.2 AV	68.2	-21.0	2.25 H	199	41.3	5.9
3	*5985.00	111.0 PK			2.25 H	199	67.6	43.4
4	*5985.00	98.5 AV			2.25 H	199	55.1	43.4
5	11970.00	58.4 PK	74.0	-15.6	1.35 H	244	47.1	11.3
6	11970.00	45.1 AV	54.0	-8.9	1.35 H	244	33.8	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.5 PK	88.2	-24.7	2.23 V	319	57.6	5.9
2	#5925.00	45.6 AV	68.2	-22.6	2.23 V	319	39.7	5.9
3	*5985.00	109.7 PK			2.23 V	319	66.3	43.4
4	*5985.00	97.1 AV			2.23 V	319	53.7	43.4
5	11970.00	57.7 PK	74.0	-16.3	2.93 V	147	46.4	11.3
6	11970.00	44.6 AV	54.0	-9.4	2.93 V	147	33.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	111.4 PK			2.16 H	186	67.2	44.2
2	*6145.00	99.0 AV			2.16 H	186	54.8	44.2
3	12290.00	58.1 PK	74.0	-15.9	1.32 H	237	47.0	11.1
4	12290.00	44.9 AV	54.0	-9.1	1.32 H	237	33.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	110.4 PK			2.25 V	318	66.2	44.2
2	*6145.00	98.0 AV			2.25 V	318	53.8	44.2
3	12290.00	57.6 PK	74.0	-16.4	3.09 V	138	46.5	11.1
4	12290.00	44.5 AV	54.0	-9.5	3.09 V	138	33.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.6 PK			2.64 H	212	65.9	45.7
2	*6385.00	98.6 AV			2.64 H	212	52.9	45.7
3	#12770.00	58.4 PK	88.2	-29.8	1.36 H	240	47.0	11.4
4	#12770.00	45.2 AV	68.2	-23.0	1.36 H	240	33.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.6 PK			2.32 V	307	64.9	45.7
2	*6385.00	97.7 AV			2.32 V	307	52.0	45.7
3	#12770.00	57.8 PK	88.2	-30.4	3.05 V	137	46.4	11.4
4	#12770.00	44.7 AV	68.2	-23.5	3.05 V	137	33.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.8 PK			2.71 H	349	65.6	46.2
2	*6465.00	98.7 AV			2.71 H	349	52.5	46.2
3	#12930.00	58.1 PK	88.2	-30.1	1.32 H	241	46.8	11.3
4	#12930.00	45.0 AV	68.2	-23.2	1.32 H	241	33.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.4 PK			2.19 V	156	64.2	46.2
2	*6465.00	97.6 AV			2.19 V	156	51.4	46.2
3	#12930.00	57.7 PK	88.2	-30.5	3.08 V	134	46.4	11.3
4	#12930.00	44.7 AV	68.2	-23.5	3.08 V	134	33.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.2 PK			2.62 H	219	64.8	46.4
2	*6545.00	98.2 AV			2.62 H	219	51.8	46.4
3	#13090.00	58.3 PK	88.2	-29.9	1.37 H	246	46.7	11.6
4	#13090.00	45.2 AV	68.2	-23.0	1.37 H	246	33.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.0 PK			2.21 V	158	63.6	46.4
2	*6545.00	97.2 AV			2.21 V	158	50.8	46.4
3	#13090.00	58.0 PK	88.2	-30.2	3.03 V	157	46.4	11.6
4	#13090.00	44.9 AV	68.2	-23.3	3.03 V	157	33.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.4 PK			1.93 H	217	64.7	46.7
2	*6705.00	97.9 AV			1.93 H	217	51.2	46.7
3	#13410.00	58.4 PK	88.2	-29.8	1.38 H	237	47.1	11.3
4	#13410.00	45.0 AV	68.2	-23.2	1.38 H	237	33.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.1 PK			2.13 V	187	63.4	46.7
2	*6705.00	96.9 AV			2.13 V	187	50.2	46.7
3	#13410.00	57.9 PK	88.2	-30.3	3.03 V	145	46.6	11.3
4	#13410.00	44.7 AV	68.2	-23.5	3.03 V	145	33.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.3 PK			1.86 H	200	64.2	47.1
2	*6865.00	98.7 AV			1.86 H	200	51.6	47.1
3	#13730.00	58.3 PK	88.2	-29.9	1.33 H	248	47.2	11.1
4	#13730.00	45.0 AV	68.2	-23.2	1.33 H	248	33.9	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.5 PK			2.23 V	174	63.4	47.1
2	*6865.00	97.9 AV			2.23 V	174	50.8	47.1
3	#13730.00	57.7 PK	88.2	-30.5	3.07 V	135	46.6	11.1
4	#13730.00	44.7 AV	68.2	-23.5	3.07 V	135	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.9 PK			2.36 H	217	62.7	47.2
2	*6945.00	97.4 AV			2.36 H	217	50.2	47.2
3	#13890.00	59.1 PK	88.2	-29.1	1.43 H	233	47.4	11.7
4	#13890.00	46.0 AV	68.2	-22.2	1.43 H	233	34.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.3 PK			2.18 V	171	62.1	47.2
2	*6945.00	97.0 AV			2.18 V	171	49.8	47.2
3	#13890.00	58.6 PK	88.2	-29.6	1.52 V	236	46.9	11.7
4	#13890.00	45.5 AV	68.2	-22.7	1.52 V	236	33.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.5 PK			1.60 H	227	63.2	47.3
2	*7025.00	98.1 AV			1.60 H	227	50.8	47.3
3	#7125.00	61.9 PK	88.2	-26.3	1.60 H	227	52.2	9.7
4	#7125.00	48.5 AV	68.2	-19.7	1.60 H	227	38.8	9.7
5	#14050.00	59.0 PK	88.2	-29.2	1.40 H	231	47.2	11.8
6	#14050.00	45.9 AV	68.2	-22.3	1.40 H	231	34.1	11.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.8 PK			2.41 V	87	62.5	47.3
2	*7025.00	97.4 AV			2.41 V	87	50.1	47.3
3	#7125.00	61.0 PK	88.2	-27.2	2.41 V	87	51.3	9.7
4	#7125.00	47.6 AV	68.2	-20.6	2.41 V	87	37.9	9.7
5	#14050.00	58.3 PK	88.2	-29.9	3.06 V	137	46.5	11.8
6	#14050.00	45.2 AV	68.2	-23.0	3.06 V	137	33.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.4 PK	88.2	-27.8	1.98 H	204	54.5	5.9
2	#5925.00	47.5 AV	68.2	-20.7	1.98 H	204	41.6	5.9
3	*6025.00	112.4 PK			1.98 H	204	68.8	43.6
4	*6025.00	99.7 AV			1.98 H	204	56.1	43.6
5	12050.00	58.4 PK	74.0	-15.6	1.40 H	235	47.0	11.4
6	12050.00	45.4 AV	54.0	-8.6	1.40 H	235	34.0	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.98 V	320	53.7	5.9
2	#5925.00	47.2 AV	68.2	-21.0	1.98 V	320	41.3	5.9
3	*6025.00	110.9 PK			1.98 V	320	67.3	43.6
4	*6025.00	98.4 AV			1.98 V	320	54.8	43.6
5	12050.00	57.9 PK	74.0	-16.1	3.08 V	154	46.5	11.4
6	12050.00	44.8 AV	54.0	-9.2	3.08 V	154	33.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.9 PK			1.98 H	195	67.4	44.5
2	*6185.00	99.2 AV			1.98 H	195	54.7	44.5
3	12370.00	58.3 PK	74.0	-15.7	1.43 H	244	47.2	11.1
4	12370.00	45.0 AV	54.0	-9.0	1.43 H	244	33.9	11.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.9 PK			2.24 V	314	66.4	44.5
2	*6185.00	98.3 AV			2.24 V	314	53.8	44.5
3	12370.00	57.7 PK	74.0	-16.3	3.12 V	156	46.6	11.1
4	12370.00	44.6 AV	54.0	-9.4	3.12 V	156	33.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.2 PK			1.97 H	213	65.7	45.5
2	*6345.00	98.8 AV			1.97 H	213	53.3	45.5
3	12690.00	58.8 PK	74.0	-15.2	1.39 H	241	47.4	11.4
4	12690.00	45.7 AV	54.0	-8.3	1.39 H	241	34.3	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.3 PK			2.07 V	258	64.8	45.5
2	*6345.00	97.9 AV			2.07 V	258	52.4	45.5
3	12690.00	58.2 PK	74.0	-15.8	3.11 V	158	46.8	11.4
4	12690.00	45.2 AV	54.0	-8.8	3.11 V	158	33.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.5 PK			2.55 H	215	65.1	46.4
2	*6505.00	98.7 AV			2.55 H	215	52.3	46.4
3	#13010.00	58.5 PK	88.2	-29.7	1.48 H	238	47.5	11.0
4	#13010.00	45.5 AV	68.2	-22.7	1.48 H	238	34.5	11.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.5 PK			2.03 V	147	63.1	46.4
2	*6505.00	97.9 AV			2.03 V	147	51.5	46.4
3	#13010.00	58.0 PK	88.2	-30.2	3.00 V	157	47.0	11.0
4	#13010.00	45.0 AV	68.2	-23.2	3.00 V	157	34.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.7 PK			2.45 H	209	63.1	46.6
2	*6665.00	98.4 AV			2.45 H	209	51.8	46.6
3	13330.00	59.0 PK	74.0	-15.0	1.50 H	233	47.6	11.4
4	13330.00	45.8 AV	54.0	-8.2	1.50 H	233	34.4	11.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.9 PK			2.24 V	156	62.3	46.6
2	*6665.00	97.5 AV			2.24 V	156	50.9	46.6
3	13330.00	58.5 PK	74.0	-15.5	3.05 V	156	47.1	11.4
4	13330.00	45.3 AV	54.0	-8.7	3.05 V	156	33.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.2 PK			2.34 H	216	64.3	46.9
2	*6825.00	98.6 AV			2.34 H	216	51.7	46.9
3	#13650.00	58.4 PK	88.2	-29.8	1.41 H	242	47.5	10.9
4	#13650.00	45.4 AV	68.2	-22.8	1.41 H	242	34.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.4 PK			2.23 V	93	63.5	46.9
2	*6825.00	97.7 AV			2.23 V	93	50.8	46.9
3	#13650.00	57.8 PK	88.2	-30.4	2.95 V	152	46.9	10.9
4	#13650.00	44.7 AV	68.2	-23.5	2.95 V	152	33.8	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.5 PK			2.29 H	218	63.3	47.2
2	*6985.00	98.5 AV			2.29 H	218	51.3	47.2
3	#7125.00	65.5 PK	88.2	-22.7	2.29 H	218	55.8	9.7
4	#7125.00	52.0 AV	68.2	-16.2	2.29 H	218	42.3	9.7
5	#13970.00	59.5 PK	88.2	-28.7	1.56 H	243	47.6	11.9
6	#13970.00	46.5 AV	68.2	-21.7	1.56 H	243	34.6	11.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.0 PK			1.98 V	148	62.8	47.2
2	*6985.00	97.9 AV			1.98 V	148	50.7	47.2
3	#7125.00	64.6 PK	88.2	-23.6	1.98 V	148	54.9	9.7
4	#7125.00	51.3 AV	68.2	-16.9	1.98 V	148	41.6	9.7
5	#13970.00	59.0 PK	88.2	-29.2	2.91 V	133	47.1	11.9
6	#13970.00	46.0 AV	68.2	-22.2	2.91 V	133	34.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	1.99 H	194	66.3	5.9
2	#5925.00	51.4 AV	68.2	-16.8	1.99 H	194	45.5	5.9
3	*6105.00	111.9 PK			1.99 H	194	67.9	44.0
4	*6105.00	99.5 AV			1.99 H	194	55.5	44.0
5	12210.00	57.9 PK	74.0	-16.1	1.39 H	238	46.9	11.0
6	12210.00	45.3 AV	54.0	-8.7	1.39 H	238	34.3	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.9 PK	88.2	-16.3	1.93 V	152	66.0	5.9
2	#5925.00	51.1 AV	68.2	-17.1	1.93 V	152	45.2	5.9
3	*6105.00	111.1 PK			1.93 V	152	67.1	44.0
4	*6105.00	98.8 AV			1.93 V	152	54.8	44.0
5	12210.00	57.5 PK	74.0	-16.5	2.94 V	135	46.5	11.0
6	12210.00	45.1 AV	54.0	-8.9	2.94 V	135	34.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.2 PK			1.99 H	213	66.2	45.0
2	*6265.00	99.4 AV			1.99 H	213	54.4	45.0
3	12530.00	58.7 PK	74.0	-15.3	1.51 H	237	47.1	11.6
4	12530.00	45.8 AV	54.0	-8.2	1.51 H	237	34.2	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	110.1 PK			1.93 V	307	65.1	45.0
2	*6265.00	98.2 AV			1.93 V	307	53.2	45.0
3	12530.00	58.2 PK	74.0	-15.8	3.03 V	149	46.6	11.6
4	12530.00	45.1 AV	54.0	-8.9	3.03 V	149	33.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.4 PK			1.98 H	215	65.5	45.9
2	*6425.00	99.3 AV			1.98 H	215	53.4	45.9
3	#12850.00	58.4 PK	88.2	-29.8	1.47 H	240	47.0	11.4
4	#12850.00	45.5 AV	68.2	-22.7	1.47 H	240	34.1	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			2.23 V	257	64.5	45.9
2	*6425.00	98.2 AV			2.23 V	257	52.3	45.9
3	#12850.00	57.8 PK	88.2	-30.4	2.99 V	150	46.4	11.4
4	#12850.00	44.7 AV	68.2	-23.5	2.99 V	150	33.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.7 PK			1.93 H	214	65.2	46.5
2	*6585.00	98.9 AV			1.93 H	214	52.4	46.5
3	#13170.00	58.7 PK	88.2	-29.5	1.46 H	252	47.4	11.3
4	#13170.00	45.7 AV	68.2	-22.5	1.46 H	252	34.4	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.8 PK			2.13 V	87	64.3	46.5
2	*6585.00	98.1 AV			2.13 V	87	51.6	46.5
3	#13170.00	58.1 PK	88.2	-30.1	3.09 V	154	46.8	11.3
4	#13170.00	45.0 AV	68.2	-23.2	3.09 V	154	33.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.8 PK			1.97 H	218	65.1	46.7
2	*6745.00	98.7 AV			1.97 H	218	52.0	46.7
3	#13490.00	58.5 PK	88.2	-29.7	1.33 H	247	47.5	11.0
4	#13490.00	45.7 AV	68.2	-22.5	1.33 H	247	34.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.5 PK			1.93 V	94	63.8	46.7
2	*6745.00	97.9 AV			1.93 V	94	51.2	46.7
3	#13490.00	58.0 PK	88.2	-30.2	3.03 V	155	47.0	11.0
4	#13490.00	44.8 AV	68.2	-23.4	3.03 V	155	33.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.6 PK			1.56 H	222	63.5	47.1
2	*6905.00	98.1 AV			1.56 H	222	51.0	47.1
3	#7125.00	64.3 PK	88.2	-23.9	1.56 H	222	54.6	9.7
4	#7125.00	52.7 AV	68.2	-15.5	1.56 H	222	43.0	9.7
5	7250.00	63.3 PK	74.0	-10.7	1.56 H	222	53.5	9.8
6	7250.00	49.8 AV	54.0	-4.2	1.56 H	222	40.0	9.8
7	#13810.00	58.7 PK	88.2	-29.5	1.39 H	238	47.6	11.1
8	#13810.00	46.0 AV	68.2	-22.2	1.39 H	238	34.9	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	109.9 PK			1.94 V	147	62.8	47.1
2	*6905.00	97.5 AV			1.94 V	147	50.4	47.1
3	#7125.00	63.1 PK	88.2	-25.1	1.94 V	147	53.4	9.7
4	#7125.00	52.0 AV	68.2	-16.2	1.94 V	147	42.3	9.7
5	7250.00	62.6 PK	74.0	-11.4	1.94 V	147	52.8	9.8
6	7250.00	49.0 AV	54.0	-5.0	1.94 V	147	39.2	9.8
7	#13810.00	57.9 PK	88.2	-30.3	3.03 V	154	46.8	11.1
8	#13810.00	45.1 AV	68.2	-23.1	3.03 V	154	34.0	11.1

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Plot of Band Edge


CDD

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

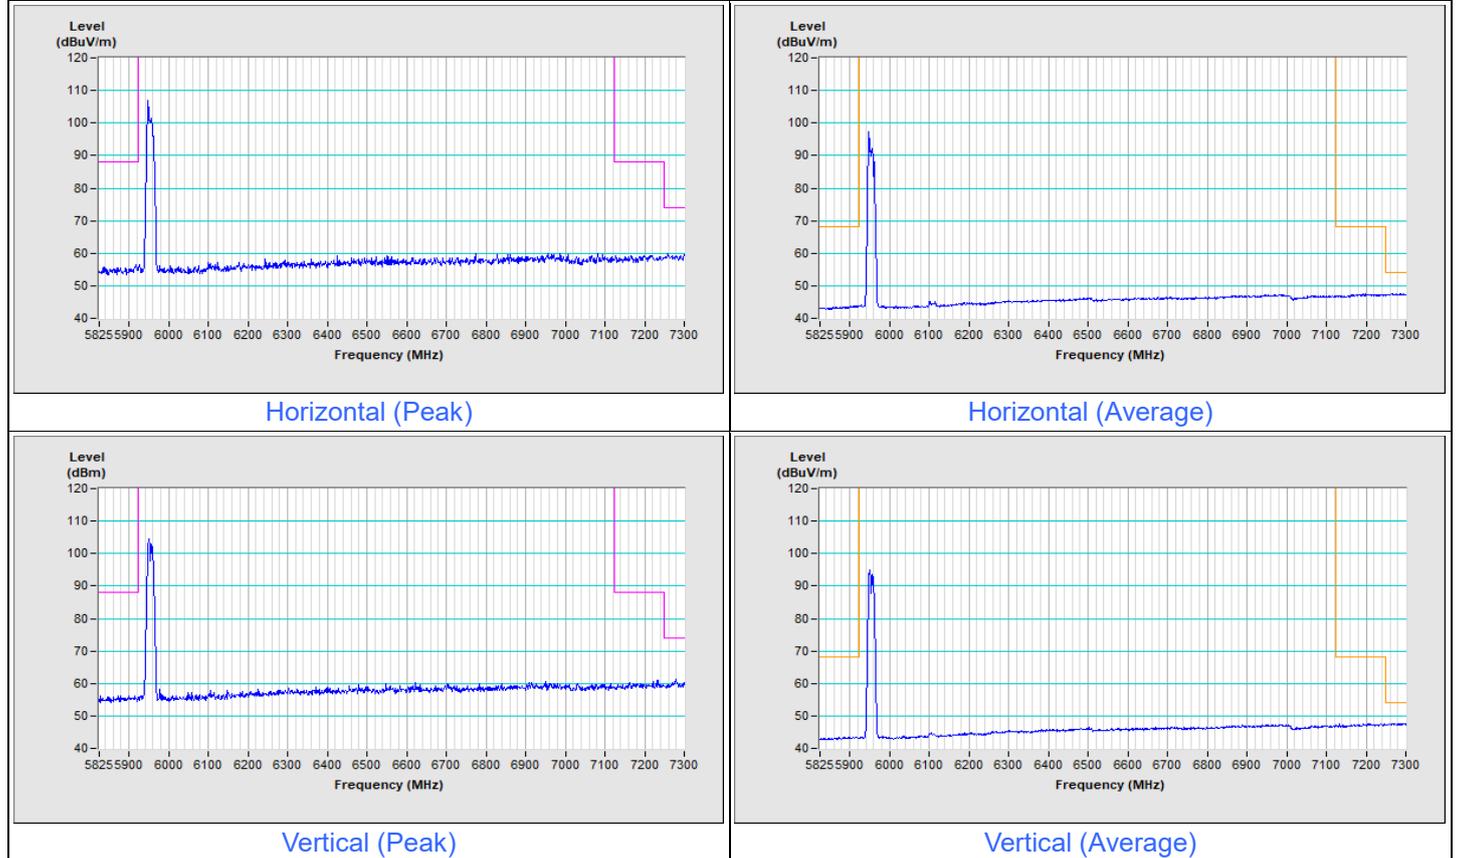


802.11a Channel 233

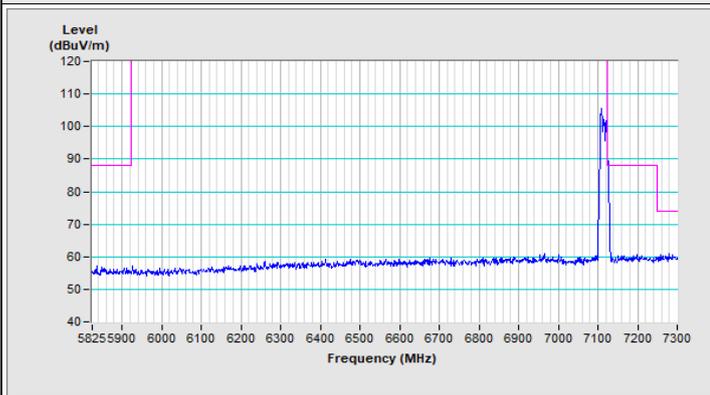


Horizontal (Peak)

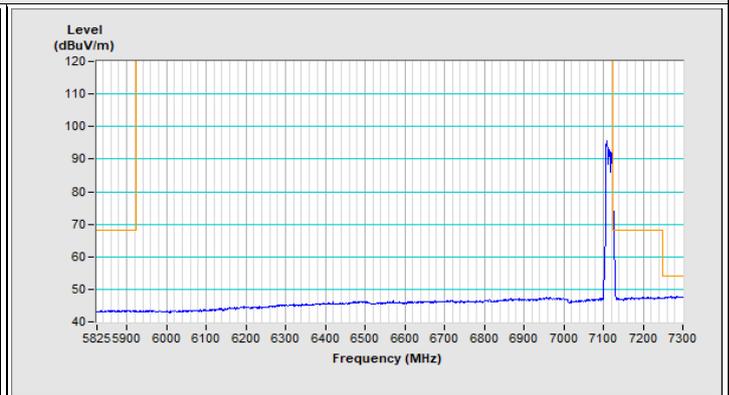

Horizontal (Average)

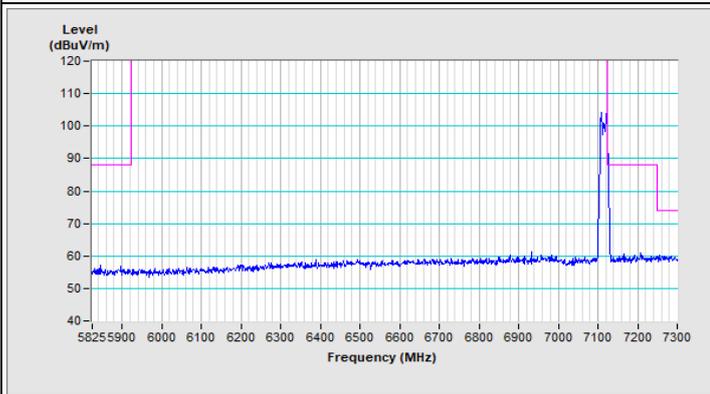


Vertical (Peak)

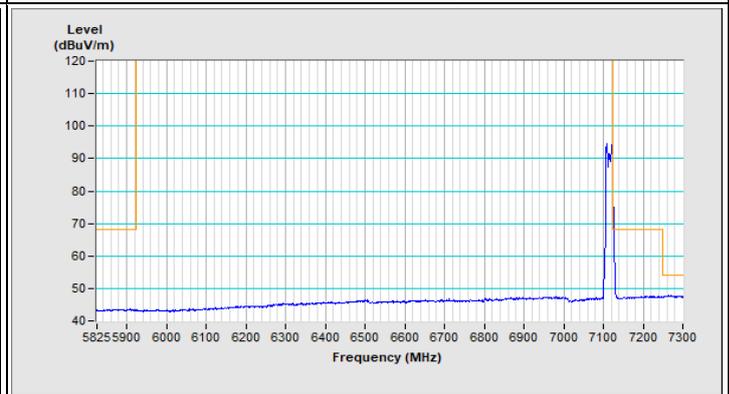


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

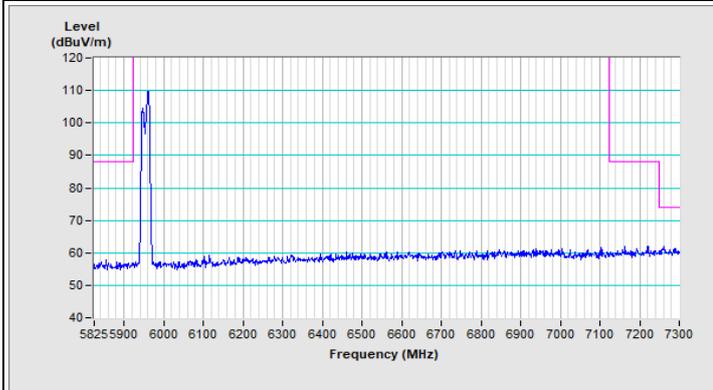


Horizontal (Peak)

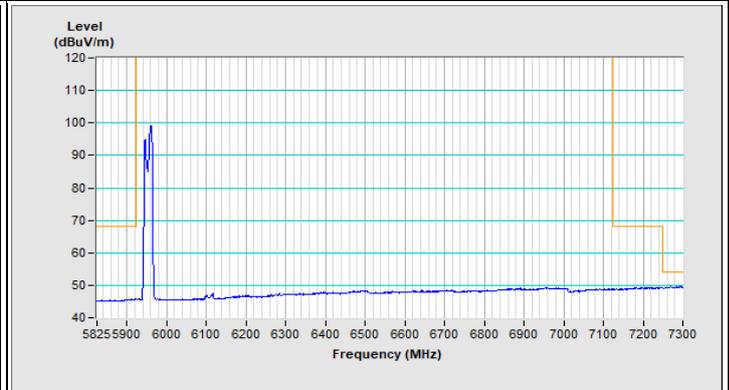

Horizontal (Average)

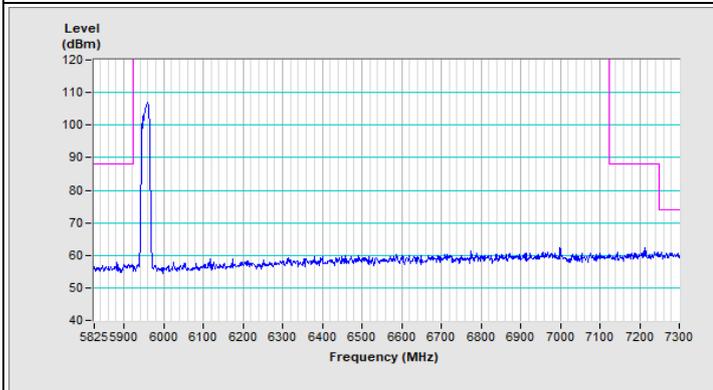

Vertical (Peak)

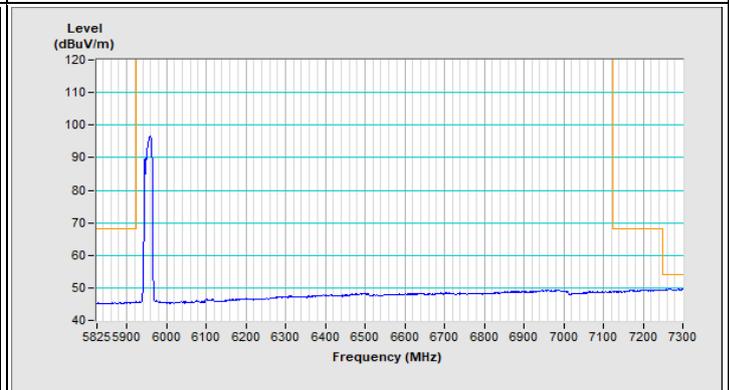


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 233

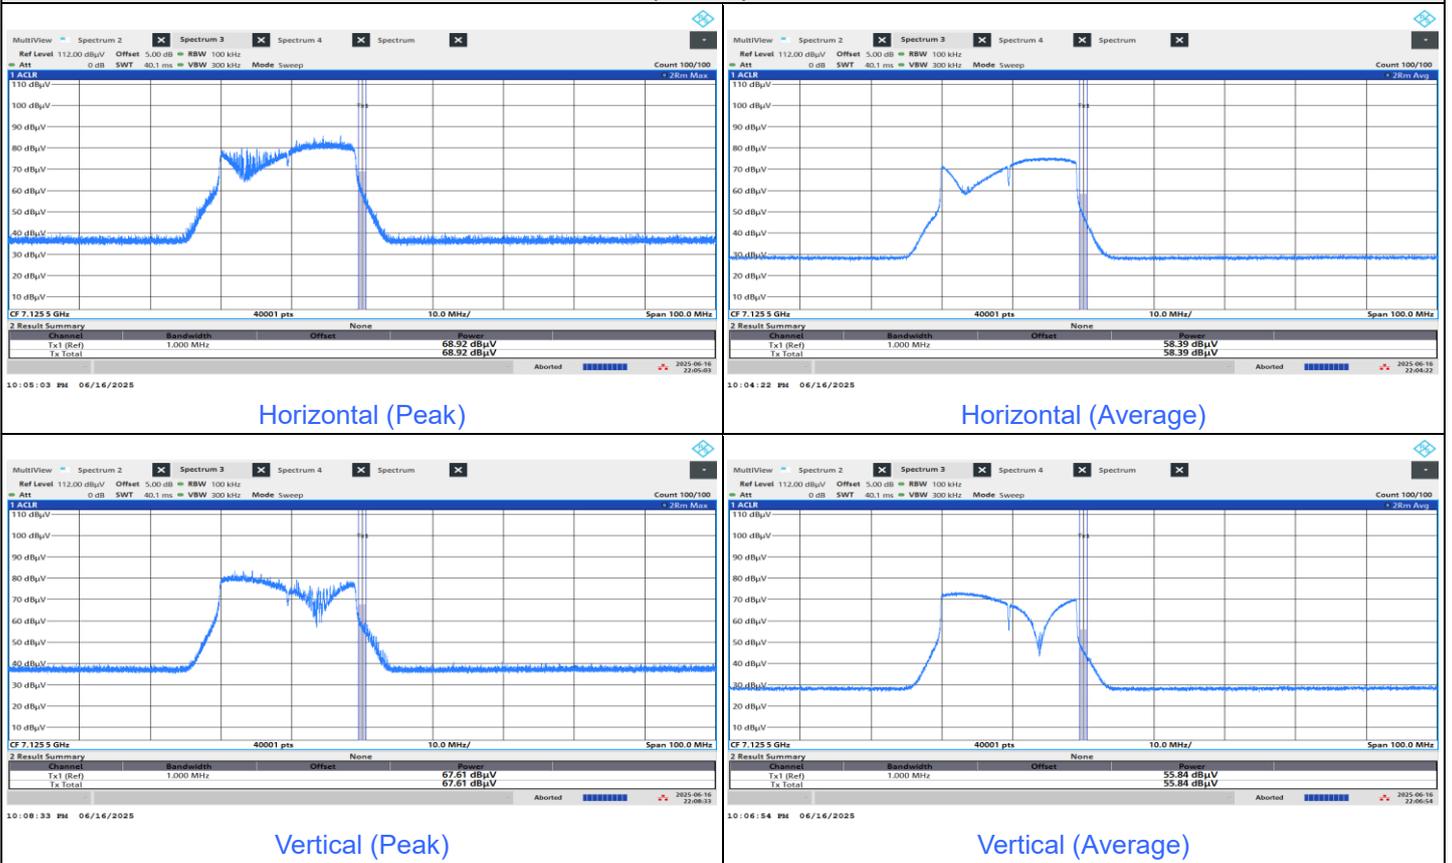


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

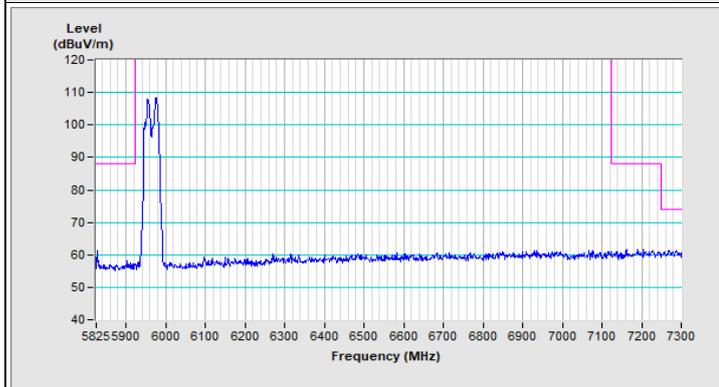


Horizontal (Peak)

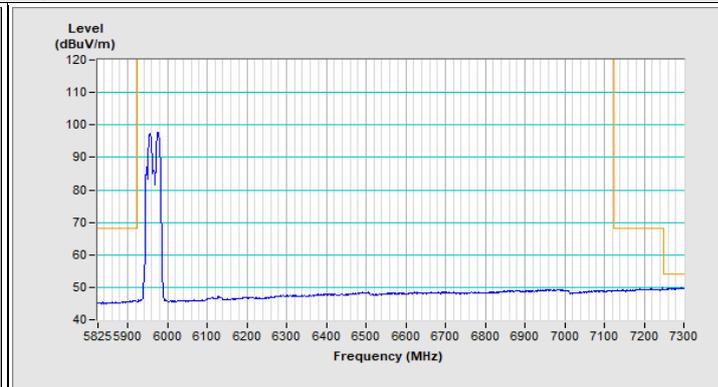

Horizontal (Average)

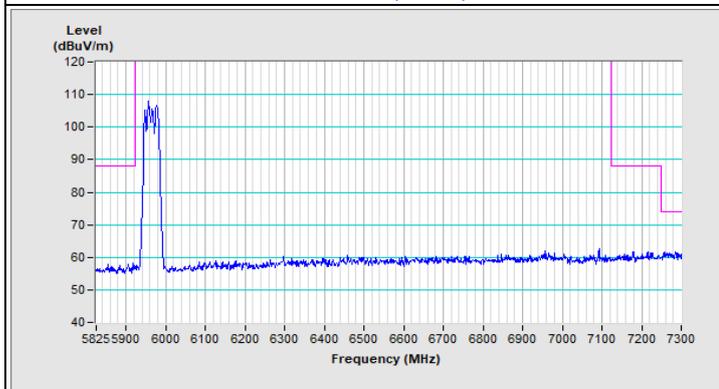


Vertical (Peak)

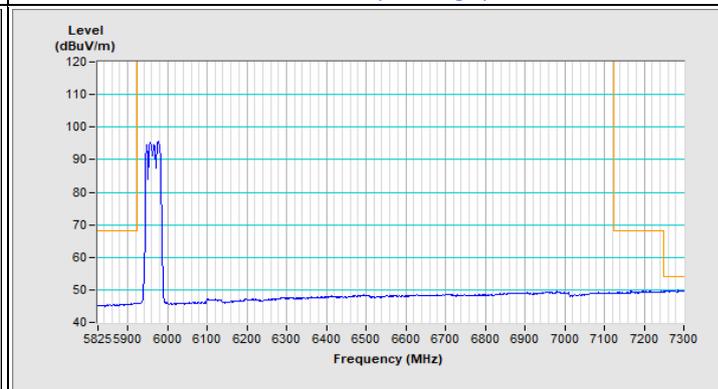


Vertical (Average)


802.11be (EHT40) Channel 227

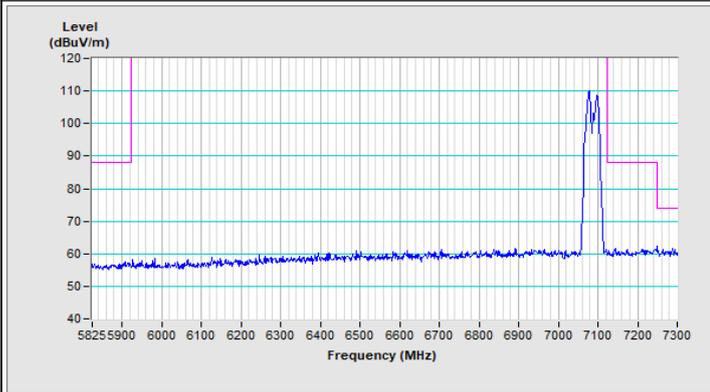


Horizontal (Peak)

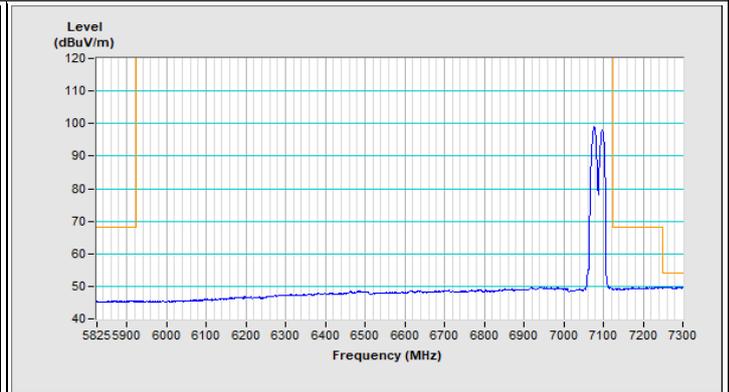

Horizontal (Average)

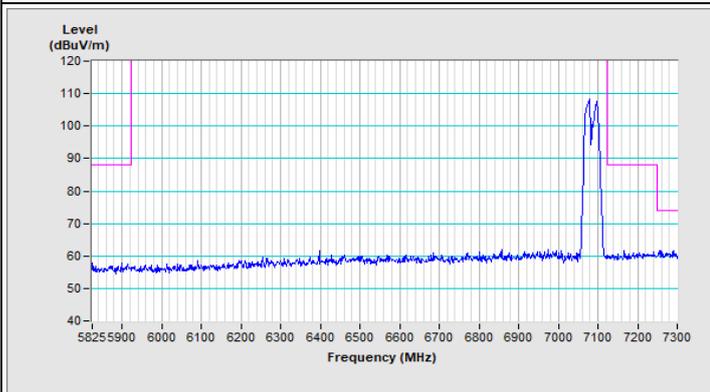


Vertical (Peak)

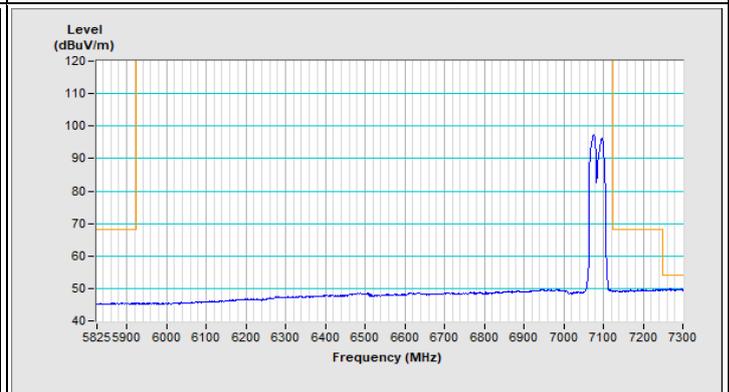


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

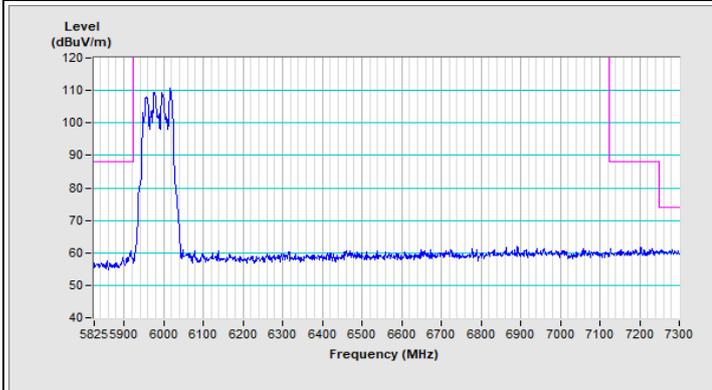


Horizontal (Peak)

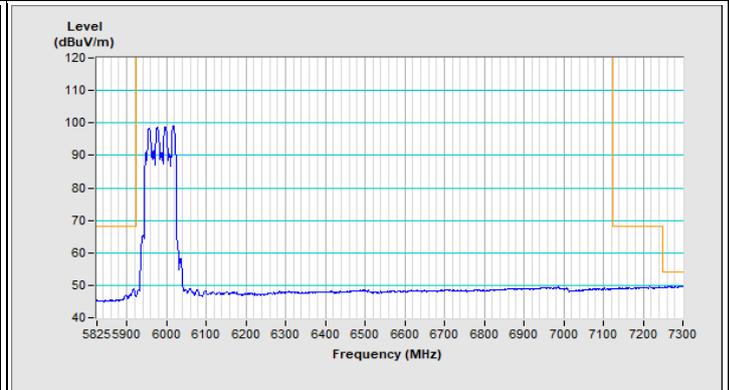

Horizontal (Average)

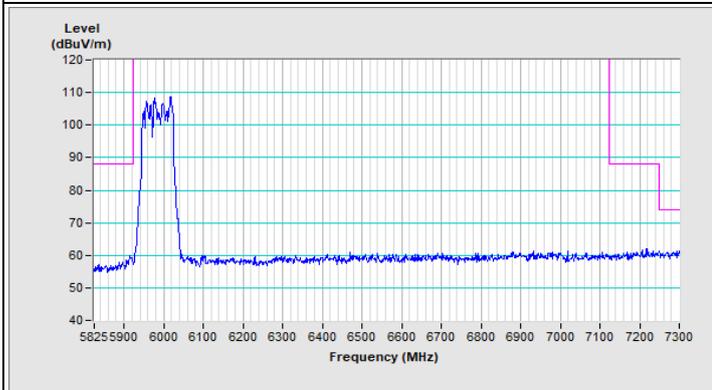


Vertical (Peak)

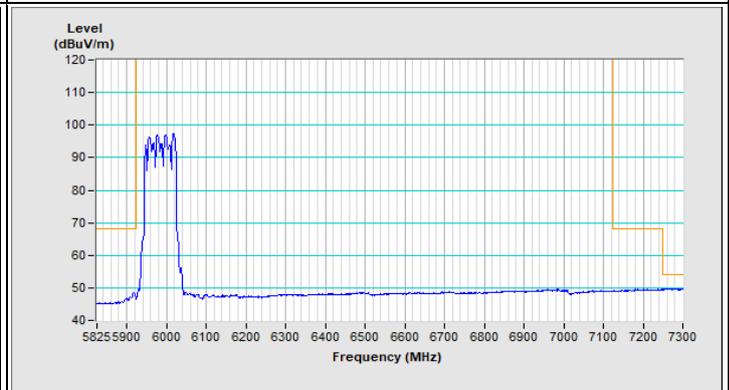


Vertical (Average)


802.11be (EHT80) Channel 215

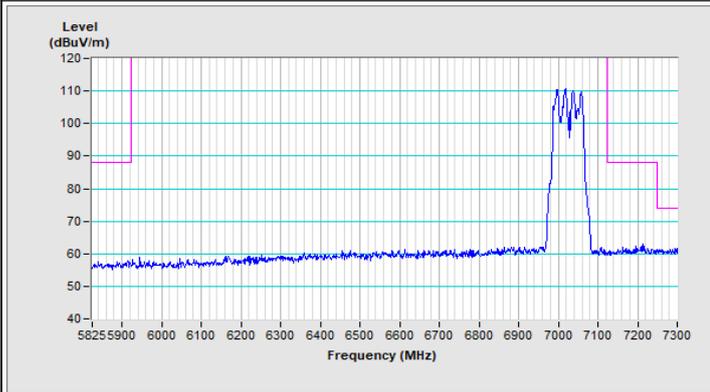


Horizontal (Peak)

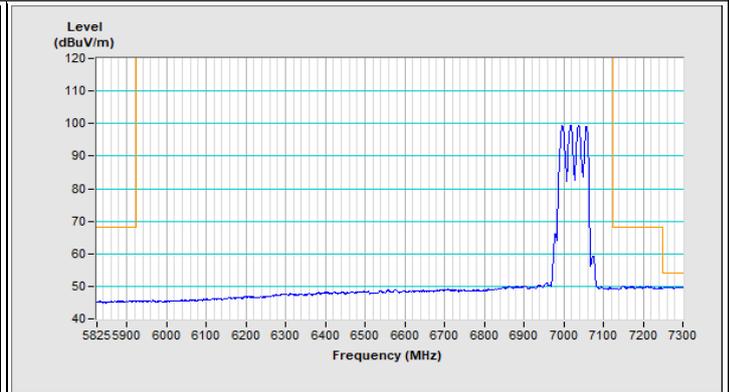

Horizontal (Average)

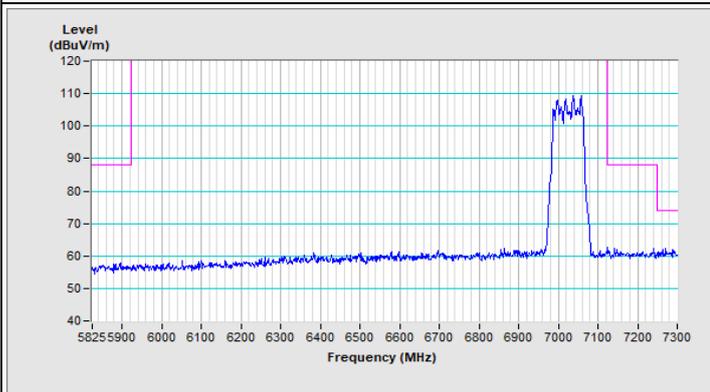


Vertical (Peak)

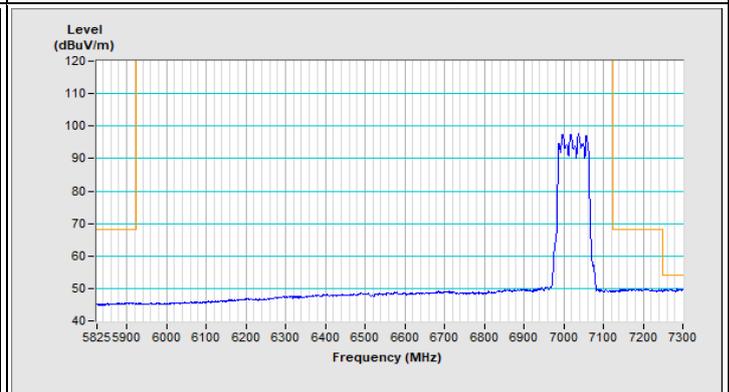


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

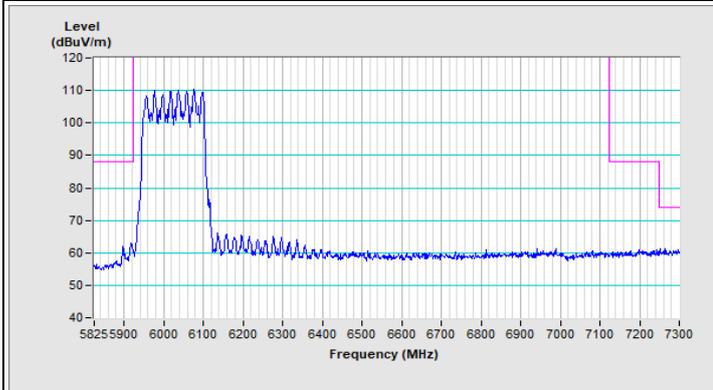


Horizontal (Peak)

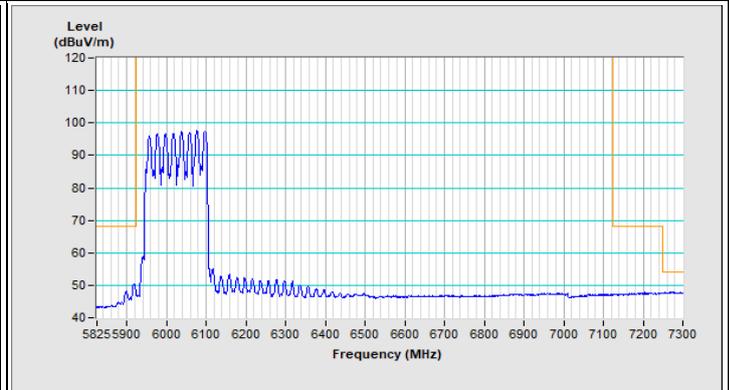

Horizontal (Average)

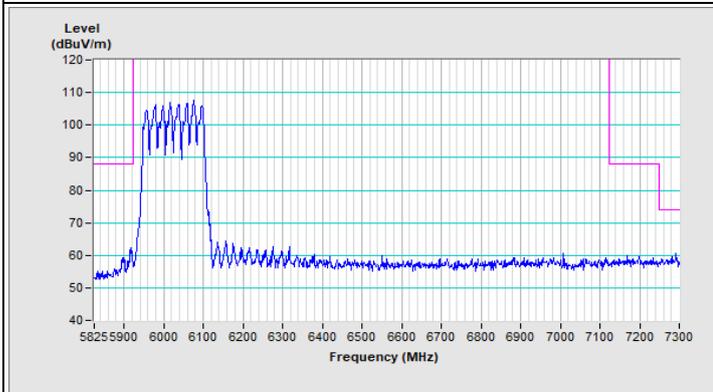


Vertical (Peak)

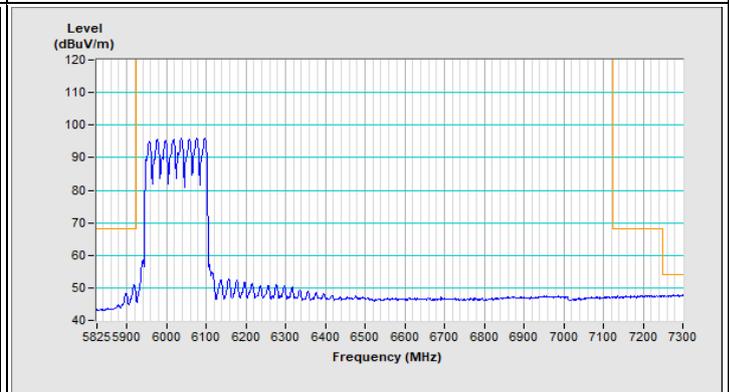


Vertical (Average)


802.11be (EHT160) Channel 207

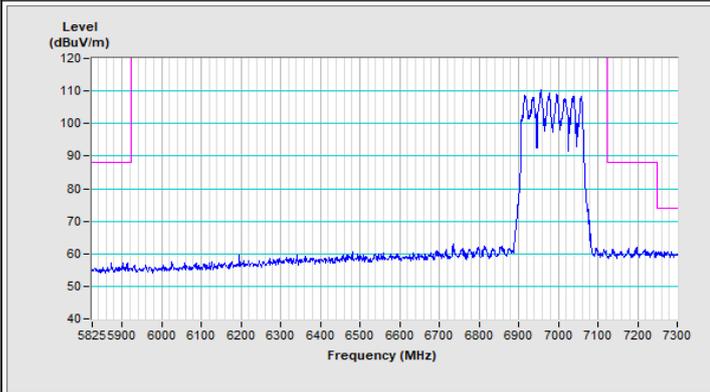


Horizontal (Peak)

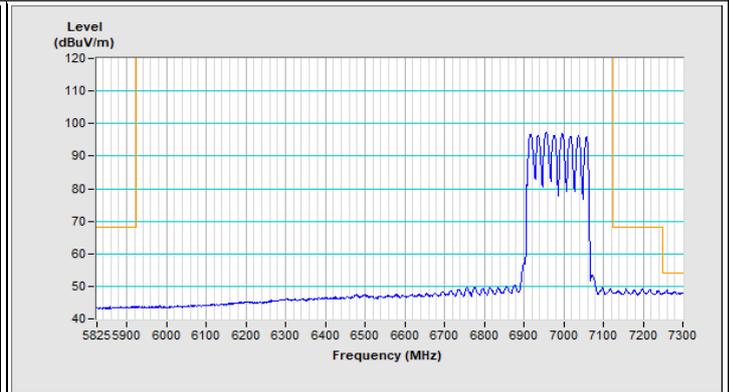

Horizontal (Average)

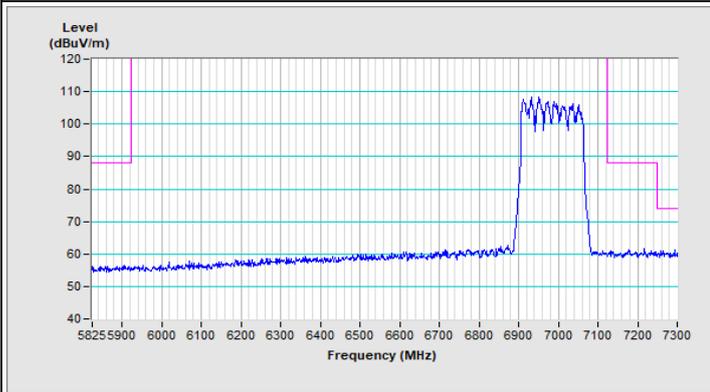


Vertical (Peak)

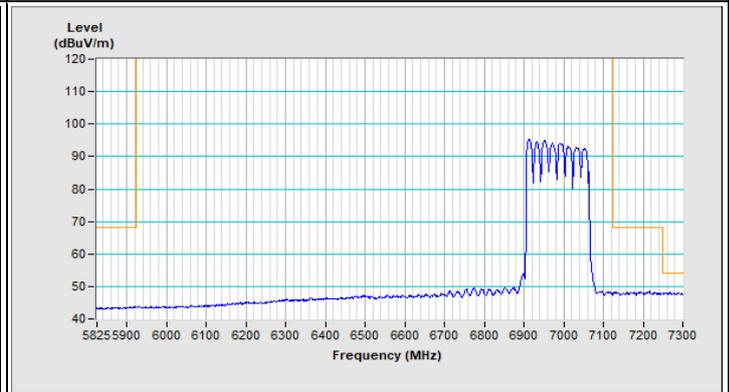


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

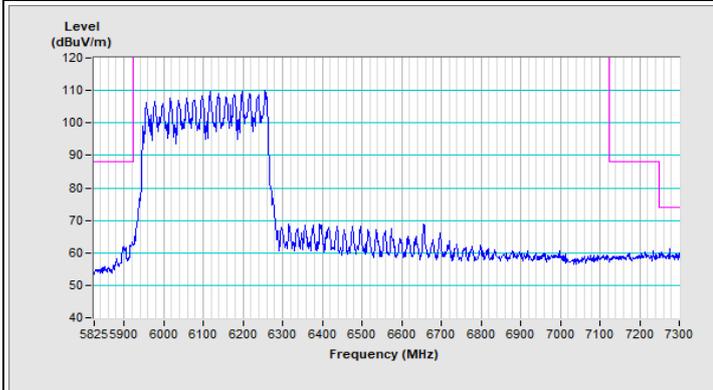


Horizontal (Peak)

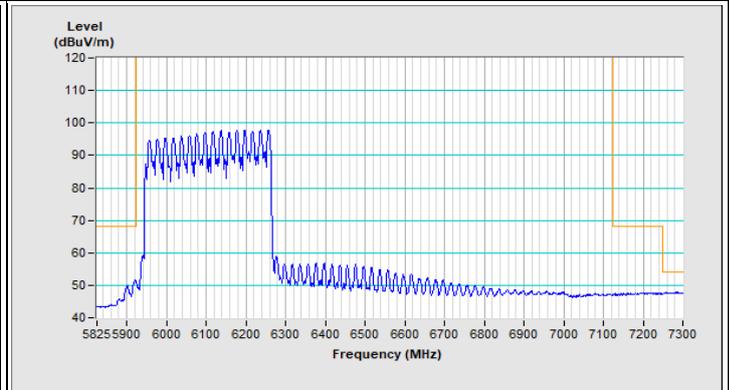

Horizontal (Average)

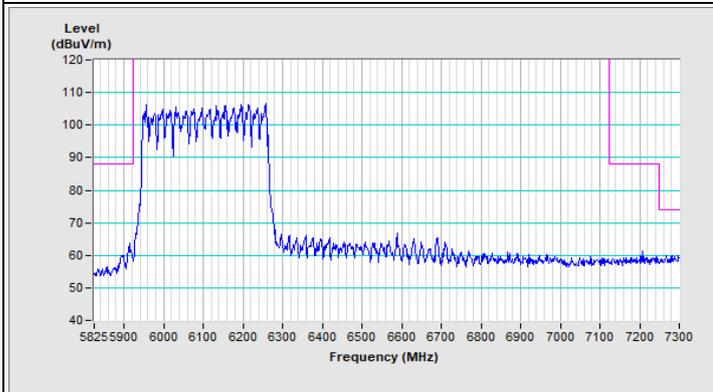


Vertical (Peak)

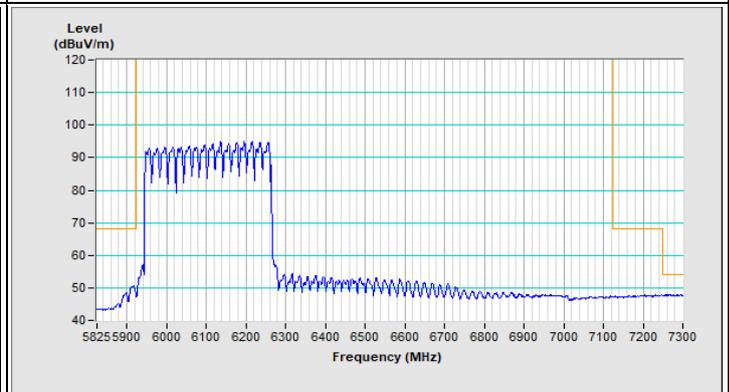


Vertical (Average)


802.11be (EHT320) Channel 191

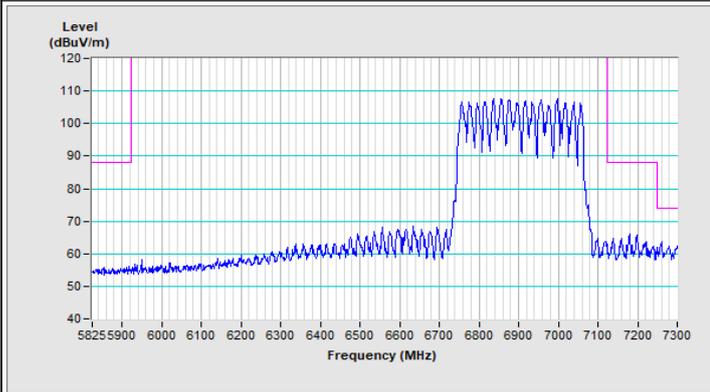


Horizontal (Peak)

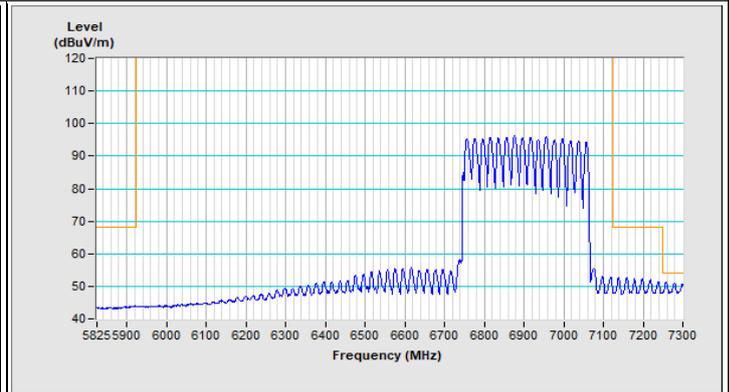

Horizontal (Average)

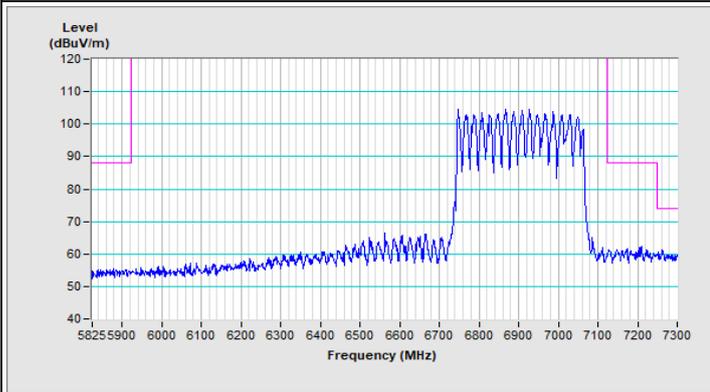


Vertical (Peak)

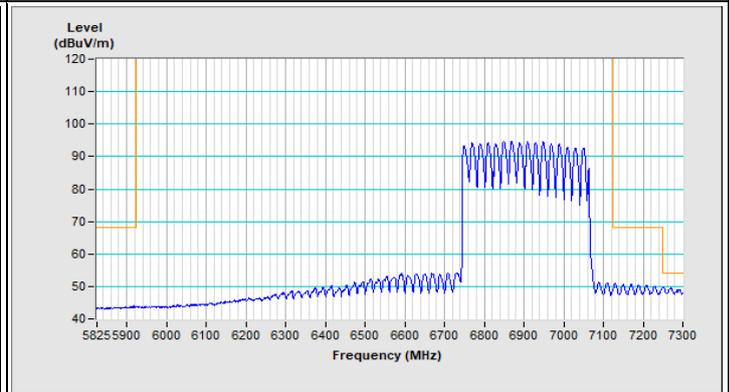

Vertical (Average)

Beamforming


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

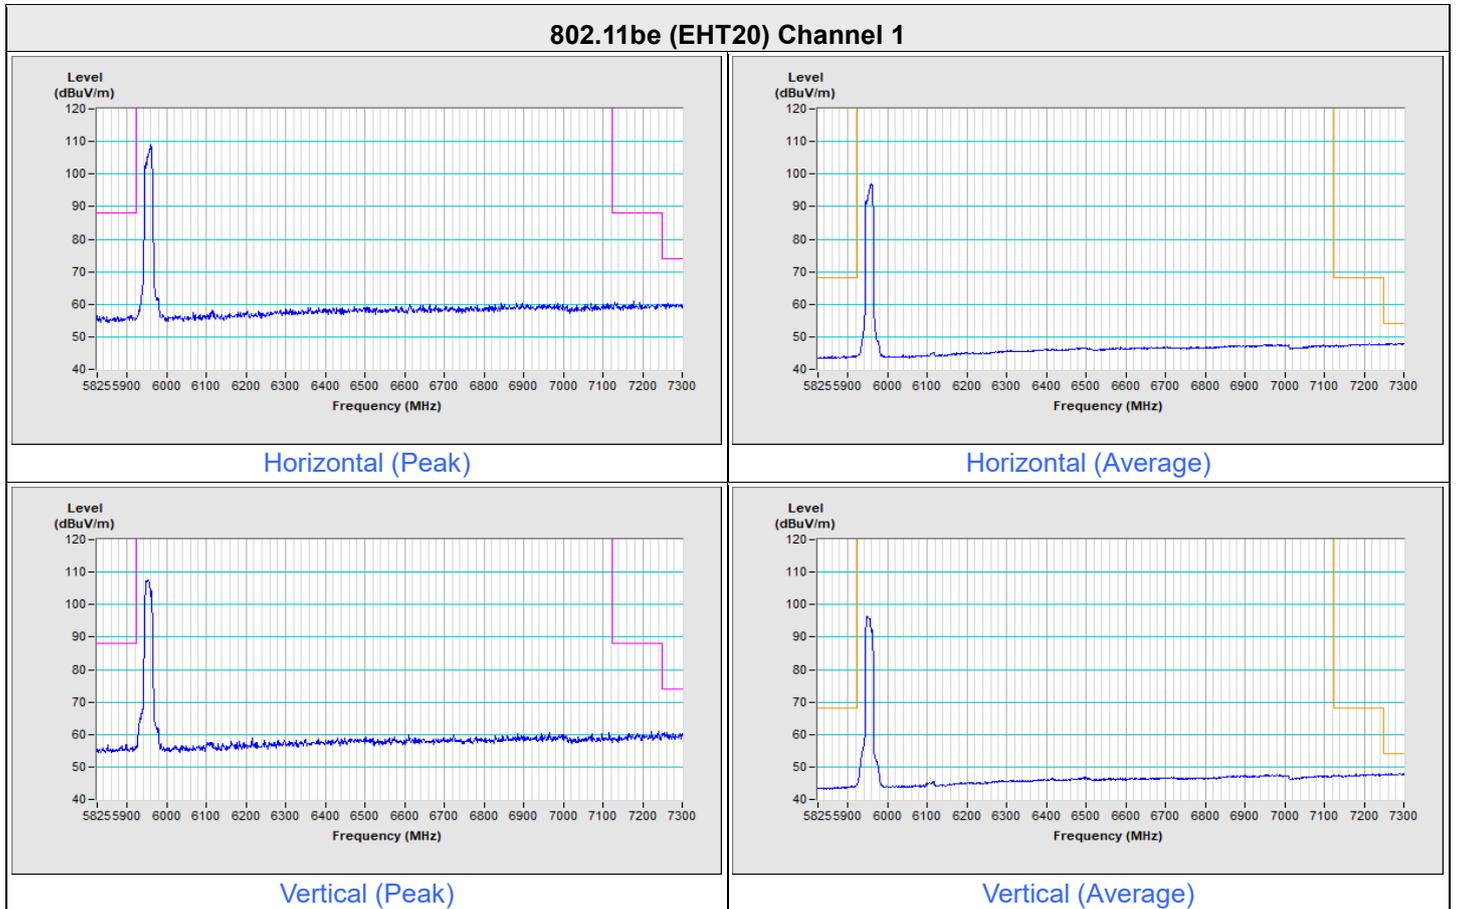



Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 233

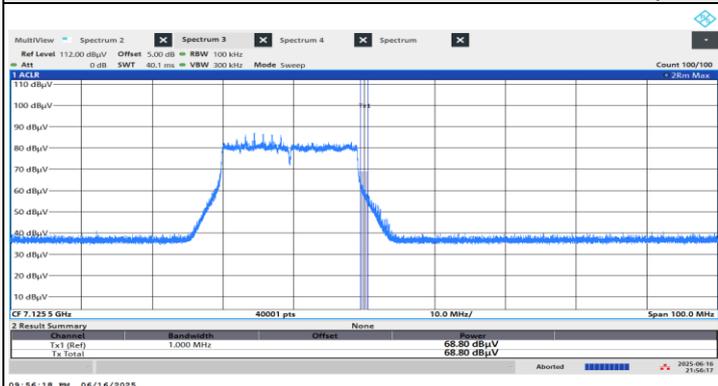


Horizontal (Peak)



Horizontal (Average)

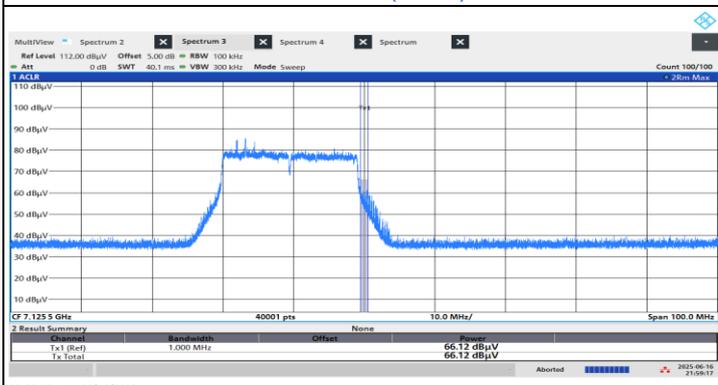


Vertical (Peak)

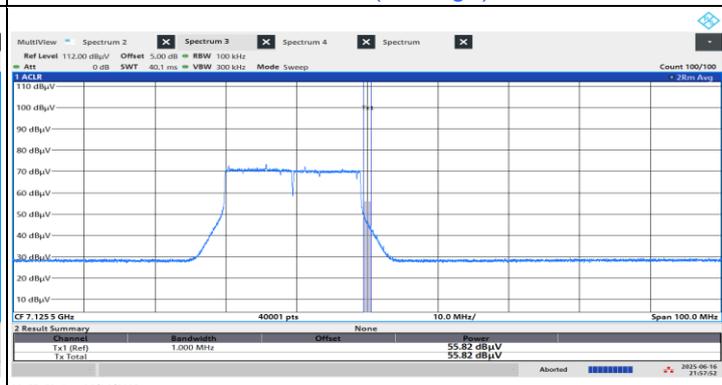


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

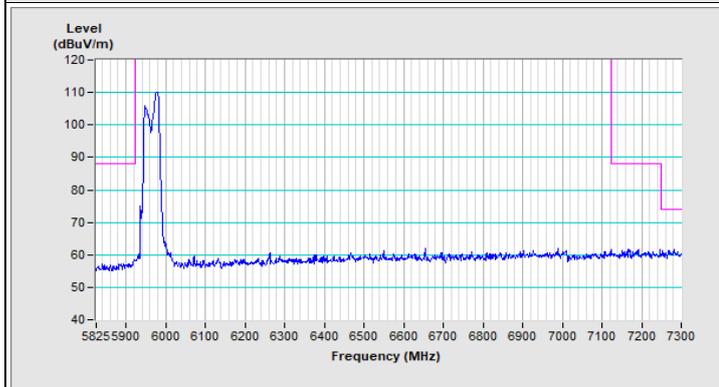


Horizontal (Peak)

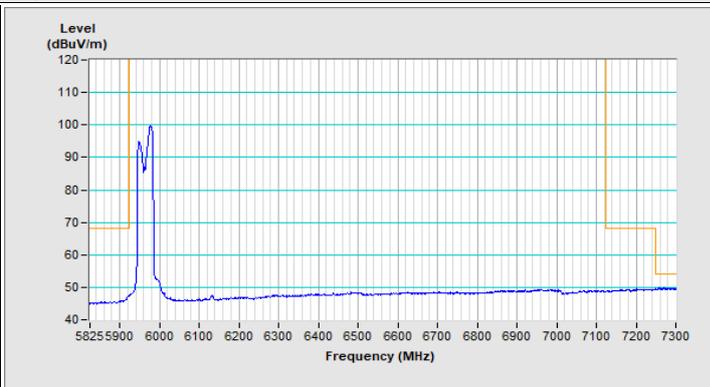

Horizontal (Average)

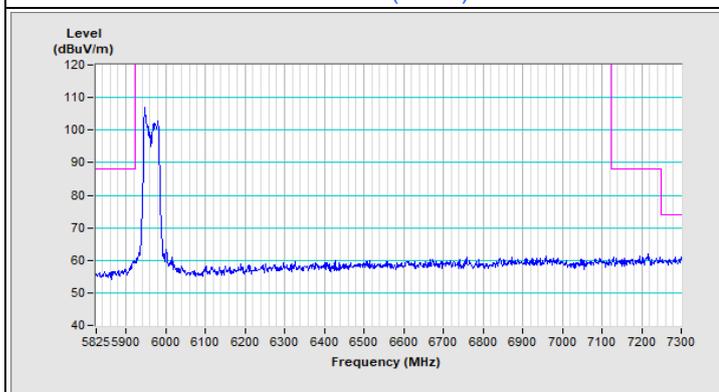


Vertical (Peak)

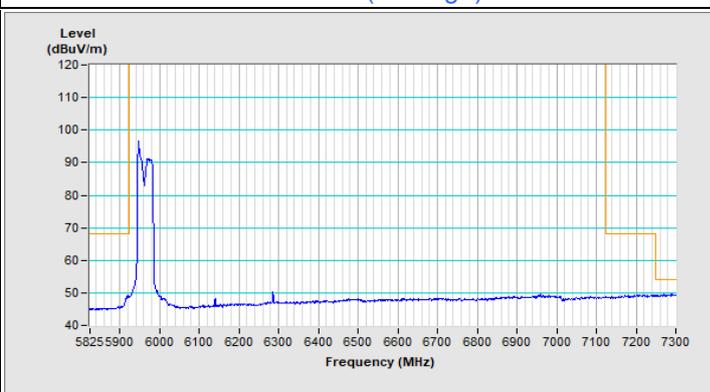


Vertical (Average)


802.11be (EHT40) Channel 227

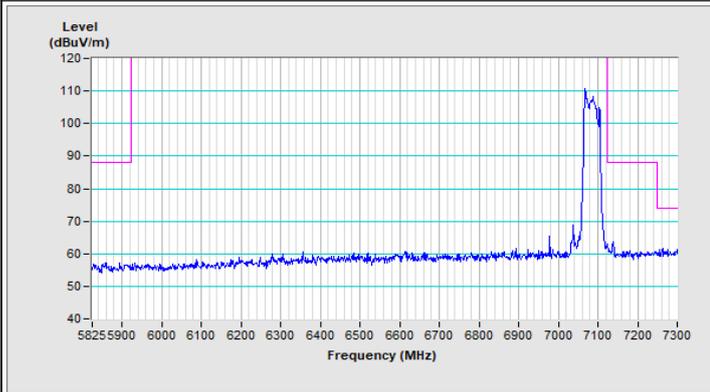


Horizontal (Peak)

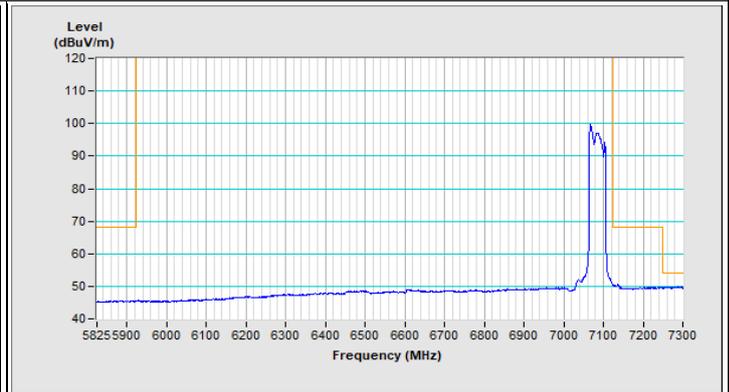

Horizontal (Average)

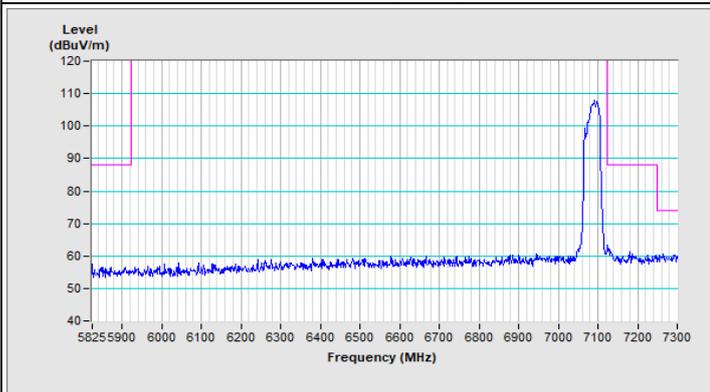


Vertical (Peak)

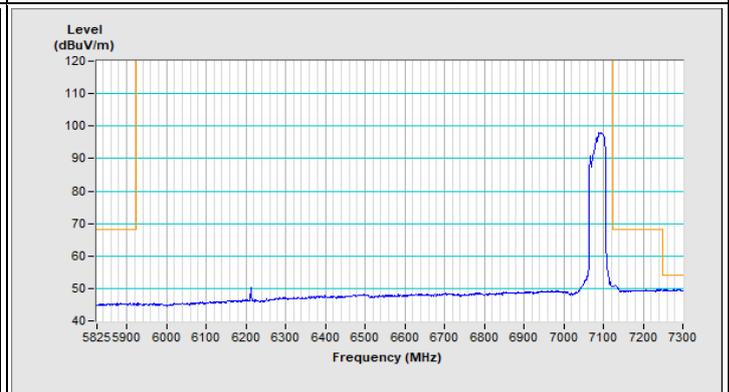


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

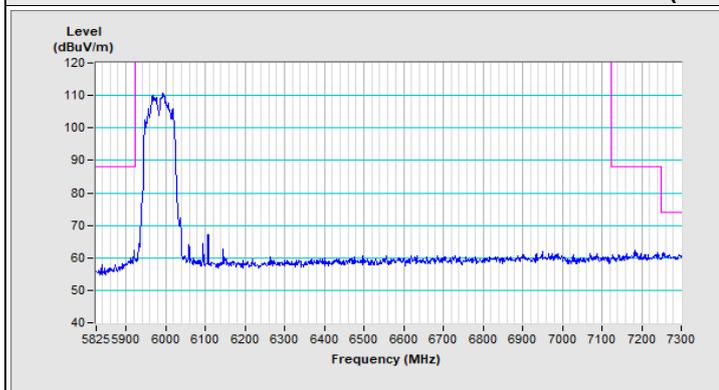


Horizontal (Peak)

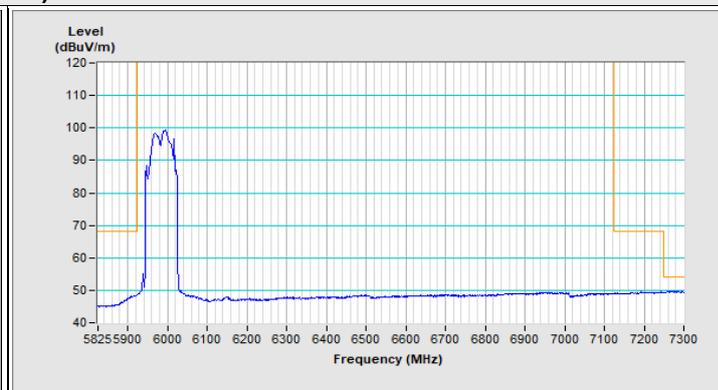

Horizontal (Average)

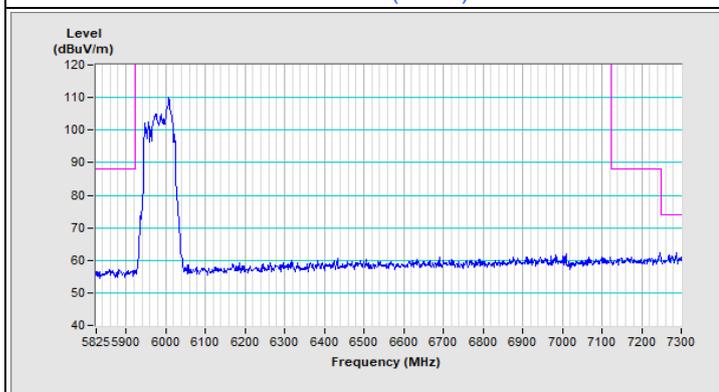


Vertical (Peak)

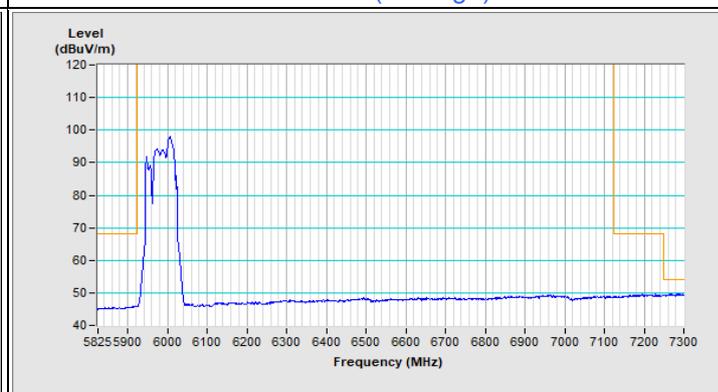


Vertical (Average)


802.11be (EHT80) Channel 215

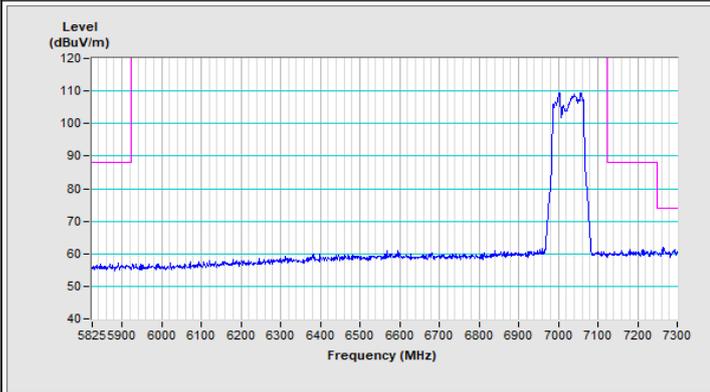


Horizontal (Peak)

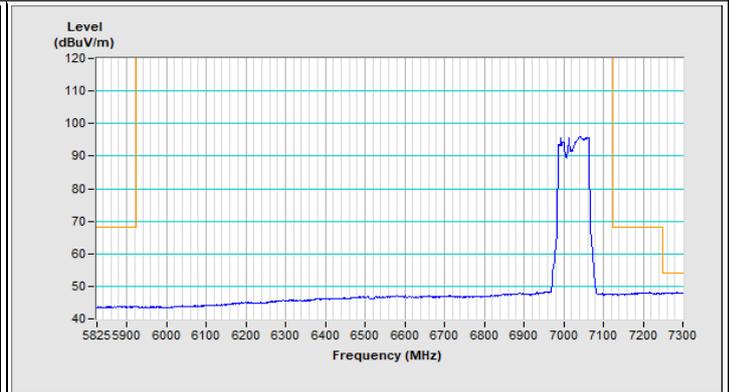

Horizontal (Average)

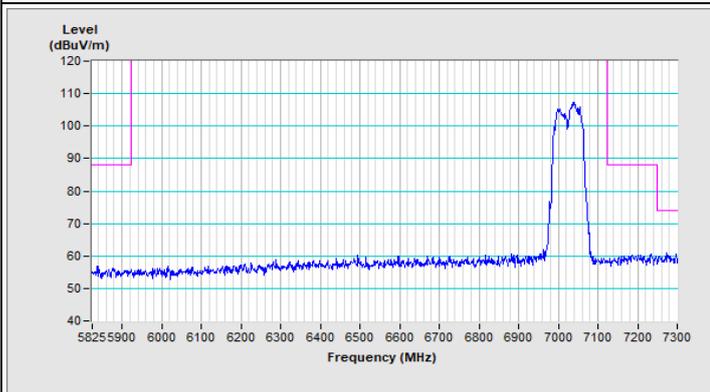


Vertical (Peak)

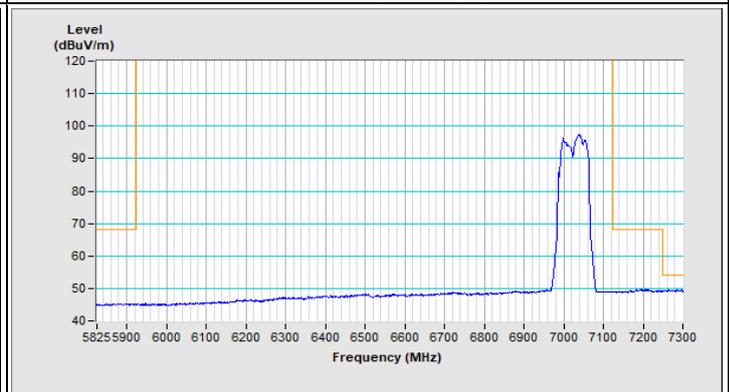


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

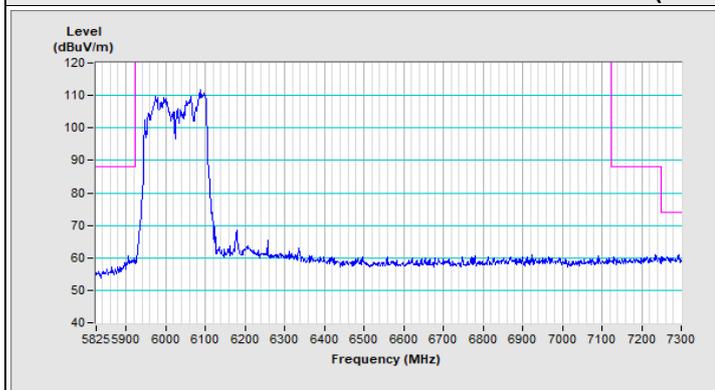


Horizontal (Peak)

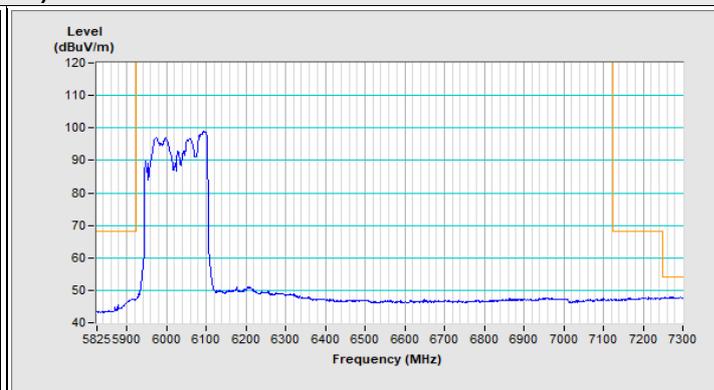

Horizontal (Average)

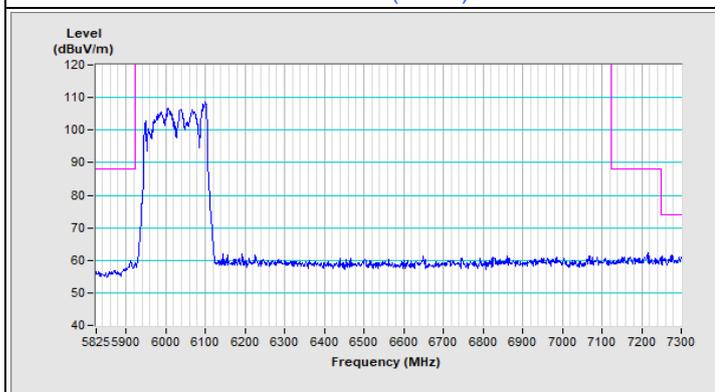


Vertical (Peak)

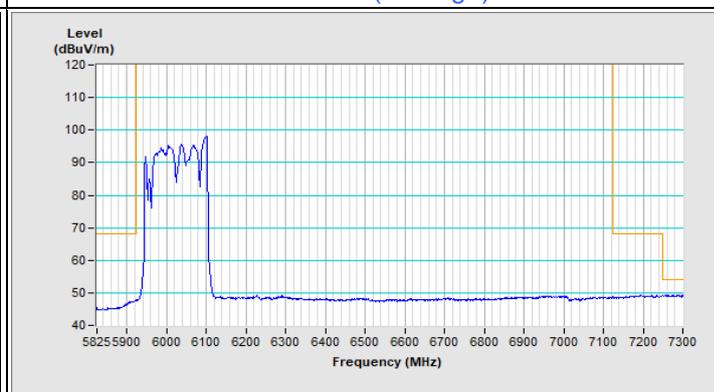


Vertical (Average)


802.11be (EHT160) Channel 207

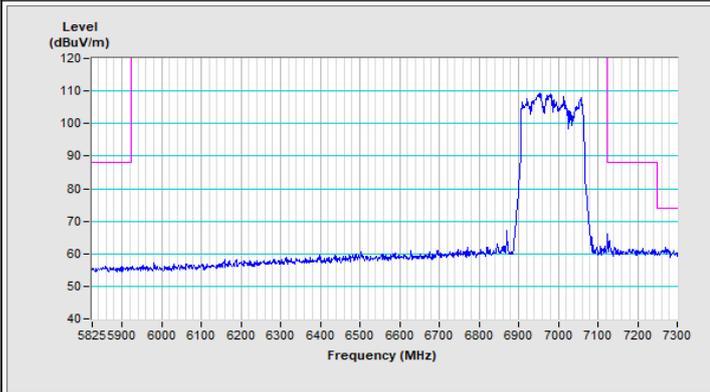


Horizontal (Peak)

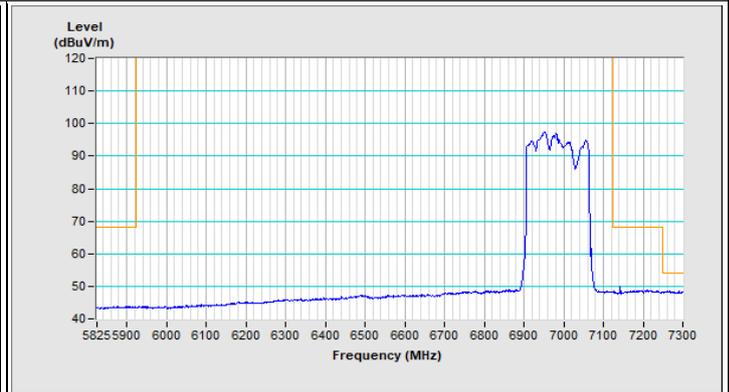

Horizontal (Average)

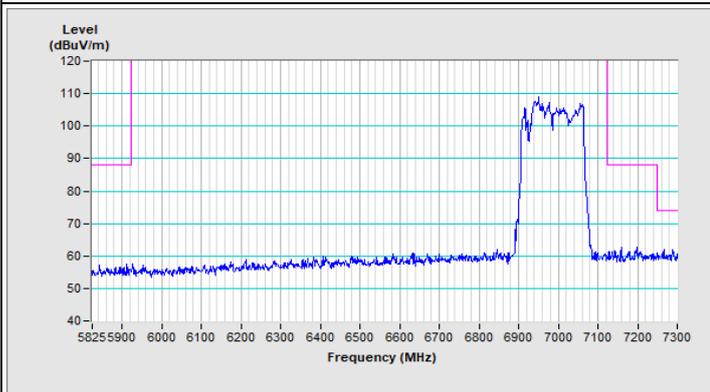


Vertical (Peak)

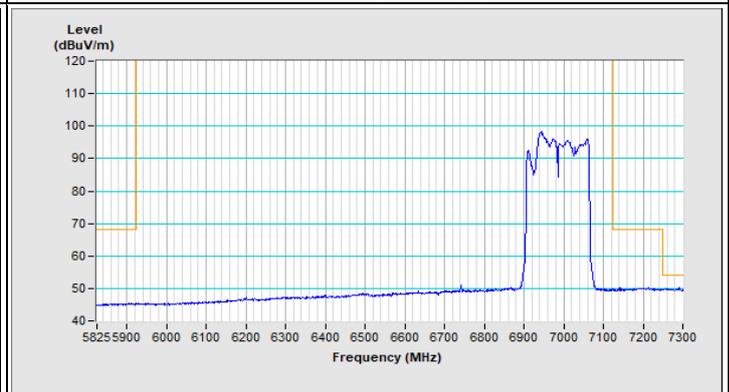


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

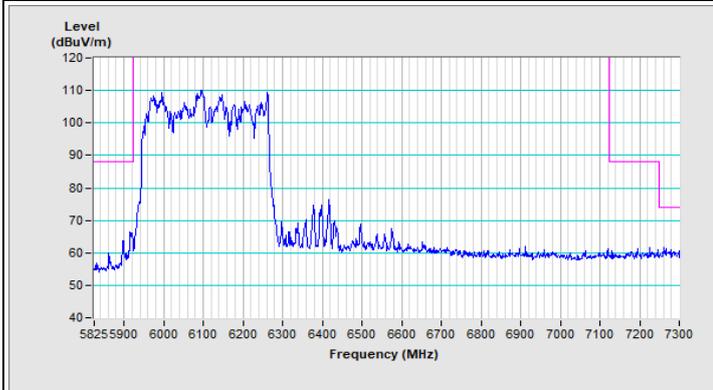


Horizontal (Peak)

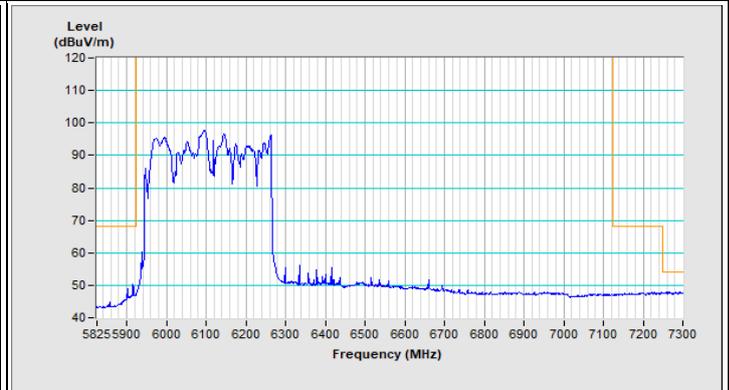

Horizontal (Average)

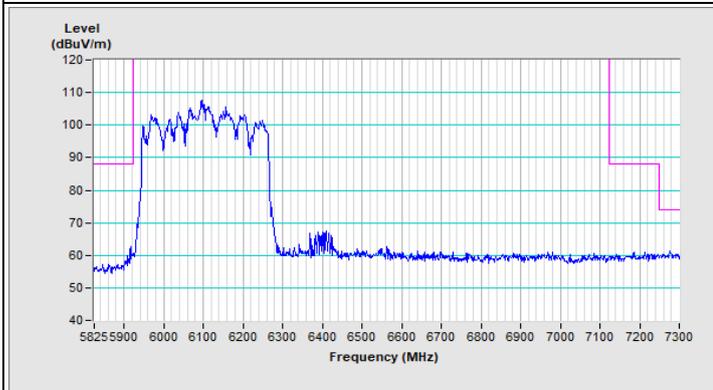


Vertical (Peak)

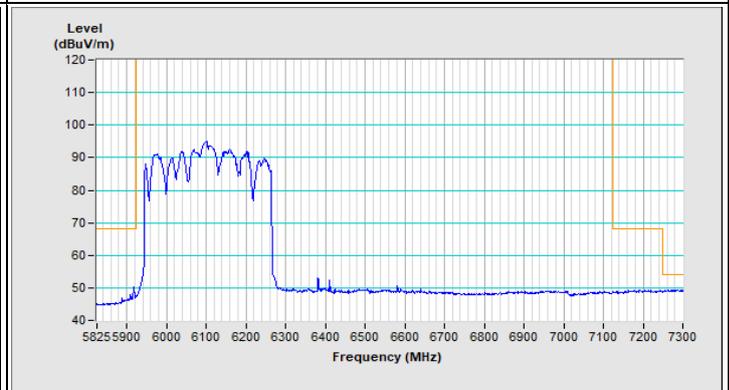


Vertical (Average)


802.11be (EHT320) Channel 191

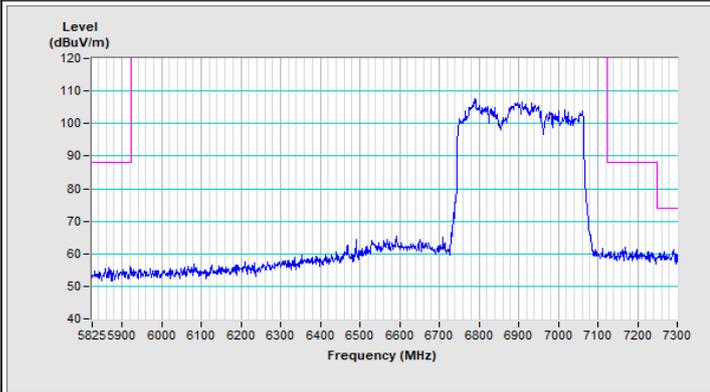


Horizontal (Peak)

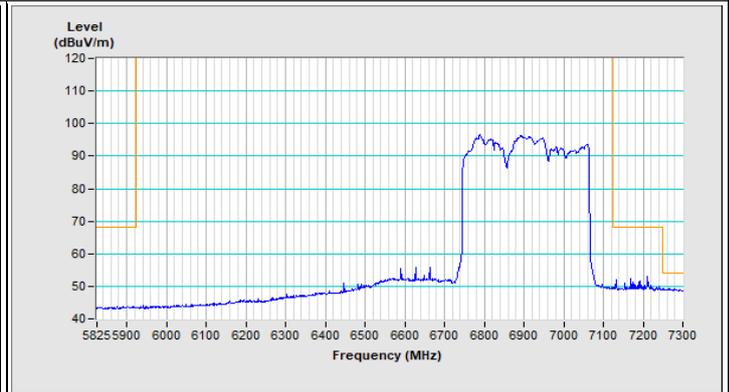

Horizontal (Average)

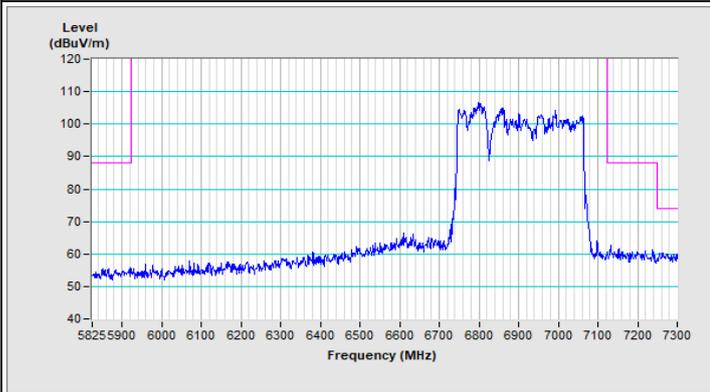

Vertical (Peak)

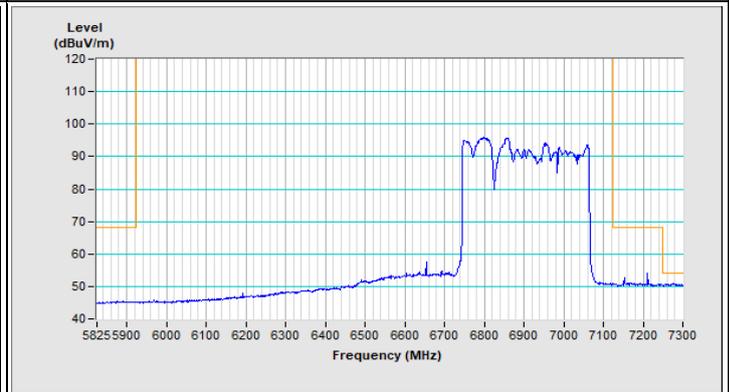

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---