

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBEIH-WTW-P25030743-4

**FCC ID:** P27-TMOG5SE

**Product:** T-Mobile 5G Gateway

**Brand:** T-Mobile

**Model No.:** TMO-G5SE

**Received Date:** 2025/4/1

**Test Date:** 2025/4/18 ~ 2025/5/26

**Issued Date:** 2025/6/11

**Applicant:** Sercomm Corp.

**Address:** 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location(1):** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location(2):** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

**Test Location(3):** No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

**FCC Registration / Test Location:**

**Designation Number:** 198487 / TW2021 for Test Location(1)  
788550 / TW0003 for Test Location(2)  
281270 / TW0032 for Test Location(3)

Approved by: \_\_\_\_\_

*Jeremy Lin*

Jeremy Lin / Project Engineer

, Date: \_\_\_\_\_

2025/6/11

This test report consists of 60 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate.....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	8
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions .....	12
3.7 Connection Diagram of EUT and Peripheral Devices .....	12
3.8 Configuration of Peripheral Devices and Cable Connections .....	12
<b>4 Test Instruments .....</b>	<b>13</b>
4.1 RF Output Power .....	13
4.2 Power Spectral Density .....	13
4.3 6 dB Bandwidth .....	13
4.4 Conducted Out of Band Emissions .....	13
4.5 AC Power Conducted Emissions .....	14
4.6 Unwanted Emissions below 1 GHz .....	15
4.7 Unwanted Emissions above 1 GHz.....	16
<b>5 Limits of Test Items.....</b>	<b>17</b>
5.1 RF Output Power .....	17
5.2 Power Spectral Density .....	17
5.3 6 dB Bandwidth .....	17
5.4 Conducted Out of Band Emissions .....	17
5.5 AC Power Conducted Emissions .....	17
5.6 Unwanted Emissions below 1 GHz .....	17
5.7 Unwanted Emissions above 1 GHz.....	18
<b>6 Test Arrangements.....</b>	<b>19</b>
6.1 RF Output Power .....	19
6.1.1 Test Setup .....	19
6.1.2 Test Procedure.....	19
6.2 Power Spectral Density .....	19
6.2.1 Test Setup .....	19
6.2.2 Test Procedure.....	19
6.3 6 dB Bandwidth .....	20
6.3.1 Test Setup .....	20
6.3.2 Test Procedure.....	20
6.4 Conducted Out of Band Emissions .....	20
6.4.1 Test Setup .....	20
6.4.2 Test Procedure.....	20
6.5 AC Power Conducted Emissions .....	21
6.5.1 Test Setup .....	21
6.5.2 Test Procedure.....	21
6.6 Unwanted Emissions below 1 GHz .....	22
6.6.1 Test Setup .....	22
6.6.2 Test Procedure.....	23
6.7 Unwanted Emissions above 1 GHz.....	24
6.7.1 Test Setup .....	24
6.7.2 Test Procedure.....	24
<b>7 Test Results of Test Item .....</b>	<b>25</b>



7.1	RF Output Power .....	25
7.2	Power Spectral Density .....	27
7.3	6 dB Bandwidth .....	29
7.4	Conducted Out of Band Emissions .....	31
7.5	AC Power Conducted Emissions .....	35
7.6	Unwanted Emissions below 1 GHz .....	37
7.7	Unwanted Emissions above 1 GHz.....	39
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>59</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>60</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P25030743-4	Original release.	2025/6/11

## 1 Certificate

**Product:** T-Mobile 5G Gateway  
**Brand:** T-Mobile  
**Test Model:** TMO-G5SE  
**Sample Status:** Engineering sample  
**Applicant:** Sercomm Corp.  
**Test Date:** 2025/4/18 ~ 2025/5/26  
**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Measurement procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -5.96 dB at 0.42200 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.4 dB at 31.94 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -1.0 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is U.FL not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.7 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	T-Mobile 5G Gateway
Brand	T-Mobile
Test Model	TMO-G5SE
Status of EUT	Engineering sample
Power Supply Rating	20Vdc, 3.0A, 60W
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	125k, 500k, 1M, 2M
Operating Frequency	2.402 GHz ~ 2.48 GHz
Number of Channel	40
Output Power	61.944 mW (17.92 dBm)

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
Adapter 1	MASS POWER	PD065E-D1C0AVU	AC Input : 100-240V, 50/60Hz, 1.5A DC Output : 5.0V, 3.0A or 9.0V, 3.0A or 12.0V, 3.0A or 15.0, 3.0A or 20.0V, 3.0A DC Cable : 1.8m non-shielded
Adapter 2	MOSO	P30-V3000R200-060Q0-US	AC Input : 100-240V, 50/60Hz, 1.7A DC Output : 5V, 3A or 9V, 3A or 12V, 3A or 15, 3A or 20V, 3A DC Cable : 1.8m non-shielded
Adapter 3	Sercomm	PU60W200ULW18-ECY-00	AC Input : 100-240V, 50/60Hz, 1.3A DC Output : 5.0V, 3.0A, 15W or 9.0V, 3.0A, 27W or 12.0V, 3.0A, 36W or 15.0, 3.0A, 45W or 20.0V, 3.0A, 60W DC Cable : 1.8m non-shielded

2. Two Bluetooth modules provided to the EUT, please refer to the following table:

No.	Model	Function
1	EFR32BG21A020F512IM32	BT-LE
2	EFR32MG21A020F512IM32	BT-LE, Zigbee, Thread, Matter

3. There are Bluetooth, Zigbee, Thread, Matter, WWAN (WCDMA/LTE/5G NR) and WLAN (2.4 GHz/ 5 GHz/ 6 GHz) technology used for the EUT.

4. Simultaneously transmission combination.

Combination	Technology					
	WLAN (2.4 GHz)	WLAN (5 GHz)	WLAN (6 GHz)	WWAN	BT-LE (EFR32BG21A020F512IM32)	Zigbee (EFR32MG21A020F512IM32)
1						

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The EUT support OFDMA but doesn't support Partial RU mode.

6. Contains Module FCC ID: P27-TMOG5SEM

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Antenna Description of EUT

The antenna information is listed as below.

Function	Antenna Gain (dBi)	Antenna Type	Connector Type
BT-LE	5.36	Dipole	U.FL

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

### 3.3 Channel List

40 channels are provided for BT-LE (125K, 500K, 1M):

Channel	Frequency (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

38 channels are provided for BT-LE (2M):

Channel	Frequency (MHz)						
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460		
10	2422	20	2442	30	2462		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT has PD065E-D1C0AVU/ P30-V3000R200-060Q0-US/ PU60W200ULW18-ECY-00 adpter mode of power supply.Pre-scan these modes and find the worst charging case as a representative test condition.
Worst Case:	1. PD065E-D1C0AVU/ P30-V3000R200-060Q0-US/ PU60W200ULW18-ECY-00 adapter worse condition: PD065E-D1C0AVU.

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	1, 19, 38	GFSK	2Mb/s
Power Spectral Density	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	1, 19, 38	GFSK	2Mb/s
6 dB Bandwidth / Conducted Out of Band Emissions	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	1, 19, 38	GFSK	2Mb/s
AC Power Conducted Emissions	BT-LE 2M	19	GFSK	2Mb/s
Unwanted Emissions below 1 GHz	BT-LE 2M	19	GFSK	2Mb/s
Unwanted Emissions above 1 GHz	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	1, 19, 38	GFSK	2Mb/s


### 3.5 Duty Cycle of Test Signal

**BT-LE 1M:** Duty cycle =  $0.421 \text{ ms} / 0.625 \text{ ms} \times 100\% = 67.4\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 1.72 \text{ dB}$


**BT-LE 2M:** Duty cycle =  $0.236 \text{ ms} / 0.625 \text{ ms} \times 100\% = 37.8\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 4.23 \text{ dB}$

**BT-LE 125k:** Duty cycle =  $3.131 \text{ ms} / 3.749 \text{ ms} \times 100\% = 83.5\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 0.78 \text{ dB}$


**BT-LE 500k:** Duty cycle =  $1.099 \text{ ms} / 1.876 \text{ ms} \times 100\% = 58.6\%$ , duty factor =  $10 * \log (1/\text{Duty cycle}) = 2.32 \text{ dB}$

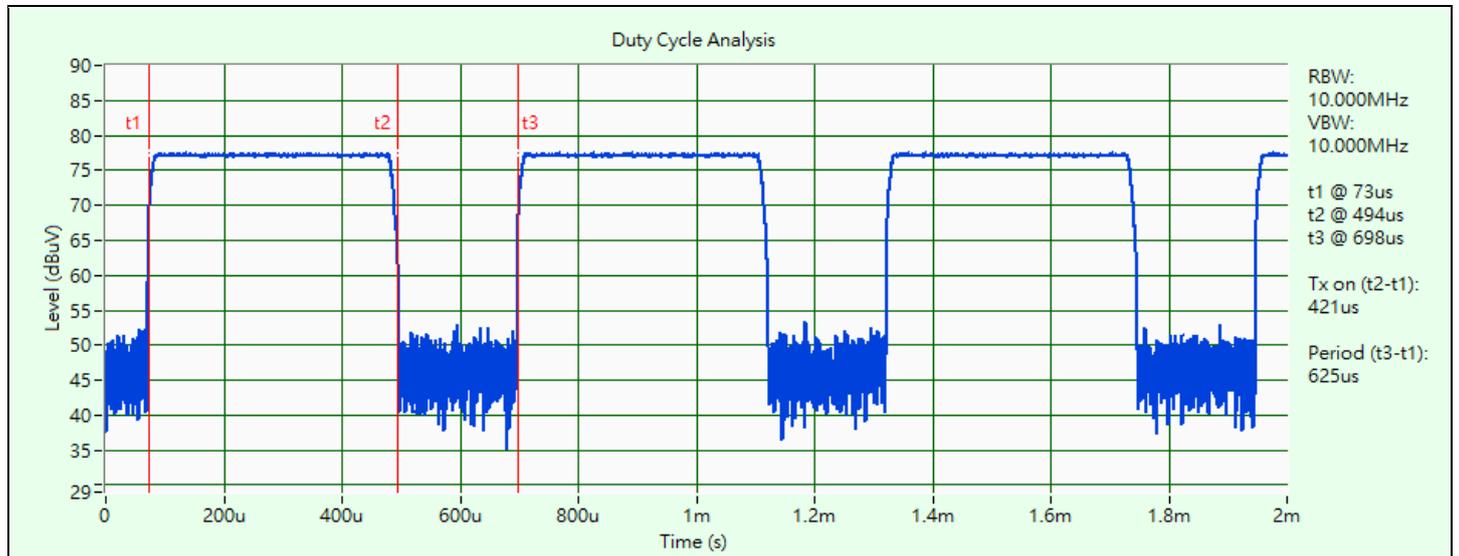


BT-LE 1M

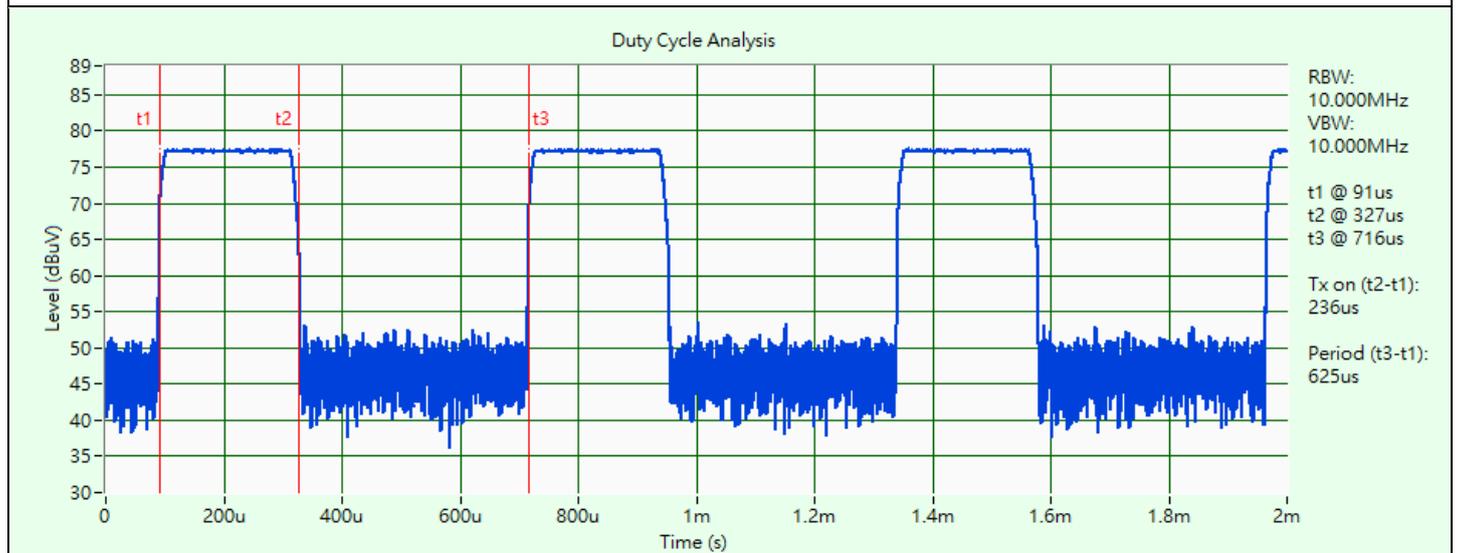

BT-LE 2M

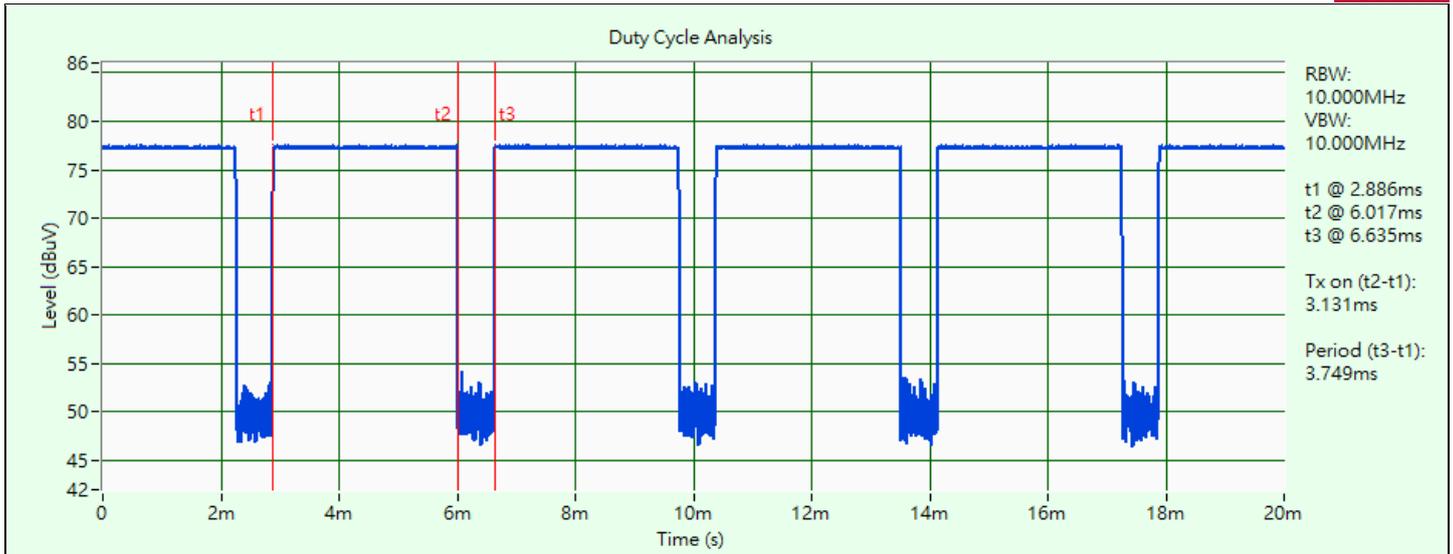

BT-LE 125k

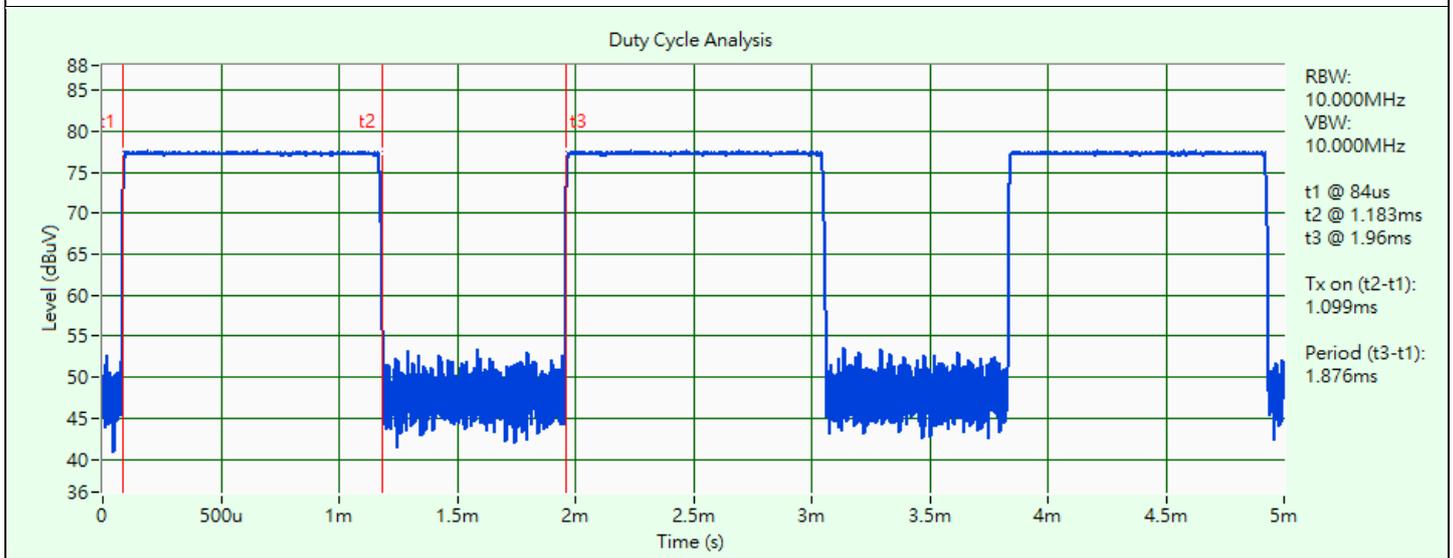


BT-LE 500k

### 3.6 Test Program Used and Operation Descriptions

Controlling software (Tera Term v4.8) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

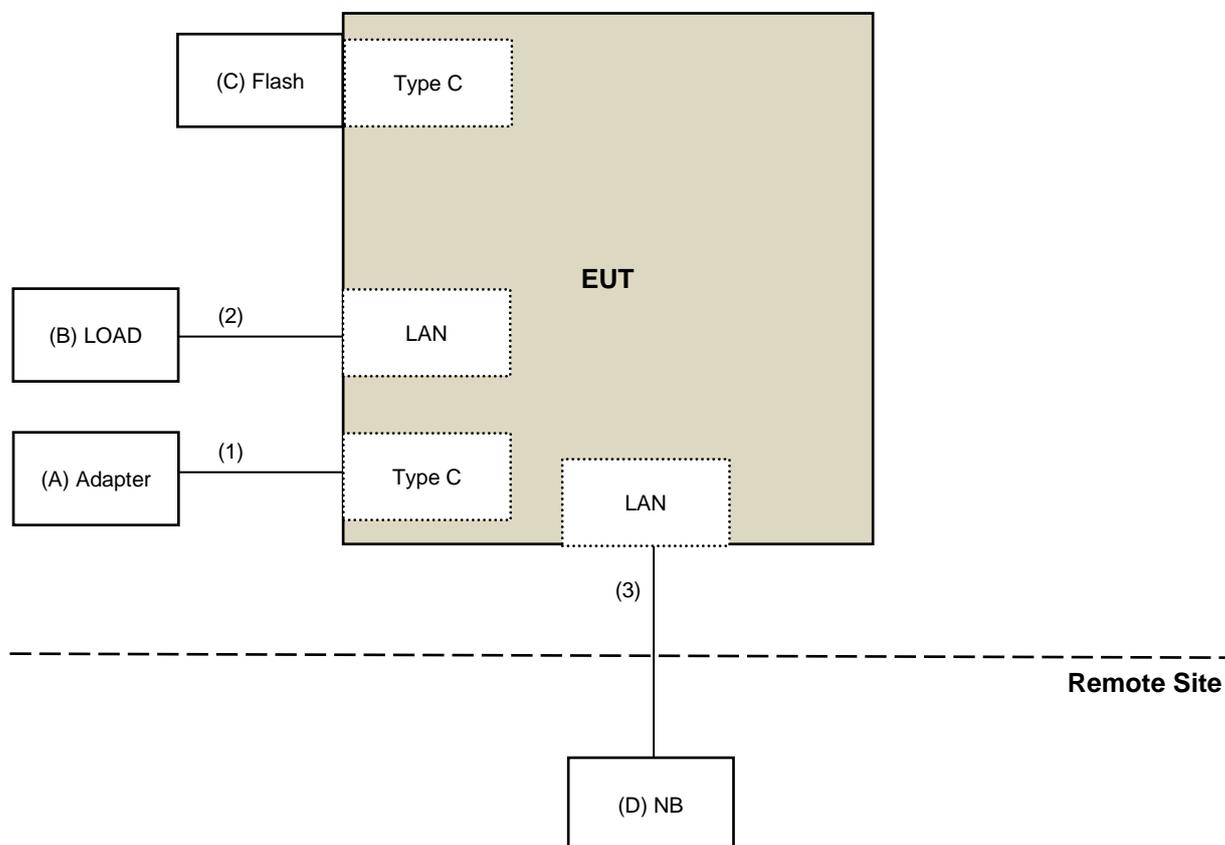

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	MASSPOWER	PD065E-D1C0AVU	N/A	N/A	Supplied by applicant
B	LOAD	BV	BV	N/A	N/A	Provided by Lab
C	Flash	SanDisk	32GB	N/A	N/A	Provided by Lab
D	NB	Lenovo	IdeaPad 5 15ITL05	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC cable	1	1.8	N	0	Supplied by applicant
2	LAN cable	1	1.8	N	0	Provided by Lab
3	LAN cable	1	10	N	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Solvang Technology	STI02-3310-10	STI02-3310-10_013	2024/6/19	2025/6/18
Pulse Power Sensor Anritsu	MA2411B	1339443	2024/5/24	2025/5/23
RF Power Meter Anritsu	ML2495A	1529002	2024/6/7	2025/6/6
USB Wideband Power Sensor Keysight	U2021XA	U2021XA_001	2024/6/7	2025/6/6

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/5/15

### 4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Solvang Technology	STI02-3310-10	STI02-3310-10_013	2024/6/19	2025/6/18
PXA Signal Analyzer Keysight	N9030A	MY54490260	2024/7/17	2025/7/16
Signal Analyzer R&S	FSV40	101042	2024/9/12	2025/9/11
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/5/15

### 4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

#### 4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2024/11/28	2025/11/27
	E1-011280	05	2024/11/28	2025/11/27
	E1-011311	09	2024/11/28	2025/11/27
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2024/11/5	2025/11/4
EMI Test Receiver R&S	ESCI	100613	2024/11/25	2025/11/24
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2025/1/5	2026/1/4
LISN R&S	ENV216	101826	2025/3/24	2026/3/23
	ESH3-Z5	100311	2024/9/5	2025/9/4
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2025/1/5	2026/1/4
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2024/8/28	2025/8/27

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2025/4/18

#### 4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1214	2024/10/15	2025/10/14
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier EMCI	EMC330N	980798	2025/1/14	2026/1/13
RF Coaxial Cable EMCI	EMCCFD400-NM-NM- 500	201248	2025/1/14	2026/1/13
	EMCCFD400-NM-NM- 3000	201249	2025/1/14	2026/1/13
	EMCCFD400-NM-NM- 9000	201251(with PAD)	2025/1/14	2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2025/5/6 ~ 2025/5/26

#### 4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Horn Antenna RFSPIN	DRH18-E	210104A18E	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier Agilent	83017A	MY39501357	2024/6/12	2025/6/11
Preamplifier EMCI	EMC184045SE	980788	2025/1/14	2026/1/13
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2025/1/14	2026/1/13
	EMC101G-KM-KM-3000	201258	2025/1/14	2026/1/13
	EMC101G-KM-KM-5000	201261	2025/1/14	2026/1/13
	EMC104-SM-SM-1000	210103	2025/1/14	2026/1/13
	EMC104-SM-SM-3000	201241	2025/1/14	2026/1/13
	EMC104-SM-SM-9000	201244	2025/1/14	2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2025/4/23 ~ 2025/5/14

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


### Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

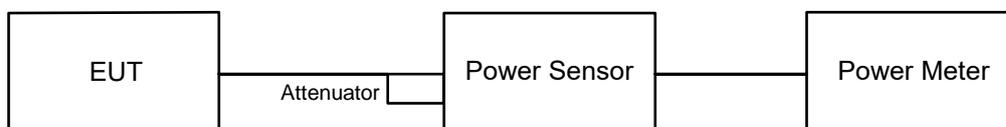

#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup

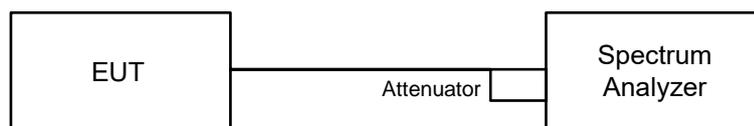


#### 6.2.2 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: 3 kHz.
- d. Set the VBW  $\geq 3 \times$  RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup

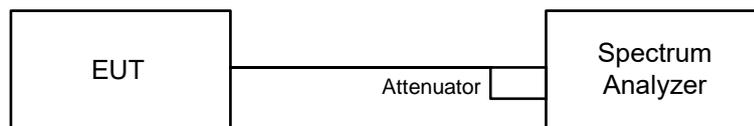

#### 6.3.2 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz.
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup



#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- a. Set the RBW = 100 kHz.
- b. Set the VBW  $\geq 300$  kHz.
- c. Detector = peak.
- d. Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- a. Set RBW = 100 kHz.
- b. Set VBW  $\geq 300$  kHz.
- c. Detector = peak.
- d. Sweep = auto couple.
- e. Trace Mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

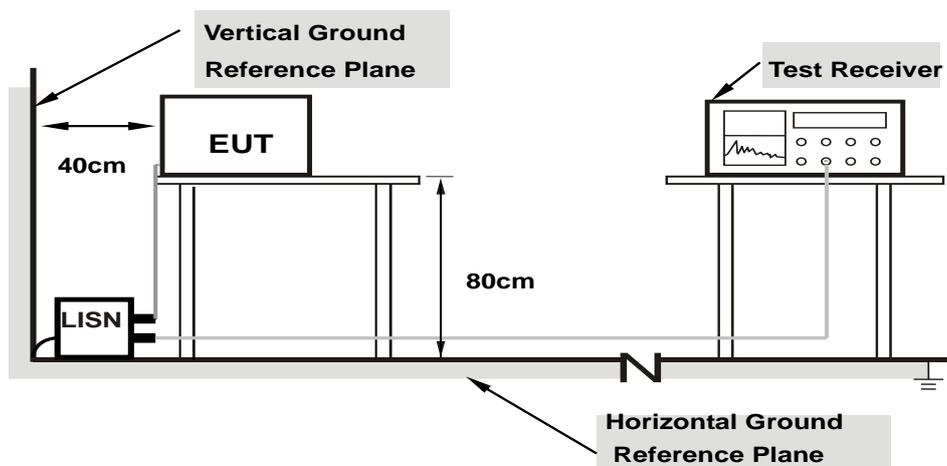

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

#### For Radiated emission below 30 MHz

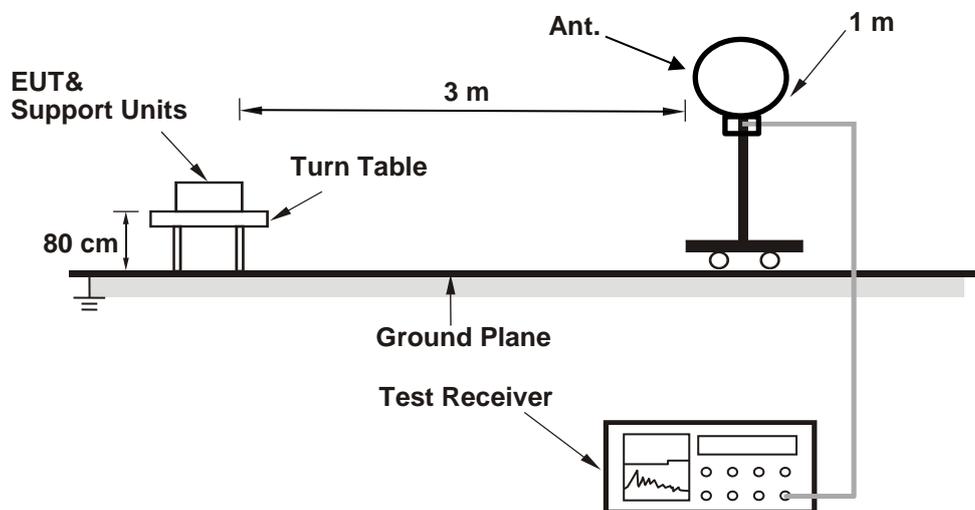

#### For Radiated emission above 30 MHz

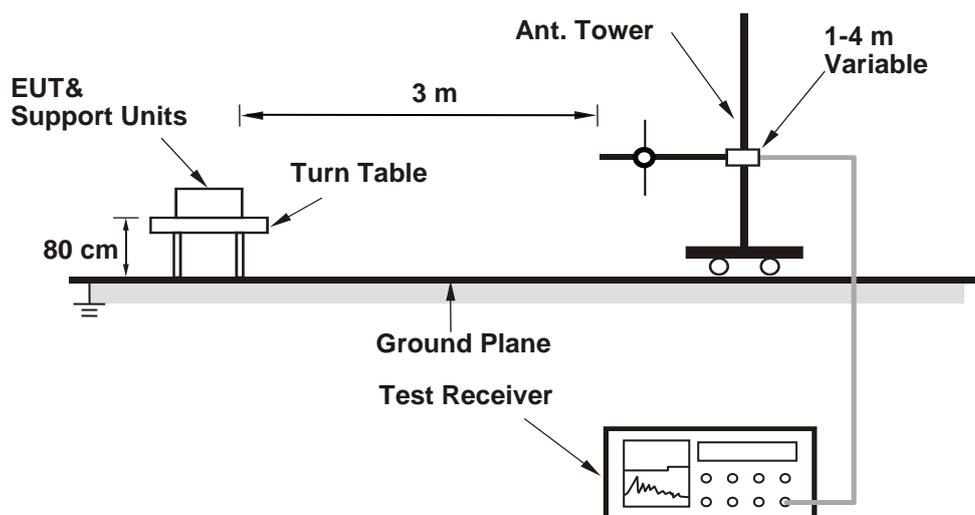

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

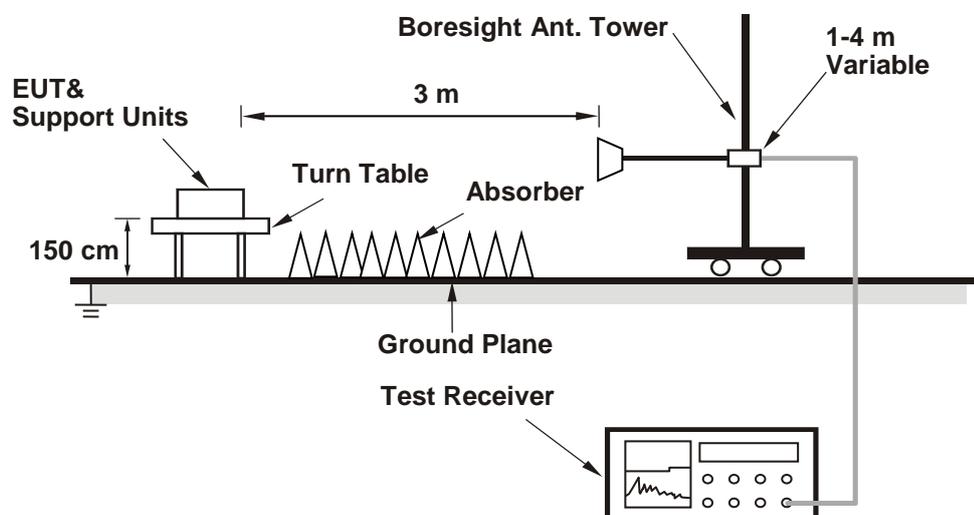

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver/spectrum analyzer was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

#### For Peak Power

##### BT-LE 1M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	50.466	17.03	30	Pass
19	2440	60.814	17.84	30	Pass
39	2480	42.855	16.32	30	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the output power limit shall not be reduced.

##### BT-LE 2M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
1	2404	51.168	17.09	30	Pass
19	2440	61.944	17.92	30	Pass
38	2478	54.075	17.33	30	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the output power limit shall not be reduced.

##### BT-LE 125k

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	23.014	13.62	30	Pass
19	2440	21.827	13.39	30	Pass
39	2480	22.029	13.43	30	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the output power limit shall not be reduced.

##### BT-LE 500k

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	23.067	13.63	30	Pass
19	2440	22.233	13.47	30	Pass
39	2480	22.284	13.48	30	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the output power limit shall not be reduced.

## For Average Power

### BT-LE 1M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	49.659	16.96
19	2440	60.395	17.81
39	2480	41.687	16.20

### BT-LE 2M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	50.003	16.99
19	2440	61.094	17.86
38	2478	52.966	17.24

### BT-LE 125k

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	22.594	13.54
19	2440	21.677	13.36
39	2480	21.627	13.35

### BT-LE 500k

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	22.699	13.56
19	2440	21.827	13.39
39	2480	21.928	13.41

## 7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

### BT-LE 1M

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	1.47	8	Pass
19	2440	2.45	8	Pass
39	2480	1.03	8	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the power density limit shall not be reduced.

### BT-LE 2M

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2404	2	8	Pass
19	2440	2.74	8	Pass
38	2478	1.6	8	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the power density limit shall not be reduced.

### BT-LE 125k

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	7.7	8	Pass
19	2440	7.06	8	Pass
39	2480	7.11	8	Pass

Note: The antenna gain is 5.36 dBi < 6 dBi, so the power density limit shall not be reduced.


### BT-LE 500k

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	7.18	8	Pass
19	2440	7.06	8	Pass
39	2480	7.14	8	Pass


Note: The antenna gain is 5.36 dBi < 6 dBi, so the power density limit shall not be reduced.




### Spectrum Plot of Maximum Value

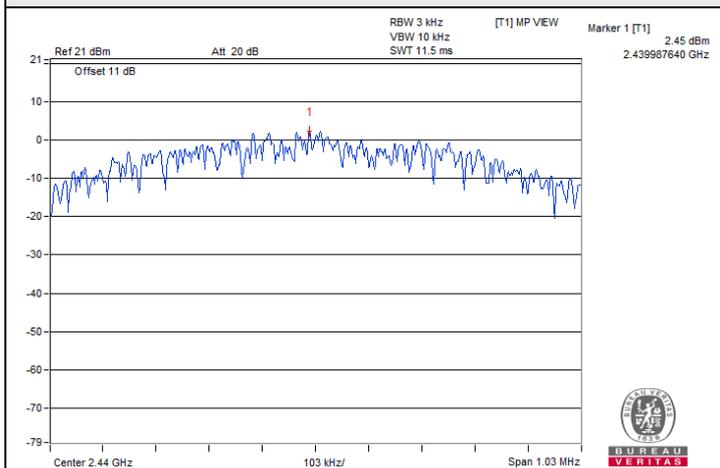


BT-LE 1M : CH 19

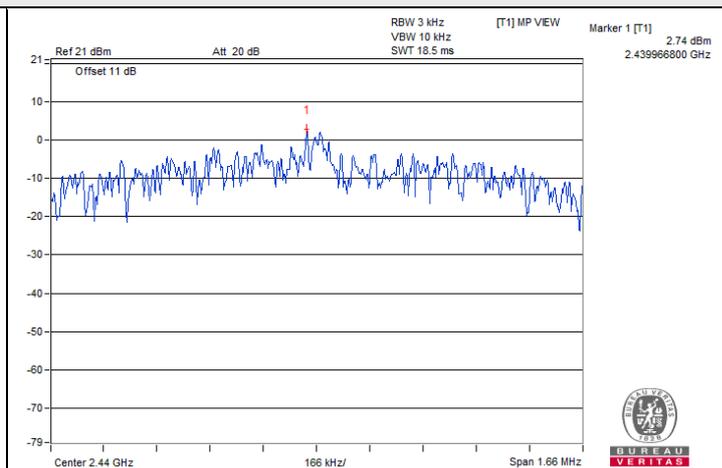

BT-LE 2M : CH 19

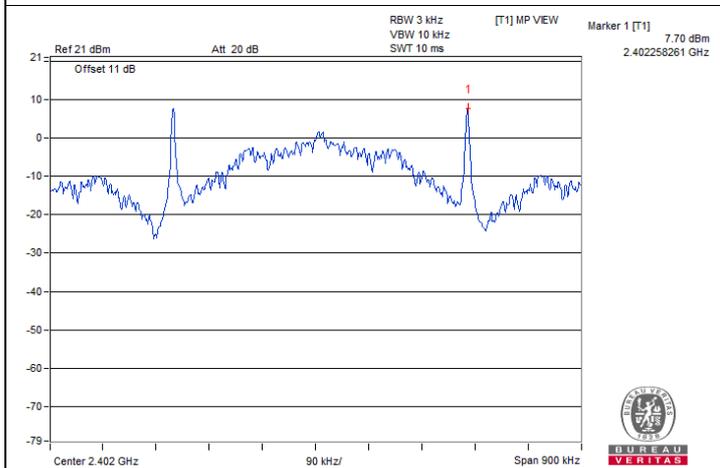

BT-LE 125k : CH 0

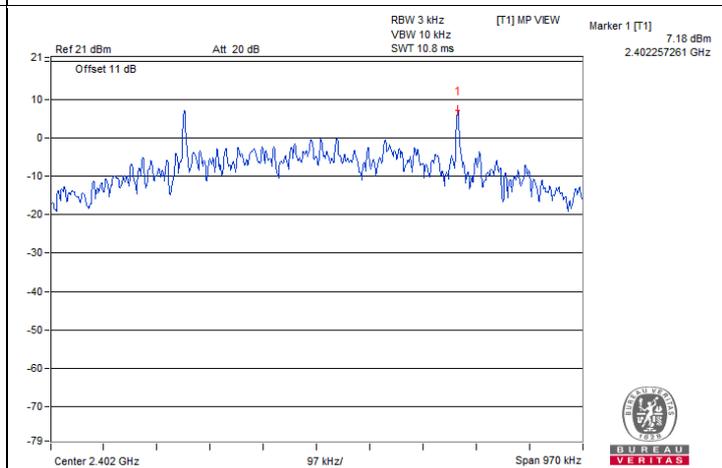

BT-LE 500k : CH 0

### 7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

#### BT-LE 1M

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.68	0.5	Pass
19	2440	0.69	0.5	Pass
39	2480	0.69	0.5	Pass

#### BT-LE 2M

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2404	1.1	0.5	Pass
19	2440	1.11	0.5	Pass
38	2478	1.1	0.5	Pass

#### BT-LE 125k





Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.6	0.5	Pass
19	2440	0.6	0.5	Pass
39	2480	0.6	0.5	Pass

#### BT-LE 500k

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.65	0.5	Pass
19	2440	0.65	0.5	Pass
39	2480	0.65	0.5	Pass




### Spectrum Plot of Minimum Value

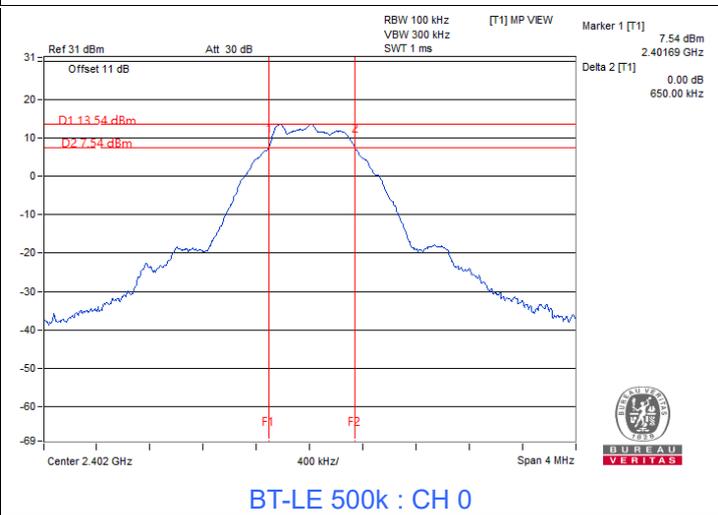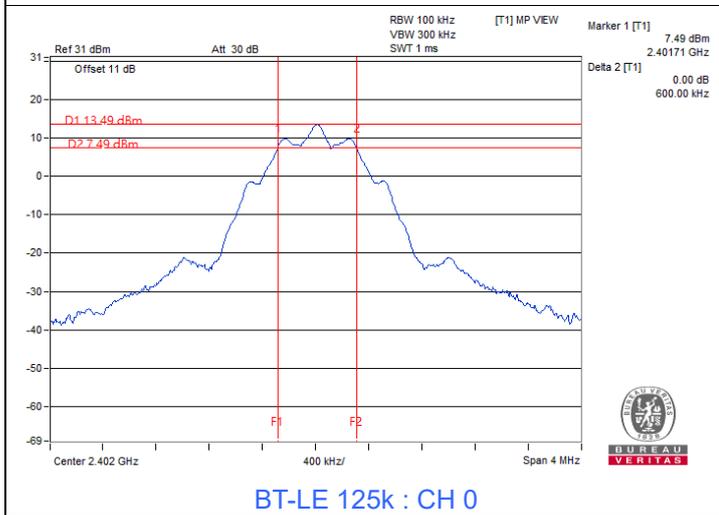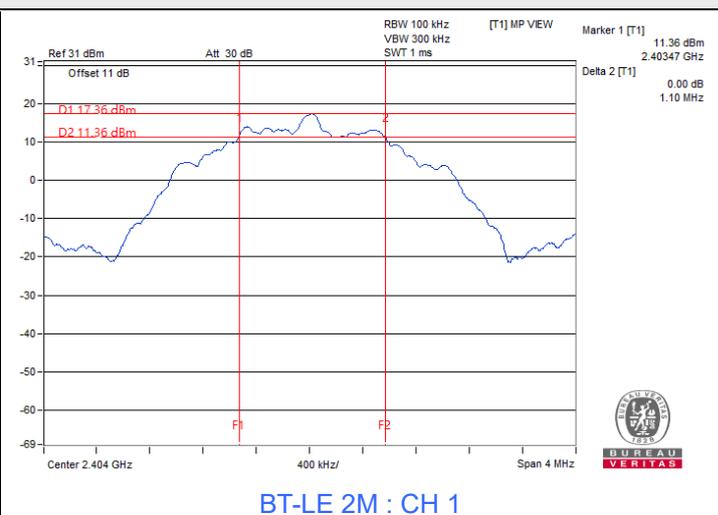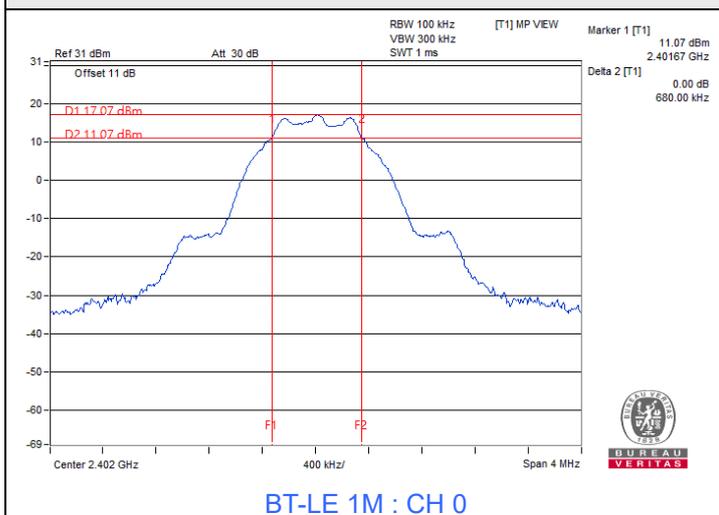

### 7.4 Conducted Out of Band Emissions


Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

#### BT-LE 1M

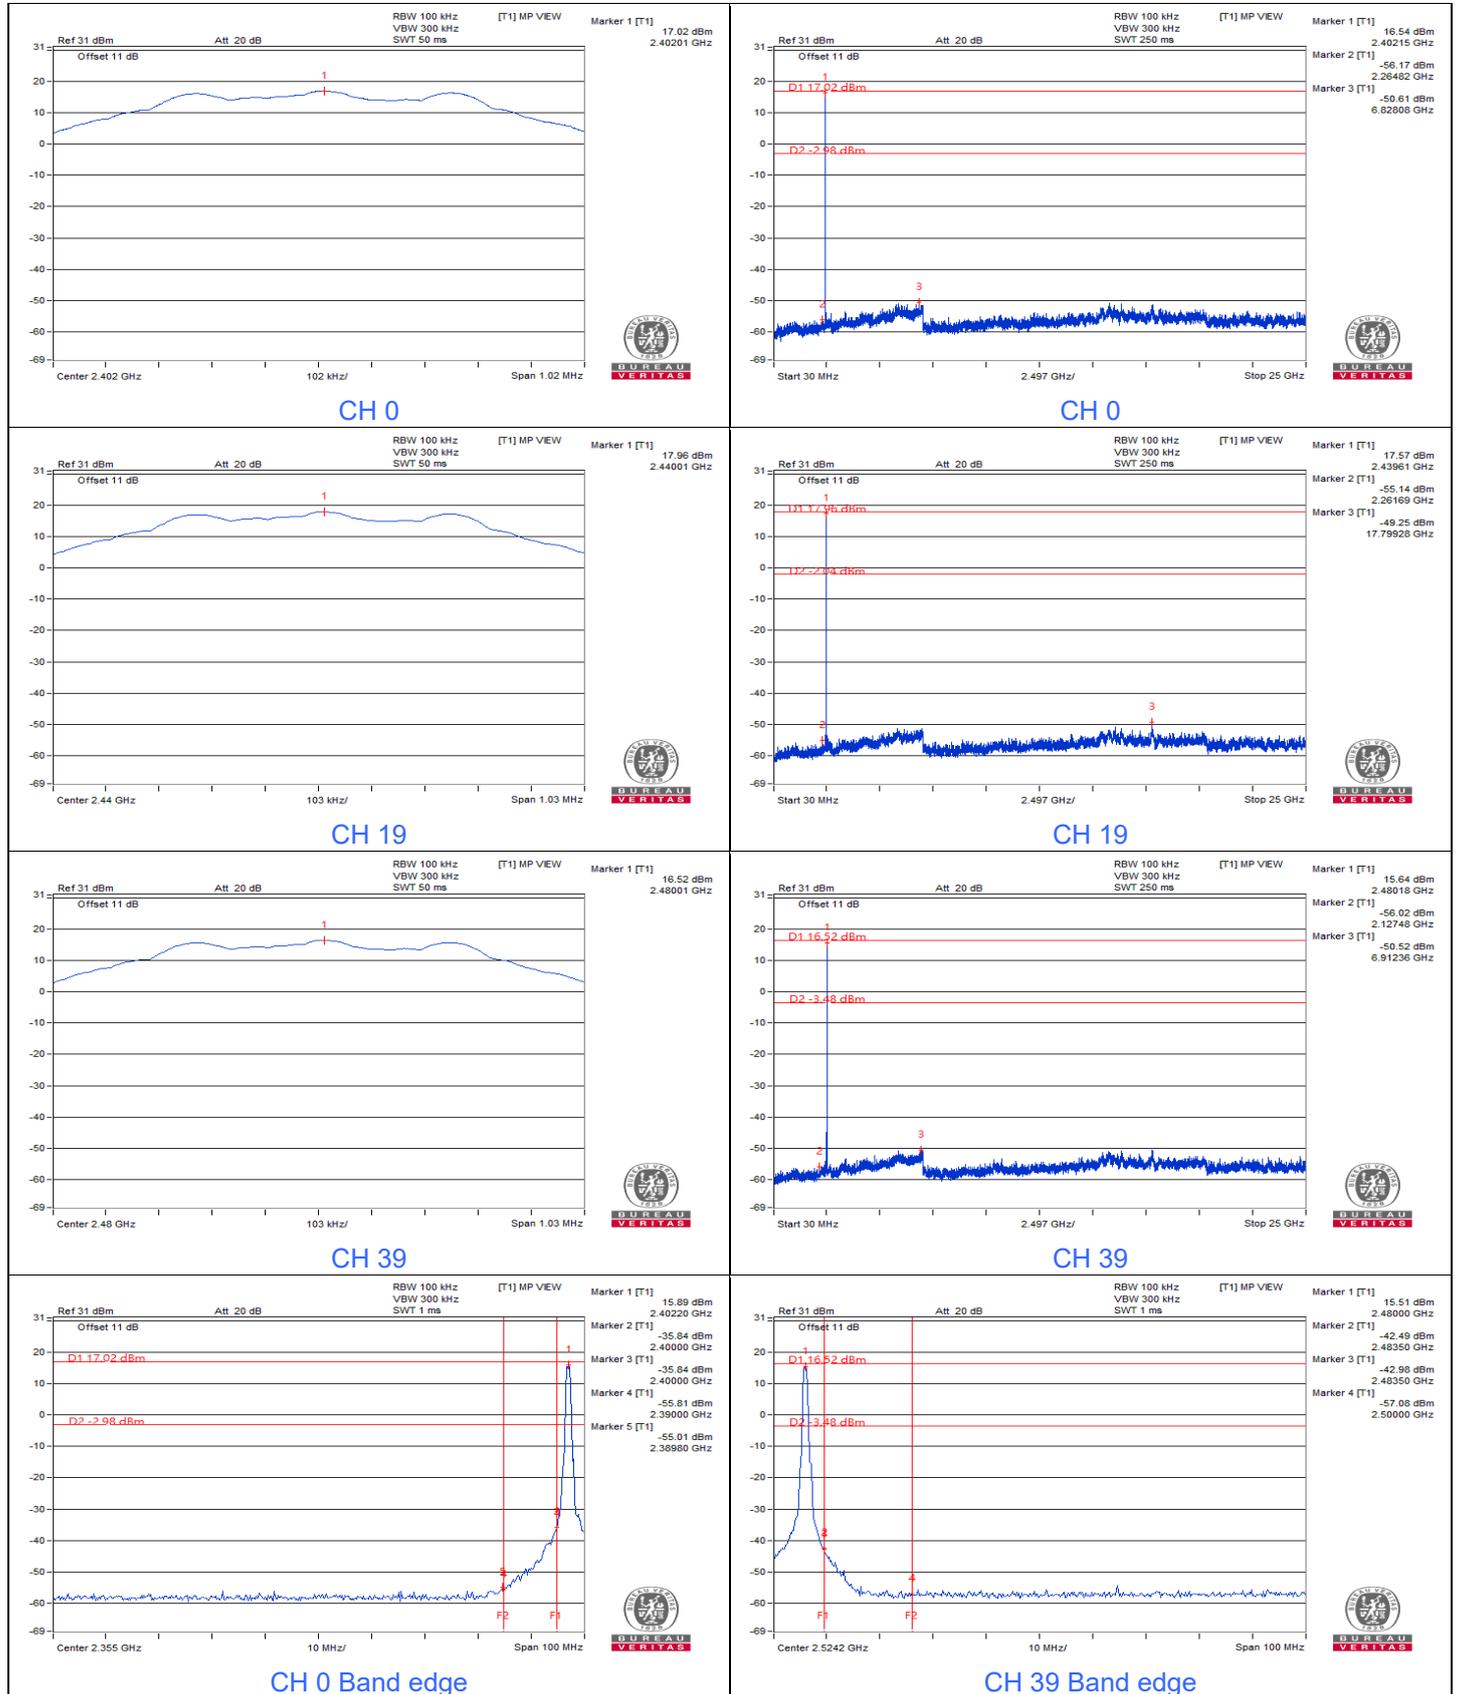




BT-LE 2M

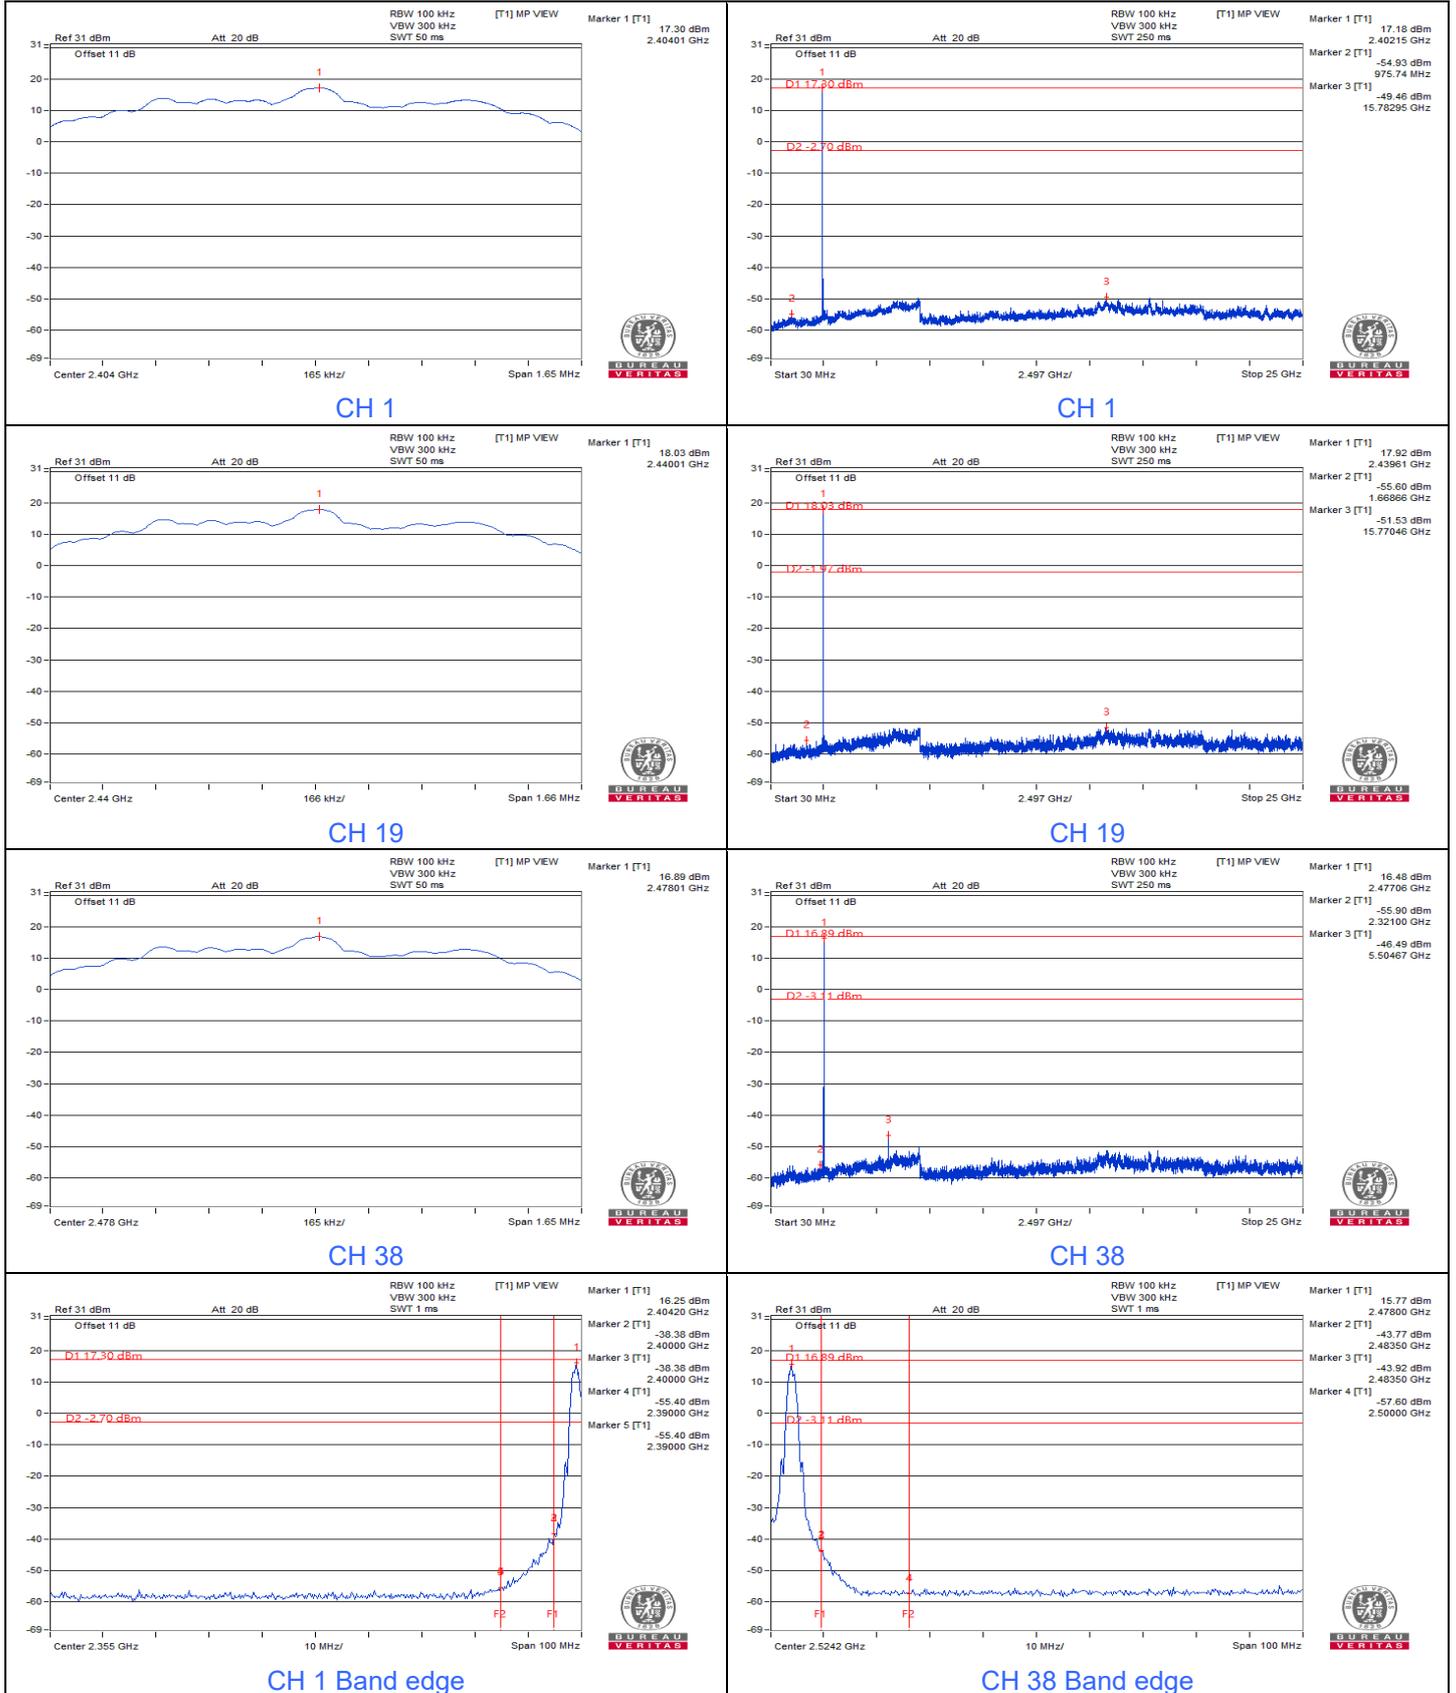




BT-LE 125k

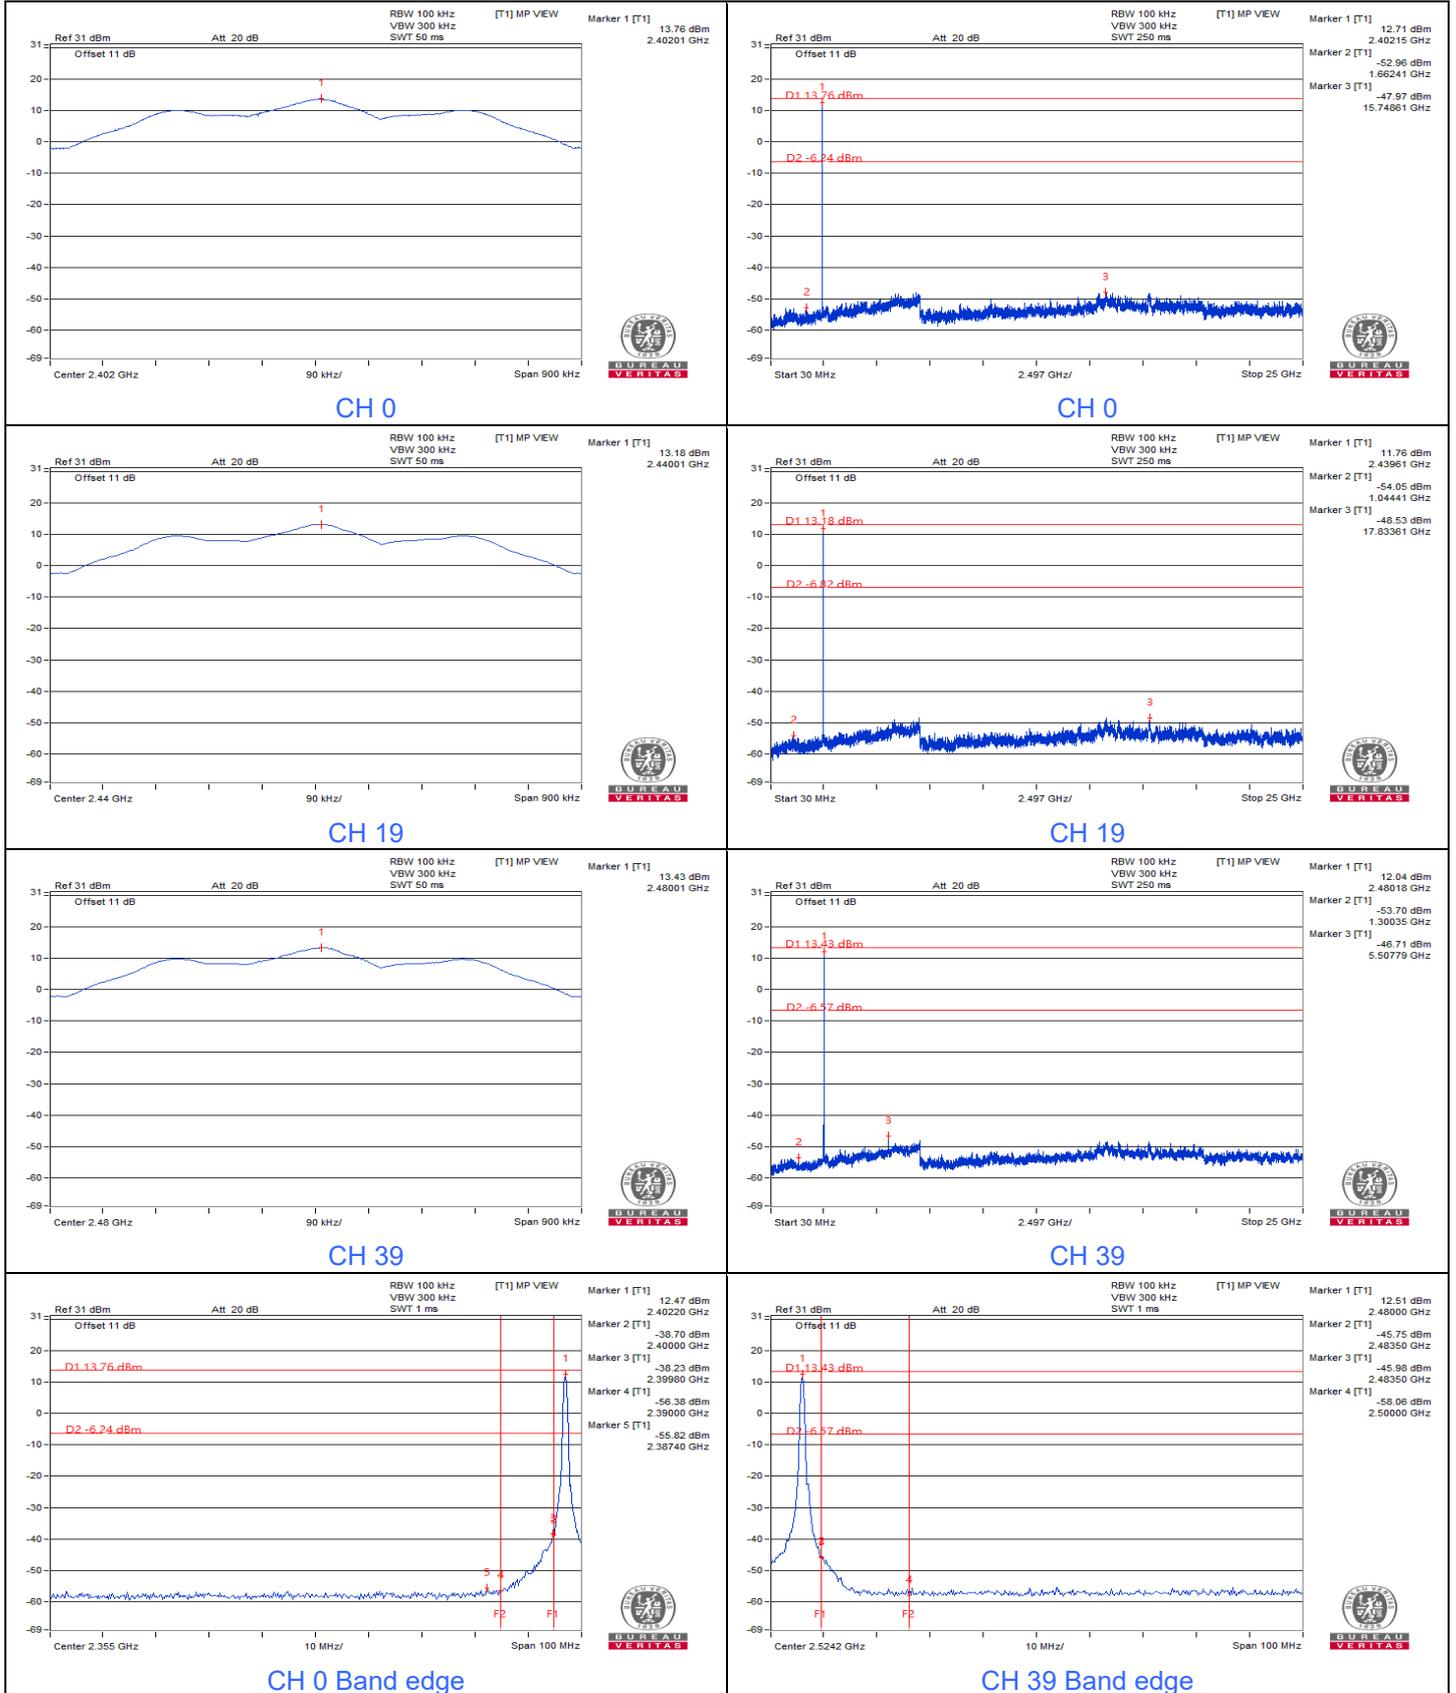



BT-LE 500k

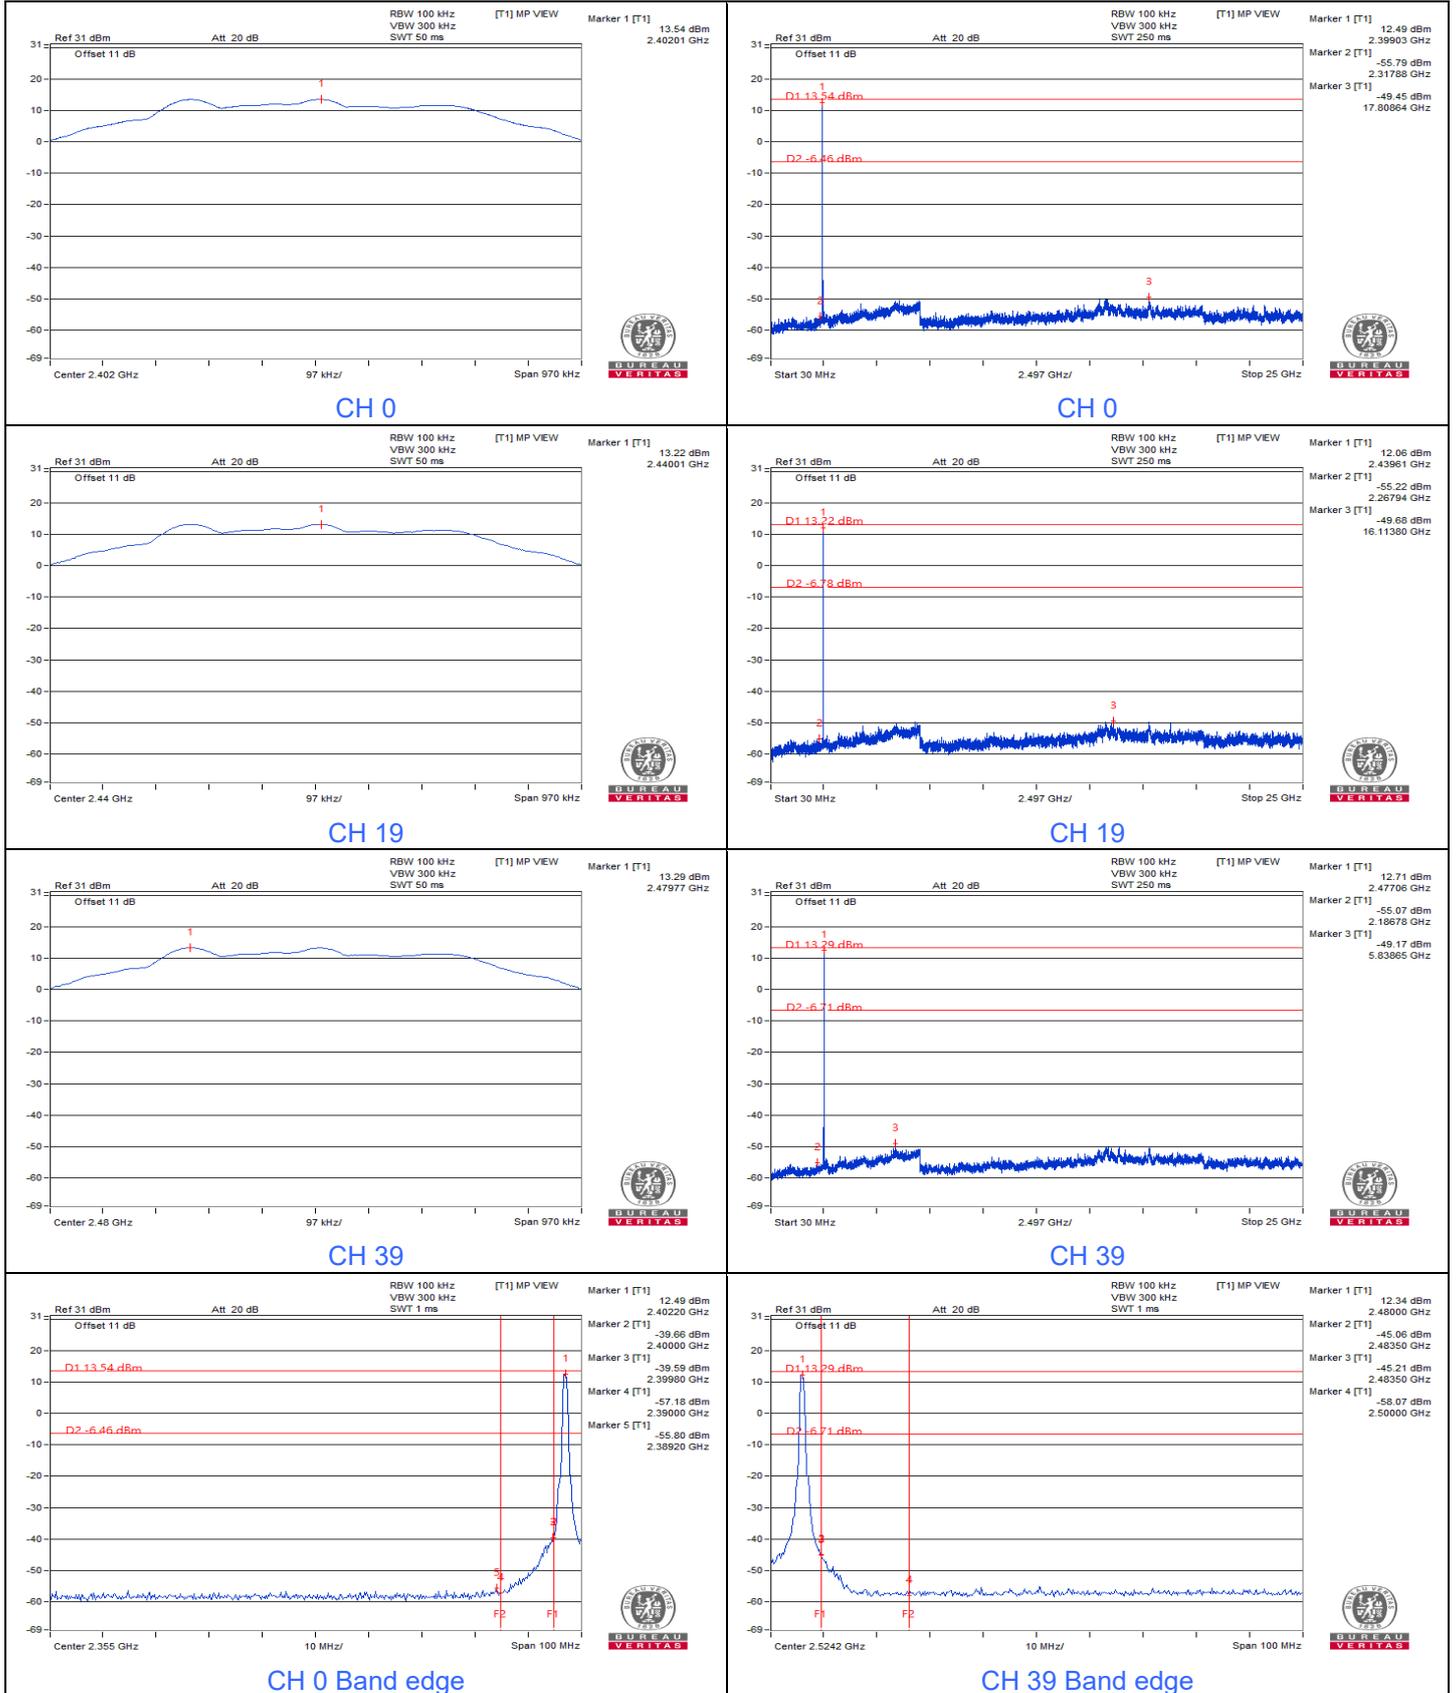


## 7.5 AC Power Conducted Emissions

RF Mode	BT-LE 2M	Channel	CH 19 : 2440 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 68 % RH
Tested By	Edison Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.68	38.49	21.18	48.17	30.86	66.00	56.00	-17.83	-25.14
2	0.18600	9.70	32.36	17.86	42.06	27.56	64.21	54.21	-22.15	-26.65
<b>3</b>	<b>0.42200</b>	<b>9.72</b>	<b>35.35</b>	<b>31.73</b>	<b>45.07</b>	<b>41.45</b>	<b>57.41</b>	<b>47.41</b>	<b>-12.34</b>	<b>-5.96</b>
4	0.61000	9.74	16.97	11.55	26.71	21.29	56.00	46.00	-29.29	-24.71
5	2.09400	9.79	18.49	12.67	28.28	22.46	56.00	46.00	-27.72	-23.54
6	16.77000	10.04	17.93	13.15	27.97	23.19	60.00	50.00	-32.03	-26.81

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

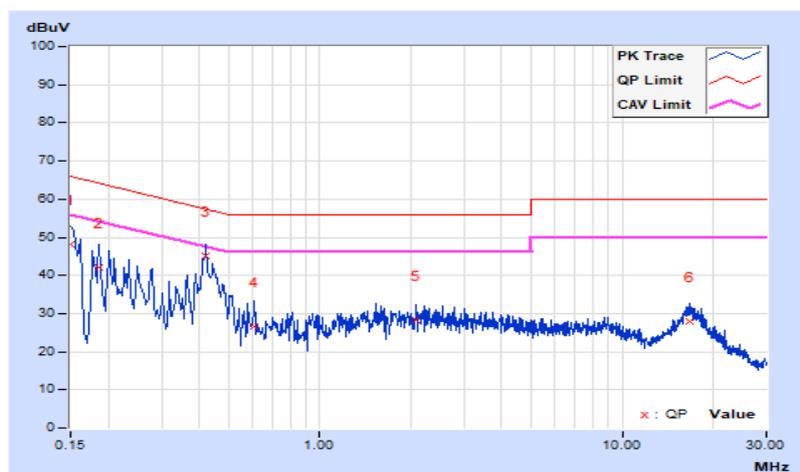


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	20 °C, 68 % RH
<b>Tested By</b>	Edison Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.66	37.74	20.65	47.40	30.31	66.00	56.00	-18.60	-25.69
2	0.17384	9.66	33.79	18.51	43.45	28.17	64.77	54.77	-21.32	-26.60
3	0.19800	9.66	31.18	18.03	40.84	27.69	63.69	53.69	-22.85	-26.00
4	0.42578	9.73	33.79	28.14	43.52	37.87	57.33	47.33	-13.81	-9.46
5	0.71000	9.77	19.07	13.43	28.84	23.20	56.00	46.00	-27.16	-22.80
6	17.08200	10.20	17.30	12.63	27.50	22.83	60.00	50.00	-32.50	-27.17

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

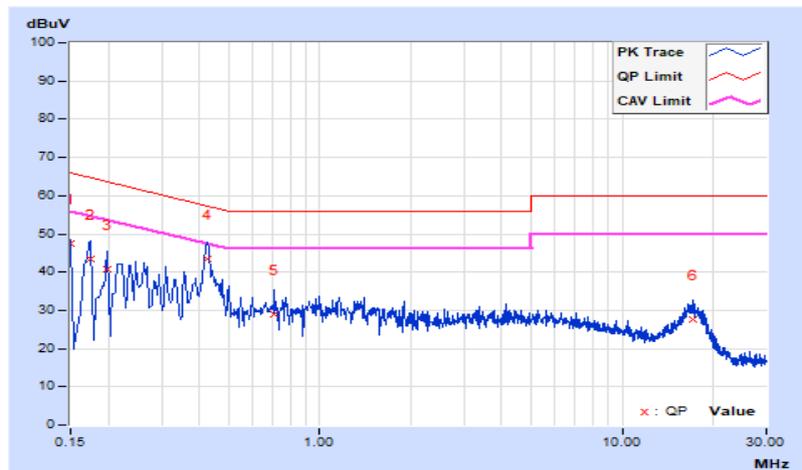


## 7.6 Unwanted Emissions below 1 GHz

<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120 kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22 °C, 68 % RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	83.35	24.1 QP	40.0	-15.9	1.25 H	83	42.6	-18.5
2	118.27	24.4 QP	43.5	-19.1	1.50 H	270	39.5	-15.1
3	202.66	25.2 QP	43.5	-18.3	1.00 H	109	41.4	-16.2
4	314.21	23.6 QP	46.0	-22.4	1.25 H	286	35.2	-11.6
5	801.15	30.2 QP	46.0	-15.8	1.00 H	36	32.1	-1.9
6	904.94	30.8 QP	46.0	-15.2	1.25 H	10	31.3	-0.5

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

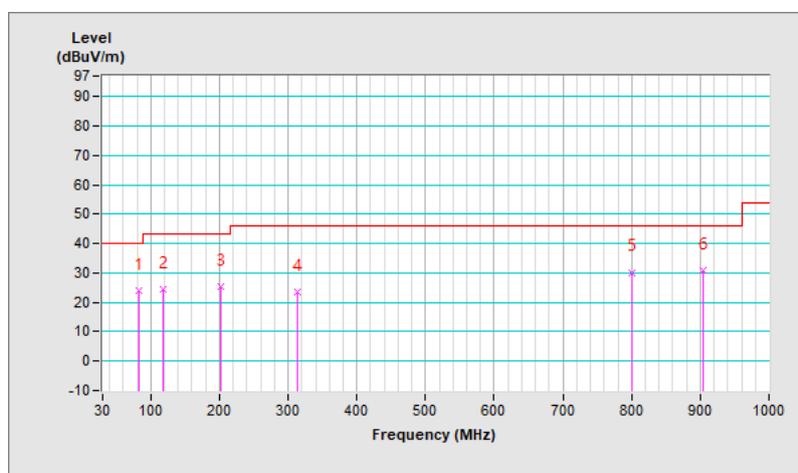


<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120 kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	22 °C, 68 % RH
<b>Tested By</b>	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	34.6 QP	40.0	-5.4	1.00 V	175	48.8	-14.2
2	99.84	30.4 QP	43.5	-13.1	1.25 V	49	47.7	-17.3
3	180.35	27.7 QP	43.5	-15.8	1.01 V	23	42.2	-14.5
4	256.01	28.3 QP	46.0	-17.7	1.01 V	173	42.0	-13.7
5	567.38	31.7 QP	46.0	-14.3	1.01 V	165	37.6	-5.9
6	948.59	32.8 QP	46.0	-13.2	1.50 V	18	32.6	0.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

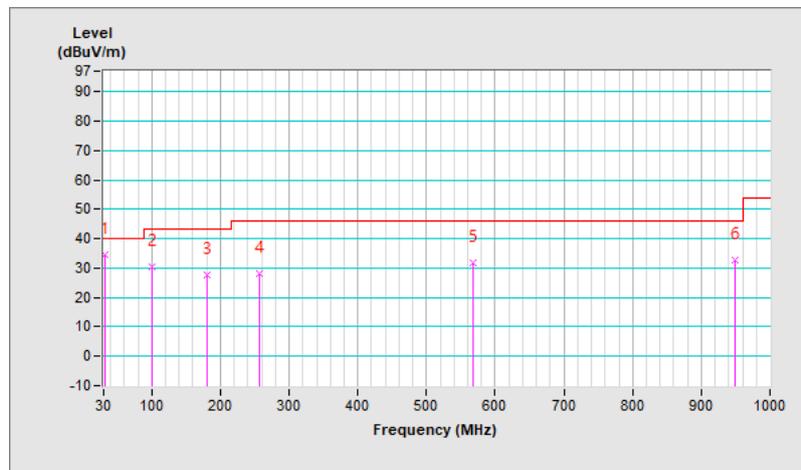

## 7.7 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.20 H	189	24.0	32.6
2	2390.00	45.0 AV	54.0	-9.0	1.20 H	189	12.4	32.6
3	*2402.00	110.9 PK			1.20 H	189	78.3	32.6
4	*2402.00	109.8 AV			1.20 H	189	77.2	32.6
5	4804.00	51.0 PK	74.0	-23.0	1.64 H	185	46.6	4.4
6	4804.00	37.9 AV	54.0	-16.1	1.64 H	185	33.5	4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	1.50 V	6	26.2	32.6
2	2390.00	47.7 AV	54.0	-6.3	1.50 V	6	15.1	32.6
3	*2402.00	115.9 PK			1.50 V	6	83.3	32.6
4	*2402.00	114.8 AV			1.50 V	6	82.2	32.6
5	4804.00	51.7 PK	74.0	-22.3	1.69 V	352	47.3	4.4
6	4804.00	39.0 AV	54.0	-15.0	1.69 V	352	34.6	4.4

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	110.7 PK			1.19 H	193	78.1	32.6
2	*2440.00	109.1 AV			1.19 H	193	76.5	32.6
3	4880.00	50.6 PK	74.0	-23.4	2.41 H	158	46.1	4.5
4	4880.00	37.4 AV	54.0	-16.6	2.41 H	158	32.9	4.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	114.8 PK			1.47 V	1	82.2	32.6
2	*2440.00	113.8 AV			1.47 V	1	81.2	32.6
3	4880.00	52.1 PK	74.0	-21.9	1.58 V	241	47.6	4.5
4	4880.00	38.8 AV	54.0	-15.2	1.58 V	241	34.3	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 1M	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.8 PK			1.18 H	181	77.8	32.0
2	*2480.00	108.2 AV			1.18 H	181	76.2	32.0
3	2483.50	61.6 PK	74.0	-12.4	1.18 H	181	29.6	32.0
4	2483.50	50.6 AV	54.0	-3.4	1.18 H	181	18.6	32.0
5	4960.00	50.9 PK	74.0	-23.1	1.69 H	354	47.5	3.4
6	4960.00	37.6 AV	54.0	-16.4	1.69 H	354	34.2	3.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	113.9 PK			1.21 V	38	81.9	32.0
2	*2480.00	112.7 AV			1.21 V	38	80.7	32.0
3	2483.50	64.2 PK	74.0	-9.8	1.21 V	38	32.2	32.0
4	2483.50	51.7 AV	54.0	-2.3	1.21 V	38	19.7	32.0
5	4960.00	52.0 PK	74.0	-22.0	1.88 V	241	48.6	3.4
6	4960.00	39.0 AV	54.0	-15.0	1.88 V	241	35.6	3.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 1 : 2404 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	1.25 H	188	22.7	32.6
2	2390.00	45.4 AV	54.0	-8.6	1.25 H	188	12.8	32.6
3	*2404.00	111.7 PK			1.25 H	188	79.1	32.6
4	*2404.00	108.5 AV			1.25 H	188	75.9	32.6
5	4804.00	45.6 PK	74.0	-28.4	2.14 H	157	41.2	4.4
6	4804.00	33.7 AV	54.0	-20.3	2.14 H	157	29.3	4.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.46 V	1	25.9	32.0
2	2390.00	47.7 AV	54.0	-6.3	1.46 V	1	15.7	32.0
3	*2404.00	116.0 PK			1.46 V	1	84.1	31.9
4	*2404.00	113.7 AV			1.46 V	1	81.8	31.9
5	4808.00	46.3 PK	74.0	-27.7	1.74 V	152	43.2	3.1
6	4808.00	34.4 AV	54.0	-19.6	1.74 V	152	31.3	3.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	110.6 PK			1.23 H	196	78.6	32.0
2	*2440.00	107.6 AV			1.23 H	196	75.6	32.0
3	4880.00	45.4 PK	74.0	-28.6	2.36 H	254	42.2	3.2
4	4880.00	33.9 AV	54.0	-20.1	2.36 H	254	30.7	3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	115.5 PK			1.58 V	13	83.5	32.0
2	*2440.00	110.7 AV			1.58 V	13	78.7	32.0
3	4880.00	46.9 PK	74.0	-27.1	1.87 V	45	43.7	3.2
4	4880.00	34.8 AV	54.0	-19.2	1.87 V	45	31.6	3.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 2M	<b>Channel</b>	CH 38 : 2478 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	107.0 PK			1.47 H	285	73.2	33.8
2	*2478.00	104.9 AV			1.47 H	285	71.1	33.8
3	2483.50	57.2 PK	74.0	-16.8	1.47 H	285	23.4	33.8
4	2483.50	48.5 AV	54.0	-5.5	1.47 H	285	14.7	33.8
5	4956.00	45.3 PK	74.0	-28.7	1.72 H	339	35.4	9.9
6	4956.00	33.4 AV	54.0	-20.6	1.72 H	339	23.5	9.9

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2478.00	113.6 PK			1.11 V	170	79.8	33.8
2	*2478.00	111.6 AV			1.11 V	170	77.8	33.8
3	2483.50	61.1 PK	74.0	-12.9	1.11 V	170	27.3	33.8
4	2483.50	51.6 AV	54.0	-2.4	1.11 V	170	17.8	33.8
5	4956.00	46.6 PK	74.0	-27.4	2.09 V	321	36.7	9.9
6	4956.00	35.1 AV	54.0	-18.9	2.09 V	321	25.2	9.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 125K	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.21 H	184	23.6	32.6
2	2390.00	43.3 AV	54.0	-10.7	1.21 H	184	10.7	32.6
3	*2402.00	113.2 PK			1.21 H	184	80.6	32.6
4	*2402.00	112.2 AV			1.21 H	184	79.6	32.6
5	4804.00	45.3 PK	74.0	-28.7	1.96 H	287	40.9	4.4
6	4804.00	33.5 AV	54.0	-20.5	1.96 H	287	29.1	4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.68 V	0	24.4	32.0
2	2390.00	44.1 AV	54.0	-9.9	1.68 V	0	12.1	32.0
3	*2402.00	116.2 PK			1.68 V	0	84.3	31.9
4	*2402.00	115.1 AV			1.68 V	0	83.2	31.9
5	4804.00	46.7 PK	74.0	-27.3	1.87 V	145	43.6	3.1
6	4804.00	34.7 AV	54.0	-19.3	1.87 V	145	31.6	3.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 125K	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	110.3 PK			1.30 H	191	78.3	32.0
2	*2440.00	109.6 AV			1.30 H	191	77.6	32.0
3	4880.00	45.7 PK	74.0	-28.3	1.80 H	298	42.5	3.2
4	4880.00	33.6 AV	54.0	-20.4	1.80 H	298	30.4	3.2

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	115.7 PK			1.62 V	0	83.1	32.6
2	*2440.00	114.5 AV			1.62 V	0	81.9	32.6
3	4880.00	46.6 PK	74.0	-27.4	1.36 V	265	42.1	4.5
4	4880.00	34.5 AV	54.0	-19.5	1.36 V	265	30.0	4.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 125K	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.8 PK			1.35 H	188	77.8	32.0
2	*2480.00	108.3 AV			1.35 H	188	76.3	32.0
3	2483.50	61.6 PK	74.0	-12.4	1.35 H	188	29.6	32.0
4	2483.50	49.5 AV	54.0	-4.5	1.35 H	188	17.5	32.0
5	4960.00	45.6 PK	74.0	-28.4	1.78 H	145	42.2	3.4
6	4960.00	33.5 AV	54.0	-20.5	1.78 H	145	30.1	3.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	114.7 PK			1.12 V	37	82.7	32.0
2	*2480.00	113.5 AV			1.12 V	37	81.5	32.0
3	2483.50	64.0 PK	74.0	-10.0	1.12 V	37	32.0	32.0
4	2483.50	52.2 AV	54.0	-1.8	1.12 V	37	20.2	32.0
5	4960.00	47.2 PK	74.0	-26.8	2.14 V	187	43.8	3.4
6	4960.00	35.0 AV	54.0	-19.0	2.14 V	187	31.6	3.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 500K	<b>Channel</b>	CH 0 : 2402 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.23 H	196	23.5	32.6
2	2390.00	43.0 AV	54.0	-11.0	1.23 H	196	10.4	32.6
3	*2402.00	111.5 PK			1.23 H	196	78.9	32.6
4	*2402.00	110.1 AV			1.23 H	196	77.5	32.6
5	4804.00	45.4 PK	74.0	-28.6	2.15 H	145	41.0	4.4
6	4804.00	33.5 AV	54.0	-20.5	2.15 H	145	29.1	4.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.43 V	0	24.5	32.6
2	2390.00	44.4 AV	54.0	-9.6	1.43 V	0	11.8	32.6
3	*2402.00	116.6 PK			1.43 V	0	84.0	32.6
4	*2402.00	115.5 AV			1.43 V	0	82.9	32.6
5	4804.00	46.9 PK	74.0	-27.1	1.94 V	251	42.5	4.4
6	4804.00	34.5 AV	54.0	-19.5	1.94 V	251	30.1	4.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 500K	<b>Channel</b>	CH 19 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	111.6 PK			1.41 H	198	79.0	32.6
2	*2440.00	110.1 AV			1.41 H	198	77.5	32.6
3	4880.00	45.7 PK	74.0	-28.3	2.05 H	217	41.2	4.5
4	4880.00	33.5 AV	54.0	-20.5	2.05 H	217	29.0	4.5

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	116.1 PK			1.43 V	0	84.1	32.0
2	*2440.00	115.0 AV			1.43 V	0	83.0	32.0
3	4880.00	46.9 PK	74.0	-27.1	1.96 V	233	43.7	3.2
4	4880.00	34.9 AV	54.0	-19.1	1.96 V	233	31.7	3.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	BT-LE 500K	<b>Channel</b>	CH 39 : 2480 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	21.6 °C, 71.8 % RH
<b>Tested By</b>	Ian Chang		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	109.4 PK			1.22 H	185	76.6	32.8
2	*2480.00	108.3 AV			1.22 H	185	75.5	32.8
3	2483.50	61.4 PK	74.0	-12.6	1.22 H	185	28.6	32.8
4	2483.50	50.8 AV	54.0	-3.2	1.22 H	185	18.0	32.8
5	4960.00	45.5 PK	74.0	-28.5	1.07 H	148	40.7	4.8
6	4960.00	33.8 AV	54.0	-20.2	1.07 H	148	29.0	4.8

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	114.9 PK			1.11 V	36	82.9	32.0
2	*2480.00	113.9 AV			1.11 V	36	81.9	32.0
3	2483.50	64.9 PK	74.0	-9.1	1.11 V	36	32.9	32.0
<b>4</b>	<b>2483.50</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>1.11 V</b>	<b>36</b>	<b>21.0</b>	<b>32.0</b>
5	4960.00	47.3 PK	74.0	-26.7	1.99 V	263	43.9	3.4
6	4960.00	34.8 AV	54.0	-19.2	1.99 V	263	31.4	3.4

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

### Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

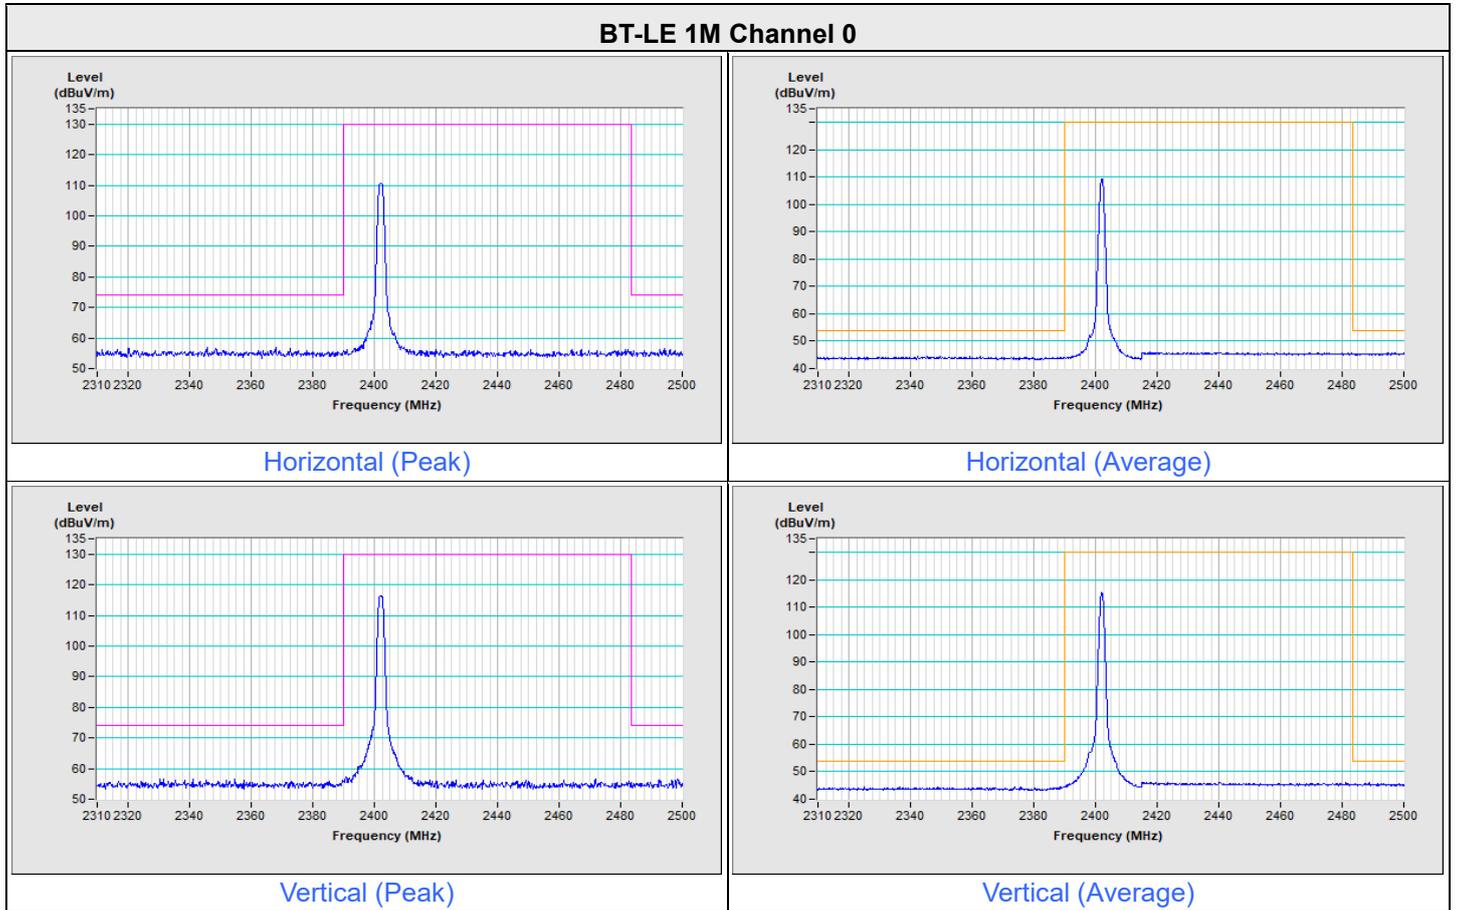


### BT-LE 1M Channel 39

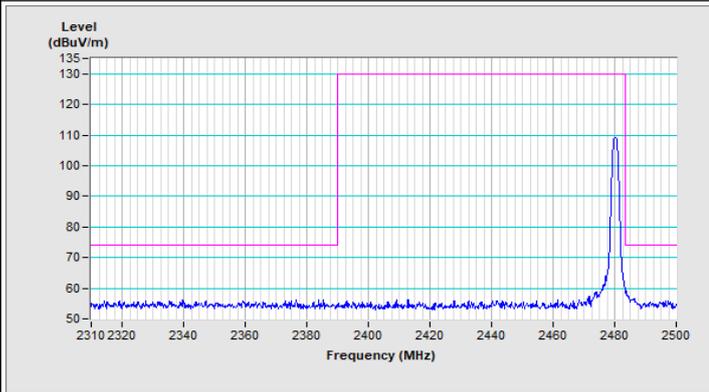


Horizontal (Peak)

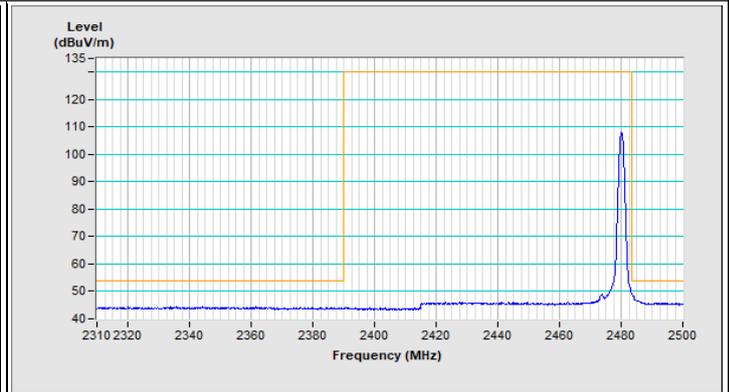

Horizontal (Average)

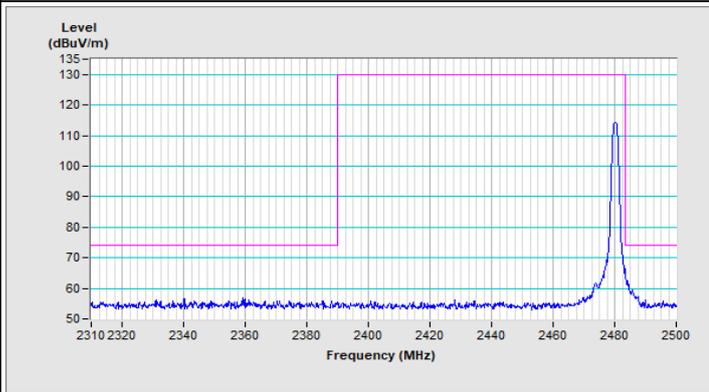


Vertical (Peak)

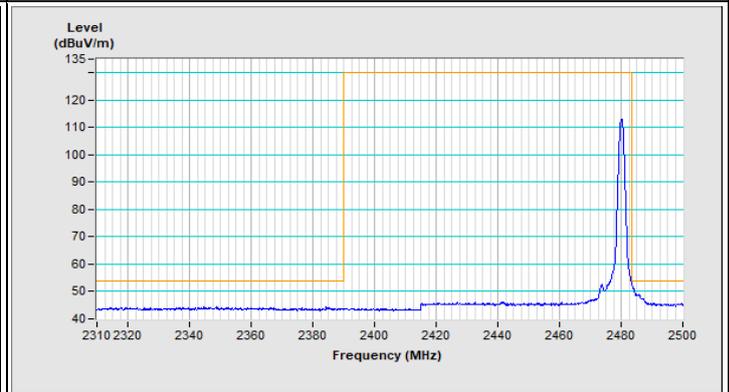


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


**BT-LE 2M Channel 1**

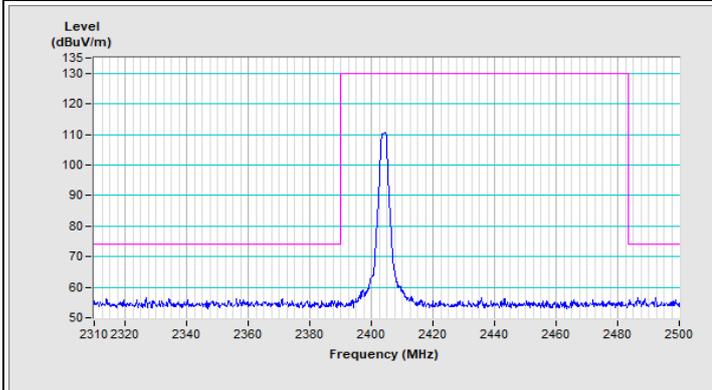


Horizontal (Peak)

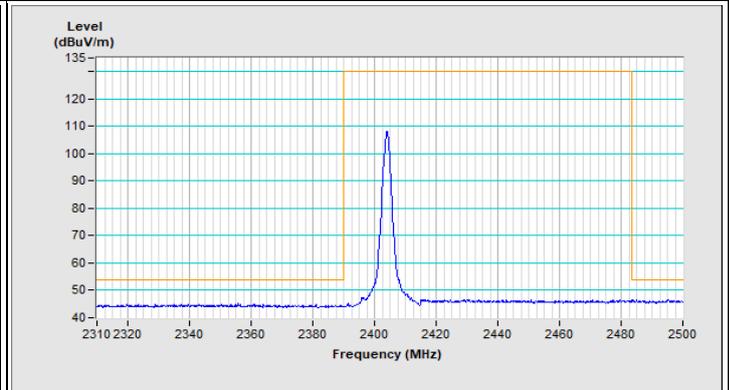

Horizontal (Average)

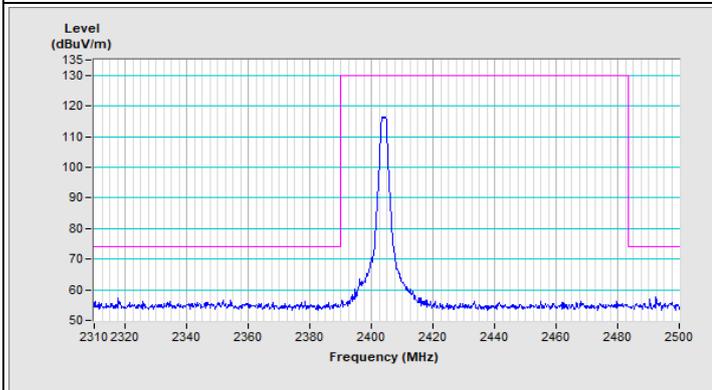


Vertical (Peak)

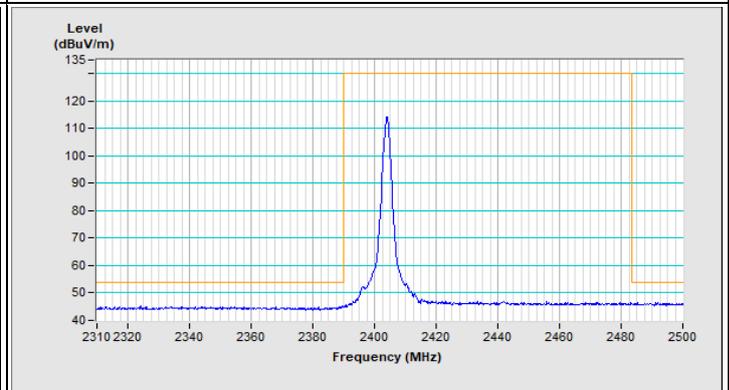


Vertical (Average)


### BT-LE 2M Channel 38

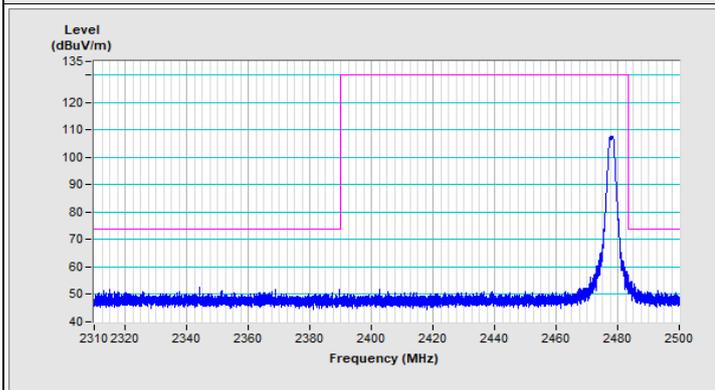


Horizontal (Peak)

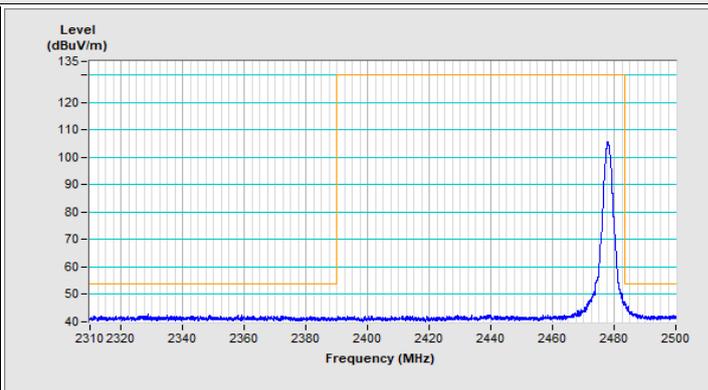

Horizontal (Average)

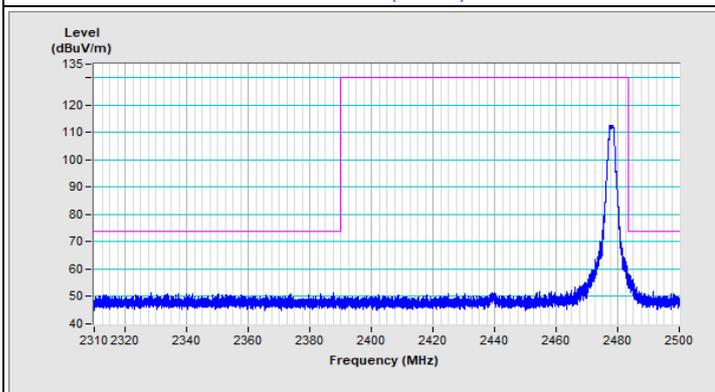


Vertical (Peak)

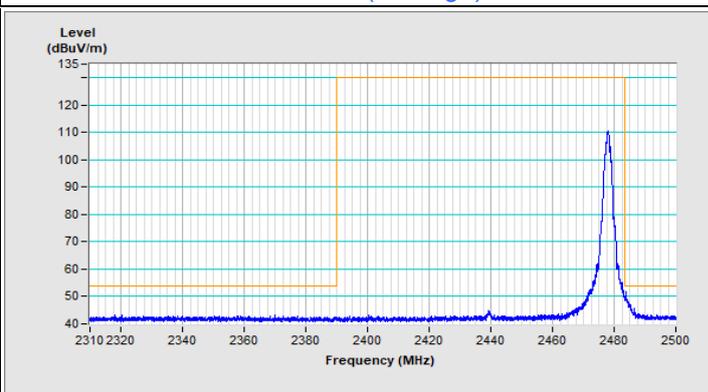


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	--------------------	-------------------------------	---


**BT-LE 125K Channel 0**

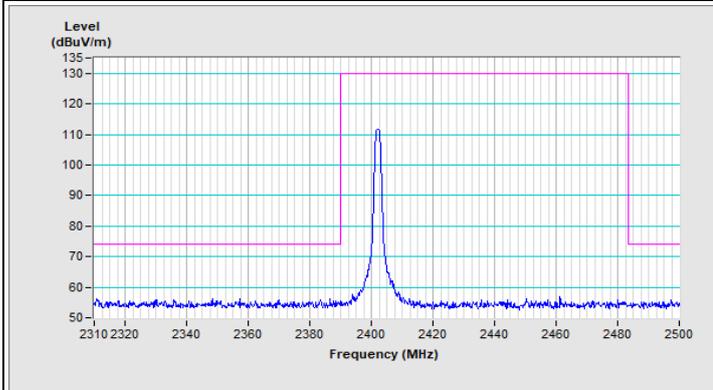


Horizontal (Peak)

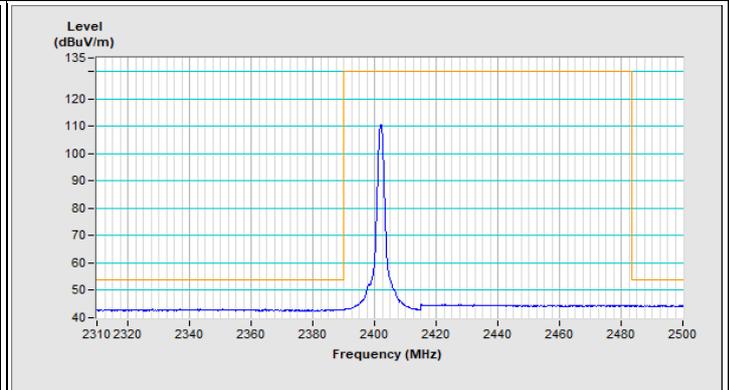

Horizontal (Average)

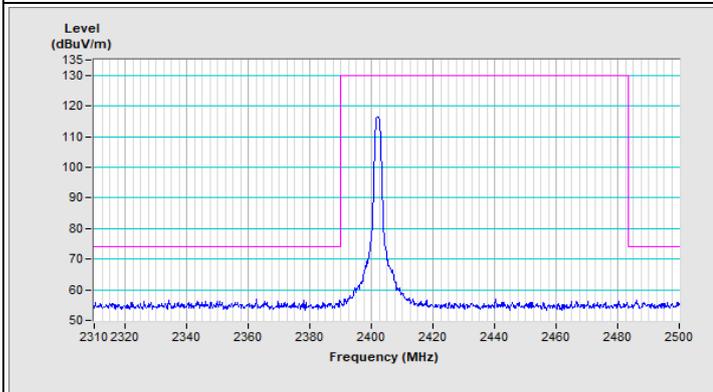


Vertical (Peak)

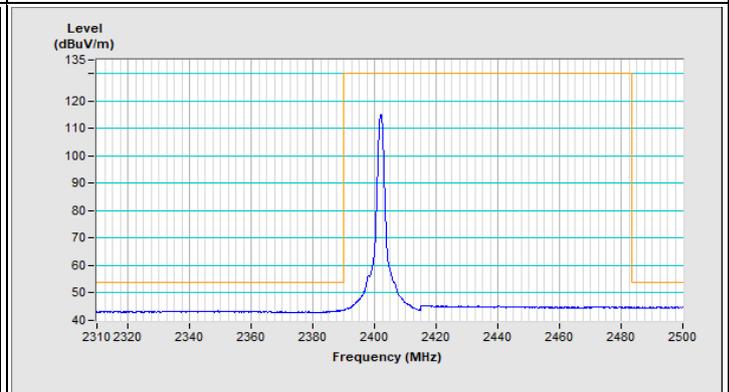


Vertical (Average)


### BT-LE 125K Channel 39

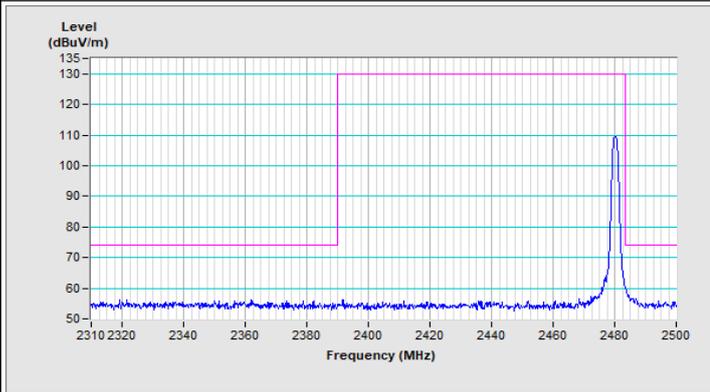


Horizontal (Peak)

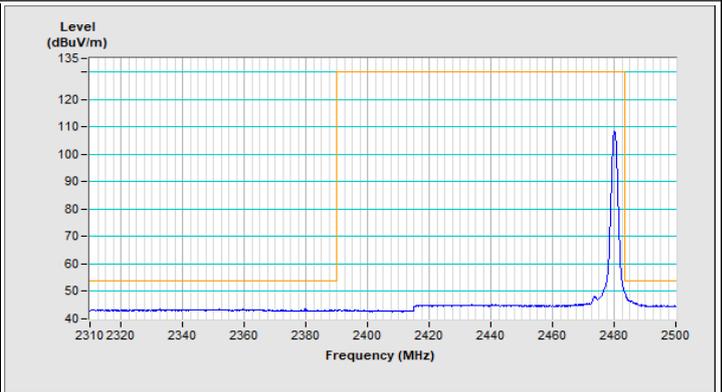

Horizontal (Average)

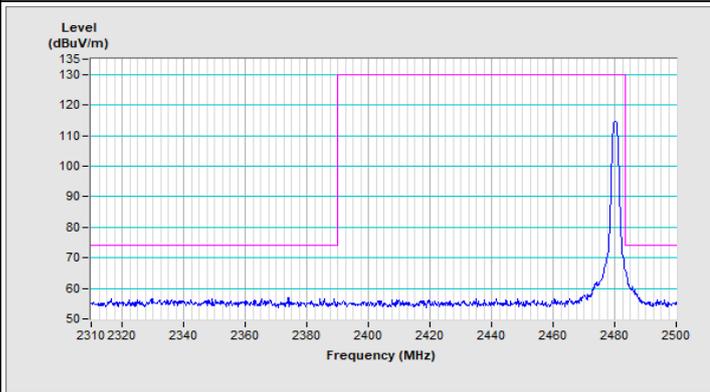


Vertical (Peak)

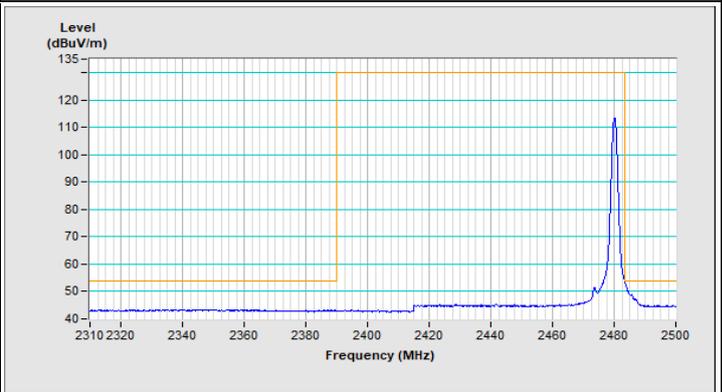


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


**BT-LE 500K Channel 0**

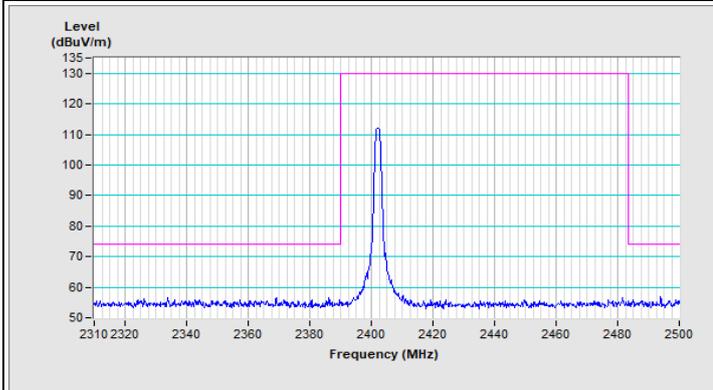


Horizontal (Peak)

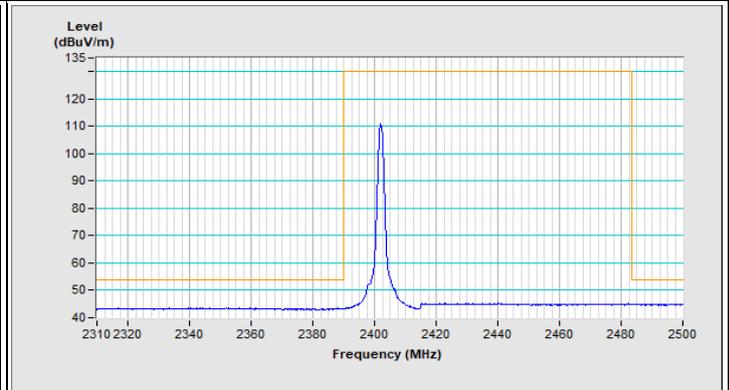

Horizontal (Average)

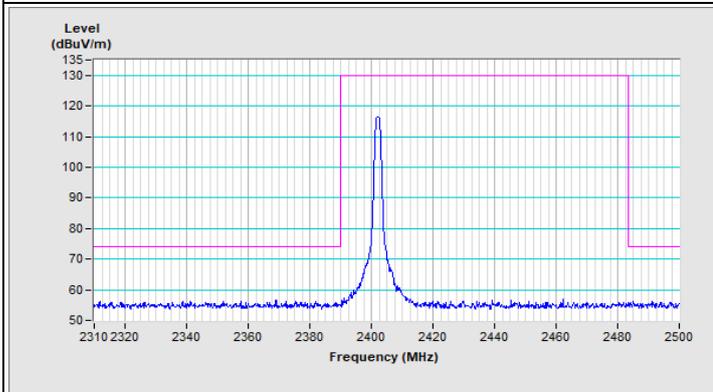


Vertical (Peak)

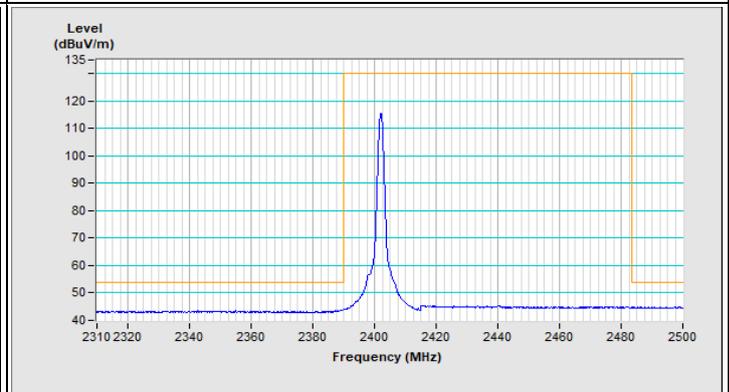


Vertical (Average)


### BT-LE 500K Channel 39

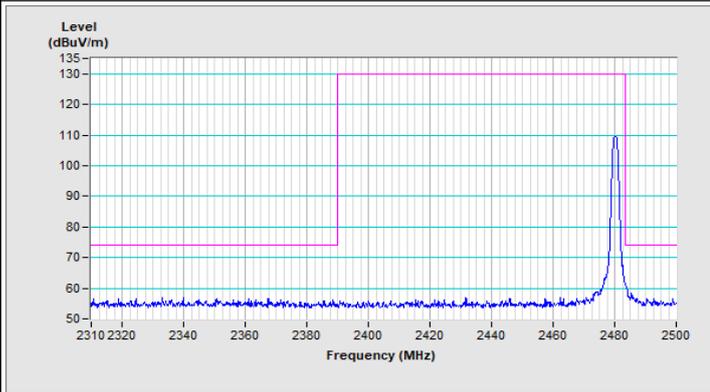


Horizontal (Peak)

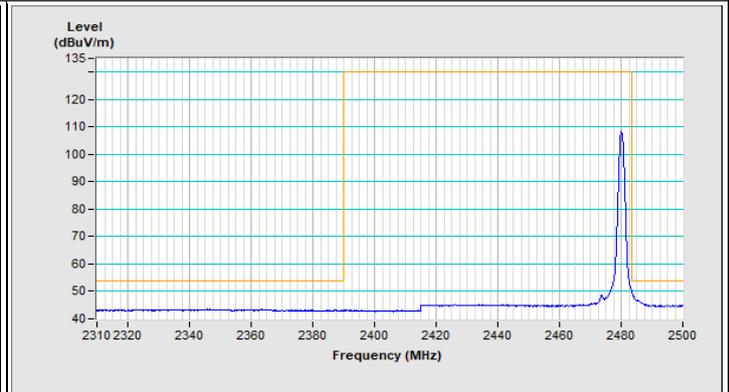

Horizontal (Average)

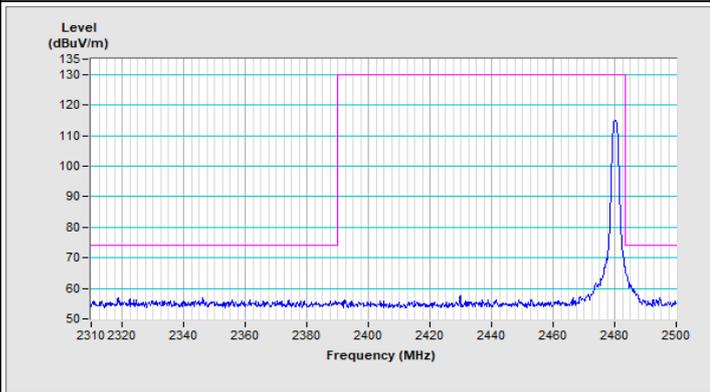

Vertical (Peak)

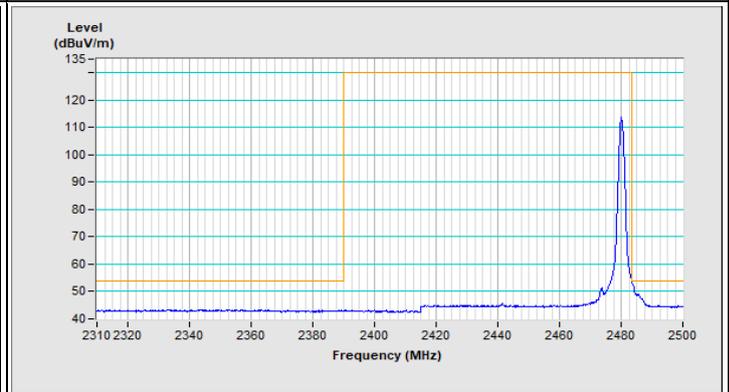

Vertical (Average)

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---