



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

Wireless-N Selectable-Band Access Point with PoE

Model: WAP321

Trade Name: Cisco

Issued to

SerComm Corporation

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.

No.11, Wu-Gong 6th Rd., Wugu Industrial Park,

New Taipei City 248, Taiwan (R.O.C.)

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: January 17, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 17, 2012	Initial Issue	ALL	Angel Cheng



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	8
3.1 EUT CONFIGURATION	8
3.2 EUT EXERCISE	8
3.3 GENERAL TEST PROCEDURES	8
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	9
3.5 DESCRIPTION OF TEST MODES	10
4. INSTRUMENT CALIBRATION.....	11
4.1 MEASURING INSTRUMENT CALIBRATION	11
4.2 MEASUREMENT EQUIPMENT USED	11
4.3 MEASUREMENT UNCERTAINTY	12
5. FACILITIES AND ACCREDITATIONS	13
5.1 FACILITIES	13
5.2 EQUIPMENT	13
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	14
6. SETUP OF EQUIPMENT UNDER TEST	15
6.1 SETUP CONFIGURATION OF EUT	15
6.2 SUPPORT EQUIPMENT	15
7. FCC PART 15 REQUIREMENTS.....	16
7.1 26 DB EMISSION BANDWIDTH	16
7.2 PEAK POWER	27
7.3 BAND EDGES MEASUREMENT.....	42
7.4 PEAK POWER SPECTRAL DENSITY	65
7.5 PEAK EXCURSION	77
7.6 RADIATED UNDESIRABLE EMISSION.....	89
7.7 CONDUCTED UNDESIRABLE EMISSION	112
7.8 POWERLINE CONDUCTED EMISSIONS	123
7.9 FREQUENCY STABILITY.....	126
APPENDIX I RADIO FREQUENCY EXPOSURE	133
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	136
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Equipment Under Test: Wireless-N Selectable-Band Access Point with PoE

Trade Name: Cisco

Model: WAP321

Date of Test: November 1, 2011 ~ January 16, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Jason Lin
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless-N Selectable-Band Access Point with PoE		
Trade Name	Cisco		
Model Number	WAP321		
Model Discrepancy	N/A		
Received Date	October 28, 2011		
Power Adapter	<ol style="list-style-type: none"> 1. Sunny/ SYS1381-121-W2C I/P: 100-240V~, 0.5A MAX, 50-60Hz O/P: 12V, 1.0A 2. LEADER / MU12-G120100-A2 I/P: 100-240V~, 50-60Hz, 0.5A O/P: 12V, 1A 3. Sunny/ SYS1381-1212-W2 I/P: 100-240V~, 0.5A MAX, 50-60Hz O/P: 12V, 1.0A 4. LEADER / MU12-G120100-A1 I/P: 100-240V~, 50-60Hz, 0.5A O/P: 12V, 1A 		
Operating Frequency Range & Number of Channels		Mode	Frequency Range (MHz)
	UNII Band I	IEEE 802.11a	5180 – 5240
		IEEE 802.11n HT 20 MHz	5180 – 5240
		IEEE 802.11n HT 40 MHz	5190 ~ 5230
Transmit Power	<p>IEEE 802.11a mode / 5180 ~ 5240MHz: 13.13 dBm</p> <p>Mode 1: IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 0: 10.38dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 1: 9.69dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Total : 13.00dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 0: 9.24dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 1: 9.28 dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Total : 12.24 dBm</p> <p>Mode 2: IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 1: 9.69dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 2: 10.15dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Total : 12.75dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 1: 9.28 dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 2: 10.06 dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Total : 12.62 dBm</p> <p>Mode 3: IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 0: 10.38dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Chain 2: 10.15dBm IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / MCS8 : Total : 13.09dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 0: 9.24 dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Chain 2: 10.06 dBm IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / MCS8 : Total : 12.68 dBm</p>		
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)		
Transmit Data Rate	IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT 20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44,		



	19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) IEEE 802.11n HT 40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)
Antenna Specification	Antenna Gain: Antenna 1: 4.88 dBi Antenna 2: 4.97 dBi Antenna 3: 4.74 dBi MIMO: $10 \cdot \text{LOG}(\frac{10^{(4.88/20)} + 10^{(4.97/20)}}{2}) = 7.94\text{dBi}$ (Numeric gain: 6.22)
Antenna Designation	PIFA Antenna



Operation Frequency

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
46	5230
48	5240

Remark:

- 1. The sample selected for test was production product and was provided by manufacturer.*
- 2. This submittal(s) (test report) is intended for FCC ID: **P27-WAP321** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WAP321) comes with four types of power adapter (SYS1381-121-W2C, MU12-G120100-A2, SYS1381-1212-W2, MU12-G120100-A1) for sale. After the preliminary test, the EUT with power adapter (Model: MU12-G120100-A1) was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT comes with three modes: mode 1 & mode 2 & mode 3.

“Mode 1” chain 0, chain 1

“Mode 2” chain 1, chain 2

“Mode 3” chain 0, chain 2

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that Operate in double TX chains and double RX chains. The 2x2 configuration is implemented with Two outside TX & RX chains (Chain 0 and Chain 1)(Chain 1 and Chain 2)(Chain 0 and Chain 2)

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode

IEEE 802.11a mode:

During the preliminary test, Chain 0,Chain 1,Chain 2 with IEEE 802.11a mode were pre-tested and found that Chain 0 emits the highest output power.

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with chain 0 at 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

During the preliminary test, MCS0 : Chain 0,Chain 1,Chain 2 and MCS8 : Chain 0+Chain 1,Chain 1 +Chain 2,Chain 0 + chain 2 with IEEE 802.11n HT 20 MHz were pre-tested and found that Chain 0+Chain 1,Chain 1 +Chain 2,Chain 0 + chain 2 emits the highest output power.

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with chain 0 + chain 1 and chain 1 + chain 2 and chain 0 + chain 2 at MCS 8 data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

During the preliminary test, MCS0 : Chain 0,Chain 1,Chain 2 and MCS8 : Chain 0+Chain 1,Chain 1 +Chain 2,Chain 0 + chain 2 with IEEE 802.11n HT 40 MHz were pre-tested and found that Chain 0+Chain 1,Chain 1 +Chain 2,Chain 0 + chain 2 emits the highest output power.

Channel Low (5190MHz) and Channel High (5230MHz) with chain 0 + chain 1 and chain 1 + chain 2 and chain 0 + chain 2 at MCS 8 data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/17/2012
Power Meter	Anritsu	ML2495A	1012009	04/27/2012
Power Sensor	Anritsu	MA2411B	0917072	04/27/2012

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/02/2012
EMI Test Receiver	R&S	ESCI	100064	02/17/2012
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2012
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/03/2012
Horn Antenna	EMCO	3117	00055165	01/12/2012
Horn Antenna	EMCO	3116	00026370	10/12/2012
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	100234	06/13/2012
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/27/2012
LISN	SCHWARZBECK	NSLK 8127	8127382	01/02/2012
BNC CABLE	MIYAZAKI	5D-FB	BNC B3	08/07/2012
Pulse Limiter	R&S	ESH3-Z2	100374	01/09/2012
THERMO-HYGRO METER	WISEWIND	201A	1006	05/23/2012
Test S/W	CCS-3A1-CE			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/-1.1089
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

Remark: The powerline conducted emissions test items was tested at Compliance Certification Services Inc. (Sindian Lab.) The test equipments were listed in page 11 and the test data, please refer page 124-125.

No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 Canada IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand Name	Data Cable	Power Cord
1	USB Mouse	M-UAE96	F93A90A5BU90L20	FCC DOC	HP	Shielded, 1.8m	N/A
2	USB Keyboard	KU-0316	BC3870FVBWH079	FCC DOC	HP	Shielded, 1.8m	N/A
3	Printer	Deskjet D2360	TH73C1492F	FCC DOC	HP	Shielded, 1.8m	Unshielded, 1.8m
4	Monitor	933SN+	CM19HVKS00002	FCC DOC	SAMSUNG	Shielded, 1.8m with two cores	Unshielded, 1.8m
5	Host PC	T3500	8X36VBX	FCC DOC	DELL	Unshielded, 1.5m	Unshielded, 1.8m
6	Modem	AL-56ERM	0MERM04A0224	FCC DOC	GALILEO	Shielded, 1.0m	Unshielded, 1.8m
7	Server PC	xw4400	N/A	FCC DOC	HP	N/A	Unshielded, 1.8m
8.	Notebook PC	dv6-1332TX	CNF9491GM9	PD9112BNHU	HP	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15 REQUIREMENTS

7.1 26 DB EMISSION BANDWIDTH

LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	19.840
Mid	5220	20.830
High	5240	22.790

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	20.682
Mid	5220	20.809
High	5240	20.912

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	20.516
Mid	5220	20.452
High	5240	20.909

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 2

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	22.812
Mid	5220	20.312
High	5240	22.871

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5190	39.932
High	5230	39.968

Test mode: IEEE 802.11n HT 40 MHz mode/ 5190 ~ 5230MHz / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5190	39.326
High	5230	39.539

Test mode: IEEE 802.11n HT 40 MHz mode/ 5190 ~ 5230MHz / Chain 2

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5190	39.483
High	5230	39.203




Test Plot

IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 09:28:29 Nov 14, 2011

R T

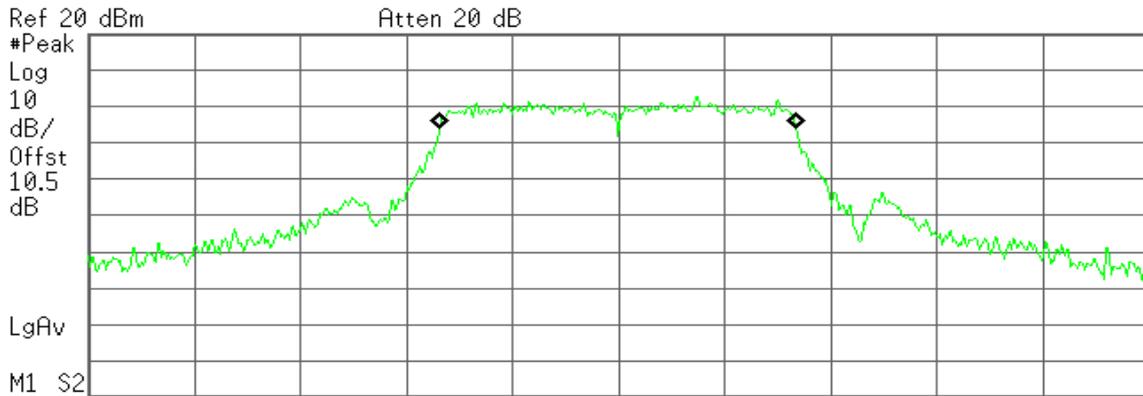

Center 5.180 00 GHz Span 50 MHz
 #Res BW 180 kHz #VBW 560 kHz Sweep 1.48 ms (601 pts)

Occupied Bandwidth

16.7276 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -27.541 kHz
x dB Bandwidth 19.840 MHz

CH Mid

Agilent 09:31:37 Nov 14, 2011

R T

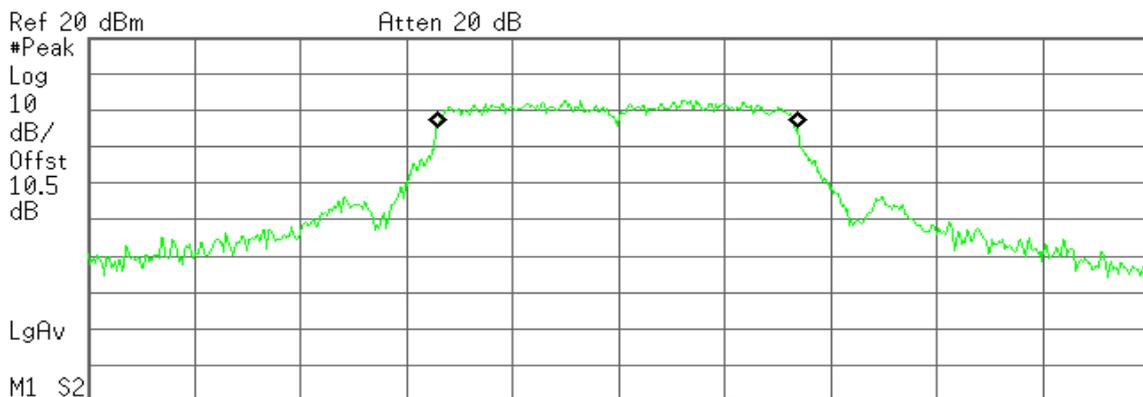

Center 5.220 00 GHz Span 50 MHz
 #Res BW 270 kHz #VBW 750 kHz Sweep 1 ms (601 pts)

Occupied Bandwidth

16.8983 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -65.523 kHz
x dB Bandwidth 20.830 MHz



CH High

Agilent 09:34:16 Nov 14, 2011

R T

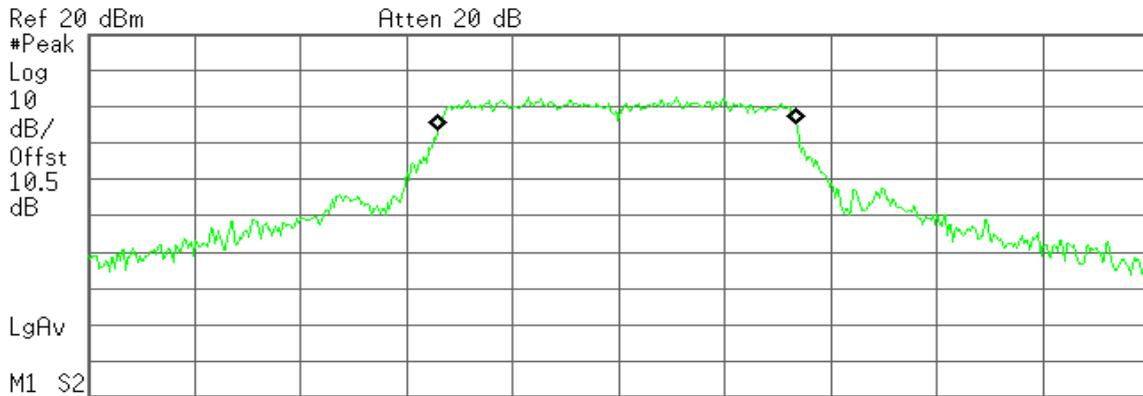

Center 5.240 00 GHz Span 50 MHz
 #Res BW 240 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

Occupied Bandwidth
16.8458 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -58.043 kHz
x dB Bandwidth 22.790 MHz

IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 0

CH Low

Agilent 13:00:06 Nov 14, 2011

R T

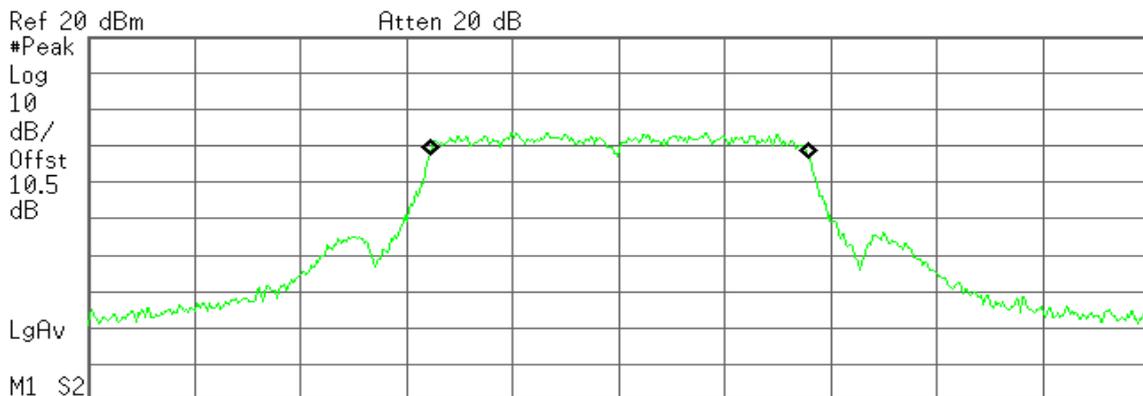

Center 5.180 00 GHz Span 50 MHz
 #Res BW 240 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

Occupied Bandwidth
17.7881 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 22.671 kHz
x dB Bandwidth 20.682 MHz



CH Mid

Agilent 13:04:08 Nov 14, 2011

R T

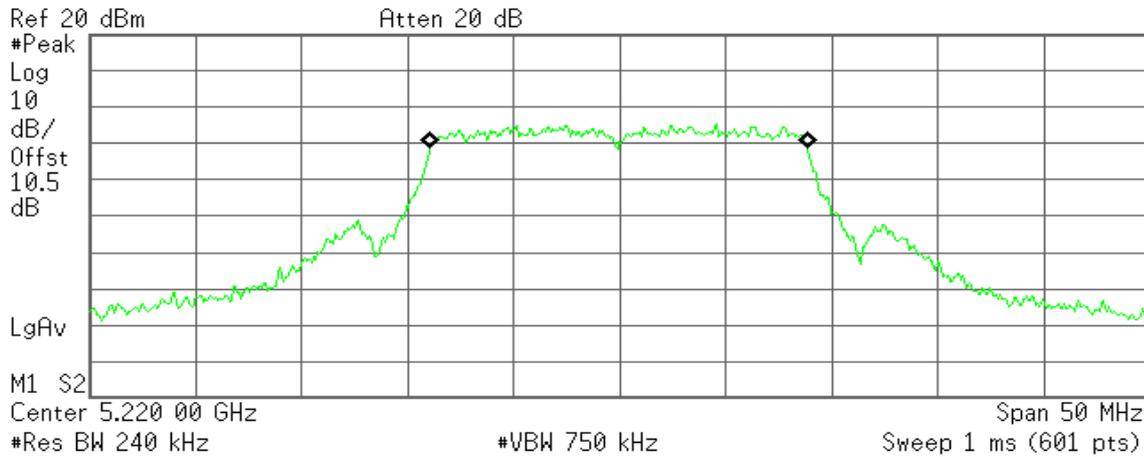

Occupied Bandwidth
17.7017 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -31.618 kHz
x dB Bandwidth 20.809 MHz

CH High

Agilent 13:11:42 Nov 14, 2011

R T

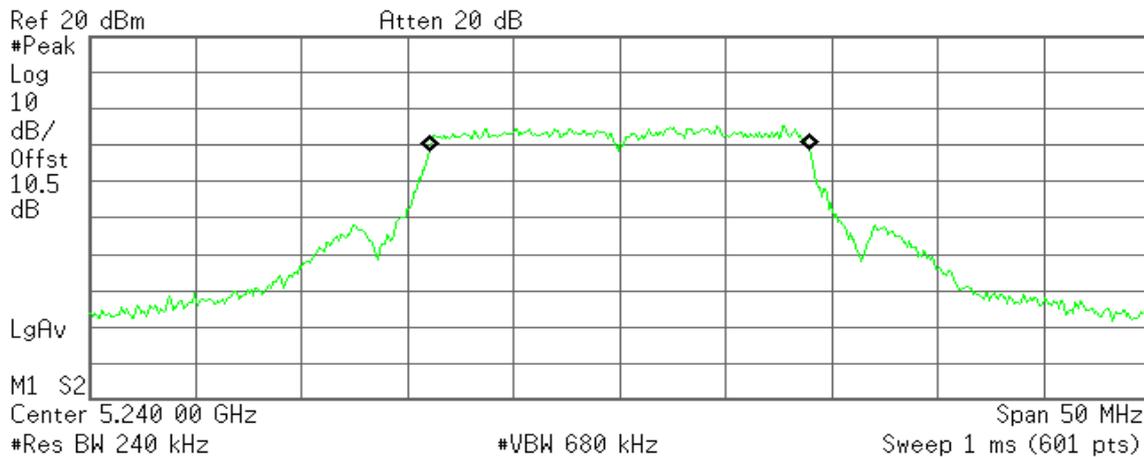

Occupied Bandwidth
17.8015 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -15.767 kHz
x dB Bandwidth 20.912 MHz




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 1

CH Low

Agilent 12:52:44 Nov 14, 2011

R T

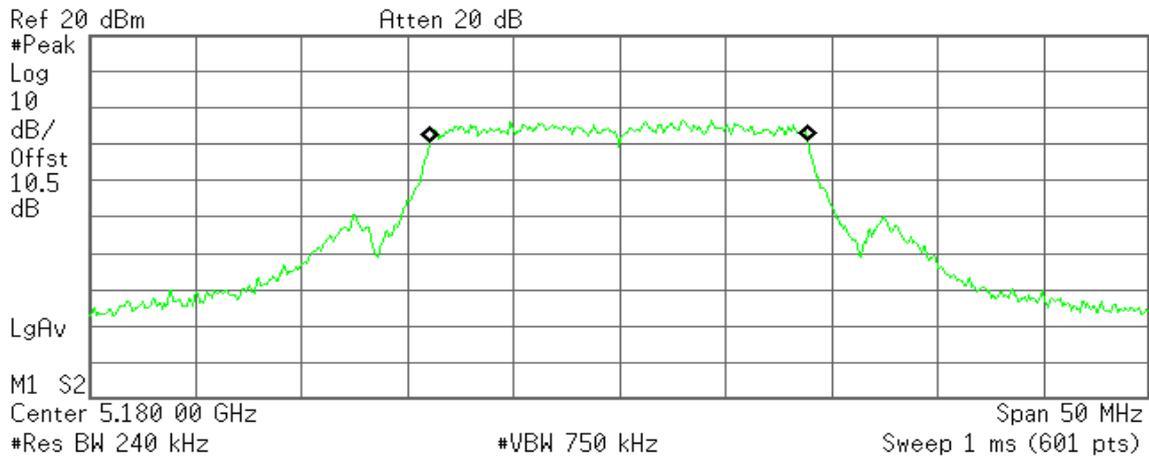

Occupied Bandwidth
17.7546 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -37.181 kHz
x dB Bandwidth 20.516 MHz

CH Mid

Agilent 13:06:21 Nov 14, 2011

R T

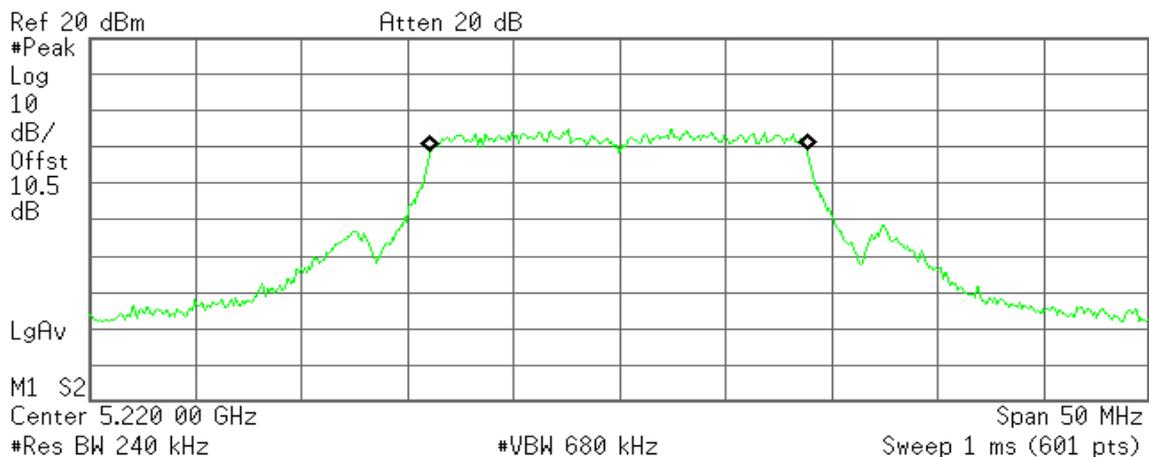

Occupied Bandwidth
17.6931 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -29.434 kHz
x dB Bandwidth 20.452 MHz



CH High

Agilent 13:09:18 Nov 14, 2011

R T

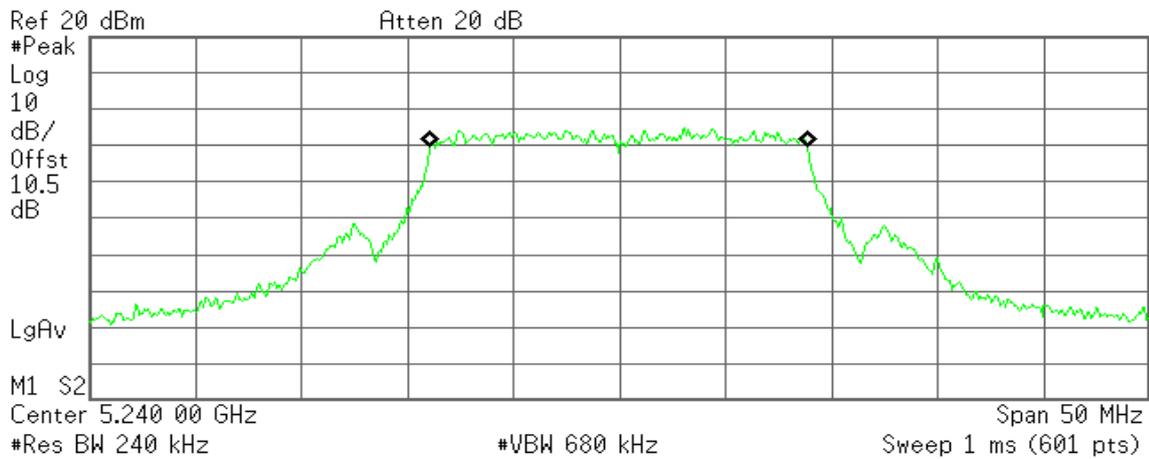

Occupied Bandwidth
17.7208 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -32.750 kHz
x dB Bandwidth 20.909 MHz

IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 2

CH Low

Agilent 13:45:59 Nov 14, 2011

R T

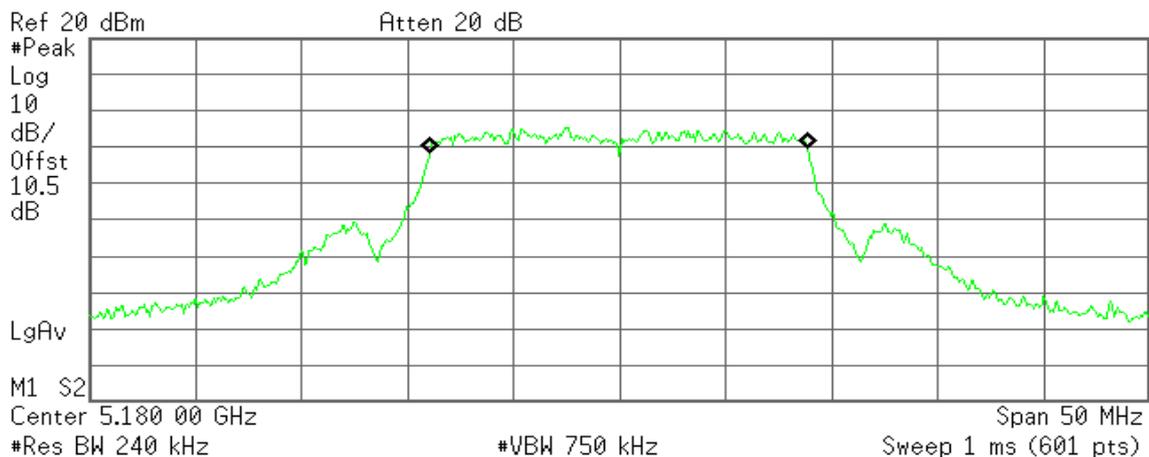

Occupied Bandwidth
17.7414 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -31.645 kHz
x dB Bandwidth 22.812 MHz



CH Mid

Agilent 13:53:06 Nov 14, 2011

R T

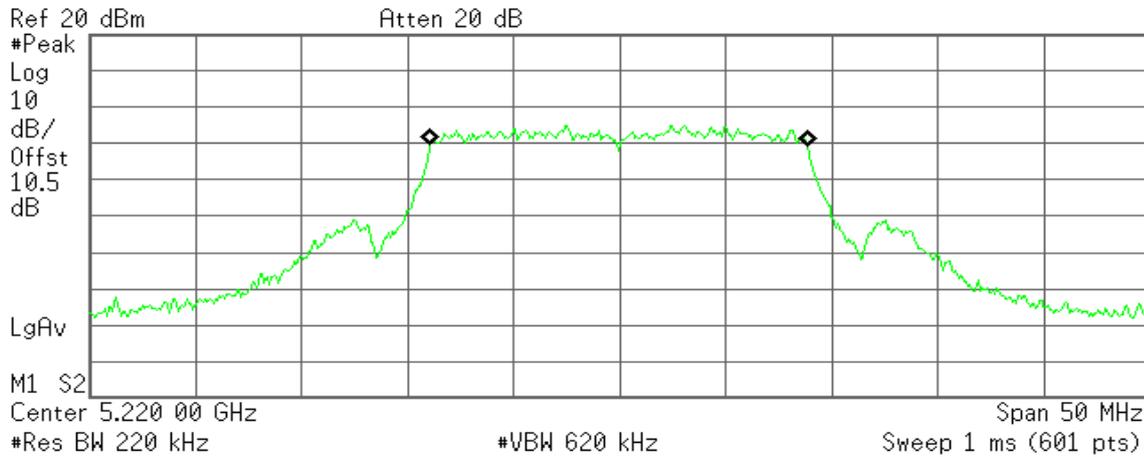

Occupied Bandwidth
17.7505 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -32.153 kHz
x dB Bandwidth 20.312 MHz

CH High

Agilent 13:58:39 Nov 14, 2011

R T

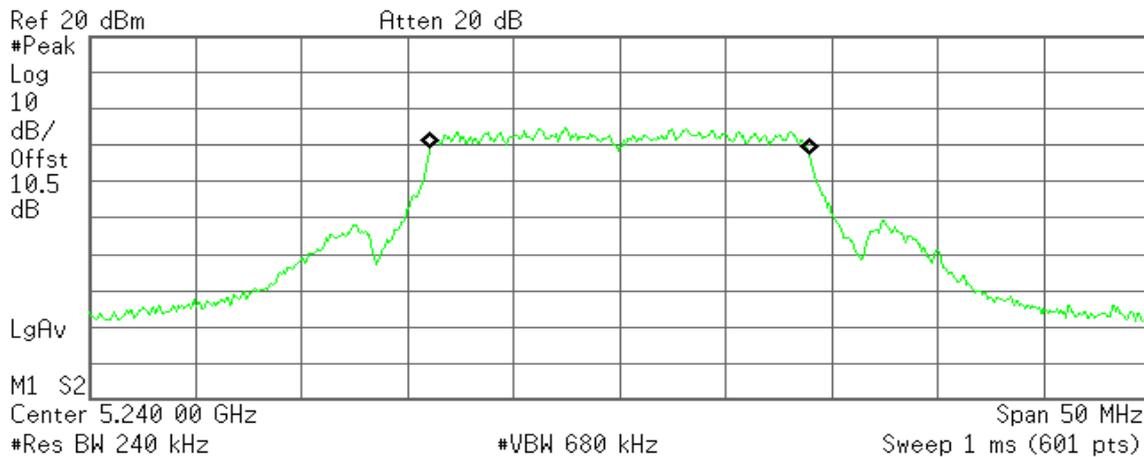

Occupied Bandwidth
17.7781 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -13.375 kHz
x dB Bandwidth 22.871 MHz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 0

CH Low

Agilent 13:15:44 Nov 14, 2011

R T

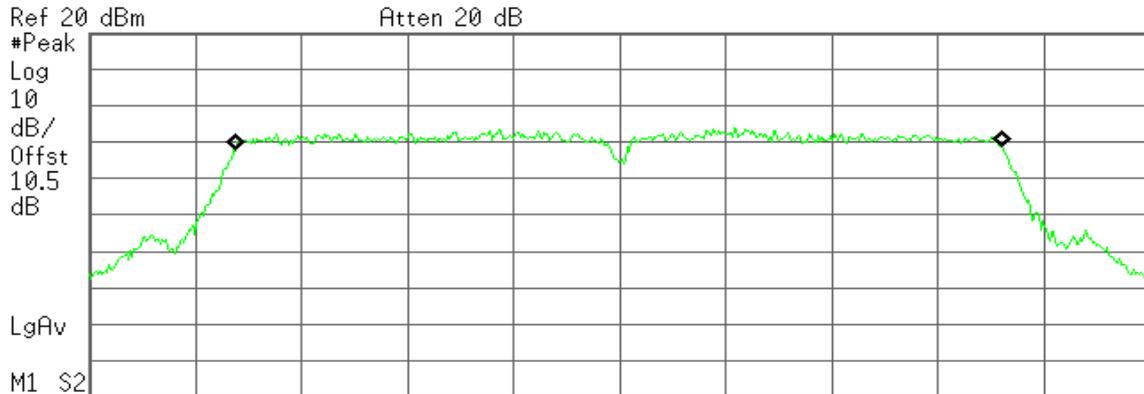

Center 5.190 00 GHz Span 50 MHz
 #Res BW 470 kHz #VBW 1.3 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.0843 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -22.348 kHz
x dB Bandwidth 39.932 MHz

CH High

Agilent 13:33:32 Nov 14, 2011

R T



Center 5.230 00 GHz Span 50 MHz
 #Res BW 470 kHz #VBW 1.3 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.1324 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -65.191 kHz
x dB Bandwidth 39.968 MHz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 1

CH Low

Agilent 13:22:17 Nov 14, 2011

R T

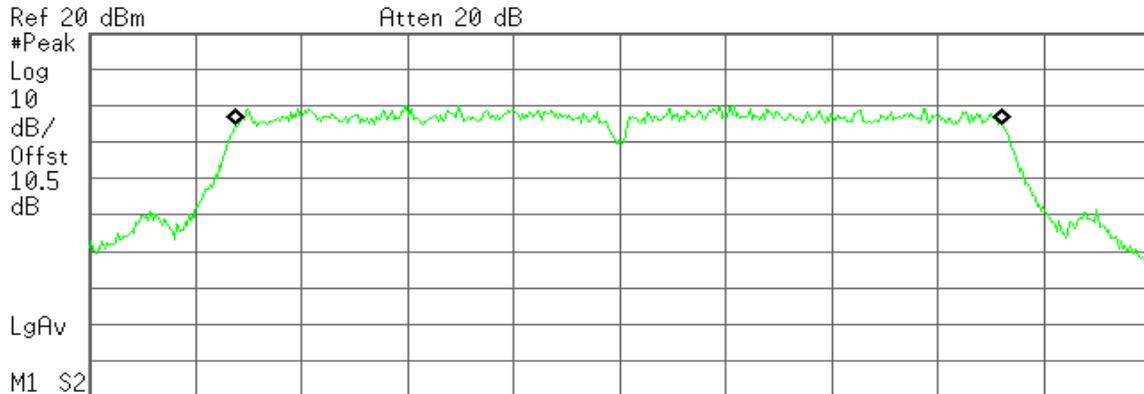

Center 5.190 00 GHz Span 50 MHz
 #Res BW 470 kHz #VBW 1.3 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.0754 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -8.251 kHz
x dB Bandwidth 39.326 MHz

CH High

Agilent 13:30:11 Nov 14, 2011

R T

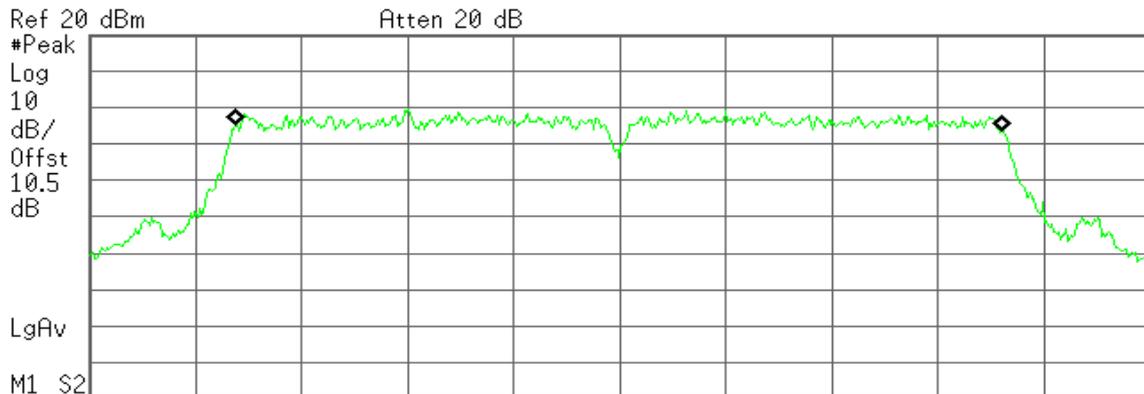

Center 5.230 00 GHz Span 50 MHz
 #Res BW 390 kHz #VBW 1.2 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.0860 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -56.810 kHz
x dB Bandwidth 39.539 MHz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 2

CH Low

Agilent 13:39:37 Nov 14, 2011

R T

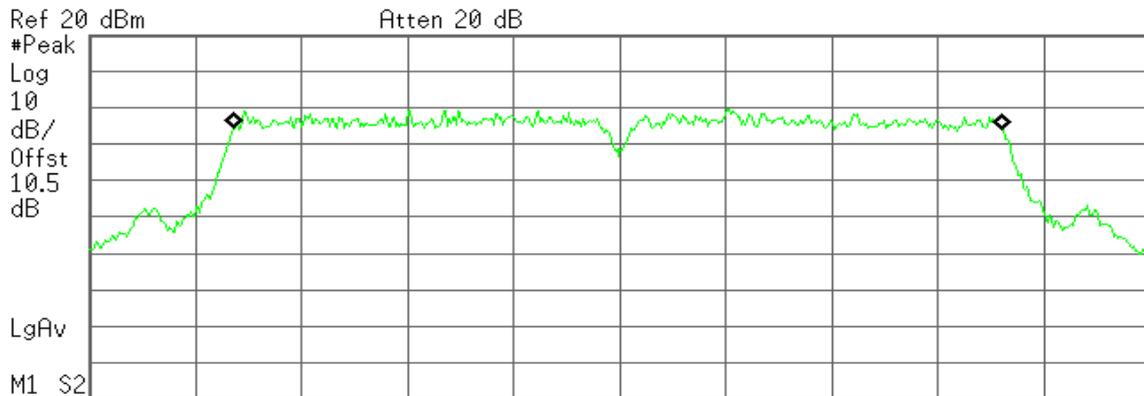

Ref 20 dBm Atten 20 dB
#Peak Log 10 dB/ Offst 10.5 dB
LgAv
M1 S2
Center 5.190 00 GHz Span 50 MHz
#Res BW 430 kHz #VBW 1.3 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.1581 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -62.487 kHz
x dB Bandwidth 39.483 MHz

CH High

Agilent 13:42:32 Nov 14, 2011

R T

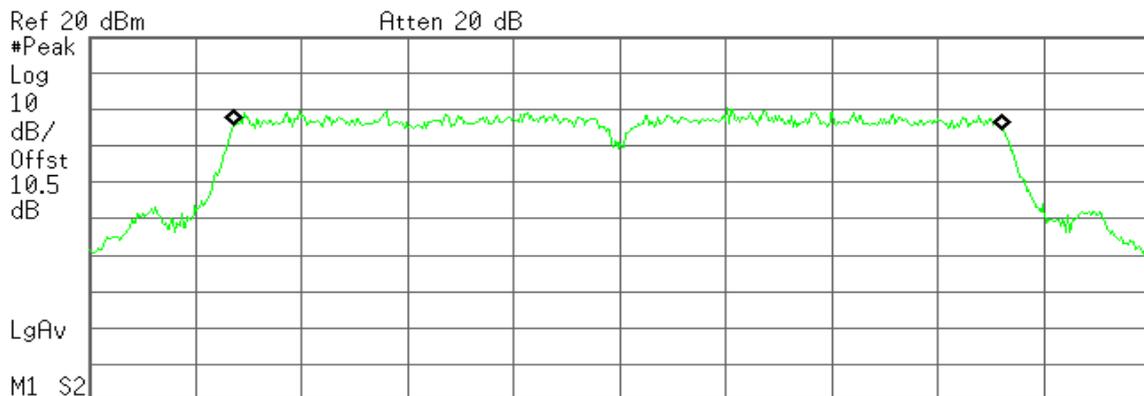

Ref 20 dBm Atten 20 dB
#Peak Log 10 dB/ Offst 10.5 dB
LgAv
M1 S2
Center 5.230 00 GHz Span 50 MHz
#Res BW 470 kHz #VBW 1.5 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
36.2026 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -66.352 kHz
x dB Bandwidth 39.203 MHz



7.2 PEAK POWER

LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The peak power shall not exceed the limit as follow:

Specified Limit of the Peak Power

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5180	19.84	12.97542	16.9754	17.00
Mid	5220	20.83	13.18689	17.1869	17.00
High	5240	22.79	13.57744	17.5774	17.00



Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz

Mode 1

Channel	Frequency (MHz)	Chain 0 26dB Bandwidth (B) (MHz)	Chain 1 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5180	20.682	20.516	13.1559	17.1559	17.00
Mid	5220	20.809	20.452	13.1825	17.1825	17.00
High	5240	20.912	20.909	13.2040	17.2040	17.00

Mode 2

Channel	Frequency (MHz)	Chain 1 26dB Bandwidth (B) (MHz)	Chain 2 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5180	20.516	22.812	13.5816	17.5816	17.00
Mid	5220	20.452	20.312	13.1074	17.1074	17.00
High	5240	20.909	22.871	13.5929	17.5929	17.00

Mode 3

Channel	Frequency (MHz)	Chain 0 26dB Bandwidth (B) (MHz)	Chain 2 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5180	20.682	22.812	13.5816	17.5816	17.00
Mid	5220	20.809	20.312	13.1825	17.1825	17.00
High	5240	20.912	22.871	13.5929	17.5929	17.00



Test mode: IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz

Mode 1

Channel	Frequency (MHz)	Chain 0 26dB Bandwidth (B) (MHz)	Chain 1 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5190	39.932	39.326	16.0132	20.0132	17.00
High	5230	39.968	39.539	16.0171	20.0171	17.00

Mode 2

Channel	Frequency (MHz)	Chain 1 26dB Bandwidth (B) (MHz)	Chain 2 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5190	39.326	39.483	15.9641	19.9641	17.00
High	5230	39.539	39.203	15.9703	19.9703	17.00


Mode 3

Channel	Frequency (MHz)	Chain 0 26dB Bandwidth (B) (MHz)	Chain 2 26dB Bandwidth (B) (MHz)	10 Log B (dB)	EIRP 4 + 10 Log B	EIRP Power Limit (dBm)
Low	5190	39.932	39.483	16.0132	20.0132	17.00
High	5230	39.968	39.203	16.0171	20.0171	17.00



Test Configuration

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.



TEST PROCEDURE

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5180	13.13	17.00
Mid	5220	11.33	17.00
High	5240	12.43	17.00

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**Mode 1**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5180	9.20	9.69	12.46	15.06
Mid	5220	10.38	9.57	13.00	15.06
High	5240	10.00	9.28	12.67	15.06

Remark:

1. Total Output Power (w) = Chain 0 ($10^{(Output\ Power / 10) / 1000}$) + Chain 1 ($10^{(Output\ Power / 10) / 1000}$)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.

Mode 2

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5180	9.69	8.37	12.09	15.06
Mid	5220	9.57	9.71	12.65	15.06
High	5240	9.28	10.15	12.75	15.06

Remark:

1. Total Output Power (w) = Chain 1 ($10^{(Output\ Power / 10) / 1000}$) + Chain 2 ($10^{(Output\ Power / 10) / 1000}$)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.

Mode 3

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5180	9.20	8.37	11.82	15.06
Mid	5220	10.38	9.71	13.07	15.06
High	5240	10.00	10.15	13.09	15.06

Remark:

1. Total Output Power (w) = Chain 0 ($10^{(Output\ Power / 10) / 1000}$) + Chain 2 ($10^{(Output\ Power / 10) / 1000}$)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.



Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

Mode 1

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5190	9.24	8.67	11.97	15.06
High	5230	9.17	9.28	12.24	15.06

Remark:

1. Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 1 (10^(Output Power /10)/1000)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.

Mode 2

Channel	Frequency (MHz)	Chain 1 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5190	8.67	10.06	12.43	15.06
High	5230	9.28	9.92	12.62	15.06

Remark:

1. Total Output Power (w) = Chain 1 (10^(Output Power /10)/1000) + Chain 2 (10^(Output Power /10)/1000)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.

Mode3

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 2 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	5190	9.24	10.06	12.68	15.06
High	5230	9.17	9.92	12.57	15.06

Remark:

1. Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 2 (10^(Output Power /10)/1000)
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 15.06dBm.




Test Plot

IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 09:28:59 Nov 14, 2011

R T

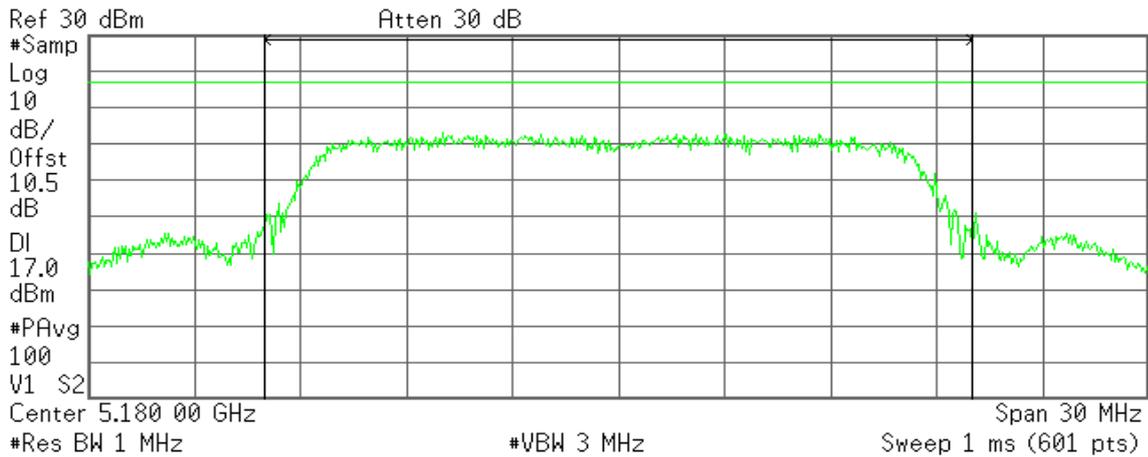

Channel Power

13.13 dBm /20.0000 MHz


Power Spectral Density

-59.88 dBm/Hz

CH Mid

Agilent 09:32:00 Nov 14, 2011

R T

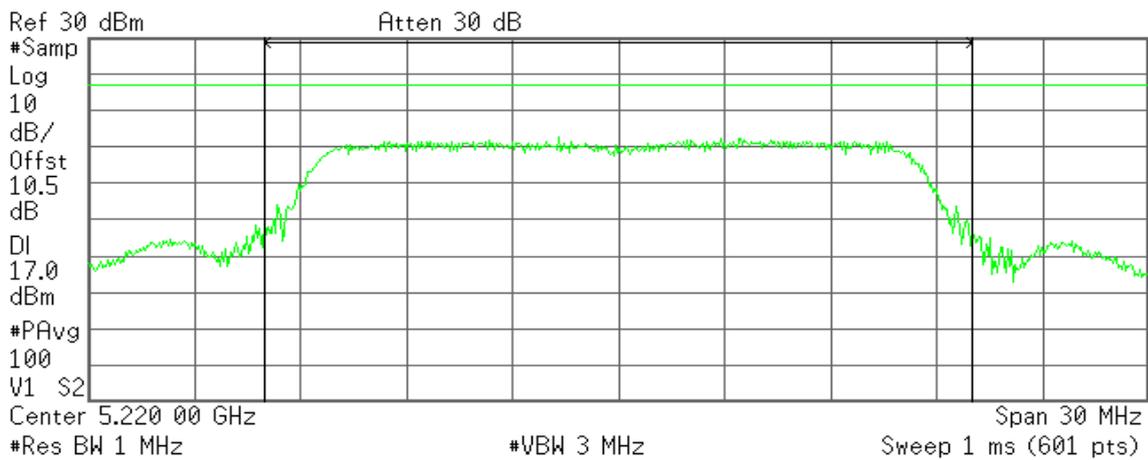

Channel Power

11.33 dBm /20.0000 MHz

Power Spectral Density


-61.68 dBm/Hz



CH High

Agilent 09:34:42 Nov 14, 2011

R T

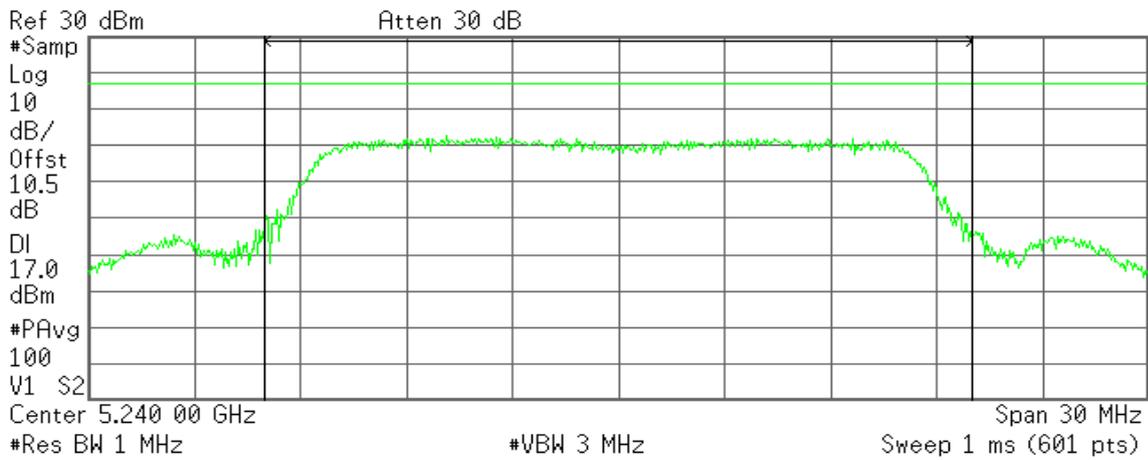

Channel Power

12.43 dBm /20.0000 MHz

Power Spectral Density


-60.58 dBm/Hz

IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / Chain 0

CH Low

Agilent 14:37:52 Nov 14, 2011

R T

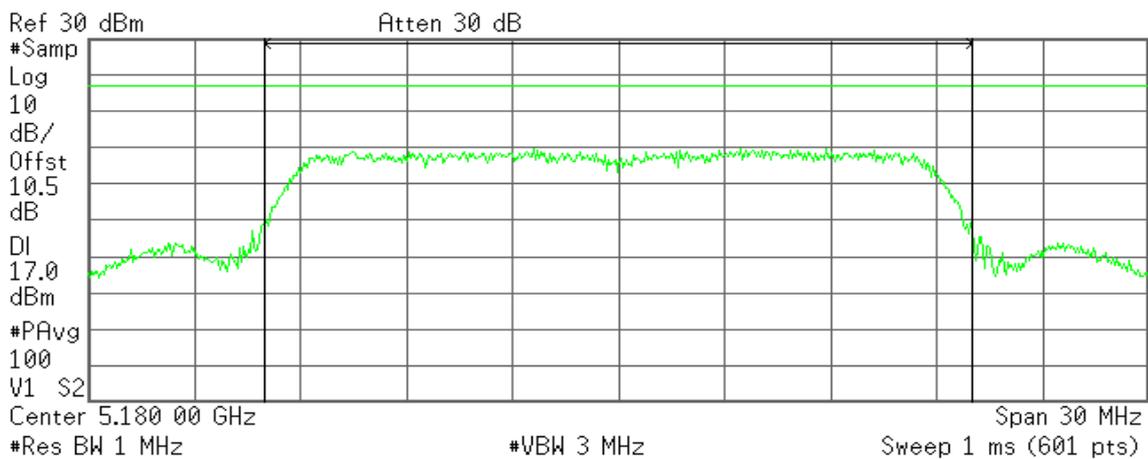

Channel Power

9.20 dBm /20.0000 MHz

Power Spectral Density


-63.81 dBm/Hz



CH Mid

Agilent 14:39:31 Nov 14, 2011

R T

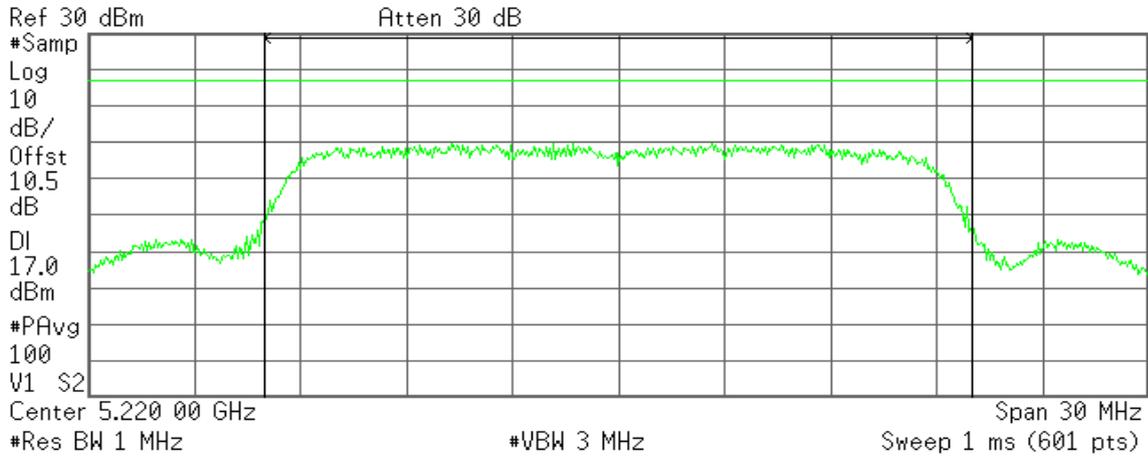

Channel Power

10.38 dBm /20.0000 MHz


Power Spectral Density

-62.63 dBm/Hz

CH High

Agilent 14:45:50 Nov 14, 2011

R T

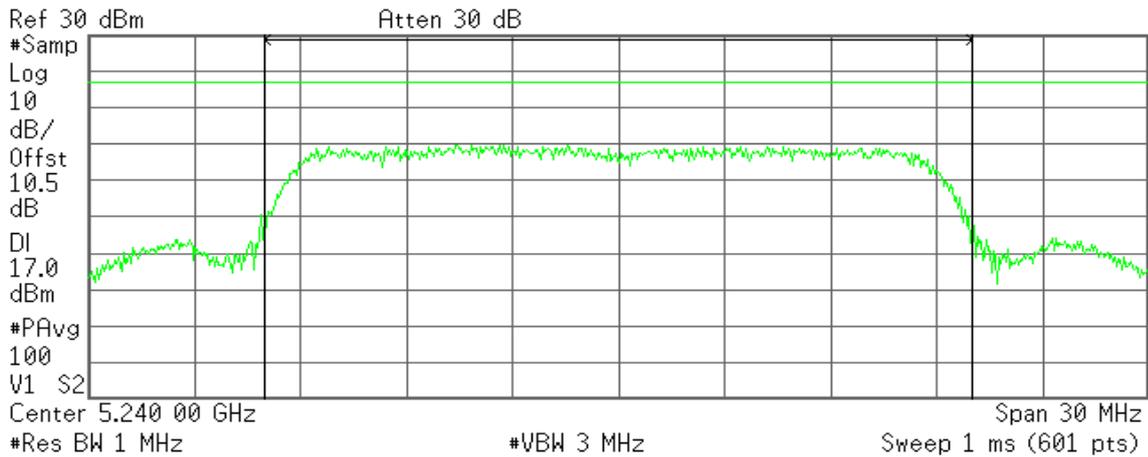

Channel Power

10.00 dBm /20.0000 MHz

Power Spectral Density

-63.01 dBm/Hz




IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / Chain 1

CH Low

Agilent 14:35:01 Nov 14, 2011

R T

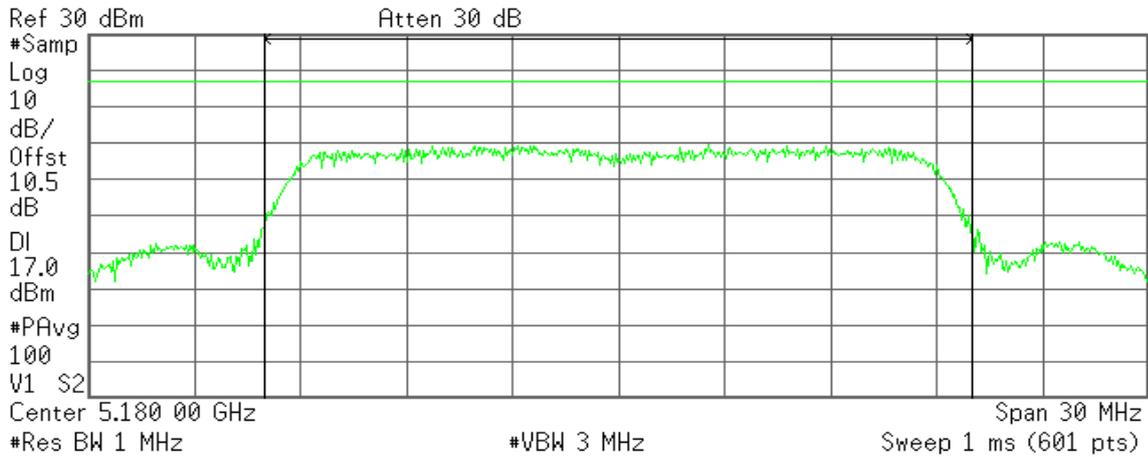

Channel Power

9.69 dBm /20.0000 MHz


Power Spectral Density

-63.32 dBm/Hz

CH Mid

Agilent 14:41:08 Nov 14, 2011

R T

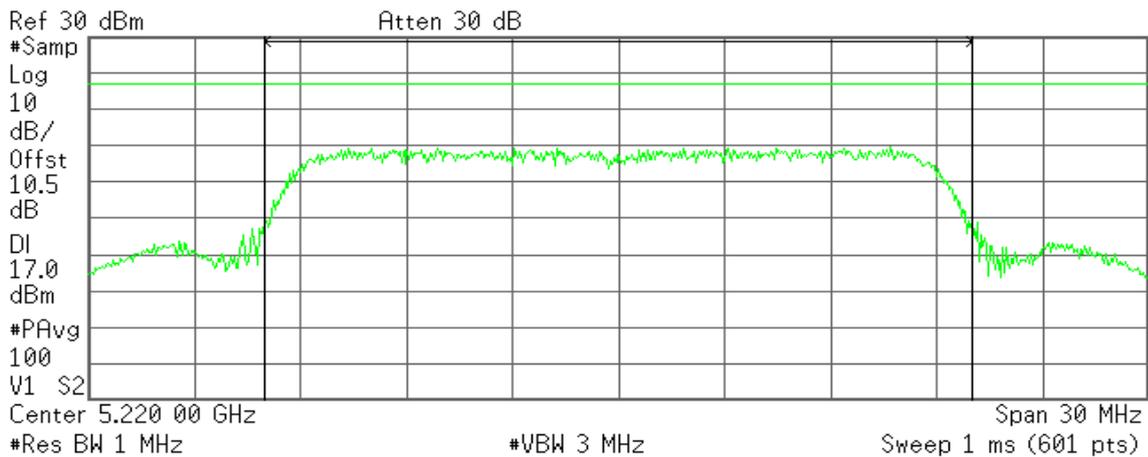

Channel Power

9.57 dBm /20.0000 MHz

Power Spectral Density


-63.44 dBm/Hz



CH High

Agilent 14:44:44 Nov 14, 2011

R T

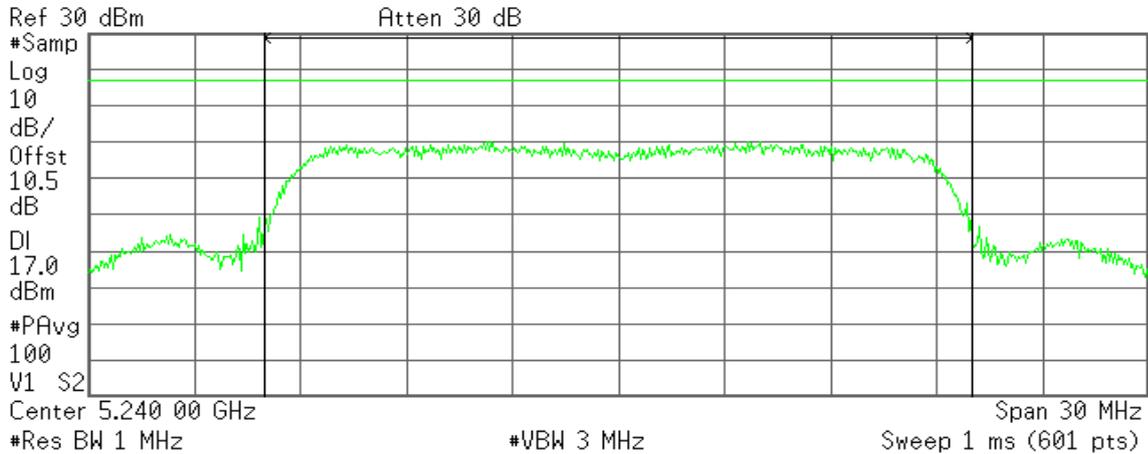

Channel Power

9.28 dBm /20.0000 MHz

Power Spectral Density


-63.73 dBm/Hz

IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / Chain 2

CH Low

Agilent 14:35:58 Nov 14, 2011

R T

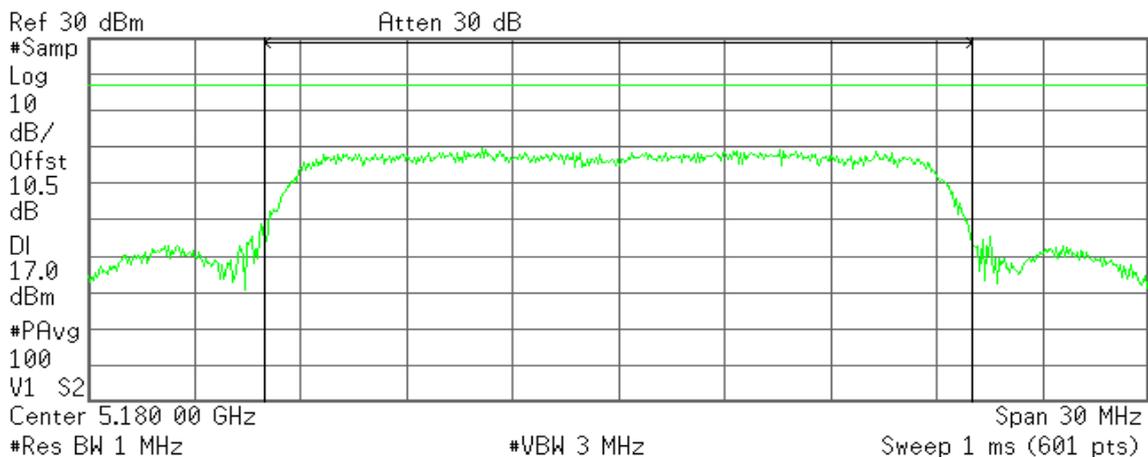

Channel Power

8.37 dBm /20.0000 MHz

Power Spectral Density


-64.64 dBm/Hz



CH Mid

Agilent 14:42:04 Nov 14, 2011

R T

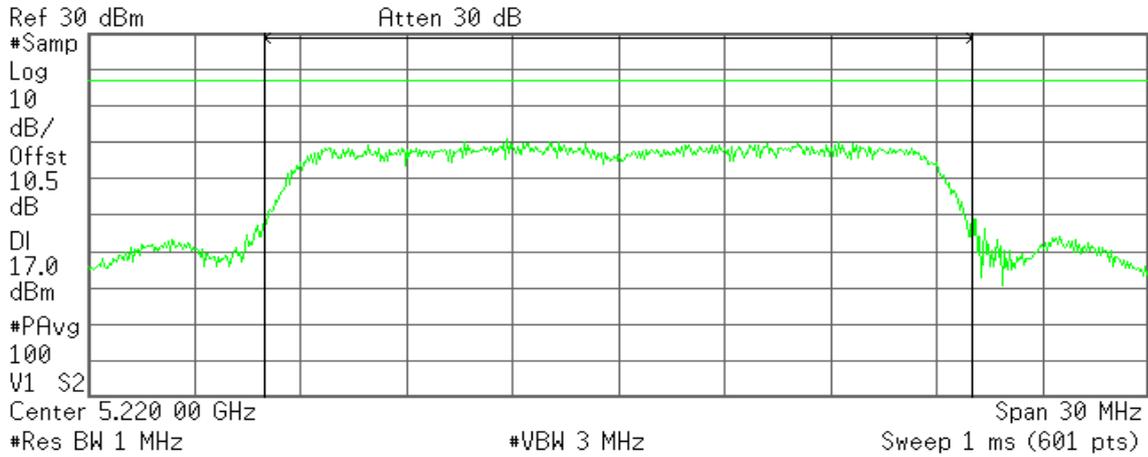

Channel Power

9.71 dBm /20.0000 MHz


Power Spectral Density

-63.30 dBm/Hz

CH High

Agilent 14:43:52 Nov 14, 2011

R T

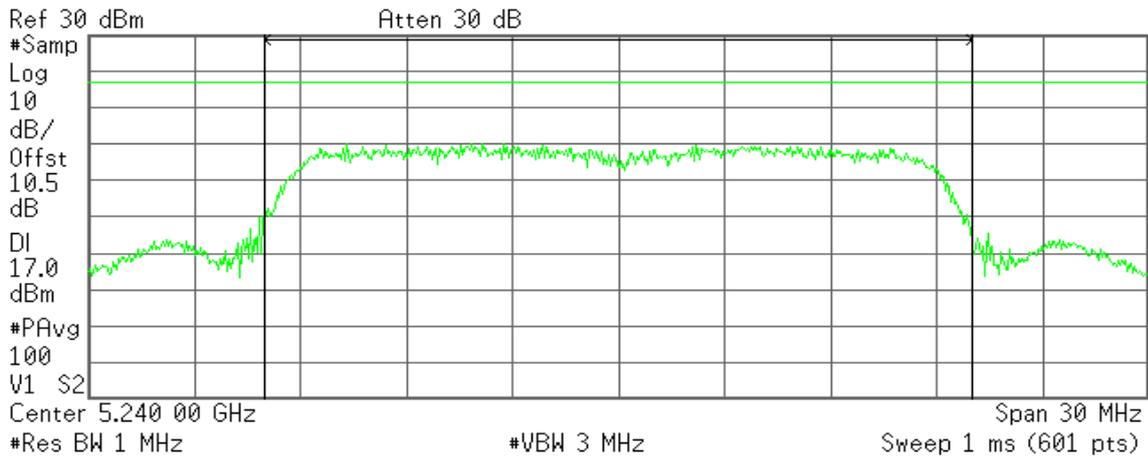

Channel Power

10.15 dBm /20.0000 MHz

Power Spectral Density

-62.86 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / Chain 0

CH Low

Agilent 14:25:08 Nov 14, 2011

R T

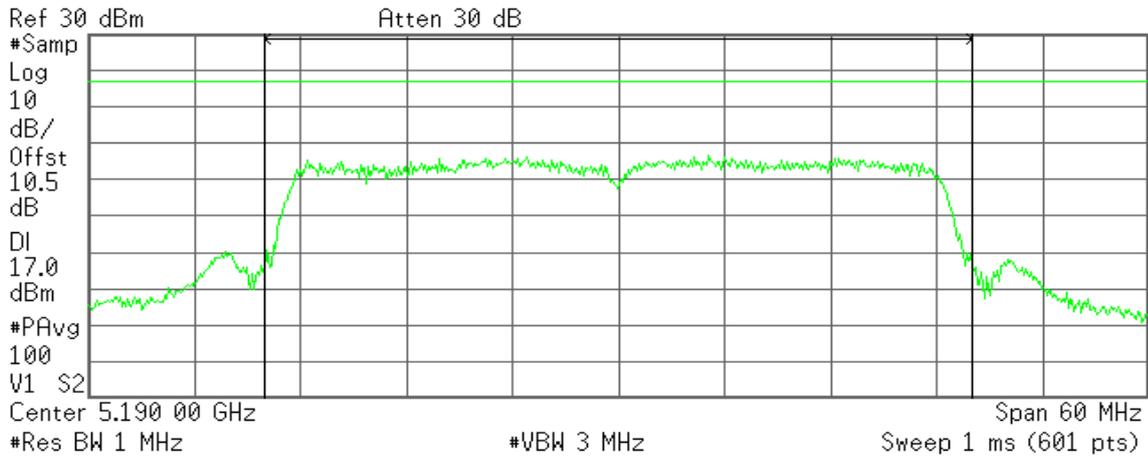

Channel Power

9.24 dBm /40.0000 MHz


Power Spectral Density

-66.79 dBm/Hz

CH High

Agilent 14:28:34 Nov 14, 2011

R T

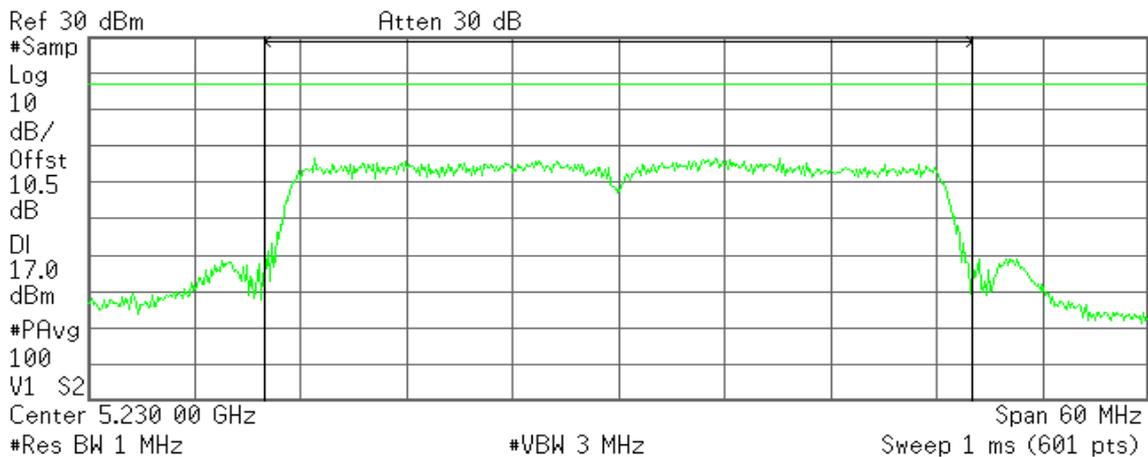

Channel Power

9.17 dBm /40.0000 MHz

Power Spectral Density

-66.85 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / Chain 1

CH Low

Agilent 14:26:05 Nov 14, 2011

R T

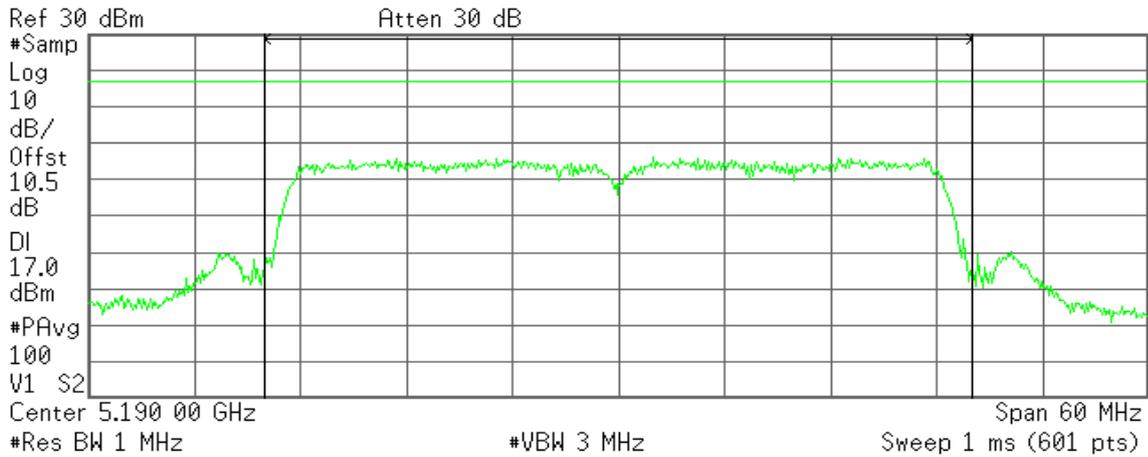

Channel Power

8.67 dBm /40.0000 MHz


Power Spectral Density

-67.35 dBm/Hz

CH High

Agilent 14:27:32 Nov 14, 2011

R T

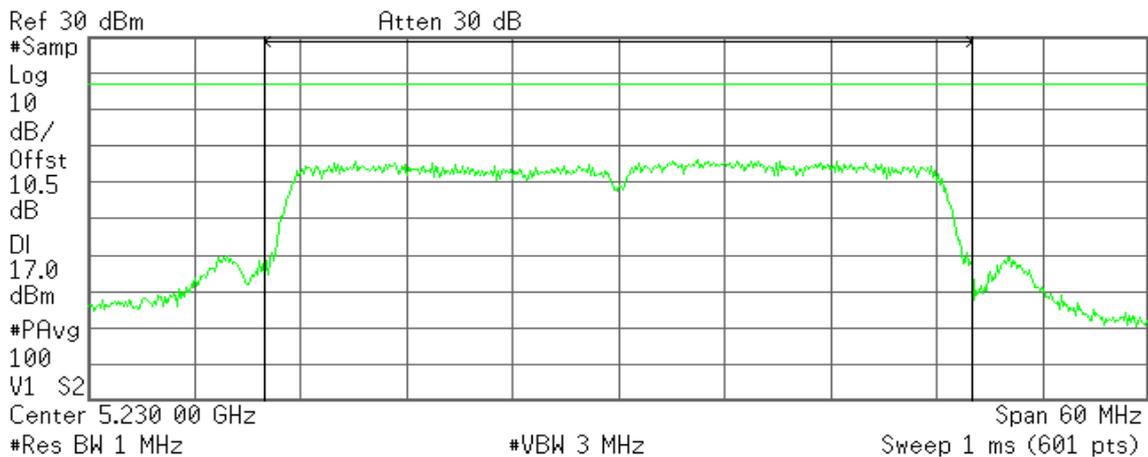

Channel Power

9.28 dBm /40.0000 MHz

Power Spectral Density

-66.74 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / Chain 2

CH Low

Agilent 14:23:58 Nov 14, 2011

R T

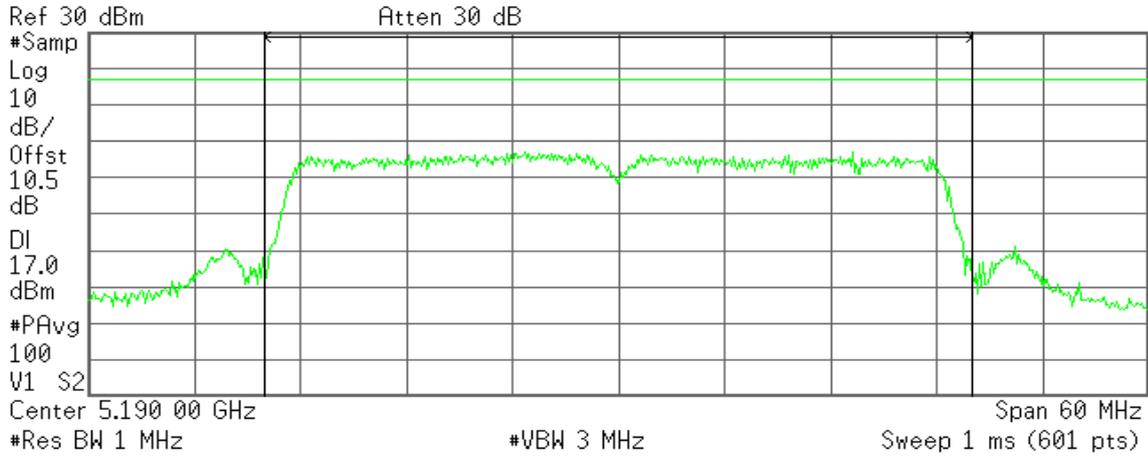

Channel Power

10.06 dBm /40.0000 MHz


Power Spectral Density

-65.96 dBm/Hz

CH High

Agilent 14:29:39 Nov 14, 2011

R T

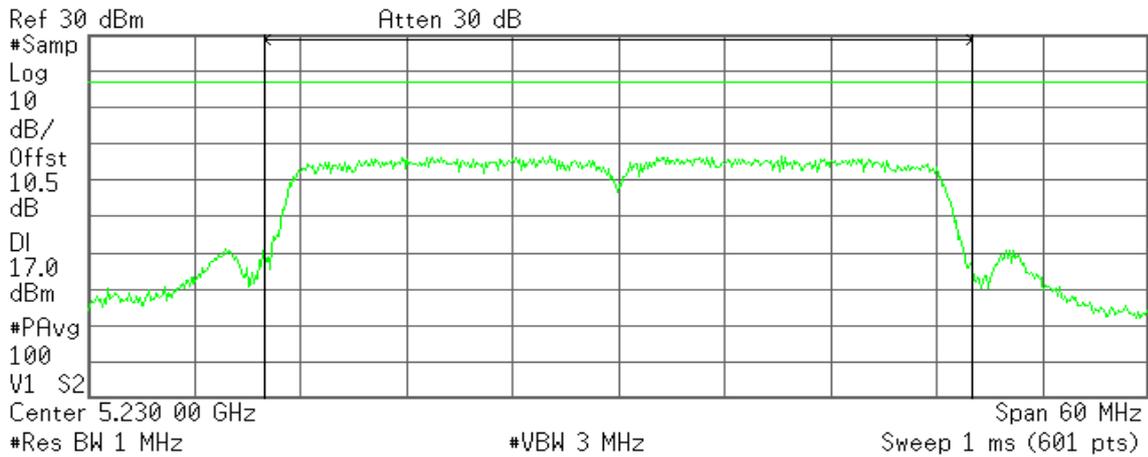

Channel Power

9.92 dBm /40.0000 MHz

Power Spectral Density

-66.10 dBm/Hz



7.3 BAND EDGES MEASUREMENT


LIMIT

According to §15.407(b),


- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Test Configuration

For Radiated

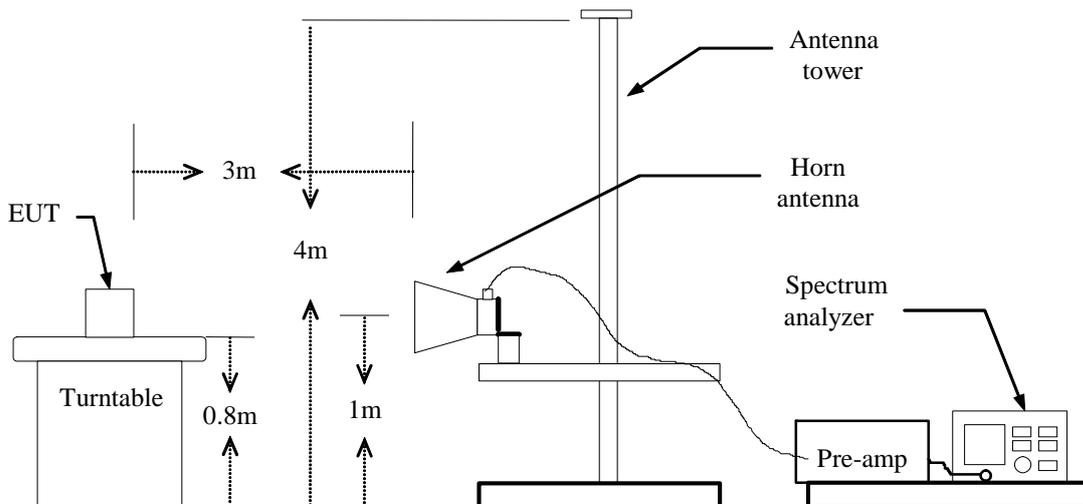

For Conducted





TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 300 kHz. The video bandwidth is set to 300 kHz.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



For Mode 1


Band Edges (IEEE 802.11n HT 20 MHz / 5180 MHz)

Detector mode: Peak

Polarity: Vertical

* Agilent 11:47:56 Nov 15, 2011

R T

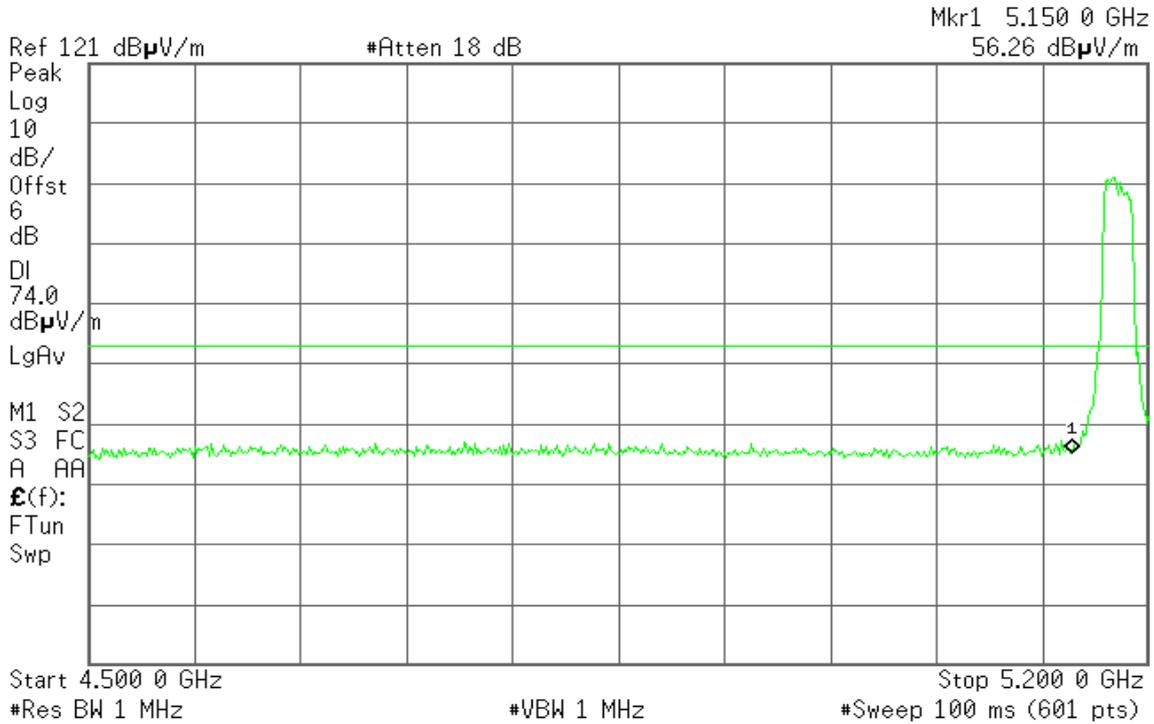


Detector mode: Average

Polarity: Vertical

* Agilent 11:58:30 Nov 15, 2011

R T

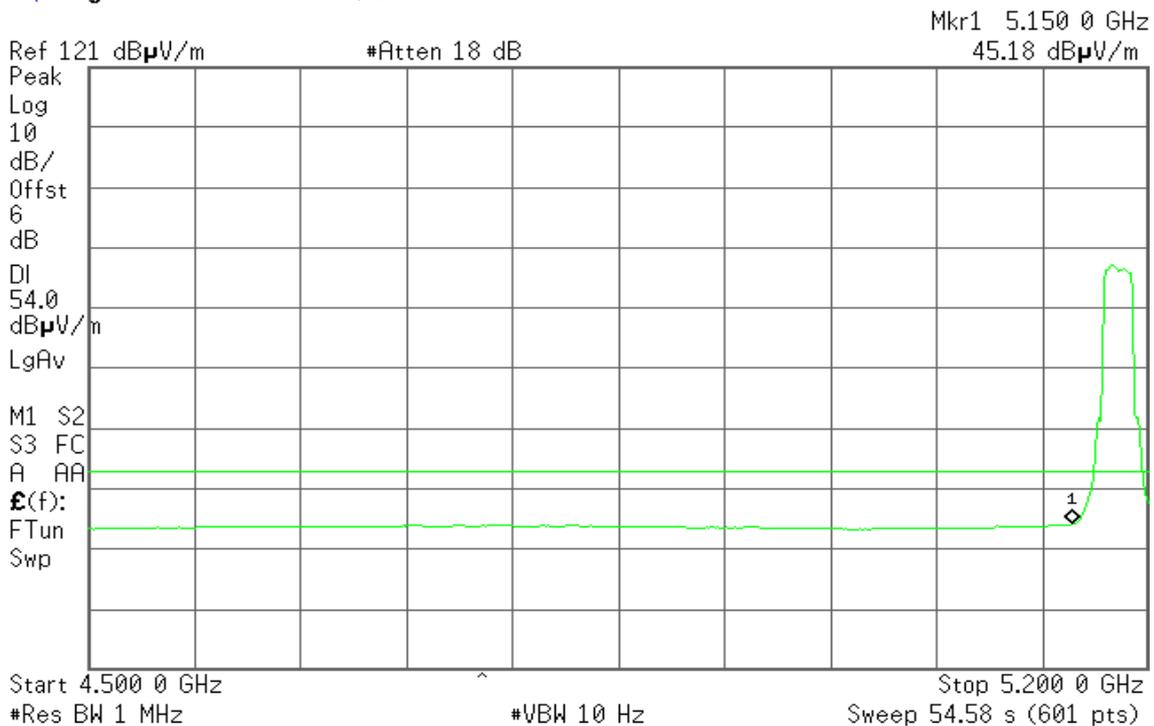




Detector mode: Peak

Polarity: Horizontal

Agilent 11:08:26 Nov 15, 2011

R T

Mkr1 5.150 0 GHz
57.68 dB μ V/m

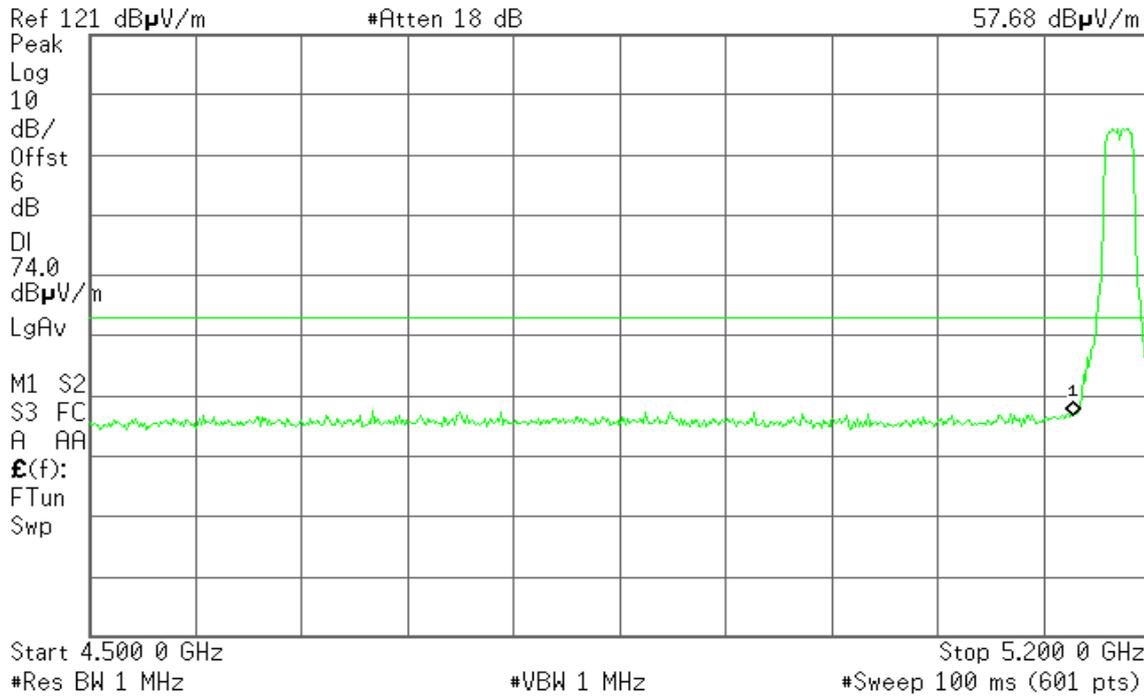


Detector mode: Average

Polarity: Horizontal

Agilent 11:09:46 Nov 15, 2011

R T

Mkr1 5.150 0 GHz
45.94 dB μ V/m

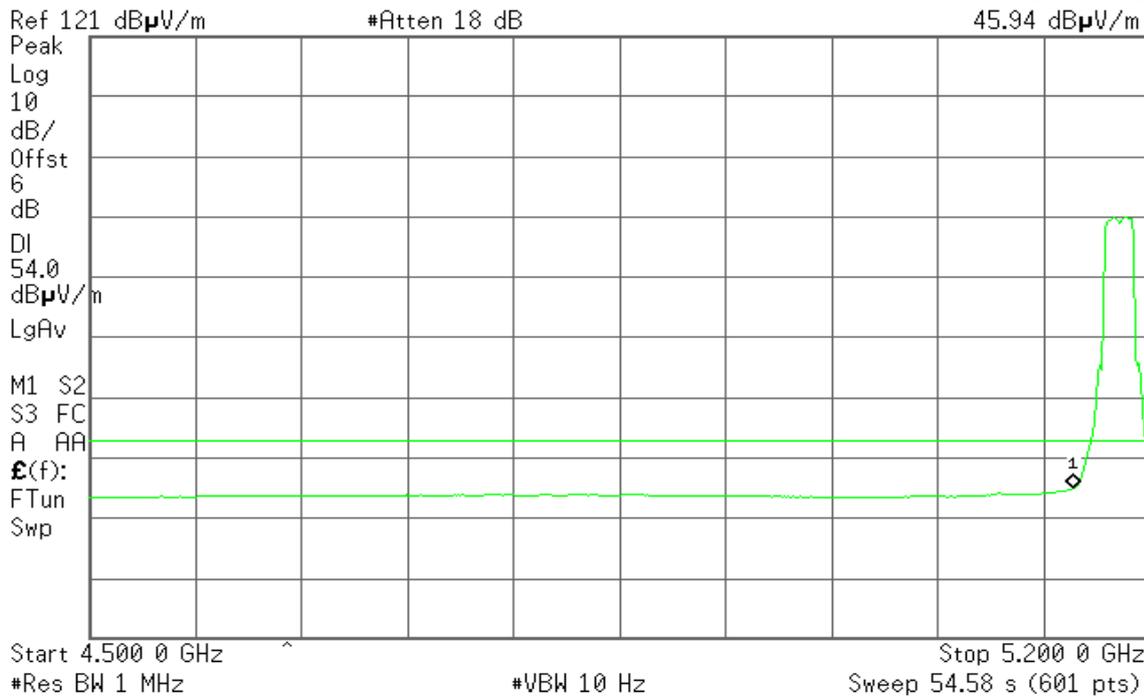




Band Edges (IEEE 802.11n HT 40 MHz / 5190 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 10:03:39 Nov 15, 2011

R T

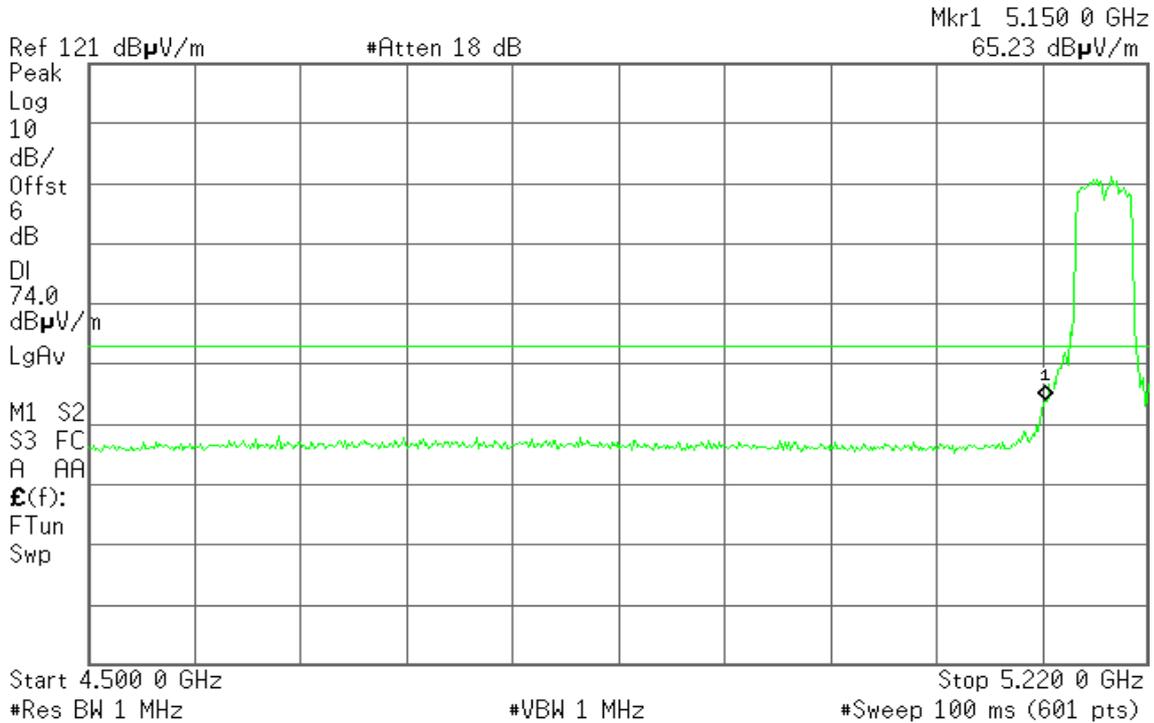


Detector mode: Average

Polarity: Vertical

Agilent 10:06:42 Nov 15, 2011

R T

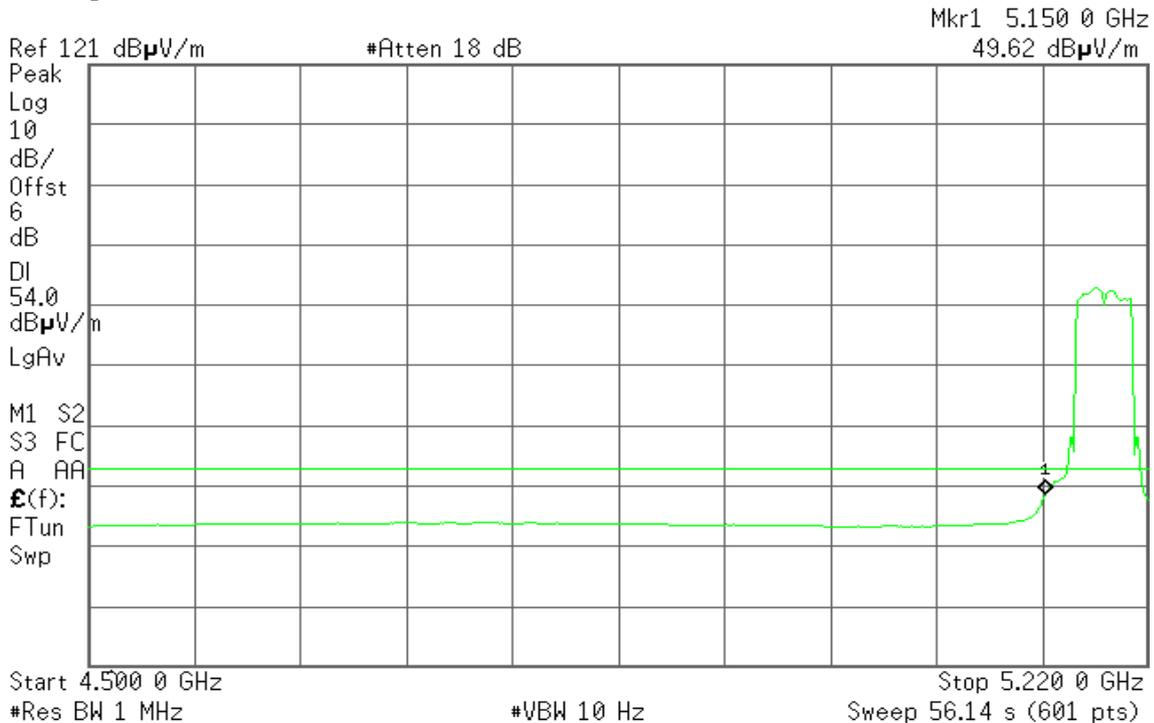




Detector mode: Peak

Polarity: Horizontal

Agilent 09:56:18 Nov 15, 2011

R T

Mkr1 5.150 0 GHz
67.48 dBµV/m

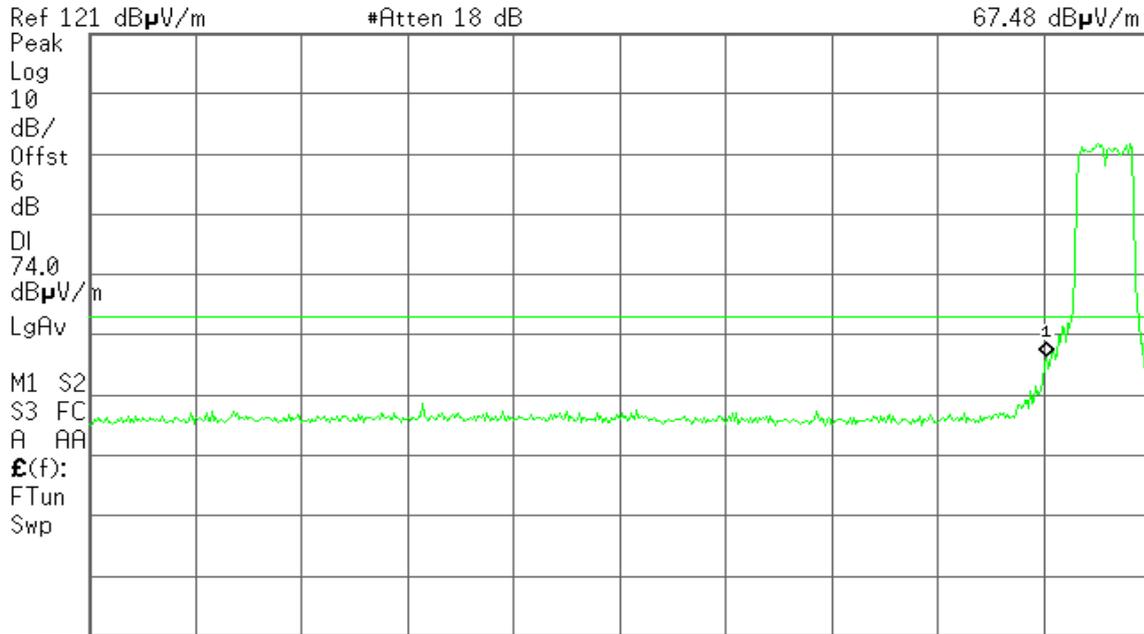

Start 4.500 0 GHz Stop 5.220 0 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Horizontal

Agilent 09:57:35 Nov 15, 2011

R T

Mkr1 5.150 0 GHz
50.03 dBµV/m

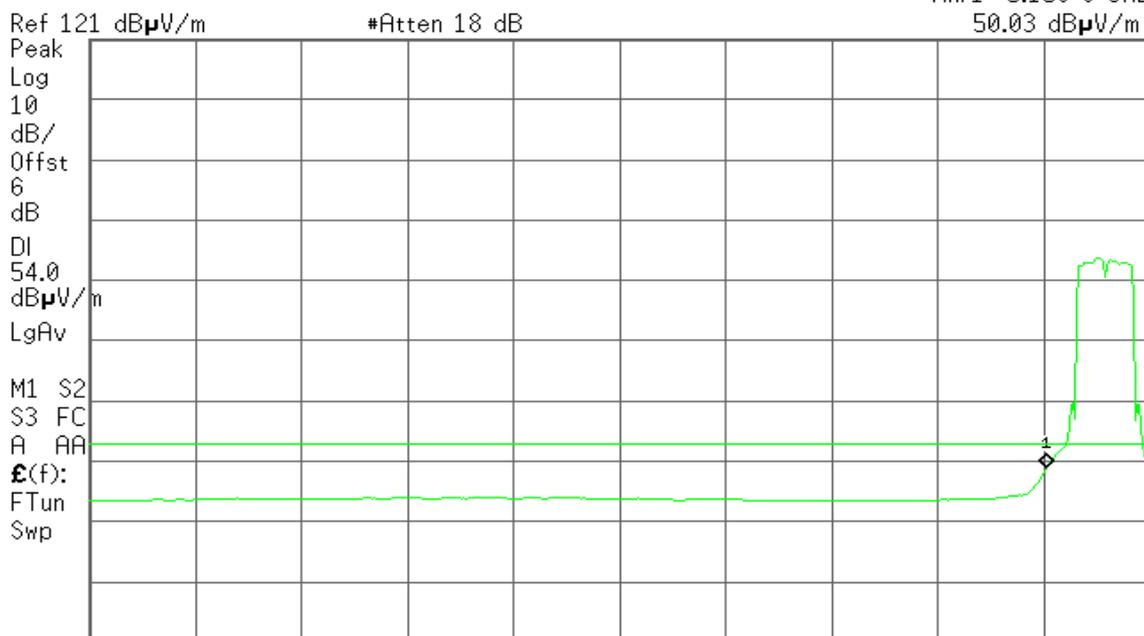

Start 4.500 0 GHz Stop 5.220 0 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 56.14 s (601 pts)



For Mode 2


Band Edges (IEEE 802.11n HT 20 MHz / 5180 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 09:45:41 Nov 14, 2011

R T

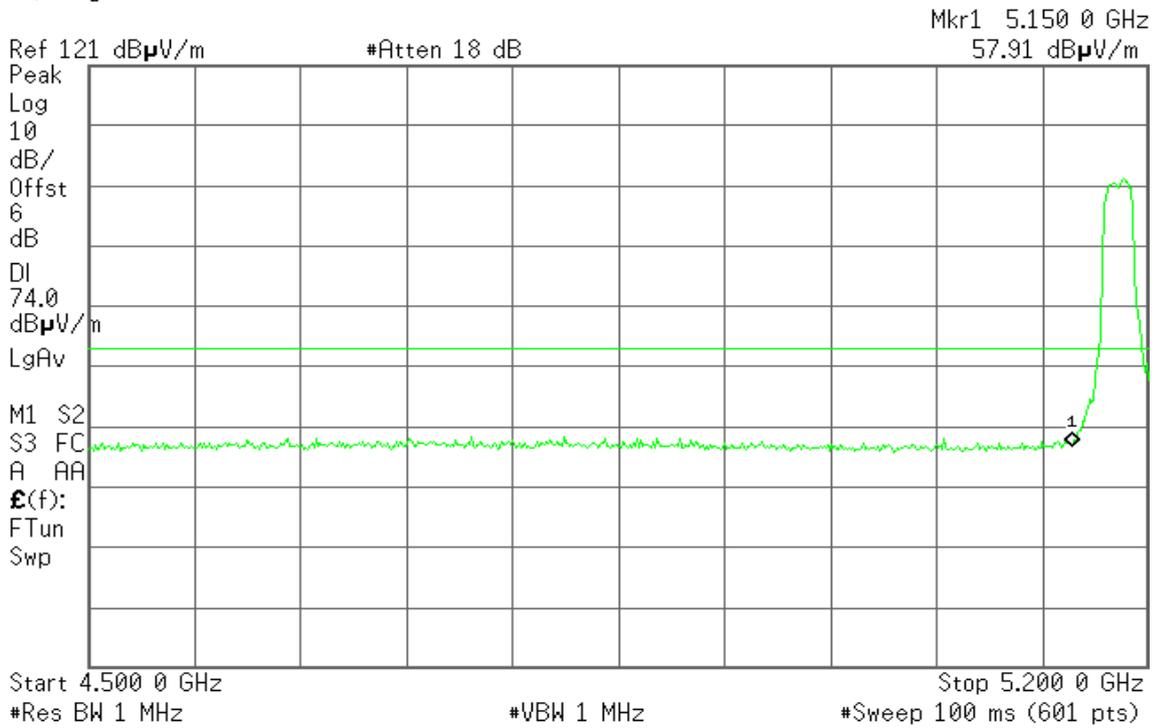


Detector mode: Average

Polarity: Vertical

Agilent 09:46:50 Nov 14, 2011

R T

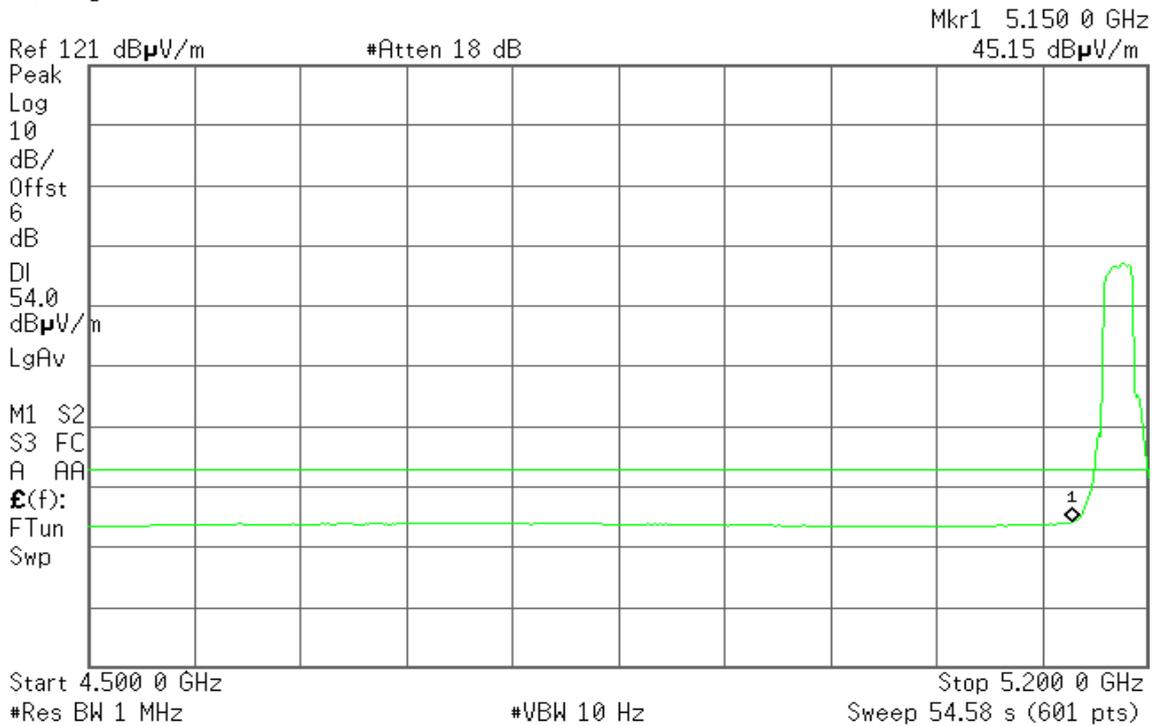




Detector mode: Peak

Polarity: Horizontal

Agilent 09:25:43 Nov 14, 2011

R T

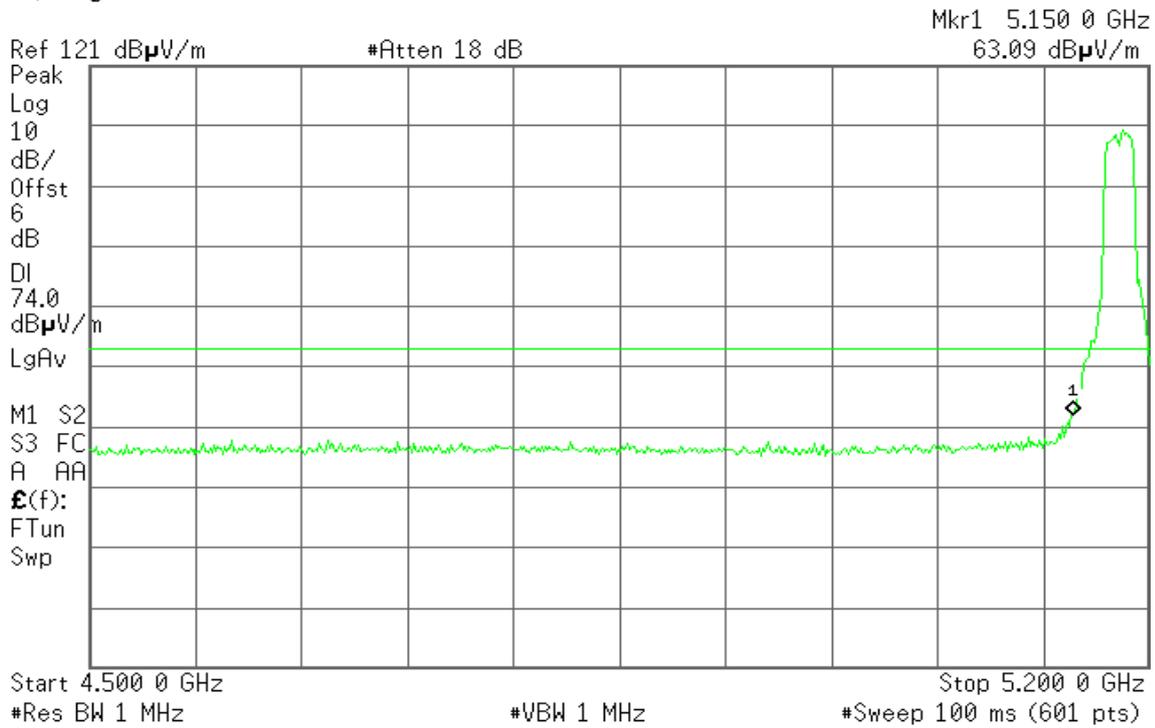


Detector mode: Average

Polarity: Horizontal

Agilent 09:26:56 Nov 14, 2011

R T

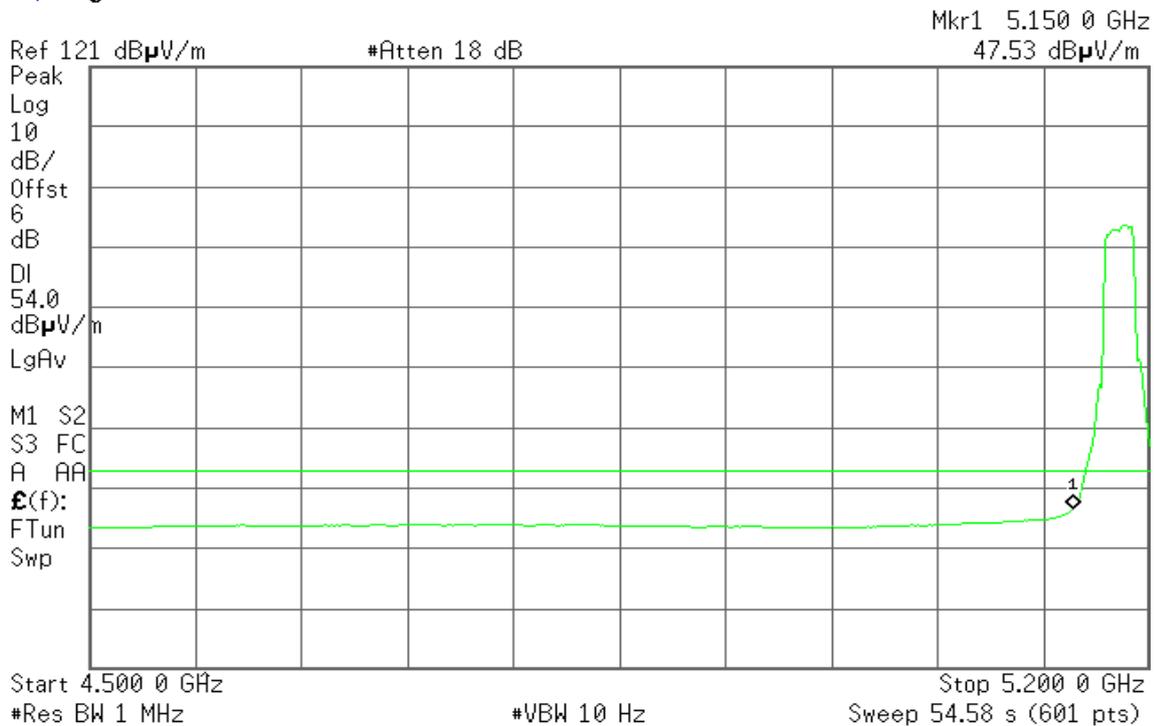




Band Edges (IEEE 802.11n HT 40 MHz / 5190 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 10:21:47 Nov 14, 2011

R T

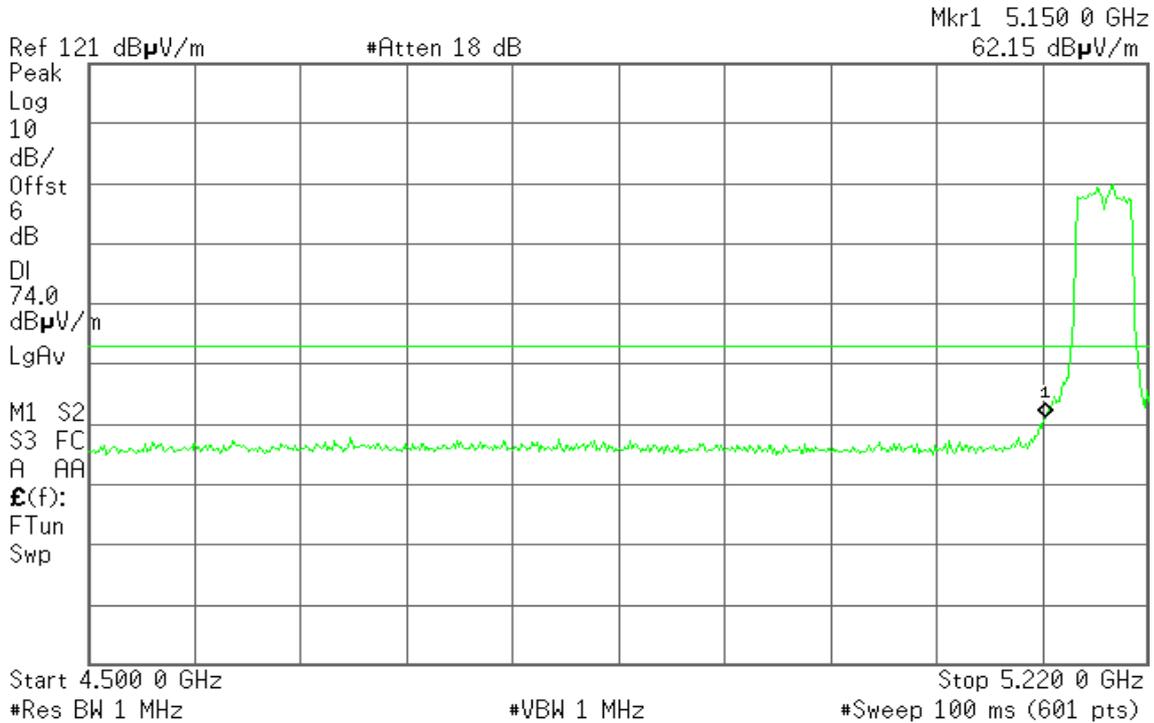


Detector mode: Average

Polarity: Vertical

Agilent 10:23:13 Nov 14, 2011

R T

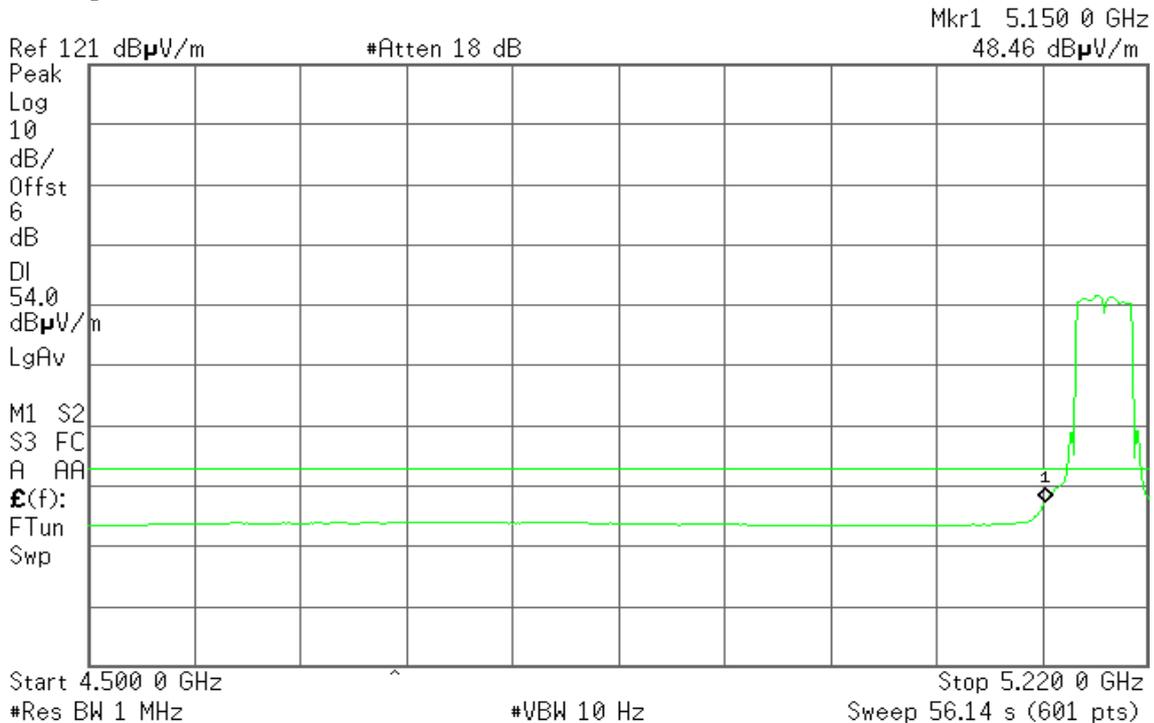




Detector mode: Peak

Polarity: Horizontal

Agilent 10:29:09 Nov 14, 2011

R T

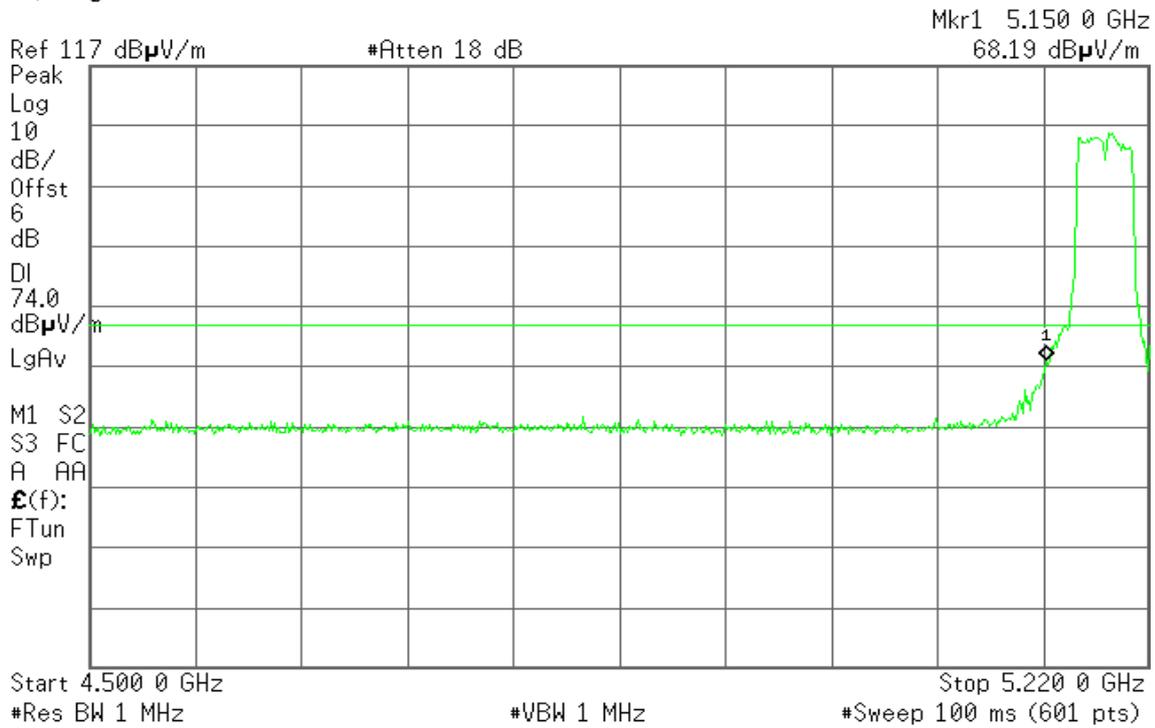


Detector mode: Average

Polarity: Horizontal

Agilent 10:33:56 Nov 14, 2011

R T

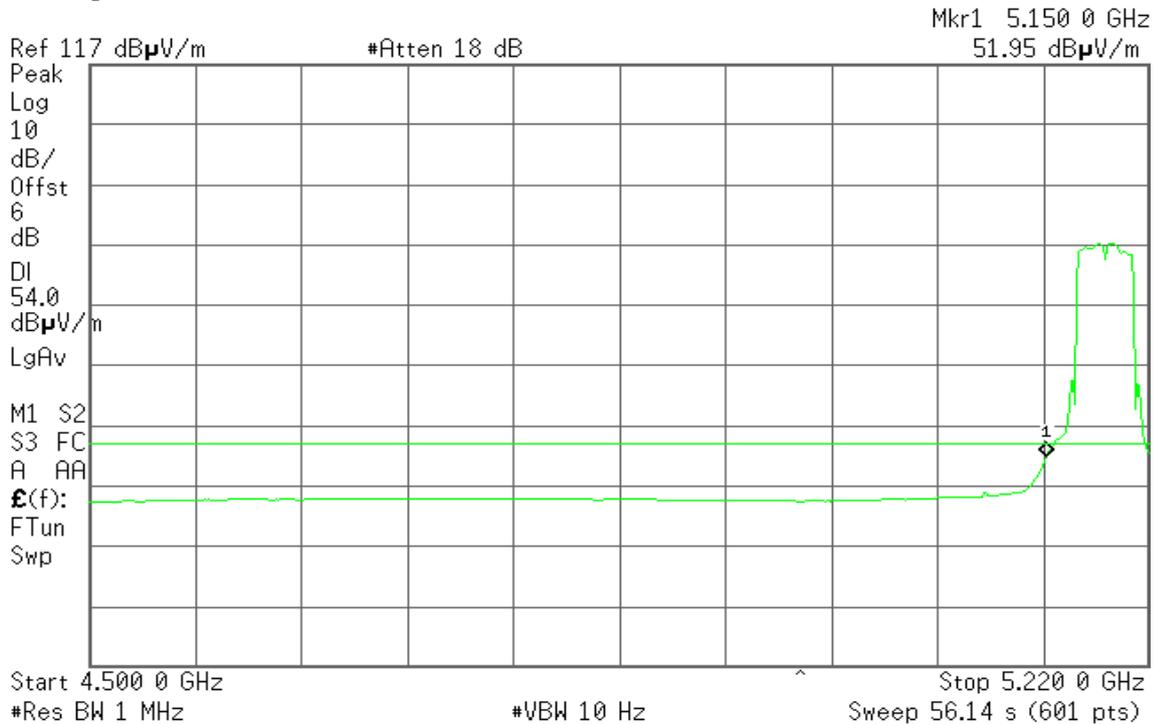



For Mode 3


Band Edges (IEEE 802.11a mode / 5180 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 14:38:13 Nov 16, 2011

R T

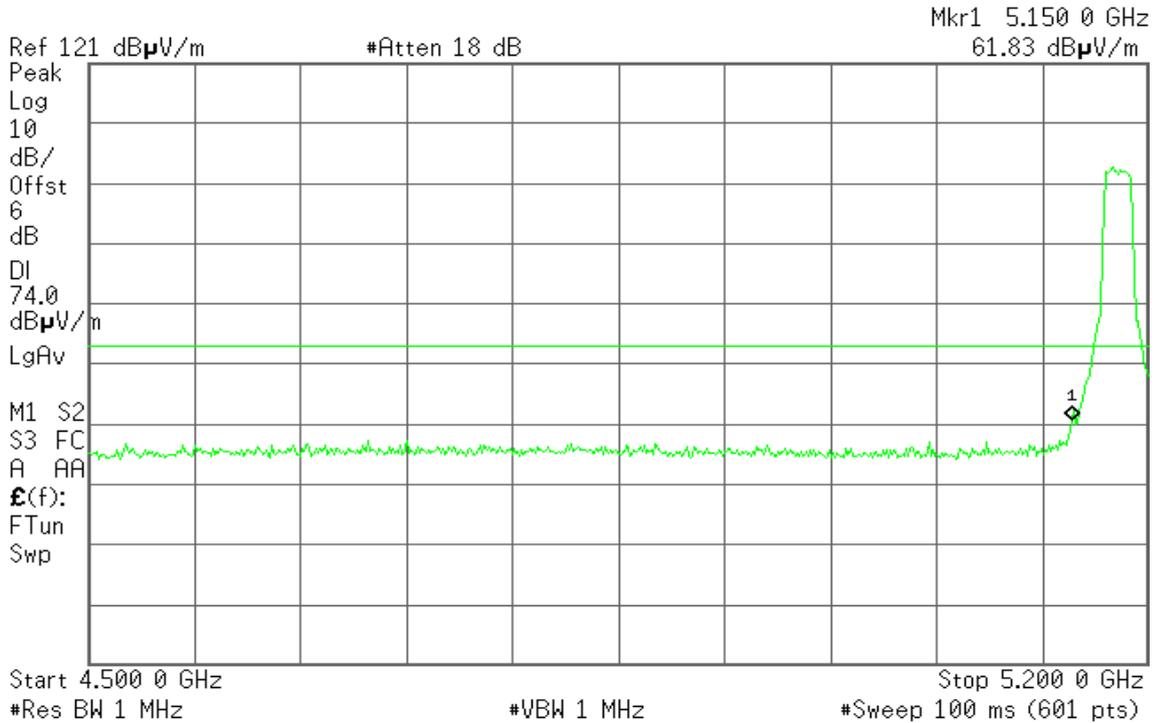


Detector mode: Average

Polarity: Vertical

Agilent 14:40:04 Nov 16, 2011

R T

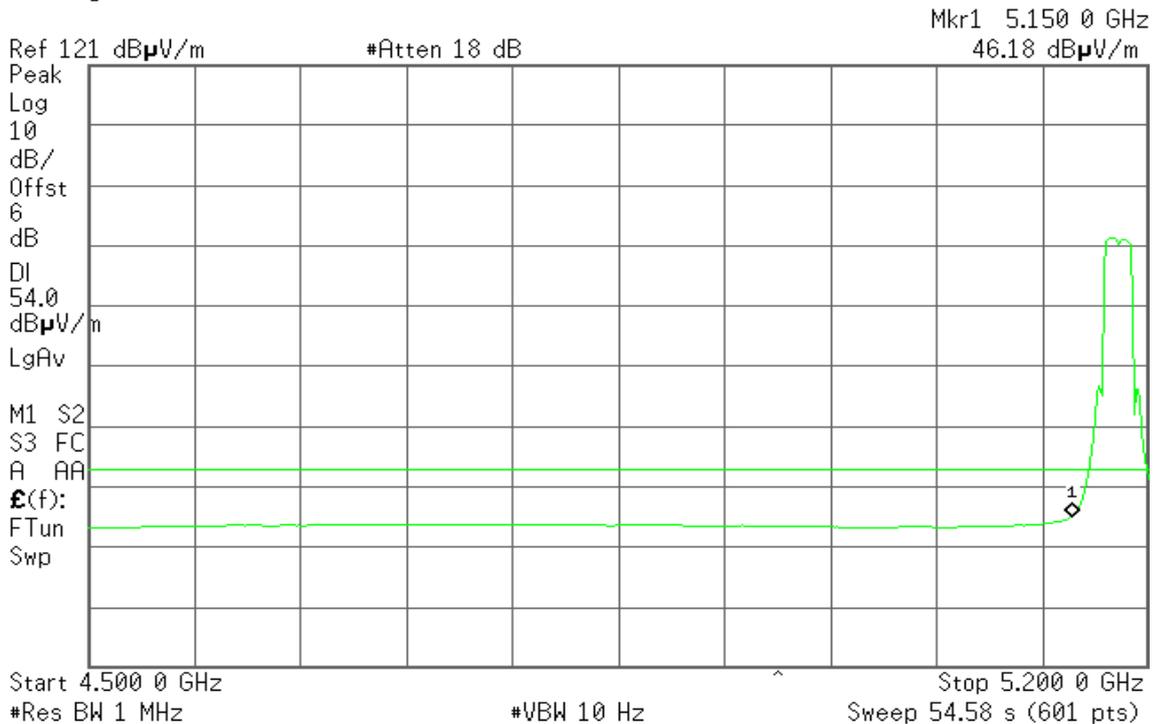




Detector mode: Peak

Polarity: Horizontal

* Agilent 14:45:55 Nov 16, 2011

R T

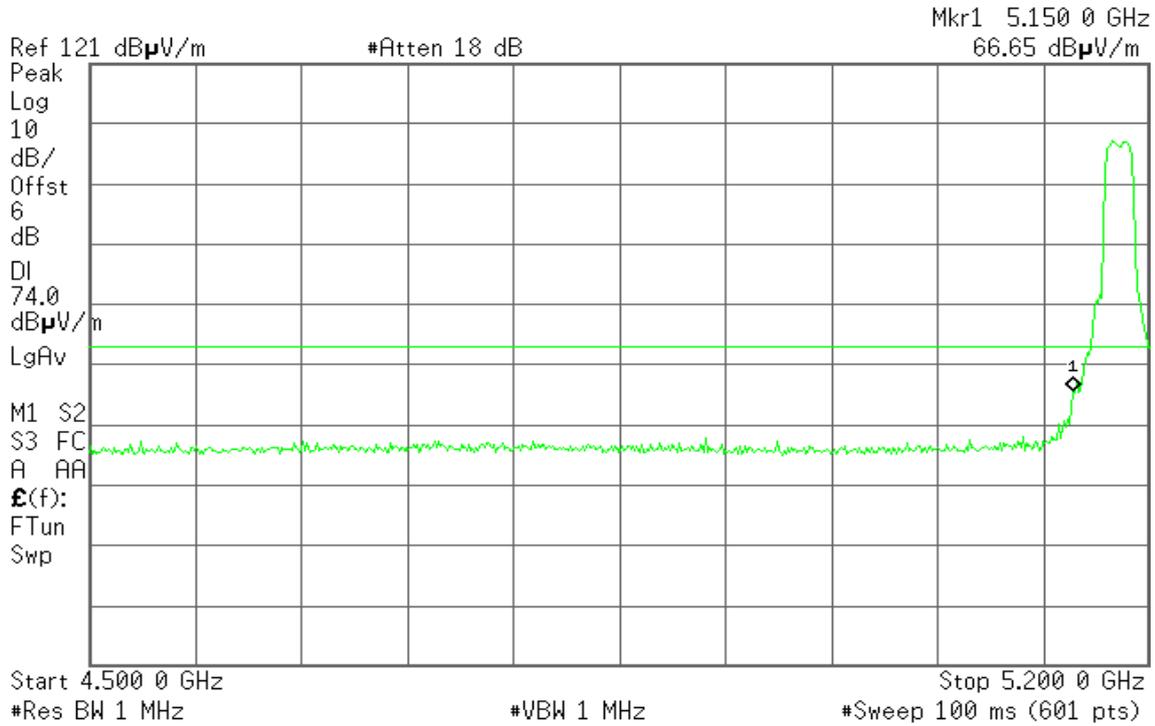


Detector mode: Average

Polarity: Horizontal

* Agilent 14:47:39 Nov 16, 2011

R T

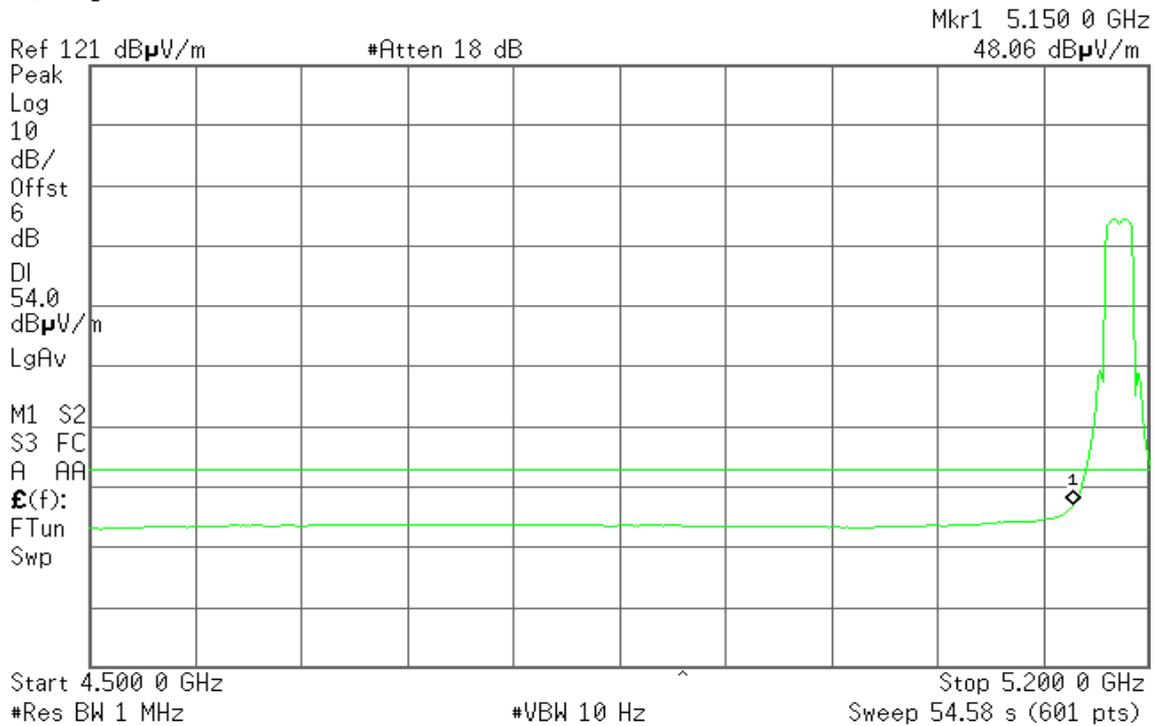



Band Edges (IEEE 802.11n HT 20 MHz / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent 14:31:45 Nov 16, 2011

R T

Mkr1 5.150 0 GHz
57.37 dBμV/m

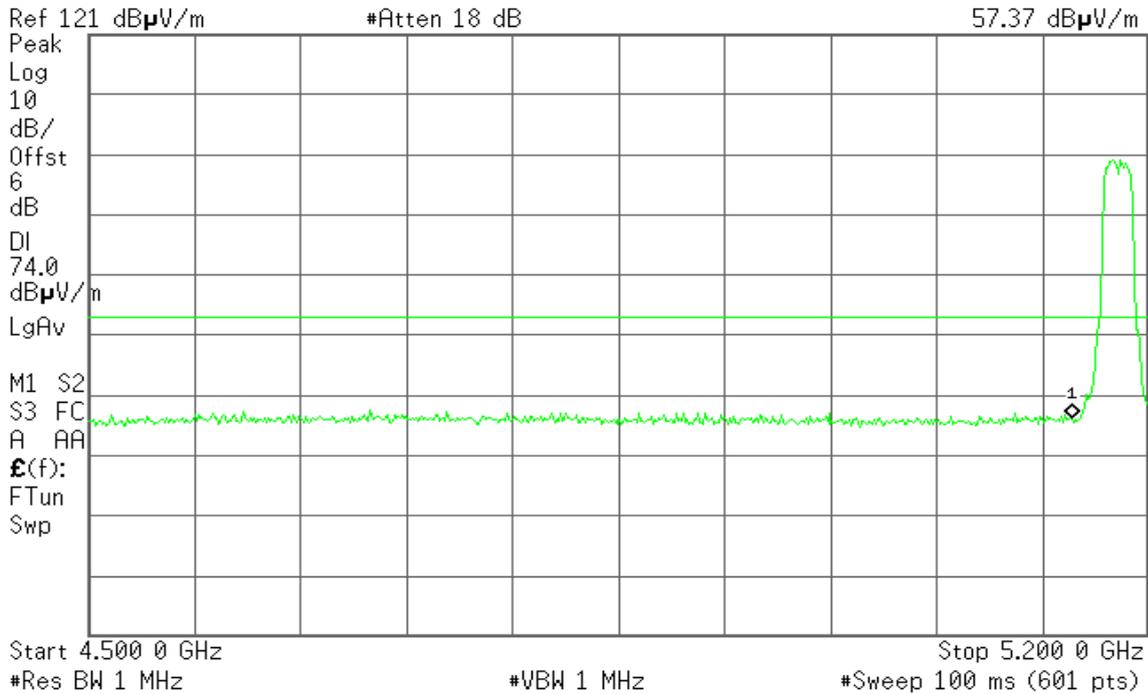


Detector mode: Average

Polarity: Vertical

Agilent 14:33:29 Nov 16, 2011

R T

Mkr1 5.150 0 GHz
44.99 dBμV/m

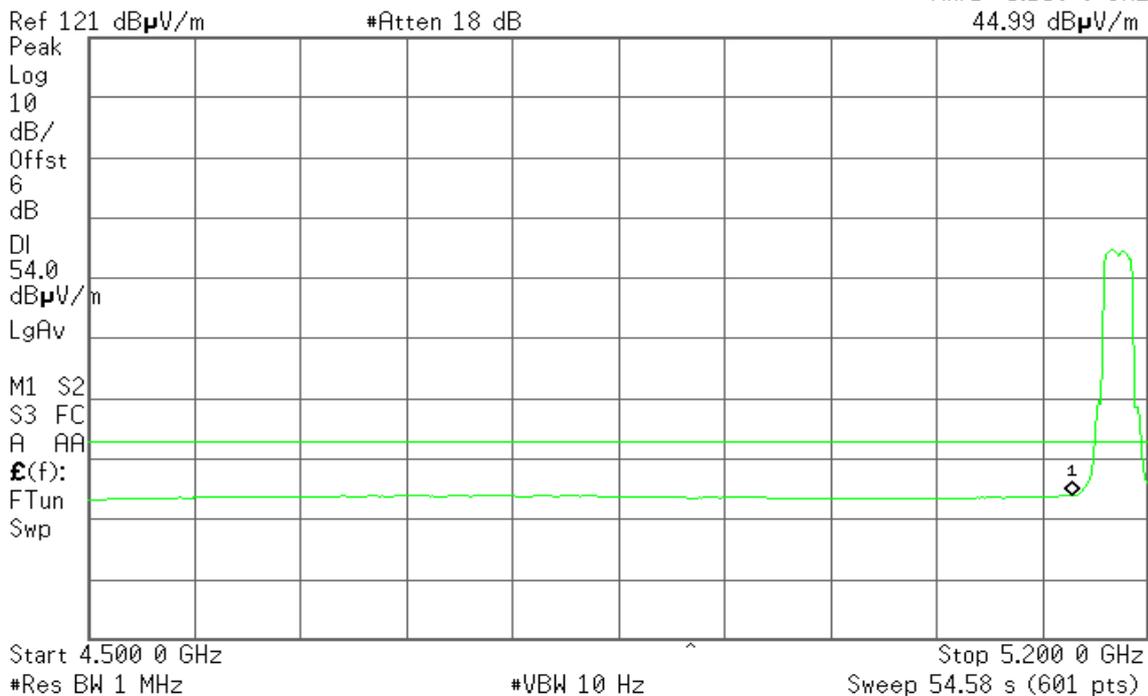




Detector mode: Peak

Polarity: Horizontal

Agilent 14:23:16 Nov 16, 2011

R T

Mkr1 5.150 0 GHz
57.94 dB μ V/m

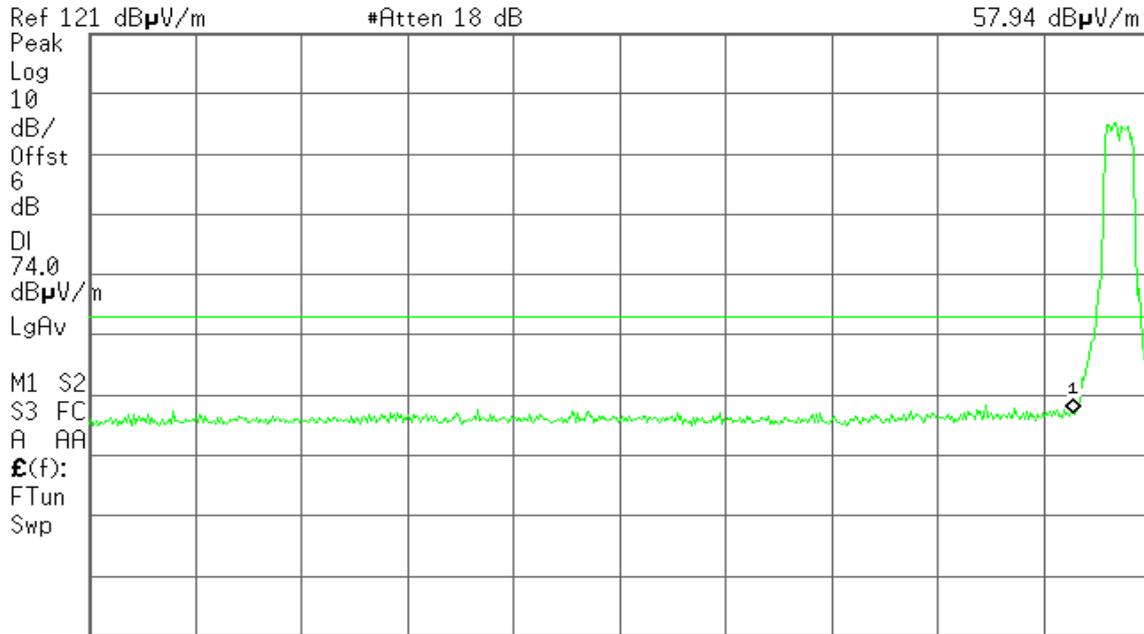

Ref 121 dB μ V/m #Atten 18 dB
Start 4.500 0 GHz #Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)
Stop 5.200 0 GHz


Detector mode: Average

Polarity: Horizontal

Agilent 14:25:53 Nov 16, 2011

R T

Mkr1 5.150 0 GHz
45.92 dB μ V/m

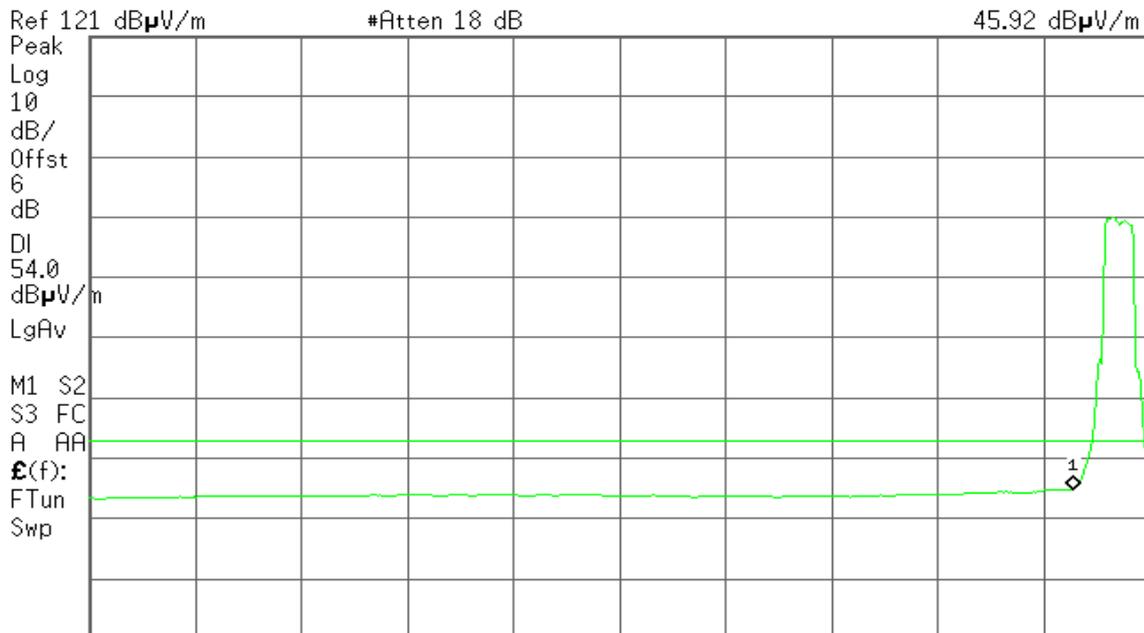

Ref 121 dB μ V/m #Atten 18 dB
Start 4.500 0 GHz #Res BW 1 MHz #VBW 10 Hz Sweep 54.58 s (601 pts)
Stop 5.200 0 GHz




Band Edges (IEEE 802.11n HT 40 MHz / 5190 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent 10:03:51 Nov 16, 2011

R T

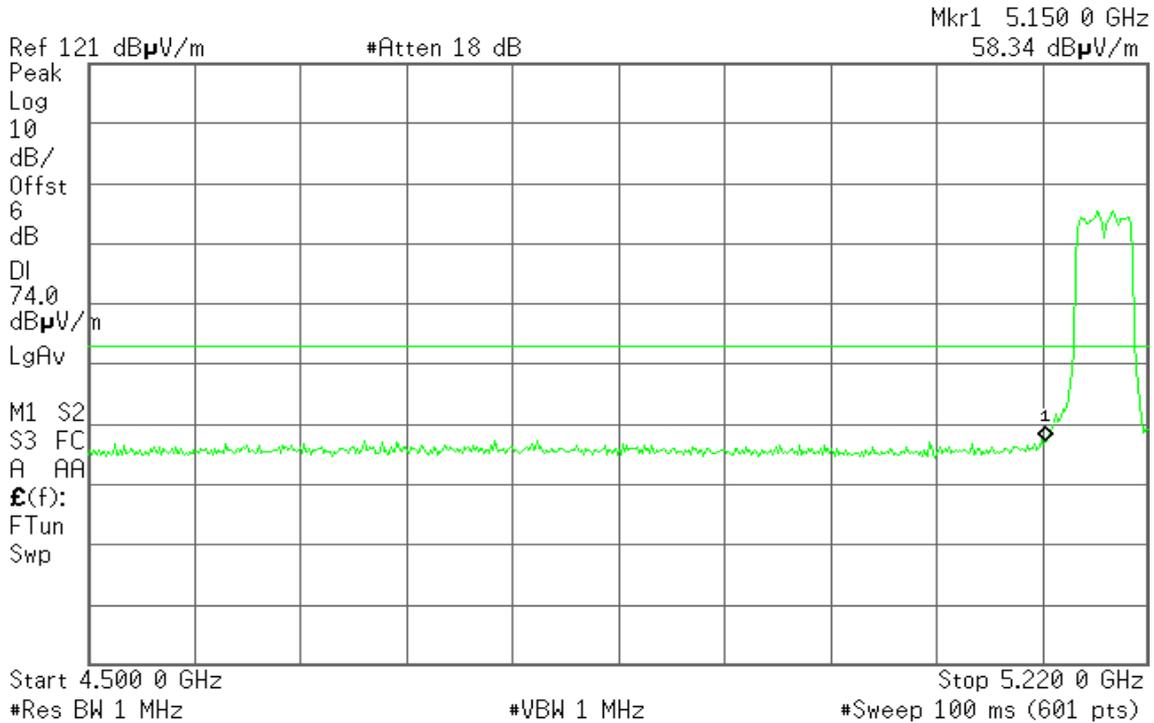


Detector mode: Average

Polarity: Vertical

Agilent 10:05:16 Nov 16, 2011

R T

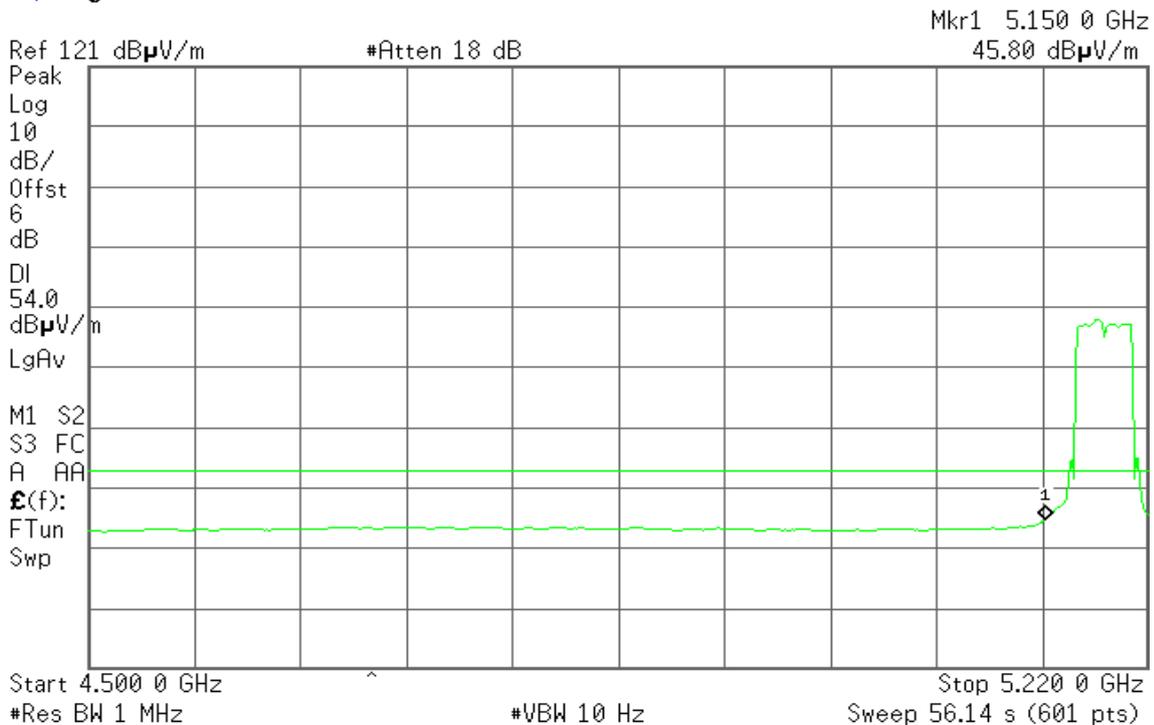




Detector mode: Peak

Polarity: Horizontal

Agilent 10:11:31 Nov 16, 2011

R T

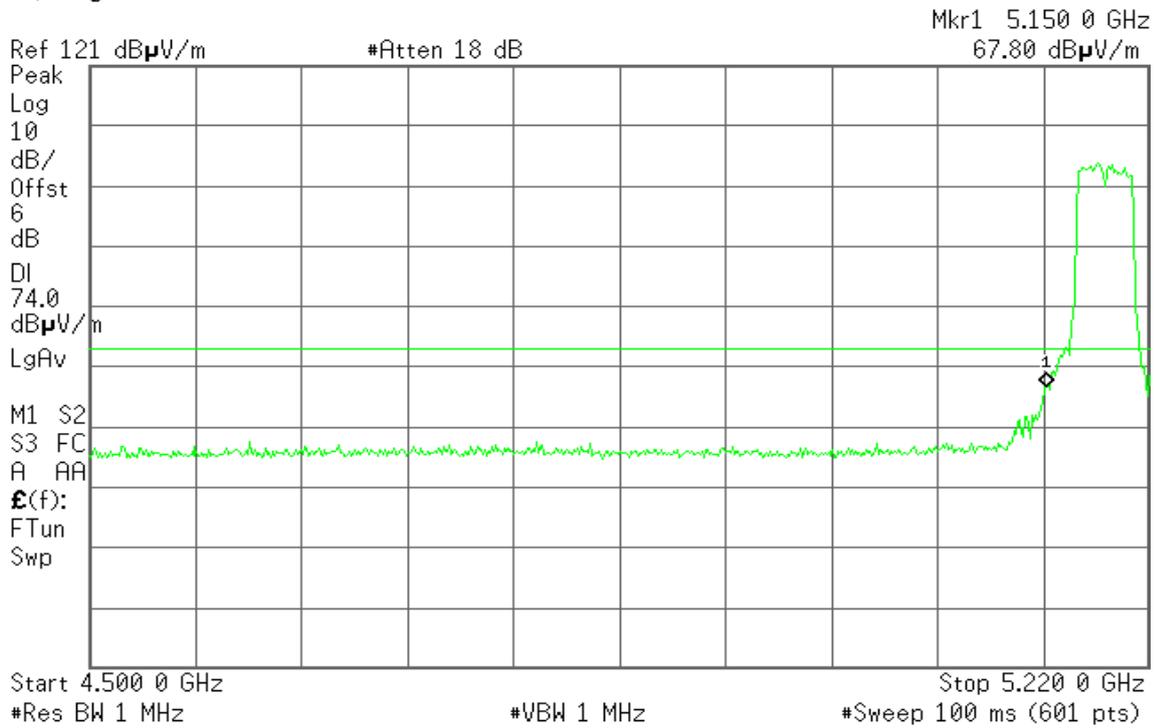


Detector mode: Average

Polarity: Horizontal

Agilent 10:19:52 Nov 16, 2011

R T

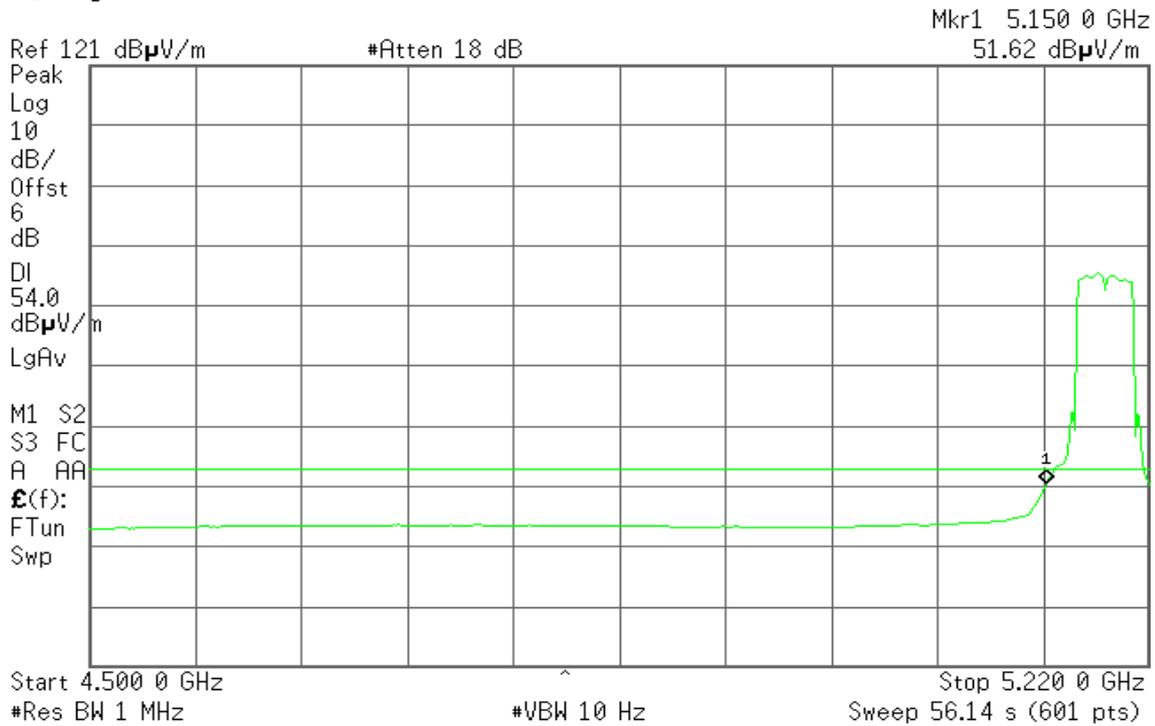




For Mode 1

Band Edges (IEEE 802.11n HT 20 MHz / Chain 0 / 5180 MHz)

Agilent 19:00:55 Jan 16, 2012


R T

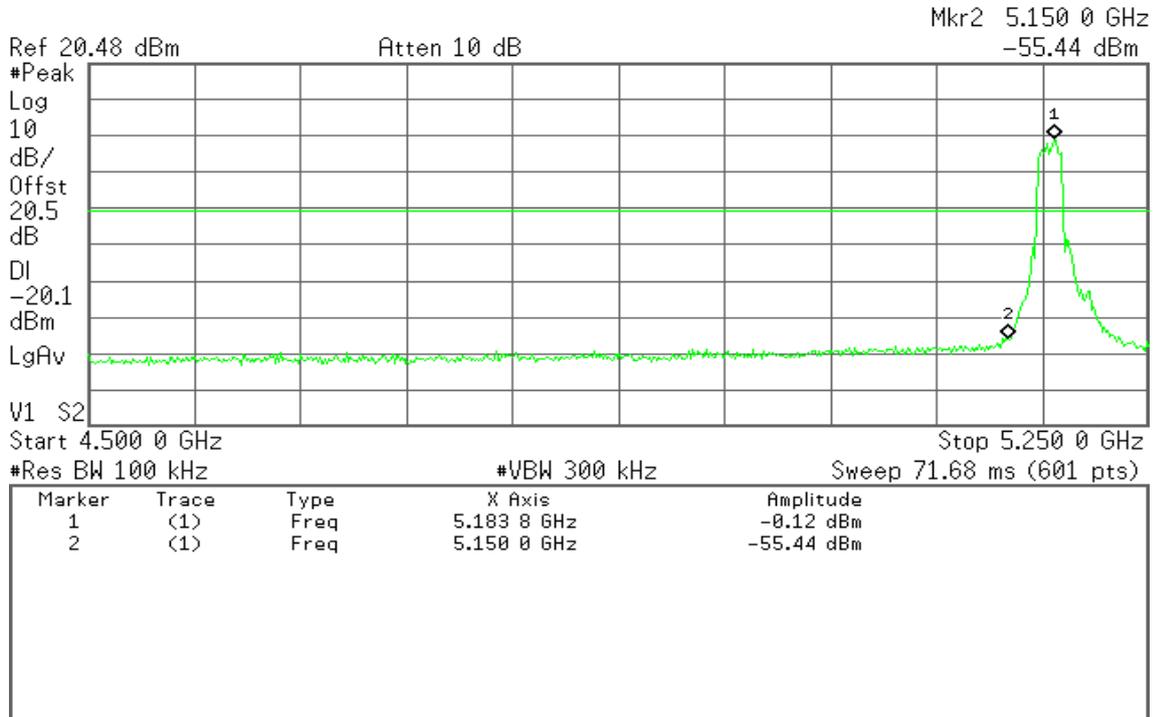

Band Edges (IEEE 802.11n HT 20 MHz / Chain 1 / 5180 MHz)

Agilent 19:01:52 Jan 16, 2012

R T

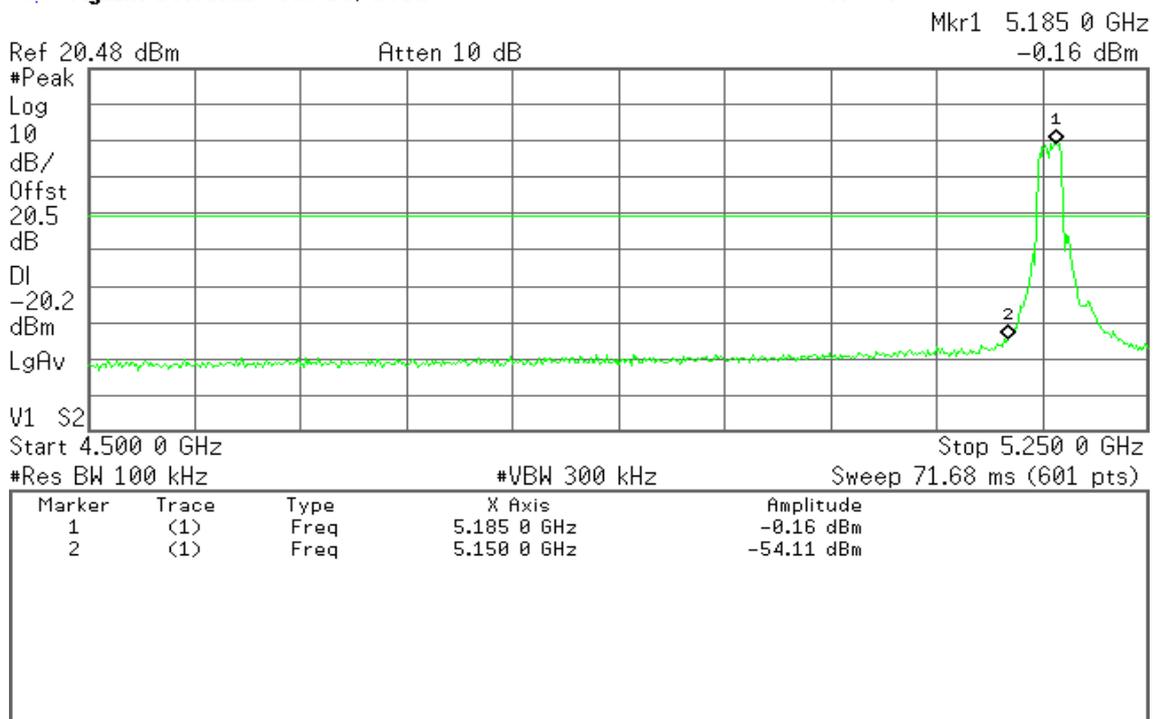




Band Edges (IEEE 802.11n HT 40 MHz / Chain 0 / 5190 MHz)

Agilent 19:05:57 Jan 16, 2012

R T

Mkr1 5.186 2 GHz
-4.16 dBm

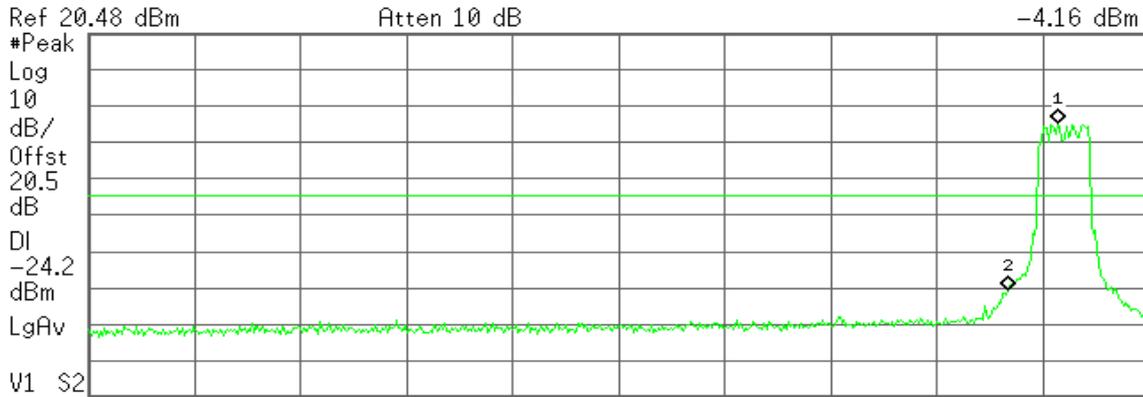

Start 4.500 0 GHz Stop 5.250 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.186 2 GHz	-4.16 dBm
2	(1)	Freq	5.150 0 GHz	-50.03 dBm

Band Edges (IEEE 802.11n HT 40 MHz / Chain 1 / 5190 MHz)

Agilent 19:04:18 Jan 16, 2012

R T

Mkr1 5.195 0 GHz
-2.97 dBm



Start 4.500 0 GHz Stop 5.250 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.195 0 GHz	-2.97 dBm
2	(1)	Freq	5.150 0 GHz	-48.11 dBm




For Mode 2

Band Edges (IEEE 802.11n HT 20 MHz / Chain 1 / 5180 MHz)

Agilent 19:07:51 Jan 16, 2012

R T

Mkr1 5.176 2 GHz
-1.28 dBm

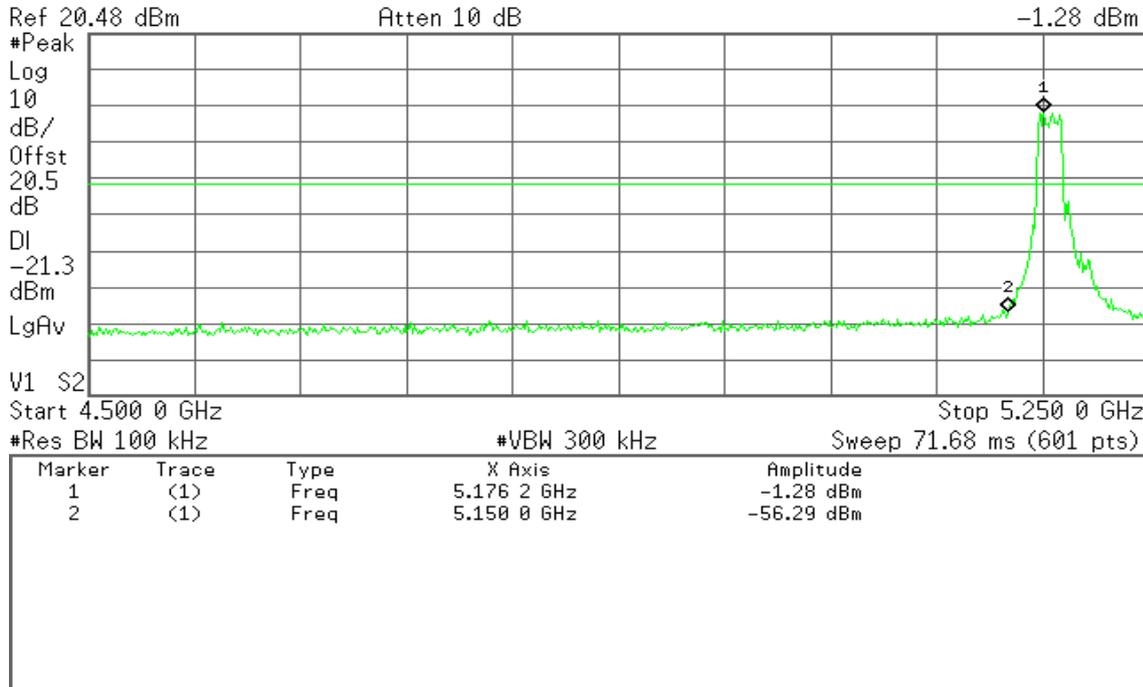


Band Edges (IEEE 802.11n HT 20 MHz / Chain 2 / 5180 MHz)

Agilent 19:08:32 Jan 16, 2012

R T

Mkr1 5.183 8 GHz
-0.79 dBm

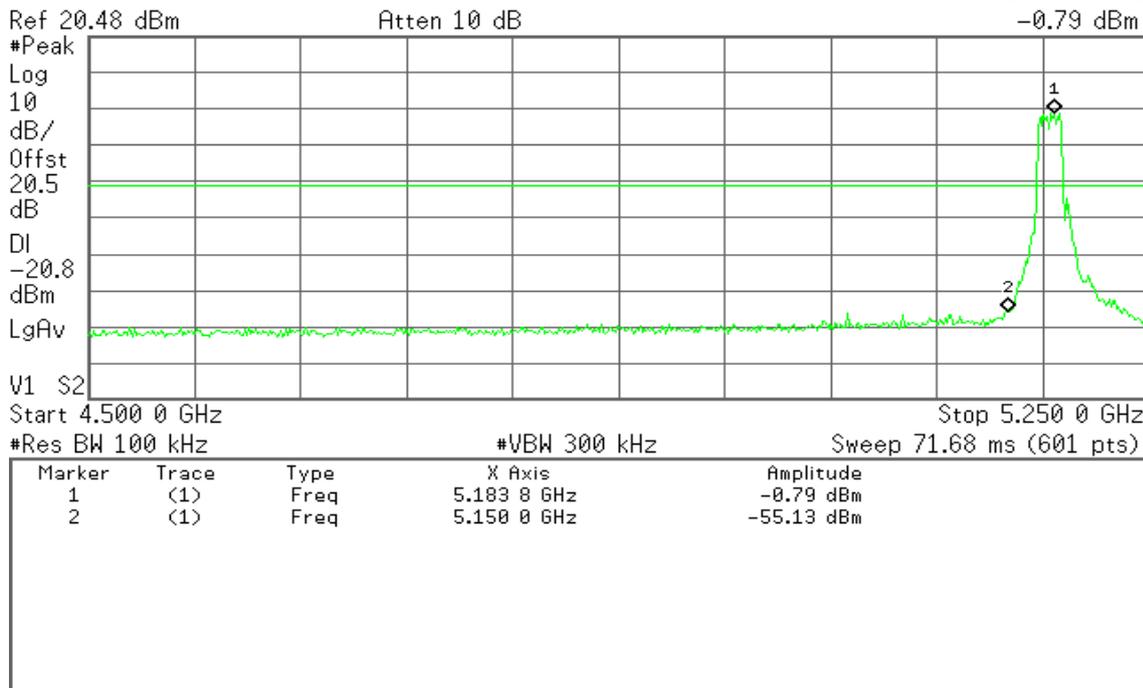



Band Edges (IEEE 802.11n HT 40 MHz / Chain 1 / 5190 MHz)

Agilent 19:17:29 Jan 16, 2012

R T

Mkr1 5.185 0 GHz
-4.14 dBm



Start 4.500 0 GHz Stop 5.250 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.185 0 GHz	-4.14 dBm
2	(1)	Freq	5.150 0 GHz	-50.81 dBm

Band Edges (IEEE 802.11n HT 40 MHz / Chain 2 / 5190 MHz)

Agilent 19:15:19 Jan 16, 2012

R T

Mkr1 5.185 0 GHz
-2.76 dBm



Start 4.500 0 GHz Stop 5.250 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.185 0 GHz	-2.76 dBm
2	(1)	Freq	5.150 0 GHz	-47.35 dBm




For Mode 3

Band Edges (IEEE 802.11a mode / 5180 MHz)

Agilent 18:23:11 Jan 16, 2012

R T

Mkr2 5.150 0 GHz
-56.67 dBm

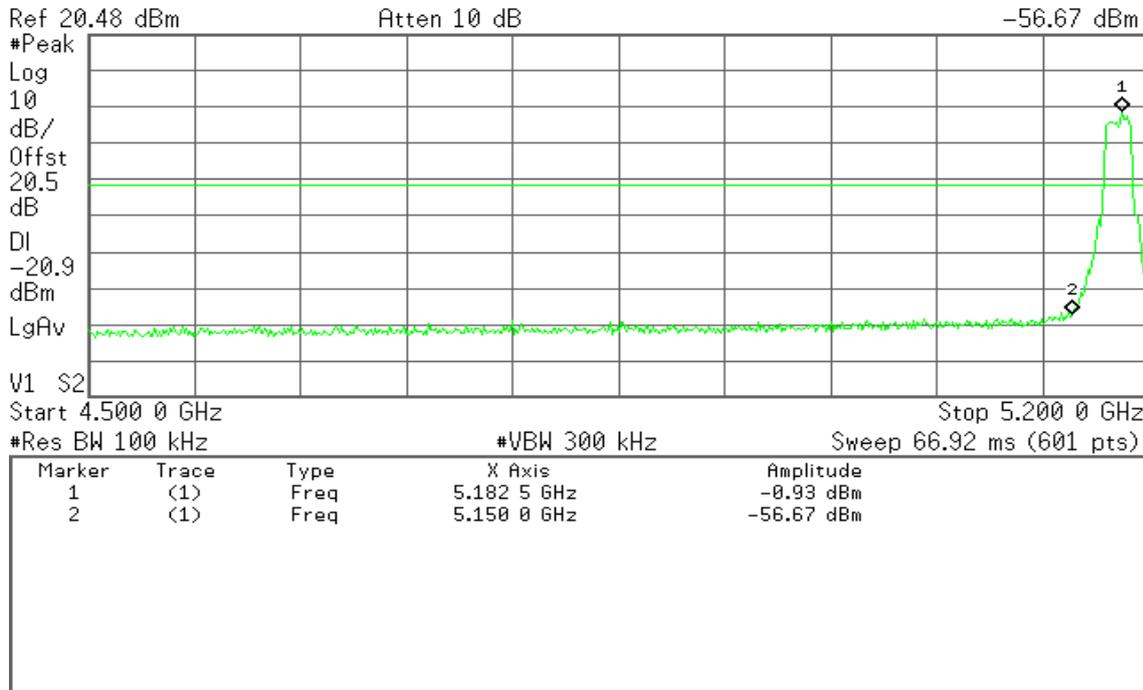


Band Edges (IEEE 802.11n HT 20 MHz / Chain 0 / 5180 MHz)

Agilent 18:26:54 Jan 16, 2012

R T

Mkr2 5.150 0 GHz
-53.68 dBm

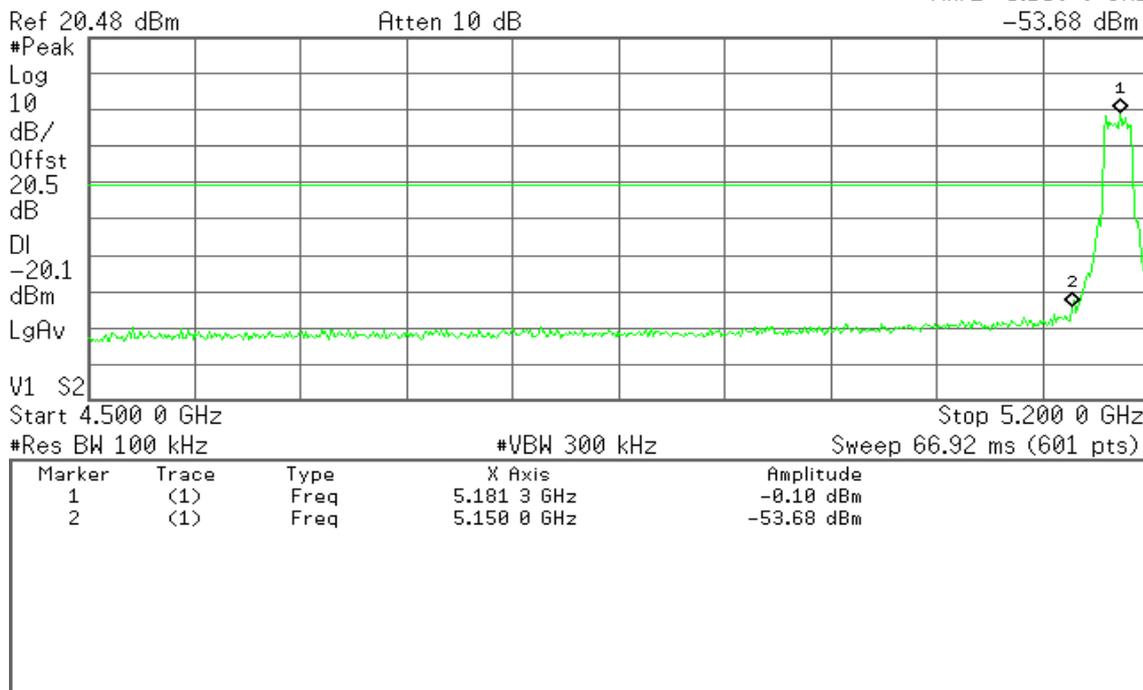



Band Edges (IEEE 802.11n HT 20 MHz / Chain 2 / 5180 MHz)


Agilent 18:27:34 Jan 16, 2012

R T

Mkr1 5.177 8 GHz
-0.81 dBm

Ref 20.48 dBm

Atten 10 dB

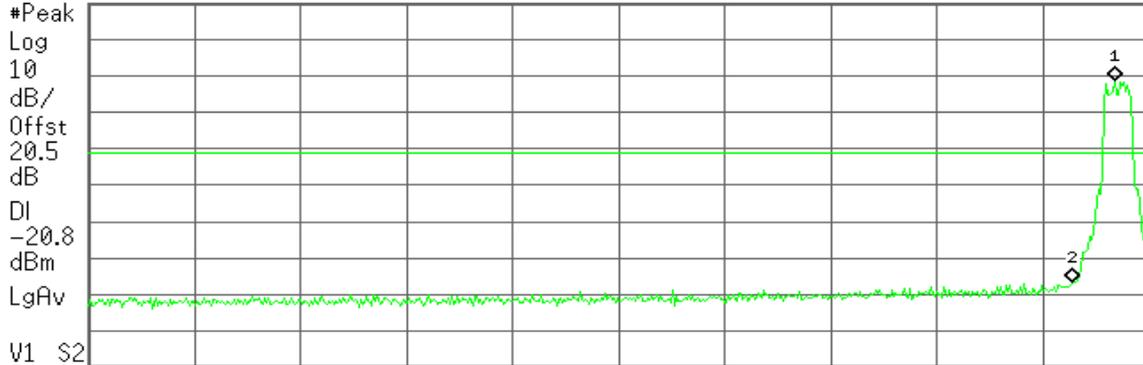

V1 S2

Start 4.500 0 GHz

Stop 5.200 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 66.92 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.177 8 GHz	-0.81 dBm
2	(1)	Freq	5.150 8 GHz	-56.14 dBm




Band Edges (IEEE 802.11n HT 40 MHz / Chain 0 / 5190 MHz)

Agilent 18:38:21 Jan 16, 2012

R T

Mkr1 5.193 8 GHz
-3.95 dBm

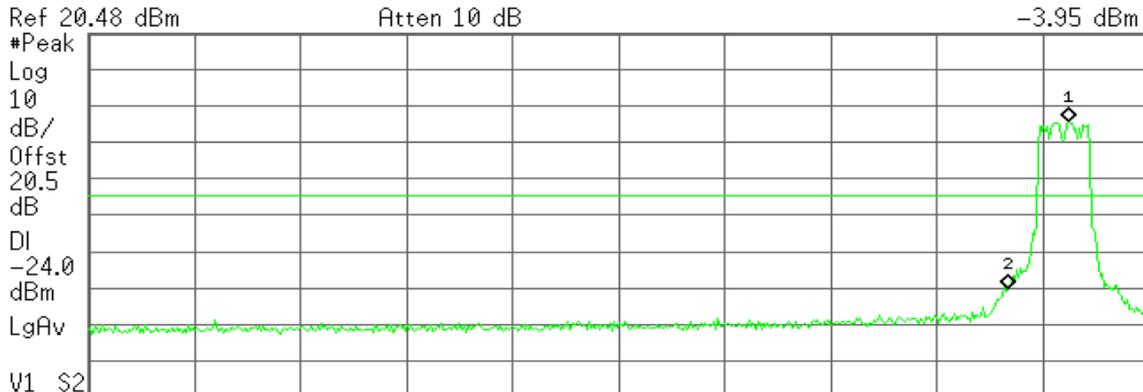

#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.193 8 GHz	-3.95 dBm
2	(1)	Freq	5.150 0 GHz	-49.52 dBm

Band Edges (IEEE 802.11n HT 40 MHz / Chain 2 / 5190 MHz)

Agilent 18:36:46 Jan 16, 2012

R T

Mkr2 5.150 0 GHz
-47.79 dBm

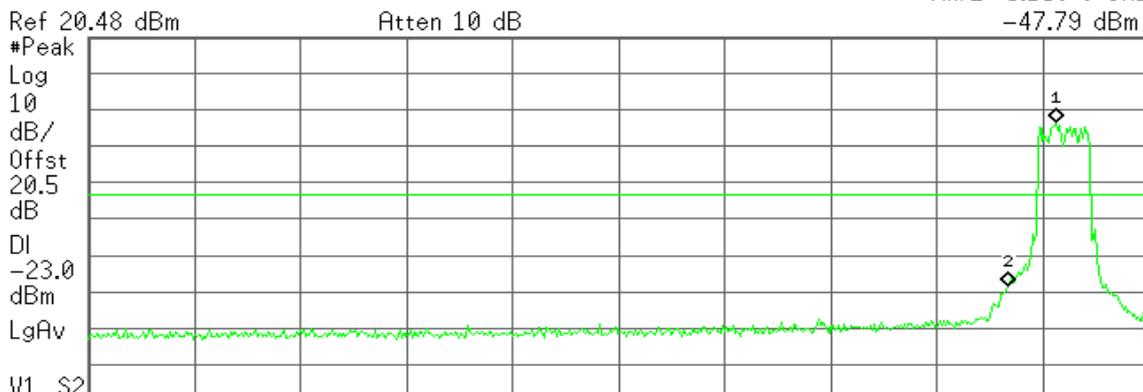

#Res BW 100 kHz #VBW 300 kHz Sweep 71.68 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.185 0 GHz	-3.02 dBm
2	(1)	Freq	5.150 0 GHz	-47.79 dBm



7.4 PEAK POWER SPECTRAL DENSITY


LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = 30MHz, Sweep=1ms
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	3.089	4.00	-0.91	PASS
Mid	5220	2.376	4.00	-1.62	PASS
High	5240	2.473	4.00	-1.52	PASS

Test mode: IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz**Mode 1**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	-2.693	-2.123	0.61	2.06	-1.45	PASS
Mid	5220	-2.484	-2.270	0.63	2.06	-1.43	PASS
High	5240	-2.531	-2.486	0.50	2.06	-1.56	PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.

Mode 2

Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	-2.123	-2.944	0.50	2.06	-1.56	PASS
Mid	5220	-2.270	-2.446	0.65	2.06	-1.41	PASS
High	5240	-2.486	-2.099	0.72	2.06	-1.34	PASS

Remark:

1. Total PPSD (dBm) = $10^{\text{Chain 1 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10}$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.

Mode 3

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	-2.693	-2.944	0.19	2.06	-1.87	PASS
Mid	5220	-2.484	-2.446	0.55	2.06	-1.51	PASS
High	5240	-2.531	-2.099	0.70	2.06	-1.36	PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10})$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.



Test mode: IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz

Mode 1

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5190	-3.317	-3.878	-0.58	2.06	-2.64	PASS
High	5230	-3.209	-3.744	-0.46	2.06	-2.52	PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.

Mode 2

Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5190	-3.878	-3.072	-0.45	2.06	-2.51	PASS
High	5230	-3.744	-3.203	-0.45	2.06	-2.51	PASS

Remark:

1. Total PPSD (dBm) = $10^{\text{Chain 1 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10}$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.

Mode 3

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 2 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5190	-3.317	-3.072	-0.18	2.06	-2.24	PASS
High	5230	-3.209	-3.203	-0.20	2.06	-2.26	PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10})$
2. The maximum antenna gain is 7.94dBi; therefore the reduction due to antenna gain is 1.94dBi, so the limit is 2.06dBm.



Test Plot


IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 09:29:11 Nov 14, 2011

R T

Mkr1 5.175 05 GHz
3.089 dBm

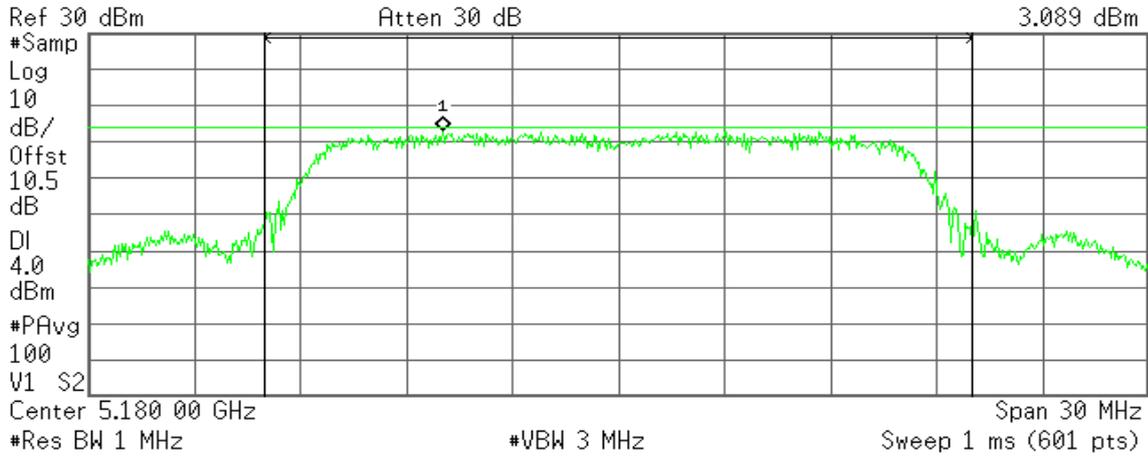

Channel Power

13.19 dBm /20.0000 MHz

Power Spectral Density


-59.82 dBm/Hz

CH Mid

Agilent 09:32:11 Nov 14, 2011

R T

Mkr1 5.218 30 GHz
2.376 dBm

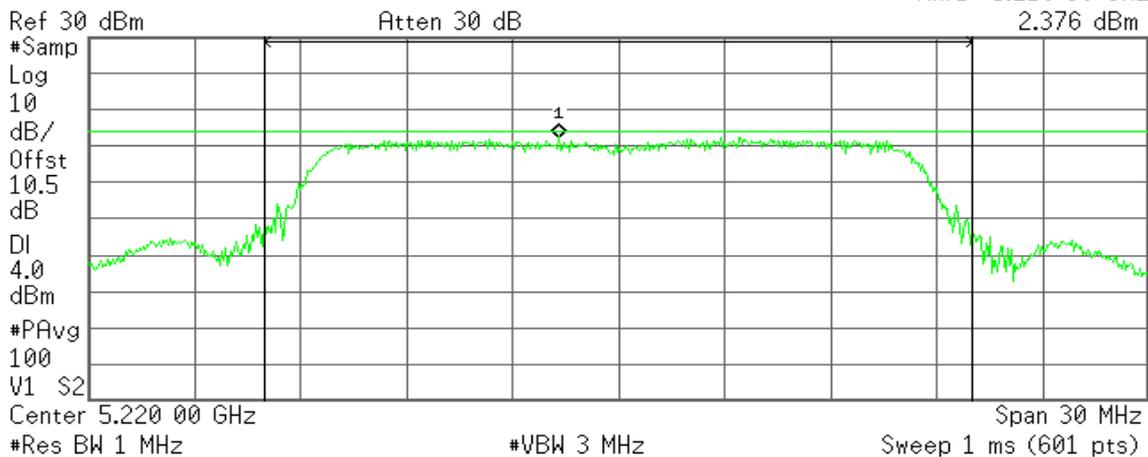

Channel Power

13.04 dBm /20.0000 MHz

Power Spectral Density

-59.97 dBm/Hz




CH High

Agilent 09:34:57 Nov 14, 2011

R T

Mkr1 5.235 15 GHz
2.473 dBm

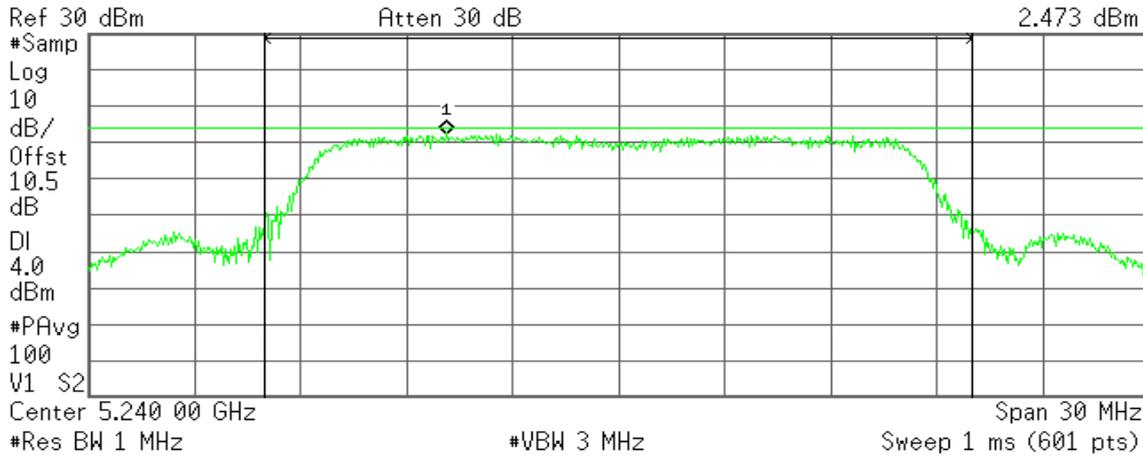

Channel Power

13.22 dBm /20.0000 MHz

Power Spectral Density

-59.79 dBm/Hz


IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / Chain 0

CH Low

Agilent 14:14:55 Nov 14, 2011

R T

Mkr1 5.176 50 GHz
-2.693 dBm

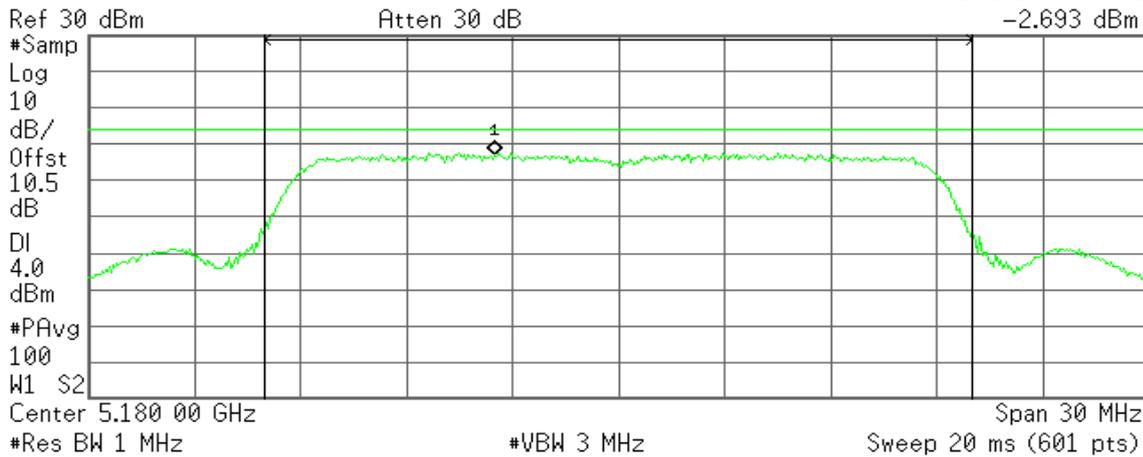

Channel Power

8.48 dBm /20.0000 MHz

Power Spectral Density

-64.53 dBm/Hz




CH Mid

Agilent 14:13:54 Nov 14, 2011

R T

Mkr1 5.217 85 GHz
-2.484 dBm

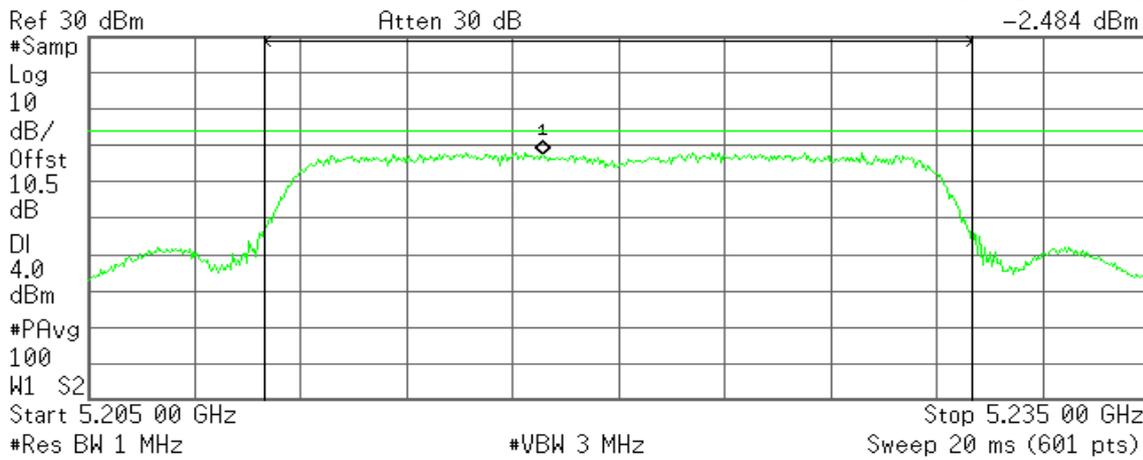

Channel Power

8.54 dBm /20.0000 MHz

Power Spectral Density


-64.48 dBm/Hz

CH High

Agilent 14:11:28 Nov 14, 2011

R T

Mkr1 5.244 45 GHz
-2.531 dBm

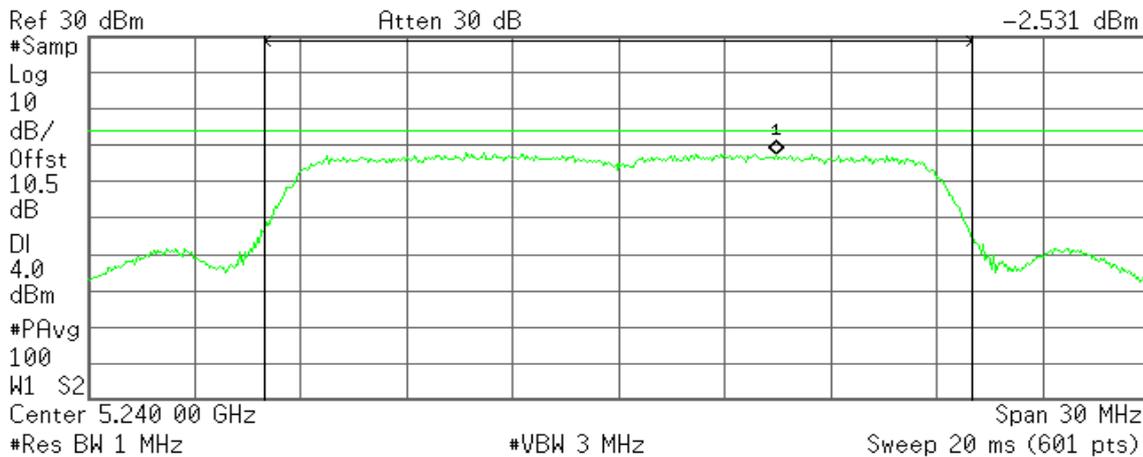

Channel Power

8.80 dBm /20.0000 MHz

Power Spectral Density

-64.21 dBm/Hz




IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / Chain 1

CH Low

Agilent 14:15:18 Nov 14, 2011

R T

Mkr1 5.175 00 GHz
-2.123 dBm

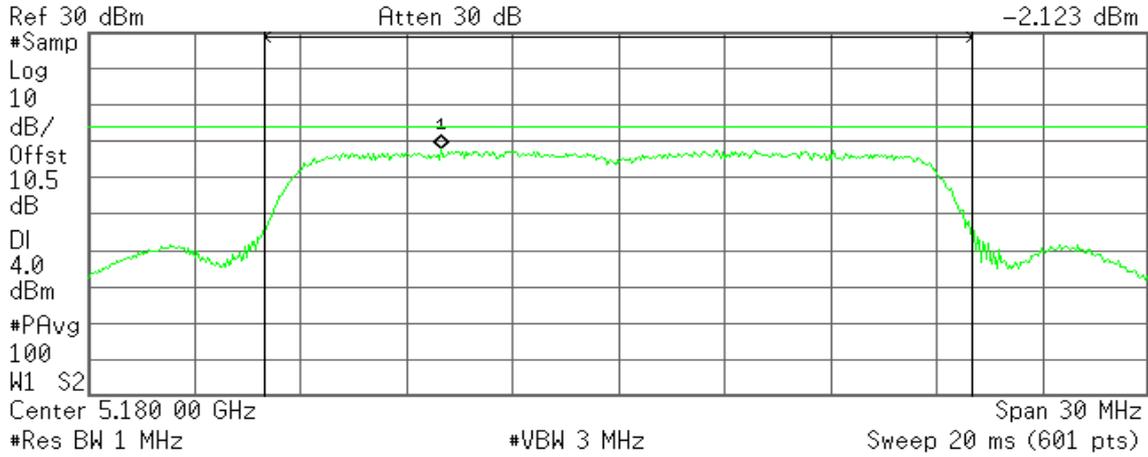

Channel Power

7.91 dBm /20.0000 MHz

Power Spectral Density


-65.10 dBm/Hz

CH Mid

Agilent 14:13:38 Nov 14, 2011

R T

Mkr1 5.224 05 GHz
-2.270 dBm

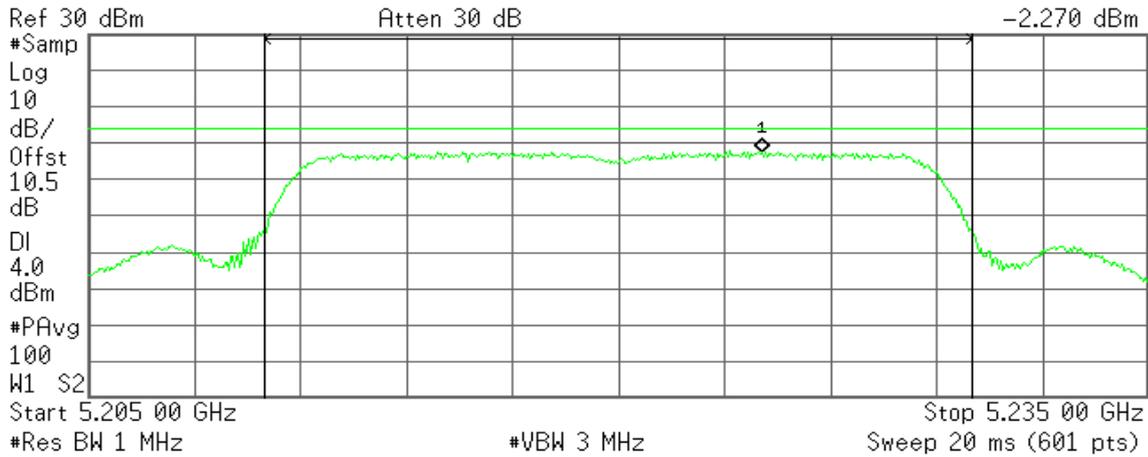

Channel Power

8.97 dBm /20.0000 MHz

Power Spectral Density

-64.04 dBm/Hz




CH High

Agilent 14:11:59 Nov 14, 2011

R T

Mkr1 5.243 95 GHz
-2.486 dBm

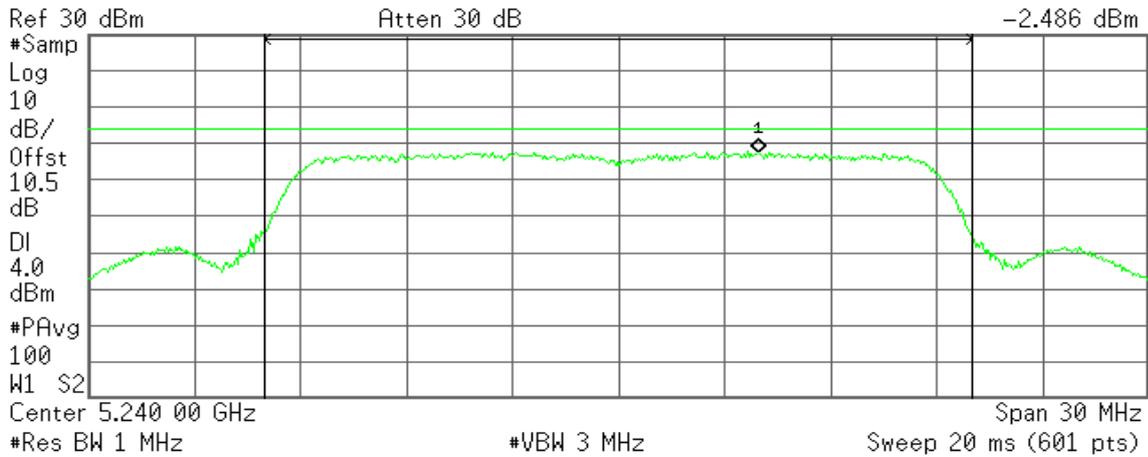

Channel Power

8.47 dBm /20.0000 MHz

Power Spectral Density

-64.54 dBm/Hz


IEEE 802.11n HT 20 MHz / 5180 ~ 5240MHz / Chain 2

CH Low

Agilent 14:15:36 Nov 14, 2011

R T

Mkr1 5.181 10 GHz
-2.944 dBm

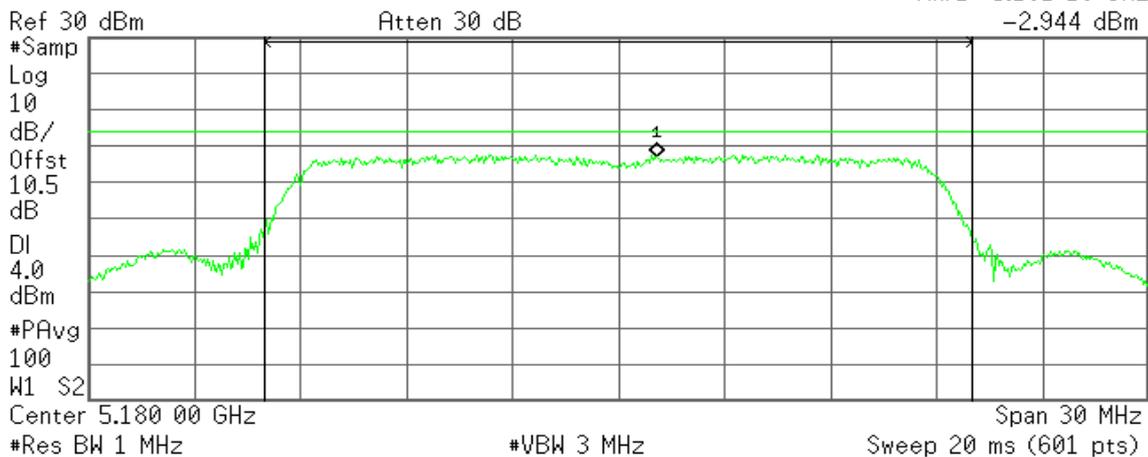

Channel Power

8.35 dBm /20.0000 MHz

Power Spectral Density

-64.66 dBm/Hz




CH Mid

Agilent 14:13:13 Nov 14, 2011

R T

Mkr1 5.215 50 GHz
-2.446 dBm

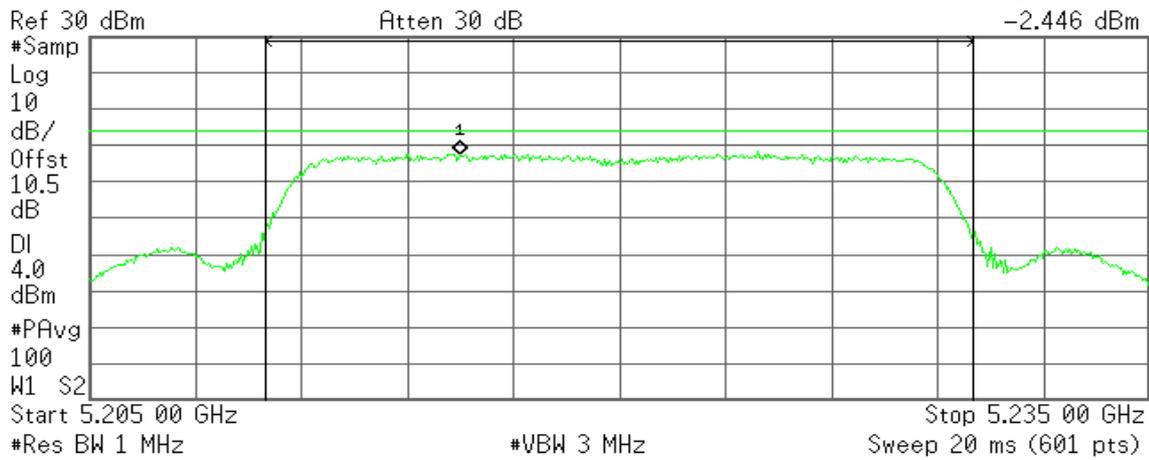

Channel Power

8.82 dBm /20.0000 MHz

Power Spectral Density


-64.19 dBm/Hz

CH High

Agilent 14:12:22 Nov 14, 2011

R T

Mkr1 5.235 80 GHz
-2.099 dBm

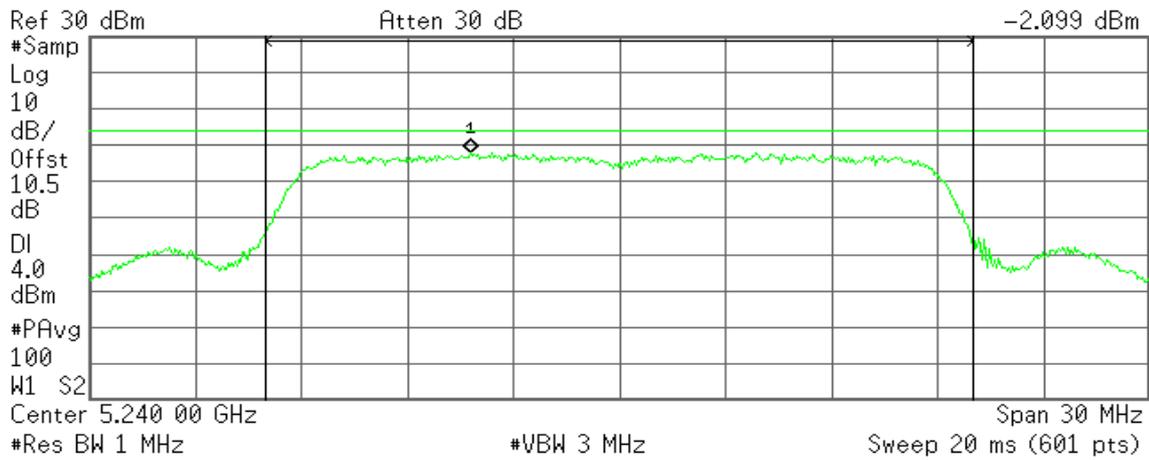

Channel Power

7.85 dBm /20.0000 MHz

Power Spectral Density

-65.16 dBm/Hz




IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / Chain 0

CH Low

Agilent 14:25:18 Nov 14, 2011

R T

Mkr1 5.195 10 GHz
-3.317 dBm

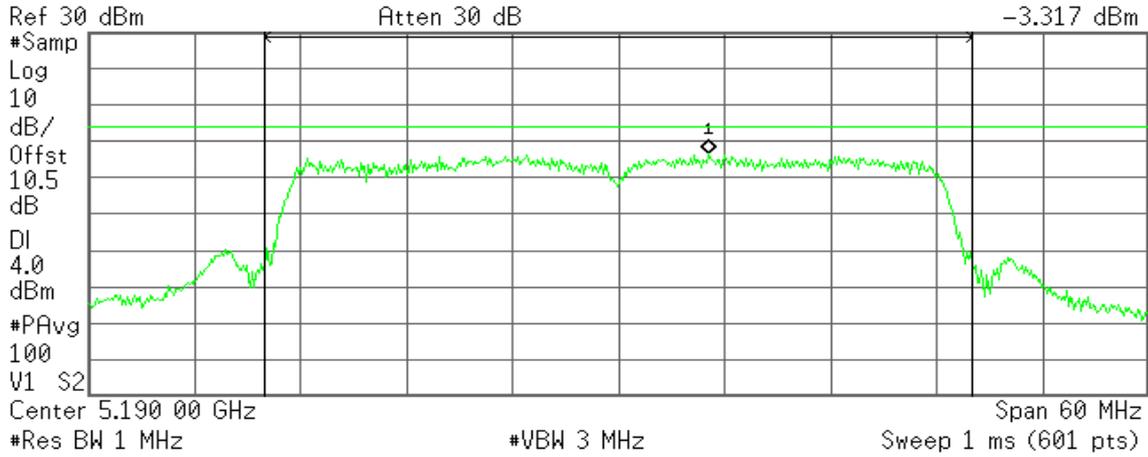

Channel Power

8.84 dBm /40.0000 MHz

Power Spectral Density


-67.18 dBm/Hz

CH High

Agilent 14:28:44 Nov 14, 2011

R T

Mkr1 5.239 10 GHz
-3.209 dBm

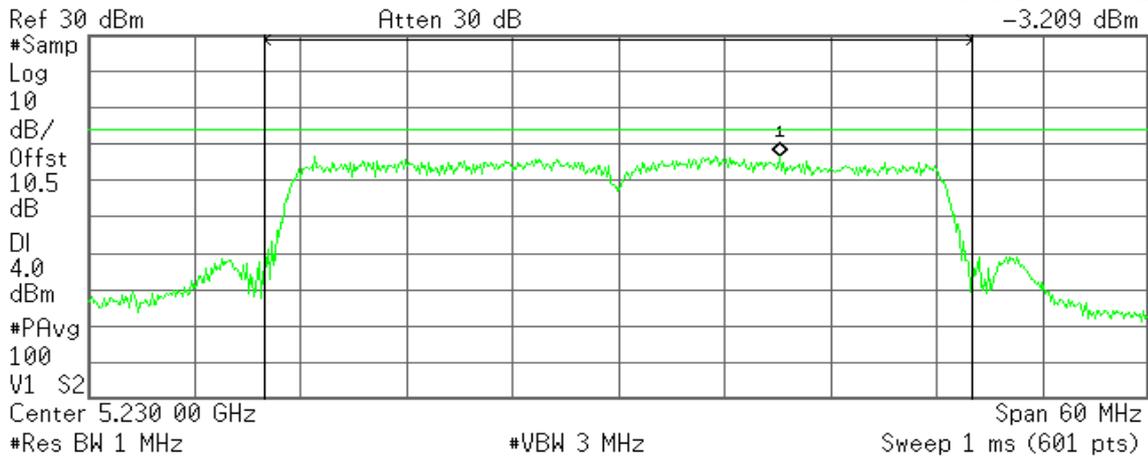

Channel Power

9.49 dBm /40.0000 MHz

Power Spectral Density

-66.53 dBm/Hz




IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / Chain 1

CH Low

Agilent 14:26:16 Nov 14, 2011

R T

Mkr1 5.192 00 GHz
-3.878 dBm

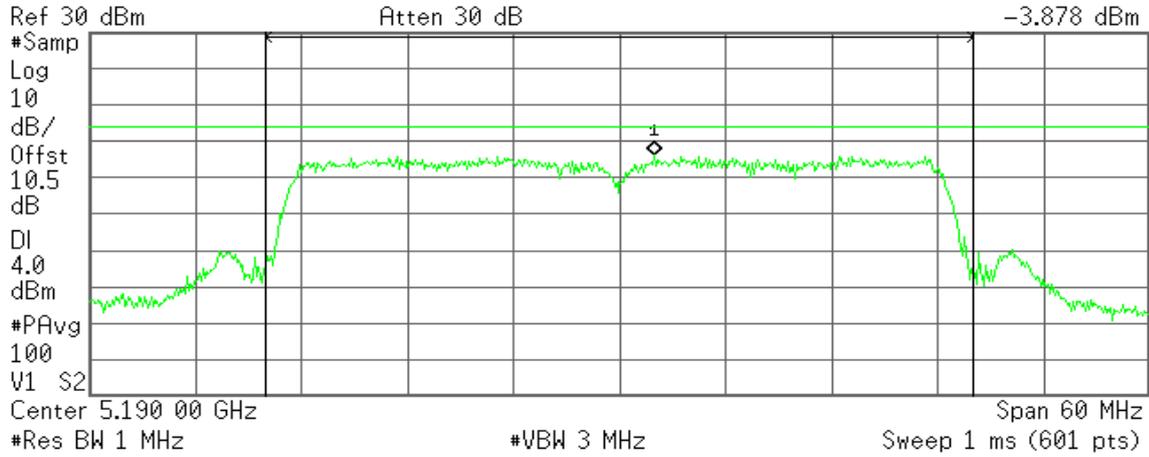

Channel Power

8.99 dBm /40.0000 MHz

Power Spectral Density


-67.03 dBm/Hz

CH High

Agilent 14:27:46 Nov 14, 2011

R T

Mkr1 5.234 50 GHz
-3.744 dBm

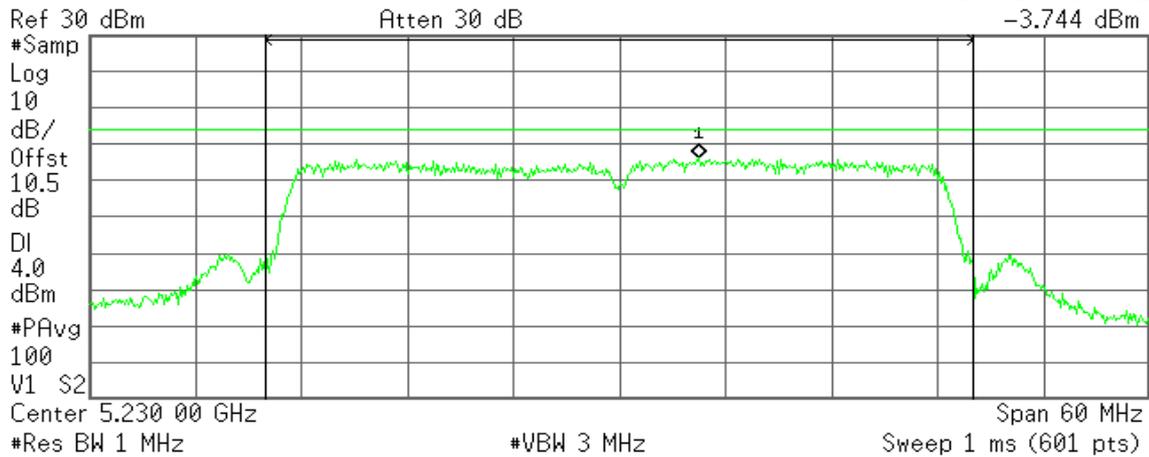

Channel Power

8.79 dBm /40.0000 MHz

Power Spectral Density

-67.23 dBm/Hz




IEEE 802.11n HT 40 MHz / 5190 ~ 5230MHz / Chain 2

CH Low

Agilent 14:24:10 Nov 14, 2011

R T

Mkr1 5.184 70 GHz
-3.072 dBm

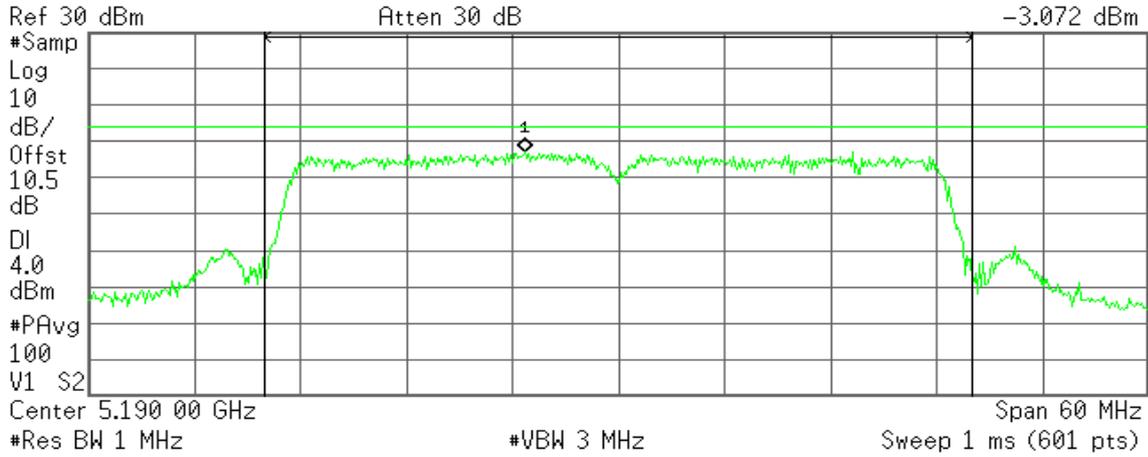

Channel Power

9.90 dBm /40.0000 MHz

Power Spectral Density


-66.12 dBm/Hz

CH High

Agilent 14:29:50 Nov 14, 2011

R T

Mkr1 5.226 10 GHz
-3.203 dBm

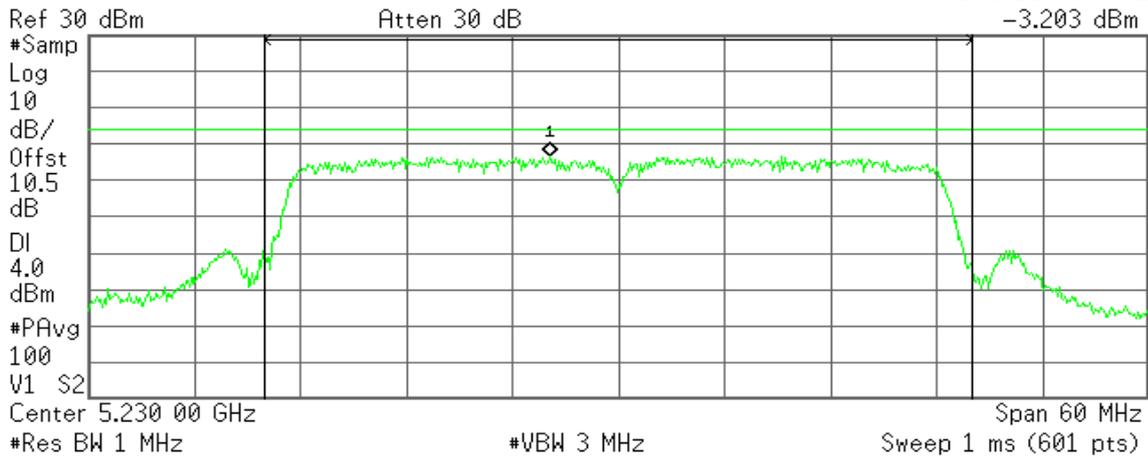

Channel Power

9.68 dBm /40.0000 MHz

Power Spectral Density

-66.34 dBm/Hz




7.5 PEAK EXCURSION

LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Configuration



TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
4. Delta Mark trace A Maximum frequency and trace B same frequency.
5. Repeat the above procedure until measurements for all frequencies were complete.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	11.99	13.00	-1.01
Mid	5220	9.21	13.00	-3.79
High	5240	8.98	13.00	-4.02

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 0

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	11.24	13.00	-1.76
Mid	5220	9.22	13.00	-3.78
High	5240	9.44	13.00	-3.56

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 1

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	9.50	13.00	-3.5
Mid	5220	9.16	13.00	-3.84
High	5240	9.02	13.00	-3.98

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 2

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	10.06	13.00	-2.94
Mid	5220	11.56	13.00	-1.44
High	5240	9.81	13.00	-3.19



Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 0

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5190	8.10	13.00	-4.9
High	5230	11.46	13.00	-1.54

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 1

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5190	11.00	13.00	-2
High	5230	12.09	13.00	-0.91

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 2

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5190	9.68	13.00	-3.32
High	5230	10.64	13.00	-2.36



Test Plot


IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 09:29:34 Nov 14, 2011

R T

Mkr1 0 Hz
11.99 dB

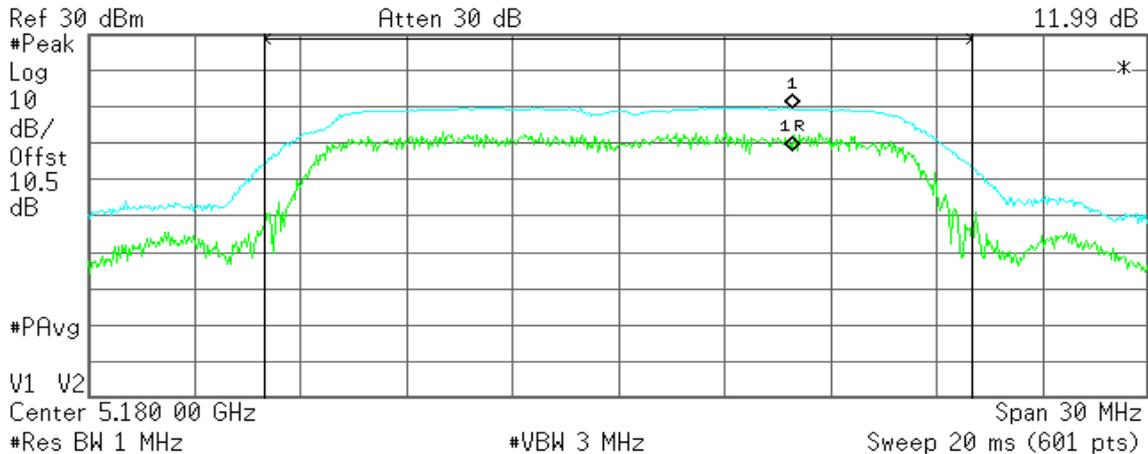

Channel Power

19.35 dBm /20.0000 MHz

Power Spectral Density


-53.66 dBm/Hz

CH Mid

Agilent 09:32:37 Nov 14, 2011

R T

Mkr1 0 Hz
9.21 dB

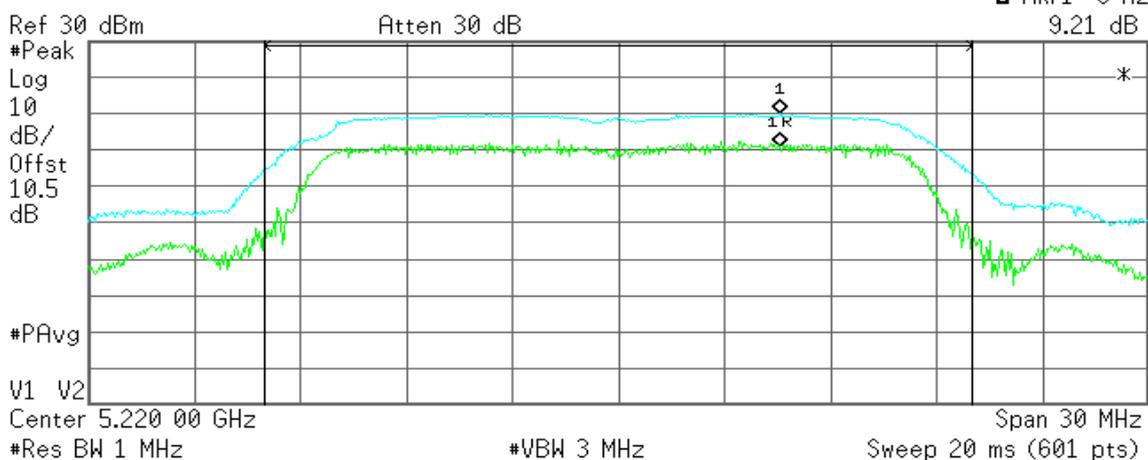

Channel Power

18.75 dBm /20.0000 MHz

Power Spectral Density


-54.26 dBm/Hz



CH High

Agilent 09:35:23 Nov 14, 2011

R T

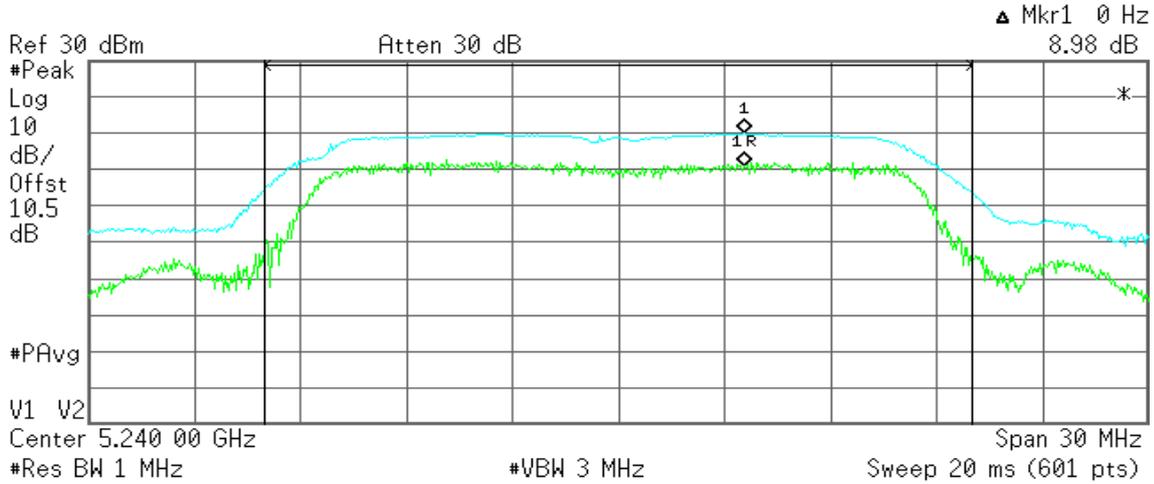

Channel Power

18.95 dBm /20.0000 MHz

Power Spectral Density


-54.06 dBm/Hz

IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 0

CH Low

Agilent 14:38:15 Nov 14, 2011

R T

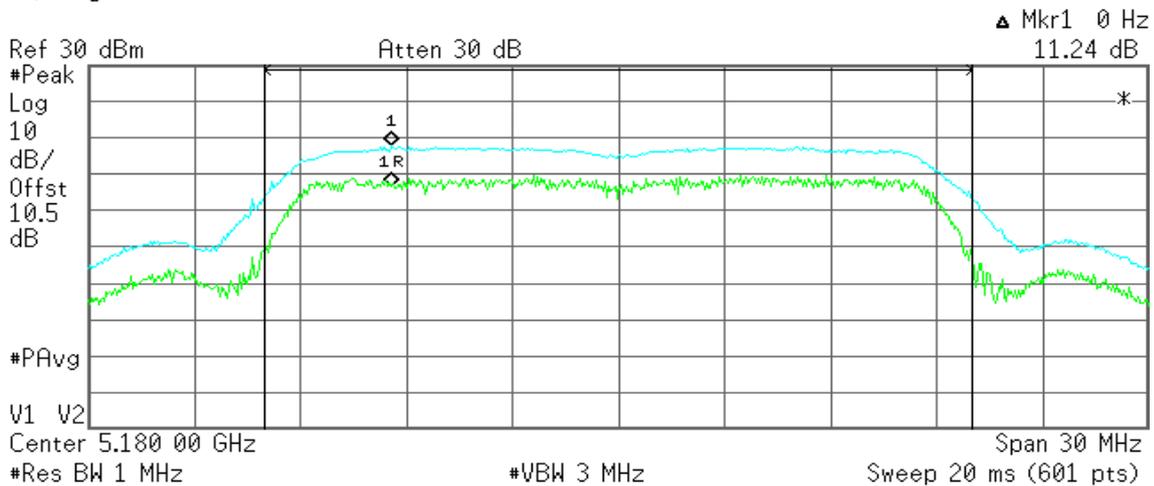

Channel Power

16.52 dBm /20.0000 MHz

Power Spectral Density

-56.49 dBm/Hz




CH Mid

Agilent 14:39:53 Nov 14, 2011

R T

Mkr1 0 Hz
9.22 dB

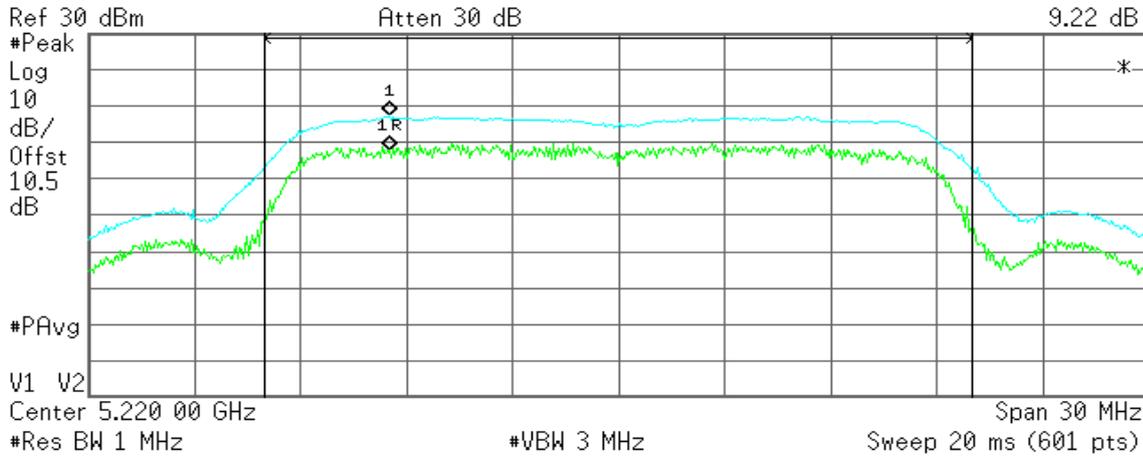

Channel Power

16.41 dBm /20.0000 MHz

Power Spectral Density


-56.60 dBm/Hz

CH High

Agilent 14:46:23 Nov 14, 2011

R T

Mkr1 0 Hz
9.44 dB

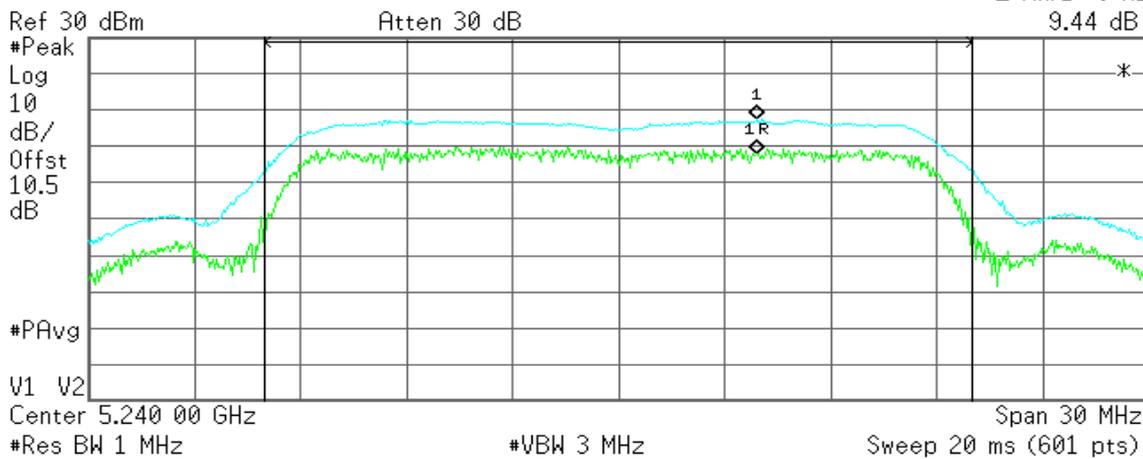

Channel Power

16.46 dBm /20.0000 MHz

Power Spectral Density

-56.55 dBm/Hz




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 1

CH Low

Agilent 14:35:22 Nov 14, 2011

R T

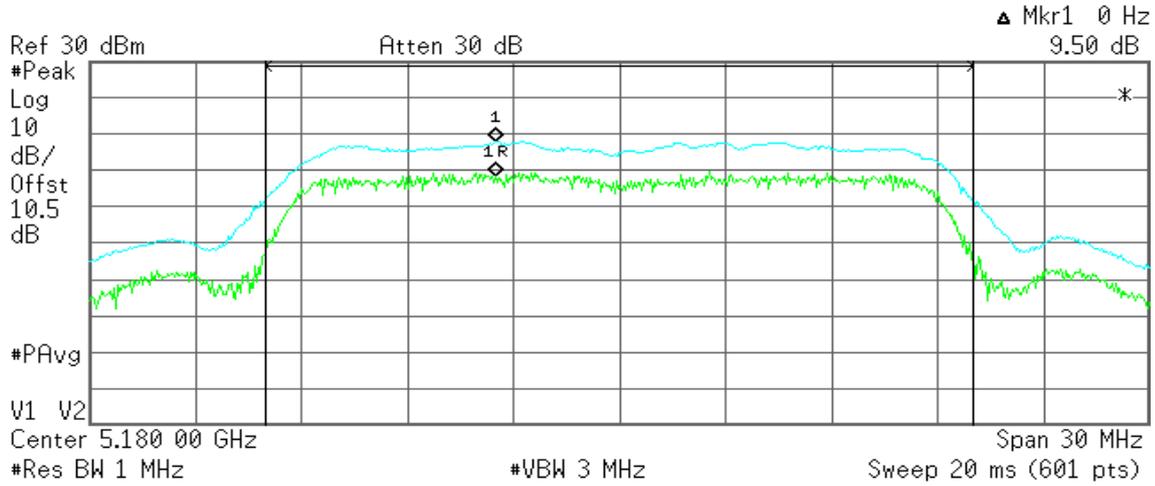

Channel Power

16.05 dBm /20.0000 MHz


Power Spectral Density

-56.96 dBm/Hz

CH Mid

Agilent 14:41:30 Nov 14, 2011

R T

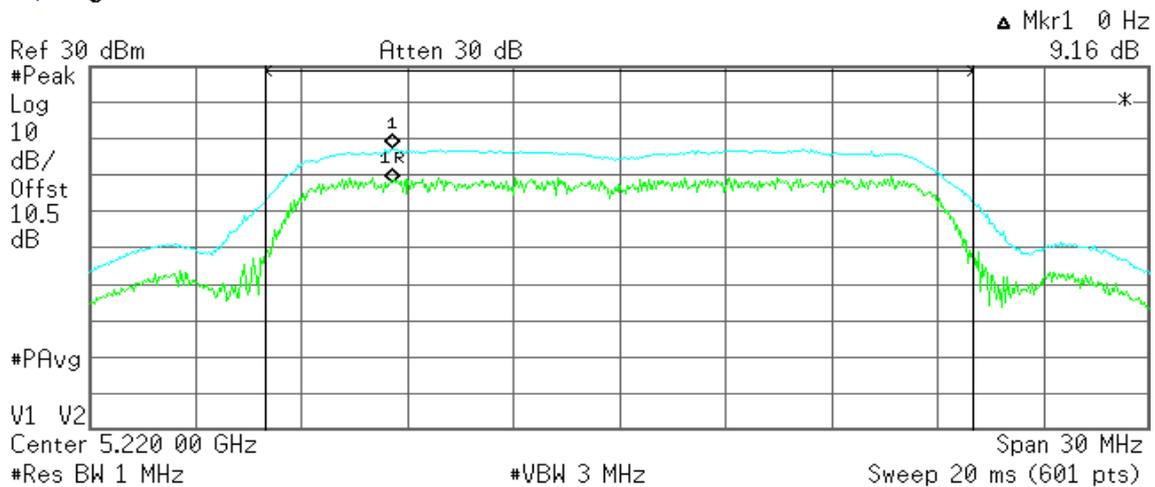

Channel Power

16.41 dBm /20.0000 MHz

Power Spectral Density

-56.60 dBm/Hz




CH High

Agilent 14:45:06 Nov 14, 2011

R T

Mkr1 0 Hz
9.02 dB

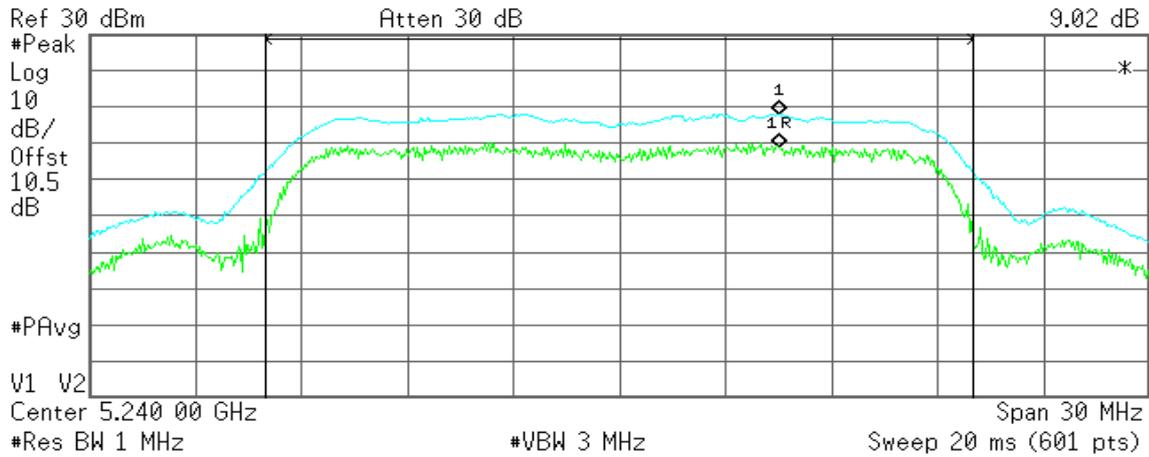

Channel Power

16.41 dBm /20.0000 MHz

Power Spectral Density

-56.60 dBm/Hz


IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 2

CH Low

Agilent 14:36:19 Nov 14, 2011

R T

Mkr1 0 Hz
10.06 dB

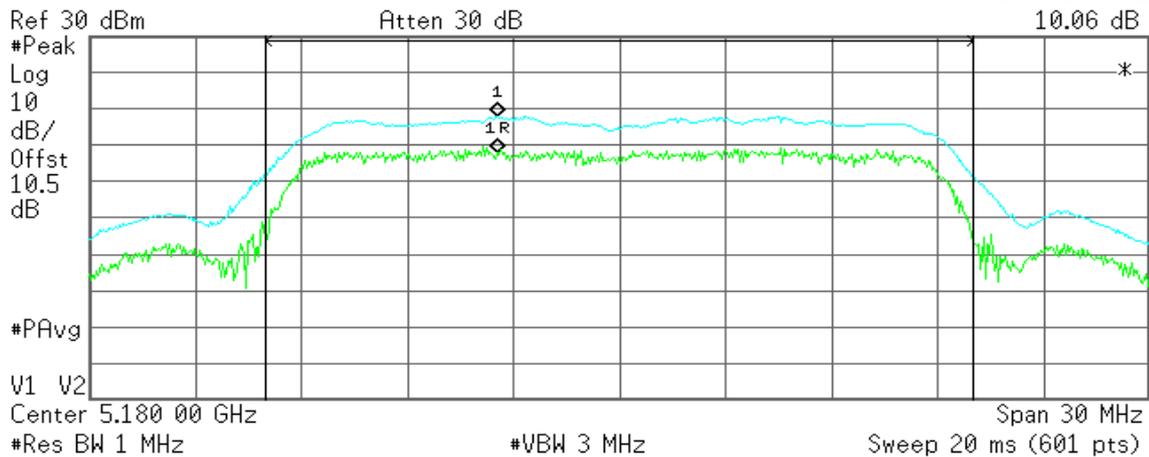

Channel Power

16.15 dBm /20.0000 MHz

Power Spectral Density

-56.86 dBm/Hz




CH Mid

Agilent 14:42:30 Nov 14, 2011

R T

Mkr1 0 Hz
11.56 dB

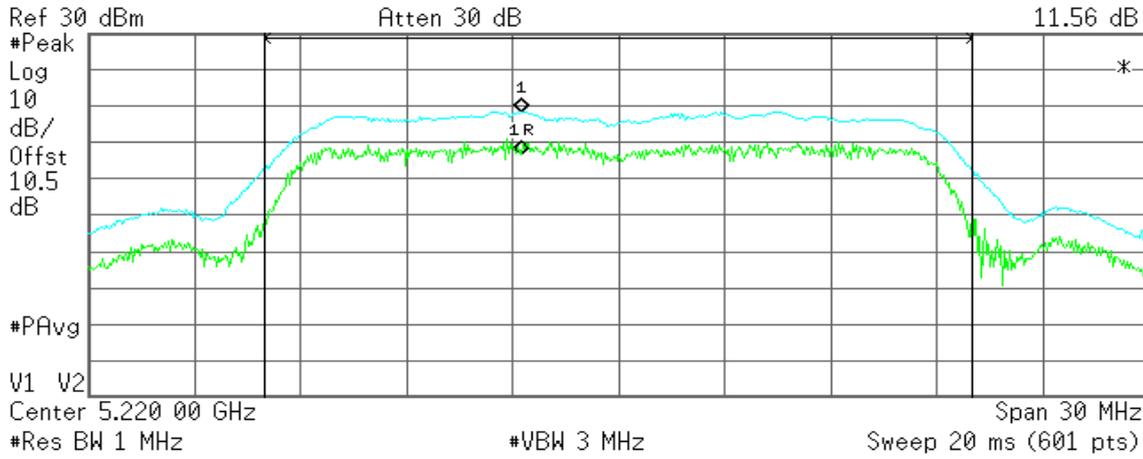

Channel Power

16.58 dBm /20.0000 MHz

Power Spectral Density


-56.43 dBm/Hz

CH High

Agilent 14:44:16 Nov 14, 2011

R T

Mkr1 0 Hz
9.81 dB

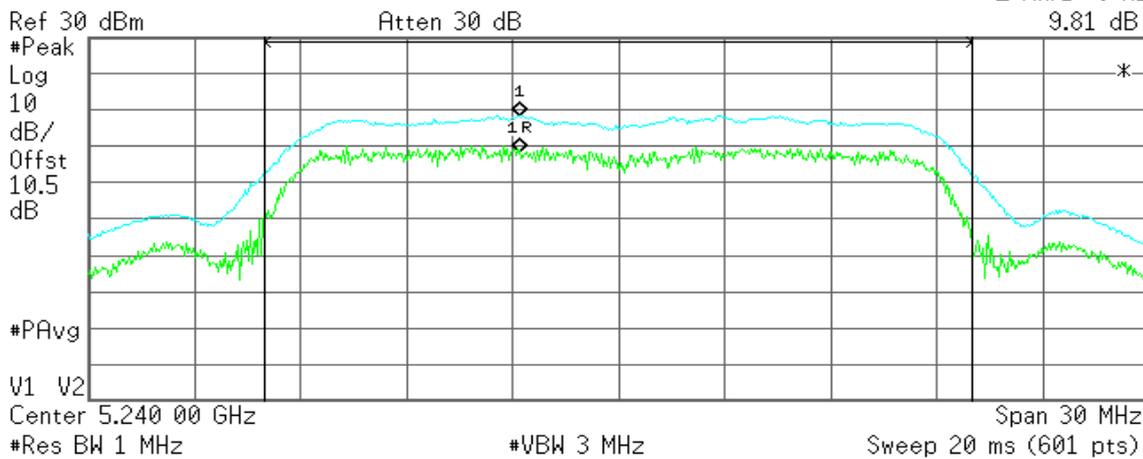

Channel Power

16.57 dBm /20.0000 MHz

Power Spectral Density

-56.44 dBm/Hz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 0

CH Low

Agilent 14:25:39 Nov 14, 2011

R T

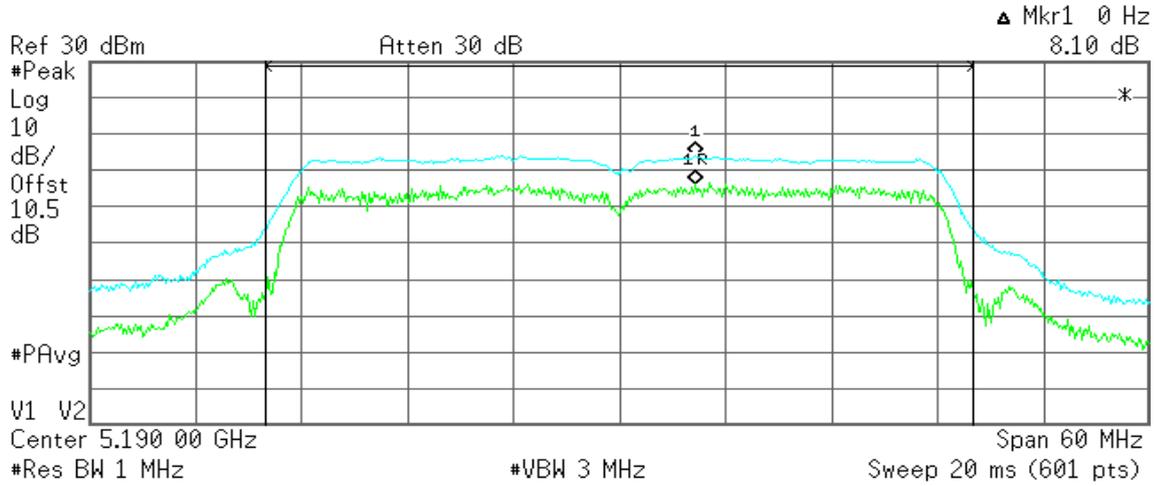

Channel Power

15.75 dBm /40.0000 MHz


Power Spectral Density

-60.27 dBm/Hz

CH High

Agilent 14:29:07 Nov 14, 2011

R T

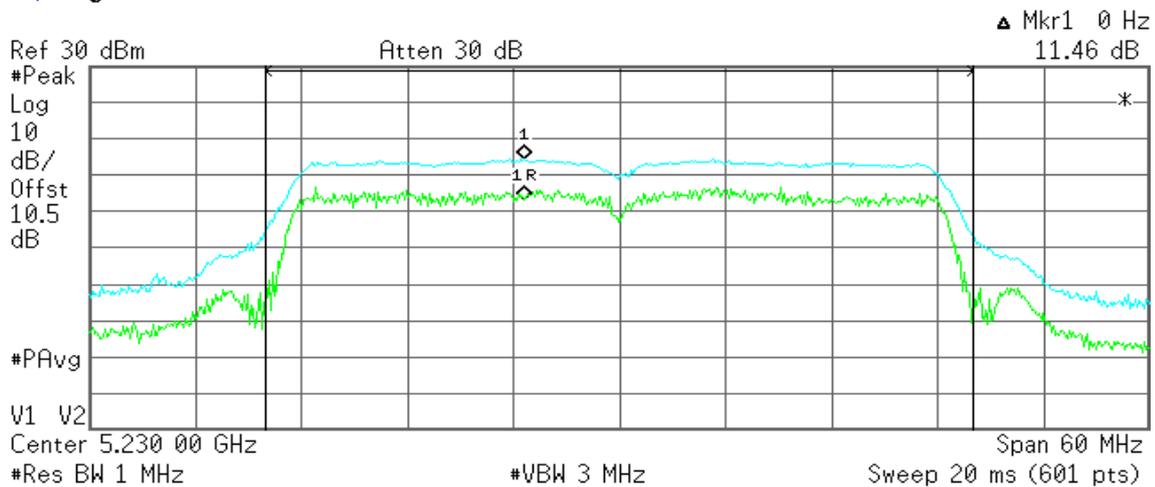

Channel Power

15.90 dBm /40.0000 MHz

Power Spectral Density

-60.12 dBm/Hz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 1

CH Low

Agilent 14:26:38 Nov 14, 2011

R T

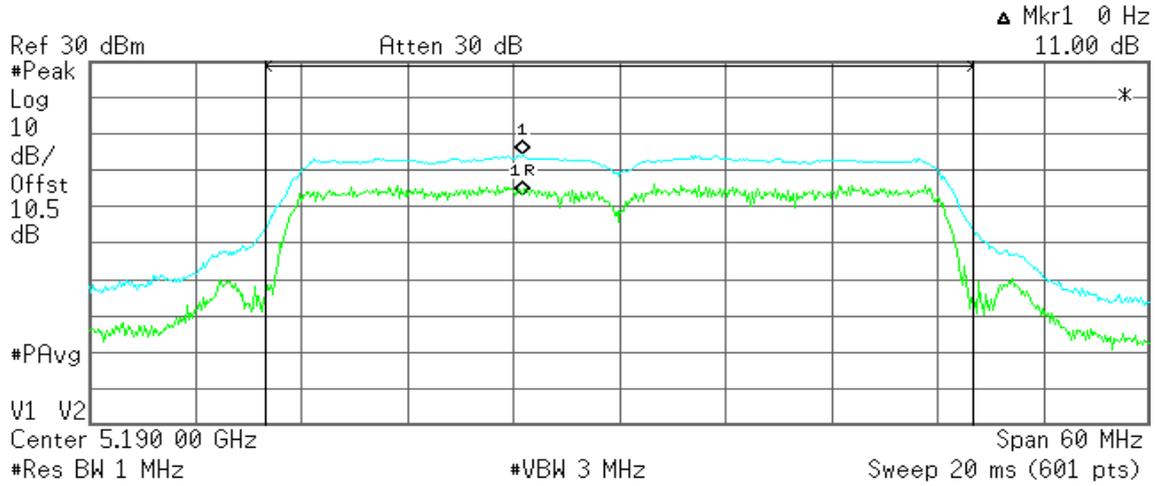

Channel Power

15.82 dBm /40.0000 MHz


Power Spectral Density

-60.20 dBm/Hz

CH High

Agilent 14:28:08 Nov 14, 2011

R T

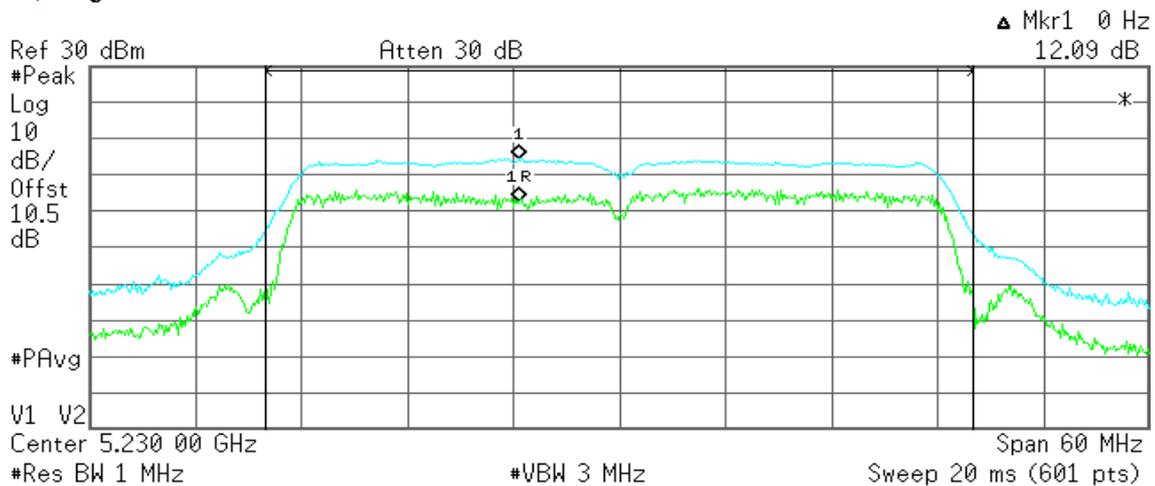

Channel Power

15.97 dBm /40.0000 MHz

Power Spectral Density

-60.05 dBm/Hz




IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 2

CH Low

Agilent 14:24:31 Nov 14, 2011

R T

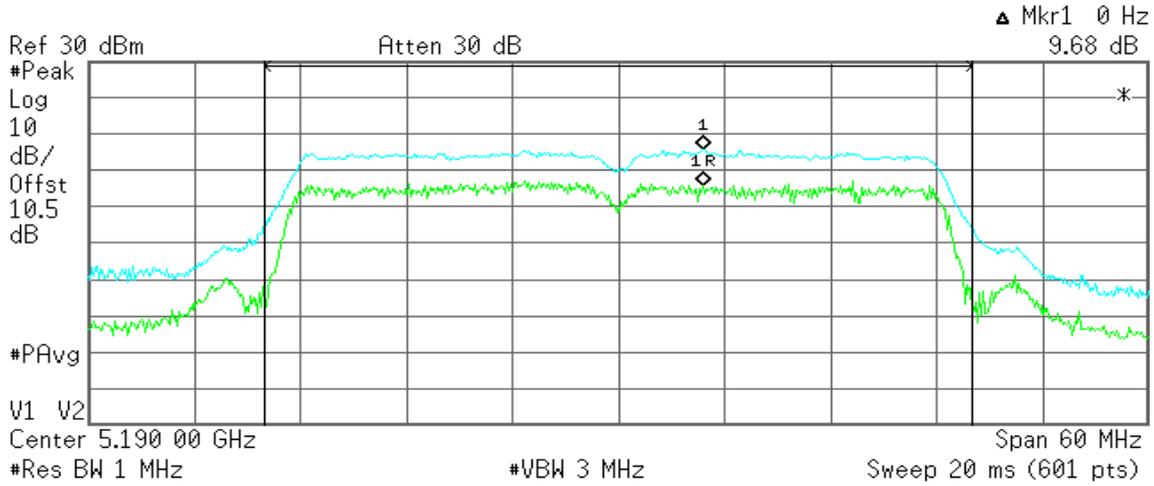

Channel Power

16.47 dBm /40.0000 MHz


Power Spectral Density

-59.56 dBm/Hz

CH High

Agilent 14:30:10 Nov 14, 2011

R T

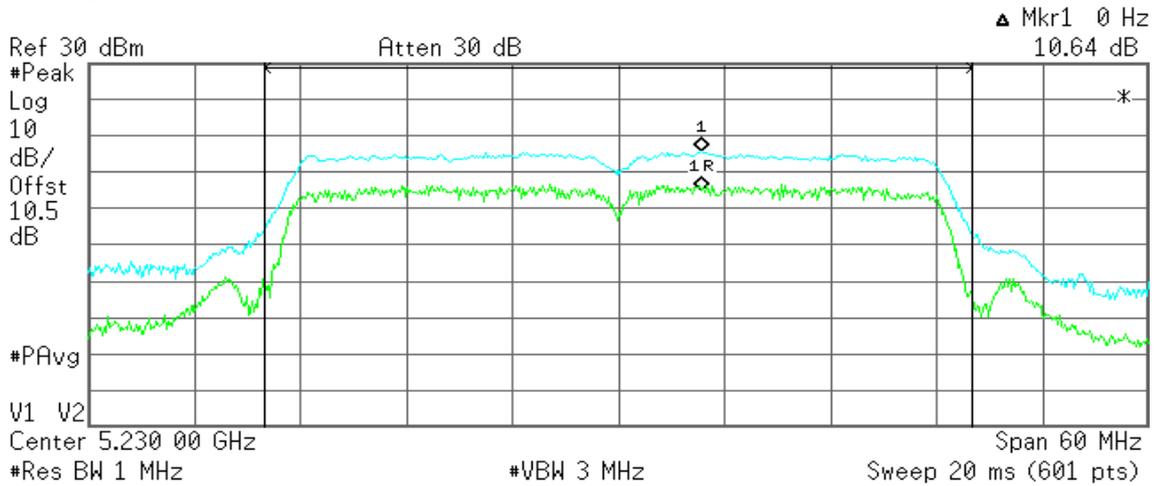

Channel Power

16.58 dBm /40.0000 MHz

Power Spectral Density

-59.44 dBm/Hz



7.6 RADIATED UNDESIRABLE EMISSION

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

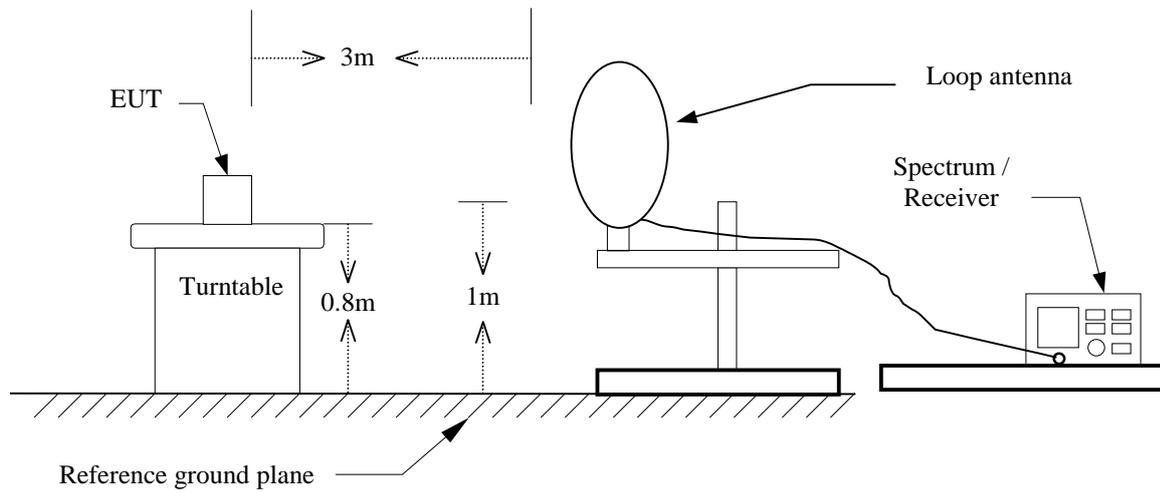


30MHz ~ 1GHz

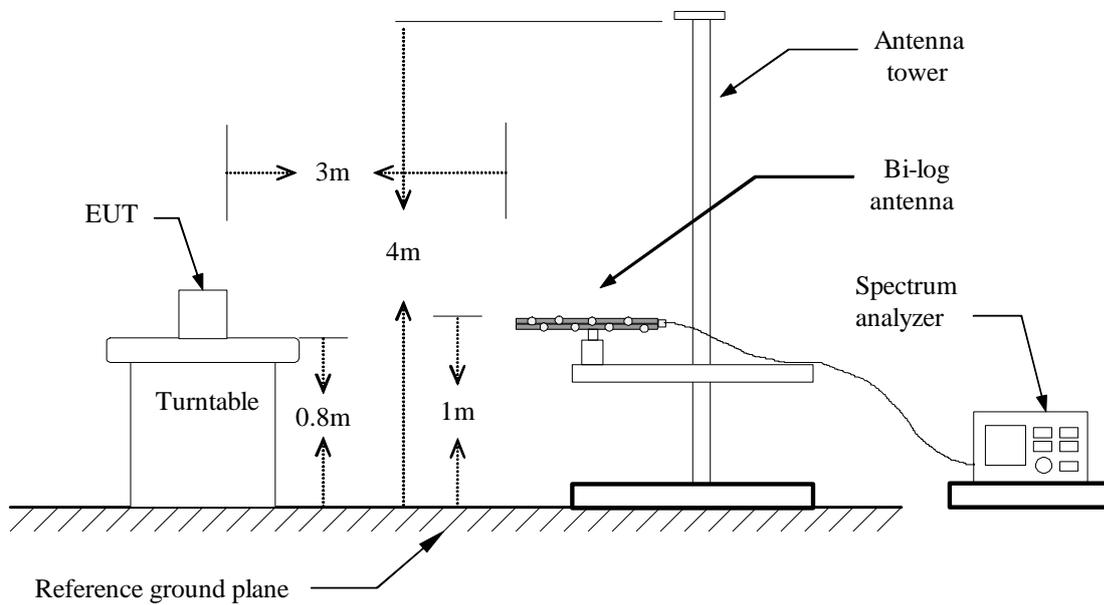



Above 1 GHz

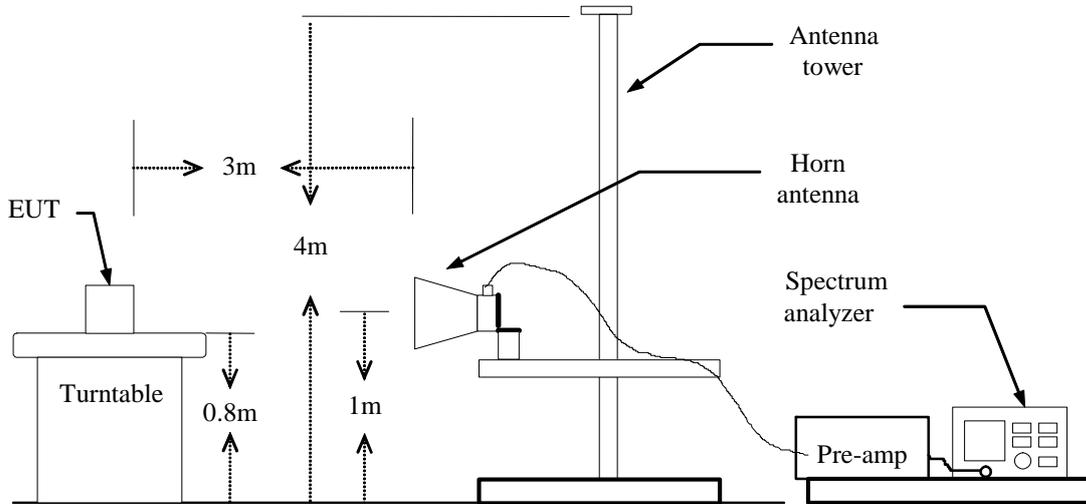



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** November 18, 2011**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak/QP) (dBuV)	Correction Factor (dB/m)	Result (Peak/QP) (dBuV/m)	Limit (Peak/QP) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
65.57	51.92	-16.97	34.95	40.00	-5.05	QP	V
144.78	49.05	-12.28	36.77	43.50	-6.73	Peak	V
308.07	52.56	-10.71	41.85	46.00	-4.15	Peak	V
374.35	45.67	-9.75	35.92	46.00	-10.08	Peak	V
453.57	43.77	-8.55	35.22	46.00	-10.78	Peak	V
624.93	43.50	-6.30	37.19	46.00	-8.81	Peak	V
110.83	51.30	-12.90	38.40	43.50	-5.10	Peak	H
144.78	46.93	-12.28	34.64	43.50	-8.86	Peak	H
191.67	51.86	-12.69	39.17	43.50	-4.33	Peak	H
277.35	49.00	-11.29	37.71	46.00	-8.29	Peak	H
624.93	44.62	-6.30	38.31	46.00	-7.69	Peak	H
875.52	41.38	-2.54	38.84	46.00	-7.16	Peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

For Mode 1

Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2225.00	55.59	---	-4.88	50.70	---	68.3	54.00	-3.30	Peak	V
N/A										
1980.00	55.76	---	-5.67	50.09	---	68.3	54.00	-3.91	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid
Temperature: 25°C
Humidity: 50% RH

Test Date: December 21, 2011
Tested by: Sehni Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2330.00	56.19	---	-4.57	51.63	---	68.3	54.00	-2.37	Peak	V
N/A										
2050.00	54.97	---	-5.34	49.63	---	68.3	54.00	-4.37	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH High **Test Date:** December 21, 2011
Temperature: 25°C **Tested by:** Sehni Hu
Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2213.33	55.73	---	-4.92	50.81	---	68.3	54.00	-3.19	Peak	V
N/A										
2271.67	55.55	---	-4.76	50.79	---	68.3	54.00	-3.21	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1140.00	59.47	---	-10.92	48.54	---	68.3	54.00	-5.46	Peak	V
N/A										
2225.00	55.34	---	-4.88	50.45	---	68.3	54.00	-3.55	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH High **Test Date:** December 21, 2011
Temperature: 25°C **Tested by:** Sehni Hu
Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2015.00	55.77	---	-5.43	50.34	---	68.3	54.00	-3.66	Peak	V
N/A										
1921.67	56.41	---	-6.27	50.14	---	68.3	54.00	-3.86	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



For Mode 2

Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1128.33	60.69	---	-10.94	49.75	---	68.3	54.00	-4.25	Peak	V
15566.67	38.42	28.40	20.10	58.52	48.50	68.3	54.00	-5.50	AVG	V
N/A										
1980.00	55.65	---	-5.67	49.97	---	68.3	54.00	-4.03	Peak	H
15533.33	38.21	28.01	19.90	58.11	47.91	68.3	54.00	-6.09	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid
Temperature: 25°C
Humidity: 50% RH

Test Date: December 21, 2011
Tested by: Sehni Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1128.33	58.12	---	-10.94	47.18	---	68.3	54.00	-6.82	Peak	V
N/A										
2038.33	54.91	---	-5.37	49.54	---	68.3	54.00	-4.46	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH High **Test Date:** December 21, 2011

Temperature: 25°C **Tested by:** Sehni Hu

Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1186.67	56.83	---	-10.88	45.95	---	68.3	54.00	-8.05	Peak	V
N/A										
1886.67	55.73	---	-6.62	49.11	---	68.3	54.00	-4.89	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1816.67	55.38	---	-7.33	48.05	---	68.3	54.00	-5.95	Peak	V
15566.67	38.71	28.42	20.10	58.81	48.52	68.3	54.00	-5.48	AVG	V
N/A										
2015.00	54.96	---	-5.43	49.53	---	68.3	54.00	-4.47	Peak	H
15566.67	38.54	28.04	20.10	58.64	48.14	68.3	54.00	-5.86	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH High **Test Date:** December 21, 2011
Temperature: 25°C **Tested by:** Sehni Hu
Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2353.33	54.95	---	-4.47	50.48	---	68.3	54.00	-3.52	Peak	V
15633.33	39.60	29.38	20.48	60.08	49.86	68.3	54.00	-4.14	AVG	V
N/A										
2003.33	55.58	---	-5.46	50.12	---	68.3	54.00	-3.88	Peak	H
15633.33	39.86	29.21	20.48	60.34	49.69	68.3	54.00	-4.31	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



For Mode 3

Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2015.00	55.94	---	-5.43	50.51	---	68.3	54.00	-3.49	Peak	V
N/A										
2318.33	55.90	---	-4.61	51.29	---	68.3	54.00	-2.71	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Mid

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2411.67	55.05	---	-4.23	50.82	---	68.3	54.00	-3.18	Peak	V
N/A										
2155.00	56.26	---	-5.07	51.19	---	68.3	54.00	-2.81	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH High

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2318.33	56.31	---	-4.61	51.69	---	68.3	54.00	-2.31	Peak	V
N/A										
2376.67	55.56	---	-4.38	51.18	---	68.3	54.00	-2.82	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Low
Temperature: 25°C
Humidity: 50% RH

Test Date: December 21, 2011
Tested by: Sehni Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2003.33	54.95	---	-5.46	49.49	---	68.3	54.00	-4.51	Peak	V
N/A										
2015.00	55.38	---	-5.43	49.95	---	68.3	54.00	-4.05	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid
Temperature: 25°C
Humidity: 50% RH

Test Date: December 21, 2011
Tested by: Sehni Hu
Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1140.00	62.40	---	-10.92	51.48	---	68.3	54.00	-2.52	Peak	V
N/A										
2003.33	55.67	---	-5.46	50.21	---	68.3	54.00	-3.79	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH High **Test Date:** December 21, 2011

Temperature: 25°C **Tested by:** Sehni Hu

Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1128.33	58.65	---	-10.94	47.72	---	68.3	54.00	-6.28	Peak	V
N/A										
1968.33	56.08	---	-5.79	50.28	---	68.3	54.00	-3.72	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH Low

Test Date: December 21, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1151.67	60.18	---	-10.91	49.27	---	68.3	54.00	-4.73	Peak	V
N/A										
1898.33	56.13	---	-6.50	49.63	---	68.3	54.00	-4.37	Peak	H
15550.00	38.42	28.22	20.00	58.42	48.22	68.3	54.00	-5.78	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / 5190 ~ 5230MHz / CH High **Test Date:** December 21, 2011

Temperature: 25°C **Tested by:** Sehni Hu

Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1163.33	60.29	---	-10.90	49.39	---	68.3	54.00	-4.61	Peak	V
15583.33	38.95	29.09	20.19	59.14	49.28	68.3	54.00	-4.72	AVG	V
N/A										
1793.33	55.54	---	-7.57	47.97	---	68.3	54.00	-6.03	Peak	H
15683.33	39.80	29.52	20.77	60.58	50.29	68.3	54.00	-3.71	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 CONDUCTED UNDESIRABLE EMISSION


LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

The provisions of §15.205 apply to intentional radiators operating under this section.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

EIRP Limit : -27dBm - G(dBi) – 10log(n)

A GAIN : 4.97 dBi Duty cycla:99%
 A20 GAIN : 7.94 dBi Duty cycla:98%
 A40 GAIN : 7.94 dBi Duty cycla:85%


$A = -27 - 4.97 - 0.04 = -32.01$
 $A20 = -27 - 7.94 - 0.08 = -35.02$
 $A40 = -27 - 7.94 - 0.71 = -35.65$

IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 09:30:24 Nov 14, 2011

R T

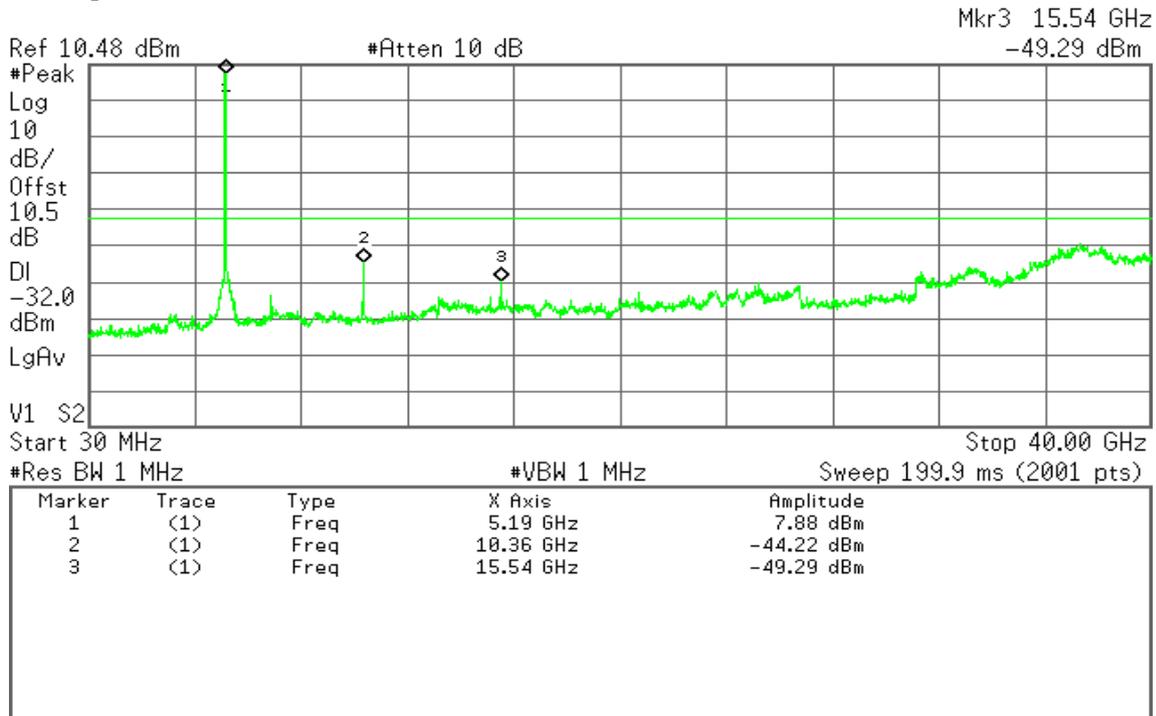




CH Mid

Agilent 09:33:15 Nov 14, 2011


R T

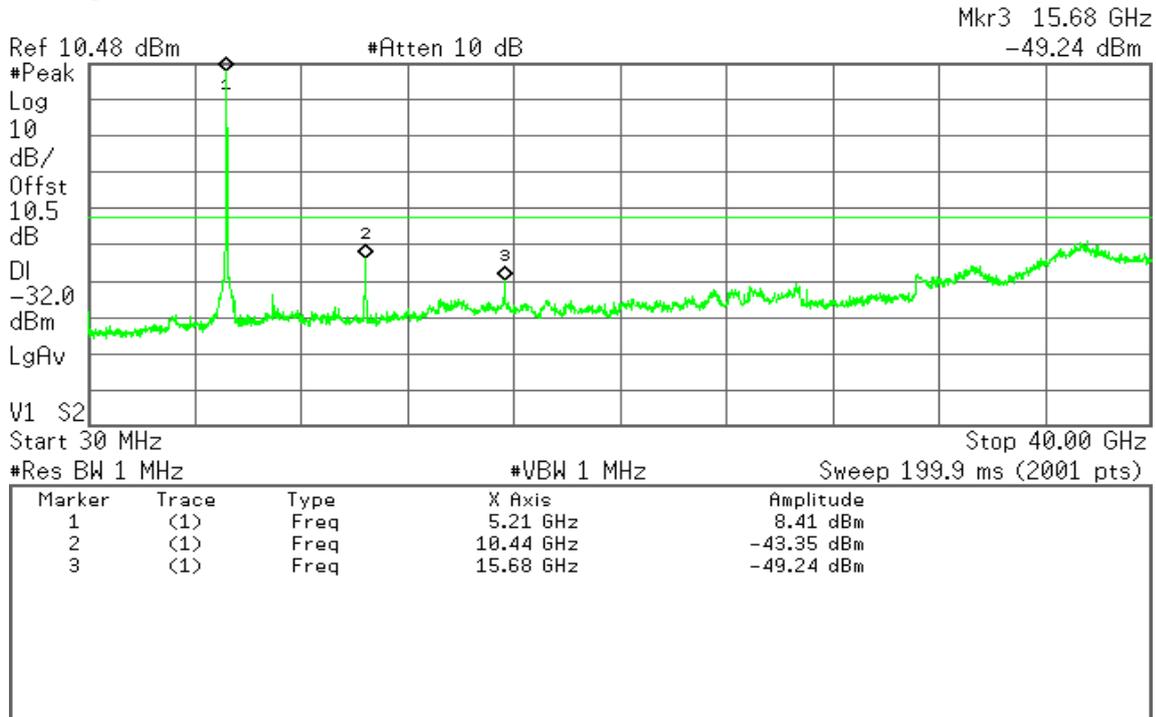

CH High

Agilent 09:35:56 Nov 14, 2011

R T

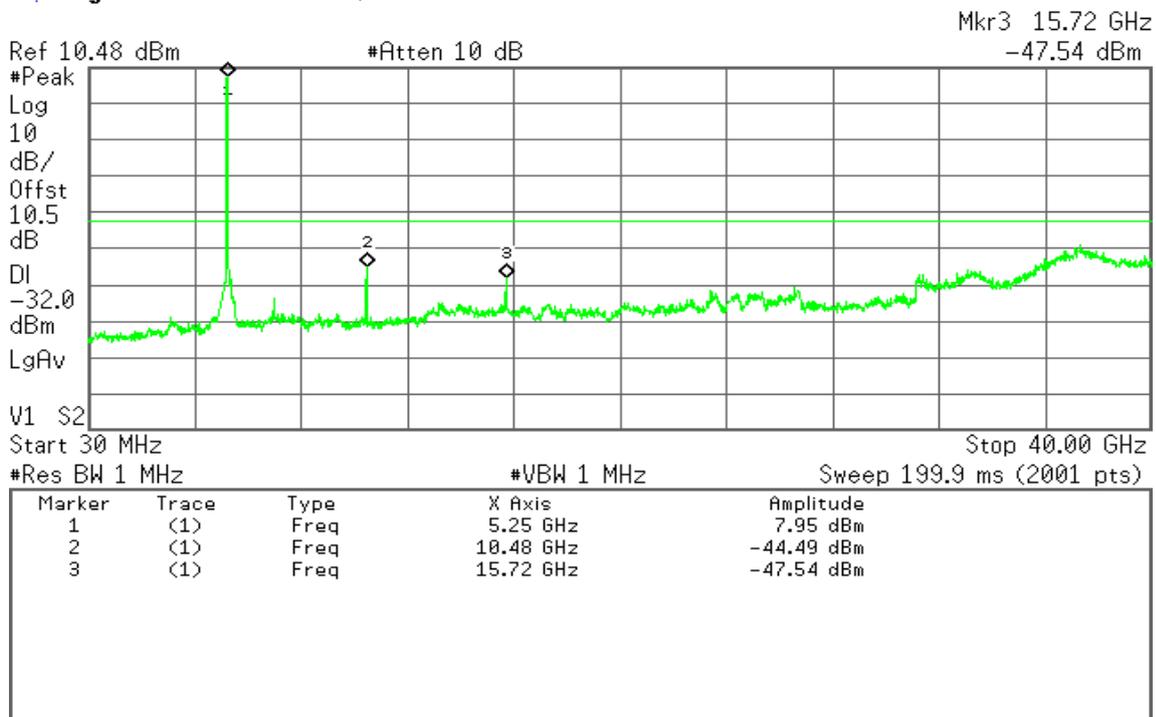




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 0

CH Low

Agilent 13:01:55 Nov 14, 2011

R T

Mkr1 5.19 GHz
-1.36 dBm

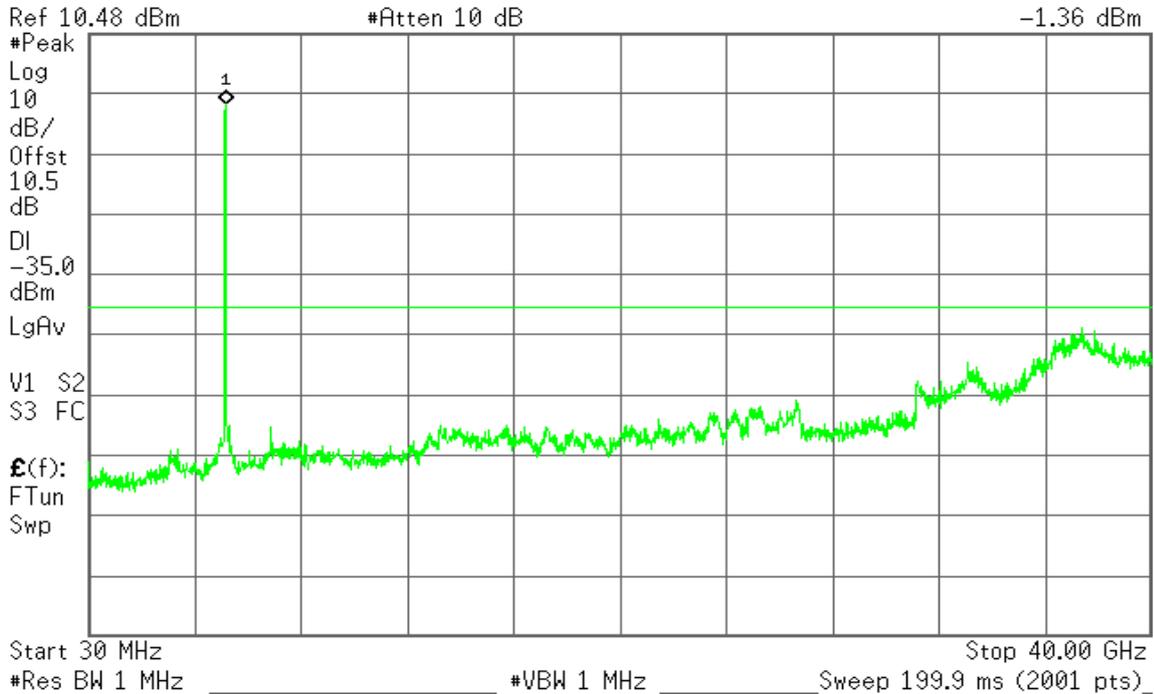


CH Mid

Agilent 13:05:25 Nov 14, 2011

R T

Mkr1 5.23 GHz
0.09 dBm

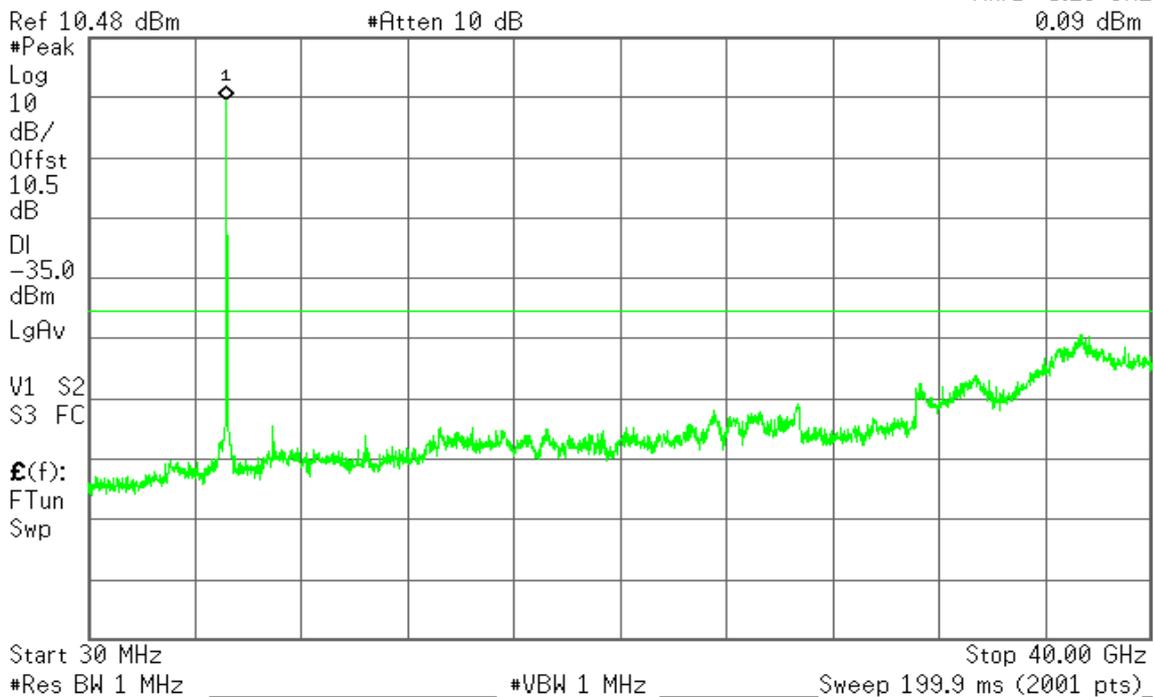




CH High

Agilent 13:13:06 Nov 14, 2011

R T

Mkr1 5.25 GHz
0.41 dBm

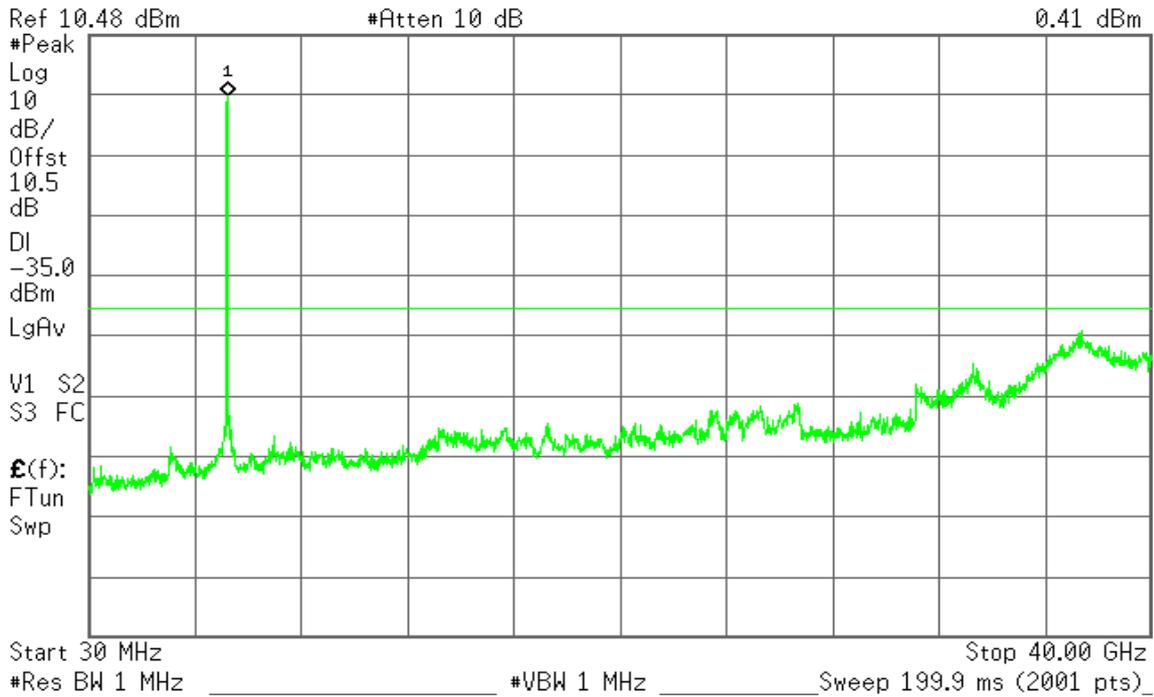


IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 1

CH Low

Agilent 12:58:06 Nov 14, 2011

R T

Mkr1 5.19 GHz
-0.44 dBm

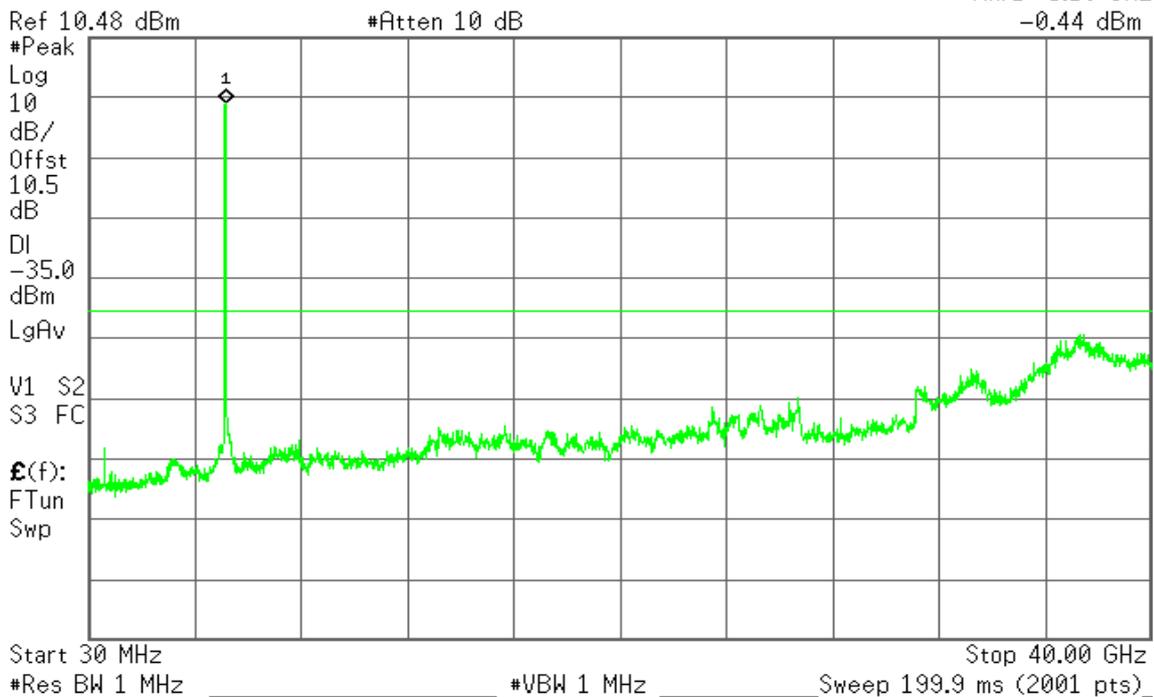




CH Mid

Agilent 13:08:01 Nov 14, 2011

R T

Mkr1 5.23 GHz
0.26 dBm

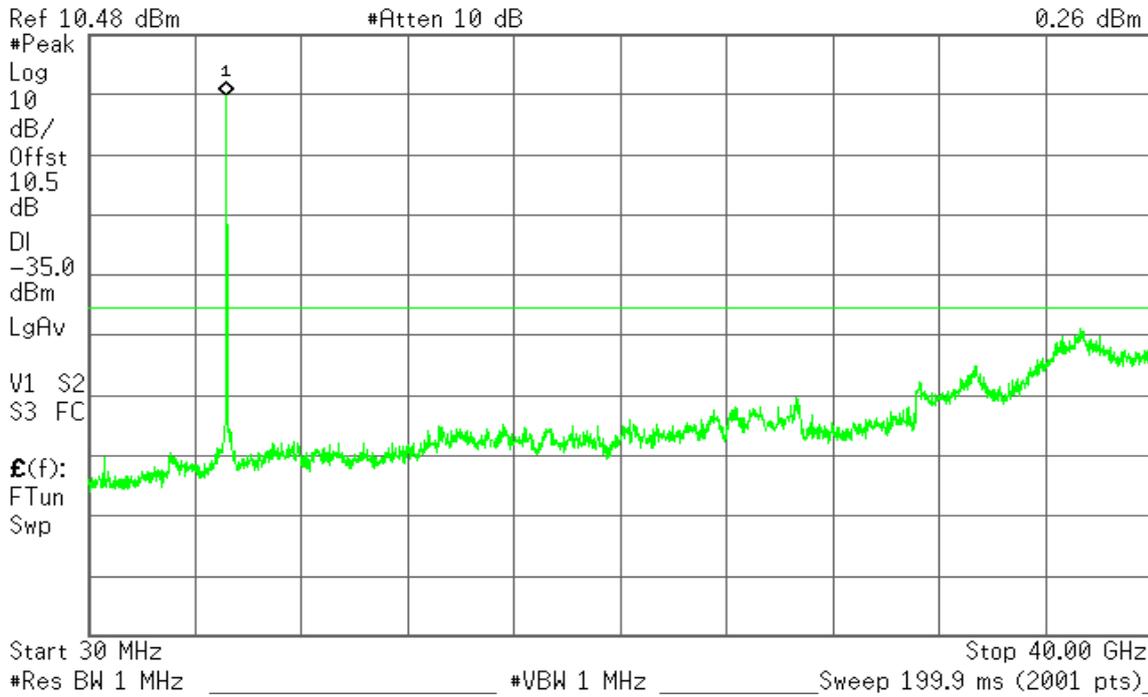


CH High

Agilent 13:10:47 Nov 14, 2011

R T

Mkr1 5.23 GHz
0.32 dBm

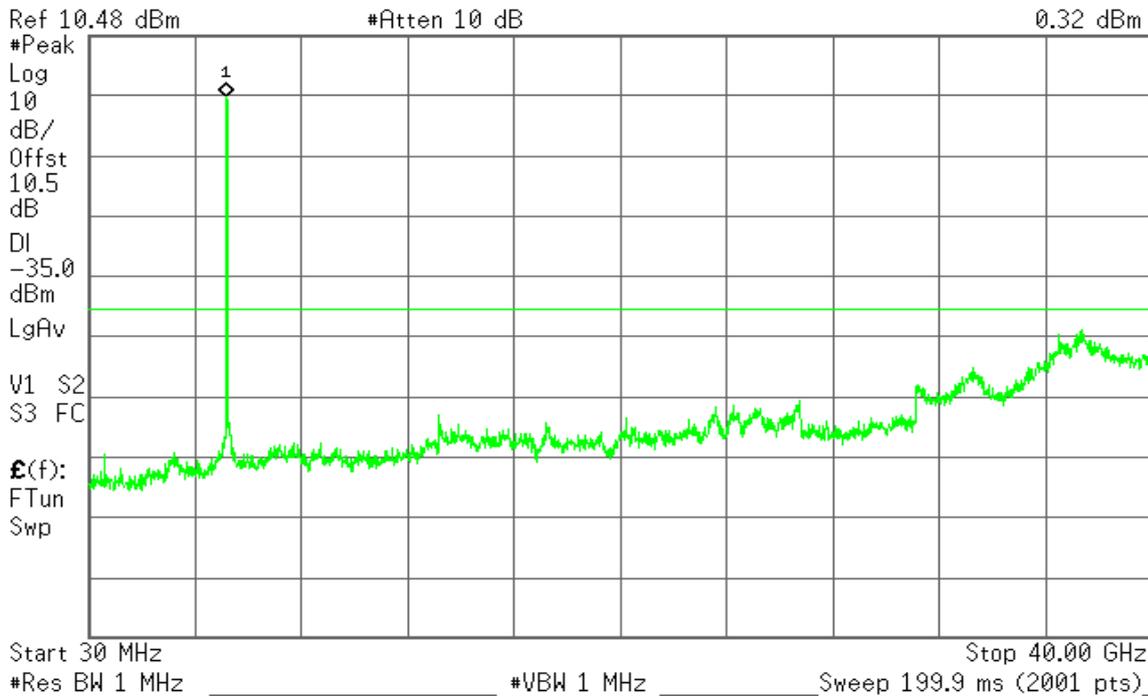




IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz / Chain 2

CH Low

Agilent 13:51:55 Nov 14, 2011

R T

Mkr1 5.19 GHz
0.94 dBm

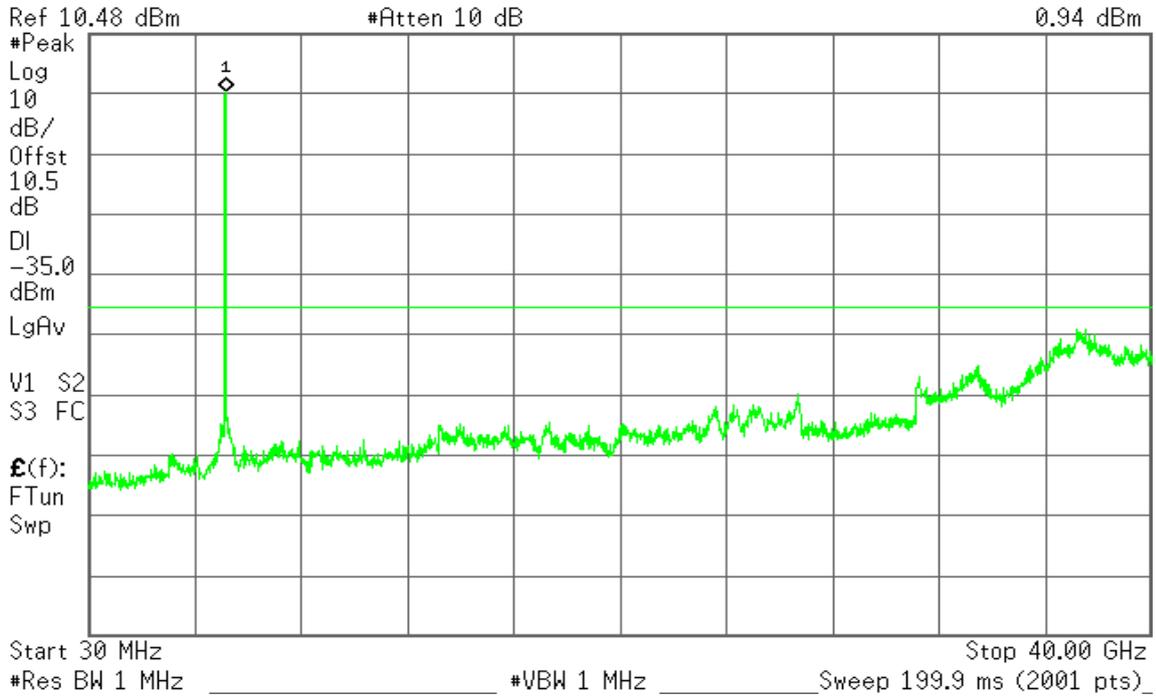


CH Mid

Agilent 13:57:20 Nov 14, 2011

R T

Mkr1 5.23 GHz
0.49 dBm

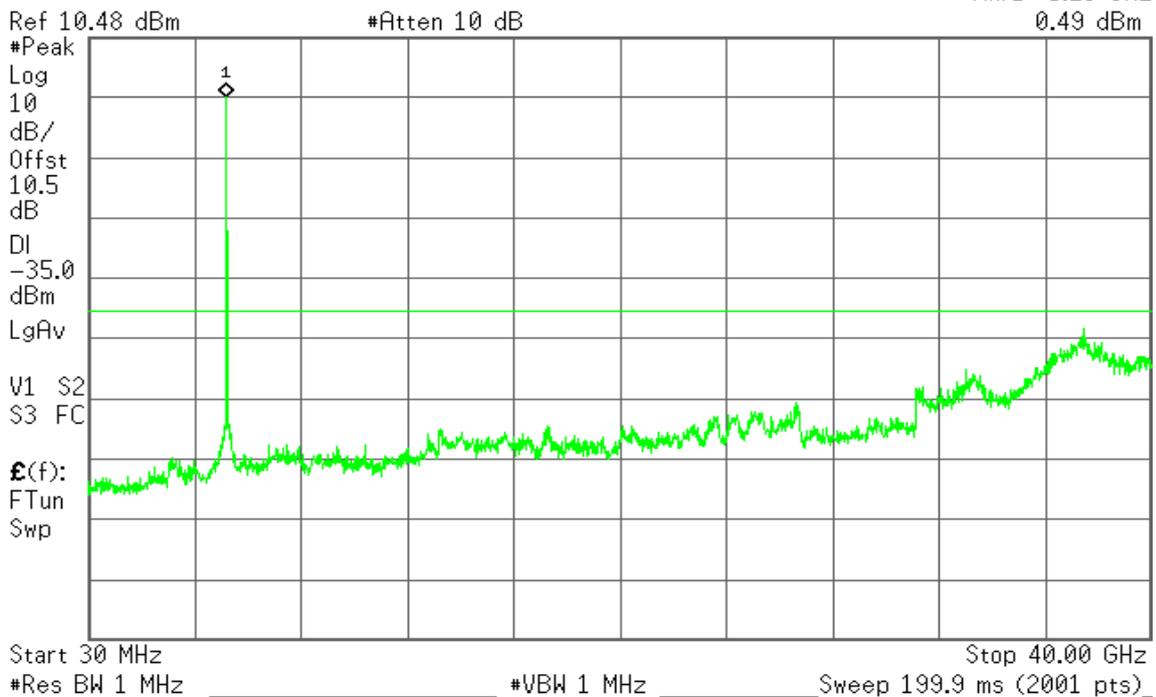




CH High

Agilent 14:04:39 Nov 14, 2011

R T

Mkr1 5.25 GHz
-0.57 dBm

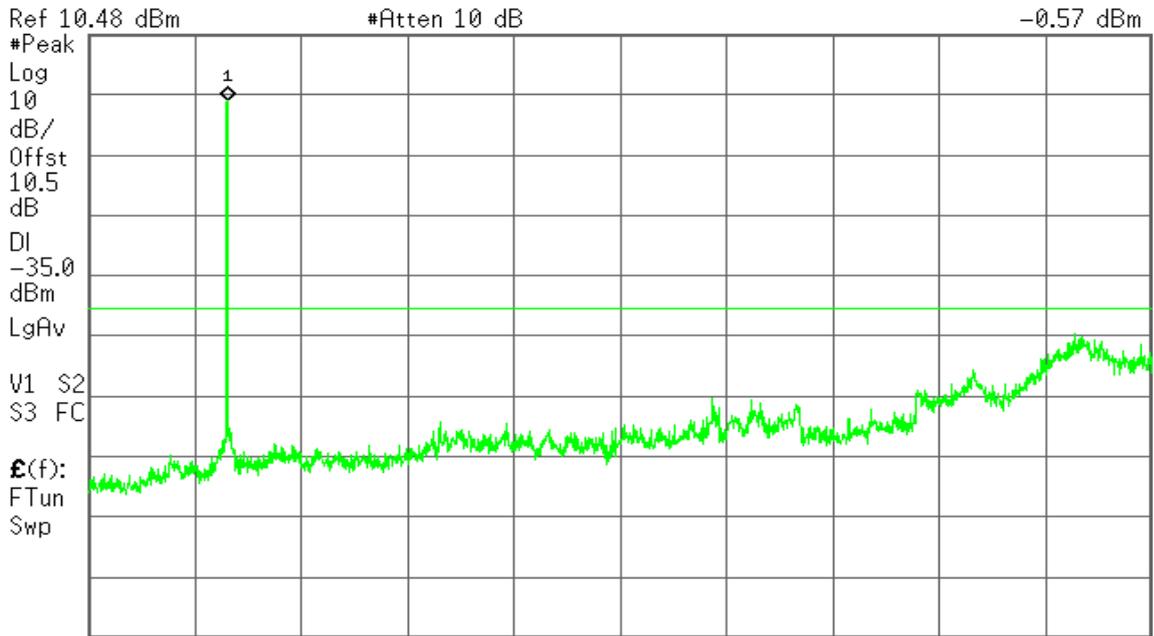

Start 30 MHz Stop 40.00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 0

CH Low

Agilent 13:20:50 Nov 14, 2011

R T

Mkr1 5.19 GHz
0.08 dBm

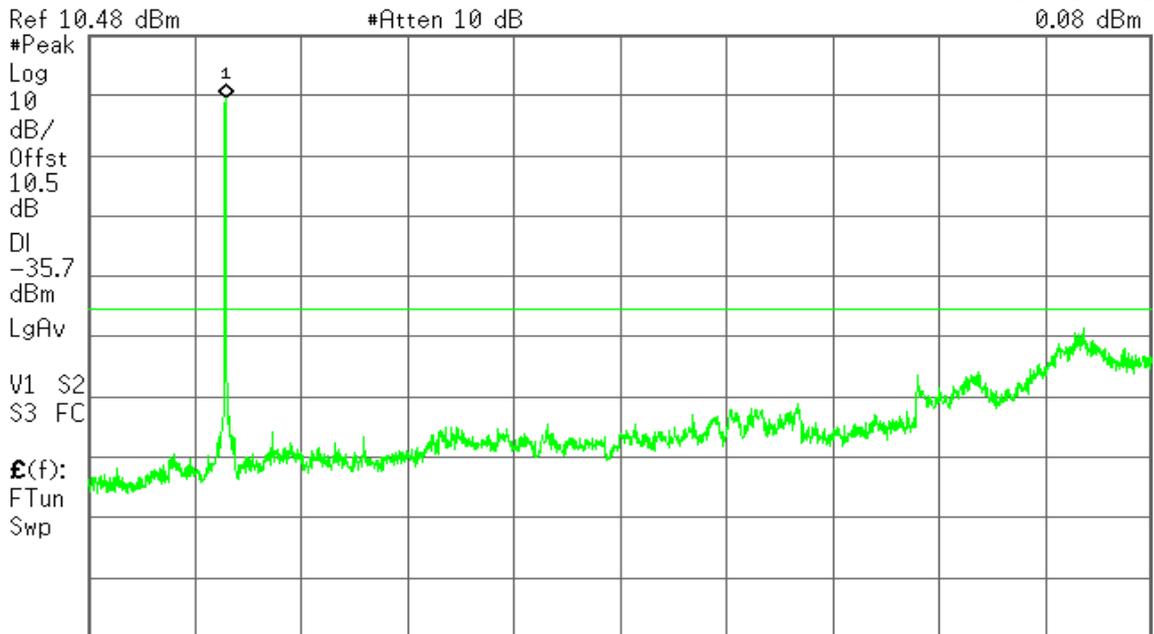

Start 30 MHz Stop 40.00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)




CH High

Agilent 13:35:00 Nov 14, 2011

R T

Mkr1 5.23 GHz
1.63 dBm

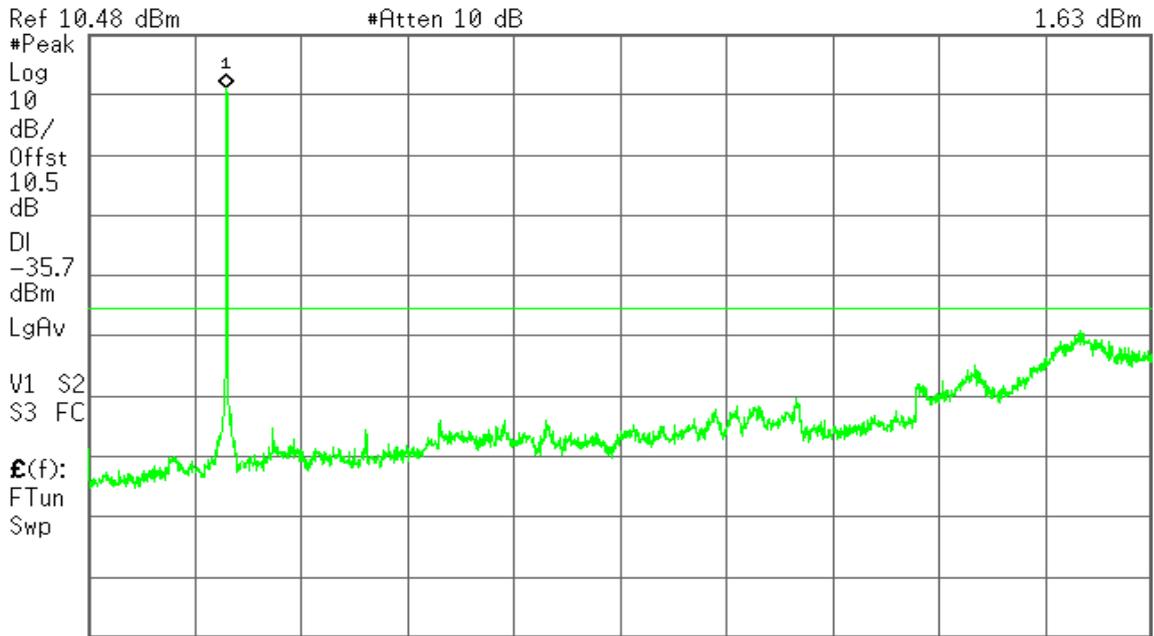

Start 30 MHz Stop 40.00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 1

CH Low

Agilent 13:27:35 Nov 14, 2011

R T

Mkr1 5.19 GHz
1.89 dBm

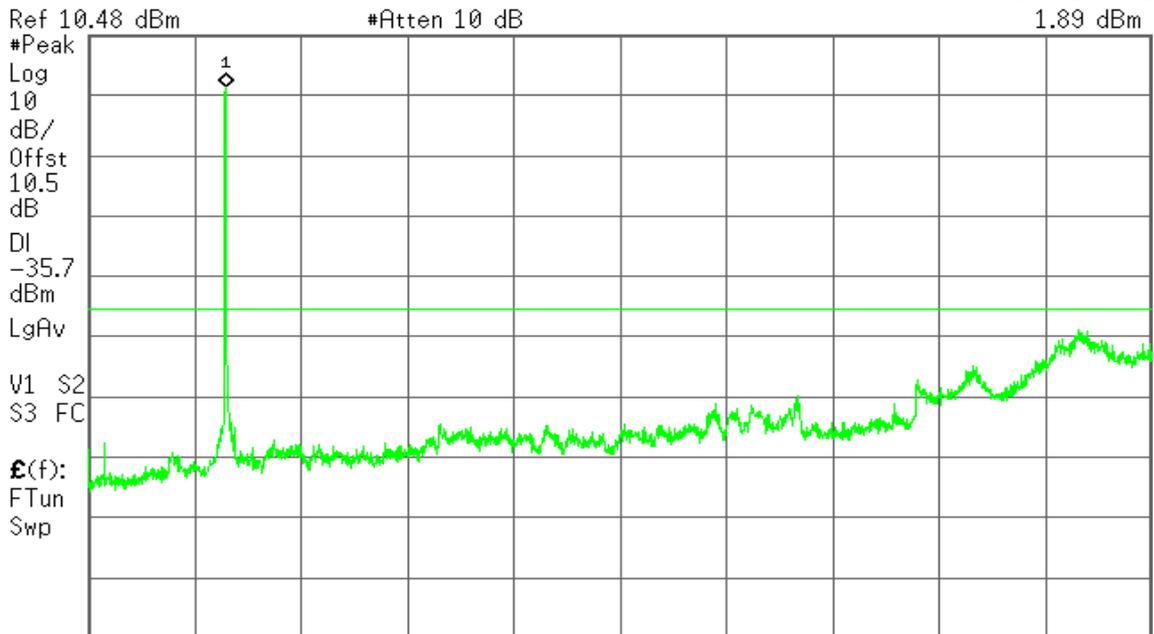

Start 30 MHz Stop 40.00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)




CH High

Agilent 13:32:12 Nov 14, 2011

R T

Mkr1 5.23 GHz
2.21 dBm

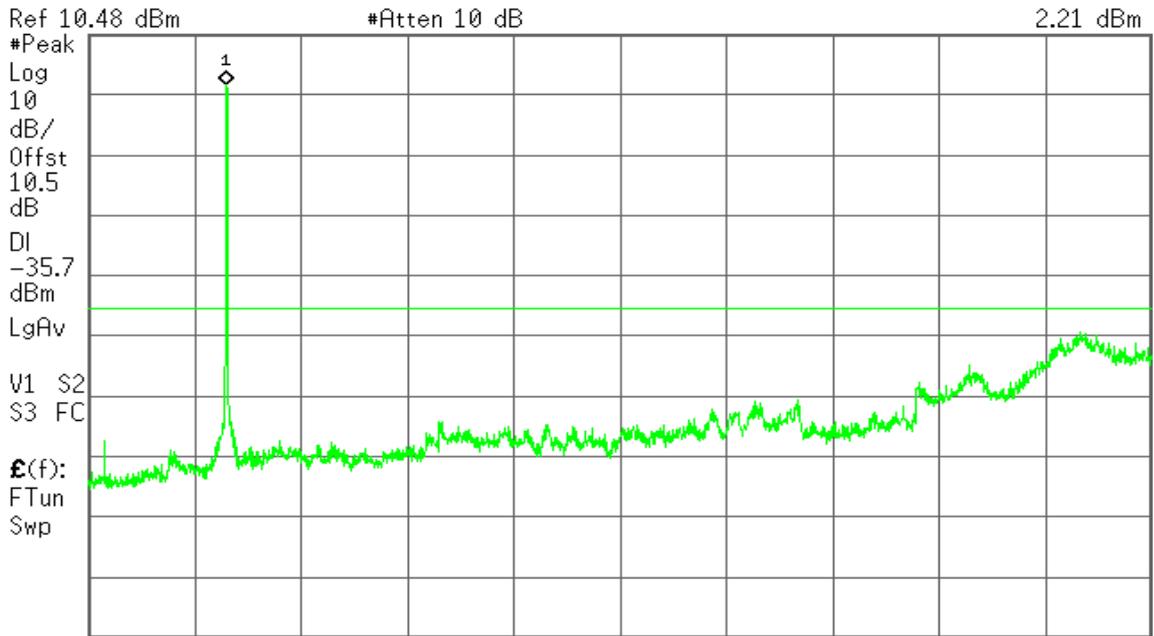


IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz / Chain 2

CH Low

Agilent 13:41:29 Nov 14, 2011

R T

Mkr1 5.19 GHz
1.16 dBm

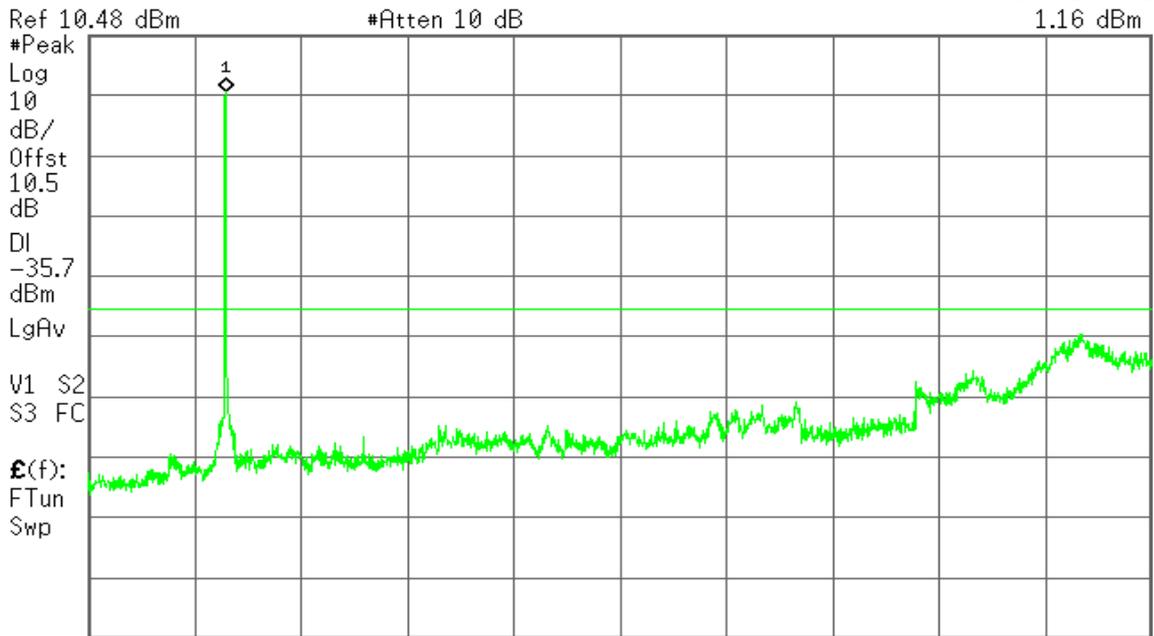




CH High

Agilent 13:44:12 Nov 14, 2011

R T

Mkr1 5.25 GHz
1.68 dBm

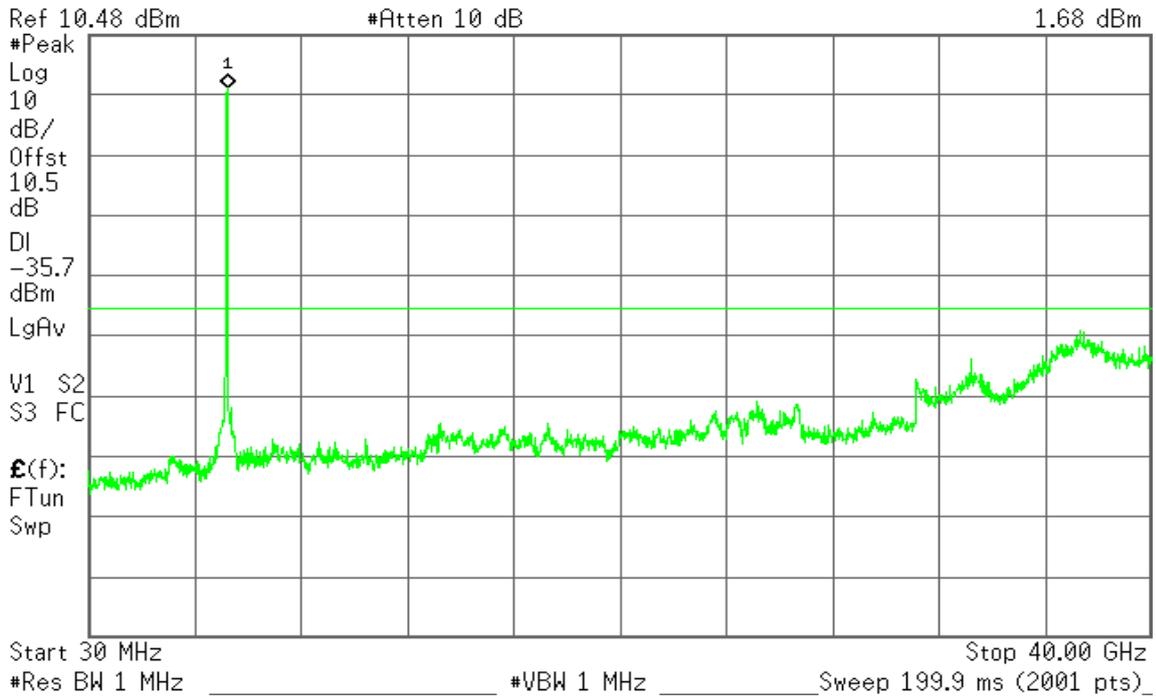



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Operation Mode:	Normal Link	Test Date:	November 1, 2011
Temperature:	24°C	Tested by:	Frank Liao
Humidity:	60% RH	Line	L1

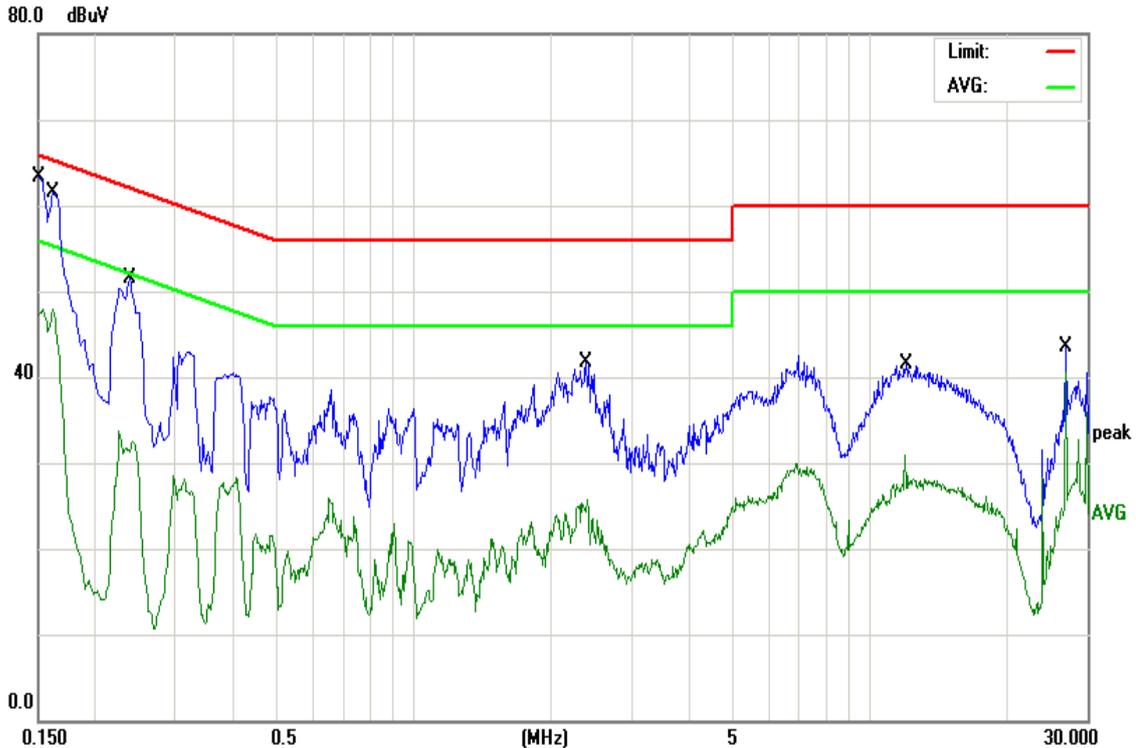

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	47.87	10.26	58.13	65.99	-7.86	QP
2	0.1500	36.96	10.26	47.22	55.99	-8.77	AVG
3	0.1620	36.29	10.23	46.52	65.36	-18.84	QP
4	0.1620	14.62	10.23	24.85	55.36	-30.51	AVG
5	0.2380	21.76	10.12	31.88	62.16	-30.28	QP
6	0.2380	3.11	10.12	13.23	52.16	-38.93	AVG
7	2.3900	27.55	10.03	37.58	56.00	-18.42	QP
8	2.3900	15.24	10.03	25.27	46.00	-20.73	AVG
9	12.0580	20.21	10.21	30.42	60.00	-29.58	QP
10	12.0580	16.97	10.21	27.18	50.00	-22.82	AVG
11	26.9340	30.21	10.56	40.77	60.00	-19.23	QP
12	26.9340	15.48	10.56	26.04	50.00	-23.96	AVG

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Operation Mode: Normal Link


Test Date: November 1, 2011

Temperature: 24°C

Tested by: Frank Liao

Humidity: 60% RH

Line: L2

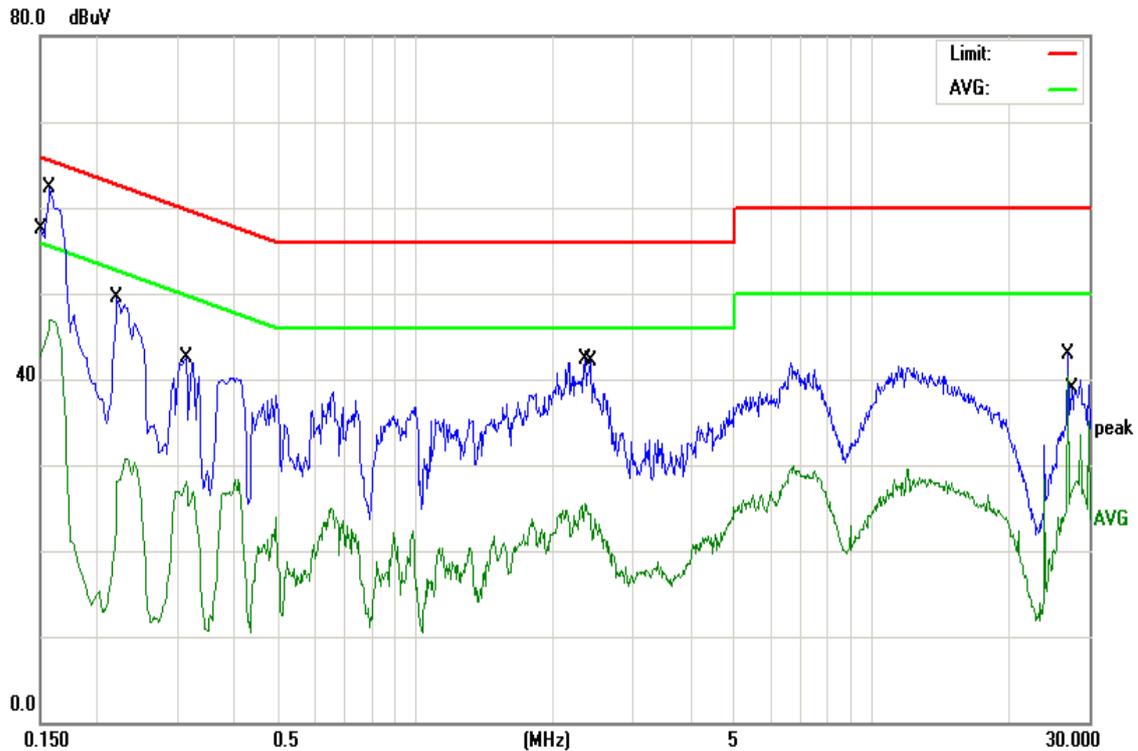

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	47.44	10.09	57.53	65.99	-8.46	QP
2	0.1500	32.59	10.09	42.68	55.99	-13.31	AVG
3	0.1580	42.18	10.07	52.25	65.56	-13.31	QP
4	0.1580	36.76	10.07	46.83	55.56	-8.73	AVG
5	0.2220	30.56	10.00	40.56	62.74	-22.18	QP
6	0.2220	18.11	10.00	28.11	52.74	-24.63	AVG
7	0.3140	32.60	9.94	42.54	59.86	-17.32	QP
8	0.3140	18.11	9.94	28.05	49.86	-21.81	AVG
9	2.3580	32.36	9.94	42.30	56.00	-13.70	QP
10	2.3900	14.33	9.94	24.27	46.00	-21.73	AVG
11	26.9340	32.42	10.50	42.92	60.00	-17.08	QP
12	27.3780	15.96	10.50	26.46	50.00	-23.54	AVG

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




7.9 FREQUENCY STABILITY

LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Test Configuration

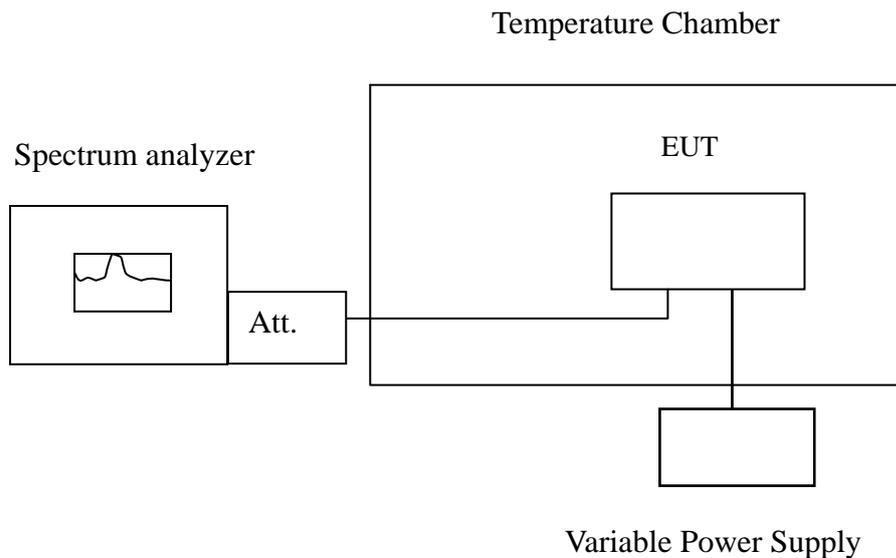

Remark: Measurement setup for testing on Antenna connector



TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

No non-compliance noted.

IEEE 802.11a mode / 5180 ~ 5240 MHz:

CH Low

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5180.008069	5150~5250	Pass
40	120	5179.979388	5150~5250	Pass
30	120	5179.999456	5150~5250	Pass
20	120	5180.018443	5150~5250	Pass
10	120	5180.010820	5150~5250	Pass
0	120	5180.002534	5150~5250	Pass
-10	120	5180.018997	5150~5250	Pass
-20	120	5179.971479	5150~5250	Pass

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5180.009737	5150~5250	Pass
	110	5179.975147	5150~5250	Pass
	121	5179.985548	5150~5250	Pass



CH High

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5240.017597	5150~5250	Pass
40	120	5239.989365	5150~5250	Pass
30	120	5240.005376	5150~5250	Pass
20	120	5239.975195	5150~5250	Pass
10	120	5240.008279	5150~5250	Pass
0	120	5239.985528	5150~5250	Pass
-10	120	5240.002413	5150~5250	Pass
-20	120	5239.981400	5150~5250	Pass

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5239.997143	5150~5250	Pass
	110	5239.983163	5150~5250	Pass
	121	5240.015898	5150~5250	Pass



IEEE 802.11n HT 20 MHz / 5180 ~ 5240 MHz:

CH Low

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5179.999227	5150~5250	Pass
40	120	5180.008547	5150~5250	Pass
30	120	5179.996451	5150~5250	Pass
20	120	5180.018148	5150~5250	Pass
10	120	5180.015381	5150~5250	Pass
0	120	5179.992953	5150~5250	Pass
-10	120	5179.981694	5150~5250	Pass
-20	120	5179.979523	5150~5250	Pass

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5180.005194	5150~5250	Pass
	110	5179.987306	5150~5250	Pass
	121	5179.99221	5150~5250	Pass



CH High

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5239.999173	5150~5250	Pass
40	120	5239.975561	5150~5250	Pass
30	120	5240.006332	5150~5250	Pass
20	120	5240.011244	5150~5250	Pass
10	120	5240.016157	5150~5250	Pass
0	120	5240.010347	5150~5250	Pass
-10	120	5239.976576	5150~5250	Pass
-20	120	5239.985276	5150~5250	Pass

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5239.975275	5150~5250	Pass
	110	5239.978235	5150~5250	Pass
	121	5240.010857	5150~5250	Pass



IEEE 802.11n HT 40 MHz / 5190 ~ 5230 MHz:

CH Low

Operating Frequency: 5190 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5189.976894	5150~5250	Pass
40	120	5189.976695	5150~5250	Pass
30	120	5190.000180	5150~5250	Pass
20	120	5190.005424	5150~5250	Pass
10	120	5189.989693	5150~5250	Pass
0	120	5190.004222	5150~5250	Pass
-10	120	5190.020994	5150~5250	Pass
-20	120	5189.975604	5150~5250	Pass

Operating Frequency: 5190 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5190.008673	5150~5250	Pass
	110	5189.986866	5150~5250	Pass
	121	5189.986508	5150~5250	Pass



CH High

Operating Frequency: 5230 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	120	5229.971337	5150~5250	Pass
40	120	5229.987898	5150~5250	Pass
30	120	5229.988175	5150~5250	Pass
20	120	5229.995861	5150~5250	Pass
10	120	5230.014015	5150~5250	Pass
0	120	5229.971852	5150~5250	Pass
-10	120	5230.005806	5150~5250	Pass
-20	120	5229.998456	5150~5250	Pass

Operating Frequency: 5230 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5229.991501	5150~5250	Pass
	110	5230.011001	5150~5250	Pass
	121	5229.998871	5150~5250	Pass