

1		2		3		4		5	
A	Scale/1:1 Unit/mm DO NOT SCALE DRAWING					R1	Initial Release	20191227	
						R2	Add:Sercomm P/N	20200224	
						R3	Add:FCC logo and 警語	20200319	
						R4	Update:“Sercomm P/N” for“P/N”	20200323	
						R5	Adjust details according to factory requirements	20200427	
						R6	Update: Login: http://192.168.1.1	20200511	
						R7	Add“FCC ID: P27IP3442M”	20200514	
						R8	Update Model: IP3442M-L/XX	20200529	
						R9	Adjust safty logo location	20200615	


59.5±0.2

3-R1.75

34.5±0.2

C1.85

刀模线不印刷 (DIM LINE NO PRINT)

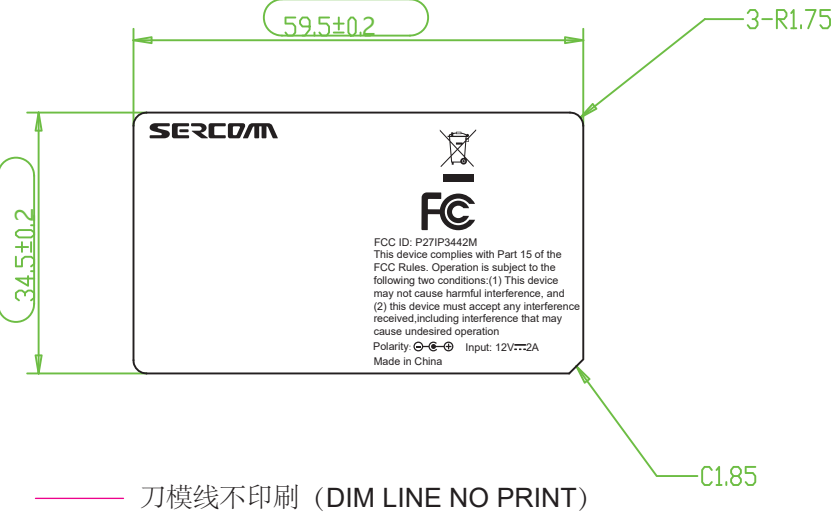


Model: IP3442M-L/XX
P/N: XXXXXXXXXX
WIFI SSID: LIB-1234567
WIFI Password: 1234567890AB
Serial: yymmcccnnnnnn
MAC: 1234567890AB
WPS PIN: 12345678
Login: http://192.168.1.1
Username: admin
Password: 12345678

30*30mm

TEXT SIZE:Arial/6Pt
Barcode: Code 128

SN: yymmcccnnnnnn (13 digits Sercomm SN??)
yy : last two digit (19 for 2019)
mm : 01-12
ccc : product code
nnnnnn : serial number

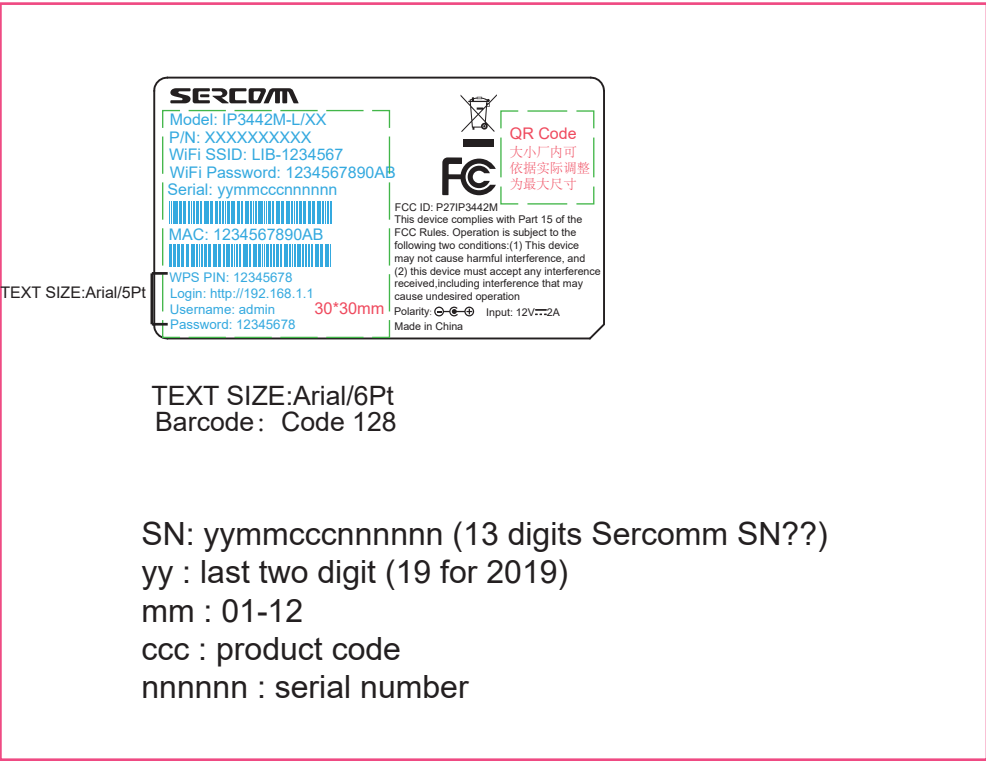


60.0

35.0

C2

depth 0.3mm

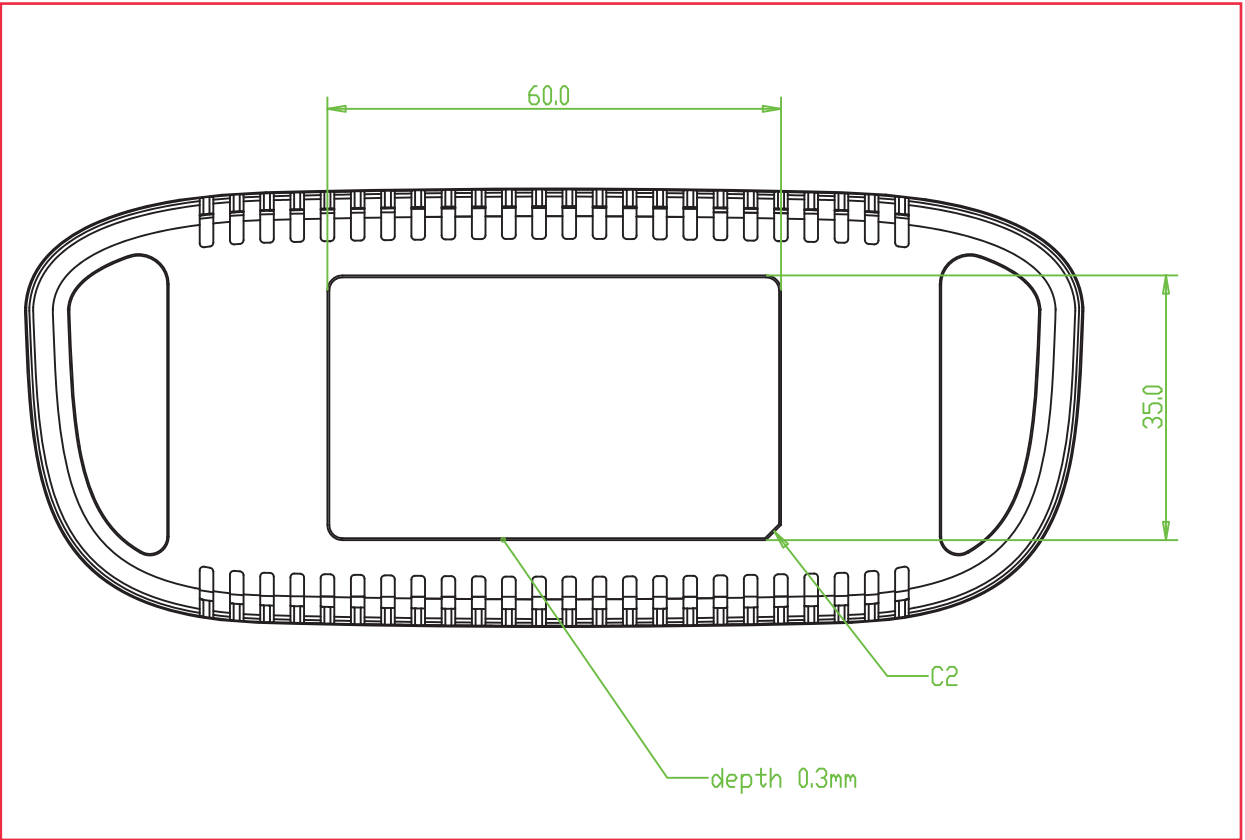

厂内列印示意，具体依实际需求为准
(The factory Print example)

Notes:


1. 材質：50#白色Mylar,
上打字用雾面PET

2. 背压花胶

3. 尺寸/印刷:如图

4. 公差:0. – 0.2mm

5. 本料件使用之材料須符合RoHS & UL
Wetting tension（表面张力）>=32dyne/cm

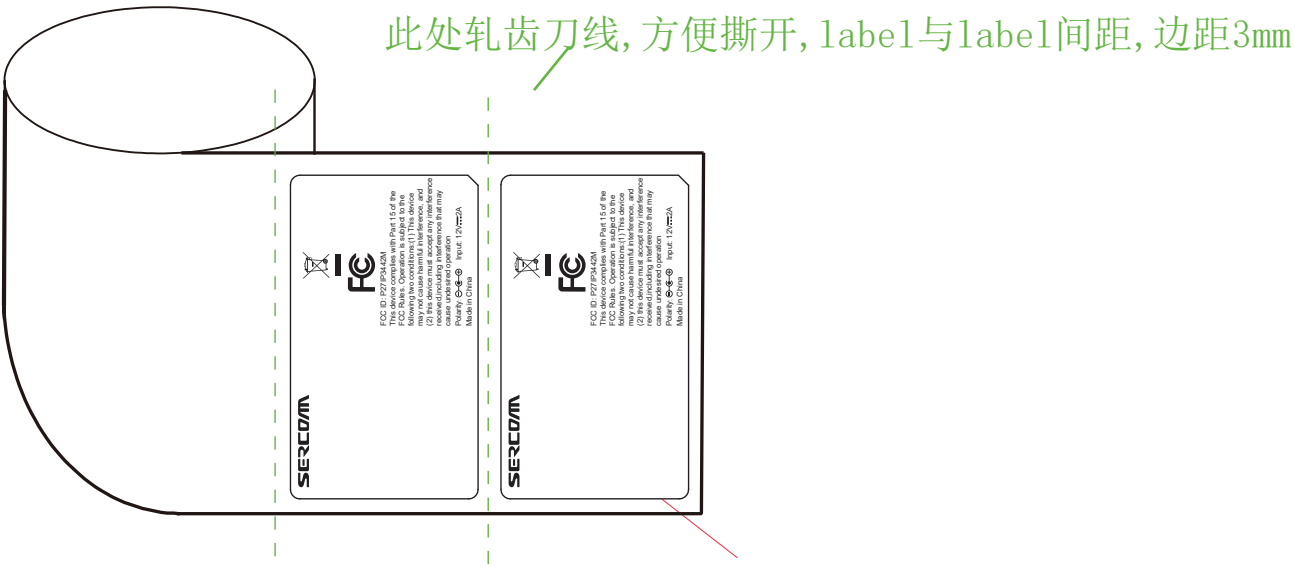

Notes:

1.MATERIAL: #50 white Mylar,
Can type with matt PET


2.ADHESIVE:Embossed Adhesive


3.SIZE:as drawing

4.PRINTING COLOR:as note


5.TOLERANCES :0,- 0.2mm

6.The material must comply with RoHS & UL
Wetting tension（表面张力）>=32dyne/cm

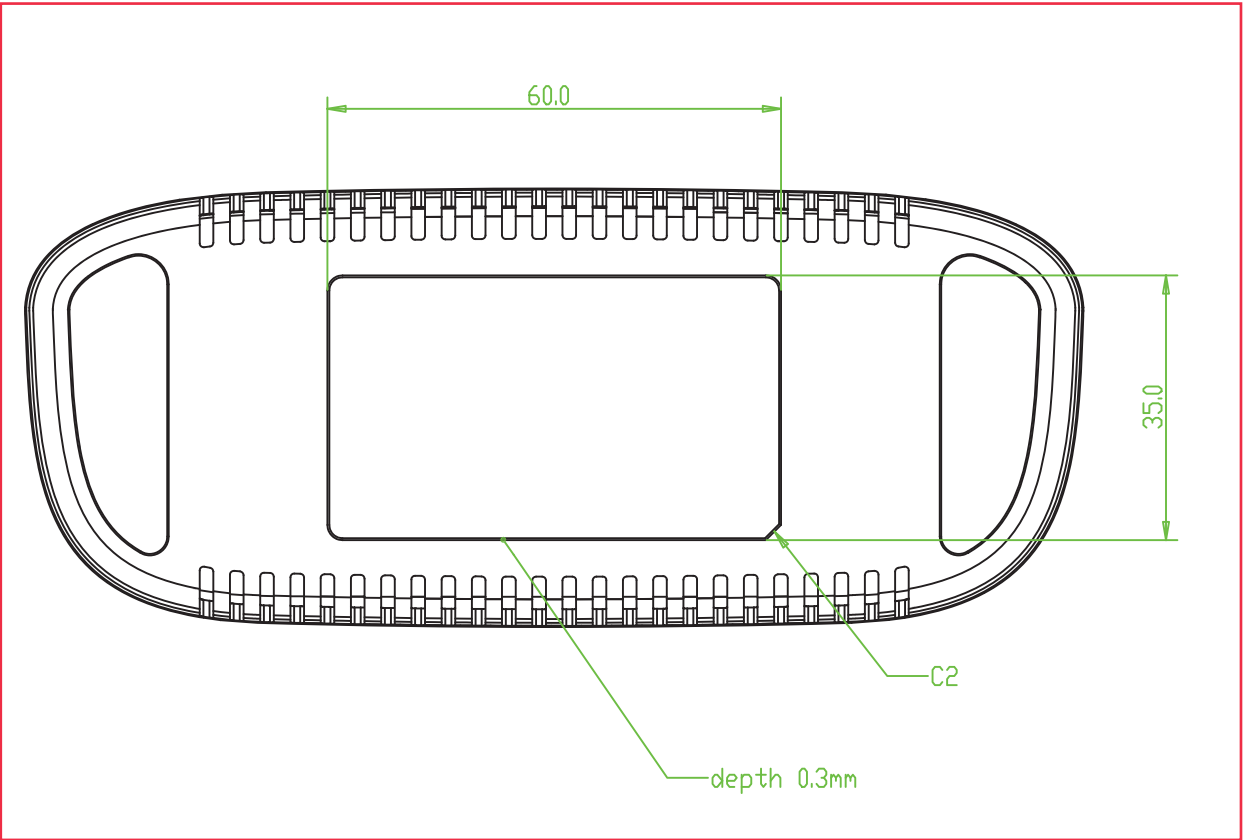

D	USED					DONOTSCALEDRAWING				
	MODEL	IP3442M-L/XX	NAME Product label/Liberty Latin America		SCALE	1 / 1				
	DSN	Judy Du	PART. No	932DFR01E5	SHEET	1 OF 1				
	CHK	Fanking Fan	MATERIAL	#50 white Mylar	Q' TY	1 PC	REV.	9		
	APV	Fanking Fan					REV. DATE			
	FILE									
					DIMIN		MM			
							2020.06.15			

Bottom

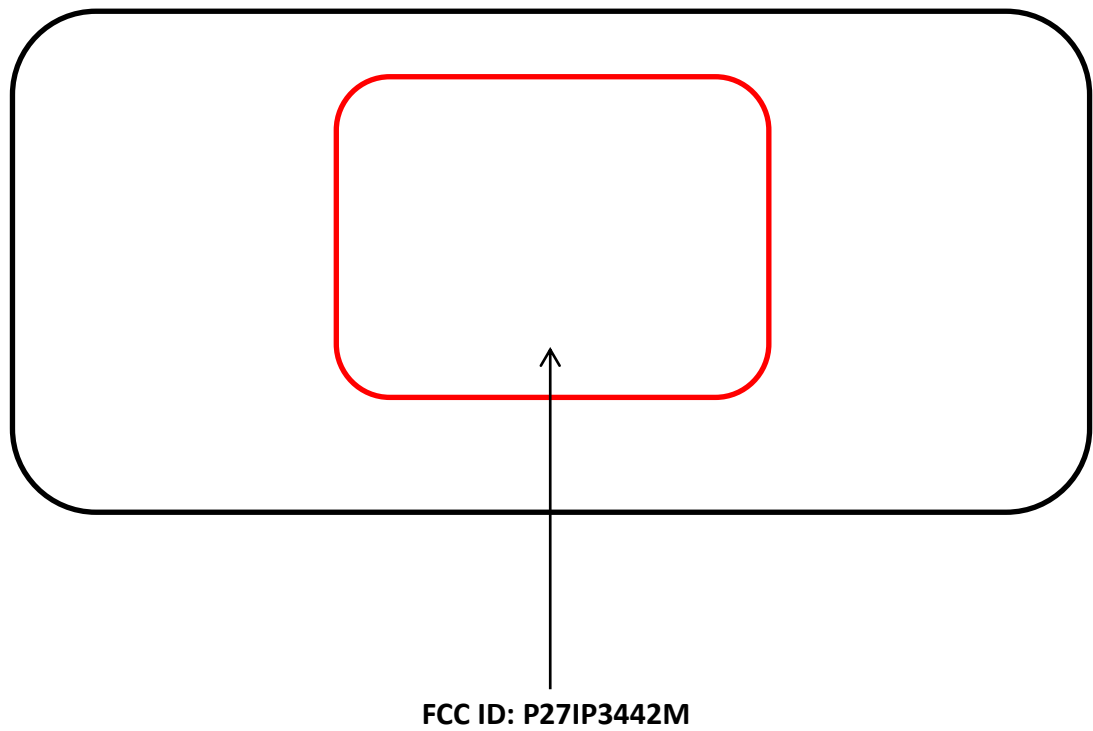

FCC ID: P27IP3442M