


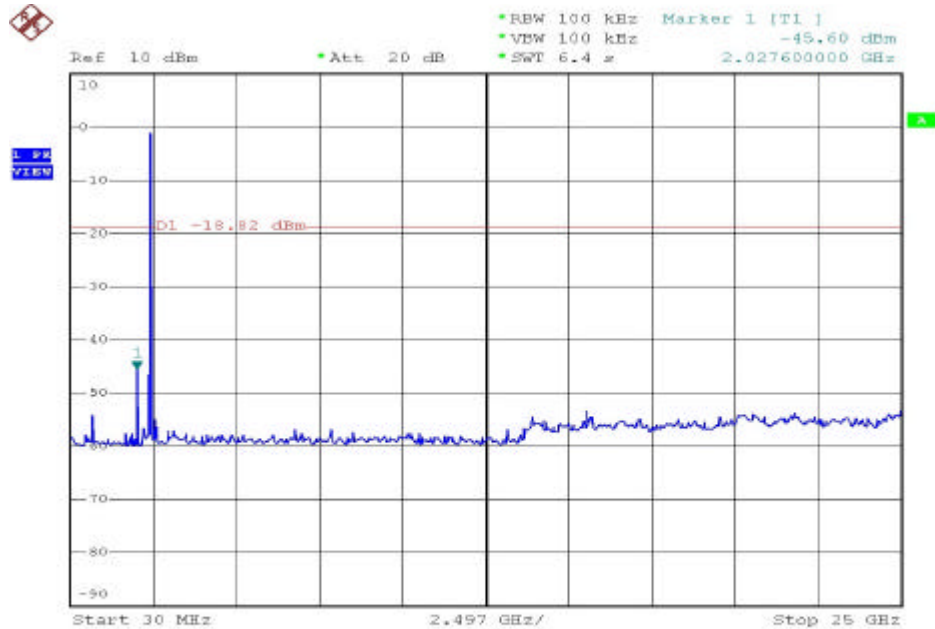
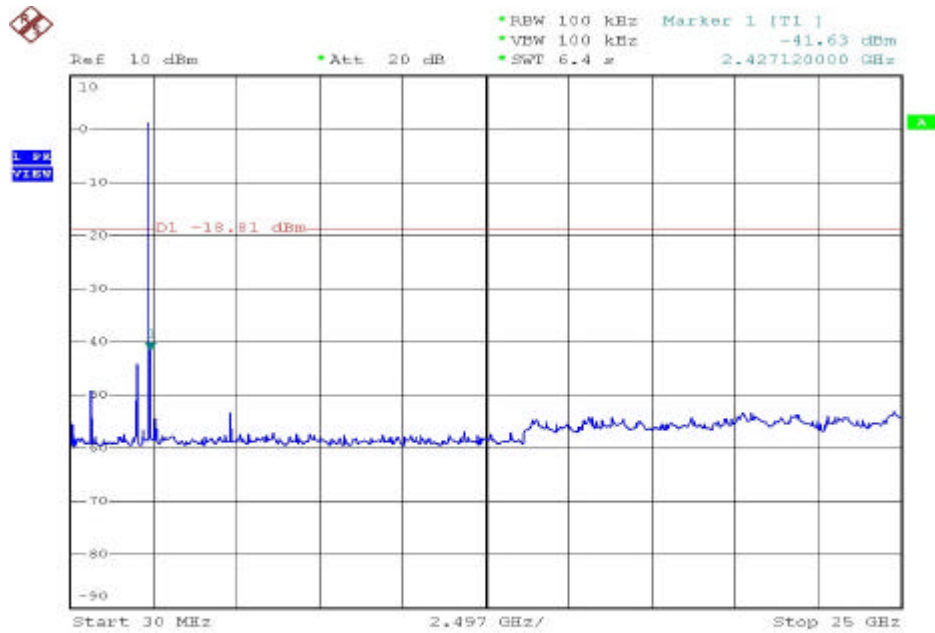
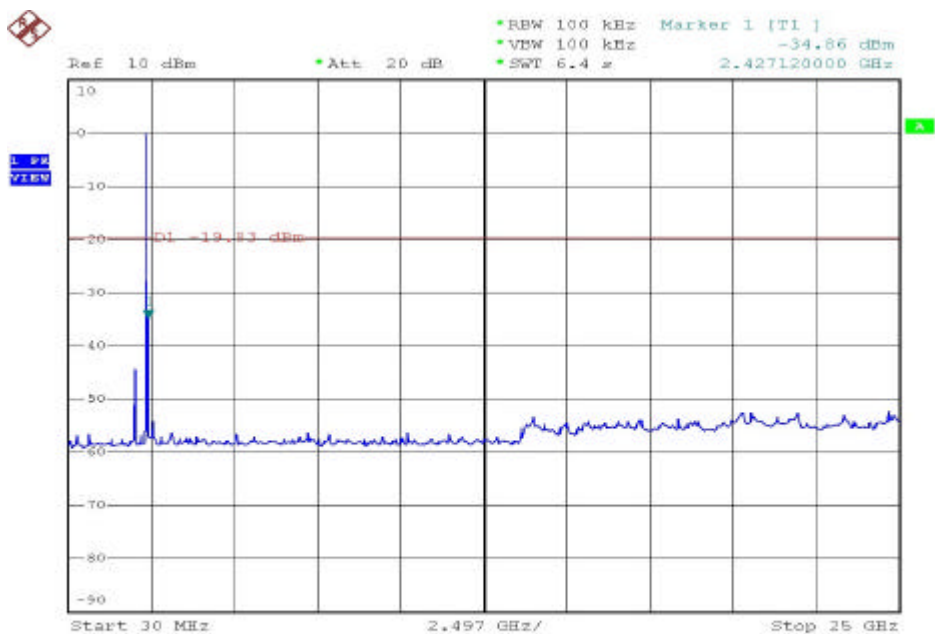


4.3. RF Portion

4.3.1. Test Result of Conducted Emission

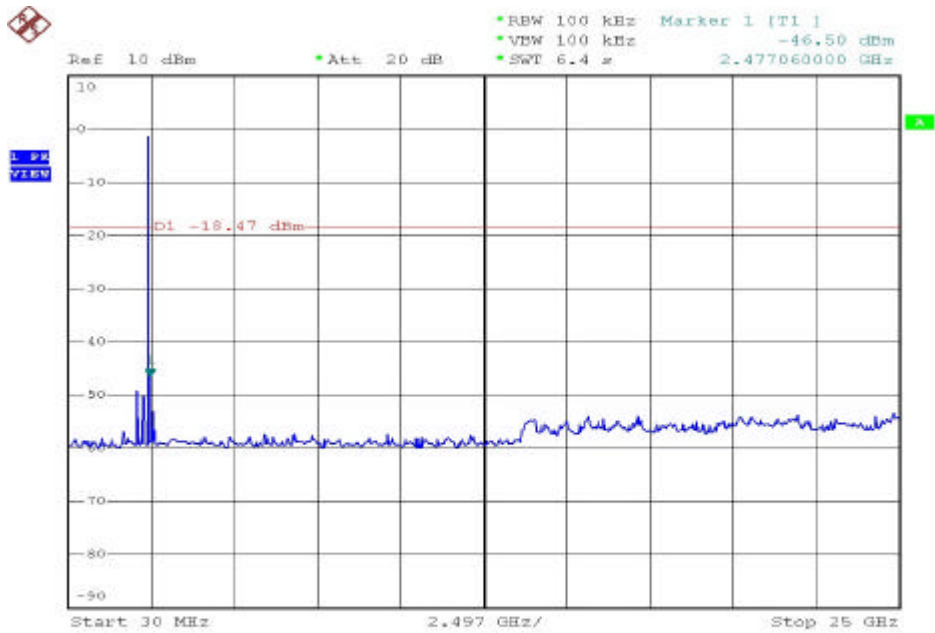

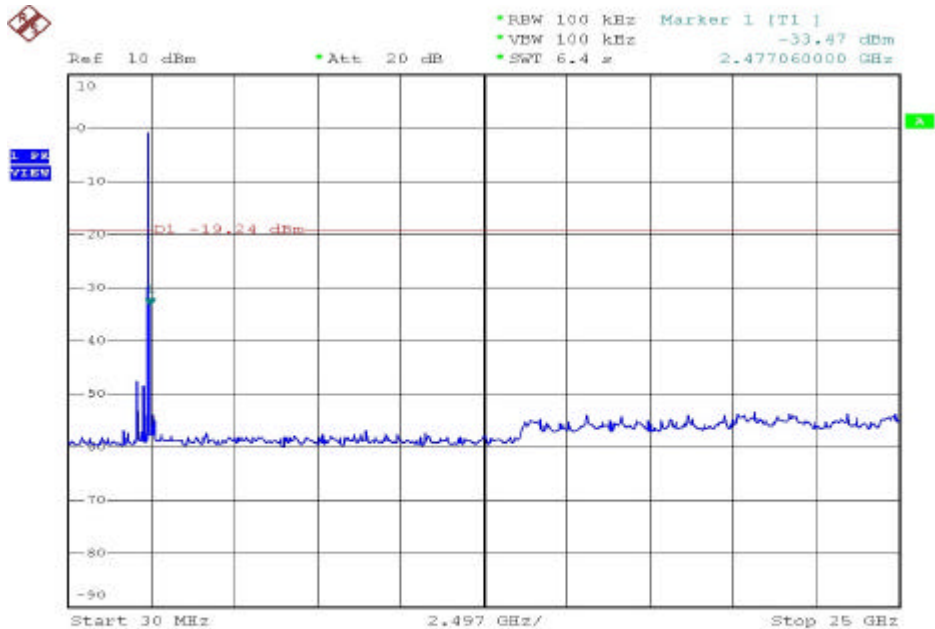

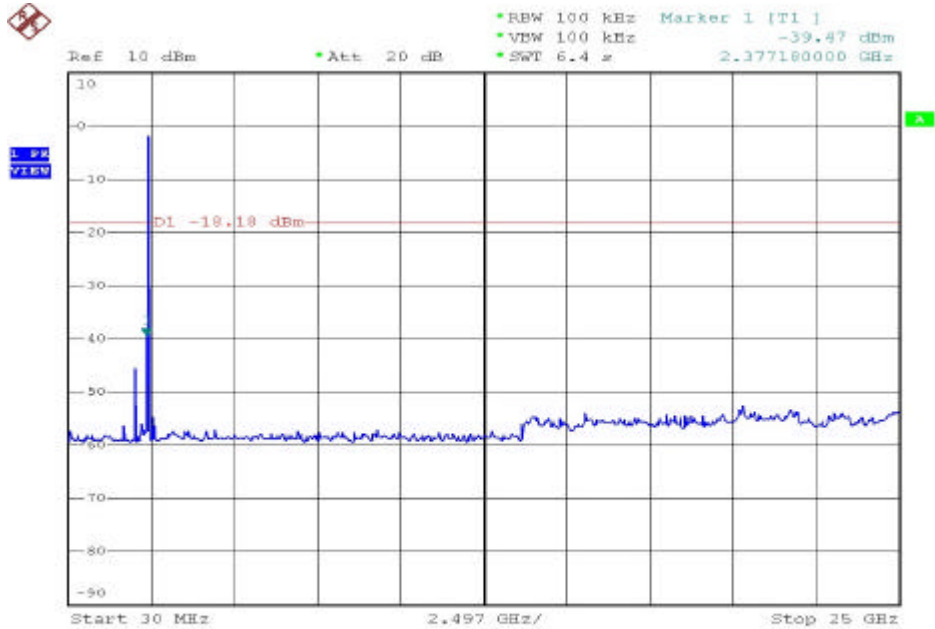

Modulation Standard: IEEE 802.11b Channel 1

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 26 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBUV)	Corrected Factor (dB)	Result@3m (dBUV/m)	Limit@3m (dBUV/m)	Margin (dB)	Table Deg.	Ant High (m)
315.18	H	53.71	-11.87	41.84	46.0	-4.16	180	1.0
439.34	H	49.55	-8.21	41.34	46.0	-4.66	180	1.5
39.70	V	49.99	-14.32	35.67	40.0	-4.33	230	1.5
189.08	V	55.78	-18.06	37.72	43.5	-5.78	180	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBUV)	Corrected Factor (dB)	Result@3m (dBUV/m)	Limit@3m (dBUV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
1061.6	H	63.98	-7.07	56.91	74	-17.09	Peak	230	1.0
1061.6	H	48.79	-7.07	41.72	54	-12.28	Ave	230	1.0
1187.6	H	58.69	-6.46	52.23	74	-21.77	Peak	190	1.5
1187.6	H	43.21	-6.46	36.75	54	-17.25	Ave	200	1.5
1061.6	V	67.97	-7.65	60.32	74	-13.68	Peak	236	1.0
1061.6	V	52.88	-7.65	45.23	54	-8.77	Ave	240	1.0
1187.6	V	64.17	-7.05	57.12	74	-16.88	Peak	280	1.5
1187.6	V	48.79	-7.05	41.74	54	-12.26	Ave	270	1.5
1310.8	V	56.42	-6.36	50.06	74	-23.94	Peak	180	1.0
1310.8	V	41.47	-6.36	35.11	54	-18.89	Ave	180	1.0
1688.8	V	56.31	-4.39	51.92	74	-22.08	Peak	230	1.5
1688.8	V	41.78	-4.39	37.39	54	-16.61	Ave	230	1.5
1814.8	V	56.89	-3.64	53.25	74	-20.75	Peak	190	1.5
1814.8	V	41.92	-3.64	38.28	54	-15.72	Ave	180	1.5
4824.2	V	58.43	6.49	64.92	74	-9.08	Peak	190	1.5
4824.2	V	43.22	6.49	49.71	54	-4.29	Ave	200	1.5

Modulation Standard: IEEE 802.11b Channel 6

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 26 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
315.18	H	53.26	-11.87	41.39	46.0	-4.61	200	1.0
439.34	H	49.01	-8.21	40.80	46.0	-5.20	180	1.5
39.70	V	49.56	-14.32	35.24	40.0	-4.76	220	1.5
189.08	V	55.38	-18.06	37.32	43.5	-6.18	180	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
1061.6	H	62.67	-7.07	55.60	74	-18.40	Peak	240	1.0
1061.6	H	47.12	-7.07	40.05	54	-13.95	Ave	230	1.0
1187.6	H	57.21	-6.46	50.75	74	-23.25	Peak	190	1.5
1187.6	H	41.87	-6.46	35.41	54	-18.59	Ave	190	1.5
1061.6	V	66.84	-7.65	59.19	74	-14.81	Peak	220	1.0
1061.6	V	51.26	-7.65	43.61	54	-10.39	Ave	230	1.0
1187.6	V	62.98	-7.05	55.93	74	-18.07	Peak	270	1.5
1187.6	V	47.67	-7.05	40.62	54	-13.38	Ave	280	1.5
4874.1	V	57.12	6.66	63.78	74	-10.22	Peak	190	1.5
4874.1	V	41.53	6.66	48.19	54	-5.81	Ave	190	1.5

Modulation Standard: IEEE 802.11b Channel 11

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 26 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
315.18	H	52.52	-11.87	40.65	46.0	-4.16	180	1.0
439.34	H	47.63	-8.21	39.42	46.0	-4.66	180	1.5
39.70	V	50.01	-14.32	35.69	40.0	-4.33	230	1.5
189.08	V	53.24	-18.06	35.18	43.5	-8.32	180	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
1061.6	H	61.23	-7.07	54.16	74	-19.84	220	1.0
1061.6	H	46.88	-7.07	39.81	54	-14.19	200	1.0
1061.6	V	65.77	-7.65	58.12	74	-15.88	243	1.0
1061.6	V	50.36	-7.65	42.71	54	-11.29	250	1.0
4924.2	V	56.43	6.82	63.25	74	-10.75	190	1.5
4924.2	V	41.53	6.82	48.35	54	-5.65	210	1.5

Modulation Standard: IEEE 802.11g Channel 1

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 24 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
39.70	V	48.72	-14.32	34.40	40	-5.60	200	1.5
188.52	V	55.21	-18.12	37.09	43.5	-6.41	190	1.0
316.24	H	53.25	-11.62	41.63	46.0	-4.37	270	1.5
439.34	H	49.42	-8.21	41.21	46.0	-4.79	180	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
1061.6	H	63.82	-7.07	56.75	74	-17.25	Peak	180	1.5
1061.6	H	49.04	-7.07	41.97	54	-12.03	Ave	180	1.5
1184.8	H	59.38	-6.46	52.92	74	-21.08	Peak	270	1.5
1184.8	H	44.62	-6.46	38.16	54	-15.84	Ave	270	1.5
1061.6	V	68.23	-7.65	60.58	74	-13.42	Peak	232	1.5
1061.6	V	53.20	-7.65	45.55	54	-8.45	Ave	230	1.5
1187.6	V	63.84	-6.96	56.88	74	-17.12	Peak	180	1.5
1187.6	V	48.90	-6.96	41.94	54	-12.06	Ave	190	1.5
1688.8	V	57.08	-4.39	52.69	74	-21.31	Peak	180	1.5
1688.8	V	42.16	-4.39	37.77	54	-16.23	Ave	192	1.5
1812.0	V	56.39	-3.64	52.75	74	-21.25	Peak	270	1.5
1812.0	V	41.92	-3.64	38.28	54	-15.72	Ave	282	1.5
4076.0	V	53.87	4.91	58.78	74	-15.22	Peak	270	1.5
4076.0	V	38.96	4.91	43.87	54	-10.13	Ave	276	1.5
4824.8	V	55.50	6.49	61.99	74	-12.01	Peak	192	1.0
4824.8	V	40.62	6.49	47.11	54	-6.89	Ave	200	1.0

Modulation Standard: IEEE 802.11g Channel 6

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 24 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
39.70	V	48.80	-14.32	34.48	40	-5.52	210	1.5
188.52	V	55.13	-18.12	37.01	43.5	-6.49	196	1.0
316.24	H	52.75	-11.62	41.13	46.0	-4.87	282	1.5
439.34	H	49.52	-8.21	41.31	46.0	-4.69	205	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
1061.6	H	61.45	-7.07	54.38	74	-19.62	Peak	186	1.5
1061.6	H	46.45	-7.07	39.38	54	-14.62	Ave	190	1.5
1061.6	V	66.89	-7.57	59.32	74	-14.68	Peak	232	1.5
1061.6	V	51.63	-7.57	44.06	54	-9.44	Ave	230	1.5
1187.6	V	61.31	-6.96	54.35	74	-19.65	Peak	162	1.5
1187.6	V	46.13	-6.96	39.17	54	-14.83	Ave	170	1.5
4136.0	V	51.53	4.97	56.50	74	-17.50	Peak	275	1.5
4136.0	V	36.86	4.97	41.83	54	-12.17	Ave	280	1.5
4874.6	V	54.01	6.66	60.67	74	-13.33	Peak	200	1.0
4874.6	V	39.72	6.66	46.38	54	-7.62	Ave	210	1.0

Modulation Standard: IEEE 802.11g Channel 11

a) Emission frequencies below 1 GHz

Test Date: Jul, 09, 2004 Temperature: 24 Humidity: 58%

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Table Deg.	Ant High (m)
39.70	V	48.70	-14.32	34.38	40	-5.62	210	1.5
188.52	V	55.26	-18.12	37.14	43.5	-6.36	202	1.0
316.24	H	53.20	-11.62	41.58	46.0	-4.42	290	1.5
439.34	H	49.51	-8.21	41.30	46.0	-4.70	180	1.5

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz


Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
1061.6	H	60.68	-7.07	53.61	74	-20.39	Peak	190	1.5
1061.6	H	45.92	-7.07	38.85	54	-15.15	Ave	190	1.5
1061.6	V	66.11	-7.57	58.53	74	-15.47	Peak	232	1.5
1061.6	V	50.86	-7.57	43.29	54	-10.71	Ave	230	1.5
1187.6	V	61.44	-6.96	54.48	74	-19.52	Peak	180	1.5
1187.6	V	46.21	-6.96	39.25	54	-14.75	Ave	190	1.5
4196.0	V	51.59	5.05	56.64	74	-17.36	Peak	265	1.5
4196.0	V	36.72	5.05	41.77	54	-12.23	Ave	270	1.5
4924.6	V	53.27	6.77	60.04	74	-13.96	Peak	192	1.0
4924.6	V	38.27	6.77	45.04	54	-8.96	Ave	200	1.0

4.3.3. Photographs of Radiated Emission Test

FRONT VIEW



REAR VIEW

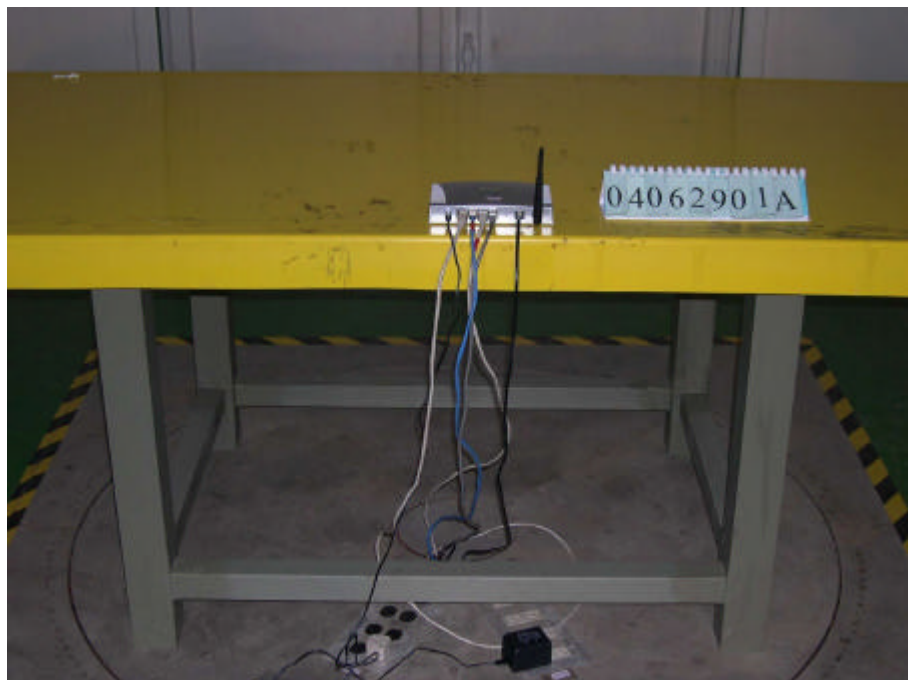

4.4. 6dB Bandwidth Measurement Data

(1) Modulation Standard: IEEE 802.11b



Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%



- a) Channel 01: 6dB Emission Bandwidth is 12.3 MHz
- b) Channel 06: 6dB Emission Bandwidth is 12.7 MHz
- c) Channel 11: 6dB Emission Bandwidth is 12.3 MHz



(2) Modulation Standard: IEEE 802.11g

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

- a) Channel 01: 6dB Emission Bandwidth is 16.5 MHz
- b) Channel 06: 6dB Emission Bandwidth is 16.5 MHz
- c) Channel 11: 6dB Emission Bandwidth is 16.5 MHz

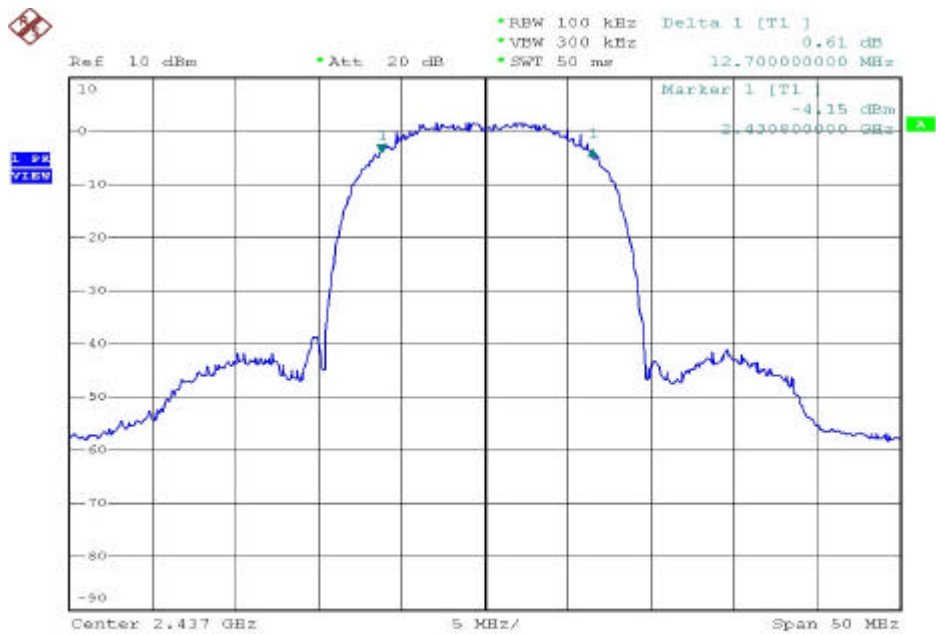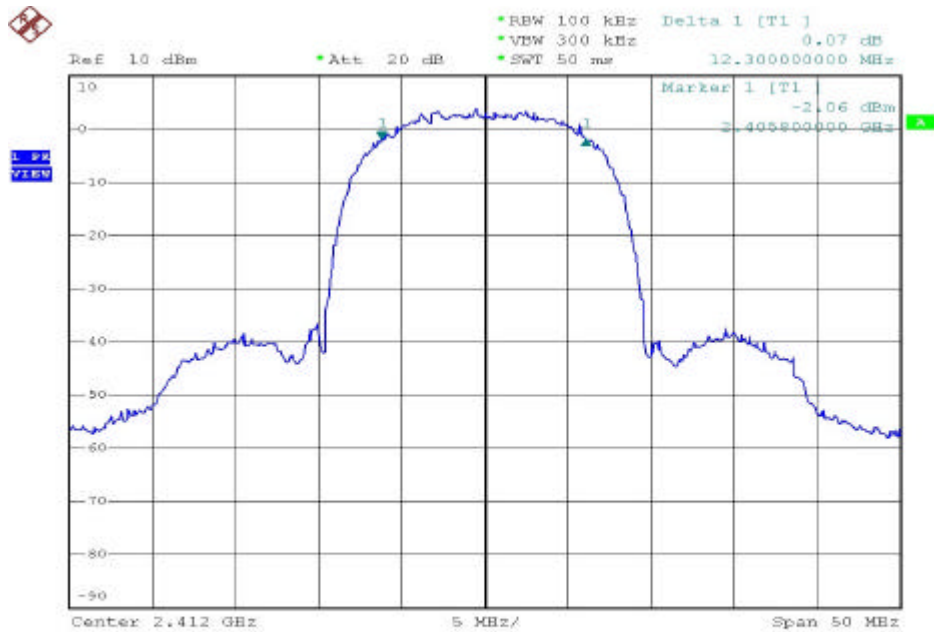

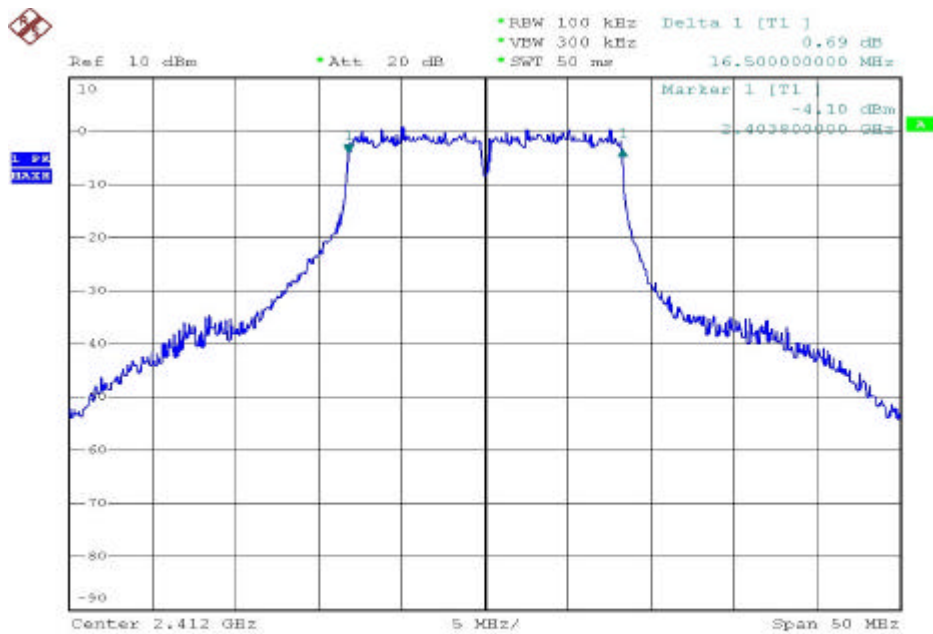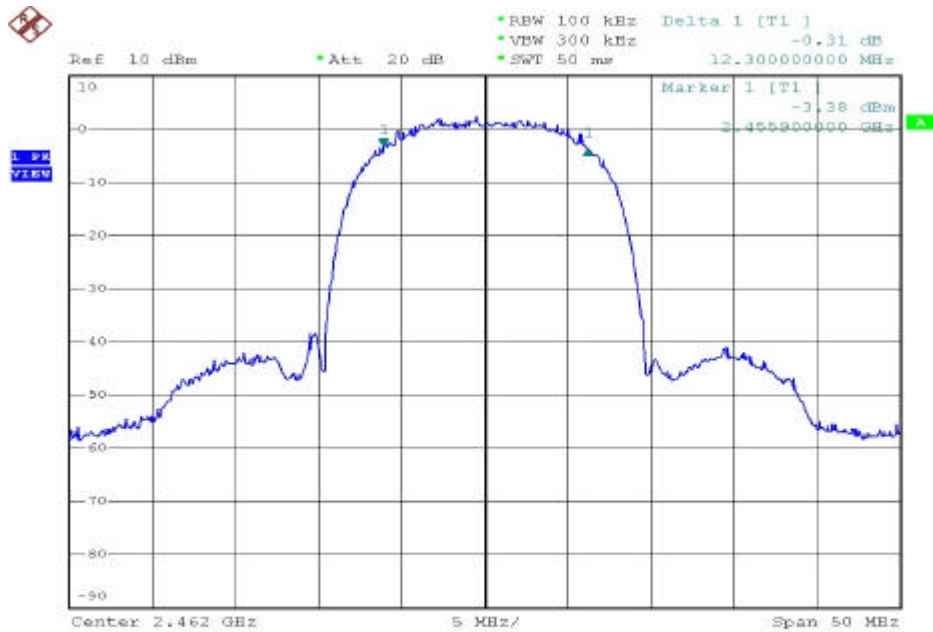

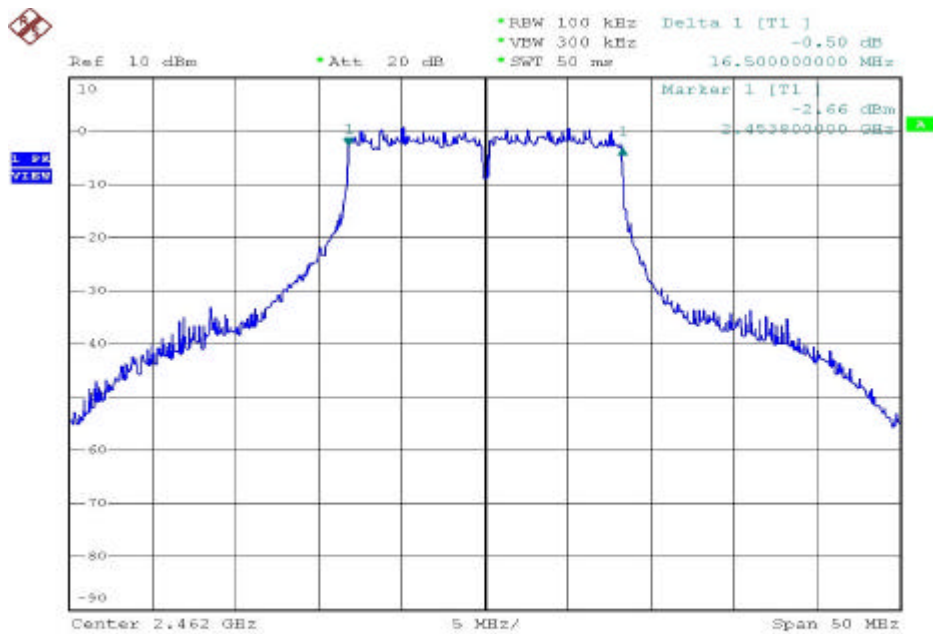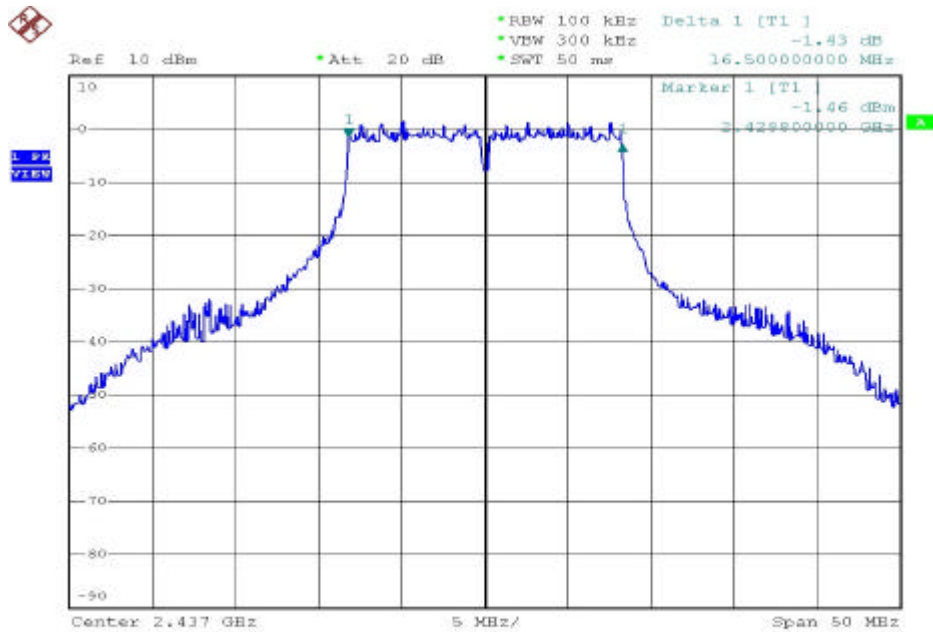

4.5. Peak Output Power Measurement Data

(1) Modulation Standard: IEEE 802.11b

Test Date: Jul. 09. 2004 Temperature: 24 Humidity: 58%



- a) Channel 01: Output Peak Power is 20.35dBm or 108.393mW
- b) Channel 06: Output Peak Power is 19.06dBm or 80.538mW
- c) Channel 11: Output Peak Power is 17.13dBm or 51.642mW



(2) Modulation Standard: IEEE 802.11g



Test Date: Jul. 09. 2004 Temperature: 24 Humidity: 58%

- a) Channel 01: Output Peak Power is 16.51dBm or 44.763mW
- b) Channel 06: Output Peak Power is 16.81dBm or 47.981mW
- c) Channel 11: Output Peak Power is 16.88dBm or 48.705mW

Note: Conducted Power = Reading Value + Cable Loss

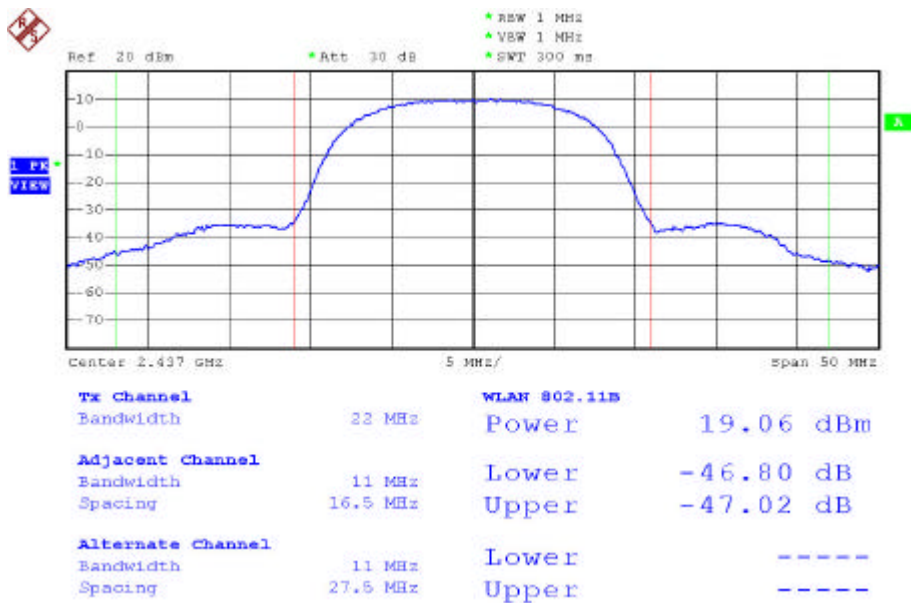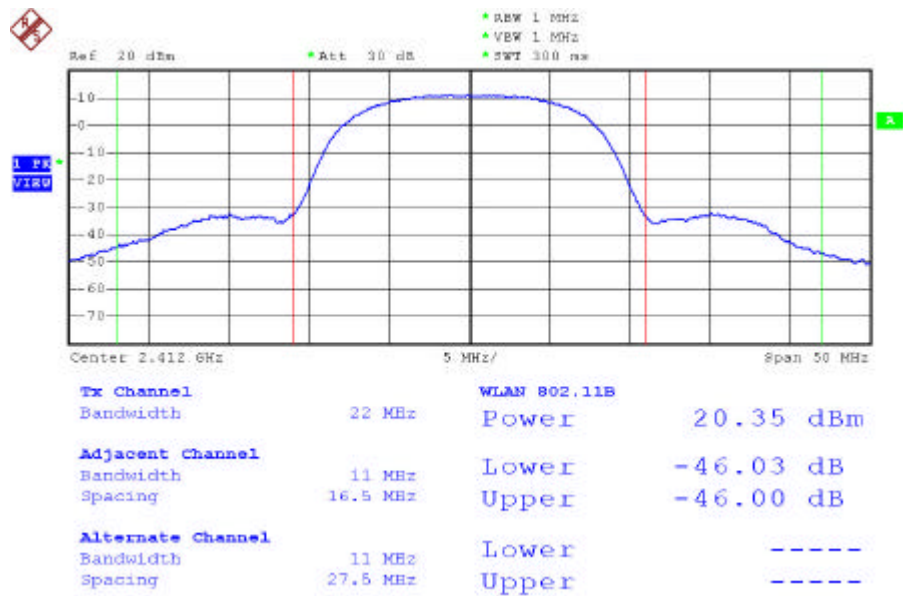

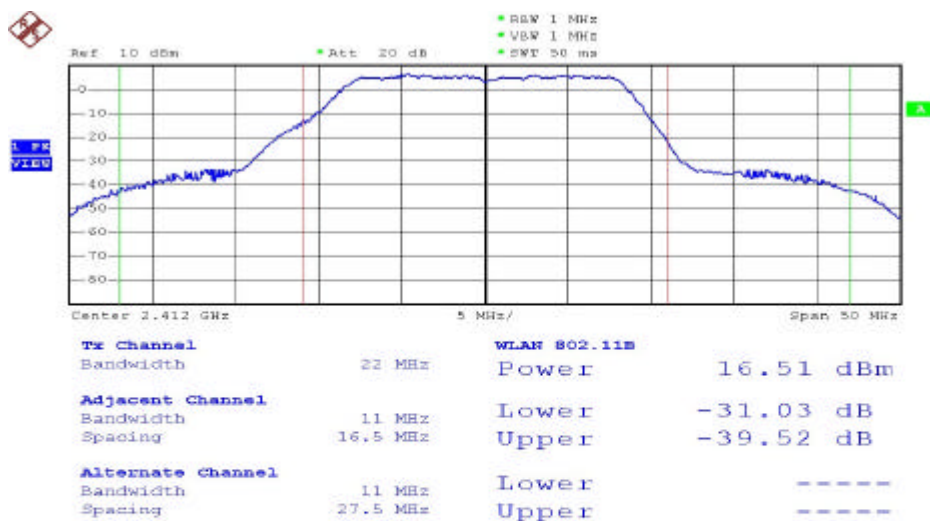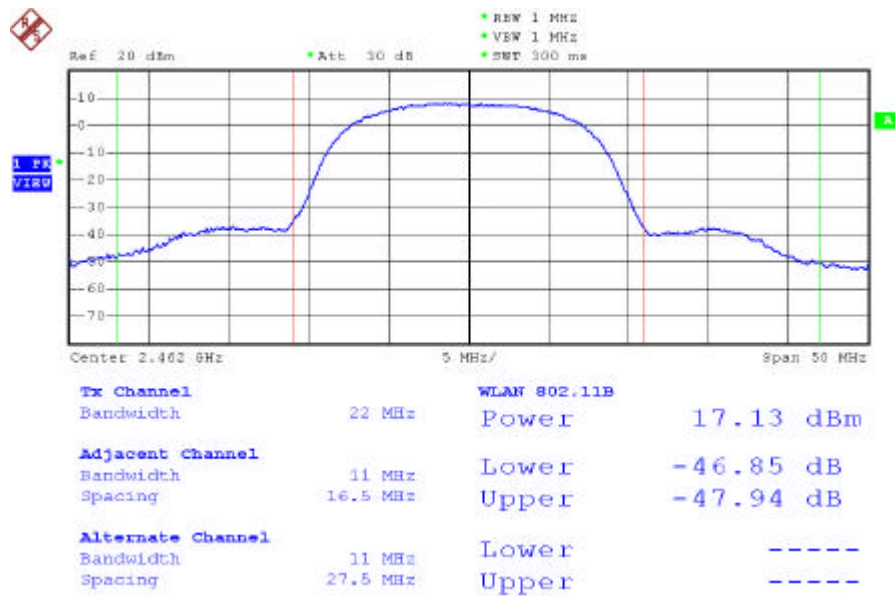

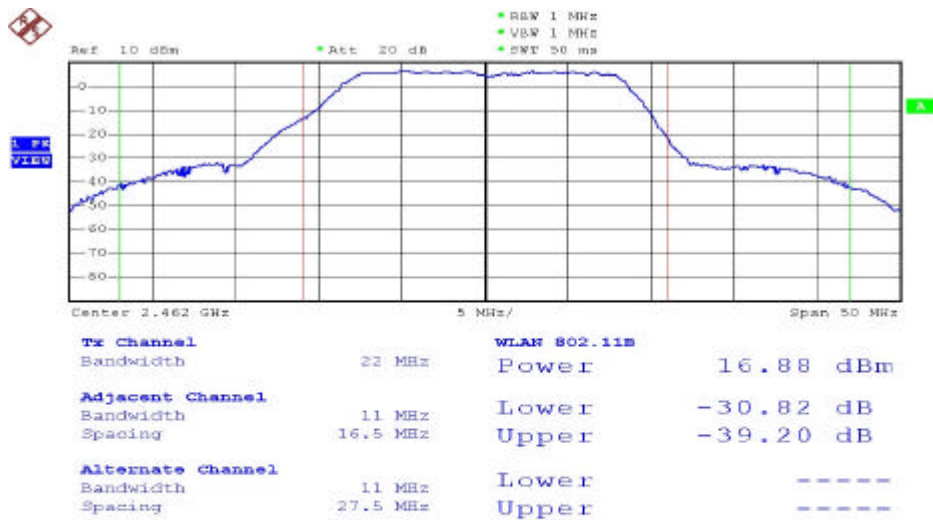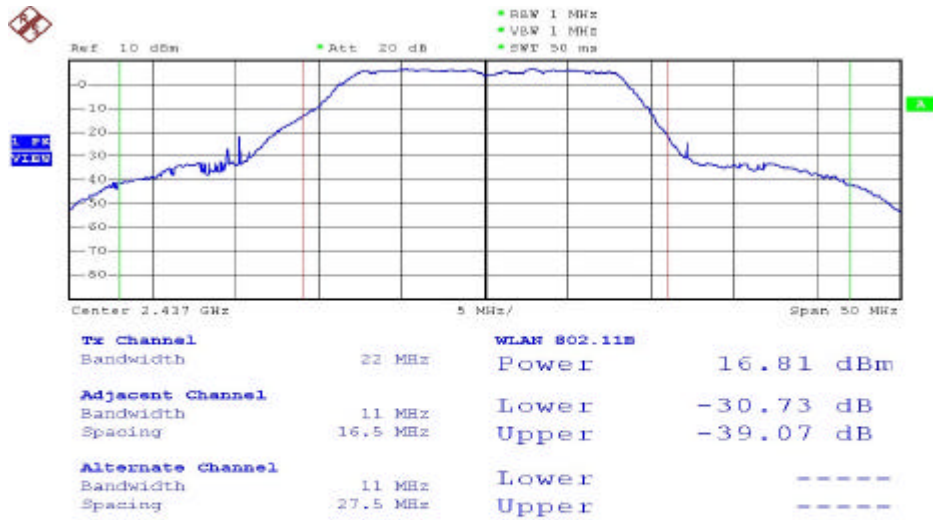

4.6. Band Edges Measurement Data

(1) Modulation Standard: IEEE 802.11b



Test Date: Jul. 09. 2004 Temperature: 24 Humidity: 58%



- a) Lower Band Edge: maximum value is -21.60dBm that is attenuated more than 20dB
- b) Upper Band Edge: maximum value is -23.11dBm that is attenuated more than 20dB



(2) Modulation Standard: IEEE 802.11g



Test Date: Jul. 09. 2004 Temperature: 24 Humidity: 58%



- a) Lower Band Edge: maximum value is -32.75dBm that is attenuated more than 20dB
- b) Upper Band Edge: maximum value is -31.28dBm that is attenuated more than 20dB

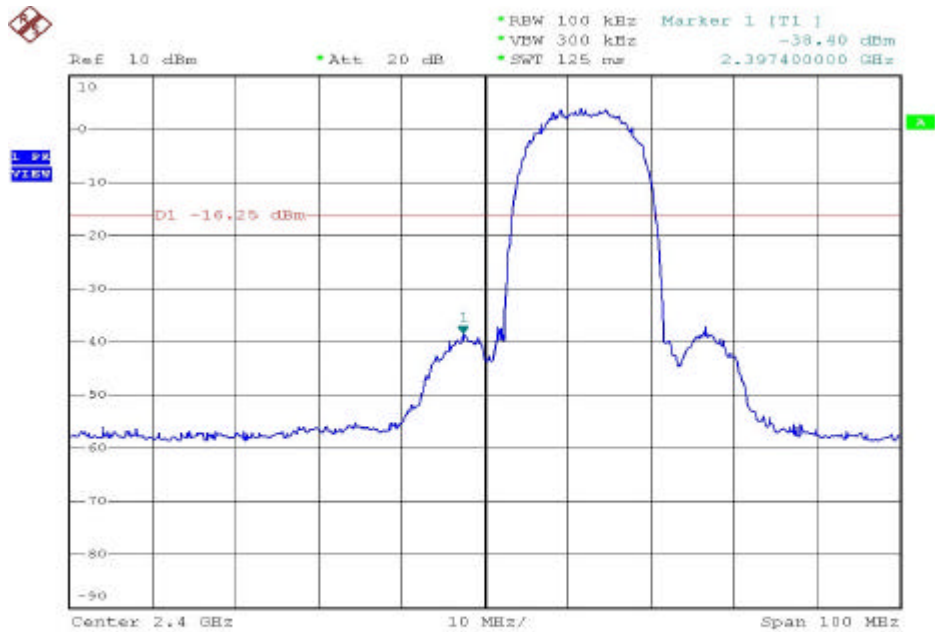
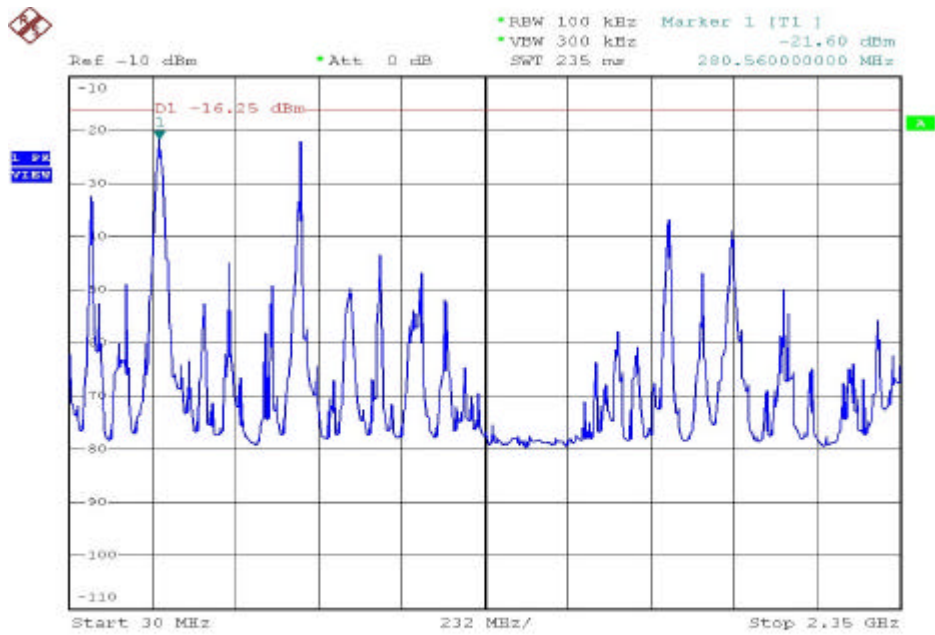


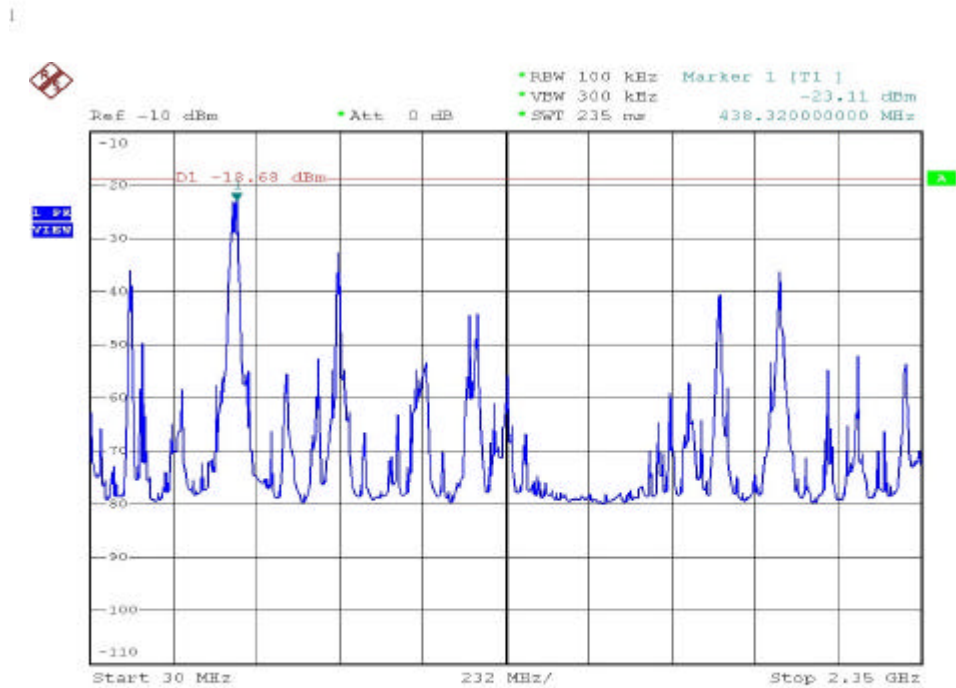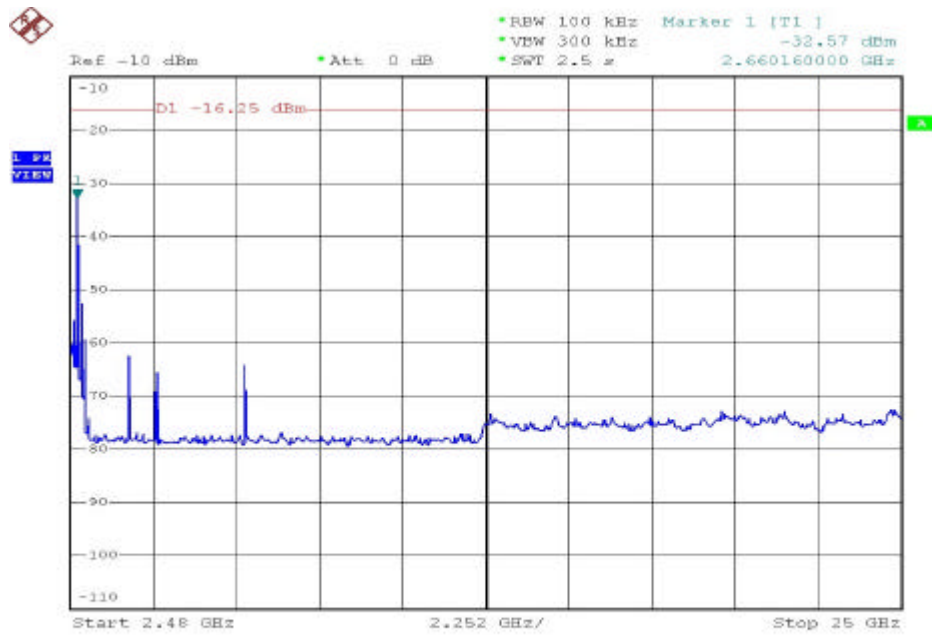

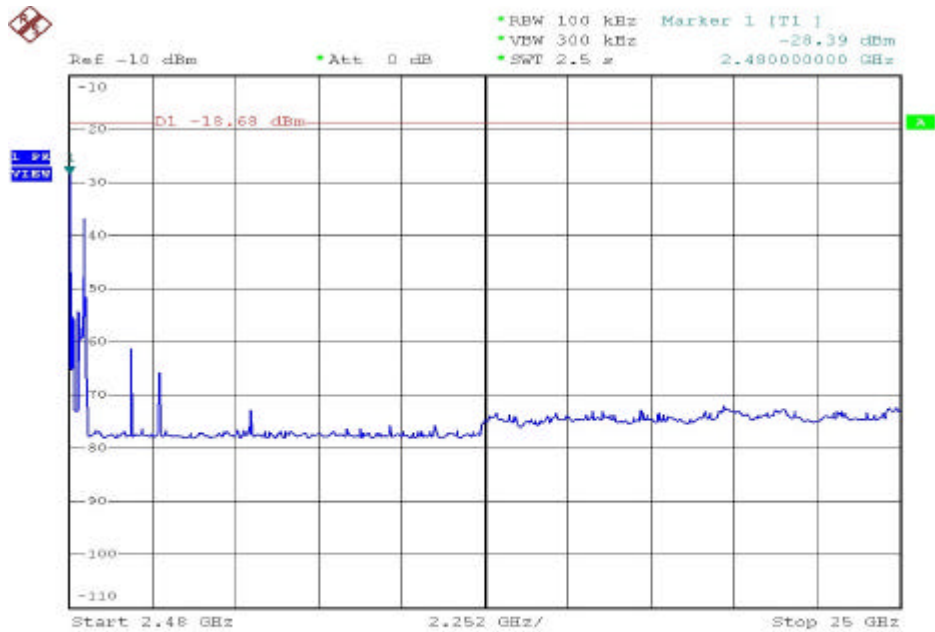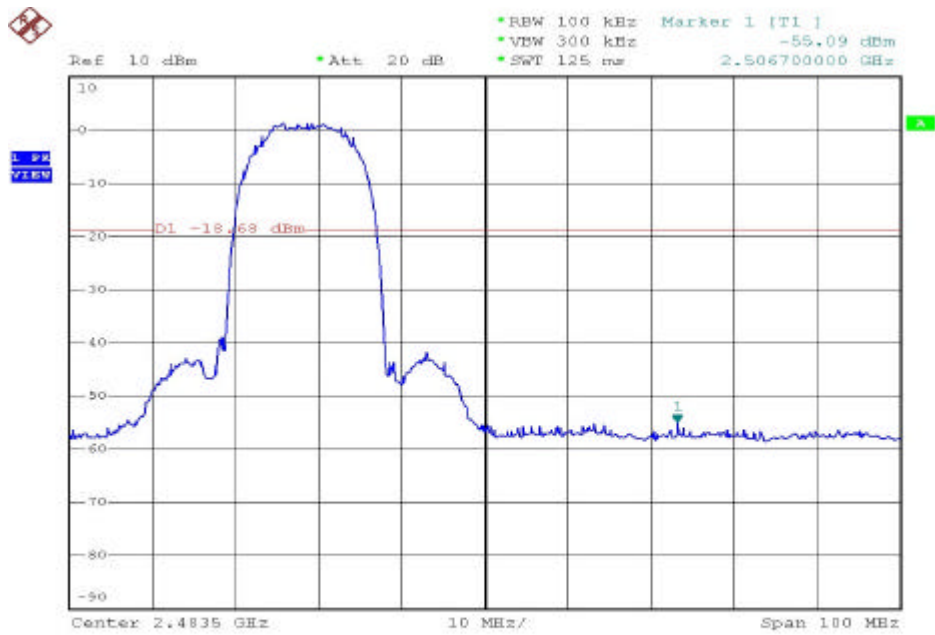

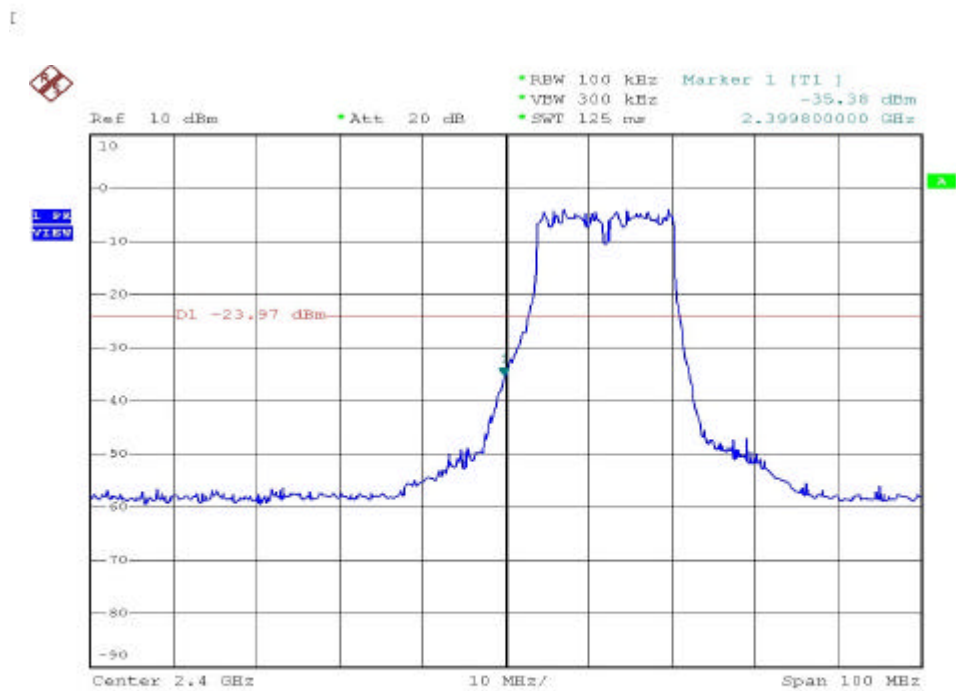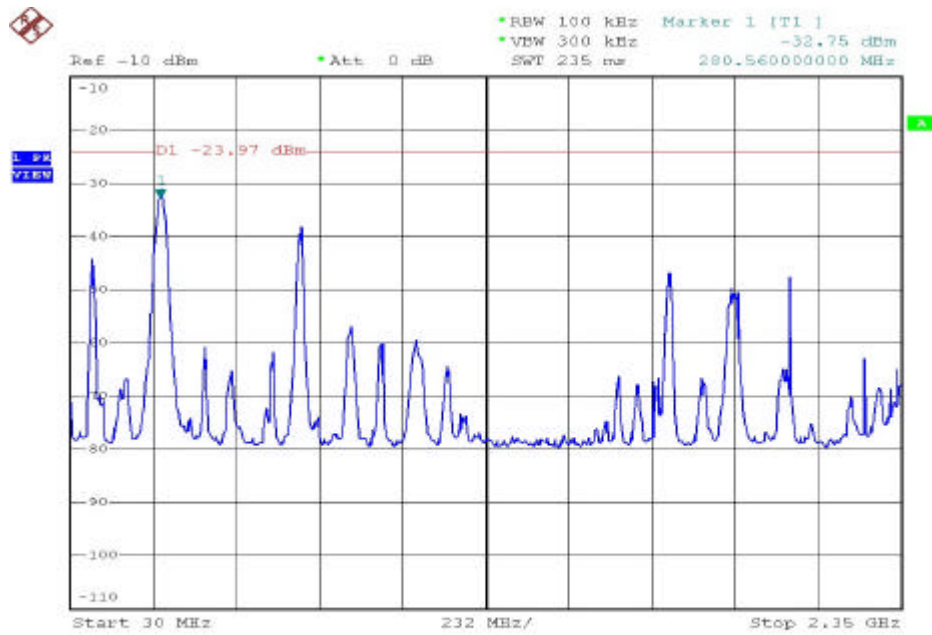

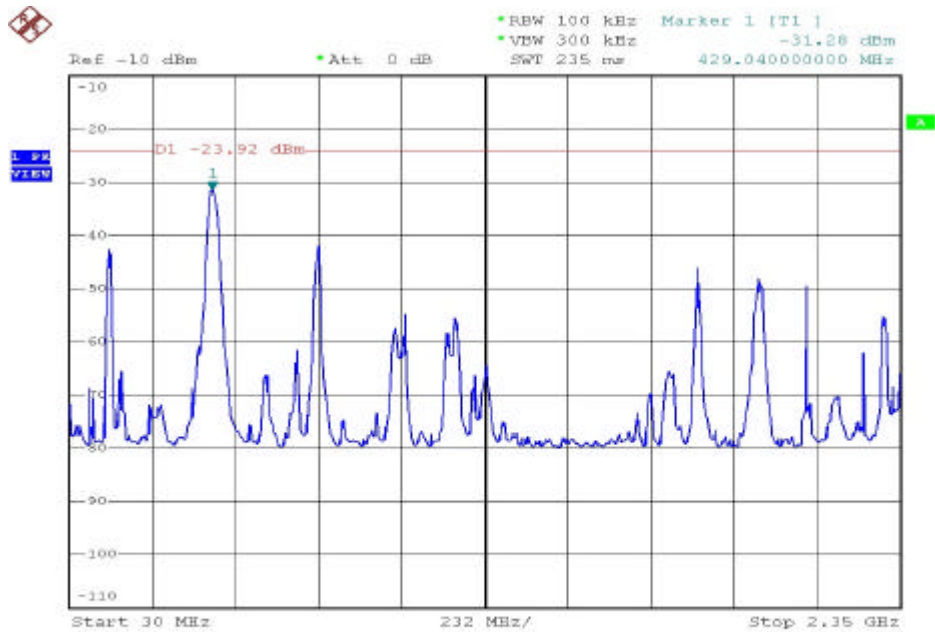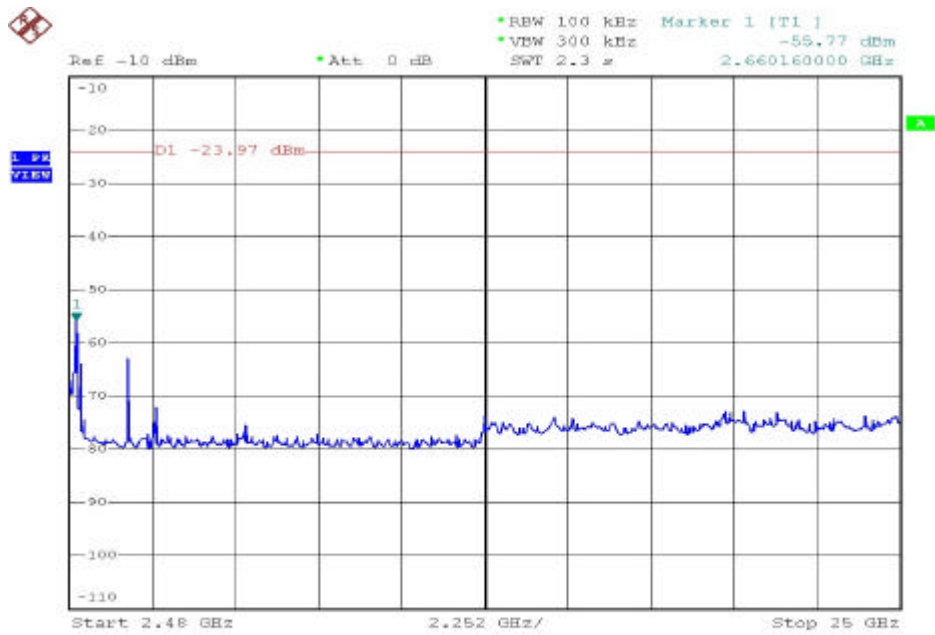

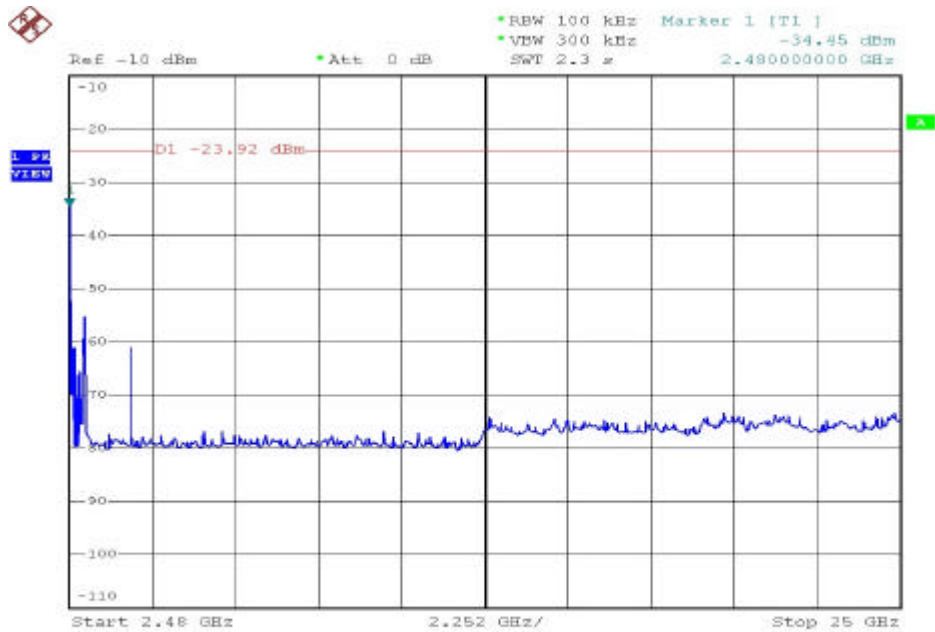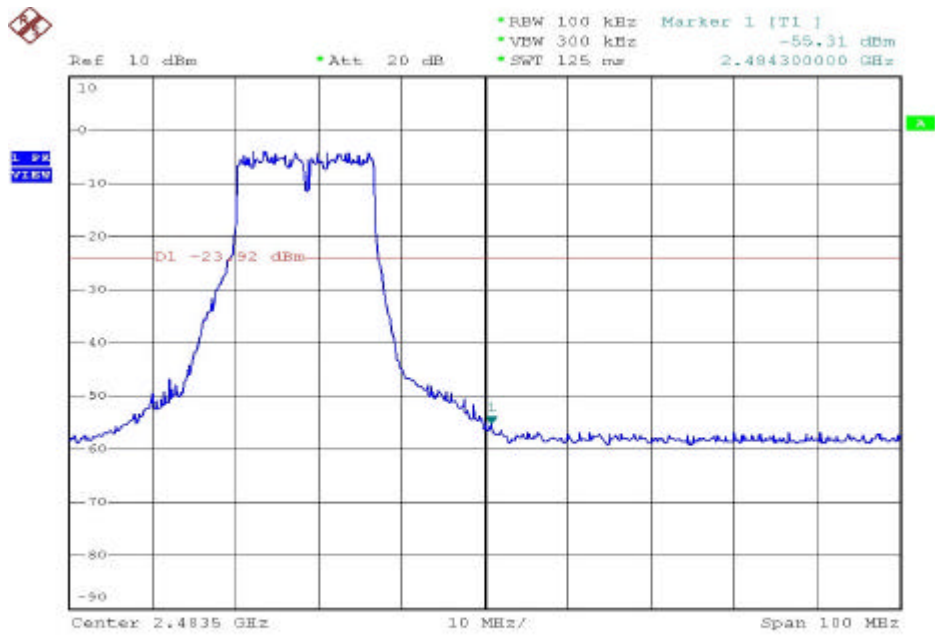

4.6.1. Note on Band edge Emission

Modulation Standard: IEEE 802.11b

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Level (dBuV)	polarization	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant High (m)
				Peak	Ave.			
2389.968	---	H	Peak	74	54	---	---	---
2389.968	32.90	H	Ave	74	54	-21.10	232	1.5
2389.968	---	V	Peak	74	54	---	---	---
2389.968	38.49	V	Ave	74	54	-15.51	190	1.5

b) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Level (dBuV)	polarization	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant High (m)
				Peak	Ave.			
2499.088	---	H	Peak	74	54	---	---	---
2499.088	40.23	H	Ave	74	54	-13.77	270	1.5
2496.200	---	V	Peak	74	54	---	---	---
2496.200	44.27	V	Ave	74	54	-9.73	250	1.5

4.6.2. Modulation Standard: IEEE 802.11g

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

c) Channel 1

Fundamental Frequency: 2412 MHz



Frequency (MHz)	Level (dBuV)	polarization	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant High (m)
				Peak	Ave.			
2389.968	---	H	Peak	74	54	---	---	---
2389.968	39.70	H	Ave	74	54	-14.3	180	1.5
2389.968	---	V	Peak	74	54	---	---	---
2389.968	44.87	V	Ave	74	54	-9.13	130	1.0

d) Channel 11

Fundamental Frequency: 2462 MHz



Frequency (MHz)	Level (dBuV)	polarization	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant High (m)
				Peak	Ave.			
2499.164	---	H	Peak	74	54	---	---	---
3499.640	40.32	H	Ave	74	54	-13.68	270	1.0
2483.584	---	V	Peak	74	54	---	---	---
2483.584	43.89	V	Ave	74	54	-10.11	250	1.5

Modulation Standard: IEEE 802.11b
Pol/Phase: Horizontal

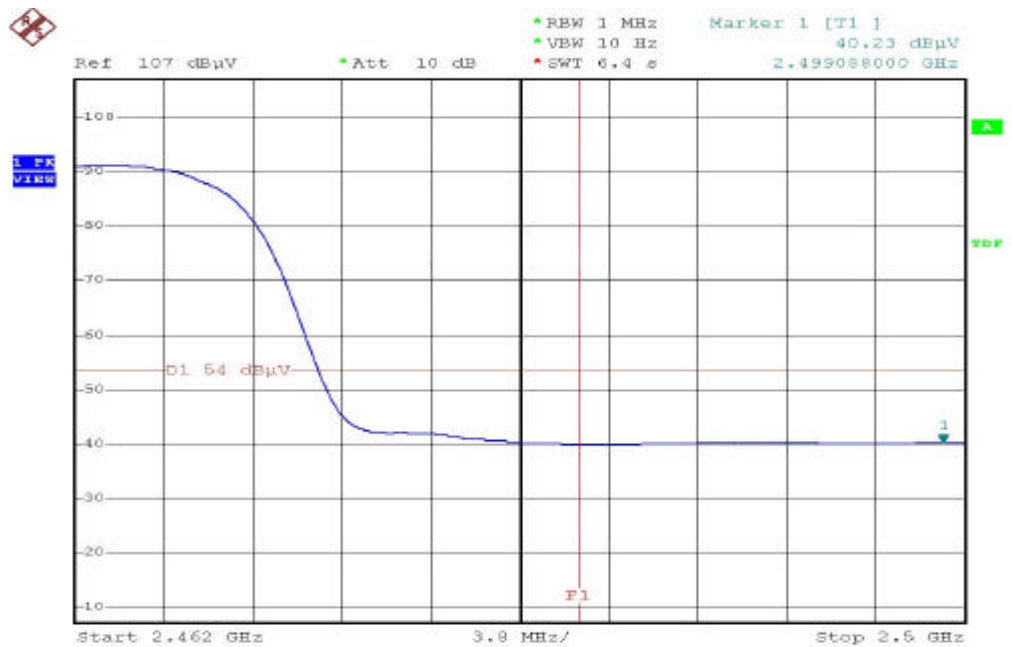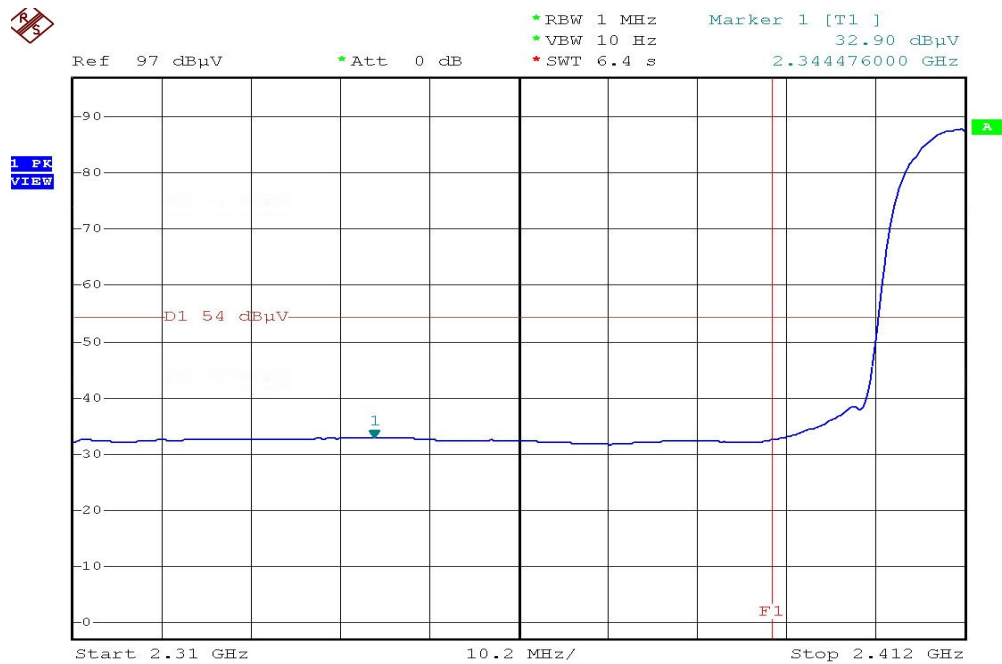



Modulation Standard: IEEE 802.11b

Pol/Phase: Vertical

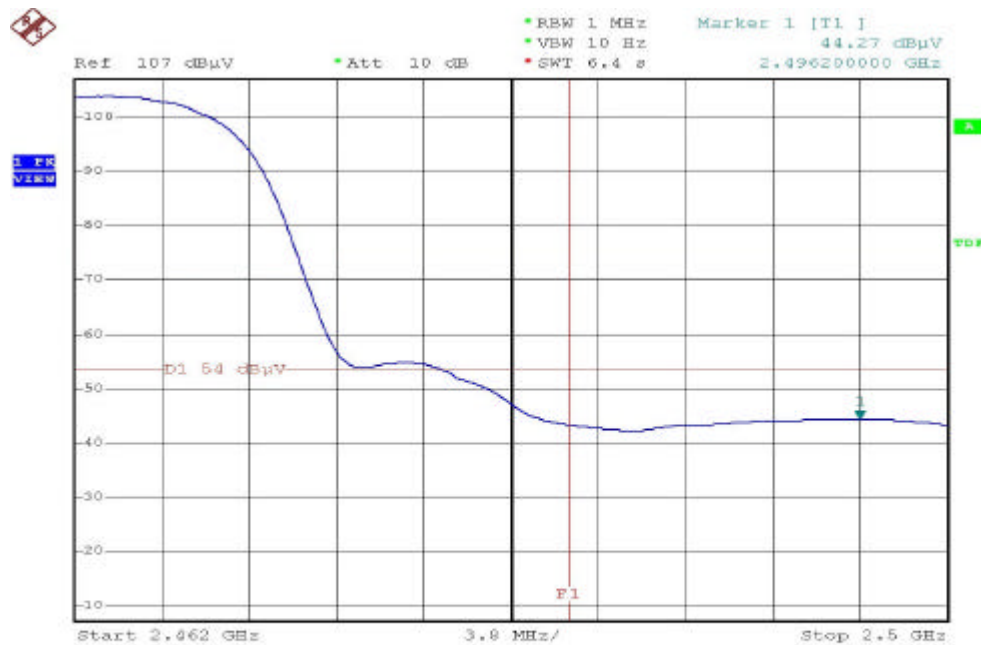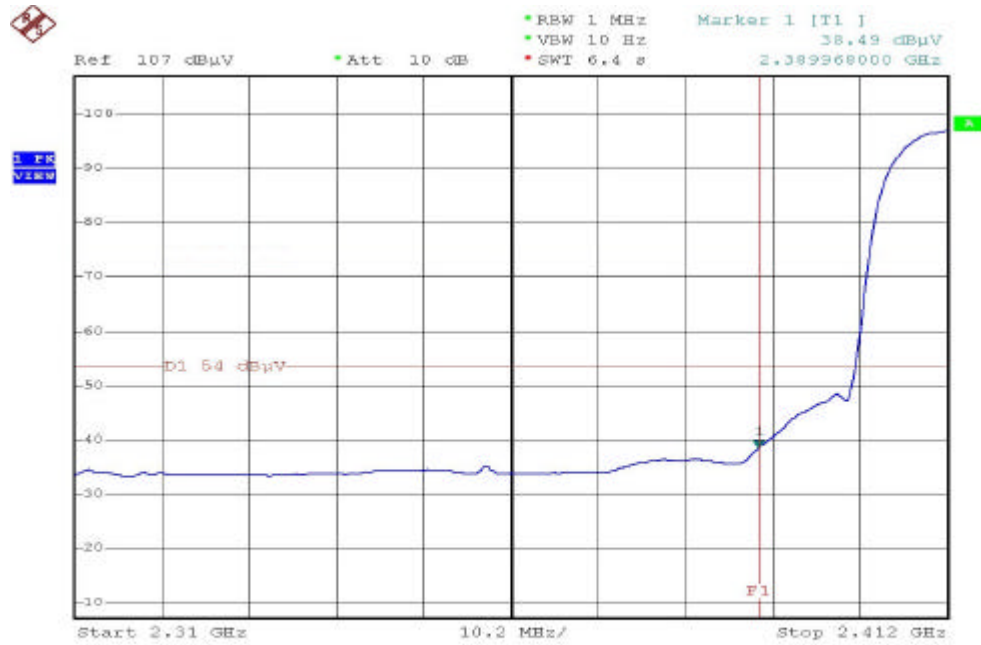



Modulation Standard: IEEE 802.11g

Pol/Phase: Horizontal

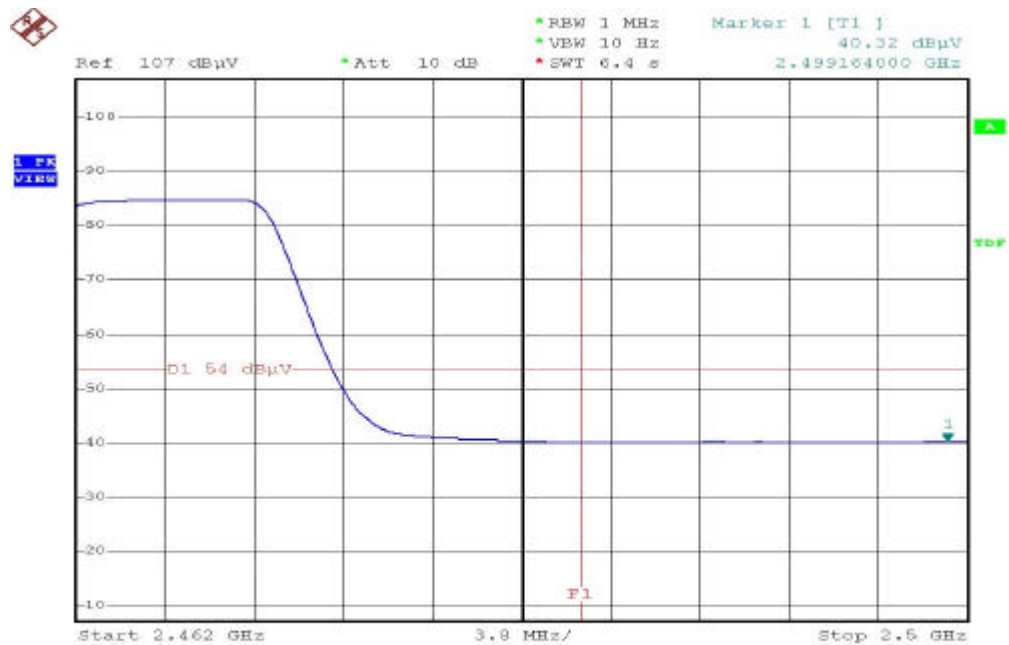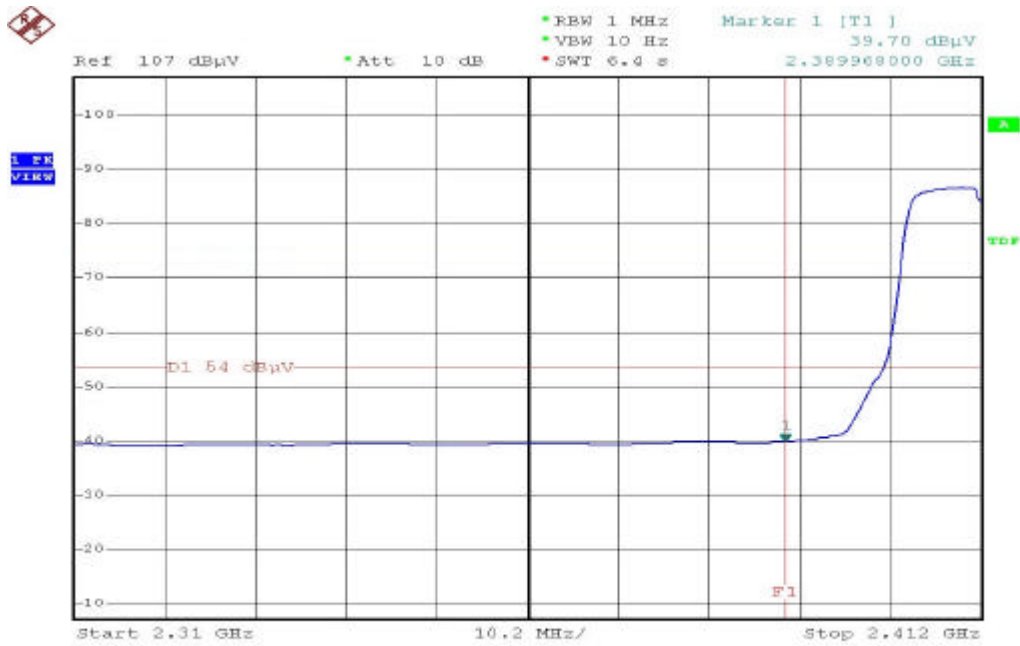

Modulation Standard: IEEE 802.11b

Pol/Phase: Vertical

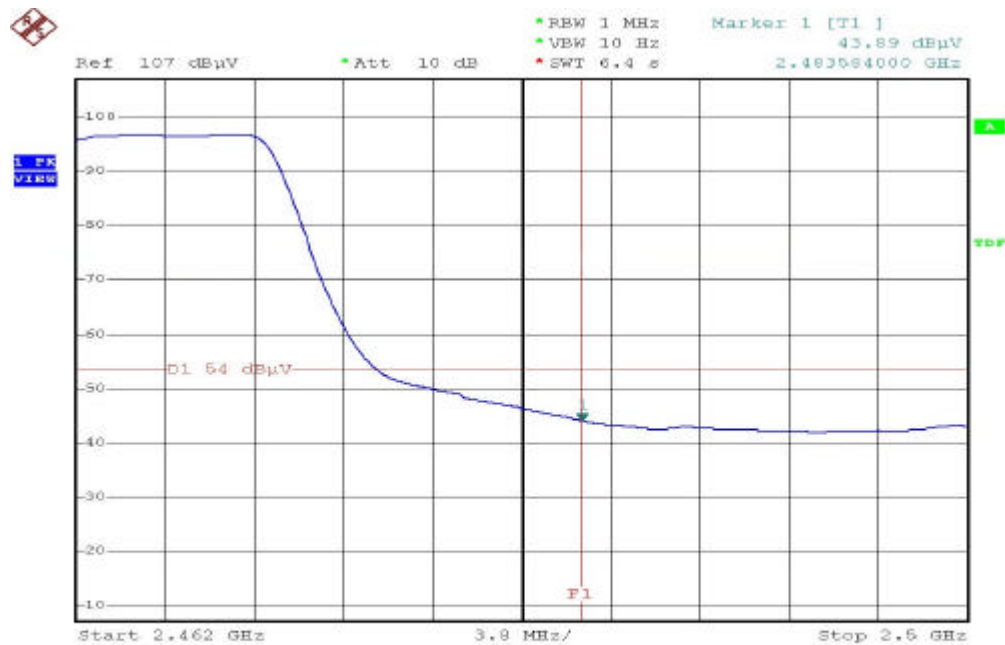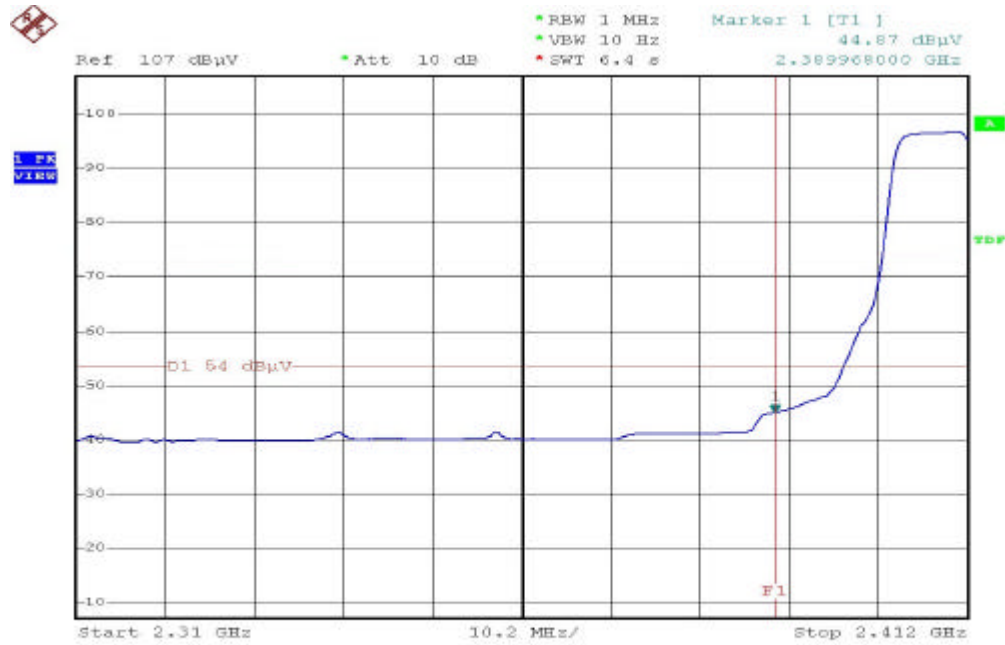

4.7. Power Spectral Density Measurement Data

(1) Modulation Standard: IEEE 802.11b



Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%



- a) Channel 01: Maximum Power Density of 3 kHz Bandwidth is -12.84dBm
- b) Channel 06: Maximum Power Density of 3 kHz Bandwidth is -12.84dBm
- c) Channel 11: Maximum Power Density of 3 kHz Bandwidth is -12.00dBm



(2) Modulation Standard: IEEE 802.11g

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

- a) Channel 01: Maximum Power Density of 3 kHz Bandwidth is -17.77dBm
- b) Channel 06: Maximum Power Density of 3 kHz Bandwidth is -17.61dBm
- c) Channel 11: Maximum Power Density of 3 kHz Bandwidth is -17.56dBm

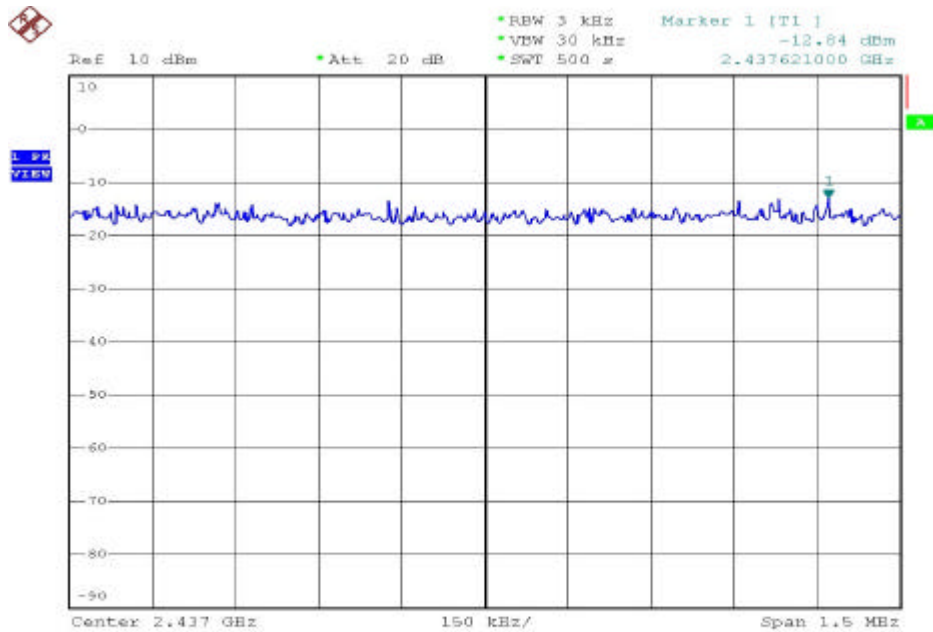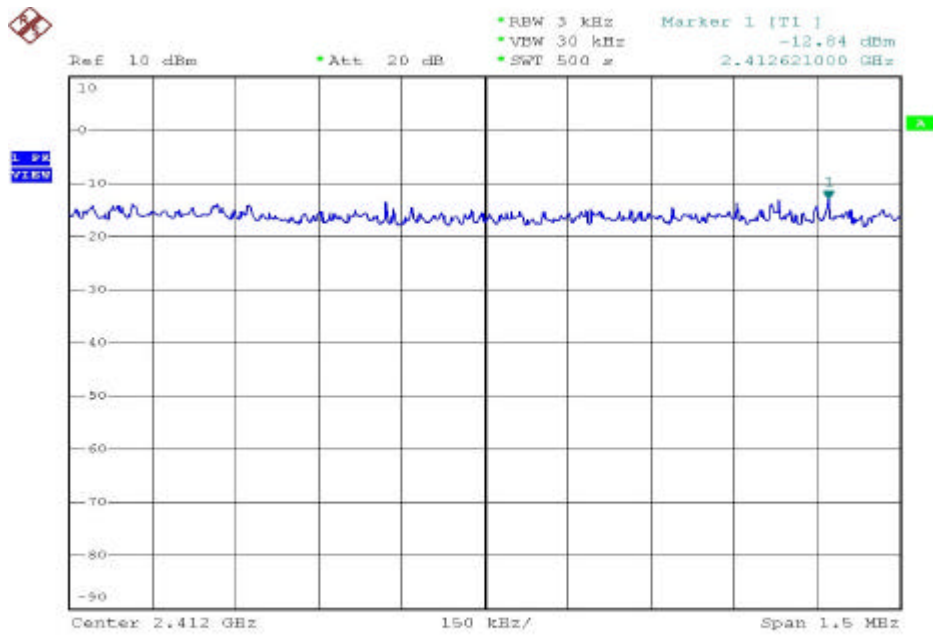

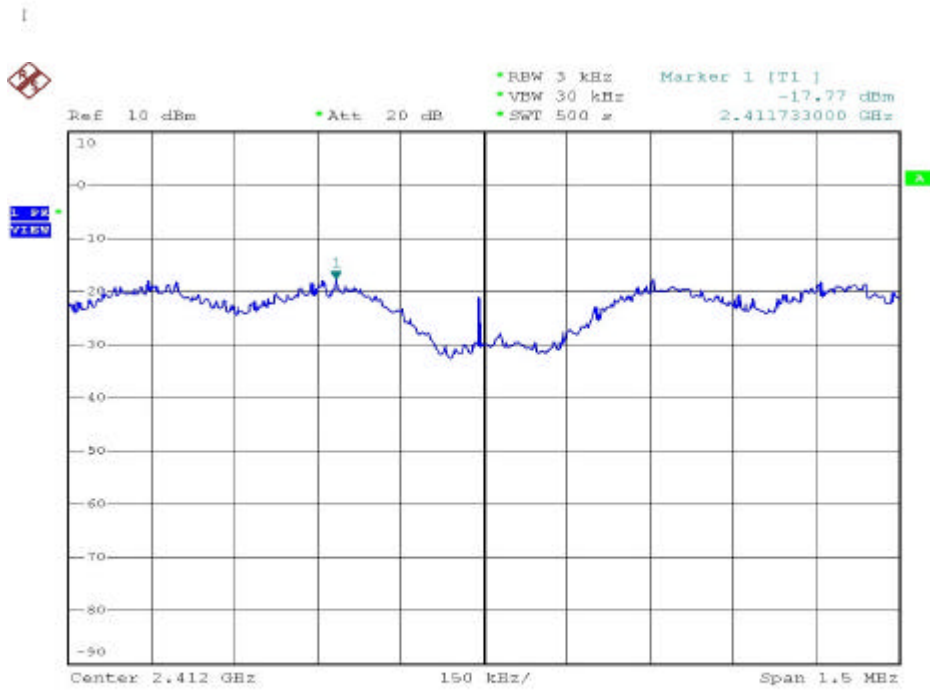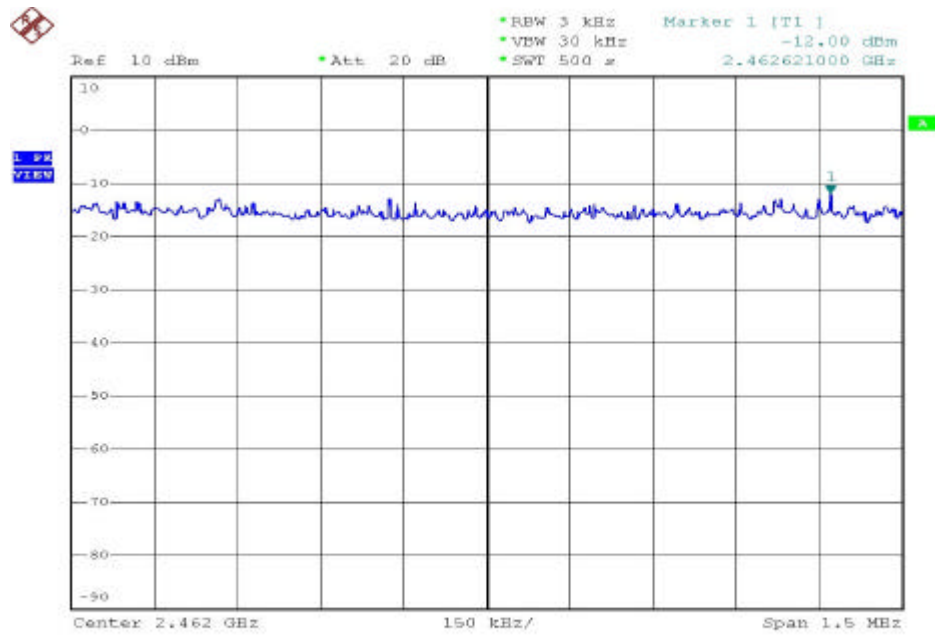

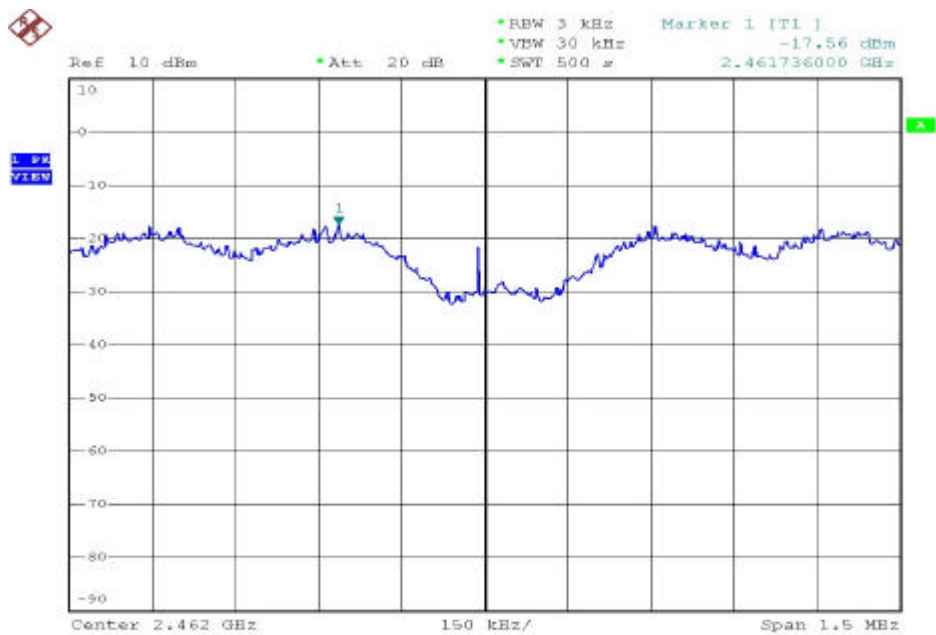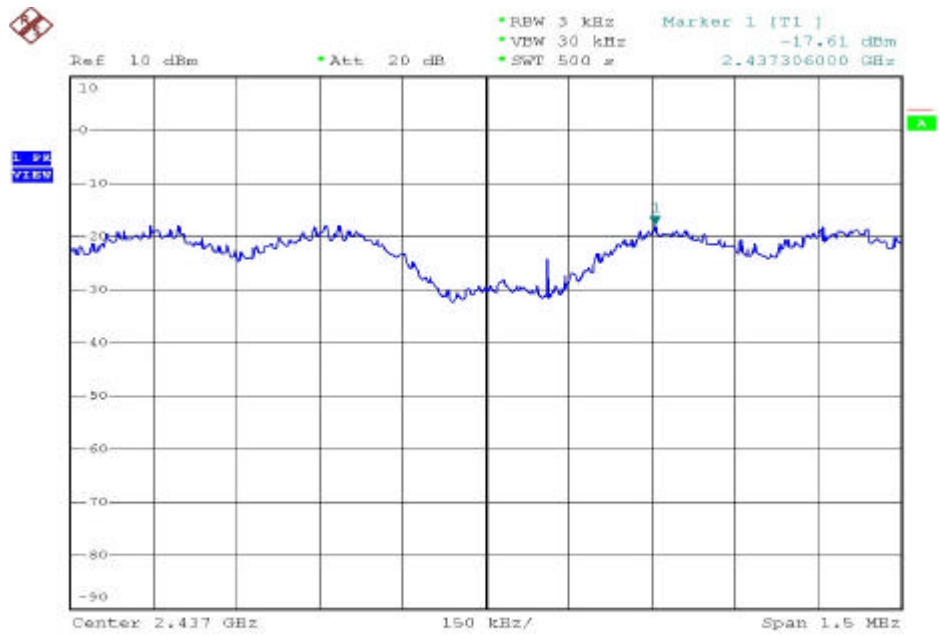

4.8. Test Result of RF Exposure Evaluation

- . Product: Wireless ADSL Router
- . Test Item: RF Exposure Evaluation Data
- . Test site: OATSI-SD
- . Test Mode: Normal

4.8.1. Antenna Gain

The maximum Gain is 1.8dBi.

4.8.2. EUT Operation condition

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.8.3. Output Power into Antenna & RF Exposure Evaluation Distance

Modulation Standard: IEEE 802.11b

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	17.81	2.942
06	2437	17.31	2.777
11	2462	16.98	2.673

Modulation Standard: IEEE 802.11g

Test Date: Jul. 09, 2004 Temperature: 24 Humidity: 58%

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Minimum allowable Distance ®From Skin (cm)
01	2412	16.51	2.532
06	2437	16.81	2.622
11	2462	16.88	2.641

The distance r (4th column) calculated from the Friis transmission formula is far shorter than 20 cm separation requirement. So, RF exposure limit warning or SAR test are not required.

5. List of Measuring Equipment Used

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Valid Date.
1	Bilog Antenna	CBL6111C	Schaffner	2762	2004/11/03
2	Preamplifier	RFP4002	Schaffner	010	2004/11/03
3	Receiver	SCR3501	Schaffner	437	2004/11/03
4	Signal Generator	8648B	HP	3629U00612	2006/02/09
5	Spectrum Analyzer	8594E	HP	3520A01913	2005/01/15
6	Amplifier	8447D	Agilent	2944A10593	2004/10/09
7	Amplifier	8447D	Agilent	2944A10531	2005/06/30
8	Series Power Meter	E4416A	Agilent	GB41292146	2004/11/05
9	Power Sensor	E9327A	Agilent	US40441392	2004/10/06
10	Dipole Antenna	AD-100	COM-Power	721011	2004/12/02
11	Dipole Antenna	AD-100	COM-Power	721010	2004/12/02
12	Spectrum Analyzer	R3131A	Advantest	131000021	2004/11/24
13	Spectrum Analyzer	FSP40	R&S	100047	2004/12/16
14	Preamplifier	8449B	Agilent	3008A01954	2005/01/04
15	Horn Antenna	3115	EMCO	31601	2005/01/13
16	Horn Antenna	3115	EMCO	31589	2005/01/13
17	Horn Antenna	3116	EMCO	31970	2005/01/29
18	Horn Antenna	3116	EMCO	31974	2005/01/29
19	EMI Receiver	8546A	HP	3807A00454	2005/02/12
20	RF Filter Section	85460A	HP	3704A00386	2005/02/12
21	Signal Generator	83640A	HP	2927A00107	2006/04/02
22	Attenuator	8491B	Agilent	50703	2004/12/16
23	Attenuator	8491B	Agilent	50705	2004/12/16
24	Temperature Chamber	TMJ-9712	T Machine	T-12-040111	2005/02/05
25	High Pass Filter	84300-80038	HP	002	N/A
26	High Pass Filter	84300-80038	HP	006	N/A
27	DC Power Supply	GPD-3030	GM	7020936	N/A
28	AC Power Converter	AFC-11005	APC	F103120008	N/A