



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless P/T Network Camera

Model:

RC8261xxxxxxxx(x= 0~9, A~Z, Blank or any Character)

Trade Name: SerComm

Issued to

SerComm Corporation

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.

No.11, Wu-Gong 6th Rd., Wugu Industrial Park,

New Taipei City 248, Taiwan (R.O.C.)

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: July 11, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 11, 2012	Initial Issue	ALL	Eunice Shen



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH	14
7.2 PEAK POWER.....	25
7.3 BAND EDGES MEASUREMENT	36
7.4 PEAK POWER SPECTRAL DENSITY	60
7.5 SPURIOUS EMISSIONS.....	72
7.6 RADIATED EMISSIONS	82
7.7 POWERLINE CONDUCTED EMISSIONS.....	99
APPENDIX I RADIO FREQUENCY EXPOSURE	102
APPENDIX II PHOTOGRAPHS OF TEST SETUP	105
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Equipment Under Test: Wireless P/T Network Camera

Trade Name: SerComm

Model Number: RC8261xxxxxxxx(x= 0~9, A~Z, Blank or any Character)

Date of Test: June 6 ~ July 9, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Jason Lin
Section Manager
Compliance Certification Services Inc.

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless P/T Network Camera
Trade Name	SerComm
Model Number	RC8261xxxxxxxx(x= 0~9, A~Z, Blank or any Character)
Model Discrepancy	All the above models are identical except for the designation of model numbers. The suffix of x (x = 0~9, A~Z, Blank or any Character) on model number is just for marketing purpose only.
Received Date	June 4, 2012
Power Adapter	1. Brand: Sunny / Model: SYS1381-1212-W2 I/P: 100-240V, 50-60Hz, 0.5A MAX O/P: 12V, 1.0A 2. Brand: LEADER / Model: MU12-G120100-A1 I/P: 100-240V, 50-60Hz, 0.5A O/P: 12V, 1.0A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 17.35 dBm IEEE 802.11g mode: 24.39 dBm IEEE 802.11n HT 20 MHz mode: 24.24 dBm IEEE 802.11n HT 40 MHz mode: 23.42 dBm
Modulation Technique	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM IEEE 802.11n HT 20 MHz mode: OFDM IEEE 802.11n HT 40 MHz mode: OFDM
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels
Antenna Specification	1. PCB Antenna / Gain: 3.83 dBi 2. Dipole Antenna / Gain: 4.25 dBi MIMO: Total ANT=10*LOG(((10^(3.83/20))+10^(4.25/20))^2)/2)= 7.05

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **P27RC8261** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: RC8261) comes with three types of power adapter (SYS1381-1212-W2 / MU12-G120100-A1) for sale. After the preliminary test, the power adapter MU12-G120100-A1 was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz mode:

Channel Low (2422MHz), Channel Mid (2442MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/16/2013
Power Meter	Anritsu	ML2495A	1012009	04/26/2013
Power Sensor	Anritsu	MA2411B	0917072	04/26/2013

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/02/2012
EMI Test Receiver	R&S	ESCI	100064	02/16/2013
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/12/2013
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/03/2012
Horn Antenna	EMCO	3117	00055165	01/11/2013
Horn Antenna	EMCO	3116	00026370	10/12/2012
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	101201	09/05/2012
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	12/13/2012
LISN	SCHWARZBECK	NSLK 8127	8127526	12/13/2012
BNC CABLE	EMCI	5Dr	BNC A6	12/07/2012
THERMO-HYGRO METER	TECPEL	DTM-303	NO.3	11/21/2012
Test S/W	EZ-EMC			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.0717
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

*Remark: The Powerline Conducted test items was tested at Compliance Certification Services Inc. (Hsintien Lab.)
The test equipments were listed in page 9 and the test data, please refer page 100-101.*

No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Earphone	Atayal	SEP912	N/A	N/A	Unshielded, 2.0m	N/A
2	Server Notebook	HP	Compaq 2210b	CNU7472KDP	N/A	Unshielded, 20m	Unshielded, 1.8m
3	DIO Cable	N/A	N/A	N/A	N/A	Unshielded, 2.0m	N/A
4.	Notebook PC (Remote)	DELL	PP19L	61G6Q1S	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

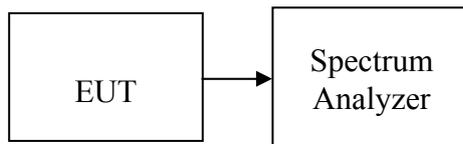

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW = 1% of the emission bandwidth, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.27	>500	PASS
Mid	2442	10.27		PASS
High	2462	10.27		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.37	>500	PASS
Mid	2442	16.40		PASS
High	2462	16.40		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.27	>500	PASS
Mid	2442	17.30		PASS
High	2462	17.30		PASS

Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.33	>500	PASS
Mid	2442	17.30		PASS
High	2462	17.43		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.07	>500	PASS
Mid	2442	35.93		PASS
High	2452	36.07		PASS

Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.93	>500	PASS
Mid	2442	36.07		PASS
High	2452	35.87		PASS



Test Plot


IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 11:12:17 Jul 9, 2012

R T

Mkr2 10.27 MHz
0.17 dB

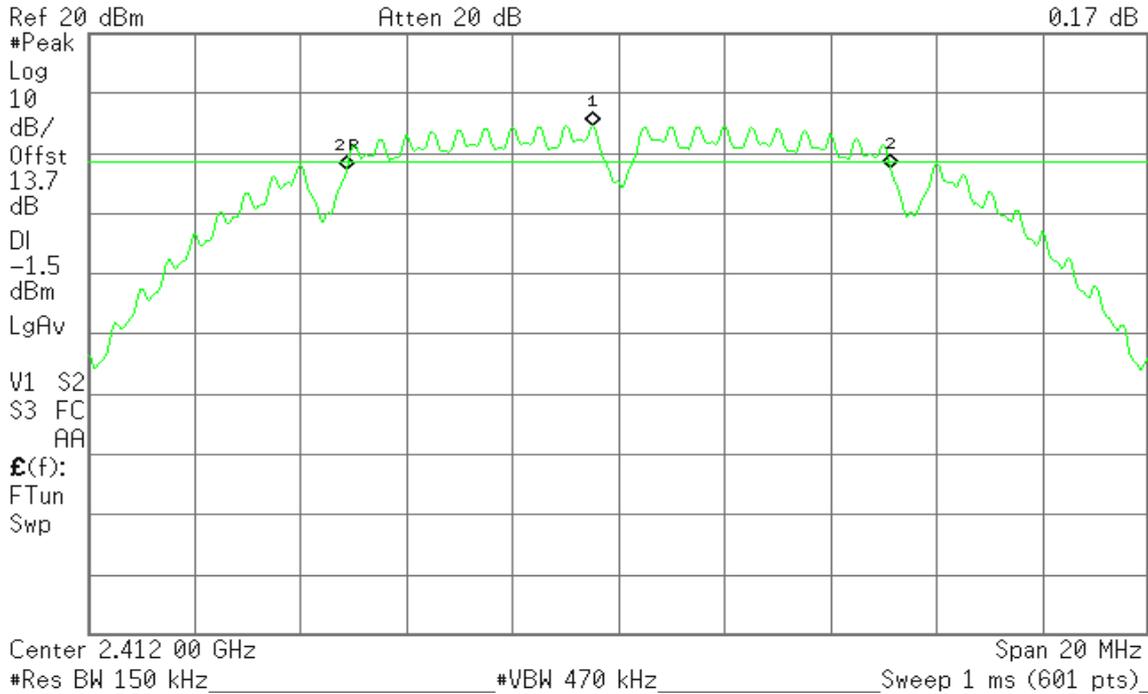


6dB Bandwidth (CH Mid)

Agilent 11:14:40 Jul 9, 2012

R T

Mkr2 10.27 MHz
-0.45 dB

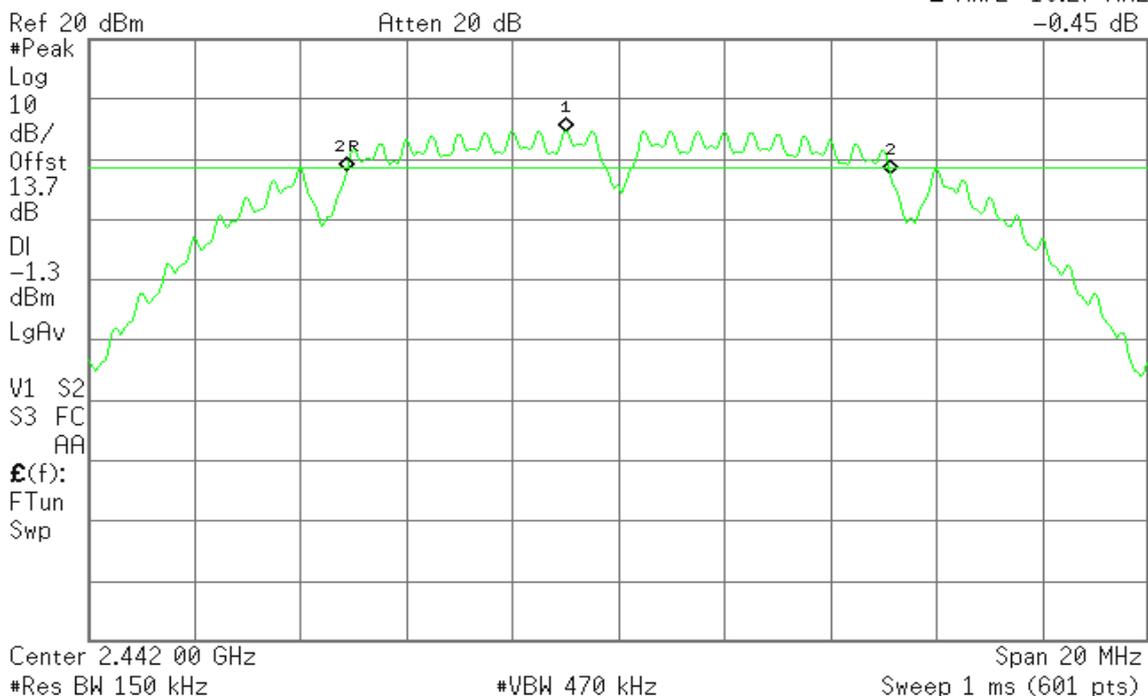




6dB Bandwidth (CH High)

Agilent 10:56:24 Jul 9, 2012

R T

Mkr2 10.27 MHz
-0.45 dB

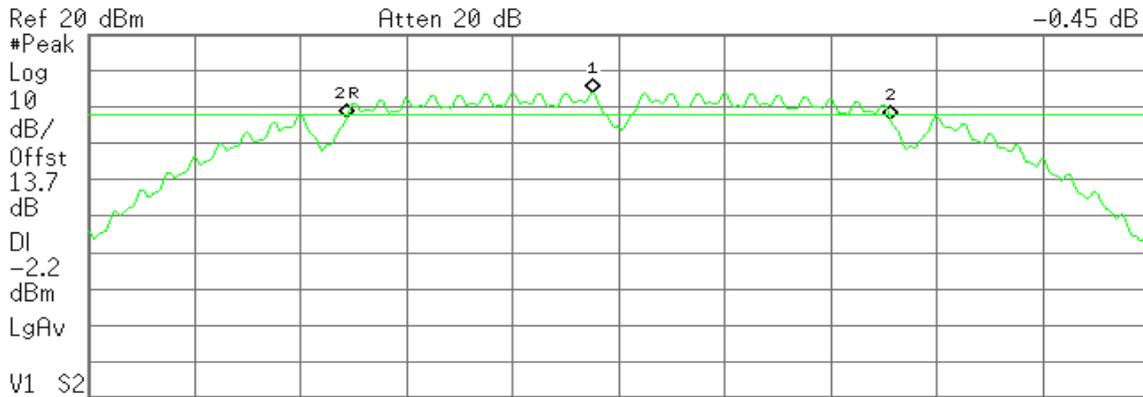

Center 2.462 00 GHz Span 20 MHz
#Res BW 150 kHz #VBW 470 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.461 50 GHz	3.83 dBm
2R	(1)	Freq	2.456 87 GHz	-3.01 dBm
2Δ	(1)	Freq	10.27 MHz	-0.45 dB


IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 11:38:18 Jul 9, 2012

R T

Mkr2 16.37 MHz
-0.24 dB

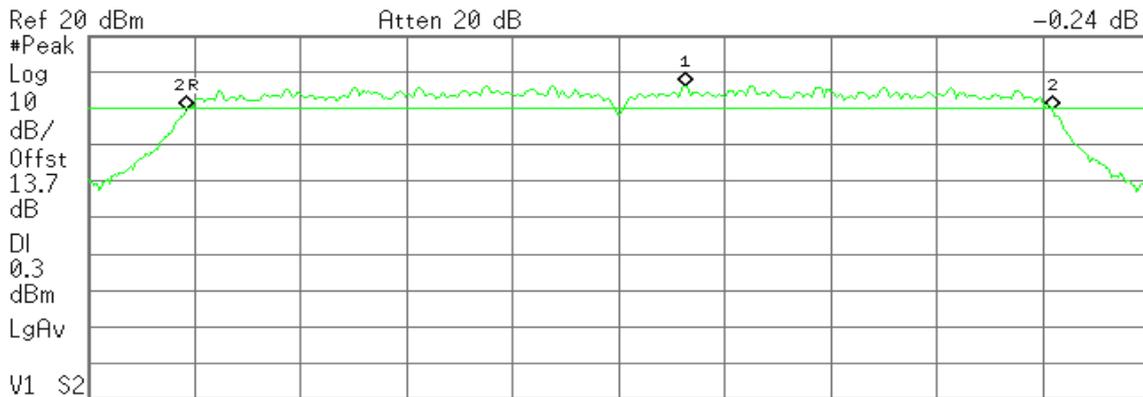

Center 2.412 00 GHz Span 20 MHz
#Res BW 180 kHz #VBW 560 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.413 27 GHz	6.28 dBm
2R	(1)	Freq	2.403 83 GHz	-0.26 dBm
2Δ	(1)	Freq	16.37 MHz	-0.24 dB




6dB Bandwidth (CH Mid)

Agilent 11:40:03 Jul 9, 2012

R T

Mkr2 16.40 MHz
0.03 dB

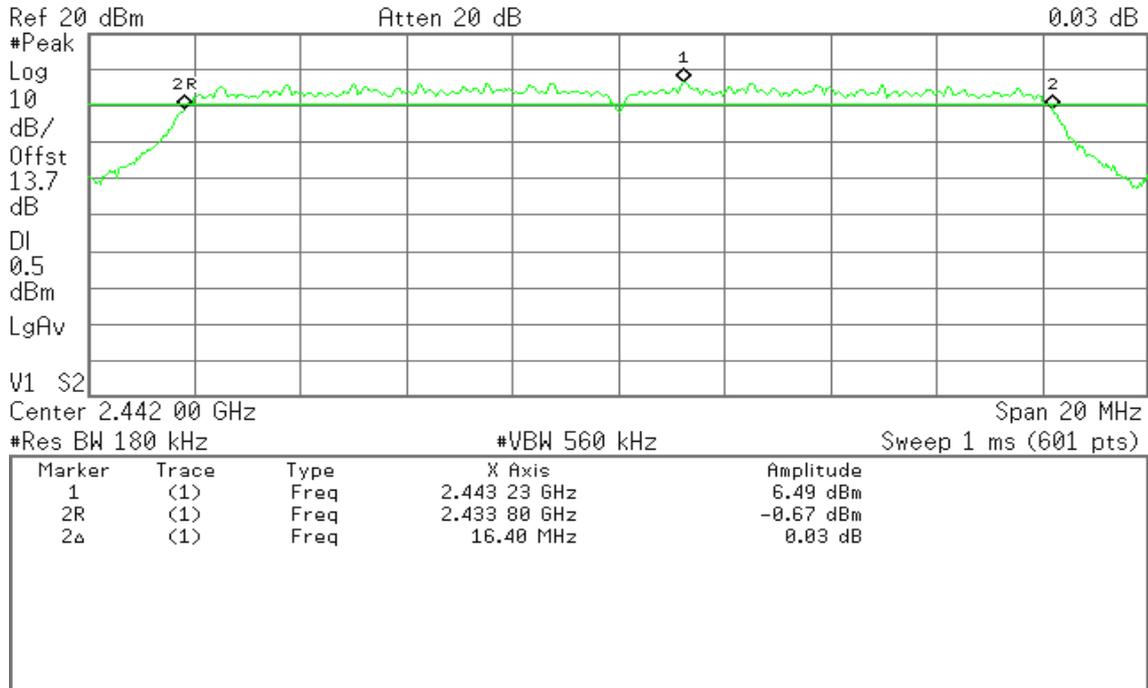


6dB Bandwidth (CH High)

Agilent 11:42:19 Jul 9, 2012

R T

Mkr2 16.40 MHz
-0.51 dB

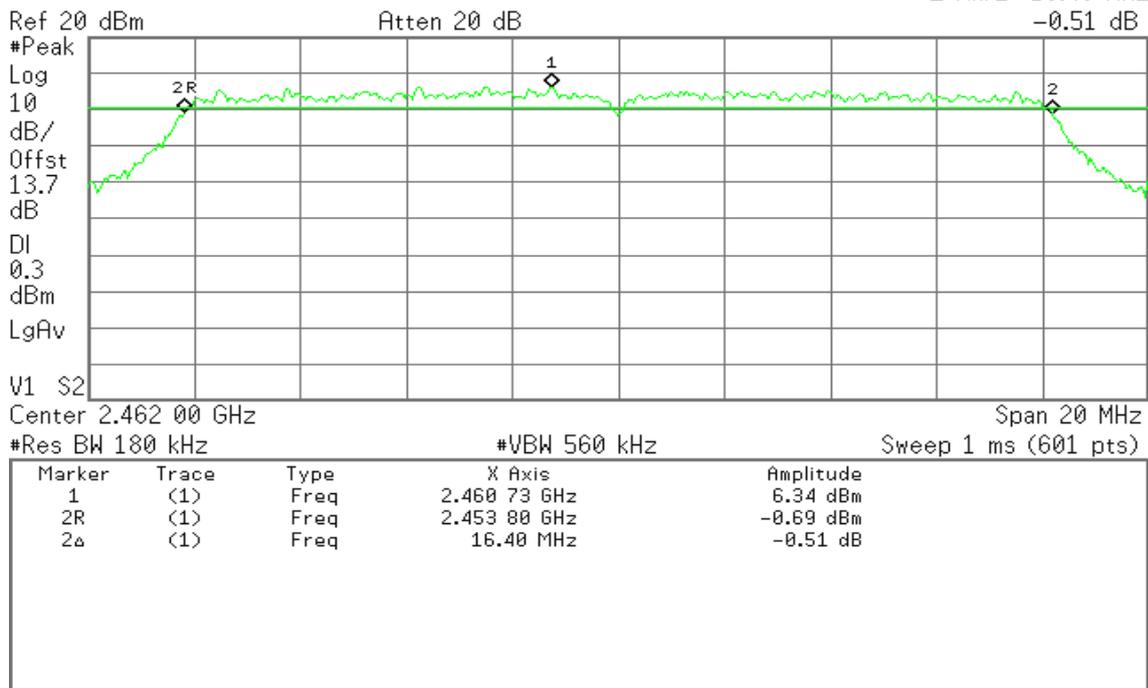



IEEE 802.11n HT 20 MHz mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 15:31:17 Jul 9, 2012

R T

Mkr2 17.27 MHz
0.02 dB



Center 2.412 00 GHz Span 20 MHz
#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.413 27 GHz	4.01 dBm
2R	(1)	Freq	2.403 37 GHz	-3.09 dBm
2Δ	(1)	Freq	17.27 MHz	0.02 dB

6dB Bandwidth (CH Mid)

Agilent 15:33:27 Jul 9, 2012

R T

Mkr2 17.30 MHz
-0.27 dB

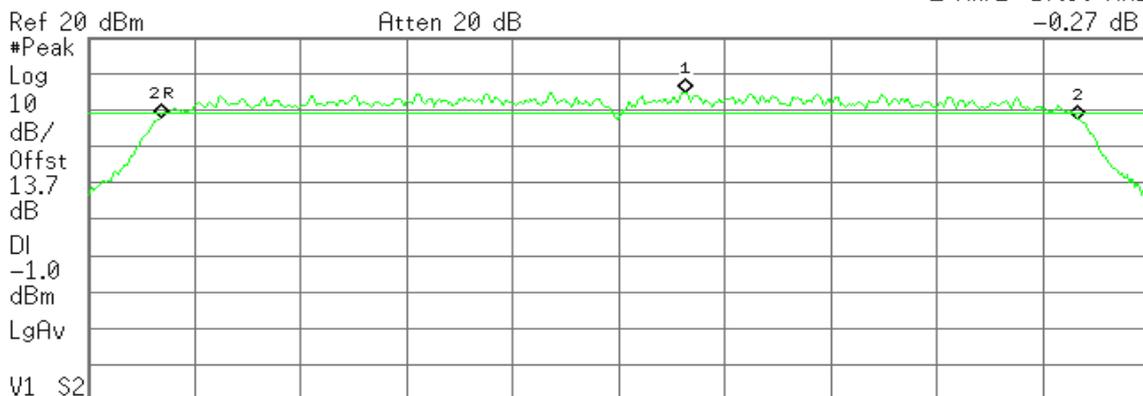

Center 2.442 00 GHz Span 20 MHz
#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.443 27 GHz	5.01 dBm
2R	(1)	Freq	2.433 37 GHz	-2.03 dBm
2Δ	(1)	Freq	17.30 MHz	-0.27 dB




6dB Bandwidth (CH High)

Agilent 15:40:46 Jul 9, 2012

R T

Mkr2 17.30 MHz
-0.56 dB

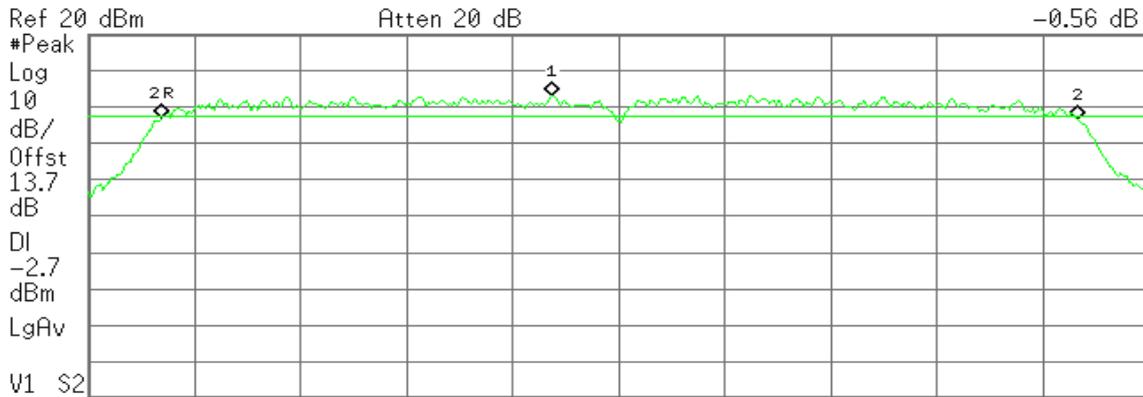

Center 2.462 00 GHz Span 20 MHz

#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.460 73 GHz	3.30 dBm
2R	(1)	Freq	2.453 37 GHz	-2.98 dBm
2Δ	(1)	Freq	17.30 MHz	-0.56 dB

IEEE 802.11n HT 20 MHz mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 15:29:42 Jul 9, 2012

R T

Mkr2 17.33 MHz
-0.41 dB



Center 2.412 00 GHz Span 20 MHz

#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.413 27 GHz	2.23 dBm
2R	(1)	Freq	2.403 37 GHz	-4.45 dBm
2Δ	(1)	Freq	17.33 MHz	-0.41 dB




6dB Bandwidth (CH Mid)

Agilent 15:35:13 Jul 9, 2012

R T

Mkr2 17.30 MHz
0.34 dB

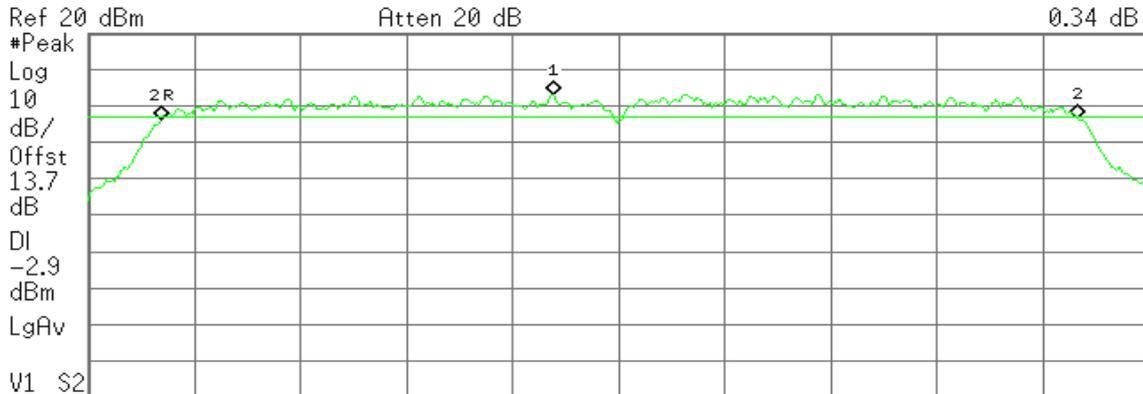

Center 2.442 00 GHz Span 20 MHz
#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.440 77 GHz	3.13 dBm
2R	(1)	Freq	2.433 37 GHz	-3.70 dBm
2Δ	(1)	Freq	17.30 MHz	0.34 dB

6dB Bandwidth (CH High)

Agilent 15:37:59 Jul 9, 2012

R T

Mkr2 17.43 MHz
-0.19 dB

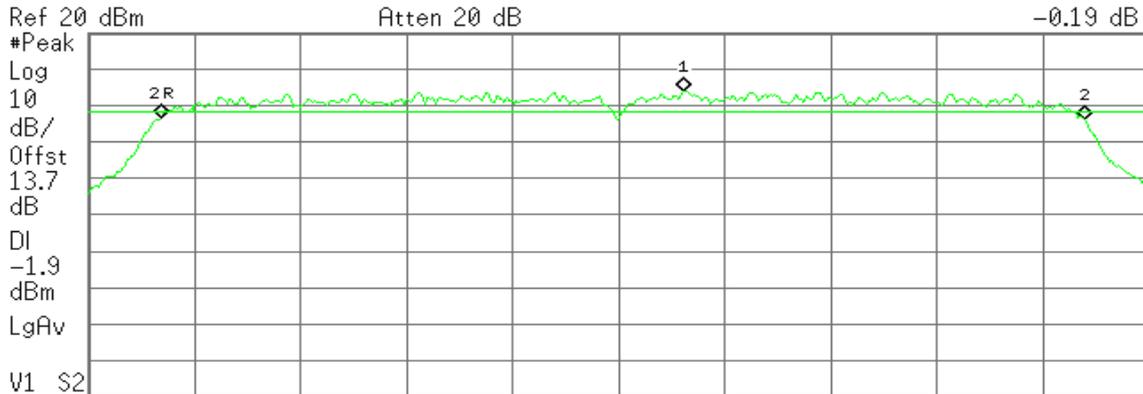

Center 2.462 00 GHz Span 20 MHz
#Res BW 200 kHz #VBW 560 kHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.463 23 GHz	4.15 dBm
2R	(1)	Freq	2.453 37 GHz	-3.48 dBm
2Δ	(1)	Freq	17.43 MHz	-0.19 dB




IEEE 802.11n HT 40 MHz mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 16:56:52 Jul 9, 2012

R T

Mkr2 36.07 MHz
-0.17 dB

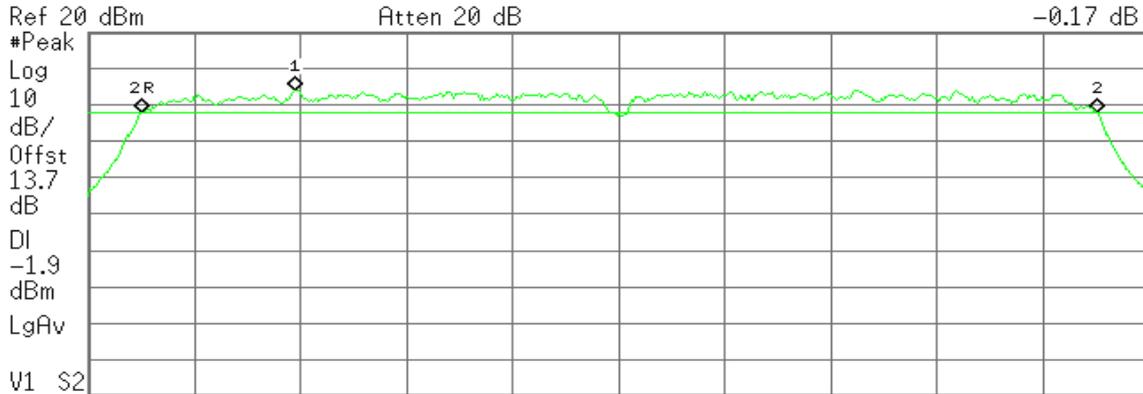

Center 2.422 00 GHz Span 40 MHz
#Res BW 390 kHz #VBW 1.2 MHz Sweep 1 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.409 80 GHz	4.06 dBm
2R	(1)	Freq	2.404 00 GHz	-2.02 dBm
2Δ	(1)	Freq	36.07 MHz	-0.17 dB

6dB Bandwidth (CH Mid)

Agilent 17:01:51 Jul 9, 2012

R T

Mkr2 35.93 MHz
0.31 dB

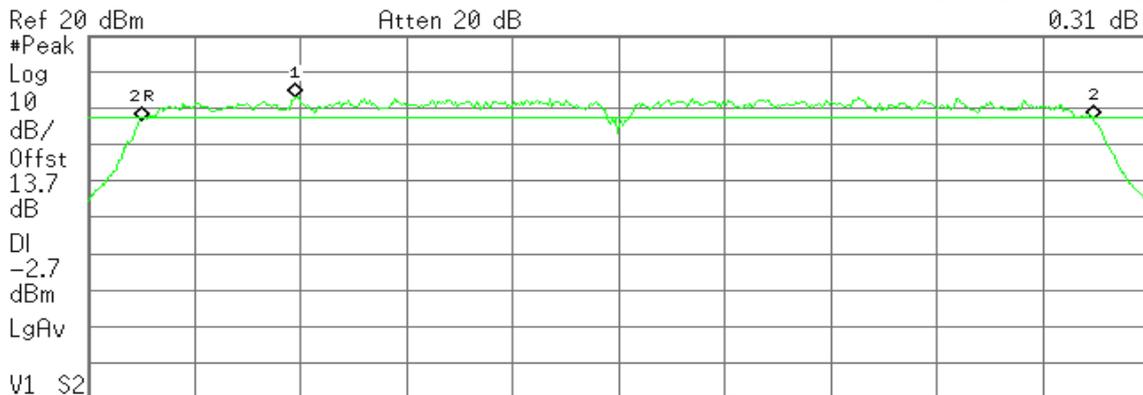

Center 2.442 00 GHz Span 40 MHz
#Res BW 390 kHz #VBW 1.2 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.429 80 GHz	3.28 dBm
2R	(1)	Freq	2.424 00 GHz	-3.20 dBm
2Δ	(1)	Freq	35.93 MHz	0.31 dB




6dB Bandwidth (CH High)

Agilent 17:03:09 Jul 9, 2012

R T

Mkr2 36.07 MHz
-0.02 dB

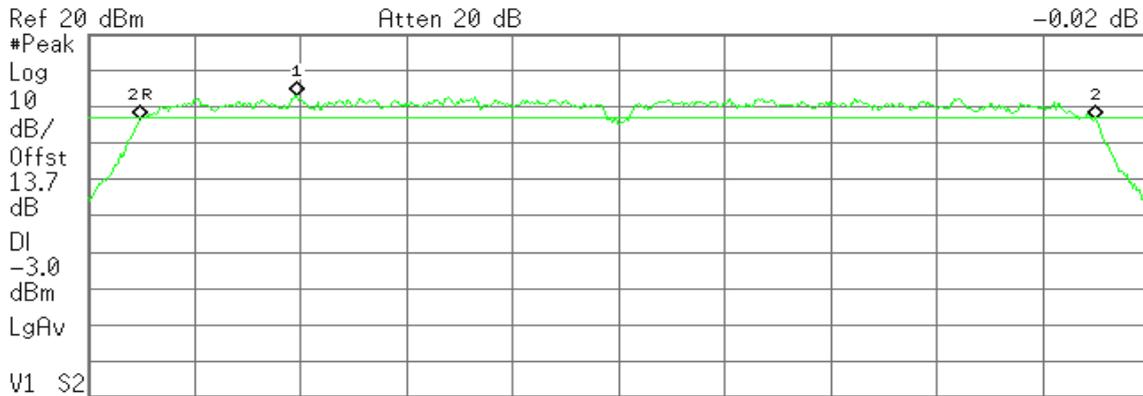

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.449 87 GHz	2.99 dBm
2R	(1)	Freq	2.443 93 GHz	-3.31 dBm
2Δ	(1)	Freq	36.07 MHz	-0.02 dB


IEEE 802.11n HT 40 MHz mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 16:58:18 Jul 9, 2012

R T

Mkr2 35.93 MHz
-0.50 dB

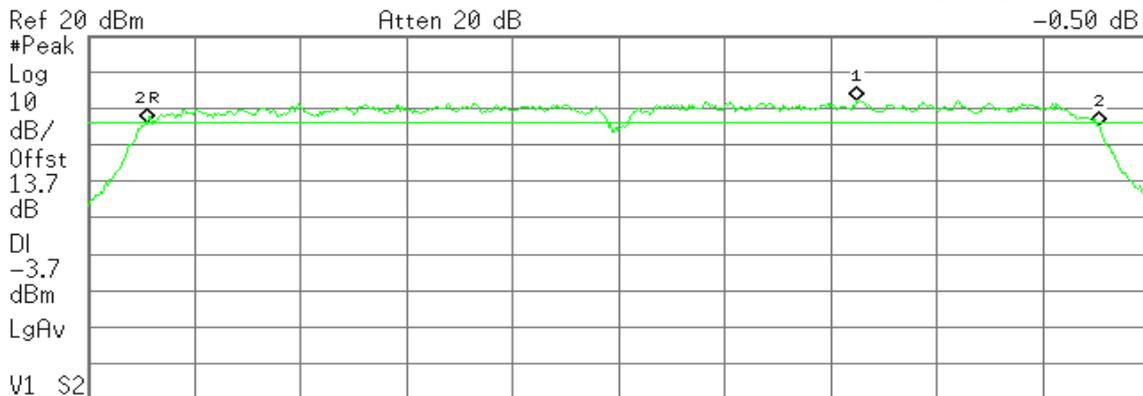

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.431 00 GHz	2.27 dBm
2R	(1)	Freq	2.404 20 GHz	-4.03 dBm
2Δ	(1)	Freq	35.93 MHz	-0.50 dB




6dB Bandwidth (CH Mid)

Agilent 17:00:02 Jul 9, 2012

R T

Mkr2 36.07 MHz
-1.75 dB

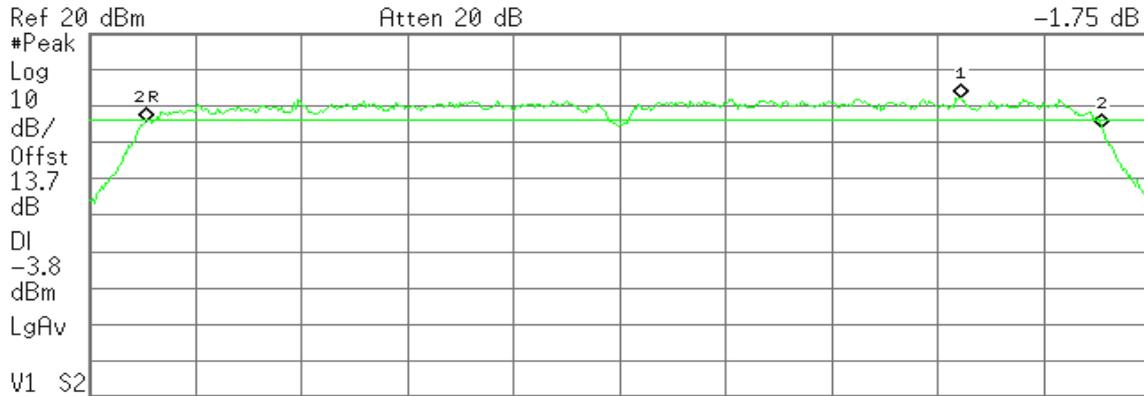

Center 2.442 00 GHz Span 40 MHz
#Res BW 390 kHz #VBW 1.2 MHz Sweep 1 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.454 87 GHz	2.22 dBm
2R	(1)	Freq	2.424 13 GHz	-4.30 dBm
2Δ	(1)	Freq	36.07 MHz	-1.75 dB

6dB Bandwidth (CH High)

Agilent 17:04:59 Jul 9, 2012

R T

Mkr2 35.87 MHz
-0.17 dB

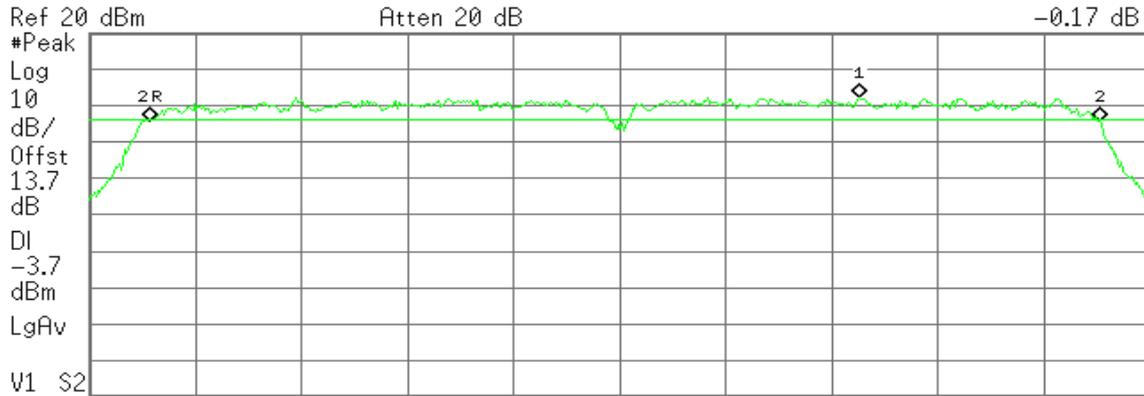

Center 2.462 00 GHz Span 40 MHz
#Res BW 390 kHz #VBW 1.2 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.471 07 GHz	2.29 dBm
2R	(1)	Freq	2.444 27 GHz	-4.23 dBm
2Δ	(1)	Freq	35.87 MHz	-0.17 dB




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

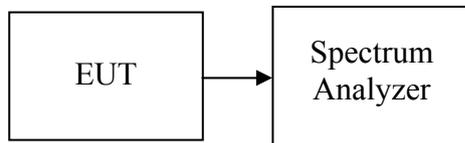

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Record the max reading. Repeat the above procedure until the measurements for all frequencies are completed.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.35	0.0543	1.00	PASS
Mid	2442	17.24	0.0530		PASS
High	2462	16.59	0.0456		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	24.39	0.2748	1.00	PASS
Mid	2442	24.09	0.2564		PASS
High	2462	23.52	0.2249		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.77	19.28	23.71	0.2350	0.78	PASS
Mid	2442	21.26	20.36	23.84	0.2423		PASS
High	2462	21.70	20.70	24.24	0.2654		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	20.83	19.12	23.07	0.2027	0.78	PASS
Mid	2442	21.01	19.67	23.40	0.2189		PASS
High	2452	20.61	20.21	23.42	0.2200		PASS

Remark:

- Total Output Power (w) = Chain 0 (10^{^(Output Power /10)}/1000)+ Chain 1 (10^{^(Output Power /10)}/1000).
- The maximum antenna gain is 7.05dBi; therefore the reduction due to antenna gain is 1.05dBi, so the limit is 28.95dBm.




Test Plot

IEEE 802.11b mode

Peak Power (CH Low)

Agilent 11:05:08 Jul 9, 2012

R T

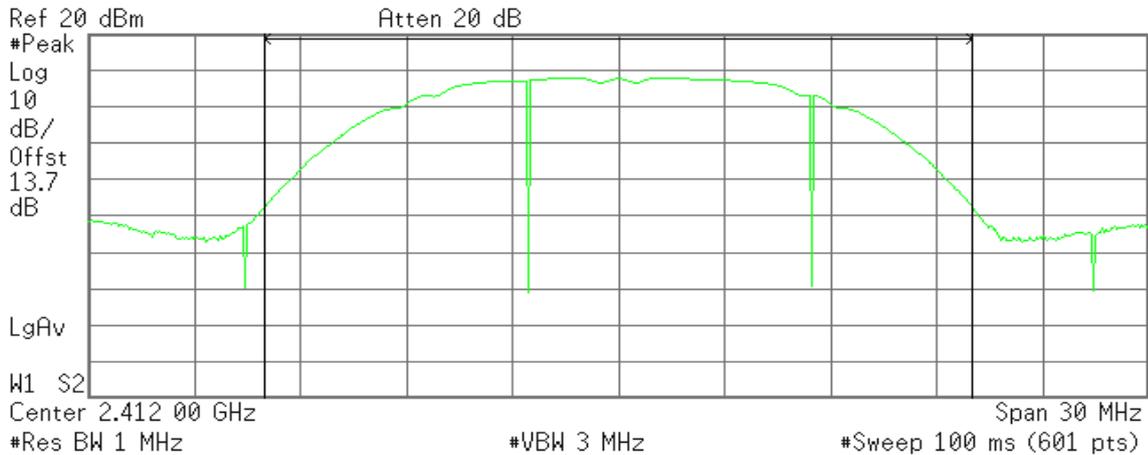

Channel Power

17.35 dBm /20.0000 MHz


Power Spectral Density

-55.66 dBm/Hz

Peak Power (CH Mid)

Agilent 10:58:27 Jul 9, 2012

R T

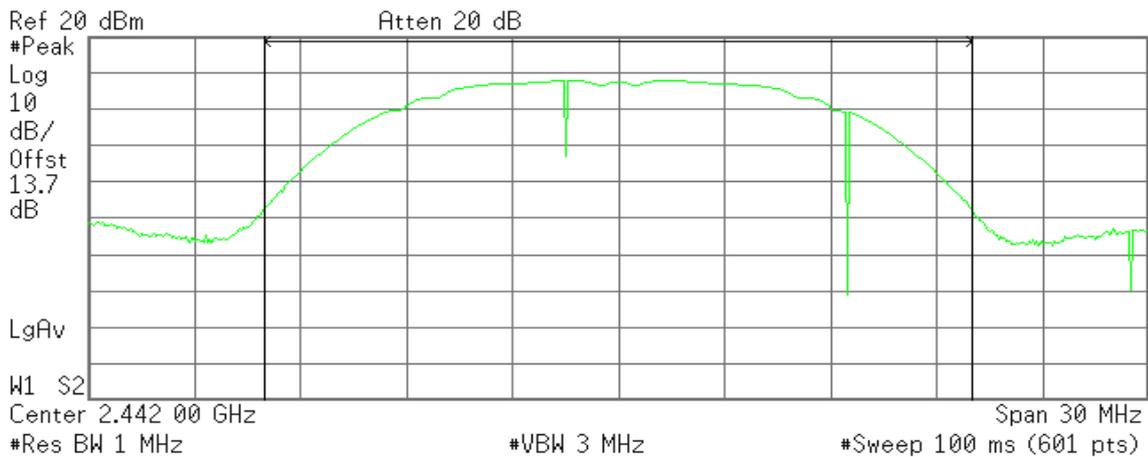

Channel Power

17.24 dBm /20.0000 MHz

Power Spectral Density


-55.77 dBm/Hz



Peak Power (CH High)

Agilent 10:47:47 Jul 9, 2012

R T

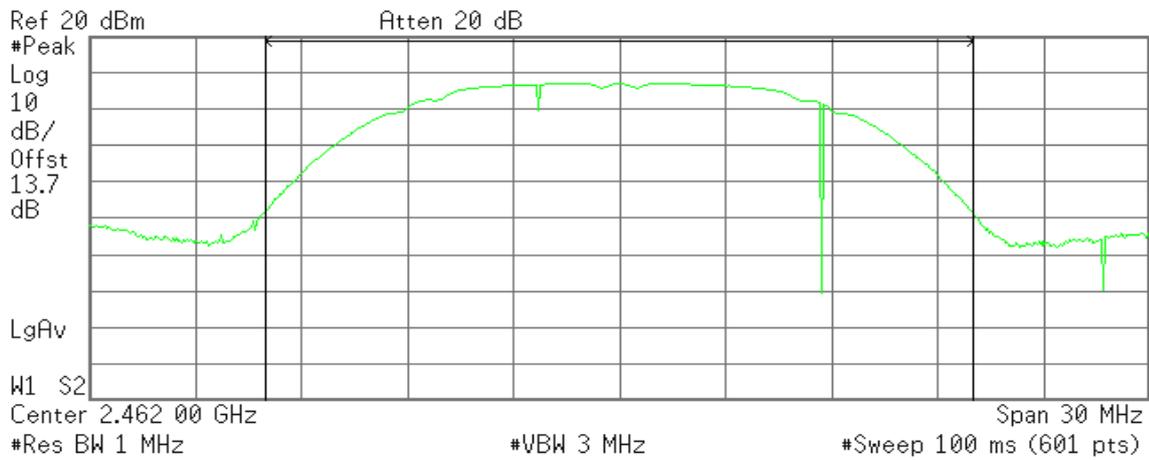

Channel Power

16.59 dBm /20.0000 MHz

Power Spectral Density


-56.42 dBm/Hz

IEEE 802.11g mode

Peak Power (CH Low)

Agilent 11:32:11 Jul 9, 2012

R T

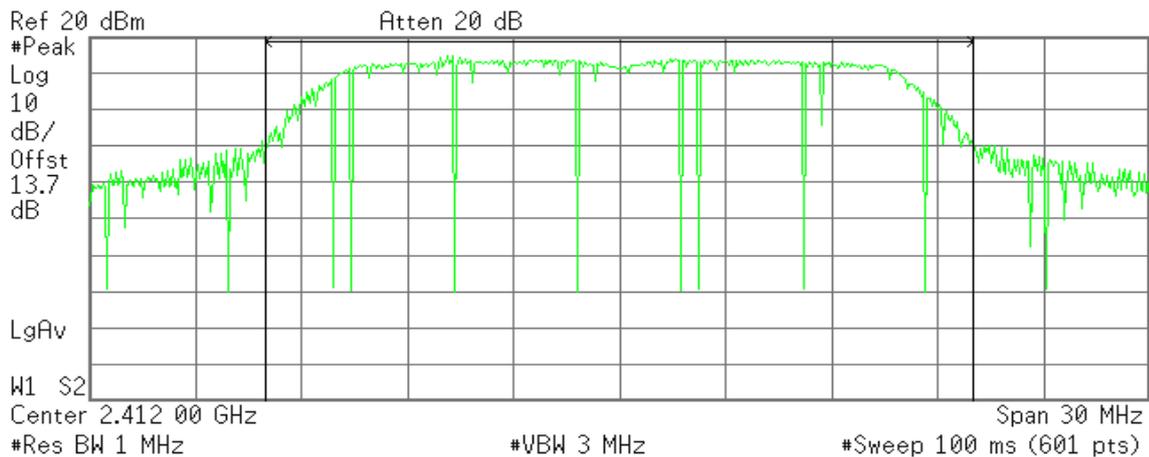

Channel Power

24.39 dBm /20.0000 MHz

Power Spectral Density


-48.62 dBm/Hz



Peak Power (CH Mid)

Agilent 11:27:10 Jul 9, 2012

R T

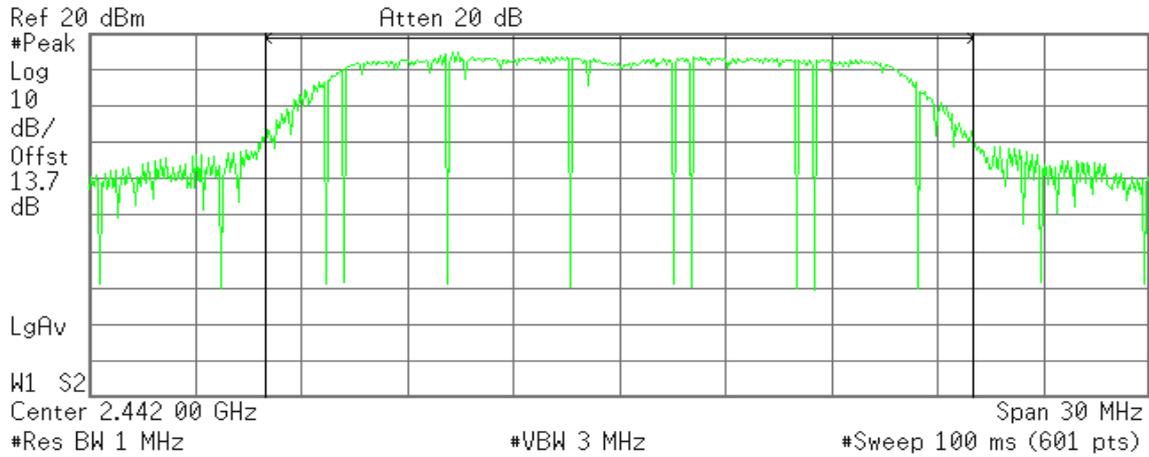

Channel Power

24.09 dBm /20.0000 MHz


Power Spectral Density

-48.92 dBm/Hz

Peak Power (CH High)

Agilent 11:21:34 Jul 9, 2012

R T

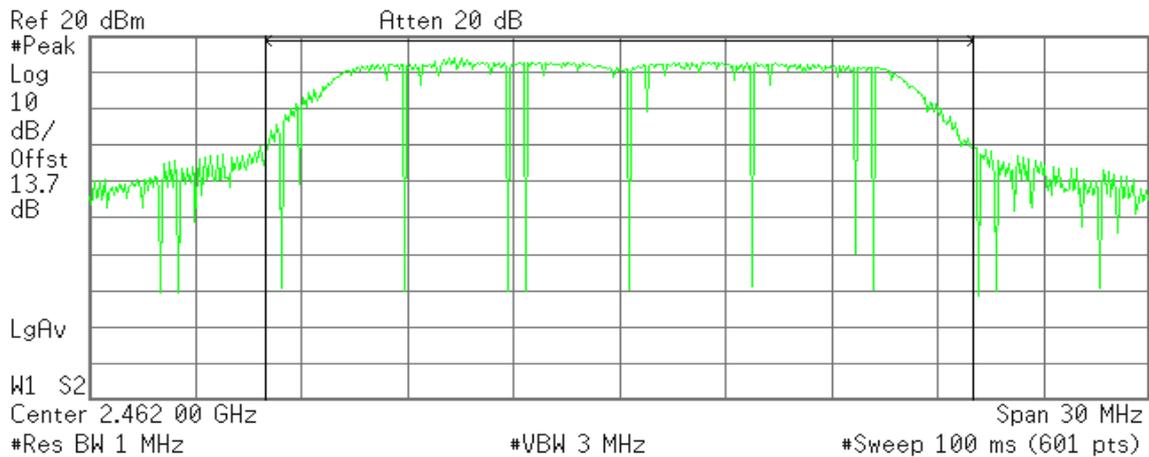

Channel Power

23.52 dBm /20.0000 MHz

Power Spectral Density

-49.49 dBm/Hz




IEEE 802.11n HT 20 MHz mode / Chain 0

Peak Power (CH Low)

Agilent 15:19:07 Jul 9, 2012

R T

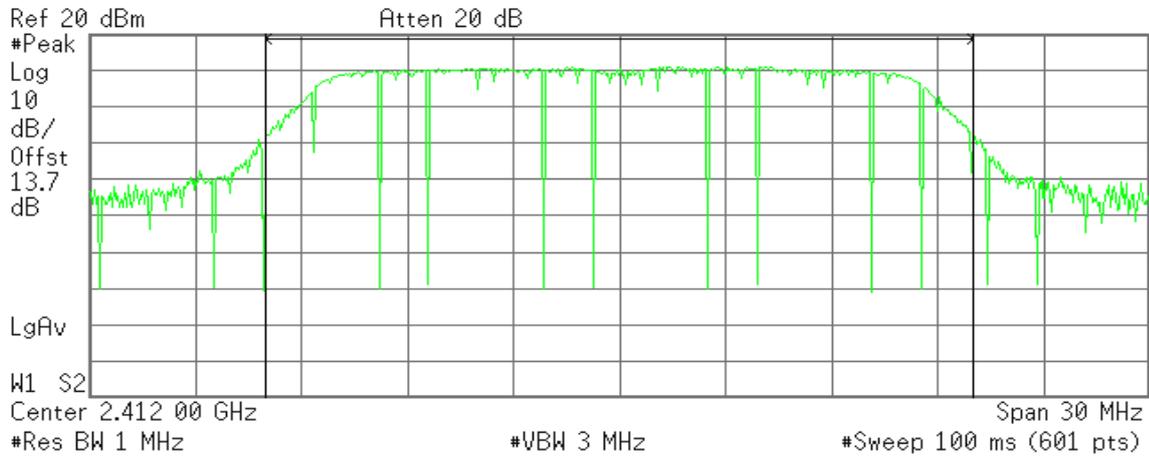

Channel Power

21.77 dBm /20.0000 MHz


Power Spectral Density

-51.24 dBm/Hz

Peak Power (CH Mid)

Agilent 15:11:37 Jul 9, 2012

R T

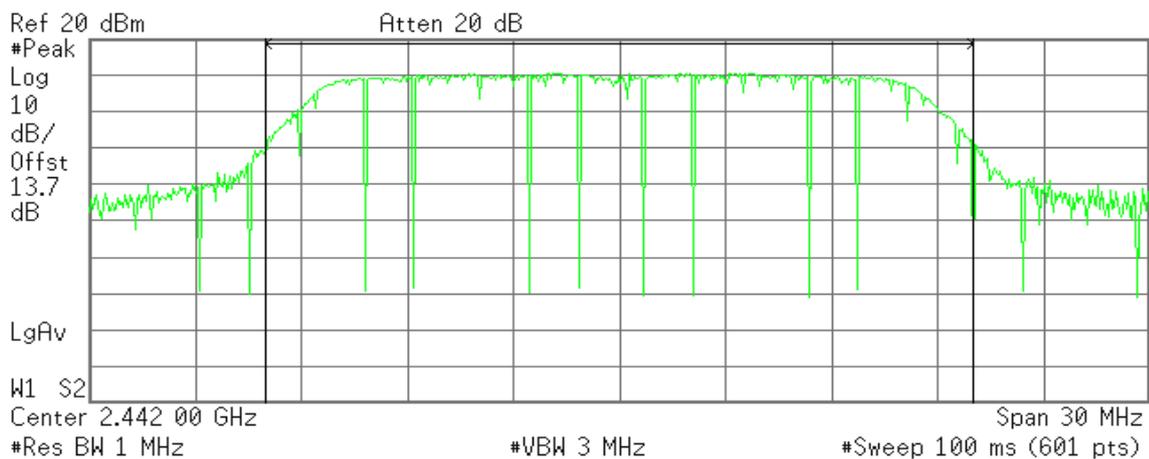

Channel Power

21.26 dBm /20.0000 MHz

Power Spectral Density


-51.75 dBm/Hz



Peak Power (CH High)

Agilent 14:51:07 Jul 9, 2012

R T

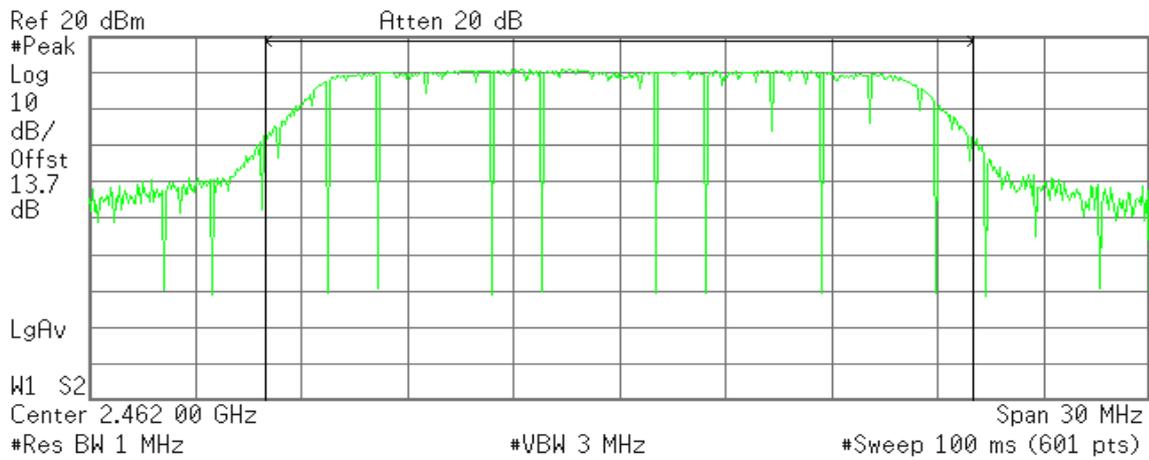

Channel Power

21.70 dBm /20.0000 MHz

Power Spectral Density


-51.31 dBm/Hz

IEEE 802.11n HT 20 MHz mode / Chain 1

Peak Power (CH Low)

Agilent 15:25:36 Jul 9, 2012

R T

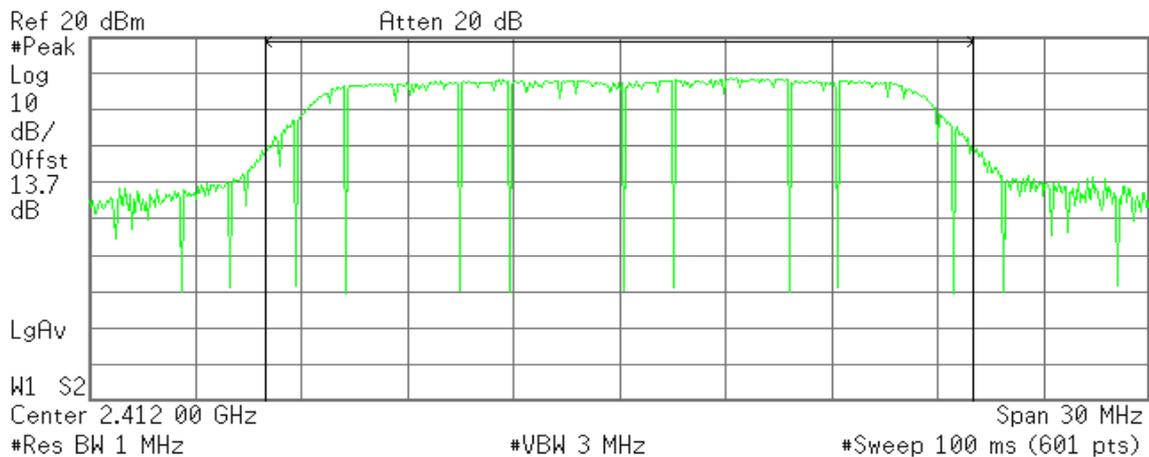

Channel Power

19.28 dBm /20.0000 MHz

Power Spectral Density


-53.73 dBm/Hz



Peak Power (CH Mid)

Agilent 15:06:57 Jul 9, 2012

R T

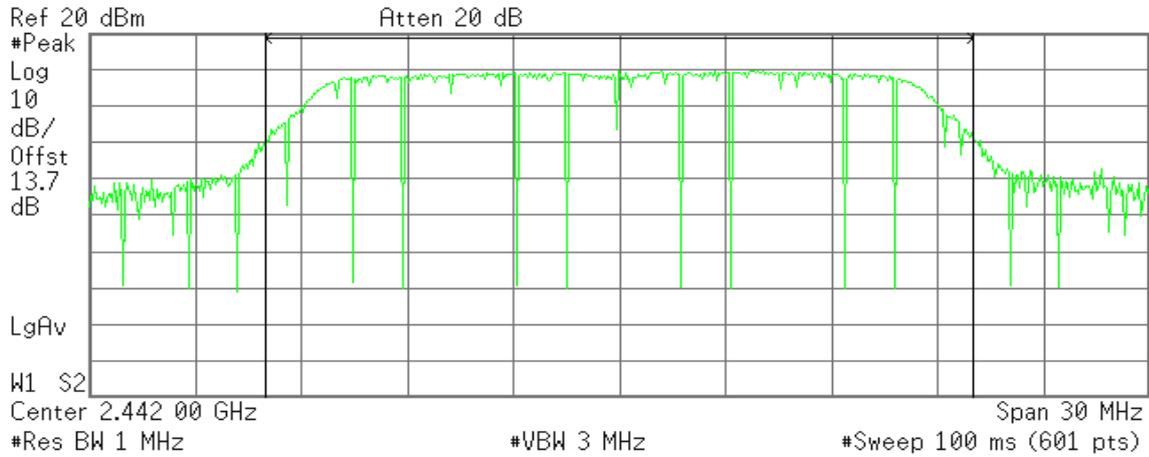

Channel Power

20.36 dBm /20.0000 MHz


Power Spectral Density

-52.65 dBm/Hz

Peak Power (CH High)

Agilent 14:58:49 Jul 9, 2012

R T

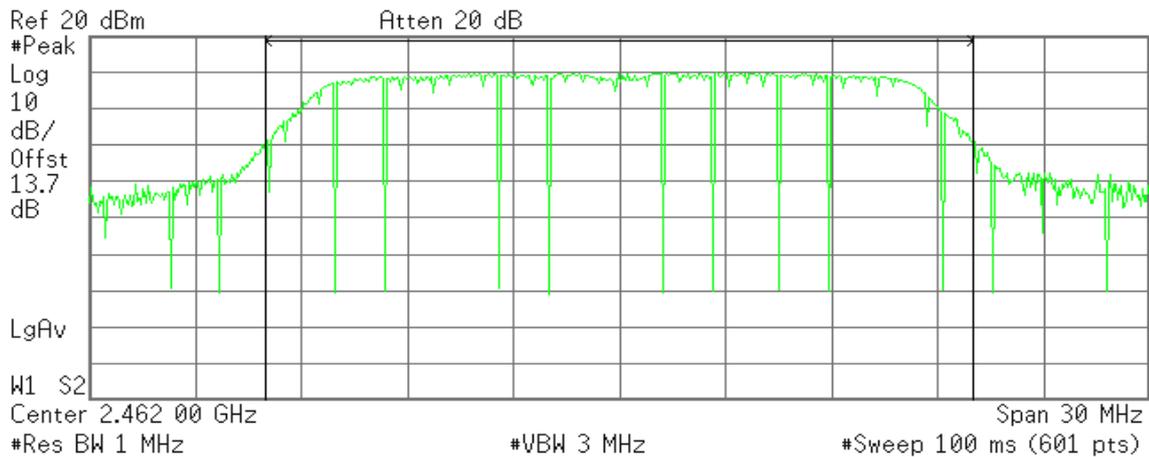

Channel Power

20.70 dBm /20.0000 MHz

Power Spectral Density

-52.31 dBm/Hz




IEEE 802.11n HT 40 MHz mode / Chain 0

Peak Power (CH Low)

Agilent 16:52:02 Jul 9, 2012

R T

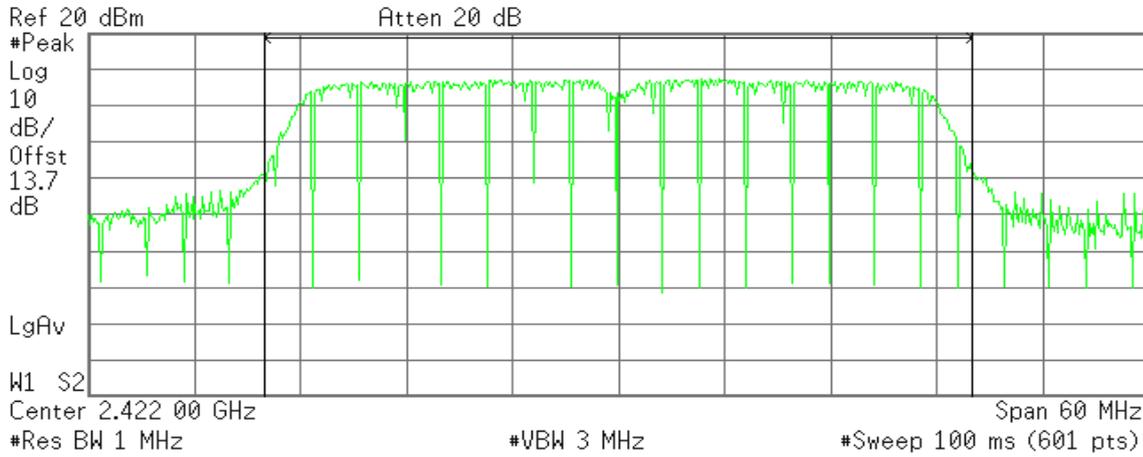

Channel Power

20.83 dBm /40.0000 MHz


Power Spectral Density

-55.19 dBm/Hz

Peak Power (CH Mid)

Agilent 16:38:42 Jul 9, 2012

R T

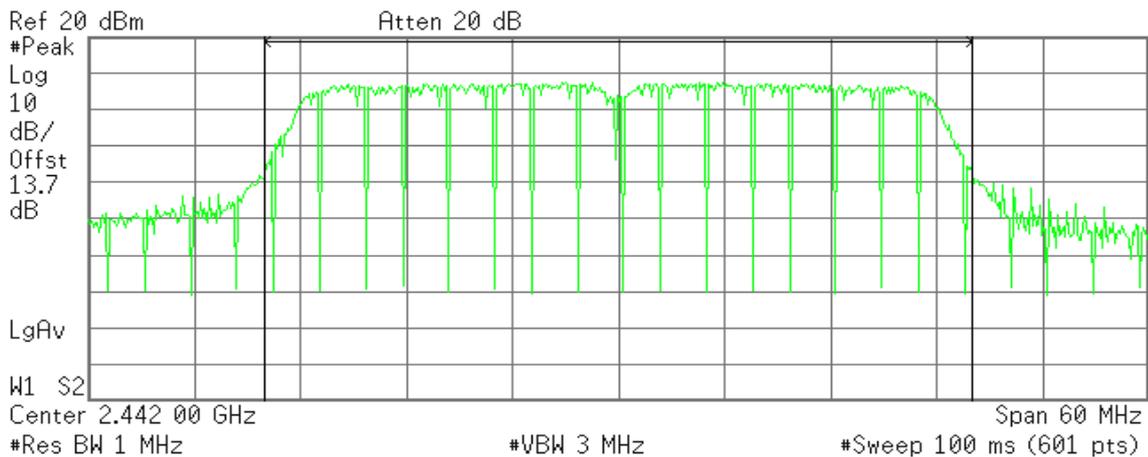

Channel Power

21.01 dBm /40.0000 MHz

Power Spectral Density


-55.01 dBm/Hz



Peak Power (CH High)

Agilent 16:34:06 Jul 9, 2012

R T

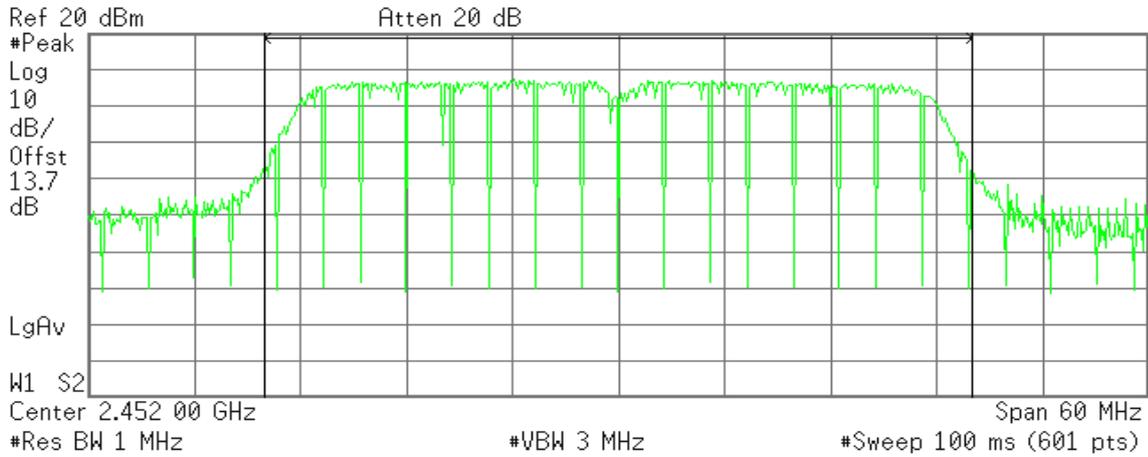

Channel Power

20.61 dBm /40.0000 MHz

Power Spectral Density


-55.42 dBm/Hz

IEEE 802.11n HT 40 MHz mode / Chain 1

Peak Power (CH Low)

Agilent 16:47:35 Jul 9, 2012

R T

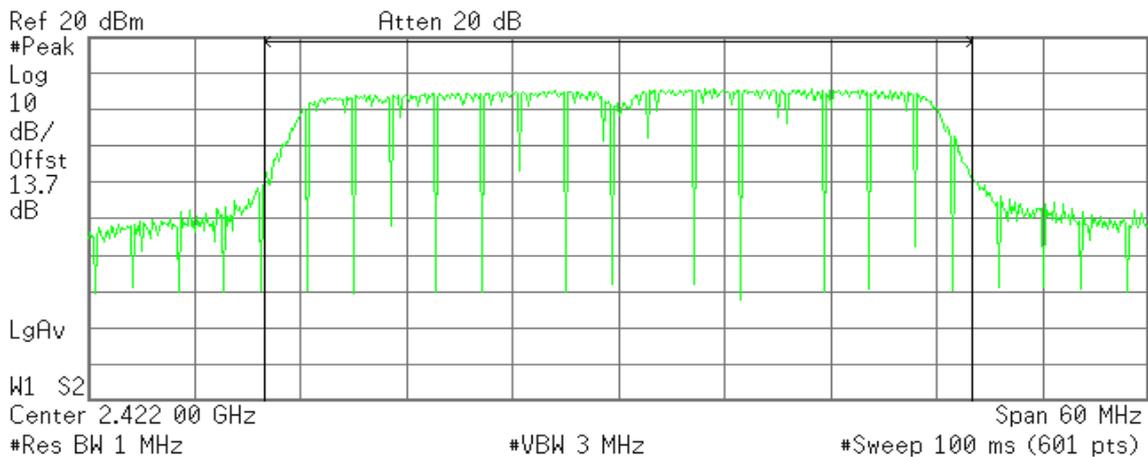

Channel Power

19.12 dBm /40.0000 MHz

Power Spectral Density


-56.90 dBm/Hz



Peak Power (CH Mid)

Agilent 16:42:36 Jul 9, 2012

R T

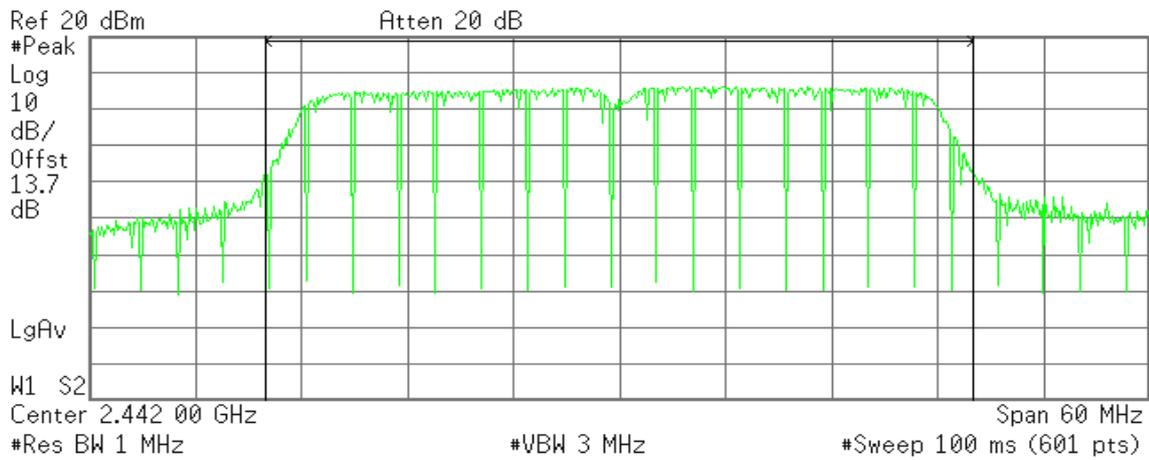

Channel Power

19.67 dBm /40.0000 MHz


Power Spectral Density

-56.35 dBm/Hz

Peak Power (CH High)

Agilent 16:29:49 Jul 9, 2012

R T

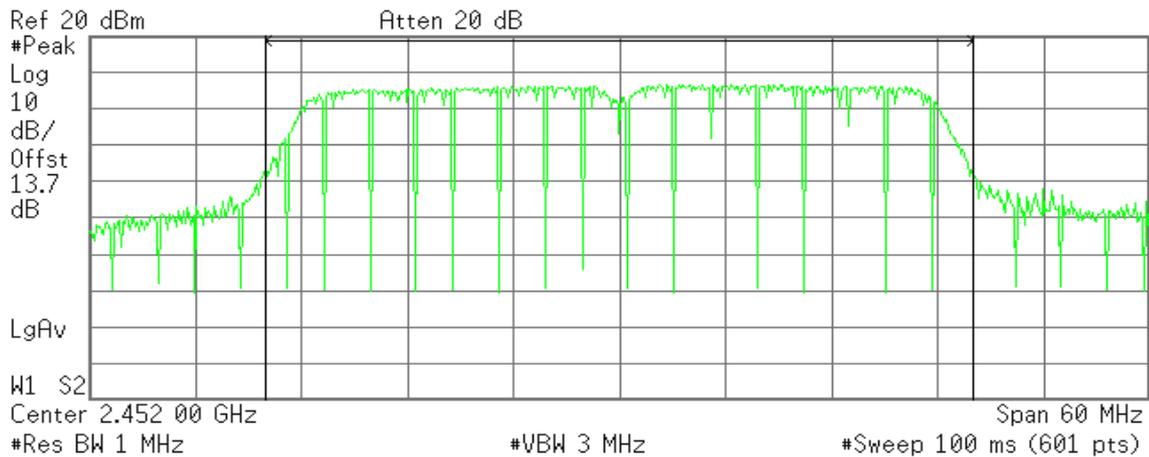

Channel Power

20.21 dBm /40.0000 MHz

Power Spectral Density

-55.81 dBm/Hz




7.3 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated

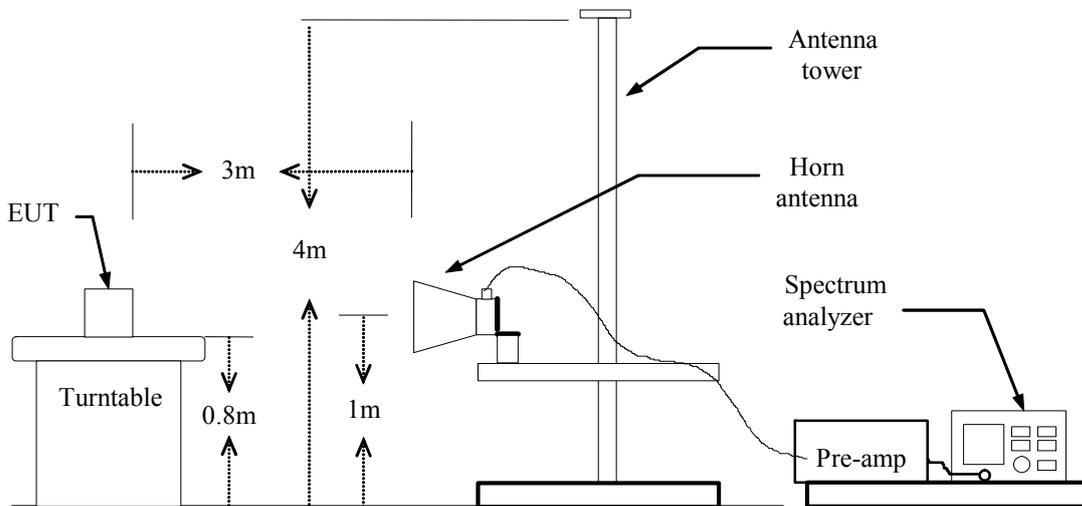

For Conducted

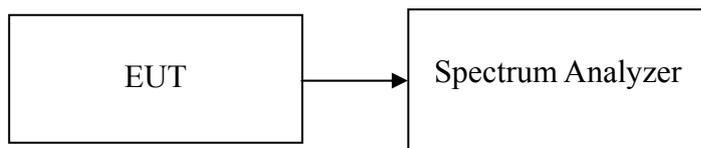



TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 300 kHz. The video bandwidth is set to 300 kHz.

TEST RESULTS


Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

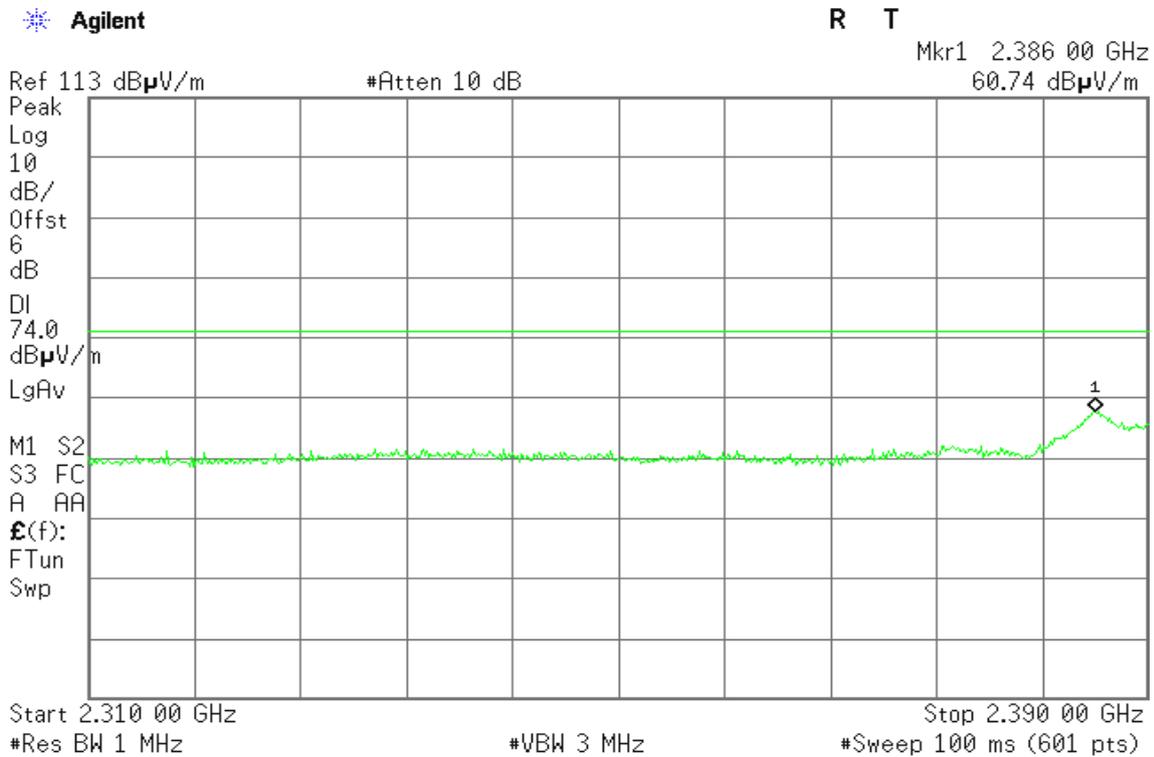

Detector mode: Average


Polarity: Vertical

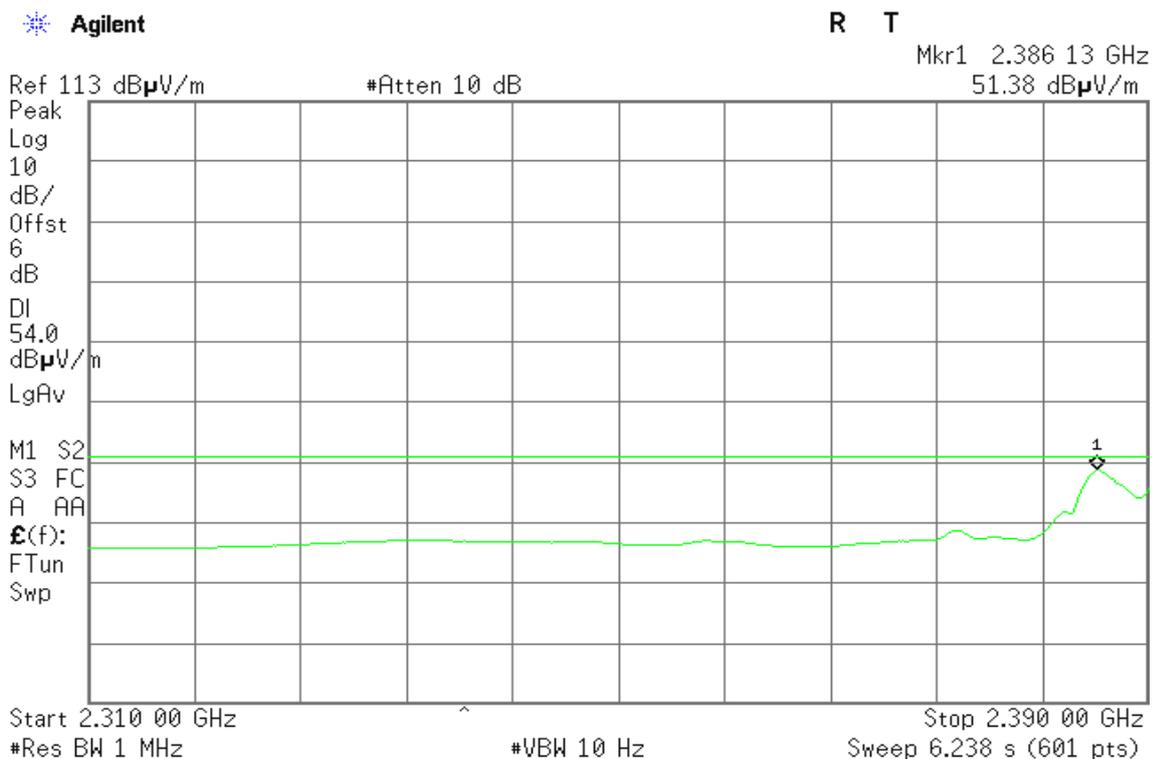




Detector mode: Peak

Polarity: Horizontal

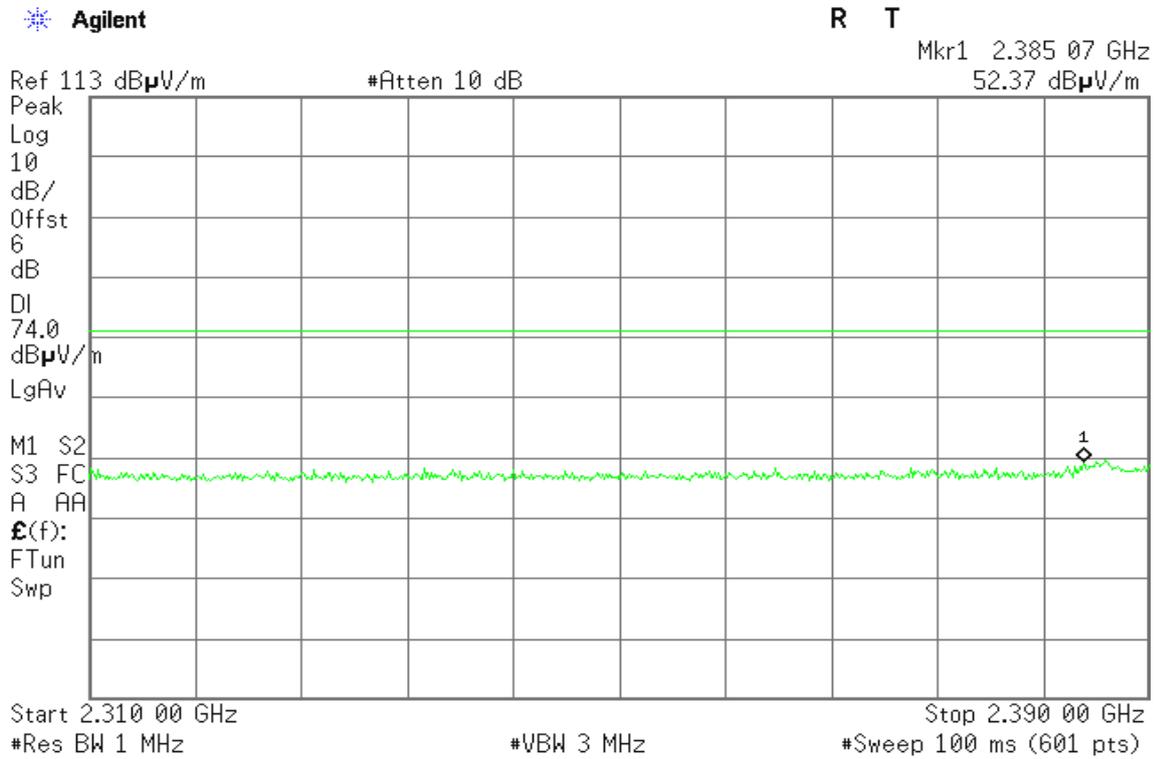

Detector mode: Average

Polarity: Horizontal

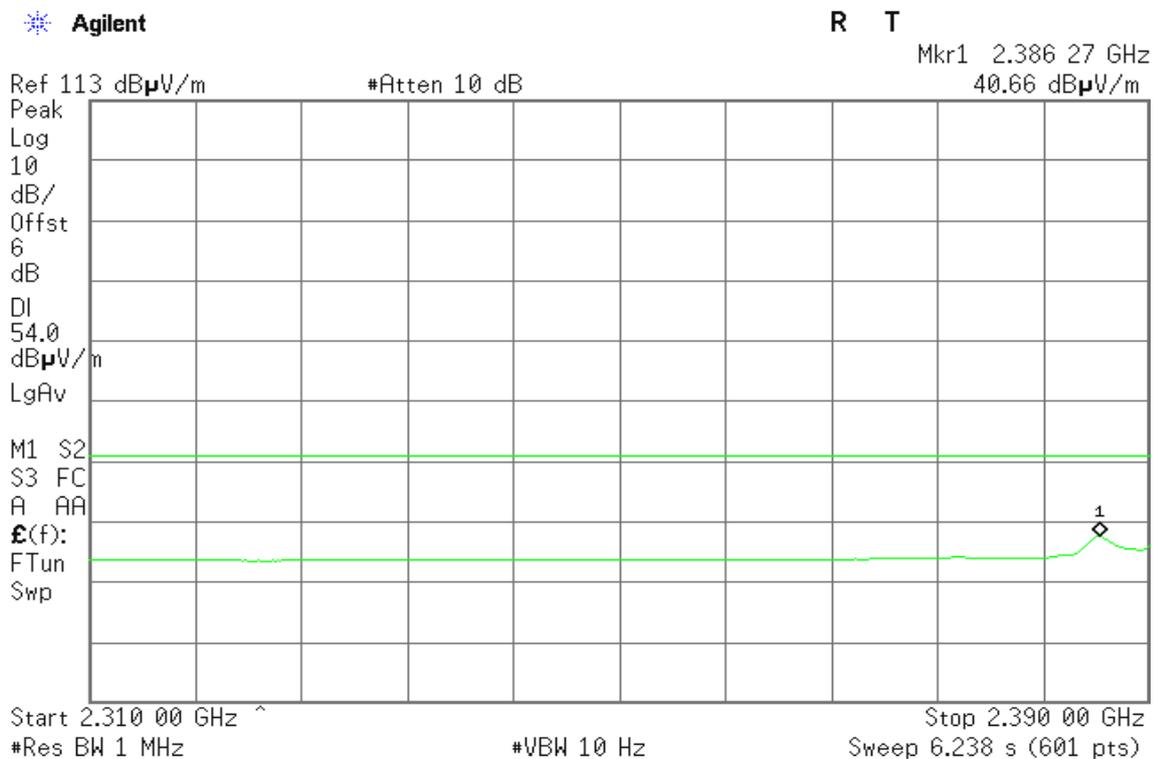




Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent

T

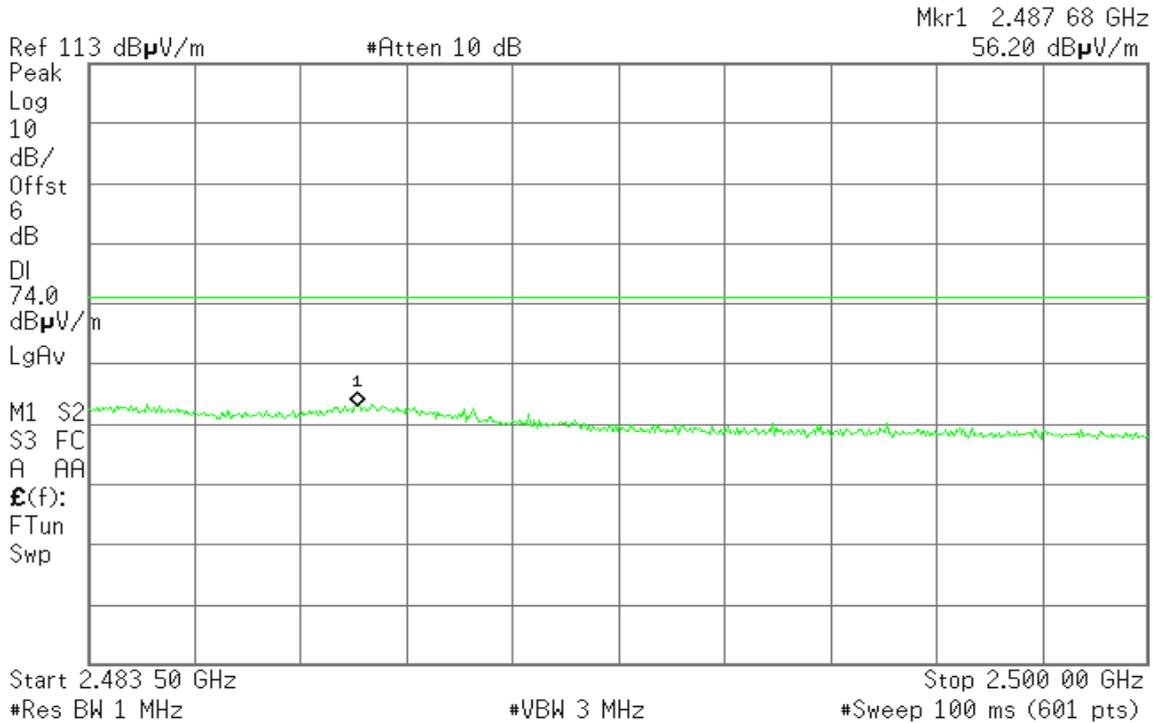


Detector mode: Average

Polarity: Vertical

Agilent

T

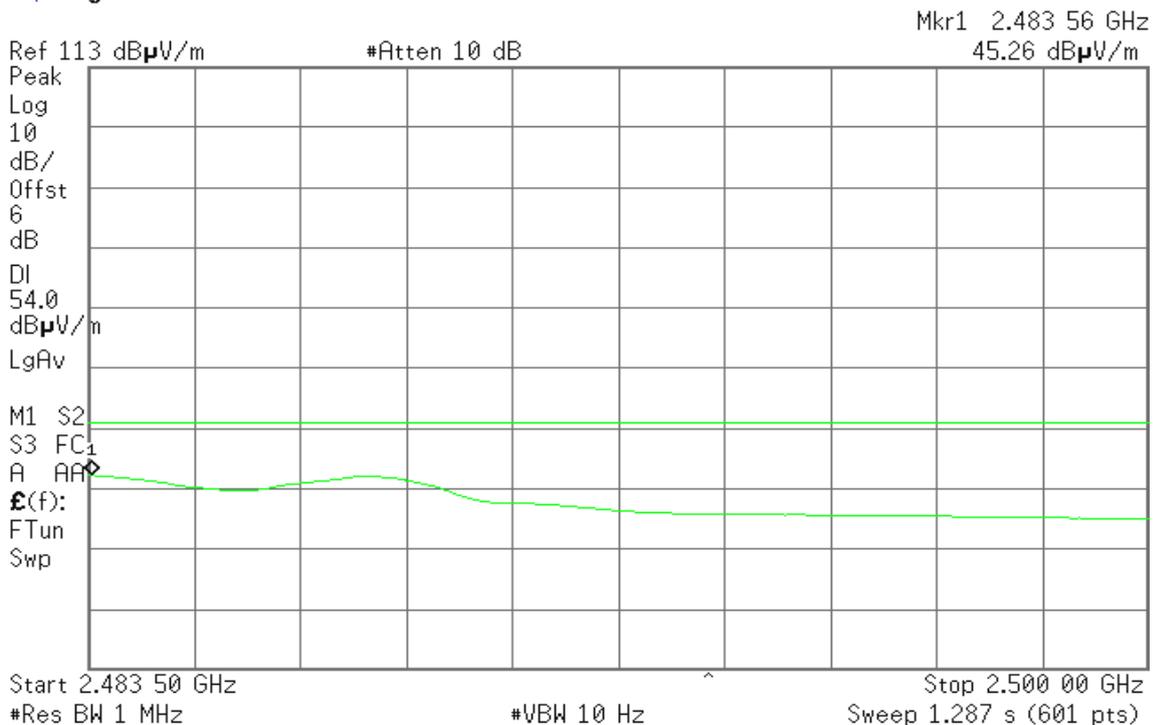



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.487 46 GHz
52.75 dB μ V/m

Ref 113 dB μ V/m

#Atten 10 dB

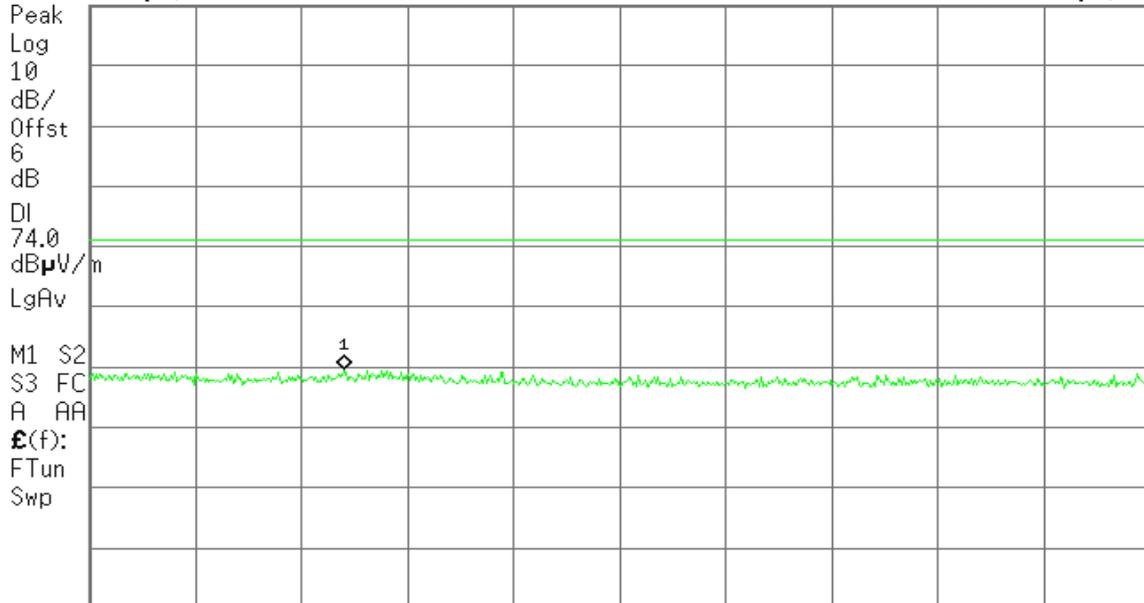

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 56 GHz
39.20 dB μ V/m

Ref 113 dB μ V/m

#Atten 10 dB

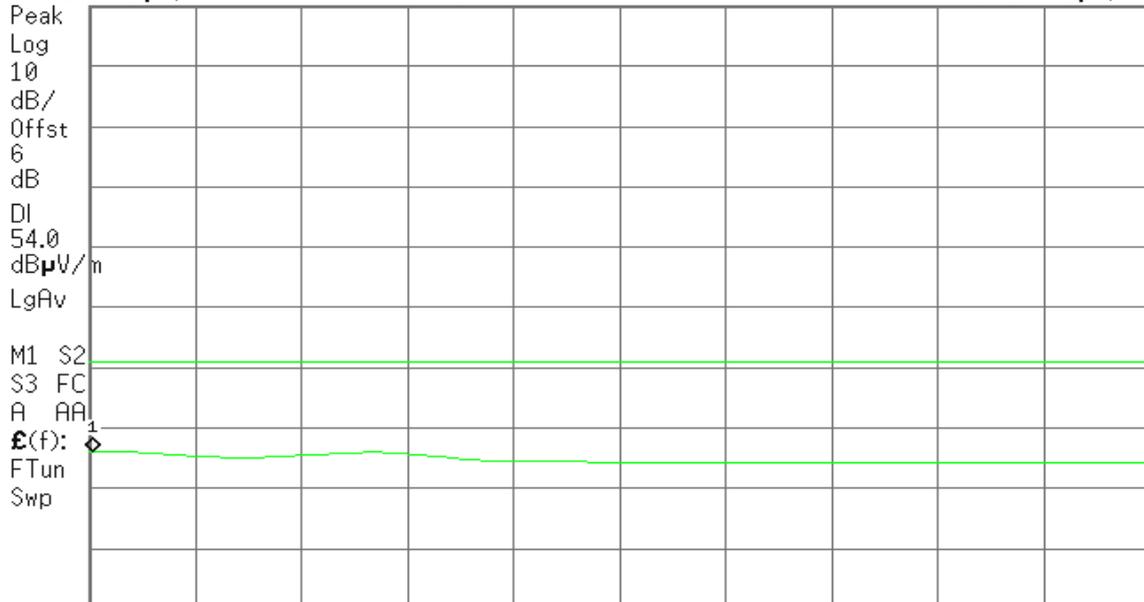

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 1.287 s (601 pts)



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

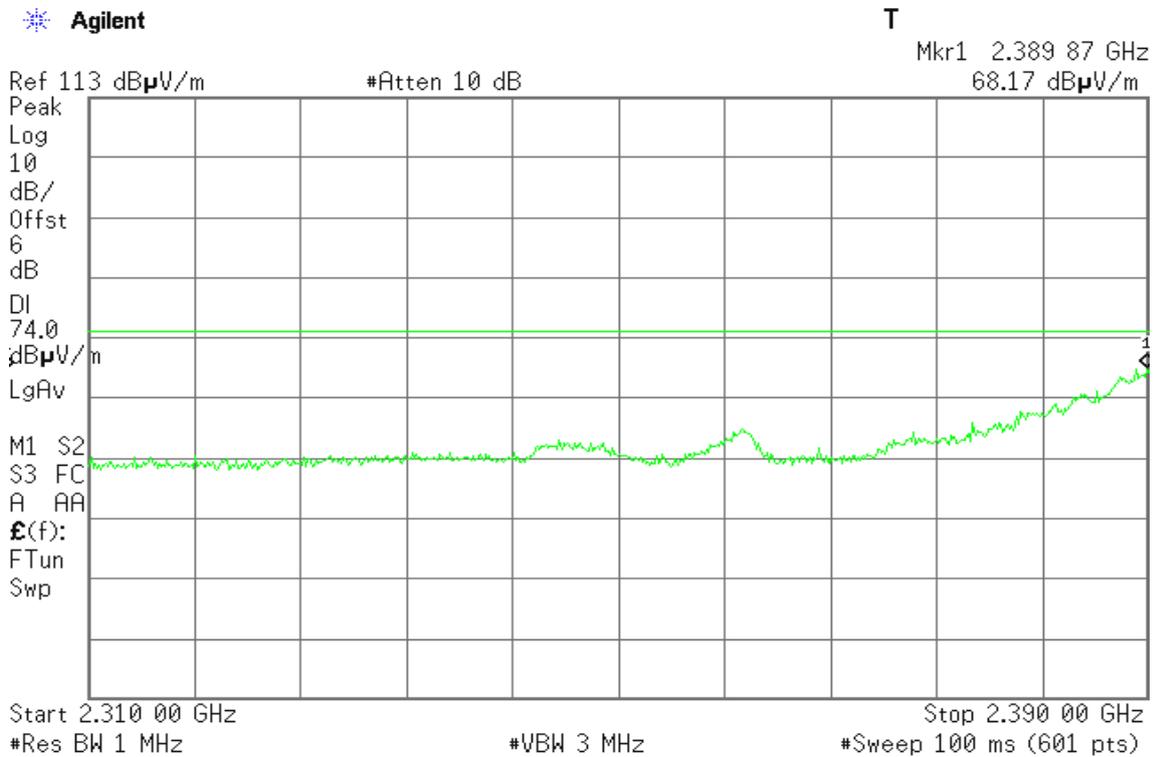

Detector mode: Average

Polarity: Vertical

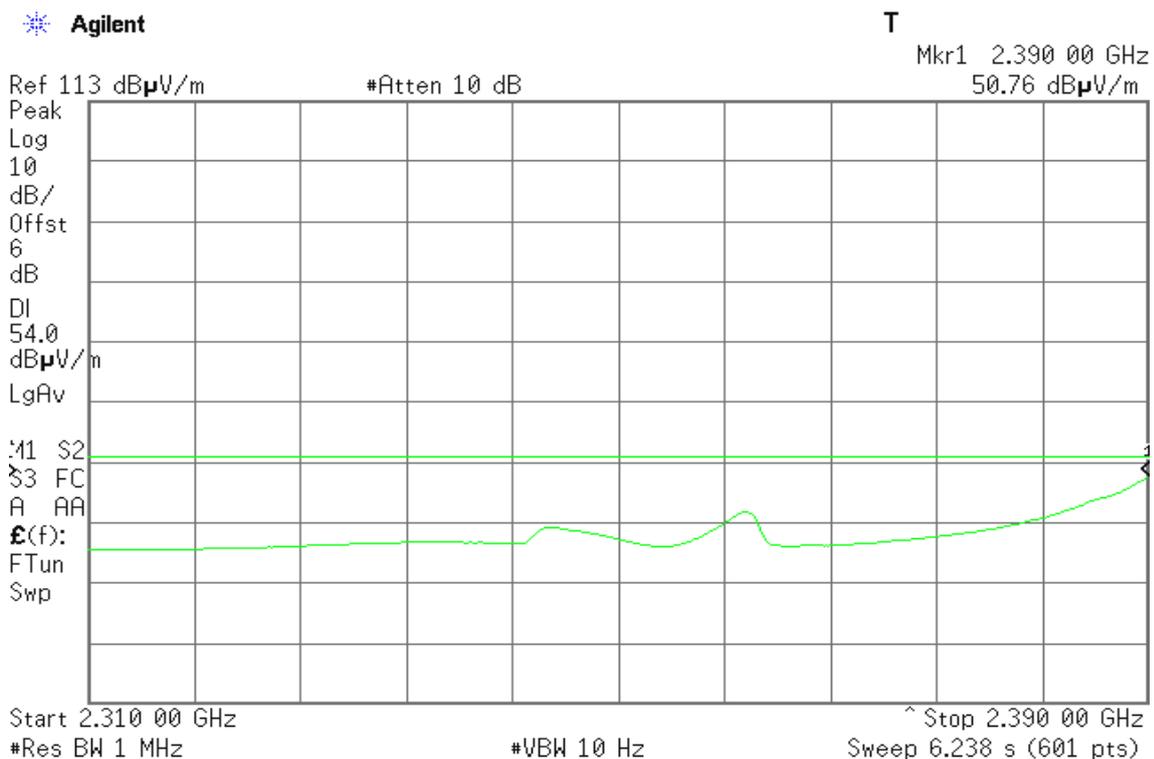



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.388 80 GHz
55.75 dB μ V/m

Ref 113 dB μ V/m

#Atten 10 dB

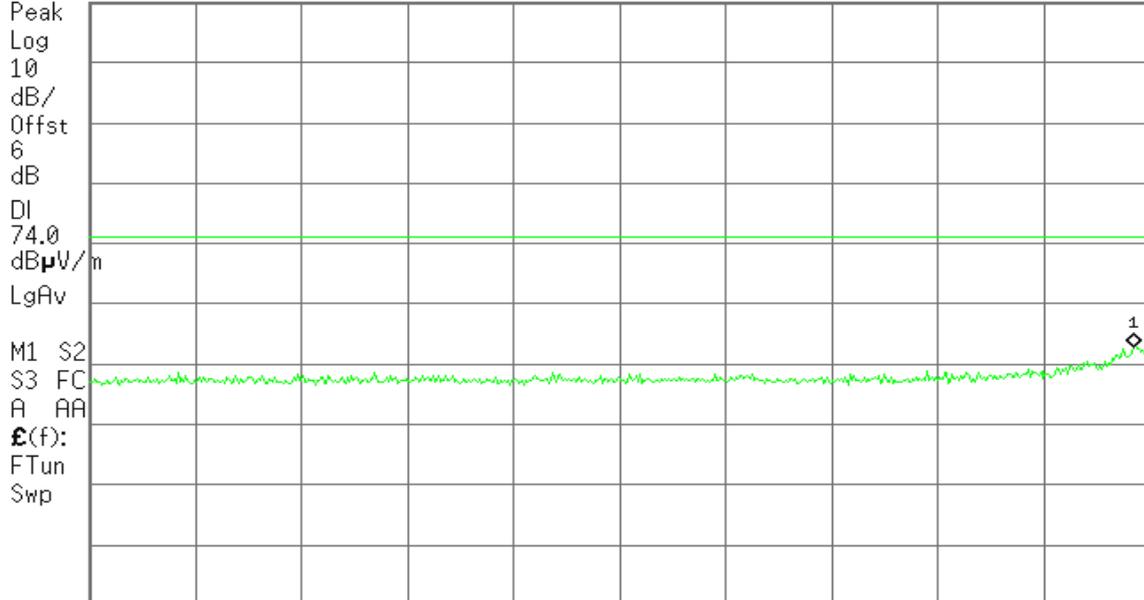

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.390 00 GHz
40.40 dB μ V/m

Ref 113 dB μ V/m

#Atten 10 dB

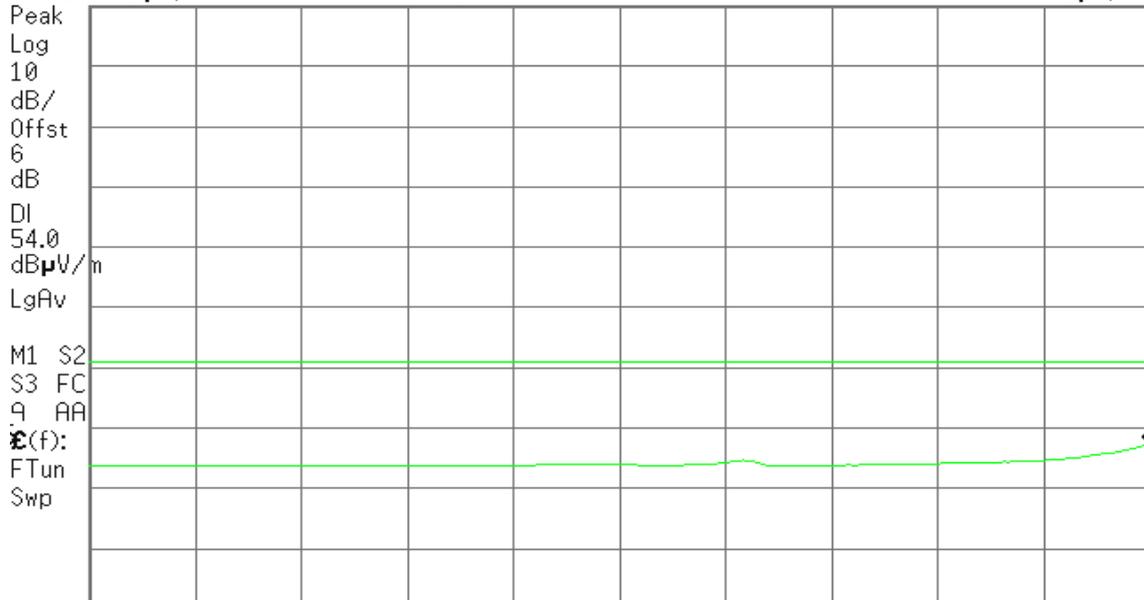

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 6.238 s (601 pts)



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

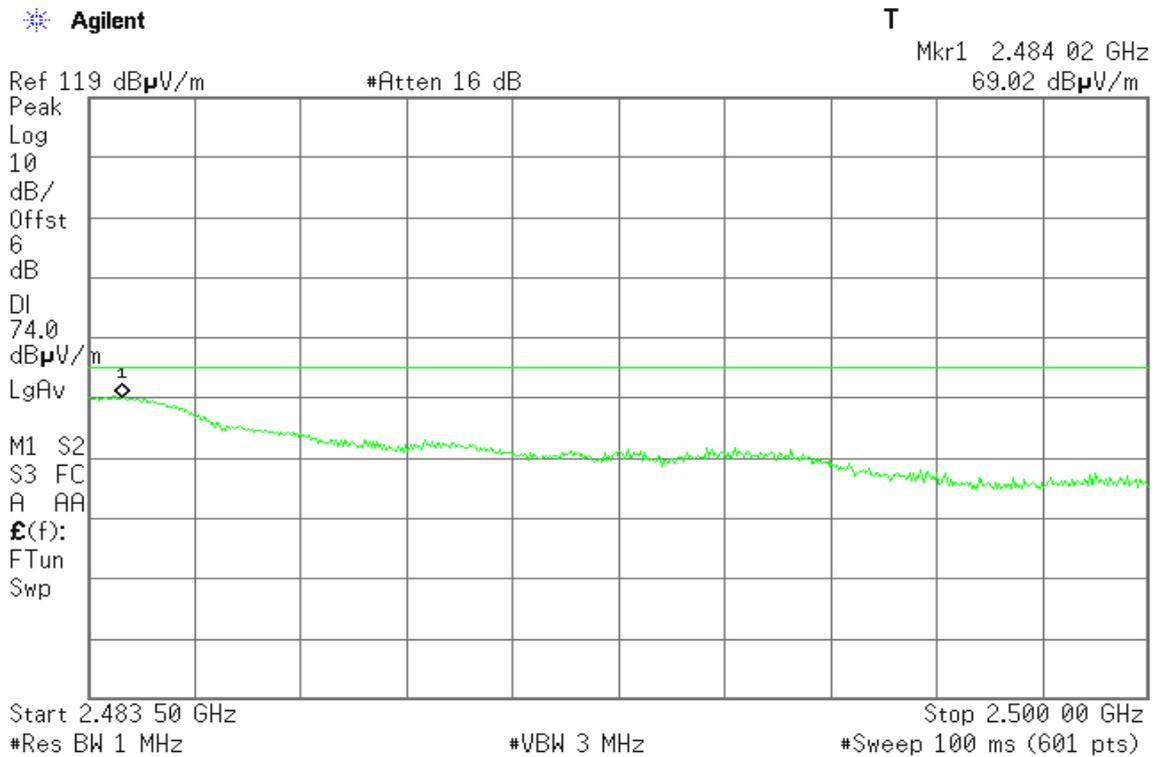

Detector mode: Average

Polarity: Vertical

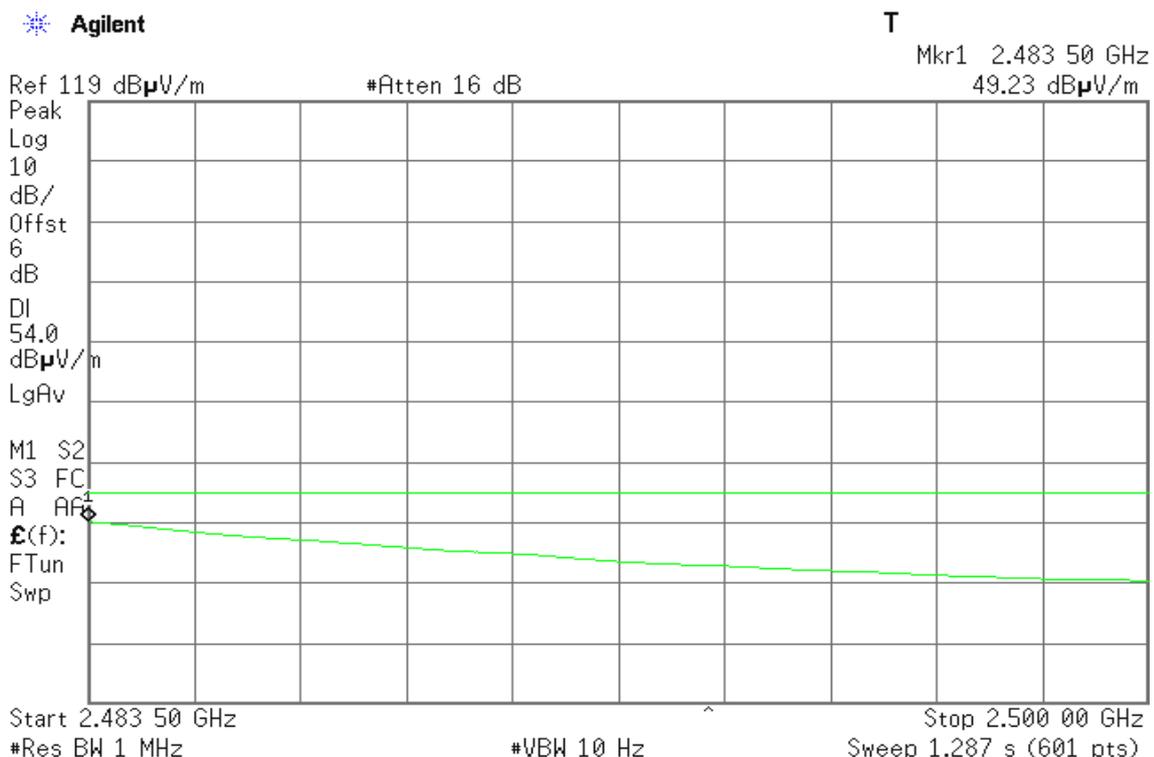



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 80 GHz
61.99 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

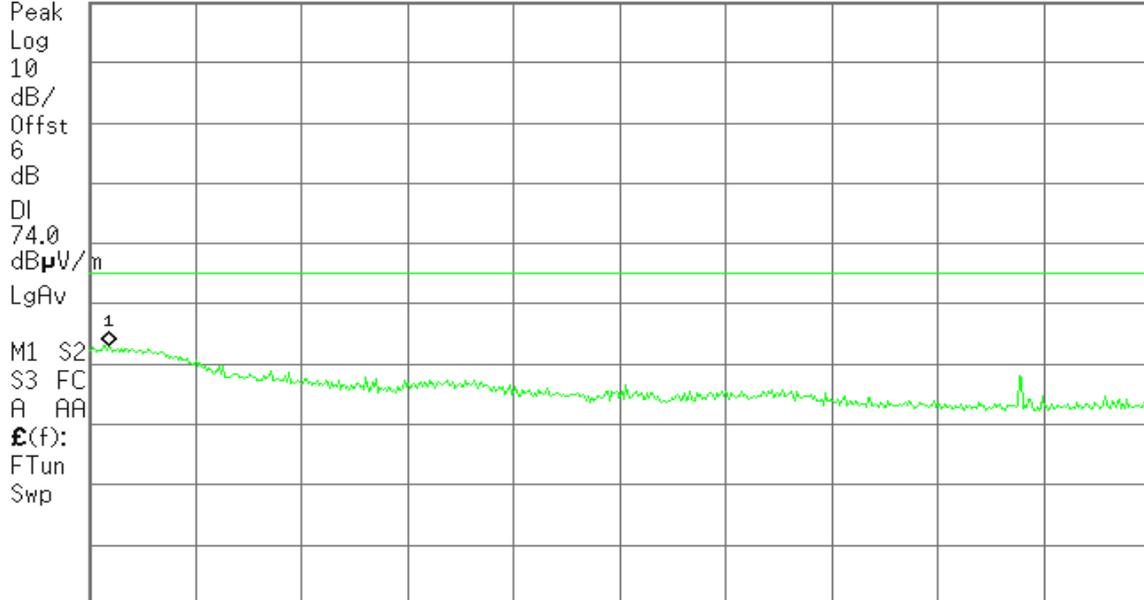

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
41.71 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

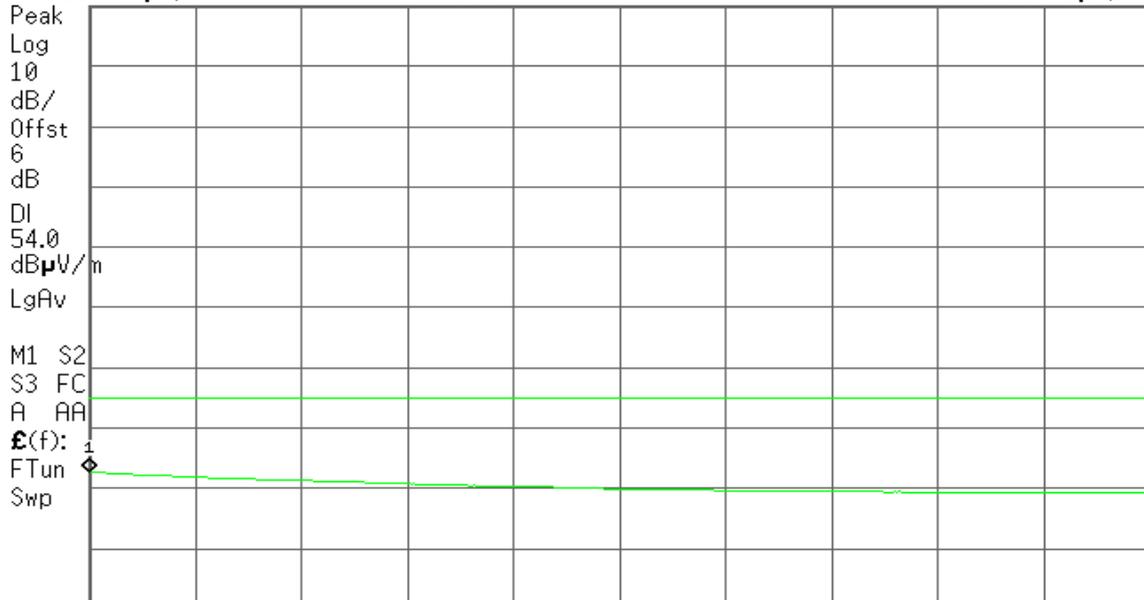

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 1.287 s (601 pts)



Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)


Detector mode: Peak

Polarity: Vertical

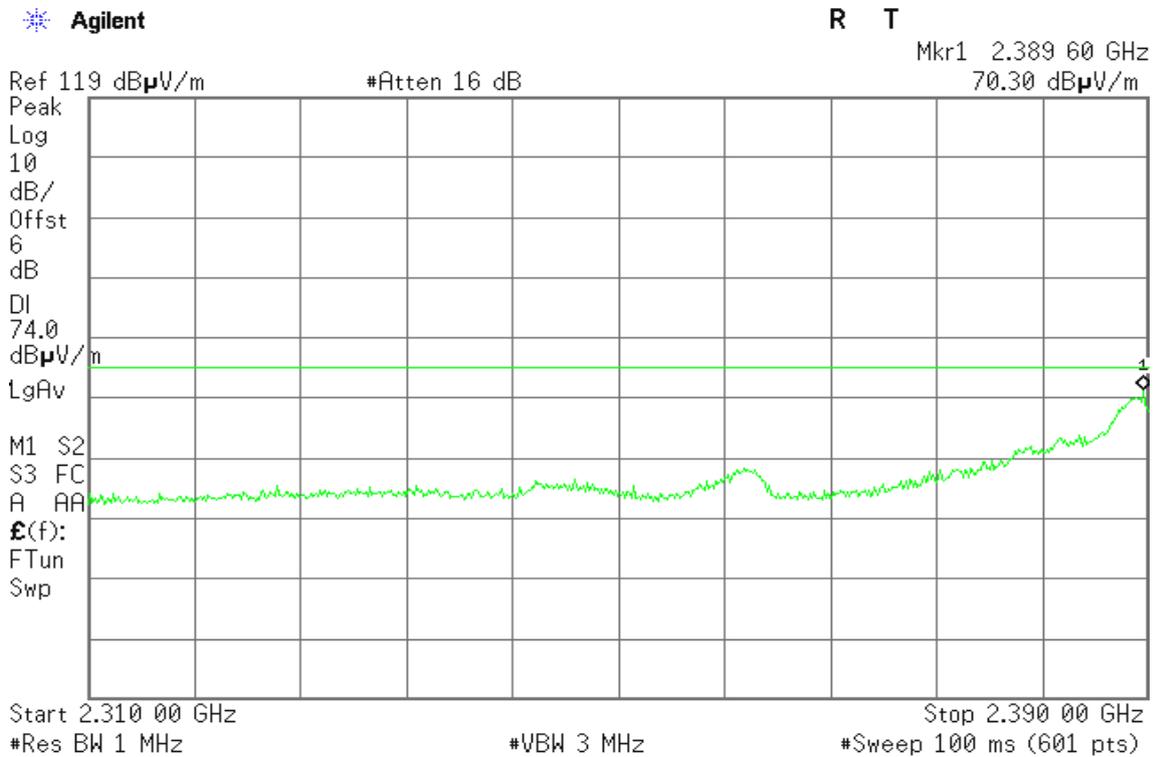

Detector mode: Average

Polarity: Vertical

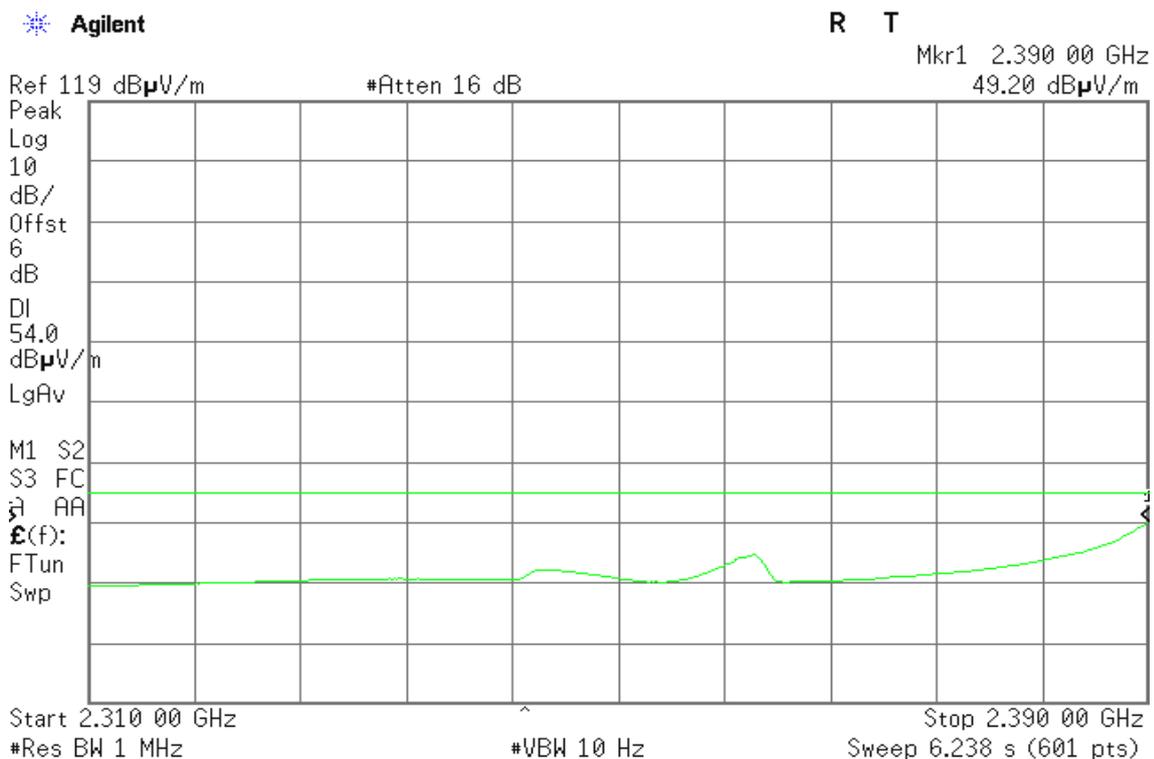



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.388 80 GHz
58.23 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

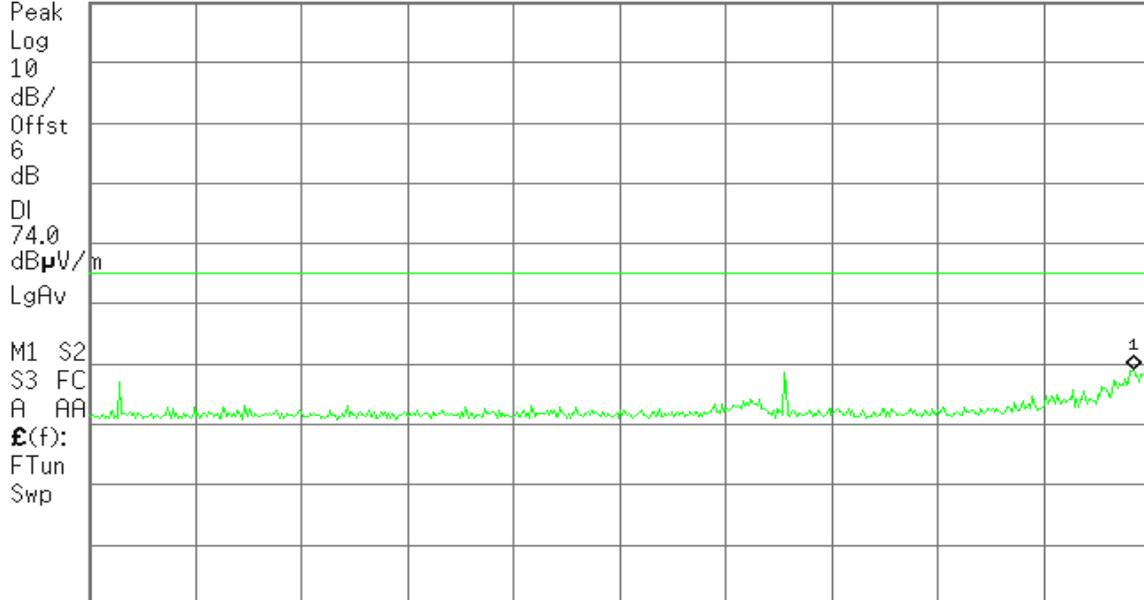

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.390 00 GHz
40.76 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

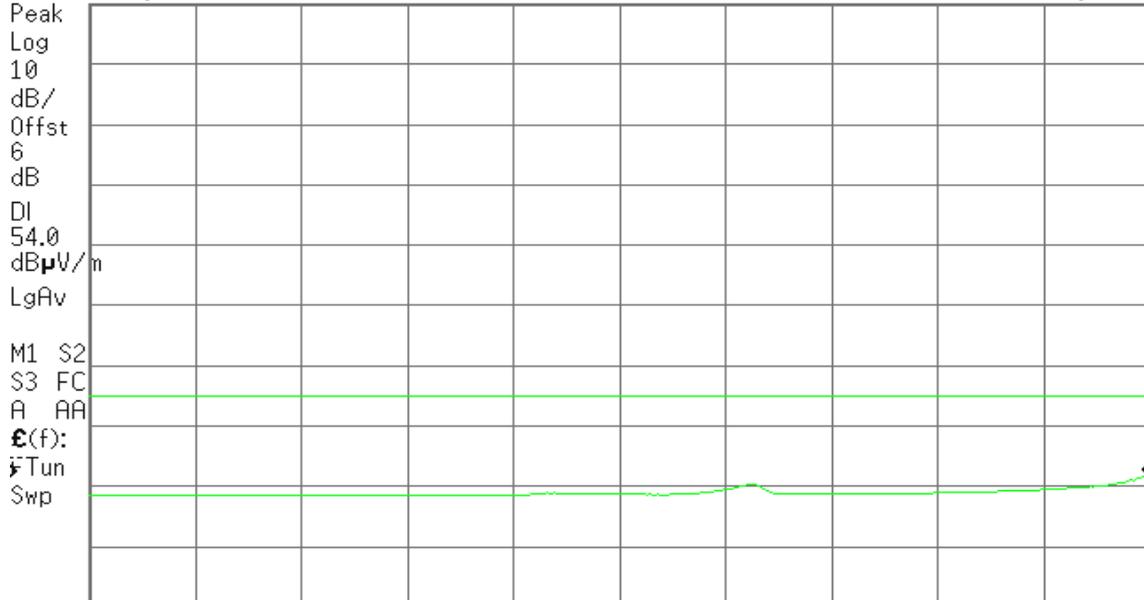

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 6.238 s (601 pts)



Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)


Detector mode: Peak

Polarity: Vertical

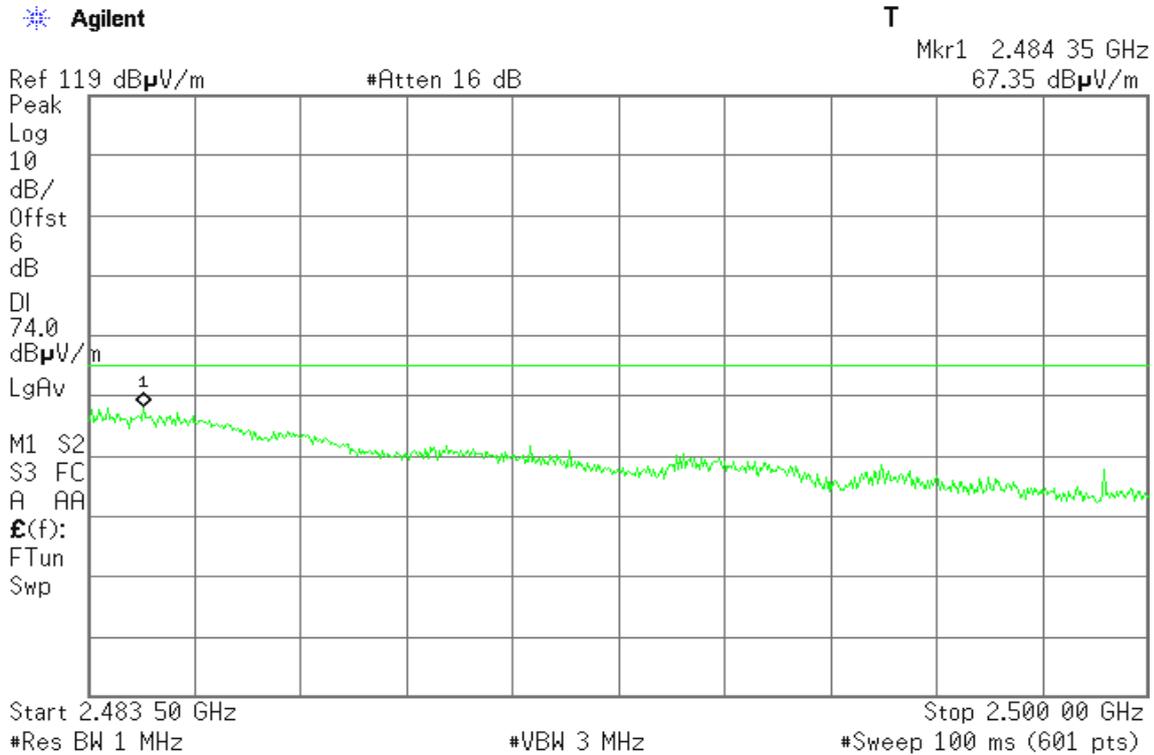

Detector mode: Average

Polarity: Vertical

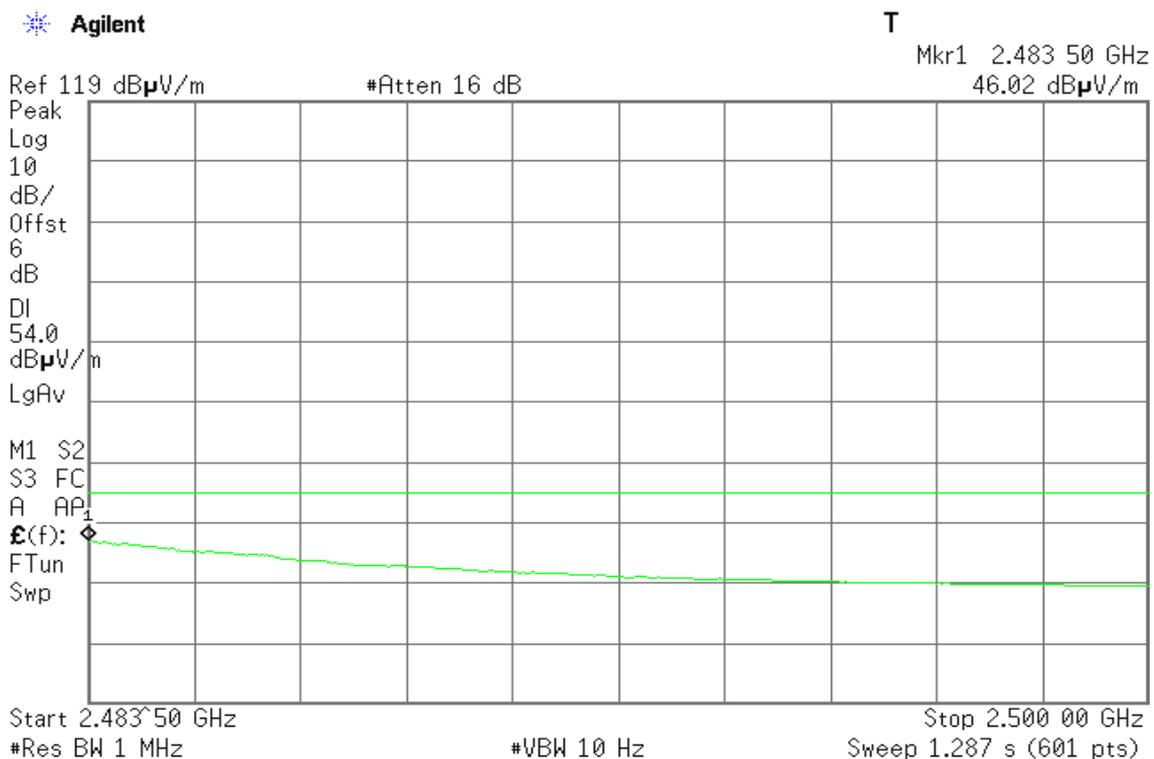




Detector mode: Peak

Polarity: Horizontal

Agilent

T

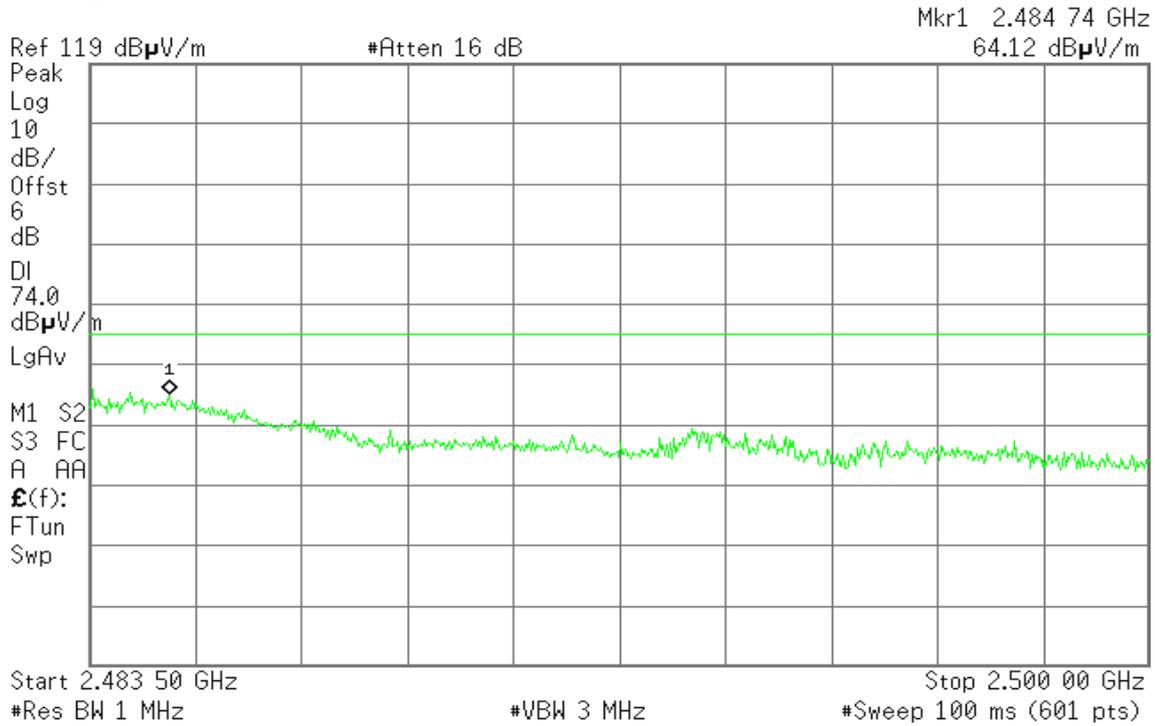


Detector mode: Average

Polarity: Horizontal

Agilent

T

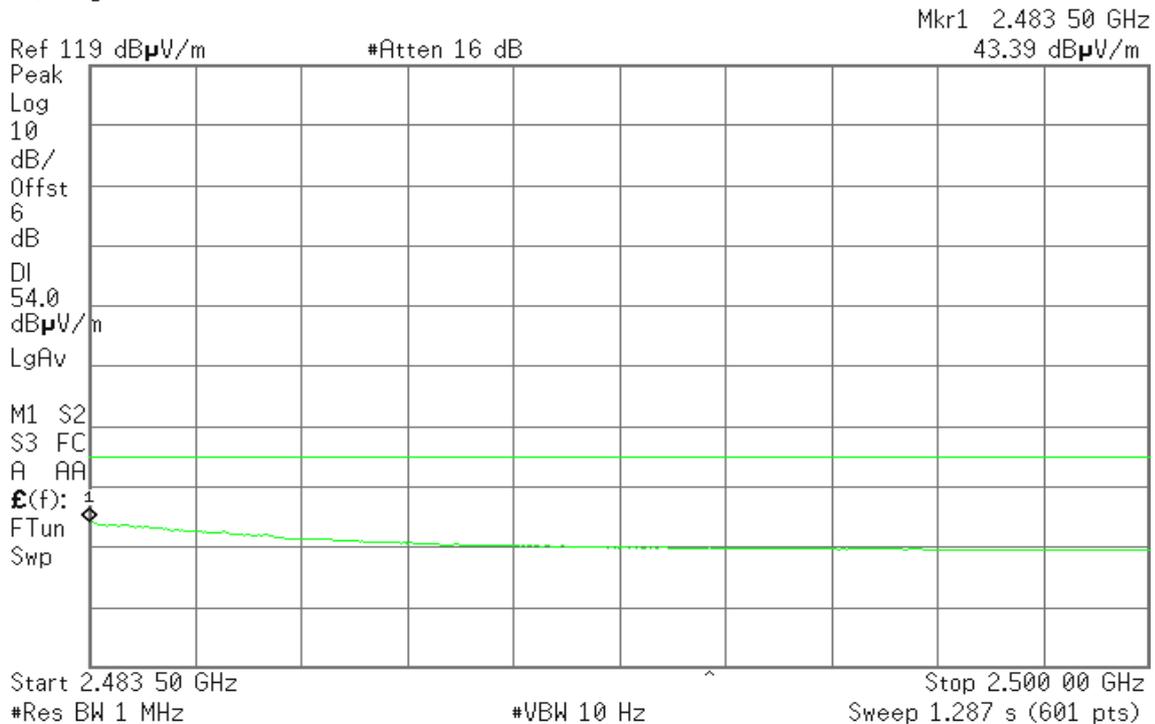




Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)


Detector mode: Peak

Polarity: Vertical

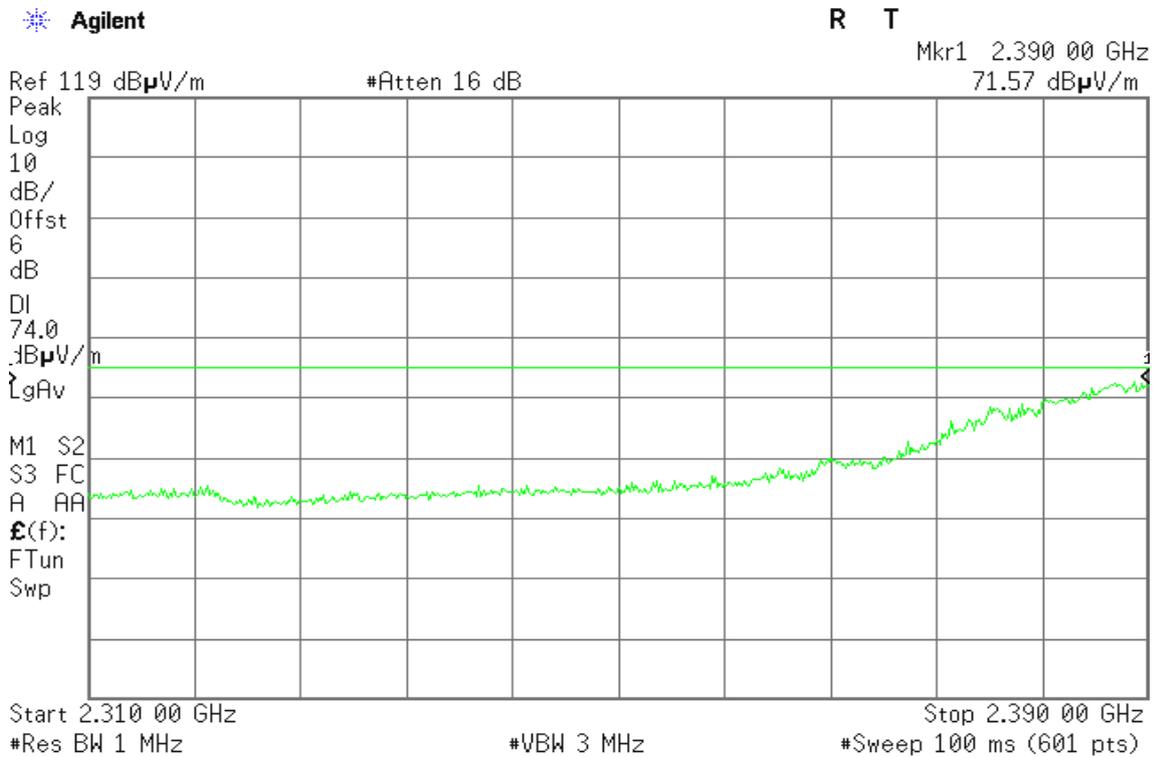

Detector mode: Average

Polarity: Vertical

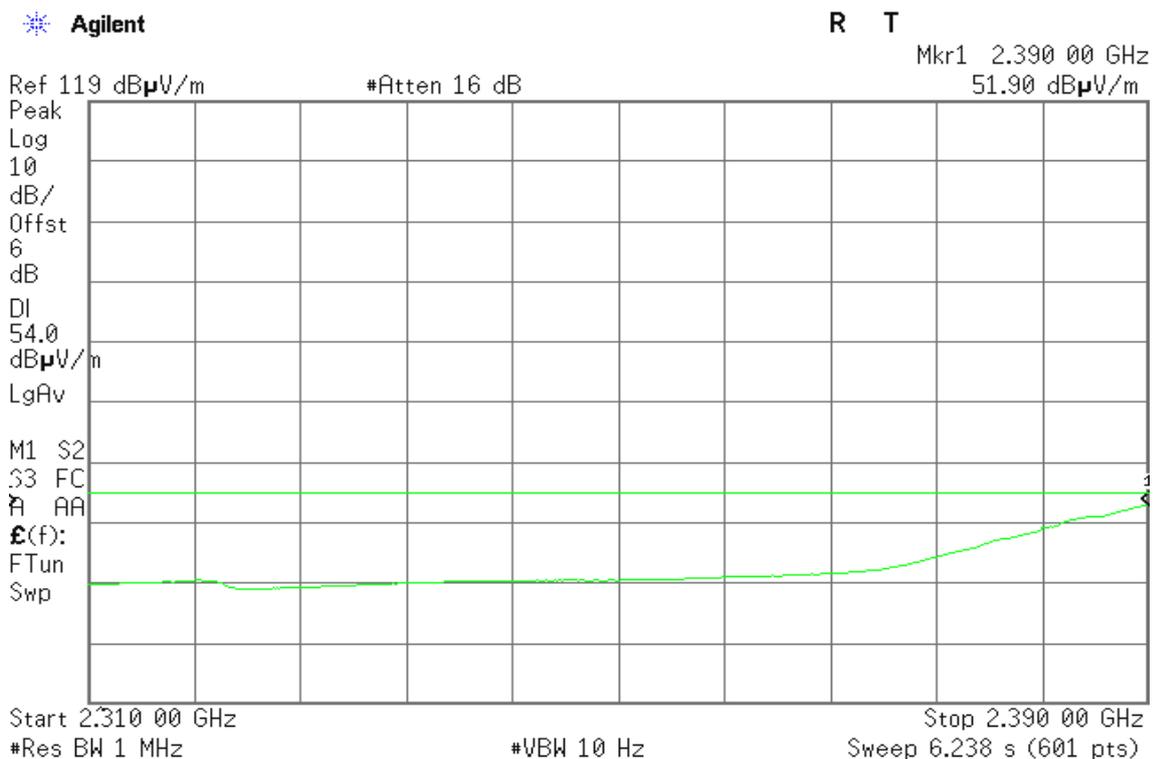



Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.387 33 GHz
62.51 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB



Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.389 60 GHz
44.59 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

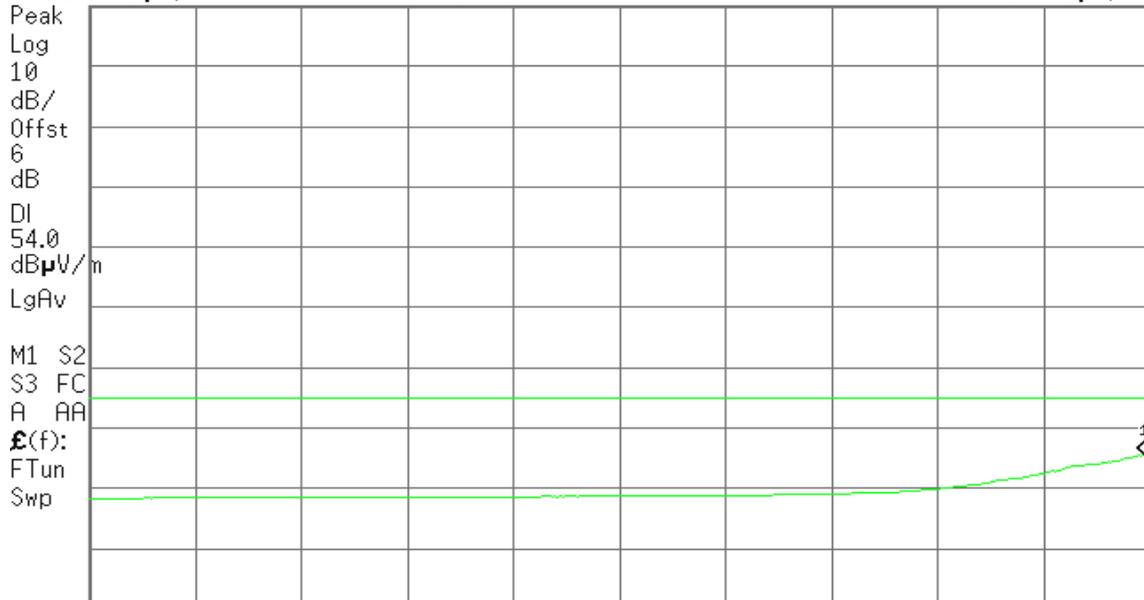

Start 2.310 00 GHz

Stop 2.390 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 6.238 s (601 pts)



Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)


Detector mode: Peak

Polarity: Vertical

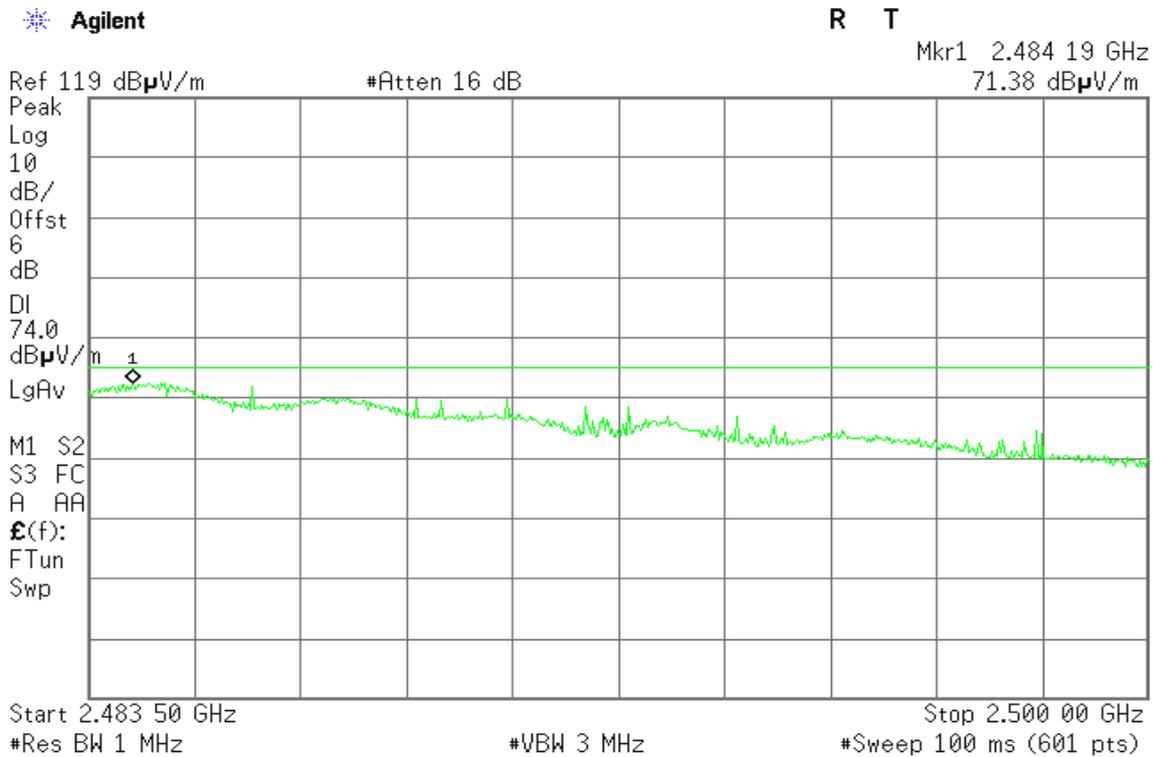

Detector mode: Average

Polarity: Vertical

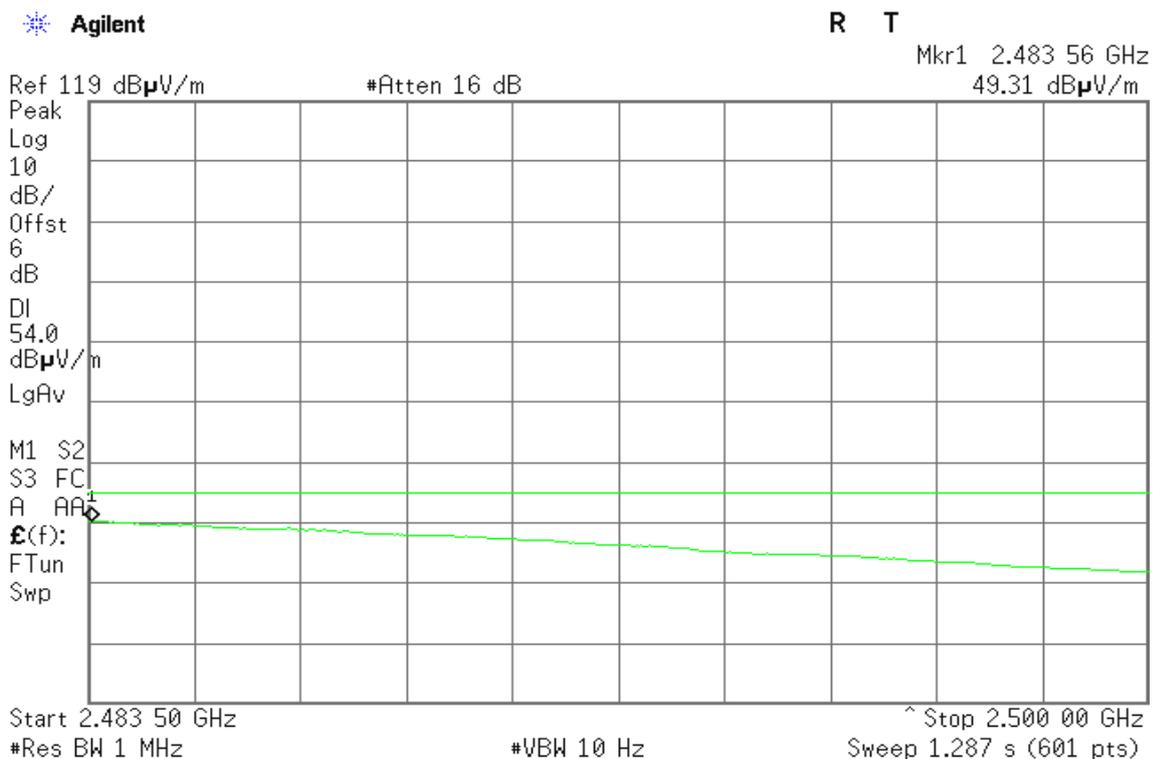



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.484 44 GHz
68.93 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

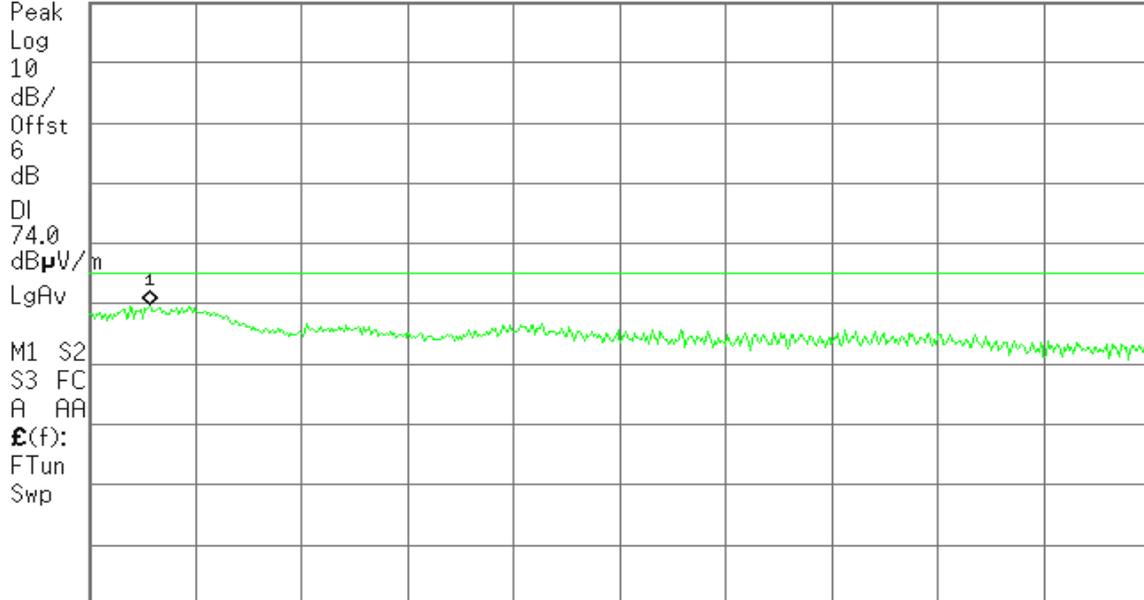

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
47.85 dB μ V/m

Ref 119 dB μ V/m

#Atten 16 dB

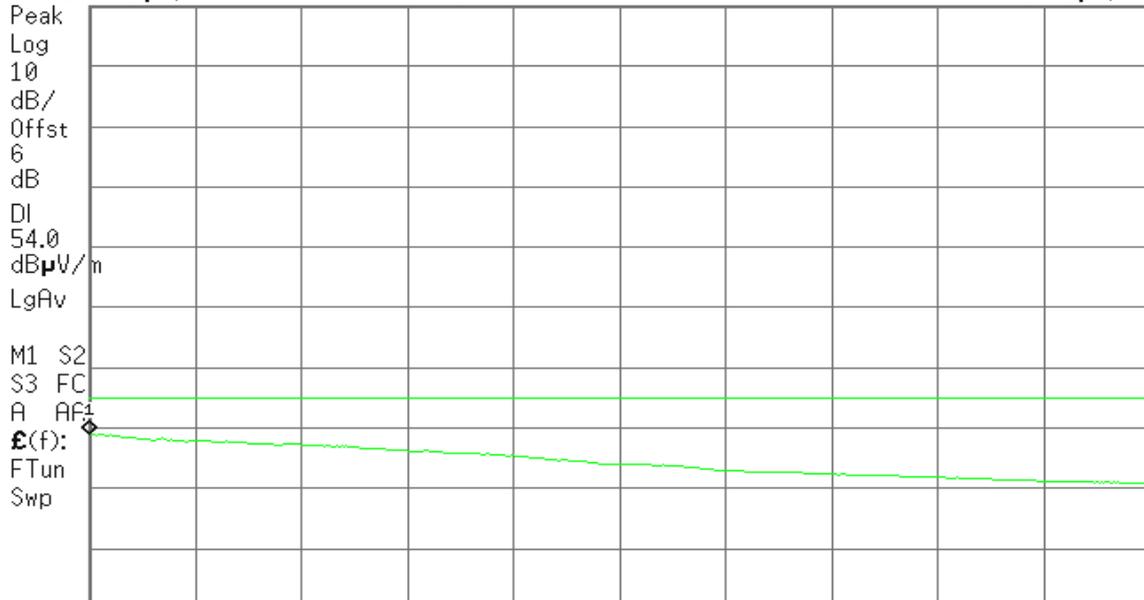

Start 2.483 50 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 1.287 s (601 pts)




Test Plot

Conducted Band Edges (IEEE 802.11b mode / CH Low)

Agilent 11:06:24 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-48.51 dBm

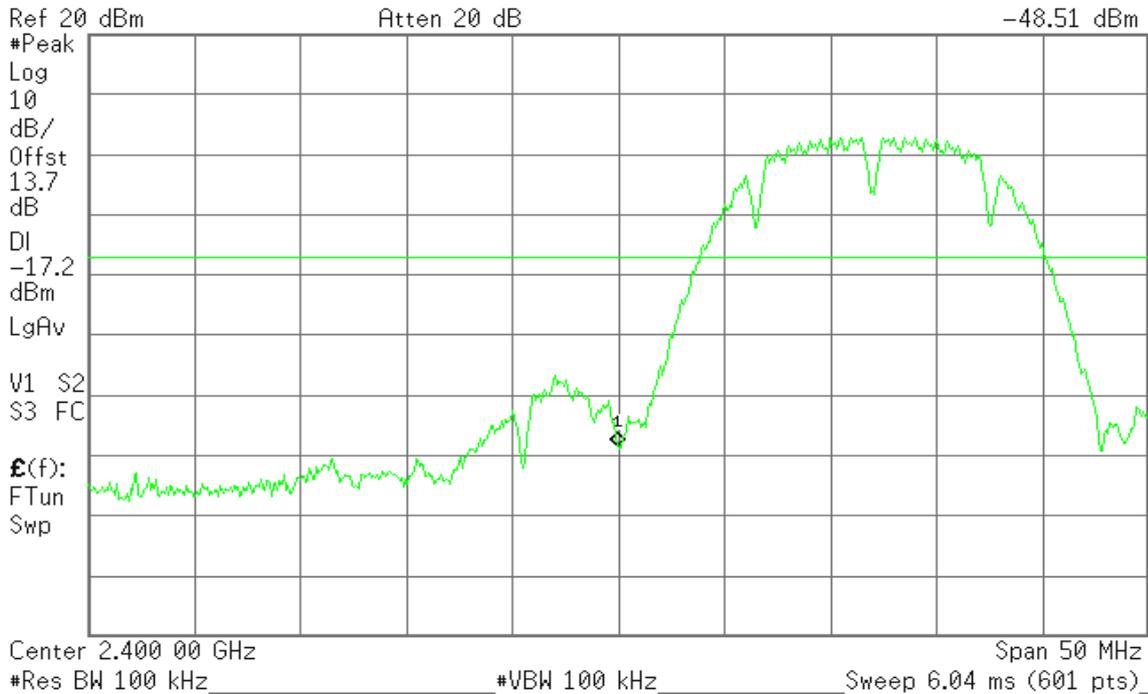


Conducted Band Edges (IEEE 802.11b mode / CH High)

Agilent 10:51:10 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-53.88 dBm

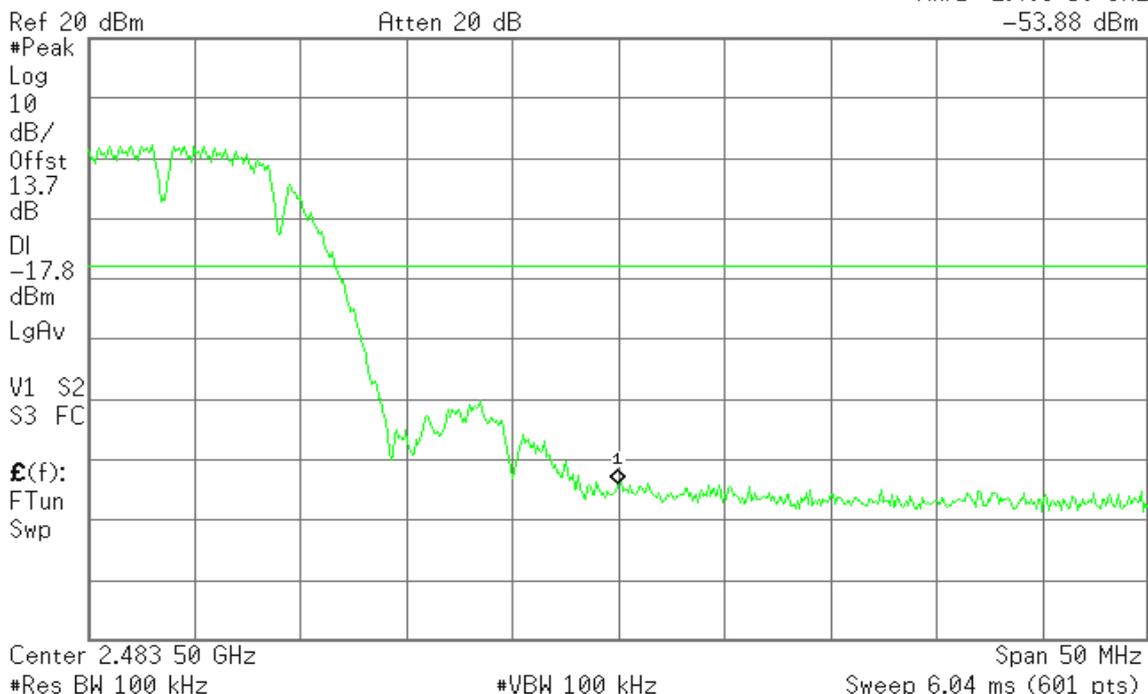




Conducted Band Edges (IEEE 802.11g mode / CH Low)

Agilent 11:34:06 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-29.09 dBm

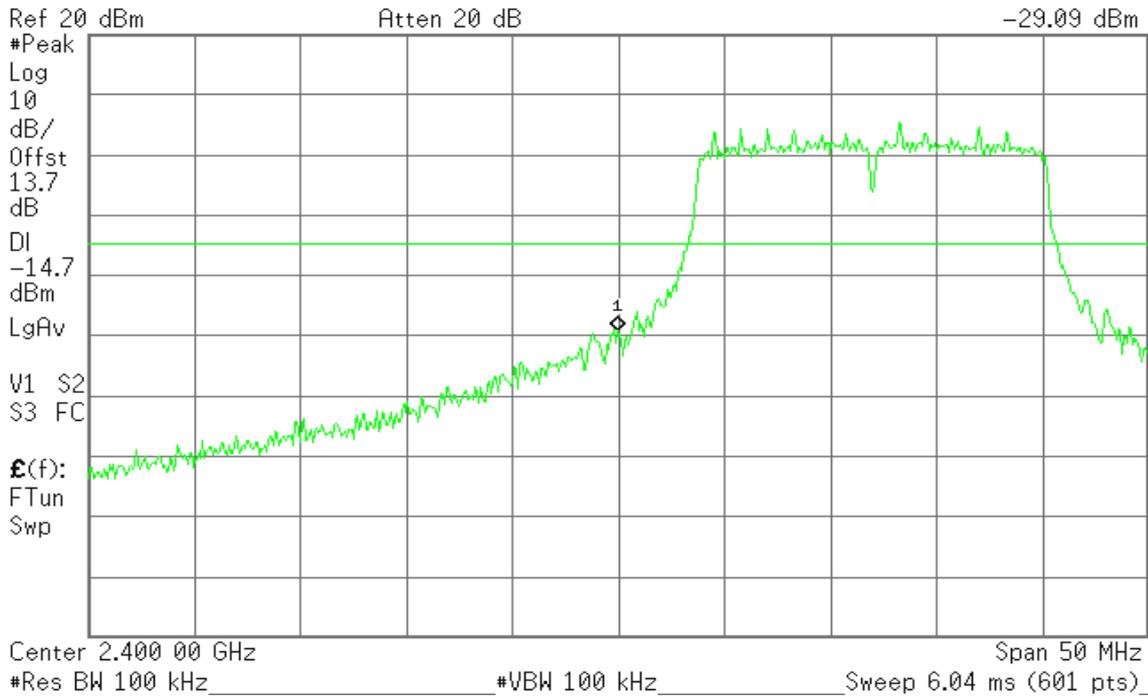


Conducted Band Edges (IEEE 802.11g mode / CH High)

Agilent 11:22:51 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-43.84 dBm

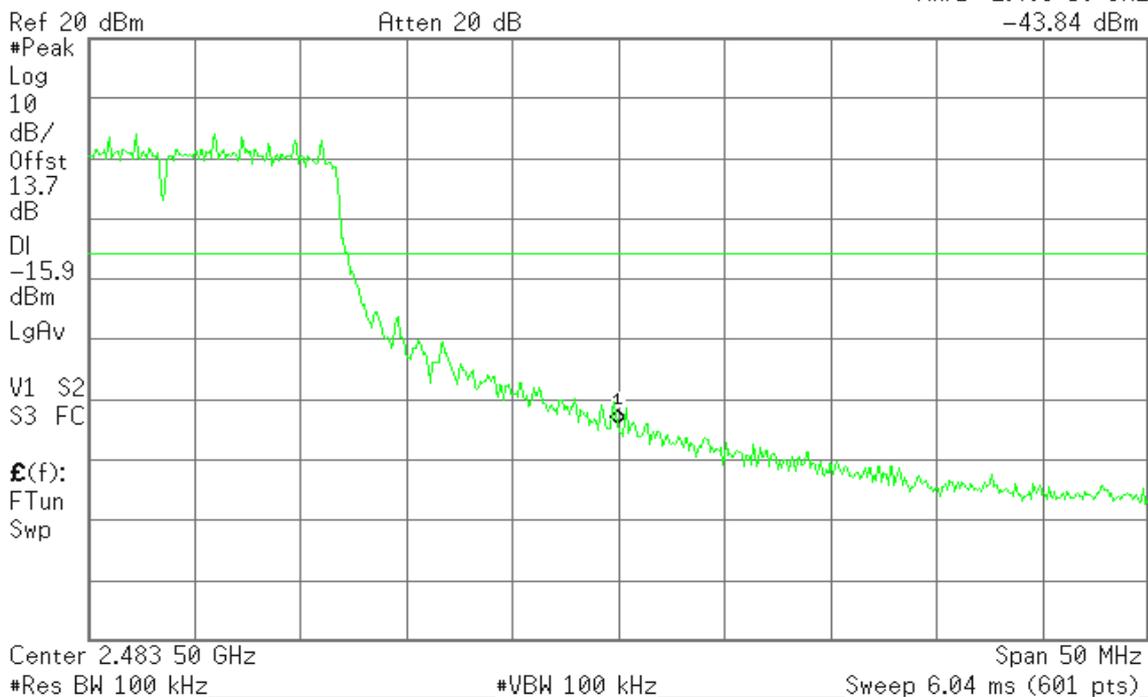




Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / Chain 0)

Agilent 15:20:43 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-34.03 dBm

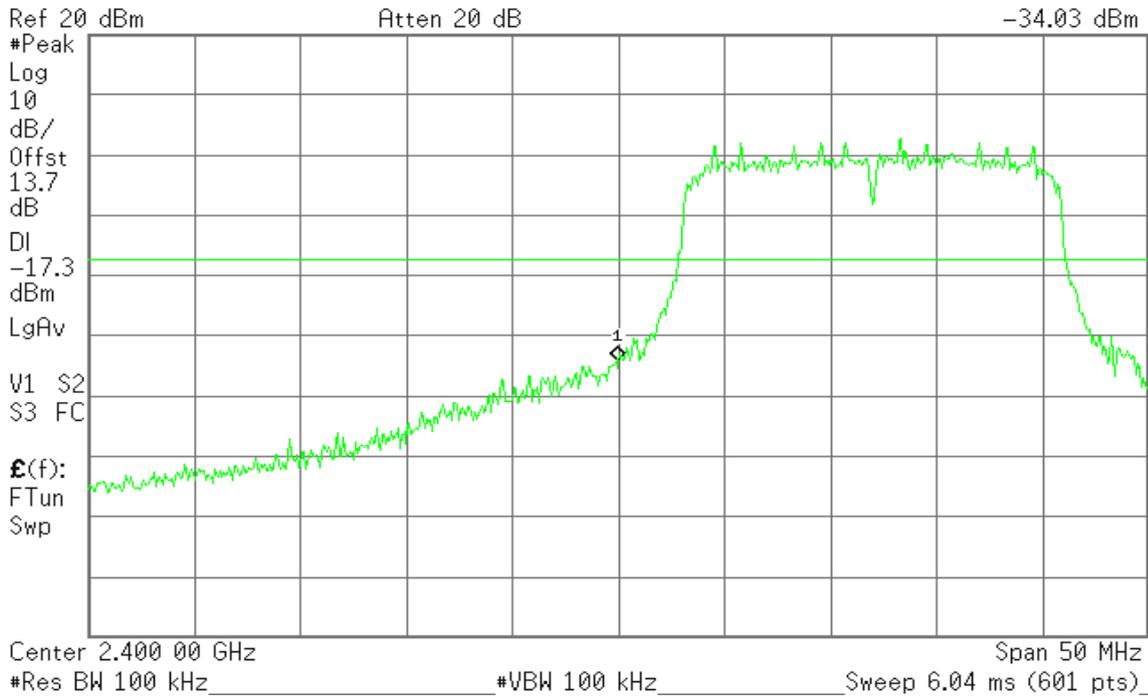


Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / Chain 0)

Agilent 14:53:06 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-46.65 dBm

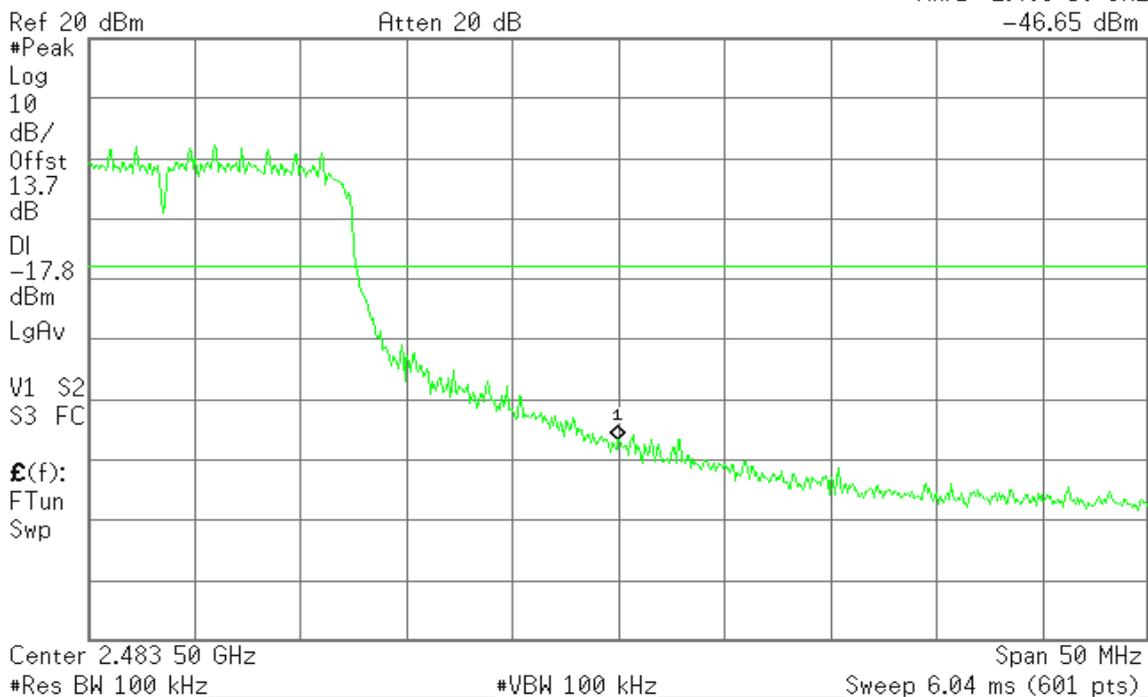




Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / Chain 1)

Agilent 15:26:45 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-36.91 dBm

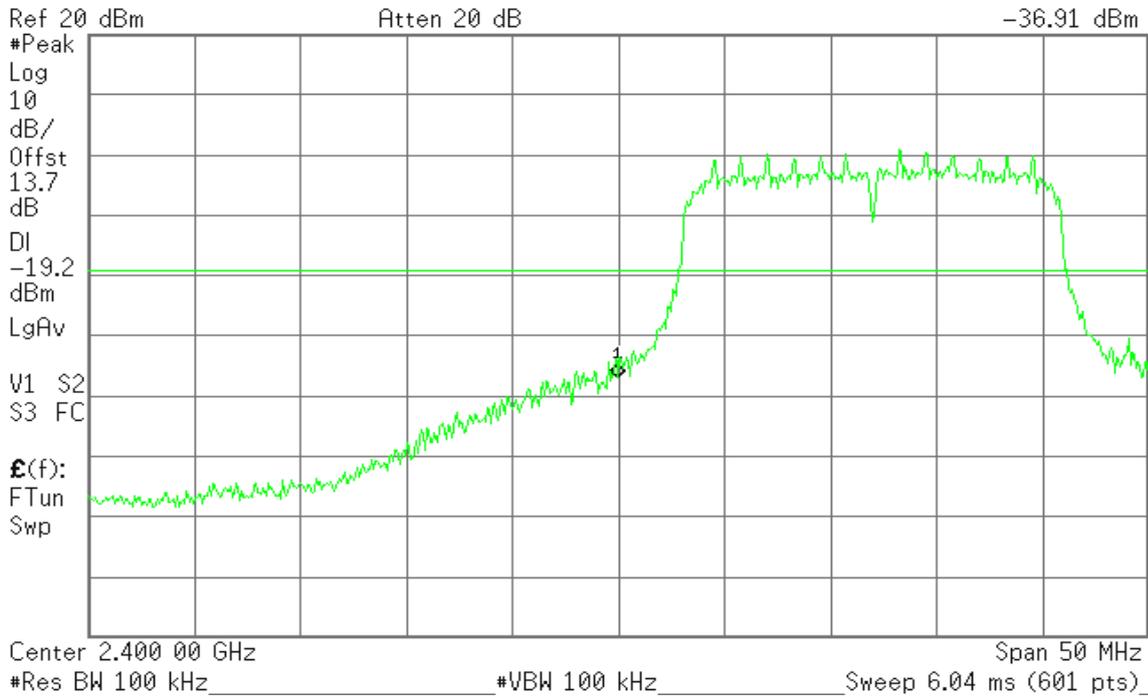


Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / Chain 1)

Agilent 15:00:22 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-42.78 dBm

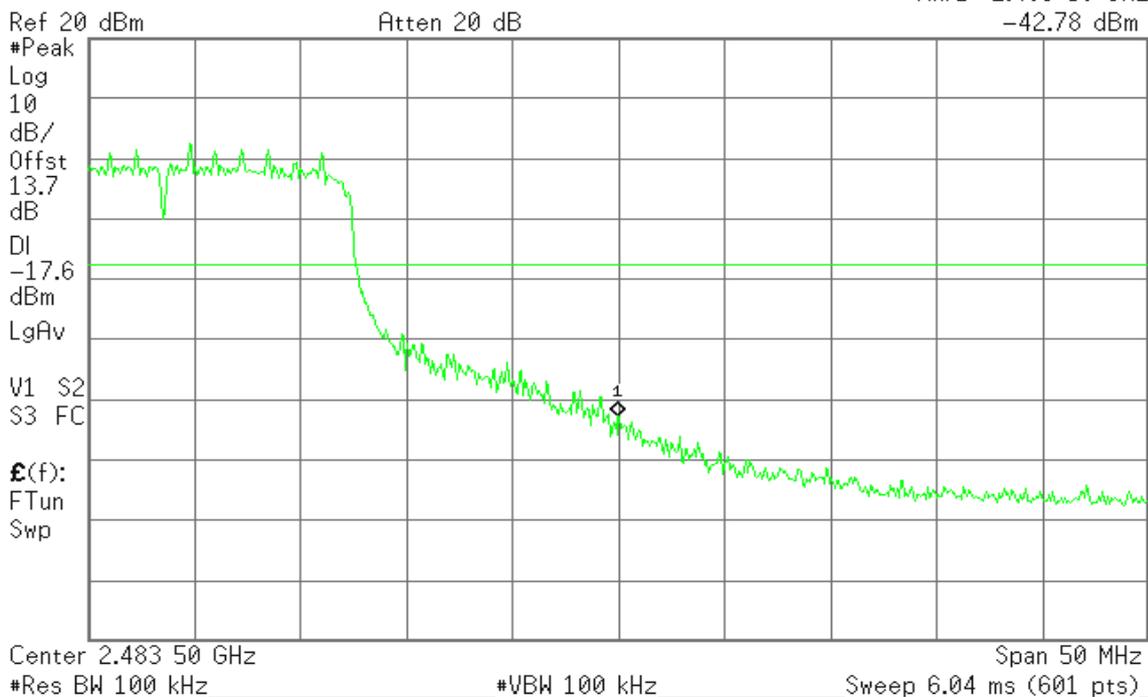




Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / Chain 0)

Agilent 16:53:10 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-38.50 dBm

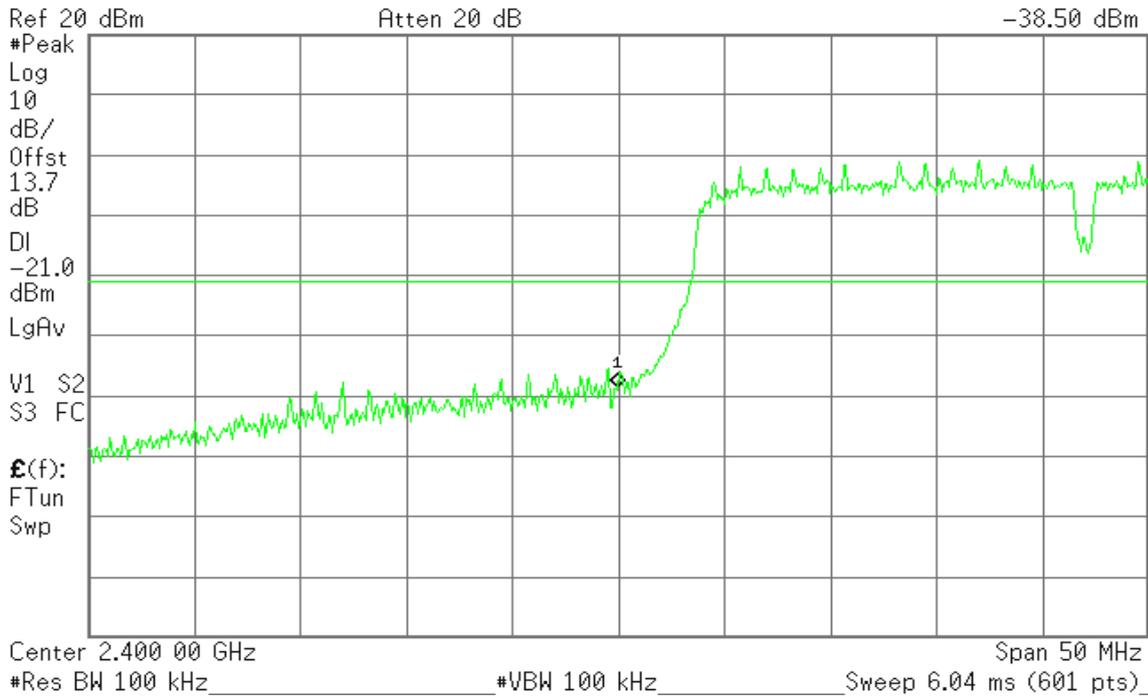


Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / Chain 0)

Agilent 16:35:34 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-46.57 dBm

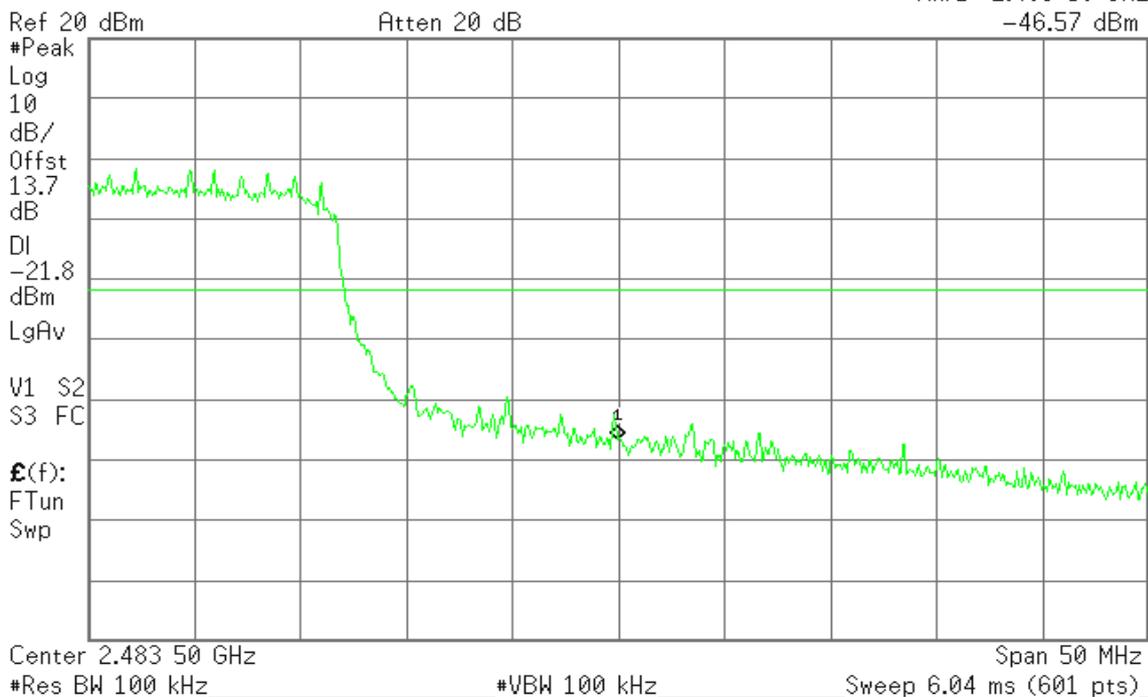




Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / Chain 1)

Agilent 16:49:15 Jul 9, 2012

R T

Mkr1 2.400 00 GHz
-40.02 dBm

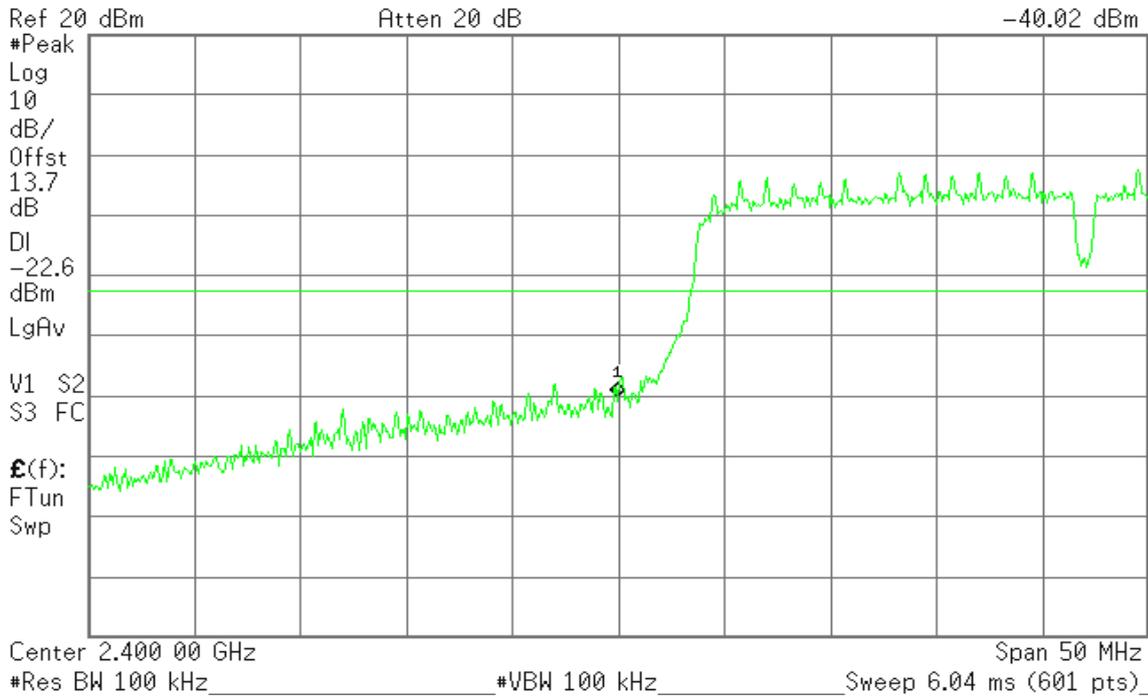


Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / Chain 1)

Agilent 16:31:08 Jul 9, 2012

R T

Mkr1 2.483 50 GHz
-41.06 dBm

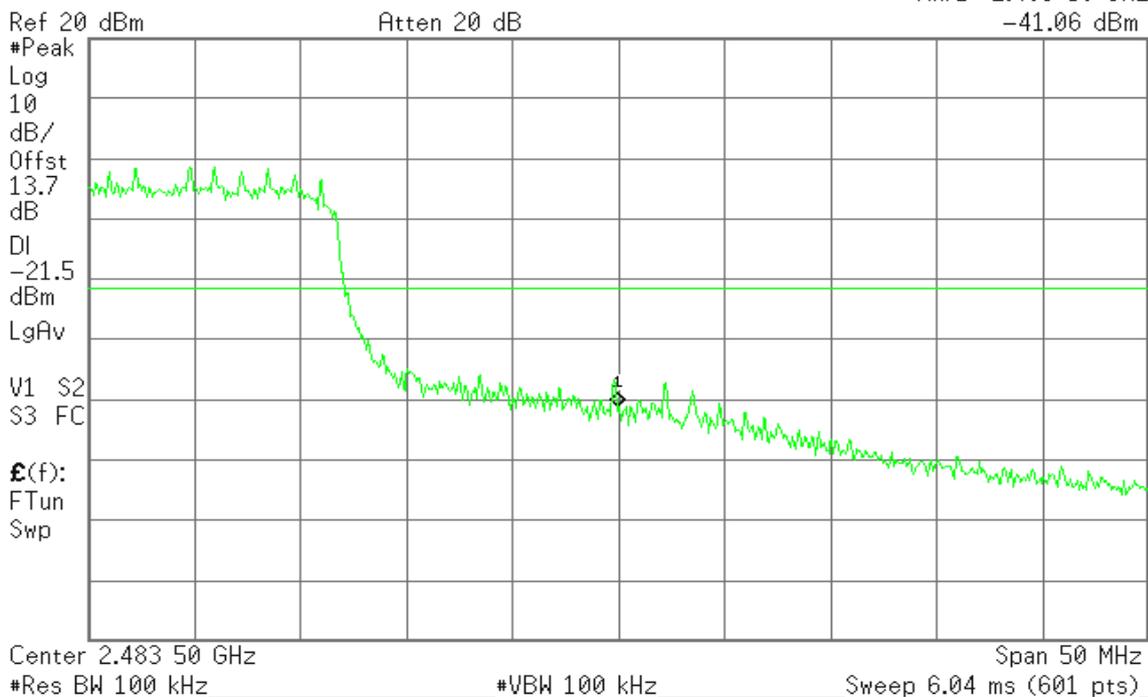




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

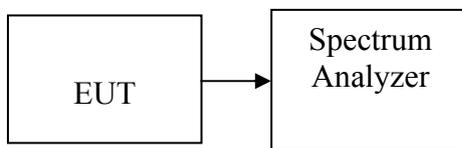

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 100 kHz, VBW = 300 kHz, Span > 5% of the bandwidth, Detector = peak, Trace mode = max hold, Sweep = auto couple. Record the maximum reading. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	100kHz PPSD (dBm)	3kHz PPSD (dBm)	Limit (dBm)	Result
Low	2412	4.45	-10.75	8	PASS
Mid	2442	4.59	-10.61		PASS
High	2462	4.32	-10.88		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	100kHz PPSD (dBm)	3kHz PPSD (dBm)	Limit (dBm)	Result
Low	2412	6.8	-8.40	8	PASS
Mid	2442	6.65	-8.55		PASS
High	2462	6.23	-8.97		PASS

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD	Chain 1 PPSD	100kHz PPSD (dBm)	3kHz PPSD (dBm)	Limit (dBm)	Result
Low	2412	4.05	3.02	6.58	-8.62	7	PASS
Mid	2442	4.27	2.95	6.67	-8.53		PASS
High	2462	4.8	5.01	7.92	-7.28		PASS

Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD	Chain 1 PPSD	100kHz PPSD (dBm)	3kHz PPSD (dBm)	Limit (dBm)	Result
Low	2422	0.86	-1.15	2.98	-12.22	7	PASS
Mid	2442	0.57	-0.34	3.15	-12.05		PASS
High	2452	-0.41	-0.72	2.45	-12.75		PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 1 PPSD} / 10)})$
2. The maximum antenna gain is 7.05dBi; therefore the reduction due to antenna gain is 1dBi, so the limit is 7.00dBm.



Test Plot


IEEE 802.11b mode

PPSD (CH Low)

Agilent 10:39:24 Jul 9, 2012

R T

Mkr1 2.413 97 GHz
4.45 dBm

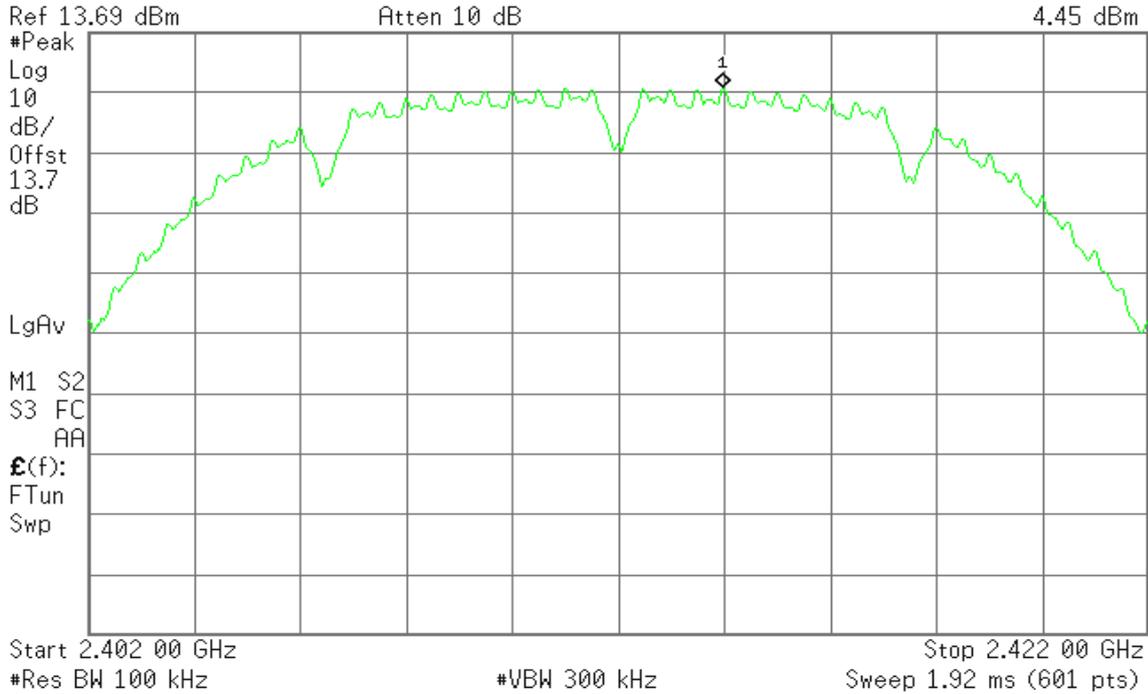


PPSD (CH Mid)

Agilent 10:42:30 Jul 9, 2012

R T

Mkr1 2.441 47 GHz
4.59 dBm

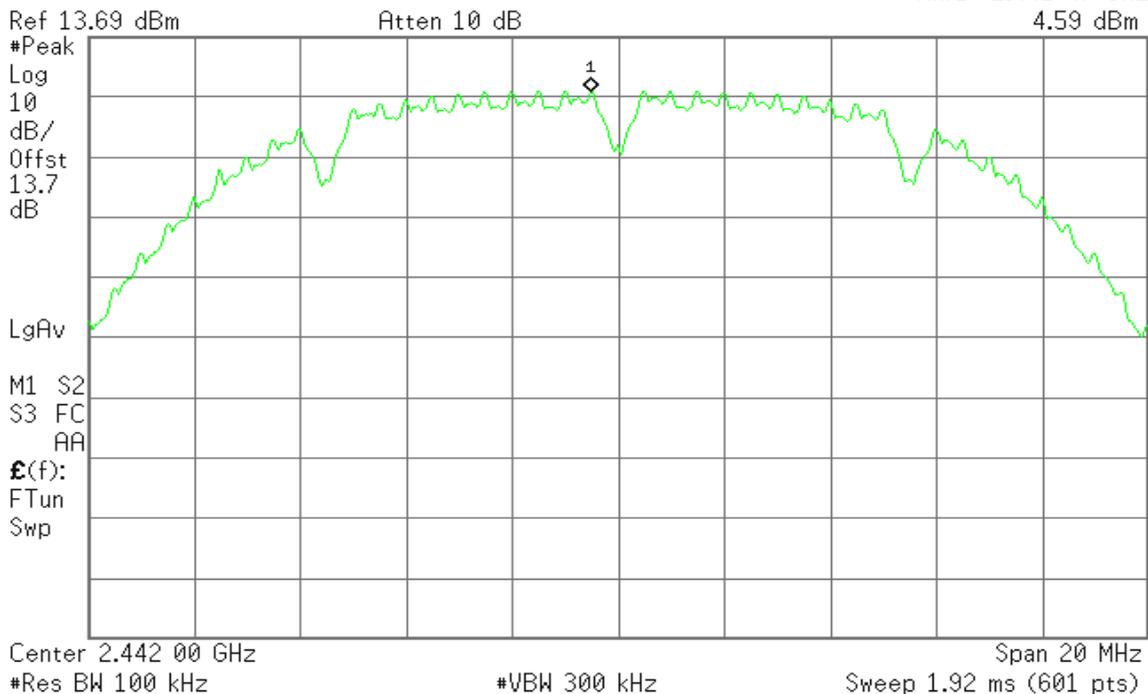




PPSD (CH High)

Agilent 10:44:05 Jul 9, 2012

R T

Mkr1 2.463 00 GHz
4.32 dBm

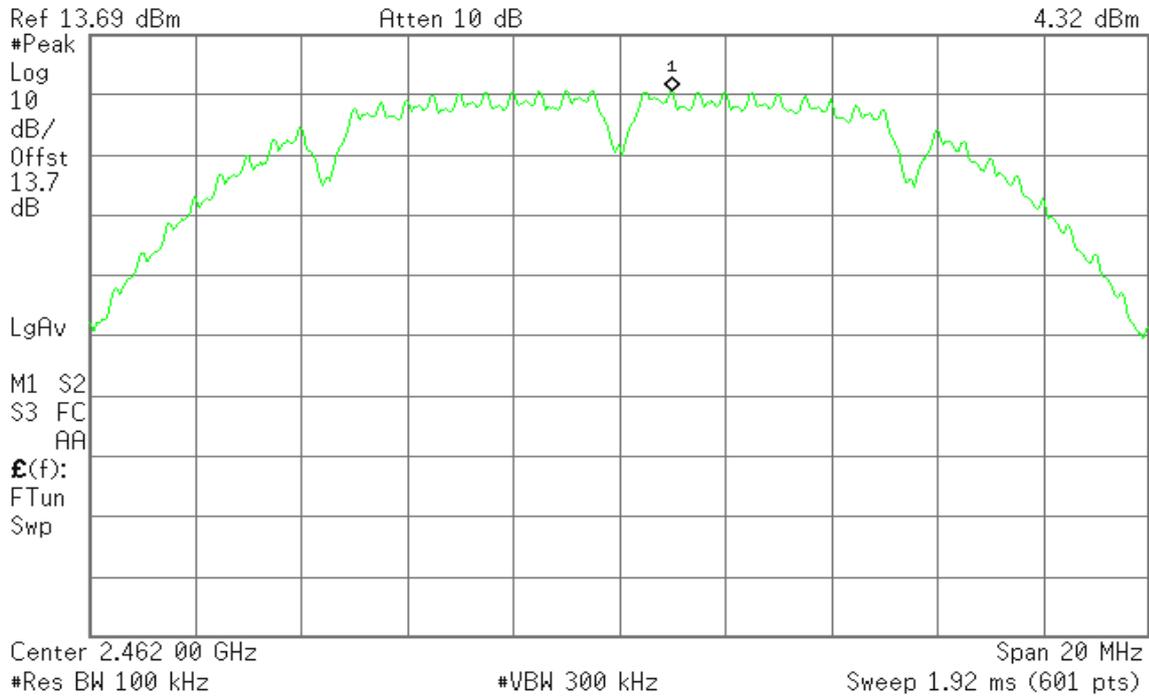




IEEE 802.11g mode

PPSD (CH Low)

Agilent 11:17:25 Jul 9, 2012

R T

Mkr1 2.413 27 GHz
6.80 dBm

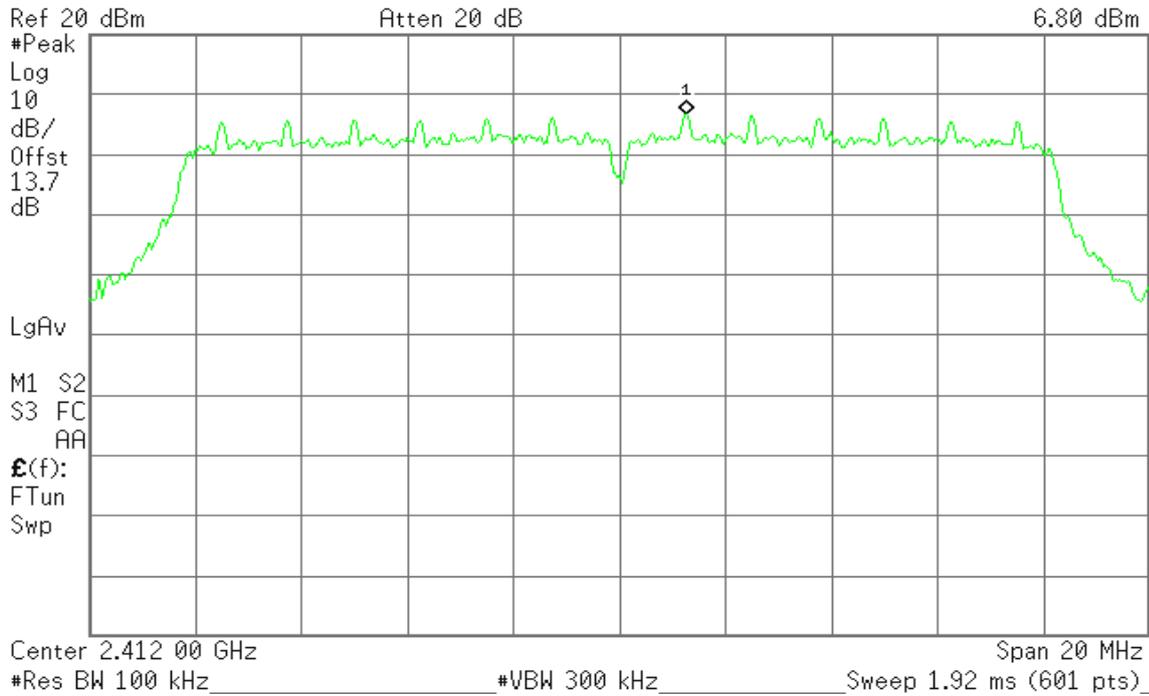


PPSD (CH Mid)

Agilent 11:18:54 Jul 9, 2012

R T

Mkr1 2.443 27 GHz
6.65 dBm

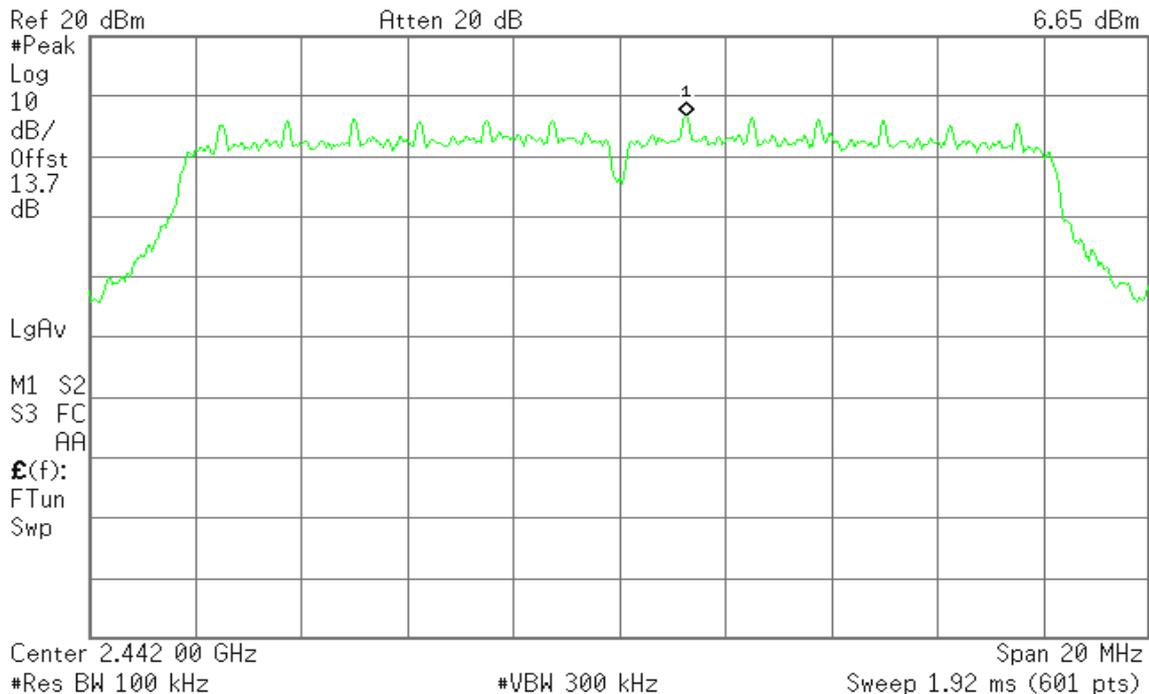




PPSD (CH High)

Agilent 11:20:15 Jul 9, 2012

R T

Mkr1 2.463 23 GHz
6.23 dBm

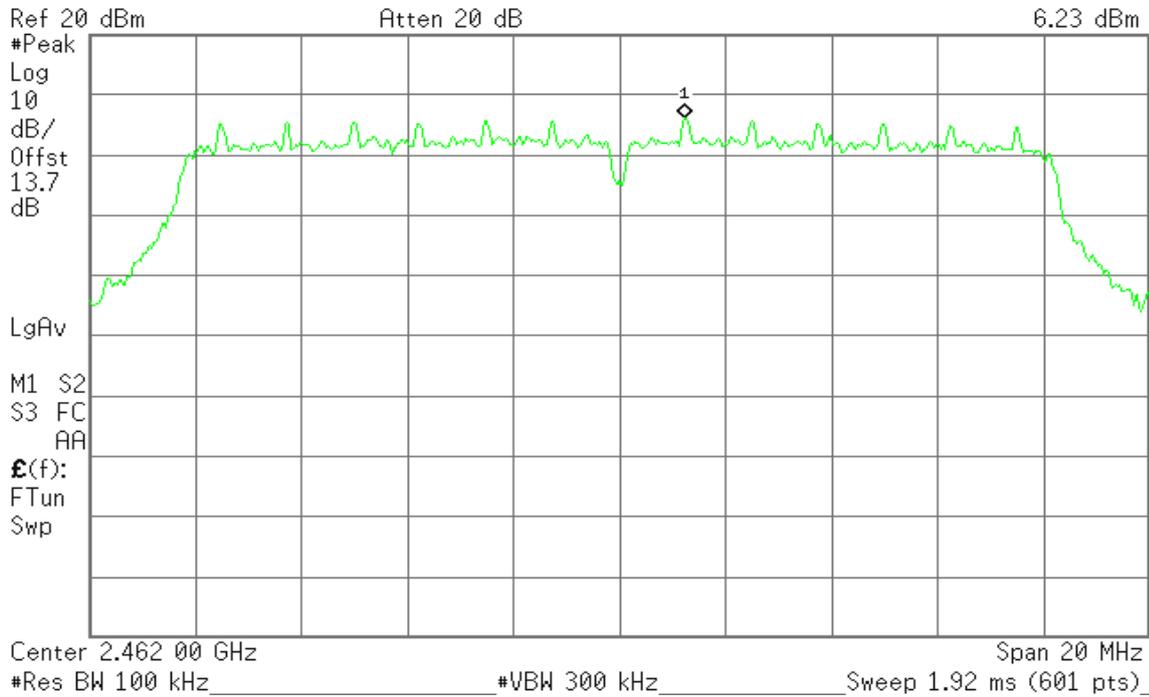




IEEE 802.11n HT 20 MHz mode / Chain 0

PPSD (CH Low)

Agilent 14:38:07 Jul 9, 2012

R T

Mkr1 2.413 27 GHz
4.05 dBm

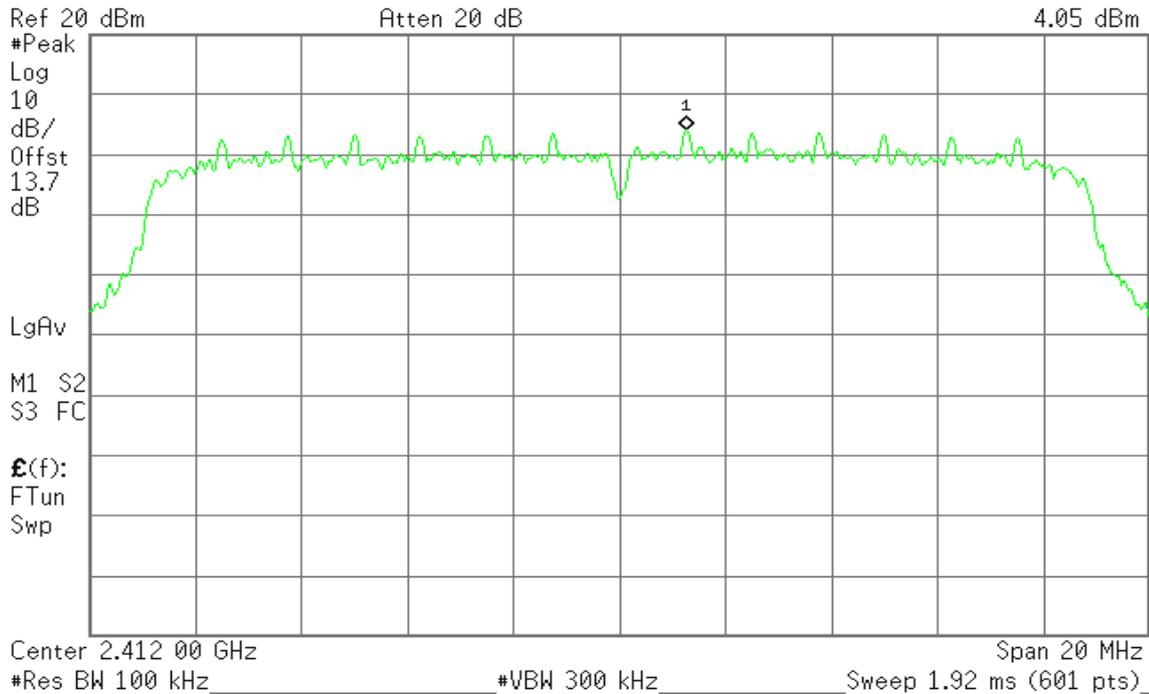


PPSD (CH Mid)

Agilent 14:39:52 Jul 9, 2012

R T

Mkr1 2.443 27 GHz
4.27 dBm

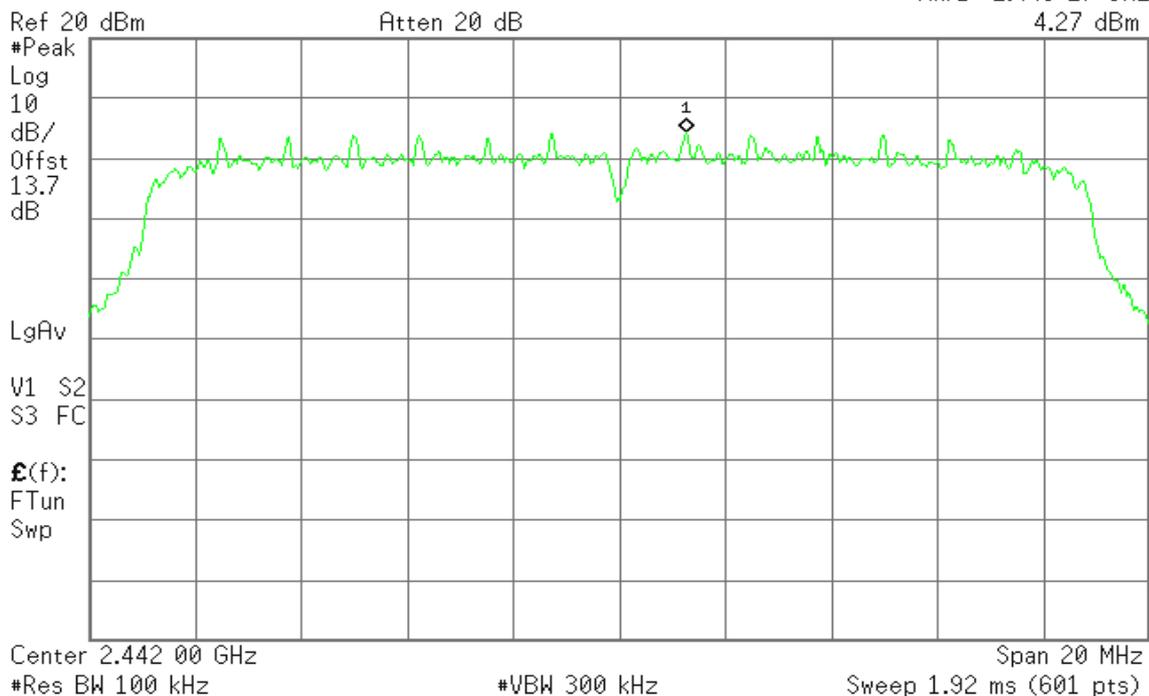




PPSD (CH High)

Agilent 14:50:01 Jul 9, 2012

R T

Mkr1 2.463 27 GHz
4.80 dBm

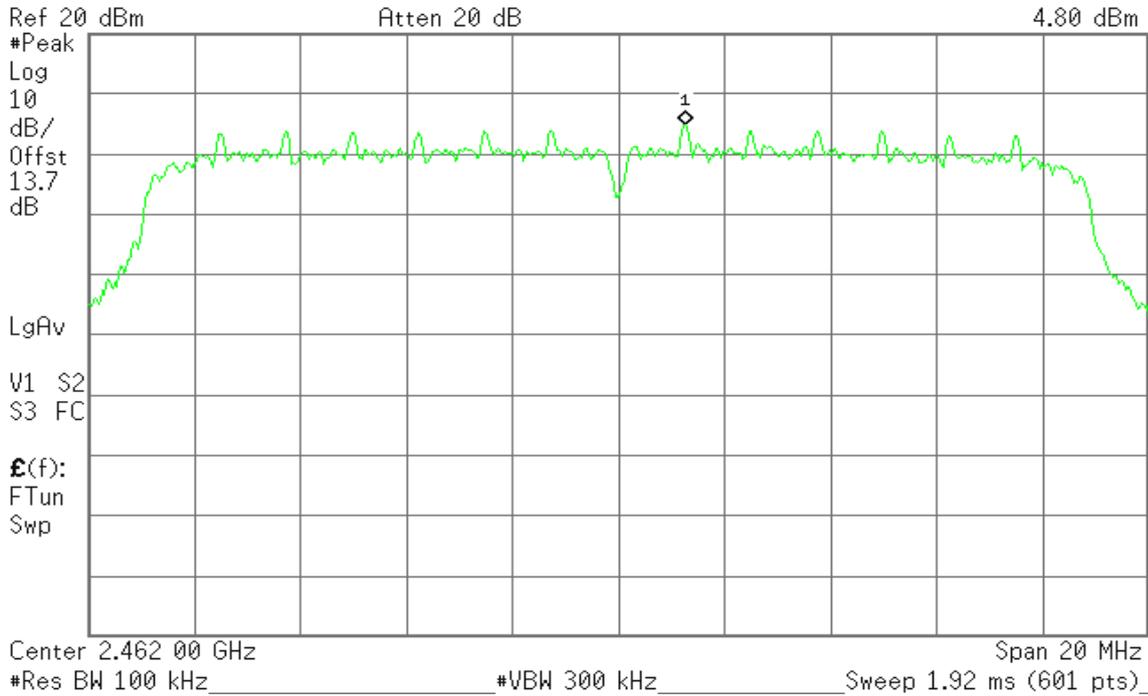


IEEE 802.11n HT 20 MHz mode / Chain 1

PPSD (CH Low)

Agilent 14:36:21 Jul 9, 2012

R T

Mkr1 2.413 23 GHz
3.02 dBm

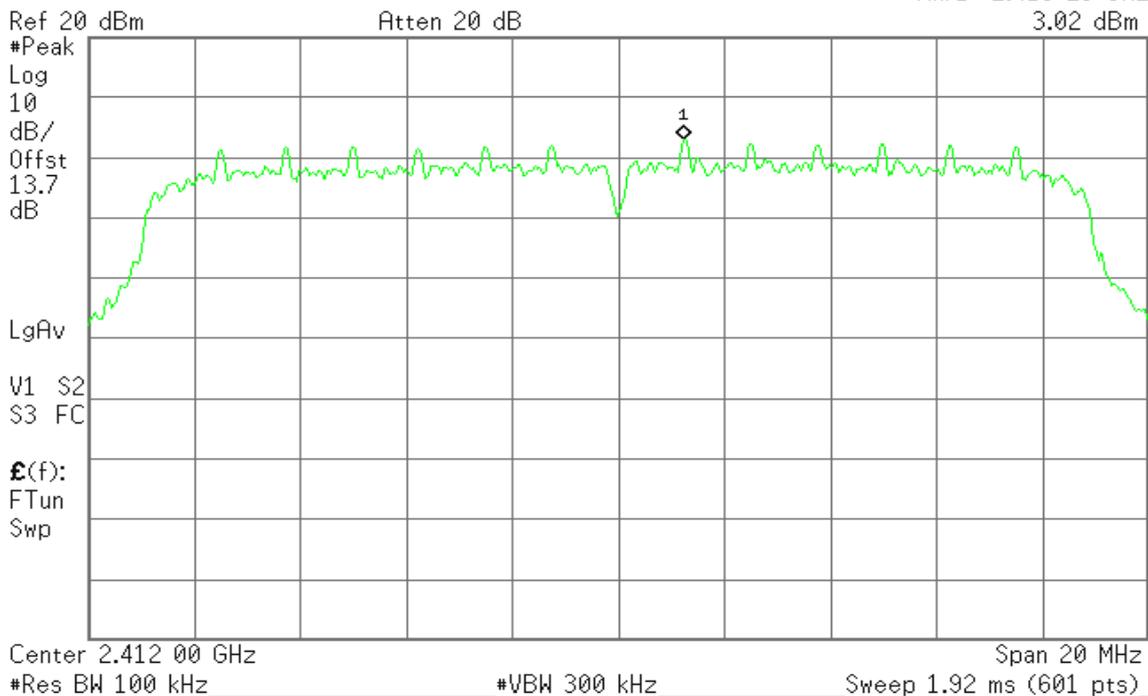




PPSD (CH Mid)

Agilent 14:40:56 Jul 9, 2012

R T

Mkr1 2.443 27 GHz
2.95 dBm

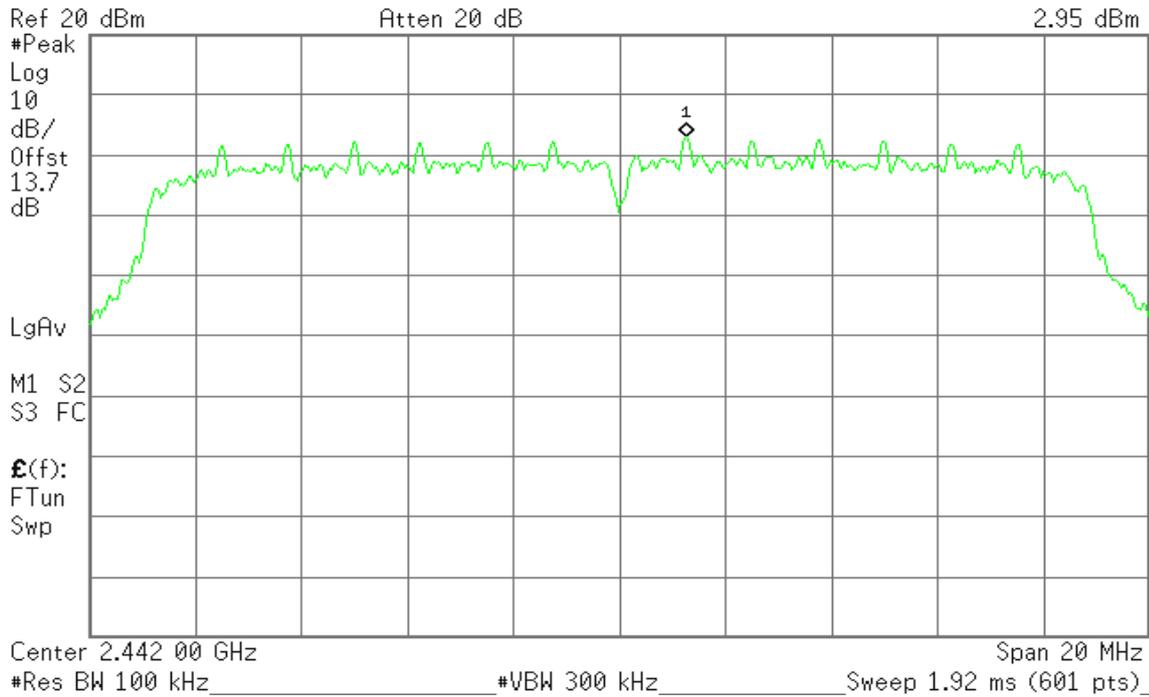


PPSD (CH High)

Agilent 14:48:49 Jul 9, 2012

R T

Mkr1 2.463 23 GHz
5.01 dBm

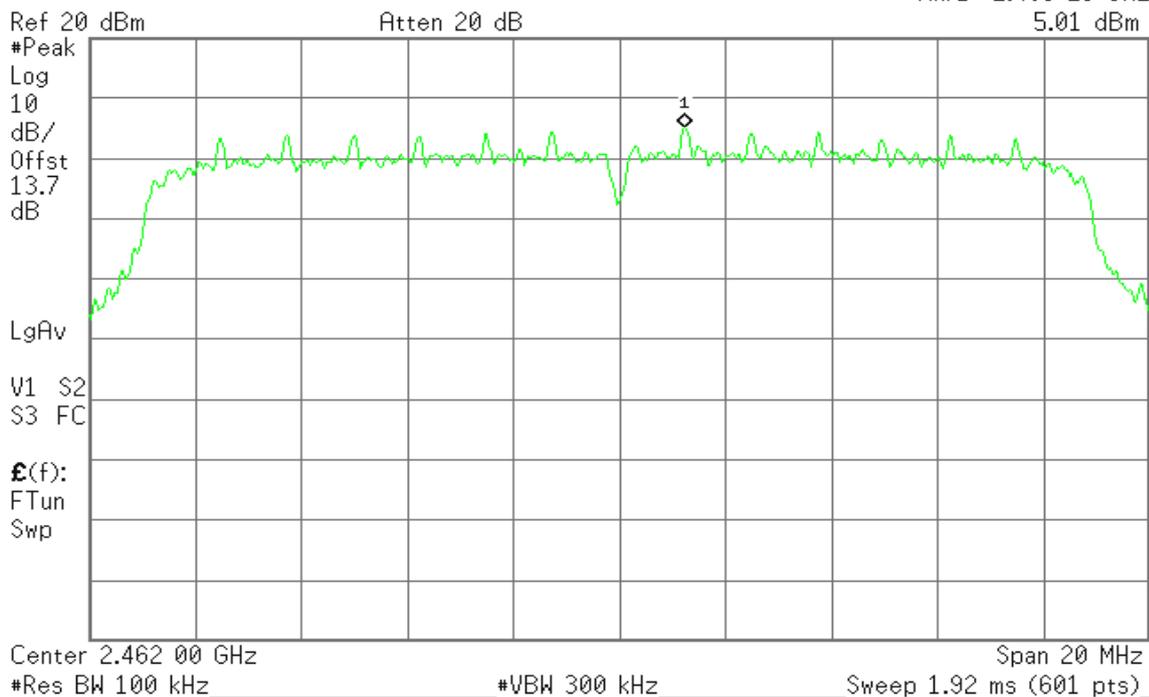




IEEE 802.11n HT 40 MHz mode / Chain 0

PPSD (CH Low)

Agilent 16:19:20 Jul 9, 2012

R T

Mkr1 2.427 00 GHz
0.86 dBm

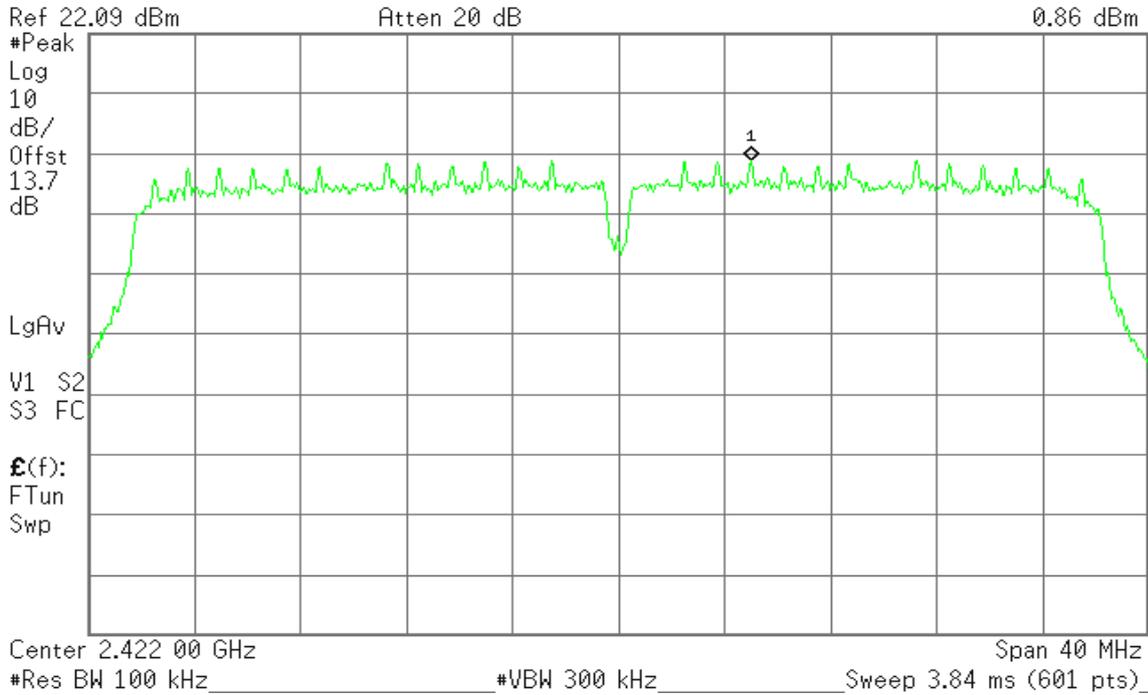

PPSD (CH Mid)

Agilent 16:21:49 Jul 9, 2012

R T

Mkr1 2.445 73 GHz
0.57 dBm






PPSD (CH High)

Agilent 16:27:40 Jul 9, 2012

R T

Mkr1 2.457 00 GHz
-0.41 dBm

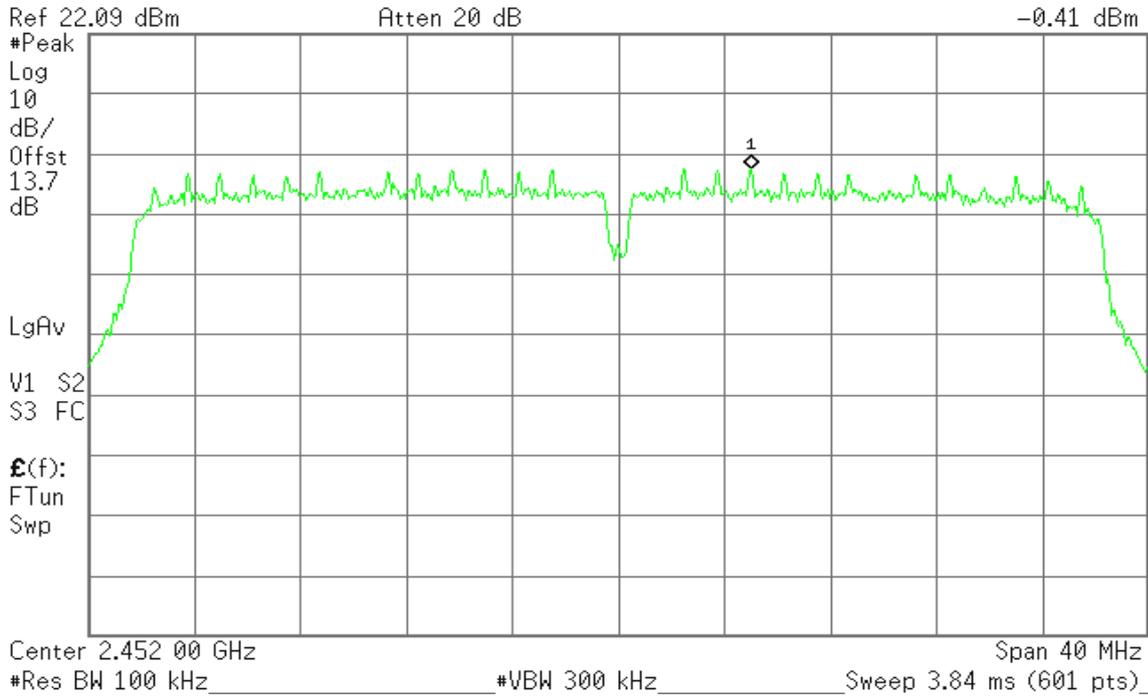


IEEE 802.11n HT 40 MHz mode / Chain 1

PPSD (CH Low)

Agilent 16:20:13 Jul 9, 2012

R T

Mkr1 2.433 27 GHz
-1.15 dBm

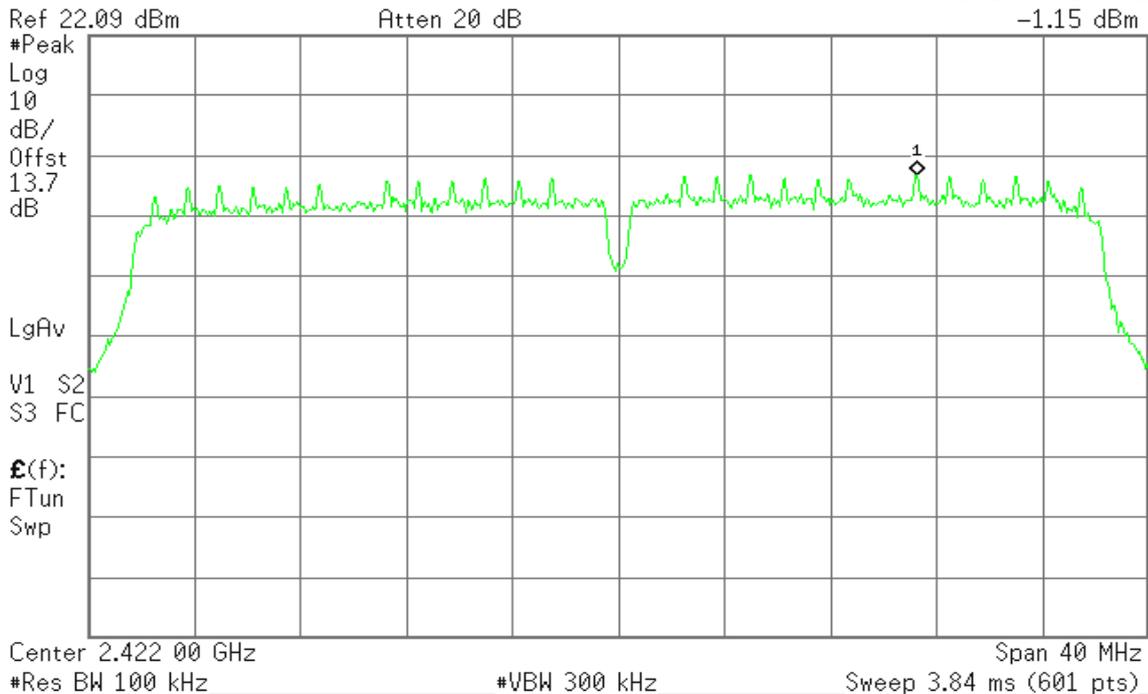




PPSD (CH Mid)

Agilent 16:20:57 Jul 9, 2012

R T

Mkr1 2.447 00 GHz
-0.34 dBm

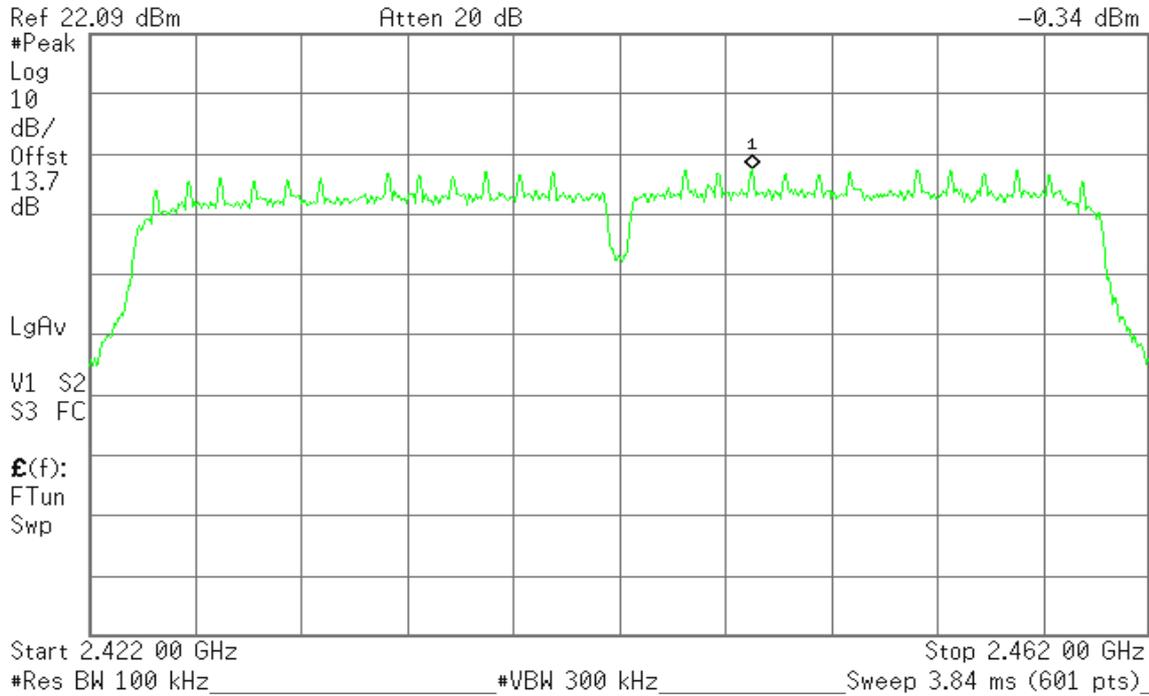


PPSD (CH High)

Agilent 16:28:30 Jul 9, 2012

R T

Mkr1 2.463 27 GHz
-0.72 dBm

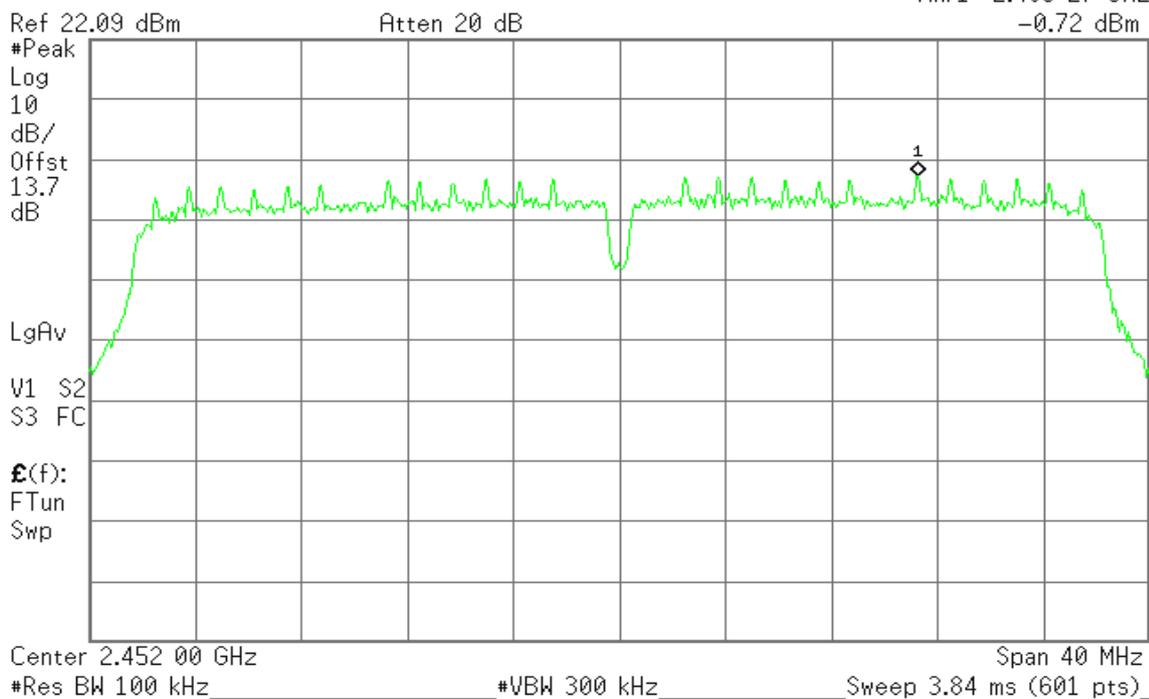




7.5 SPURIOUS EMISSIONS

7.5.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

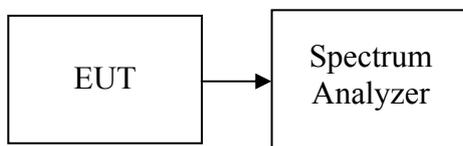

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW=100 kHz and VBW= 300 kHz. Investigate the frequency from 30 MHz to 26 GHz with L, M and H channels separately.

TEST RESULTS

No non-compliance noted.



Test Plot

IEEE 802.11b mode

CH Low

Agilent 11:07:36 Jul 9, 2012

R T

Mkr2 4.83 GHz
-48.12 dBm



Start 30 MHz Stop 26.00 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.42 GHz	2.56 dBm
2	(1)	Freq	4.83 GHz	-48.12 dBm

CH Mid

Agilent 11:02:34 Jul 9, 2012

R T

Mkr2 4.89 GHz
-48.40 dBm

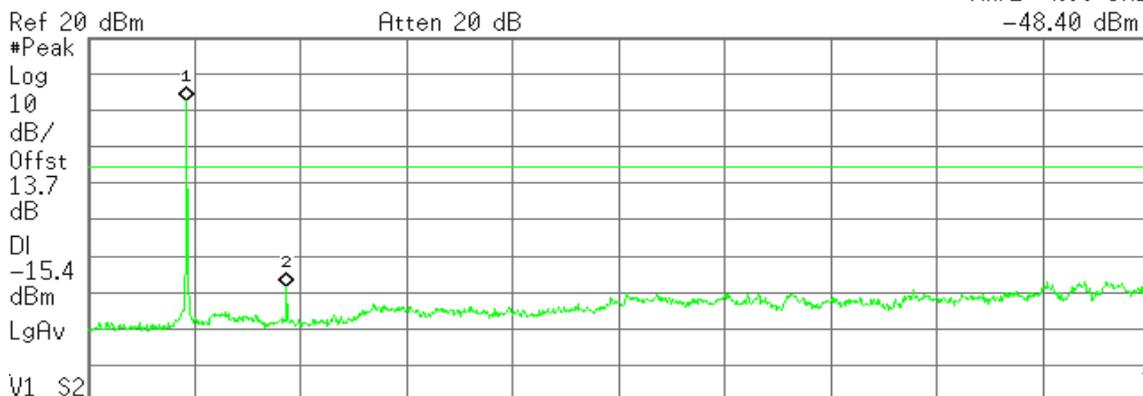

Start 30 MHz Stop 26.00 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	2.82 dBm
2	(1)	Freq	4.89 GHz	-48.40 dBm




CH High

Agilent 10:52:51 Jul 9, 2012

R T

Mkr2 4.91 GHz
-50.48 dBm

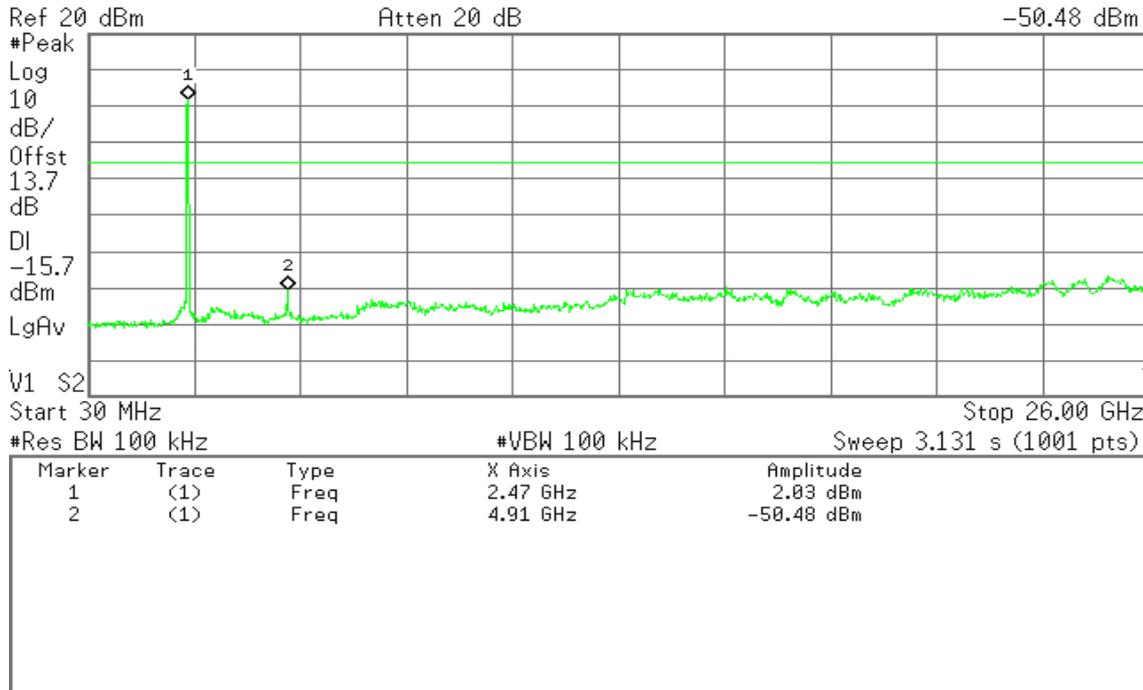


IEEE 802.11g mode

CH Low

Agilent 11:35:46 Jul 9, 2012

R T

Mkr2 4.83 GHz
-52.15 dBm

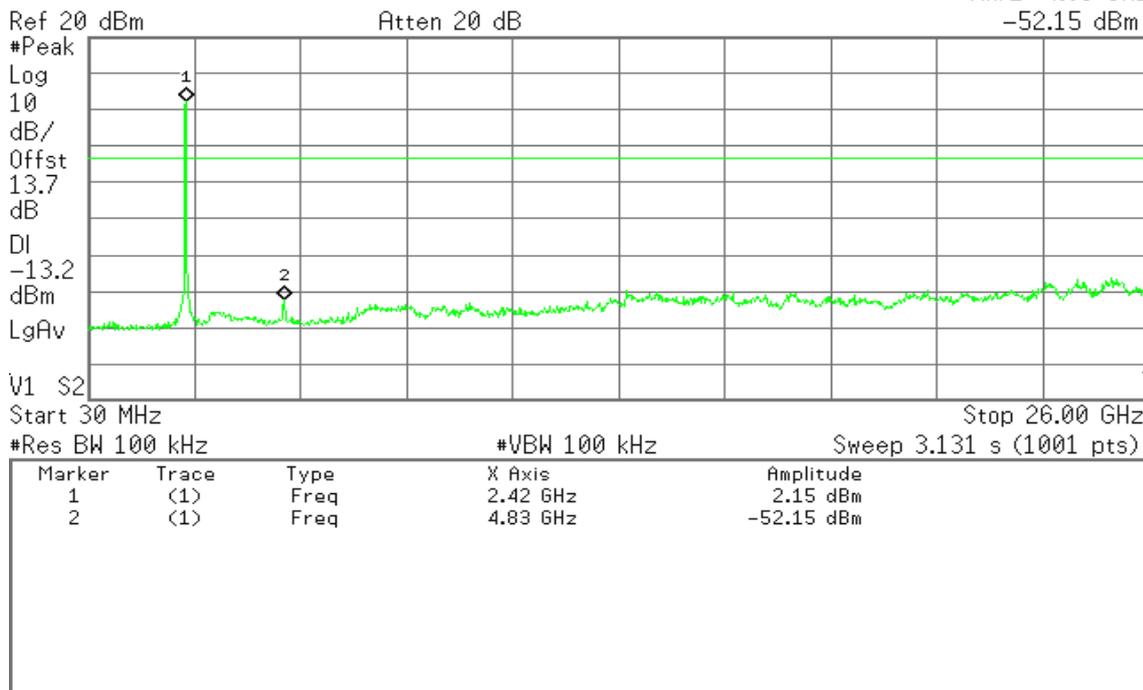




CH Mid

Agilent 11:30:10 Jul 9, 2012

R T

Mkr2 4.89 GHz
-54.00 dBm

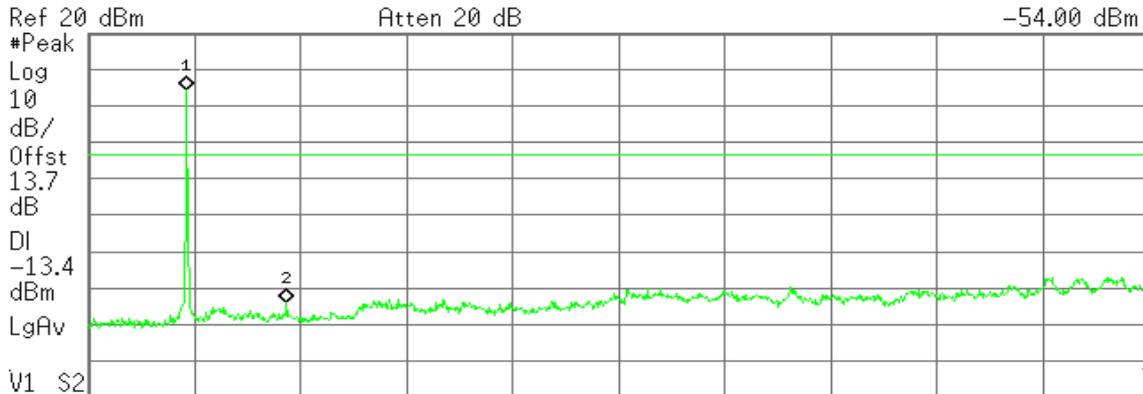

Start 30 MHz Stop 26.00 GHz

#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	4.52 dBm
2	(1)	Freq	4.89 GHz	-54.00 dBm

CH High

Agilent 11:24:57 Jul 9, 2012

R T

Mkr2 25.12 GHz
-45.05 dBm



Start 30 MHz Stop 26.00 GHz

#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.47 GHz	2.06 dBm
2	(1)	Freq	25.12 GHz	-45.05 dBm



IEEE 802.11n HT 20 MHz mode / Chain 0

CH Low

Agilent 15:22:08 Jul 9, 2012

R T

Mkr2 13.22 GHz
-50.35 dBm



V1 S2
 Start 30 MHz Stop 26.00 GHz
 #Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.42 GHz	2.15 dBm
2	(1)	Freq	13.22 GHz	-50.35 dBm

CH Mid

Agilent 15:14:47 Jul 9, 2012

R T

Mkr2 12.81 GHz
-51.16 dBm

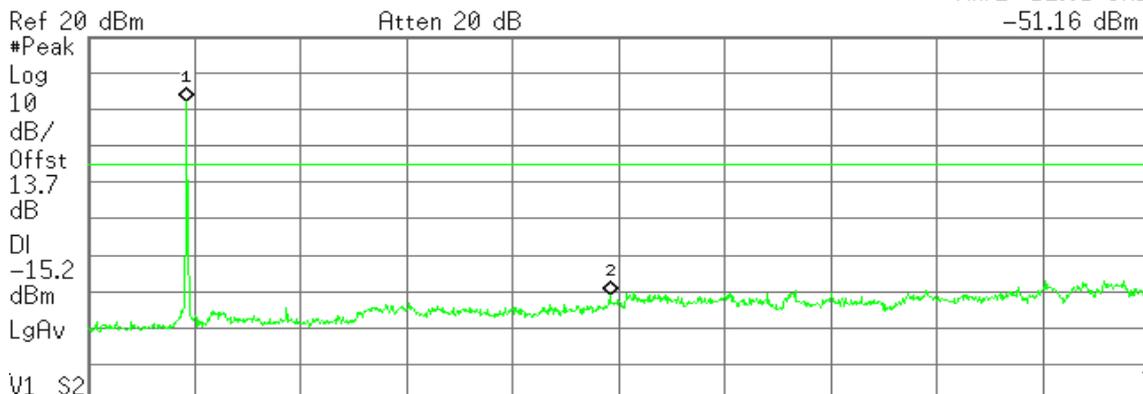

V1 S2
 Start 30 MHz Stop 26.00 GHz
 #Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	2.21 dBm
2	(1)	Freq	12.81 GHz	-51.16 dBm



CH High

Agilent 14:54:36 Jul 9, 2012

R T

Mkr2 13.20 GHz
-50.49 dBm



#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.47 GHz	0.48 dBm
2	(1)	Freq	13.20 GHz	-50.49 dBm

IEEE 802.11n HT 20 MHz mode / Chain 1

CH Low

Agilent 15:27:43 Jul 9, 2012

R T

Mkr3 4.83 GHz
-53.77 dBm



#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.42 GHz	-0.84 dBm
2	(1)	Freq	3.22 GHz	-50.39 dBm
3	(1)	Freq	4.83 GHz	-53.77 dBm



CH Mid

Agilent 15:09:06 Jul 9, 2012

R T

Mkr2 3.25 GHz
-52.38 dBm



Ref 20 dBm Atten 20 dB
Start 30 MHz Stop 26.00 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	0.12 dBm
2	(1)	Freq	3.25 GHz	-52.38 dBm

CH High

Agilent 15:01:48 Jul 9, 2012

R T

Mkr2 6.99 GHz
-53.70 dBm



Ref 20 dBm Atten 20 dB
Start 30 MHz Stop 26.00 GHz
#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	1.82 dBm
2	(1)	Freq	6.99 GHz	-53.70 dBm




IEEE 802.11n HT 40 MHz mode / Chain 0

CH Low

Agilent 16:54:30 Jul 9, 2012

R T

Mkr2 13.22 GHz
-51.20 dBm

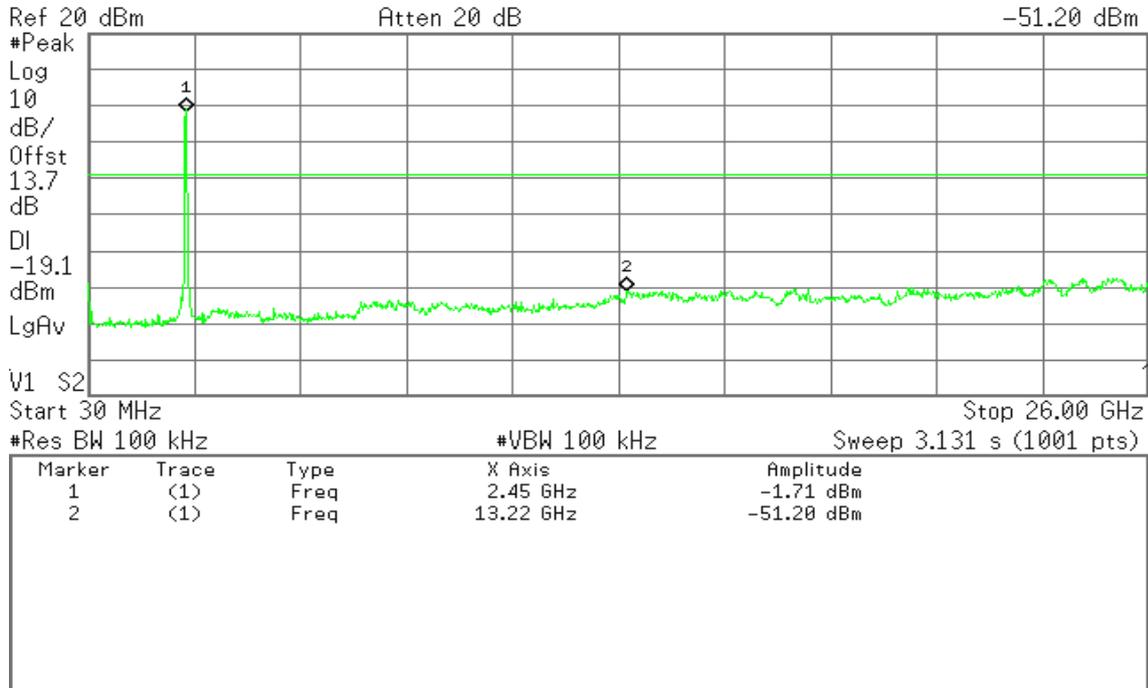


CH Mid

Agilent 16:40:56 Jul 9, 2012

R T

Mkr2 13.92 GHz
-49.91 dBm

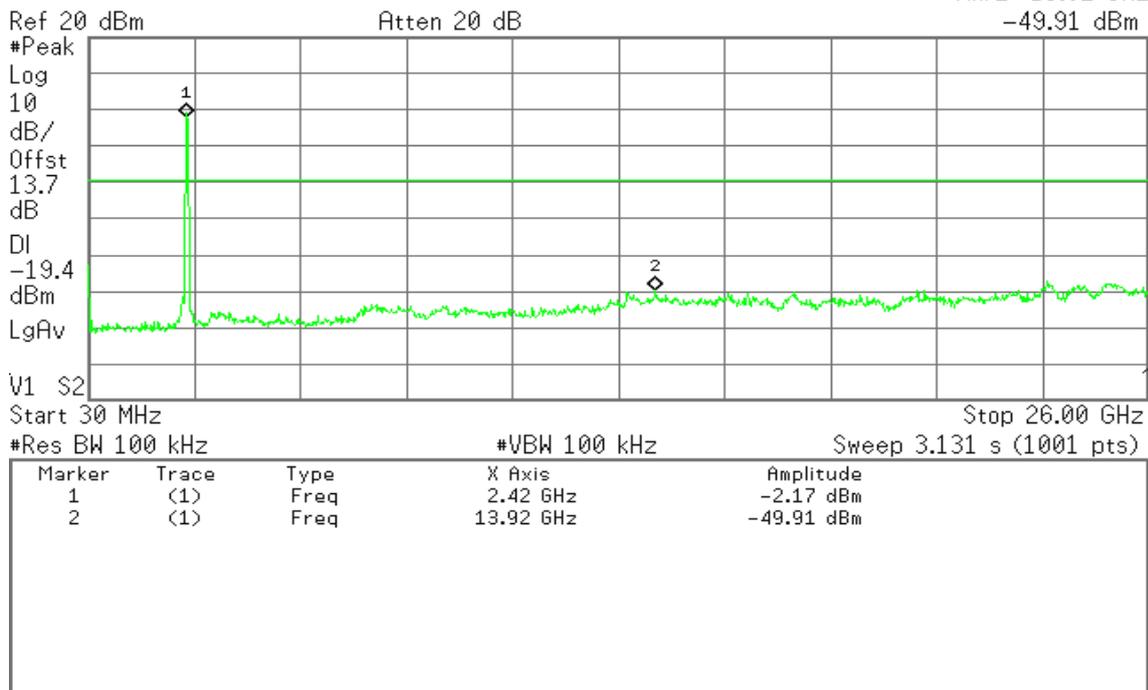



CH High

Agilent 16:37:13 Jul 9, 2012

R T

Mkr2 13.22 GHz
-50.22 dBm



V1 S2
 Start 30 MHz Stop 26.00 GHz
 #Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	-0.88 dBm
2	(1)	Freq	13.22 GHz	-50.22 dBm

IEEE 802.11n HT 40 MHz mode / Chain 1

CH Low

Agilent 16:50:19 Jul 9, 2012

R T

Mkr2 3.22 GHz
-50.23 dBm



V1 S2
 Start 30 MHz Stop 26.00 GHz
 #Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	-5.94 dBm
2	(1)	Freq	3.22 GHz	-50.23 dBm




CH Mid

Agilent 16:44:54 Jul 9, 2012

R T

Mkr2 3.25 GHz
-52.98 dBm

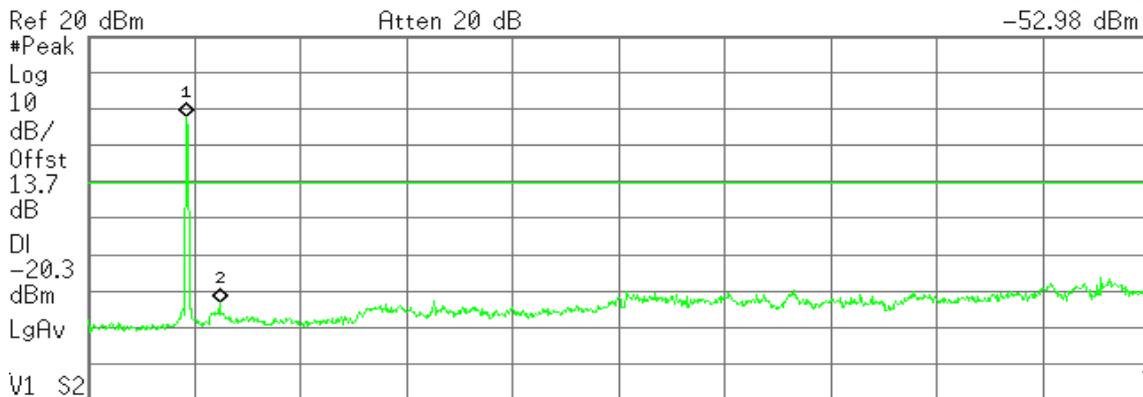

Ref 20 dBm Atten 20 dB

#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	-2.17 dBm
2	(1)	Freq	3.25 GHz	-52.98 dBm

CH High

Agilent 16:32:02 Jul 9, 2012

R T

Mkr2 3.28 GHz
-53.18 dBm



Ref 20 dBm Atten 20 dB

#Res BW 100 kHz #VBW 100 kHz Sweep 3.131 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45 GHz	-1.33 dBm
2	(1)	Freq	3.28 GHz	-53.18 dBm



7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

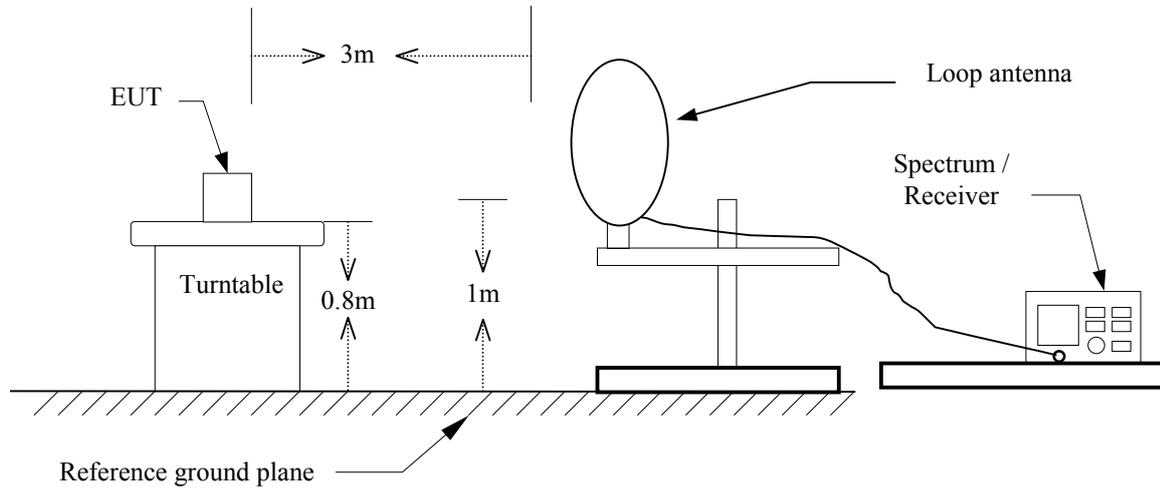


30MHz ~ 1GHz

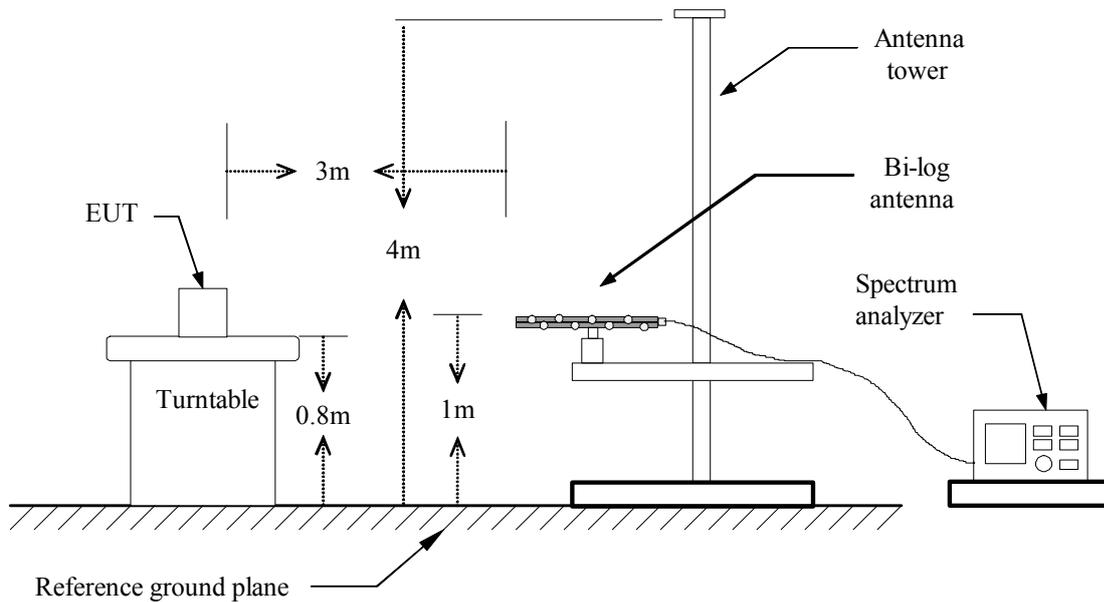



Above 1 GHz

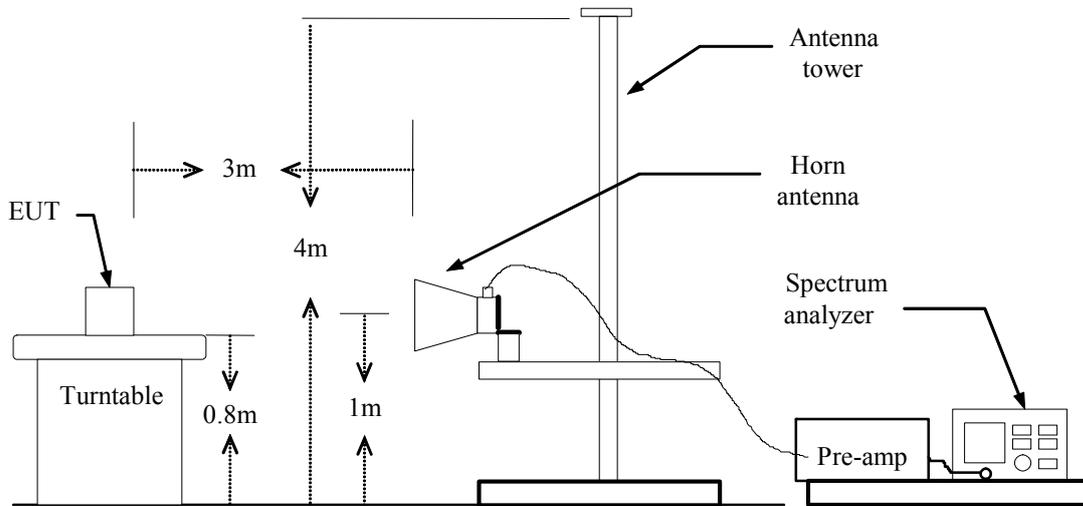



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.

**Below 1GHz**

Operation Mode: Normal Link **Test Date:** June 30, 2012
Temperature: 26°C **Tested by:** Shawn Wu
Humidity: 50% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
41.32	60.26	-28.19	32.07	40.00	-7.93	QP	V
63.95	66.53	-33.63	32.90	40.00	-7.10	QP	V
84.97	71.21	-33.48	37.73	40.00	-2.27	QP	V
104.37	65.72	-30.49	35.23	43.50	-8.27	QP	V
212.68	62.23	-28.99	33.24	43.50	-10.26	QP	V
479.43	62.91	-22.48	40.43	46.00	-5.57	QP	V
83.35	70.09	-33.46	36.63	40.00	-3.37	QP	H
144.78	66.11	-28.15	37.96	43.50	-5.54	Peak	H
212.68	61.39	-28.99	32.40	43.50	-11.10	QP	H
233.70	64.69	-29.03	35.66	46.00	-10.34	QP	H
479.43	65.82	-22.48	43.34	46.00	-2.66	QP	H
839.95	56.25	-17.10	39.16	46.00	-6.84	Peak	H

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. $Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)$.



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2316.67	58.46	45.38	-4.62	53.84	40.76	74.00	54.00	-13.24	AVG	V
4825.00	49.59	48.21	2.61	52.20	50.82	74.00	54.00	-3.18	AVG	V
N/A										
2130.00	56.09	---	-5.13	50.96	---	74.00	54.00	-3.04	Peak	H
4825.00	49.31	---	2.61	51.92	---	74.00	54.00	-2.08	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2320.00	56.98	43.28	-4.61	52.37	38.67	74.00	54.00	-15.33	AVG	V
2373.33	57.95	44.46	-4.39	53.56	40.07	74.00	54.00	-13.93	AVG	V
4883.33	52.26	48.46	2.73	54.98	51.19	74.00	54.00	-2.81	AVG	V
N/A										
2073.33	54.97	---	-5.28	49.69	---	74.00	54.00	-4.31	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2340.00	56.86	43.22	-4.53	52.34	38.69	74.00	54.00	-15.31	AVG	V
4925.00	50.81	46.16	2.81	53.62	48.97	74.00	54.00	-5.03	AVG	V
N/A										
2040.00	55.32	---	-5.37	49.96	---	74.00	54.00	-4.04	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2360.00	60.69	49.11	-4.44	56.24	44.67	74.00	54.00	-9.33	AVG	V
4825.00	49.46	38.45	2.61	52.07	41.06	74.00	54.00	-12.94	AVG	V
N/A										
2526.67	55.09	---	-3.78	51.31	---	74.00	54.00	-2.69	Peak	H
4825.00	50.92	40.26	2.61	53.53	42.87	74.00	54.00	-11.13	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2330.00	58.44	45.43	-4.57	53.88	40.86	74.00	54.00	-13.14	AVG	V
2390.00	62.67	51.56	-4.32	58.35	47.24	74.00	54.00	-6.76	AVG	V
4883.33	50.69	40.93	2.73	53.42	43.66	74.00	54.00	-10.34	AVG	V
N/A										
2113.33	55.22	---	-5.18	50.05	---	74.00	54.00	-3.95	Peak	H
4883.33	50.38	39.42	2.73	53.10	42.15	74.00	54.00	-11.58	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2393.33	59.78	47.42	-4.31	55.48	43.11	74.00	54.00	-10.89	AVG	V
4925.00	50.80	40.49	2.81	53.61	43.30	74.00	54.00	-10.70	AVG	V
N/A										
2073.33	55.98	---	-5.28	50.70	---	74.00	54.00	-3.30	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2260.00	56.66	---	-4.79	51.86	---	74.00	54.00	-2.14	Peak	V
4825.00	49.50	36.52	2.61	52.11	39.13	74.00	54.00	-14.87	AVG	V
N/A										
2073.33	56.02	---	-5.28	50.74	---	74.00	54.00	-3.26	Peak	H
4825.00	51.35	40.03	2.61	53.96	42.64	74.00	54.00	-11.36	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid Test Date: June 30, 2012

Temperature: 26°C Tested by: Shawn Wu

Humidity: 50 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2390.00	60.60	49.98	-4.32	56.28	45.66	74.00	54.00	-8.34	AVG	V
4883.33	54.31	39.65	2.73	57.04	42.38	74.00	54.00	-11.62	AVG	V
N/A										
2216.67	55.64	---	-4.91	50.73	---	74.00	54.00	-3.27	Peak	H
4875.00	49.62	39.10	2.71	52.33	41.81	74.00	54.00	-12.19	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2323.33	57.46	44.30	-4.59	52.86	39.71	74.00	54.00	-14.29	AVG	V
4925.00	51.97	39.27	2.81	54.78	42.08	74.00	54.00	-11.92	AVG	V
N/A										
2513.33	56.50	44.87	-3.82	52.67	41.05	74.00	54.00	-12.95	AVG	H
4925.00	48.78	---	2.81	51.59	---	74.00	54.00	-2.41	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Low

Temperature: 26°C

Humidity: 50 % RH

Test Date: June 30, 2012

Tested by: Shawn Wu

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2316.67	60.20	47.66	-4.62	55.58	43.04	74.00	54.00	-10.96	AVG	V
4850.00	48.68	---	2.66	51.34	---	74.00	54.00	-2.66	Peak	V
N/A										
2500.00	59.44	42.85	-3.87	55.57	38.98	74.00	54.00	-15.02	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode
/ CH Mid

Temperature: 26°C

Humidity: 50 % RH

Test Date: June 30, 2012

Tested by: Shawn Wu

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2340.00	59.03	46.80	-4.53	54.50	42.27	74.00	54.00	-11.73	AVG	V
4883.33	49.61	39.54	2.73	52.34	42.27	74.00	54.00	-11.73	AVG	V
N/A										
2170.00	55.62	---	-5.03	50.59	---	74.00	54.00	-3.41	Peak	H
4883.33	49.26	---	2.73	51.98	---	74.00	54.00	-2.02	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: June 30, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2136.67	56.11	---	-5.11	51.00	---	74.00	54.00	-3.00	Peak	V
4908.33	50.05	39.72	2.78	52.83	42.50	74.00	54.00	-11.50	AVG	V
N/A										
2176.67	54.91	---	-5.01	49.90	---	74.00	54.00	-4.10	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** June 6, 2012
Temperature: 22°C **Tested by:** Mike Xie
Humidity: 56% RH

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Note
0.1700	44.60	10.05	54.65	64.96	-10.31	QP	L1
0.1700	21.24	10.05	31.29	54.96	-23.67	AVG	L1
0.2140	44.40	10.01	54.41	63.04	-8.63	QP	L1
0.2140	21.49	10.01	31.50	53.04	-21.54	AVG	L1
0.2460	43.80	10.01	53.81	61.89	-8.08	QP	L1
0.2460	20.98	10.01	30.99	51.89	-20.90	AVG	L1
0.2860	37.90	10.02	47.92	60.64	-12.72	QP	L1
0.2860	19.12	10.02	29.14	50.64	-21.50	AVG	L1
0.3620	34.00	10.03	44.03	58.68	-14.65	QP	L1
0.3620	17.10	10.03	27.13	48.68	-21.55	AVG	L1
0.4380	38.70	10.03	48.73	57.10	-8.37	QP	L1
0.4380	15.37	10.03	25.40	47.10	-21.70	AVG	L1
0.5540	32.40	10.04	42.44	56.00	-13.56	QP	L1
0.5540	16.12	10.04	26.16	46.00	-19.84	AVG	L1
0.1539	43.10	10.07	53.17	65.78	-12.61	QP	L2
0.1539	21.71	10.07	31.78	55.78	-24.00	AVG	L2
0.1940	45.50	10.02	55.52	63.86	-8.34	QP	L2
0.1940	19.49	10.02	29.51	53.86	-24.35	AVG	L2
0.2340	45.50	10.01	55.51	62.30	-6.79	QP	L2
0.2340	17.43	10.01	27.44	52.30	-24.86	AVG	L2
0.2700	41.50	10.02	51.52	61.12	-9.60	QP	L2
0.2700	20.97	10.02	30.99	51.12	-20.13	AVG	L2
0.3100	41.70	10.02	51.72	59.97	-8.25	QP	L2
0.3100	15.62	10.02	25.64	49.97	-24.33	AVG	L2
0.3460	38.70	10.02	48.72	59.06	-10.34	QP	L2
0.3460	15.56	10.02	25.58	49.06	-23.48	AVG	L2
0.7740	30.10	10.07	40.17	56.00	-15.83	QP	L2
0.7740	12.80	10.07	22.87	46.00	-23.13	AVG	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

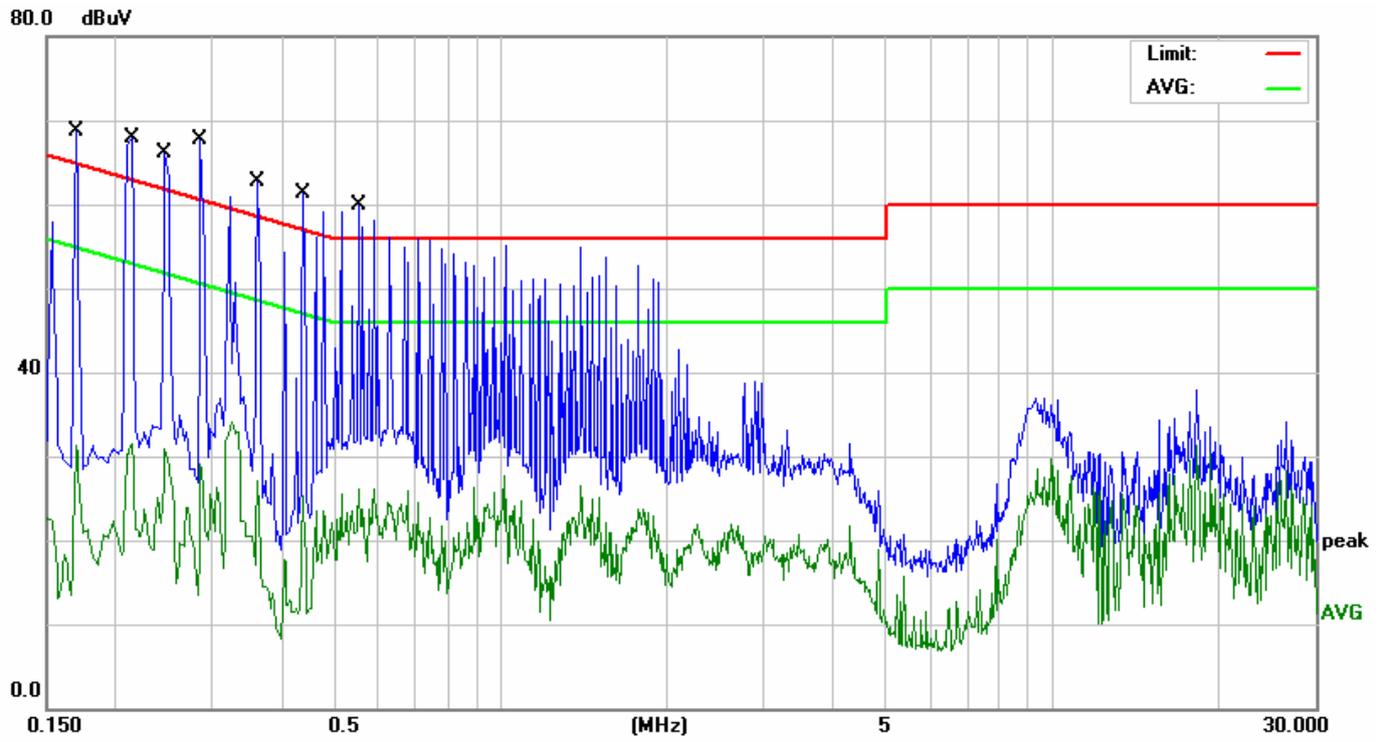

Conducted emissions (Line 2)

