



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

ZigBee Motion Sensor

Model: SZ-PIR02xxxxxxxx(x= 0~9, A~Z, Blank or any Character)

Trade Name: SerComm

Issued to

SerComm Corporation

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township,

Taoyuan County 33841, Taiwan, R.O.C.

TEL: 886-3-324-0332

FAX: 886-3-324-5235

<http://www.ccsrf.com>

service@ccsrf.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|------------------|---------------|-------------|-------------|
| 00 | January 23, 2013 | Initial Issue | ALL | Landy Huang |
| | | | | |
| | | | | |
| | | | | |



TABLE OF CONTENTS

| | |
|--|-----------|
| 1. TEST RESULT CERTIFICATION | 4 |
| 2. EUT DESCRIPTION | 5 |
| 3. TEST METHODOLOGY | 6 |
| 3.1 EUT CONFIGURATION | 6 |
| 3.2 EUT EXERCISE | 6 |
| 3.3 GENERAL TEST PROCEDURES | 6 |
| 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 7 |
| 3.5 DESCRIPTION OF TEST MODES | 7 |
| 4. INSTRUMENT CALIBRATION | 8 |
| 4.1 MEASURING INSTRUMENT CALIBRATION | 8 |
| 4.2 MEASUREMENT EQUIPMENT USED | 8 |
| 4.3 MEASUREMENT UNCERTAINTY | 8 |
| 5. FACILITIES AND ACCREDITATIONS | 9 |
| 5.1 FACILITIES | 9 |
| 5.2 EQUIPMENT | 9 |
| 5.3 TABLE OF ACCREDITATIONS AND LISTINGS | 10 |
| 6. SETUP OF EQUIPMENT UNDER TEST | 11 |
| 6.1 SETUP CONFIGURATION OF EUT | 11 |
| 6.2 SUPPORT EQUIPMENT | 11 |
| 7. FCC PART 15.247 REQUIREMENTS | 12 |
| 7.1 6dB BANDWIDTH | 12 |
| 7.2 PEAK POWER | 15 |
| 7.3 AVERAGE POWER | 16 |
| 7.4 BAND EDGES MEASUREMENT | 17 |
| 7.5 PEAK POWER SPECTRAL DENSITY | 22 |
| 7.6 SPURIOUS EMISSIONS | 25 |
| 7.7 POWERLINE CONDUCTED EMISSIONS | 39 |
| 8. APPENDIX I RADIO FREQUENCY EXPOSURE | 40 |
| 9. APPENDIX II PHOTOGRAPHS OF TEST SETUP | 42 |



1. TEST RESULT CERTIFICATION

Applicant: SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Manufacturer: SerComm Corporation
8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Equipment Under Test: ZigBee Motion Sensor

Trade Name: SerComm

Model: SZ-PIR02xxxxxxxx(x= 0~9, A~Z, Blank or any Character)

Date of Test: January 12 ~ 22, 2013

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Stan Lin
Section Manager

Reviewed by:

Angel Hu
Section Manager



2. EUT DESCRIPTION

| | | | |
|----------------------------------|--|--------------|-------|
| Product | ZigBee Motion Sensor | | |
| Trade Name | SerComm | | |
| Model Number | SZ-PIR02xxxxxxxx(x= 0~9, A~Z, Blank or any Character) | | |
| Model Discrepancy | 1. The mean of "x" (x= 0~9, A~Z, Blank or any Character) on model number just for marketing purpose only. 2. Client consigns only one model sample to test (model number: SZ-PIR02). Therefore, the testing Lab. just guarantees the unit, which has been tested. | | |
| EUT Power Rating | 3VDC From Battery | | |
| RF Module Manufacturer | ARM | Model | EM357 |
| Operating Frequency Range | 2405 ~ 2480MHz | | |
| Transmit Power | 17.46dBm (0.0557W) | | |
| Modulation Technique | OPQSK (Offset Quadrature Phase Shift Keyed) | | |
| Number of Channels | 16 Channels | | |
| Antenna Specification | PCB Antenna / Gain: -1.03dBi | | |

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **P27SZPIR02** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 2, Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: SZ-PIR02) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in transmitting mode only.

Channel Low (2405MHz), Channel Mid (2445MHz) and Channel High (2480MHz) were chosen for the final testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|---------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY48250064 | 01/01/2014 |
| Spectrum Analyzer | R&S | FSEB | 825829/011 | 12/18/2013 |
| Power meter | Anritsu | ML2495A | 1033009 | 08/19/2013 |
| Power Sensor | Anritsu | MA2411B | 0917221 | 08/19/2013 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|--|-------------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY48250064 | 12/23/2013 |
| Pre-Amplifier | HP | 8447D | 2944A06530 | 01/02/2014 |
| Pre-Amplifier | HP | 8449B | 3008A01738 | 04/17/2013 |
| Pre-Amplifier | MITEQ | AMF-6F-26040 0-40-8P | 985646 | 05/20/2013 |
| EMI Test Receiver | SCHAFFNER | SCR 3501 | 430 | 01/11/2014 |
| Loop Antenna | EMCO | 6502 | 2356 | 06/11/2013 |
| Bilog Antenna | SCHWAZBECK | VULB9160 | 3084 | 09/26/2013 |
| Horn Antenna | EMCO | 3115 | 9602-4659 | 06/14/2013 |
| Horn Antenna | EMCO | 3116 | 00026370 | 10/07/2013 |
| Antenna Tower | CCS | CC-A-1F | N/A | N.C.R |
| Turn Table | CCS | CC-T-1F | N/A | N.C.R |
| Test S/W | LabVIEW 6.1 (Wugu Chamber EMI Teat V1_4.5.3) | | | |

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 MEASUREMENT UNCERTAINTY

| Parameter | Uncertainty |
|---|-------------|
| Powerline Conducted Emission | N/A |
| 3M Semi Anechoic Chamber / 30MHz ~ 1GHz | ±3.7046 |
| 3M Semi Anechoic Chamber / Above 1GHz | ±3.0958 |

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 163-1, Jhongsheng Rd., Sindien District, Taipei City 23151, Taiwan Tel:
886-2-2217-0894 / Fax: 886-2-2217-1029

No 11, Wugong 6th Rd, Wugu District, New Taipei City 24891, Taiwan (R.O.C)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, Taiwan, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|---|--|
| USA | A2LA | CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3 |  TESTING CERT #0824.01 |
| USA | FCC MRA | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements |  |
| Japan | VCCI | 3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements | VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-1930/1646 |
| Taiwan | TAF | EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803 |  |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 | SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014 |
| Canada | Industry Canada | RSS-Gen Issue 3 |  IC 2324C-5 |

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| For Conducted Emission Measurement: | | | | | | | |
|-------------------------------------|----------------------|-------|------------|-----------|-------|------------------|--|
| No. | Device Type | Model | Series No. | FCC ID | Brand | Data Cable | Power Cord |
| 1. | Notebook PC (Remote) | D400 | 0932RY | E2K24GBRL | DELL | N/A | I/P: Unshielded, 1.8m O/P: Unshielded, 1.0m |
| 2 | Default Hostname | ISA3 | N/A | N/A | ember | Unshielded, 0.5m | N/A |

| For Radiated Emission measurement: | | | | | | | |
|------------------------------------|-------------|-------|------------|--------|-------|------------|------------|
| No. | Device Type | Model | Series No. | FCC ID | Brand | Data Cable | Power Cord |
| | N/A | | | | | | |

****No any support equipment during the test.**

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

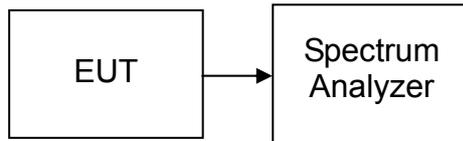

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 3MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

TEST DATA

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2405 | 1.617 | >500 | PASS |
| Mid | 2441 | 1.620 | | PASS |
| High | 2480 | 1.638 | | PASS |




Test Plot

6dB Bandwidth (CH Low)

Agilent 08:30:13 Jan 14, 2013

R L

Mkr1 1.617 MHz
-0.48 dB

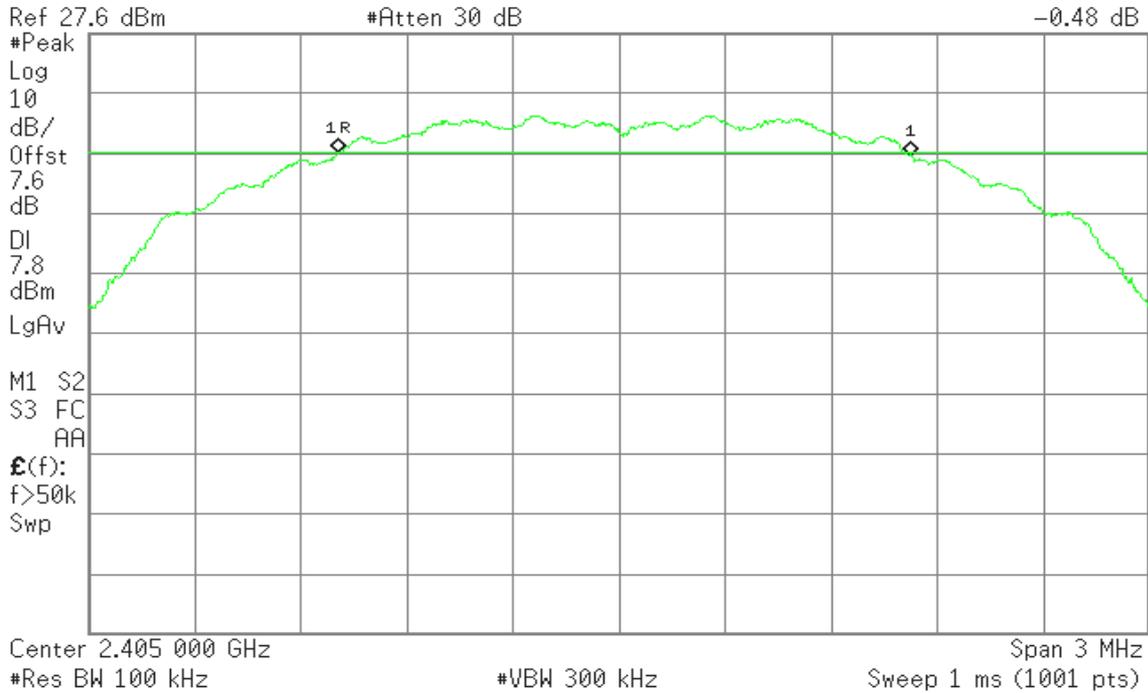


6dB Bandwidth (CH Mid)

Agilent 08:31:59 Jan 14, 2013

R L

Mkr1 1.620 MHz
-0.22 dB

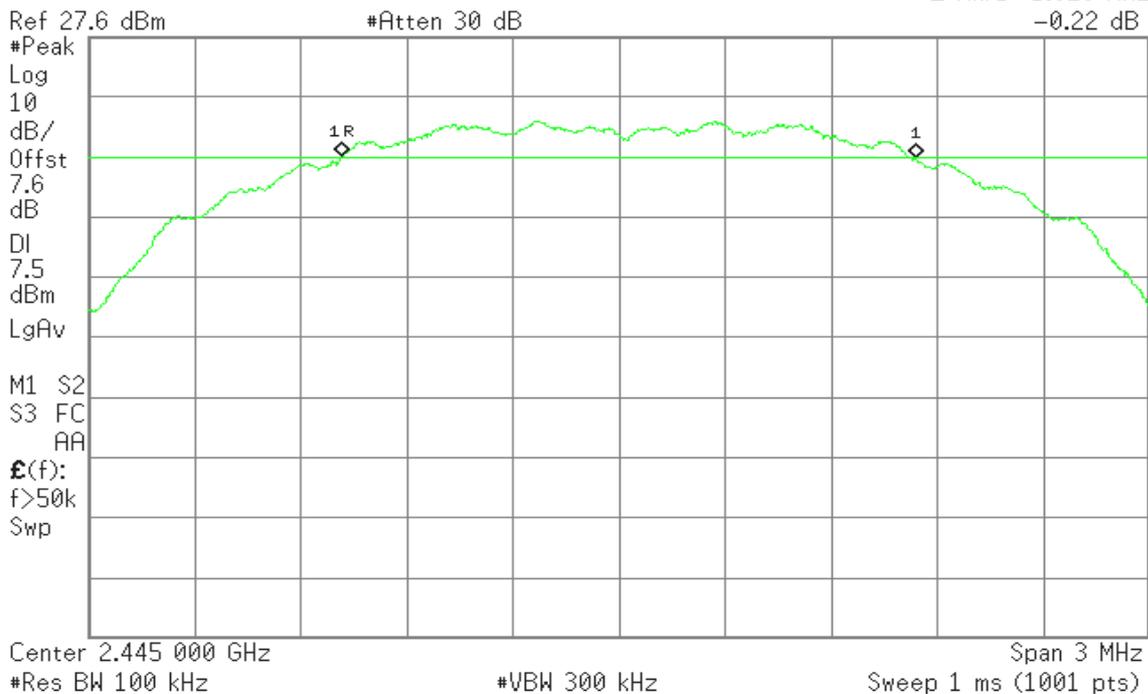



6dB Bandwidth (CH High)

Agilent 00:57:37 Jan 19, 2013

R L

Mkr1 1.638 MHz
-0.18 dB

Ref 27.6 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

7.6

dB

DI

-8.7

dBm

LgAv

M1 S2

S3 FC

AA

f(f):

f>50k

Swp


Center 2.480 000 GHz

Span 3 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1 ms (1001 pts)

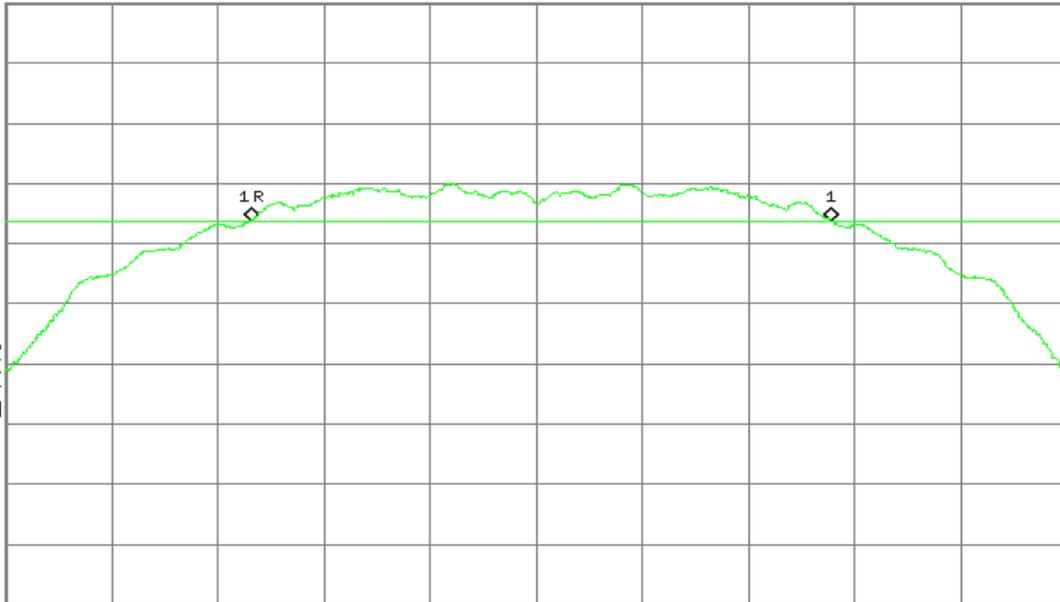




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST CONFIGURATION

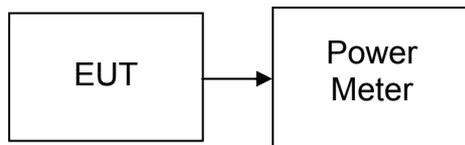

TEST PROCEDURE

Per KDB 558074 V02

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2405 | 17.41 | 0.0551 | 1 | PASS |
| Mid | 2441 | 17.46 | 0.0557 | | PASS |
| High | 2480 | 3.59 | 0.0023 | | PASS |




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION

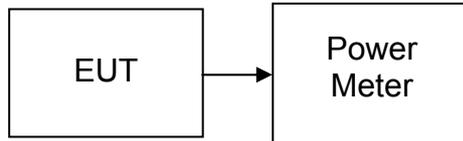

TEST PROCEDURE

Per KDB 558074 V02

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2405 | 17.32 | 0.0540 |
| Mid | 2441 | 17.39 | 0.0548 |
| High | 2480 | 3.41 | 0.0022 |




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

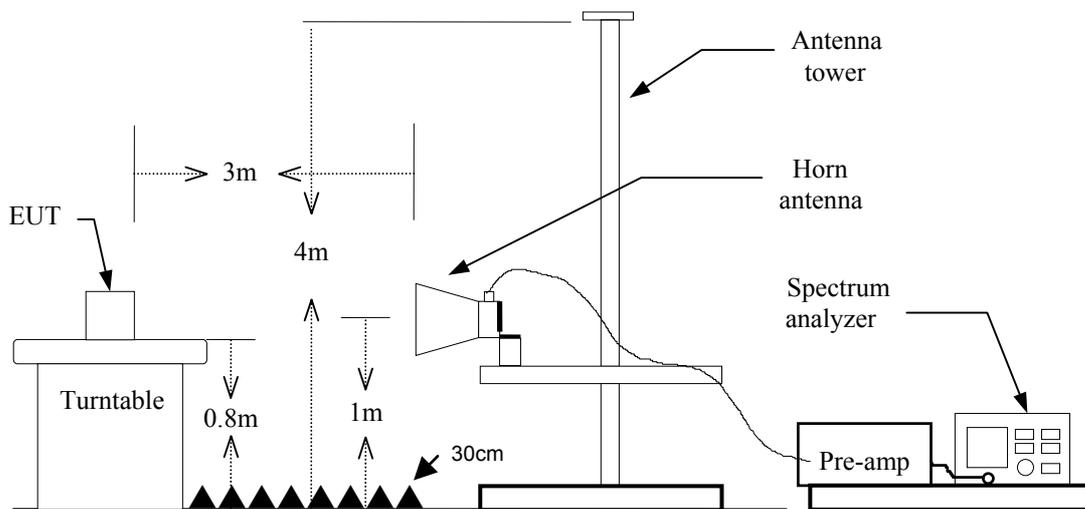

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=100ms
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Plot


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:26:08 Jan 12, 2013

R L

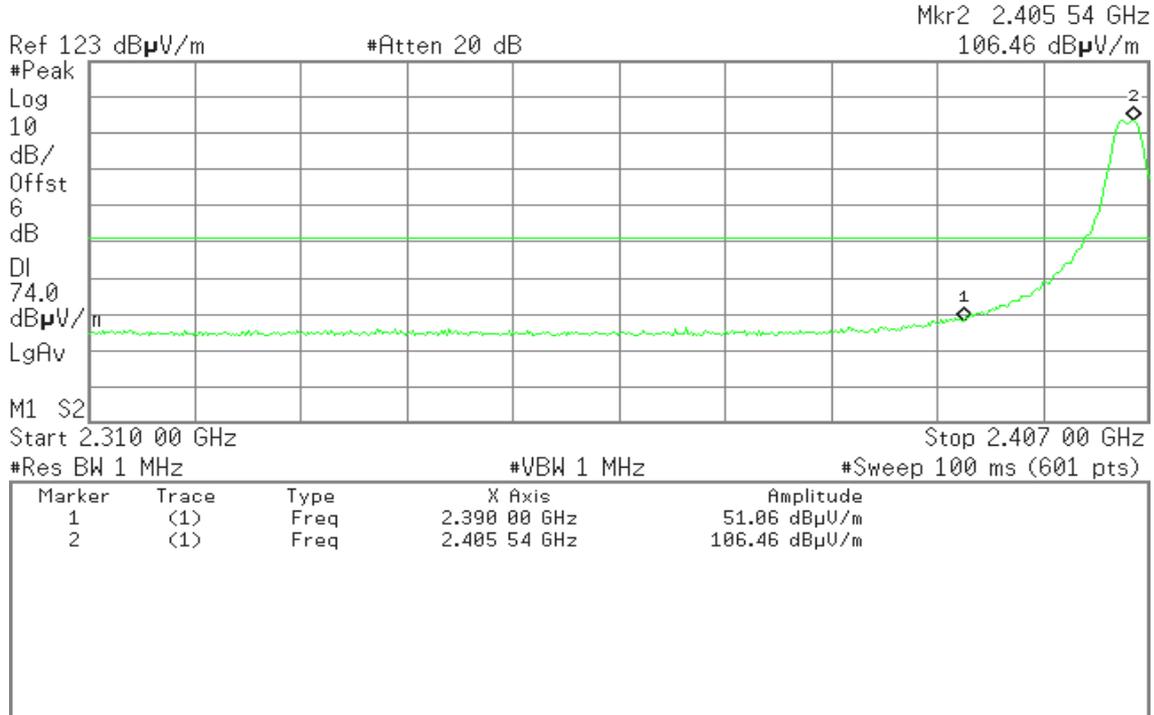


Detector mode: Average

Polarity: Vertical

Agilent 11:26:55 Jan 12, 2013

R L

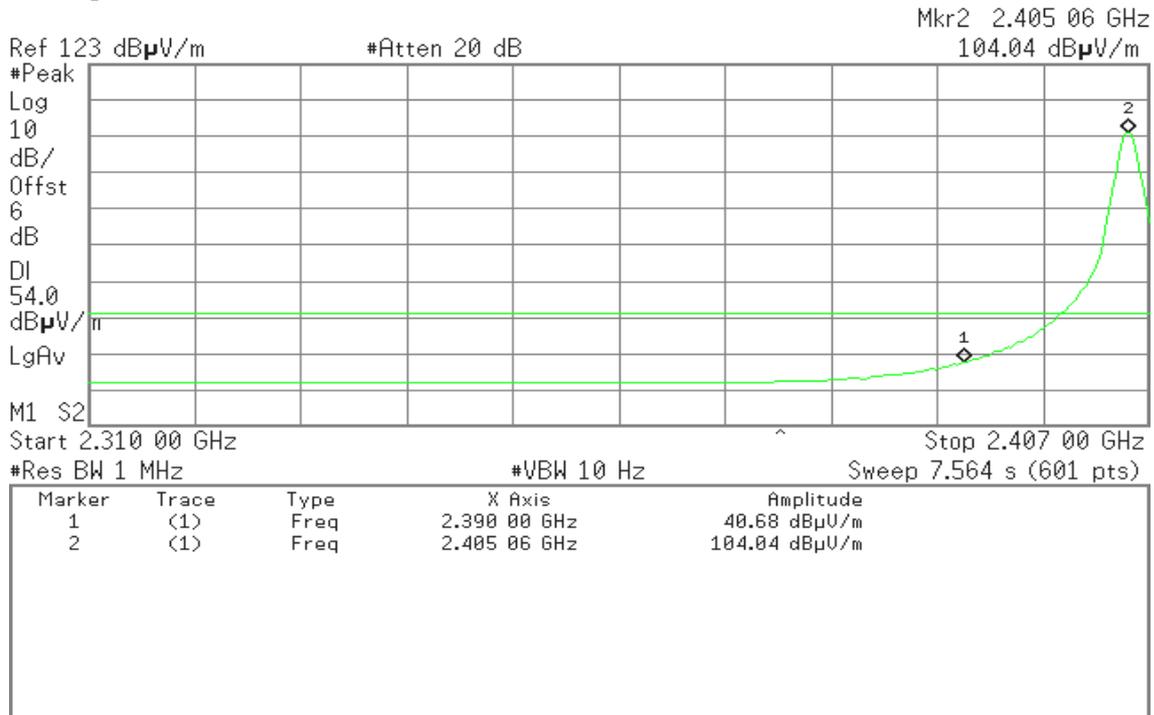




Detector mode: Peak

Polarity: Horizontal

Agilent 11:18:14 Jan 12, 2013

R L

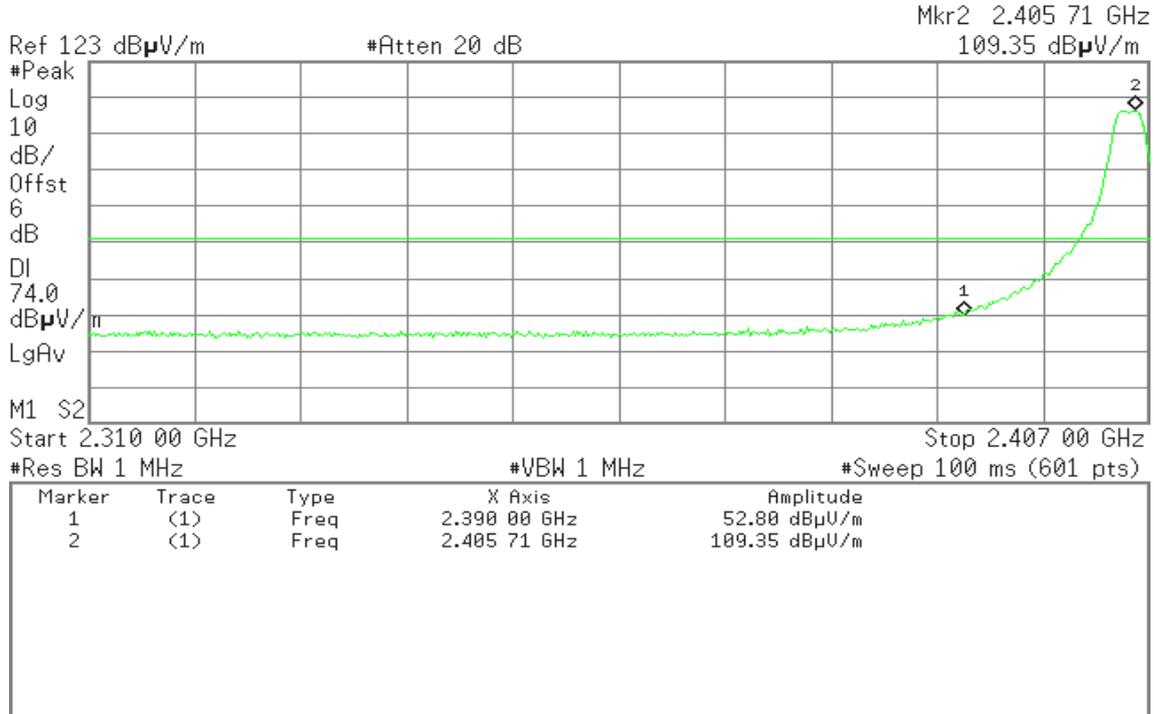


Detector mode: Average

Polarity: Horizontal

Agilent 11:19:06 Jan 12, 2013

R L

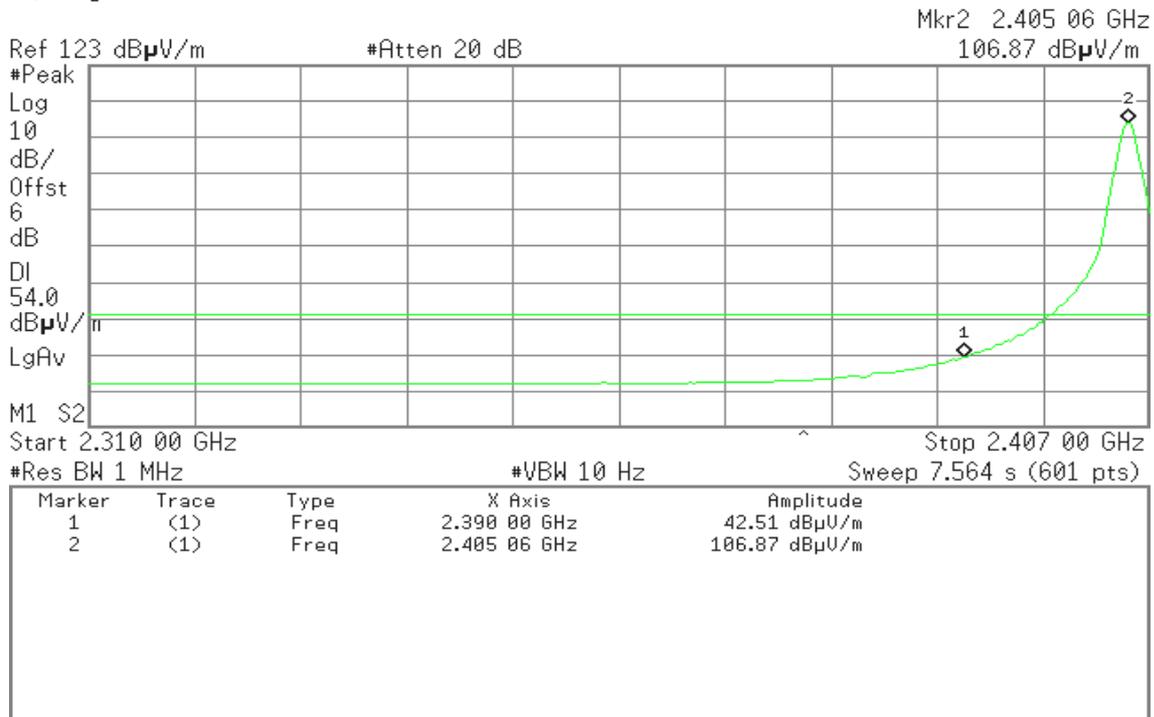



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 00:11:00 Jan 19, 2013

R L

Mkr1 2.479 50 GHz
92.70 dBµV/m

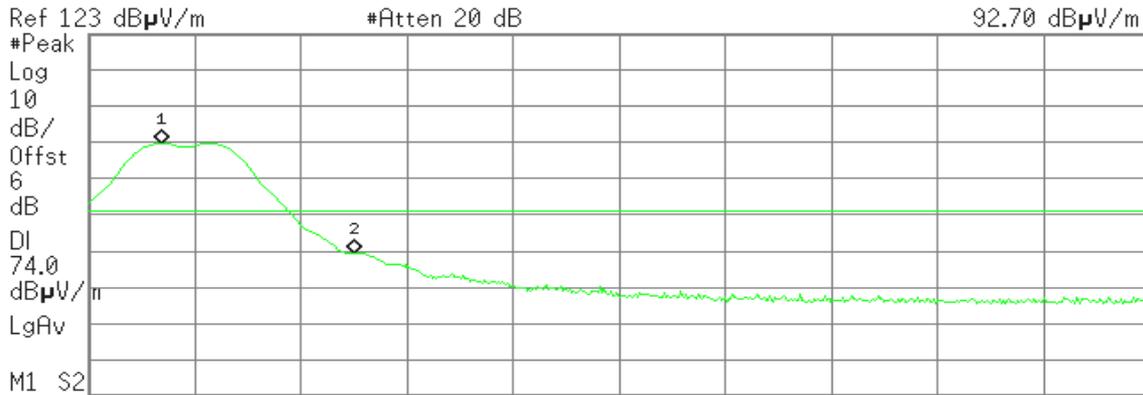

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|--------------|
| 1 | (1) | Freq | 2.479 50 GHz | 92.70 dBµV/m |
| 2 | (1) | Freq | 2.483 50 GHz | 62.39 dBµV/m |

Detector mode: Average

Polarity: Vertical

Agilent 00:09:39 Jan 19, 2013

R T

Mkr1 2.480 05 GHz
90.34 dBµV/m



| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|--------------|
| 1 | (1) | Freq | 2.480 05 GHz | 90.34 dBµV/m |
| 2 | (1) | Freq | 2.483 50 GHz | 51.48 dBµV/m |



Detector mode: Peak

Polarity: Horizontal


Agilent 00:12:34 Jan 19, 2013

R L

Mkr1 2.479 50 GHz
96.08 dBµV/m

Ref 123 dBµV/m

#Atten 20 dB

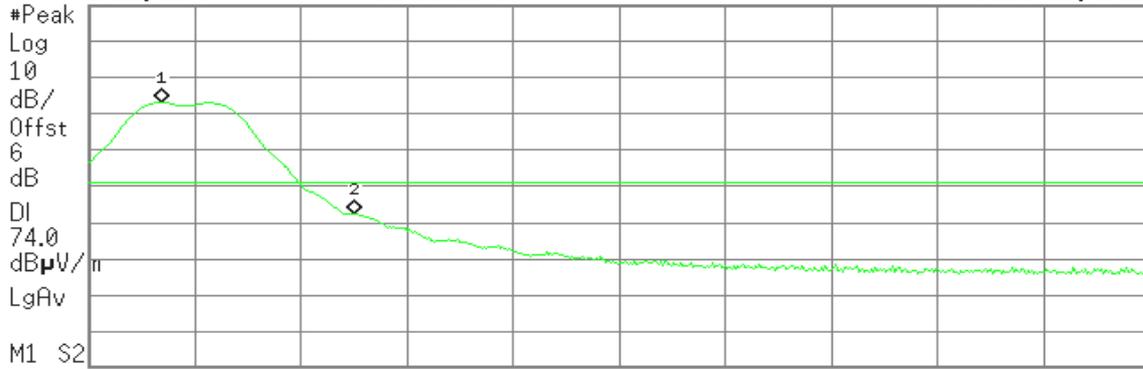

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|--------------|
| 1 | (1) | Freq | 2.479 50 GHz | 96.08 dBµV/m |
| 2 | (1) | Freq | 2.483 50 GHz | 65.38 dBµV/m |

Detector mode: Average

Polarity: Horizontal


Agilent 00:14:49 Jan 19, 2013

R L

Mkr1 2.480 05 GHz
91.77 dBµV/m

Ref 123 dBµV/m

#Atten 20 dB

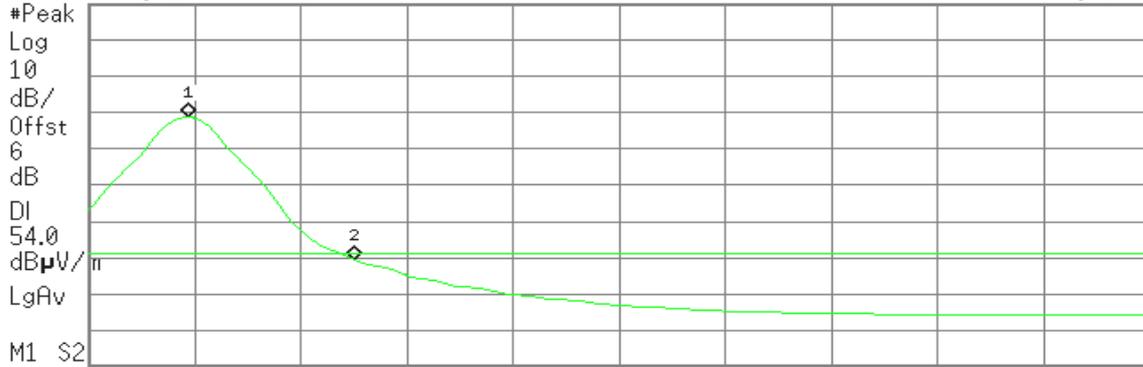

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|--------------|--------------|
| 1 | (1) | Freq | 2.480 05 GHz | 91.77 dBµV/m |
| 2 | (1) | Freq | 2.483 50 GHz | 52.59 dBµV/m |




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST CONFIGURATION

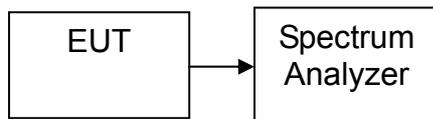

TEST PROCEDURE

Per KDB 558074 V02

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 3MHz, Sweep= auto.
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

TEST DATA

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2405 | 2.07 | 8.00 | PASS |
| Mid | 2441 | 1.42 | | |
| High | 2480 | -13.09 | | |




Test Plot

PPSD (CH Low)

Agilent 08:19:17 Jan 14, 2013

R L

Mkr1 2.404 571 GHz
2.07 dBm

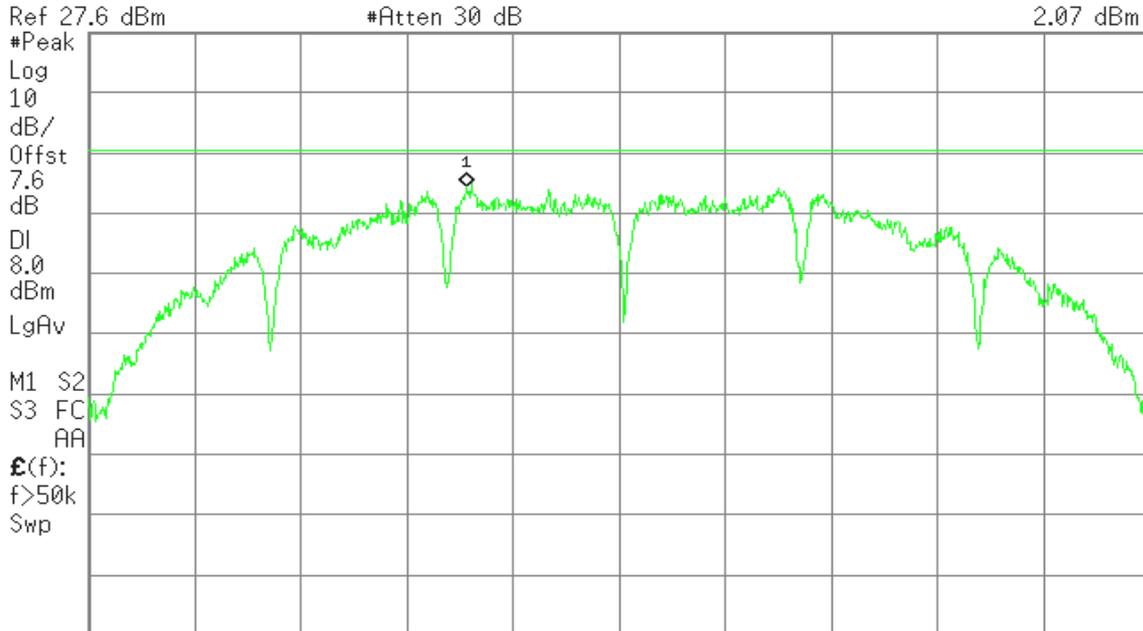


Center 2.405 000 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 316.3 ms (1001 pts) Span 3 MHz

PPSD (CH Mid)

Agilent 08:21:02 Jan 14, 2013

R L

Mkr1 2.445 114 GHz
1.42 dBm

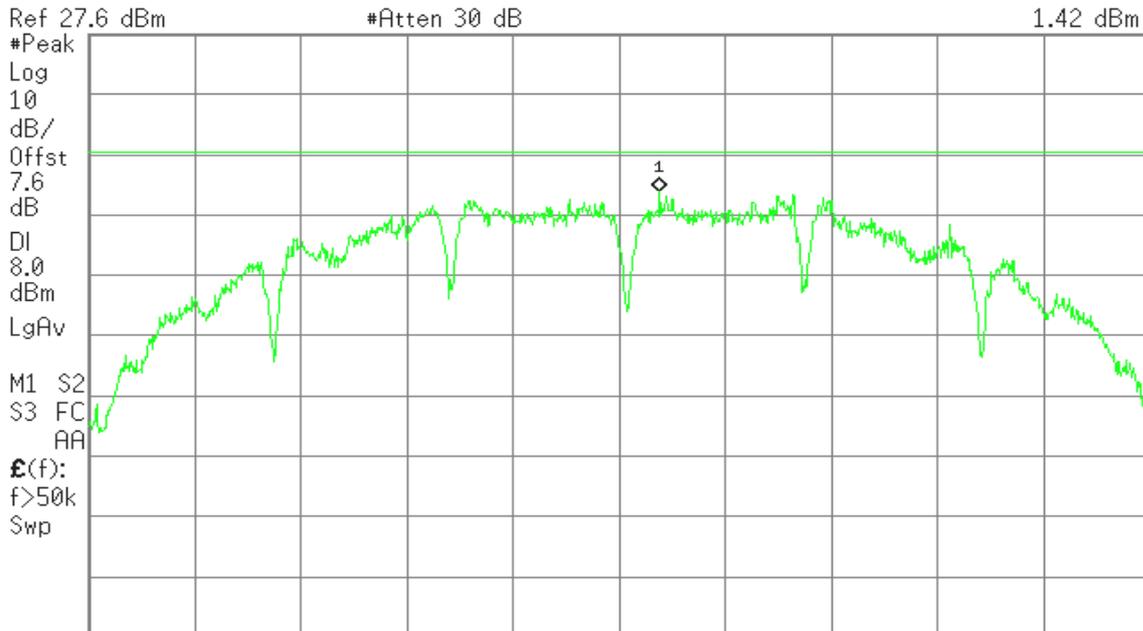

Center 2.445 000 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 316.3 ms (1001 pts) Span 3 MHz




PPSD (CH High)

Agilent 01:11:06 Jan 19, 2013

R L

Mkr1 2.480 147 GHz
-13.09 dBm

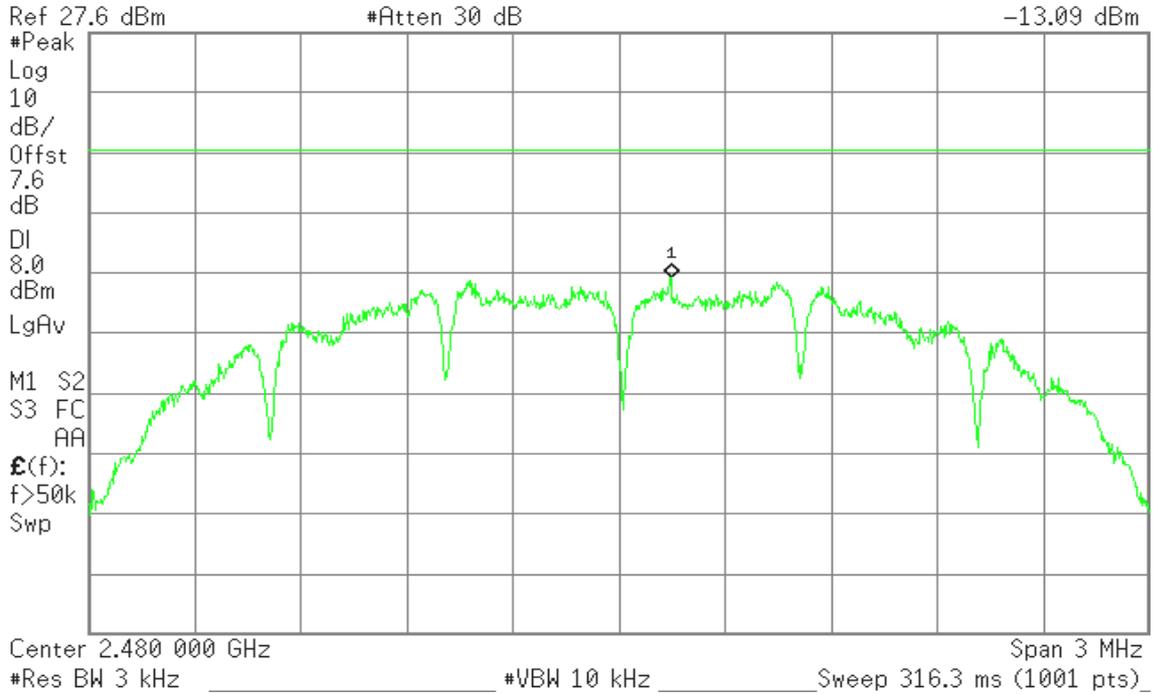




7.6 SPURIOUS EMISSIONS

7.6.1 CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

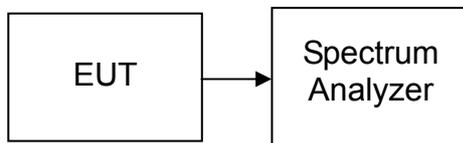

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.




Test Plot

Spurious Emissions

CH Low

Agilent 08:52:38 Jan 14, 2013


R L

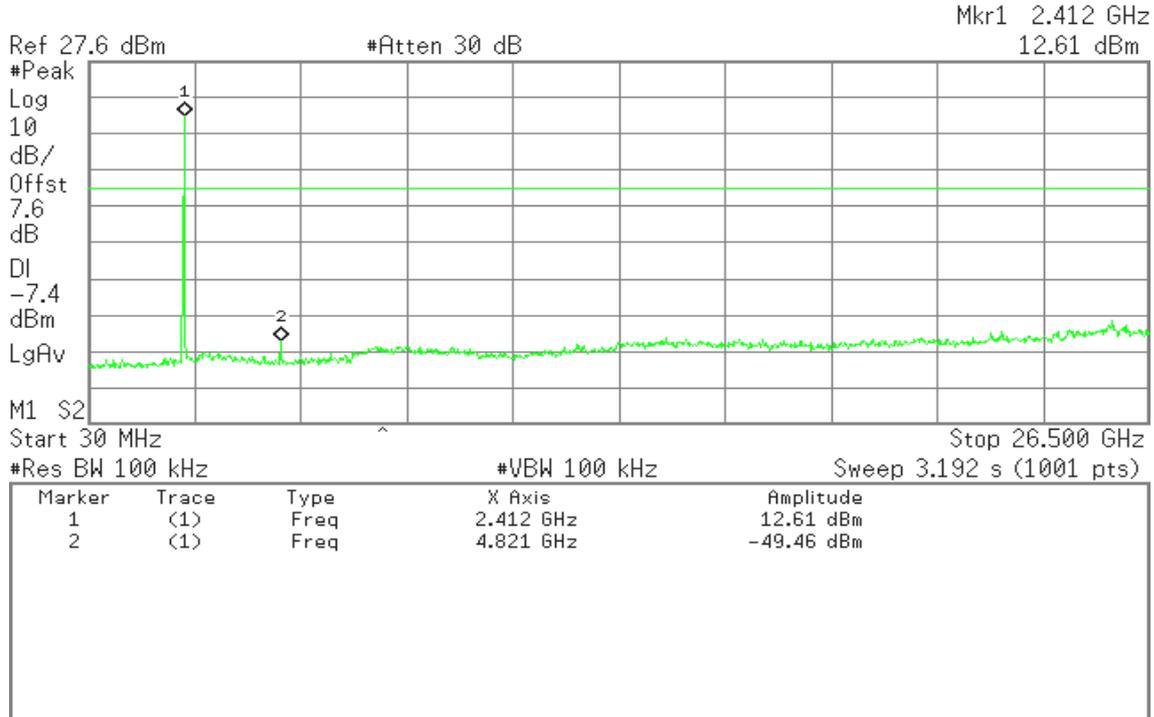

CH Mid

Agilent 08:55:02 Jan 14, 2013

R L

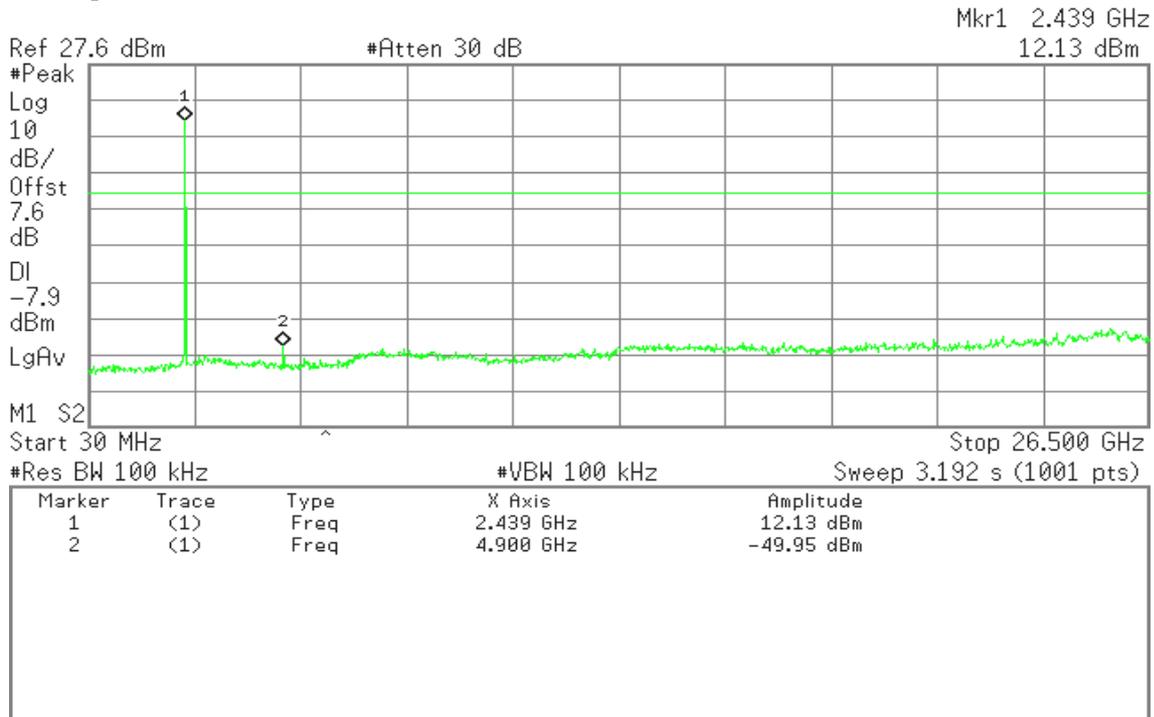




CH High

Agilent 01:18:16 Jan 19, 2013

R L

Mkr1 2.492 GHz
-3.28 dBm

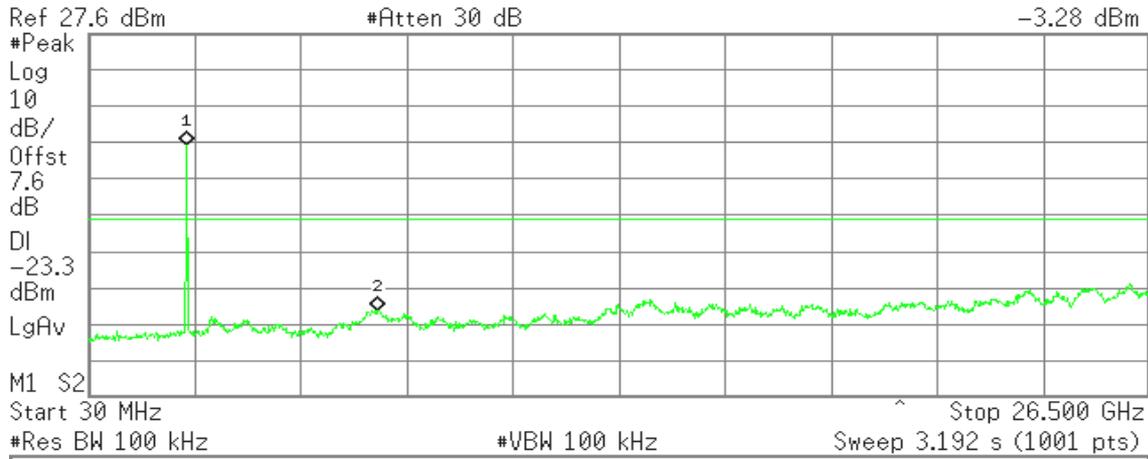

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|-----------|------------|
| 1 | (1) | Freq | 2.492 GHz | -3.28 dBm |
| 2 | (1) | Freq | 7.256 GHz | -48.56 dBm |



Conducted band-edge

CH Low

Agilent 08:46:21 Jan 14, 2013

R L

Mkr2 2.404 790 GHz
13.70 dBm



| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.400 000 GHz | -28.28 dBm |
| 2 | (1) | Freq | 2.404 790 GHz | 13.70 dBm |

CH High

Agilent 01:15:09 Jan 19, 2013

R L

Mkr1 2.479 760 GHz
-2.16 dBm



| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|---------------|------------|
| 1 | (1) | Freq | 2.479 760 GHz | -2.16 dBm |
| 2 | (1) | Freq | 2.483 500 GHz | -46.57 dBm |
| 3 | (1) | Freq | 2.483 962 GHz | -37.49 dBm |



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter) |
|-----------------|--|---|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |




TEST CONFIGURATION

Below 1 GHz

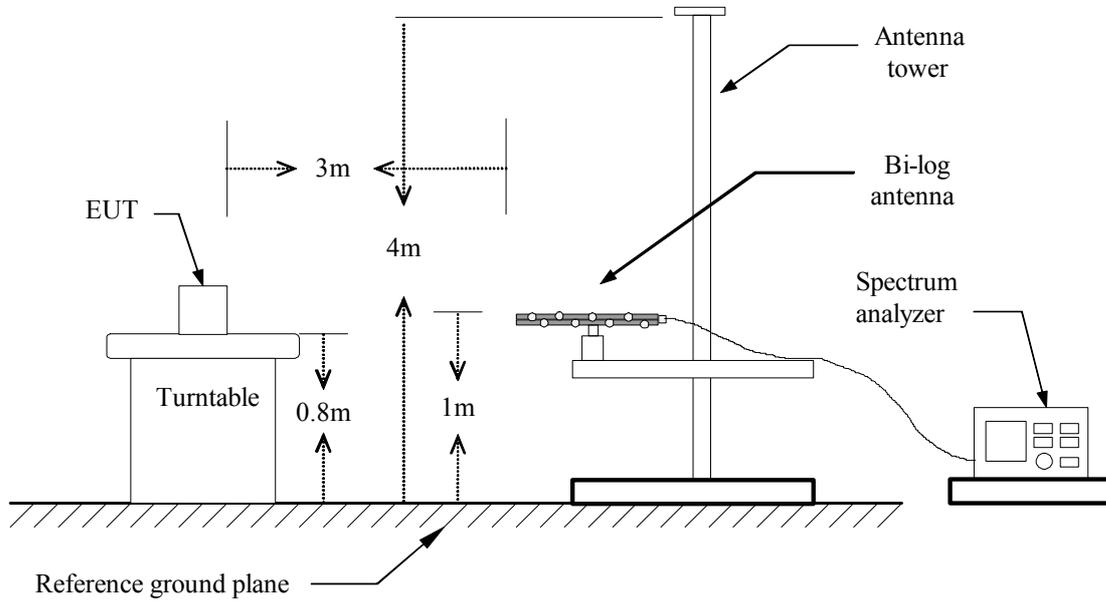

Above 1 GHz

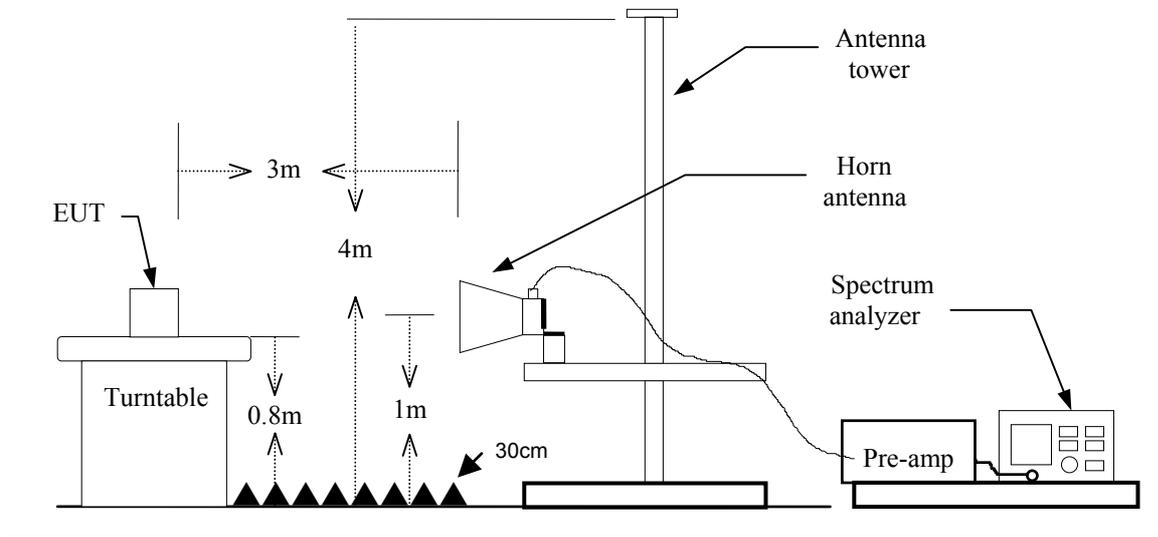



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 30MHz

RBW=9kHz / VBW=300kHz / Sweep=AUTO

30 ~ 1000MHz:

RBW=120kHz / VBW=3MHz / Sweep=AUTO

Above 1GHz:

(a)PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.



TEST DATA

Below 1GHz

Operation Mode: Transmitting **Test Date:** January 22, 2013
Temperature: 26°C **Tested by:** Francis Lee
Humidity: 56% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant. Pol. (H/V) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|-----------------|--------|
| 42.6100 | 42.72 | -8.14 | 34.58 | 40.00 | -5.42 | V | QP |
| 95.9600 | 28.09 | 2.72 | 30.81 | 43.50 | -12.69 | V | QP |
| 136.7000 | 28.54 | 1.91 | 30.45 | 43.50 | -13.05 | V | QP |
| 159.9800 | 29.61 | -1.08 | 28.53 | 43.50 | -14.97 | V | QP |
| 575.1400 | 30.43 | -4.08 | 26.35 | 46.00 | -19.65 | V | QP |
| 935.0100 | 31.22 | 0.12 | 31.34 | 46.00 | -14.66 | V | QP |
| 71.7100 | 41.67 | -6.15 | 35.52 | 40.00 | -4.48 | H | QP |
| 158.0400 | 28.77 | 4.10 | 32.87 | 43.50 | -10.63 | H | QP |
| 549.9200 | 30.23 | -4.55 | 25.68 | 46.00 | -20.32 | H | QP |
| 625.5800 | 30.42 | -4.64 | 25.78 | 46.00 | -20.22 | H | QP |
| 800.1800 | 29.39 | -4.44 | 24.95 | 46.00 | -21.05 | H | QP |
| 941.8000 | 29.95 | -1.90 | 28.05 | 46.00 | -17.95 | H | QP |

Remark:

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 9 kHz to the 1GHz.
3. Radiated emissions measured in the measured frequency range were made with an instrument using peak detector or quasi-peak detector mode.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX / CH Low

Test Date: January 11, 2013

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

| Freq. (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant. Pol H/V | Remark |
|-------------|----------------|-----------------------|-----------------|----------------|-------------|--------------|--------|
| 2016.000 | 53.32 | -1.66 | 51.66 | 74.00 | -22.34 | V | peak |
| 2230.000 | 52.82 | -1.40 | 51.42 | 74.00 | -22.58 | V | peak |
| 2534.000 | 53.00 | -1.35 | 51.65 | 74.00 | -22.35 | V | peak |
| 4190.000 | 41.23 | 2.56 | 43.79 | 74.00 | -30.21 | V | peak |
| 4810.000 | 54.79 | 2.35 | 57.14 | 74.00 | -16.86 | V | peak |
| 4810.000 | 46.39 | 2.35 | 48.74 | 54.00 | -5.26 | V | AVG |
| 5400.000 | 39.60 | 6.39 | 45.99 | 74.00 | -28.01 | V | peak |
| 7215.000 | 52.10 | 10.12 | 62.22 | 74.00 | -11.78 | V | peak |
| 7215.000 | 42.97 | 10.12 | 53.09 | 54.00 | -0.91 | V | AVG |
| 9320.000 | 41.99 | 15.59 | 57.58 | 74.00 | -16.42 | V | peak |
| 9320.000 | 28.33 | 15.59 | 43.92 | 54.00 | -10.08 | V | AVG |
| 9620.000 | 41.24 | 14.22 | 55.46 | 74.00 | -18.54 | V | peak |
| 9620.000 | 33.91 | 14.22 | 48.13 | 54.00 | -5.87 | V | AVG |
| 12020.000 | 48.25 | 10.77 | 59.02 | 74.00 | -14.98 | V | peak |
| 12020.000 | 38.69 | 10.77 | 49.46 | 54.00 | -4.54 | V | AVG |
| 14430.000 | 42.11 | 14.90 | 57.01 | 74.00 | -16.99 | V | peak |
| 14430.000 | 34.08 | 14.90 | 48.98 | 54.00 | -5.02 | V | AVG |
| 1834.000 | 51.76 | -6.42 | 45.34 | 74.00 | -28.66 | H | peak |
| 2144.000 | 53.08 | -3.68 | 49.40 | 74.00 | -24.60 | H | peak |
| 2520.000 | 53.21 | -3.72 | 49.49 | 74.00 | -24.51 | H | peak |
| 4325.000 | 40.65 | 7.47 | 48.12 | 74.00 | -25.88 | H | peak |
| 4810.000 | 58.19 | 5.62 | 63.81 | 74.00 | -10.19 | H | peak |
| 4810.000 | 45.84 | 5.62 | 51.46 | 54.00 | -2.54 | H | AVG |
| 5575.000 | 39.49 | 9.11 | 48.60 | 74.00 | -25.40 | H | peak |
| 7215.000 | 45.74 | 10.69 | 56.43 | 74.00 | -17.57 | H | peak |
| 7215.000 | 39.02 | 10.69 | 49.71 | 54.00 | -4.29 | H | AVG |
| 9070.000 | 39.67 | 16.27 | 55.94 | 74.00 | -18.06 | H | peak |
| 9070.000 | 27.89 | 16.27 | 44.16 | 54.00 | -9.84 | H | AVG |
| 9450.000 | 40.57 | 15.08 | 55.65 | 74.00 | -18.35 | H | peak |
| 9450.000 | 28.61 | 15.08 | 43.69 | 54.00 | -10.31 | H | AVG |
| 9620.000 | 50.67 | 14.44 | 65.11 | 74.00 | -8.89 | H | peak |
| 9620.000 | 38.30 | 14.44 | 52.74 | 54.00 | -1.26 | H | AVG |
| 12030.000 | 44.11 | 10.78 | 54.89 | 74.00 | -19.11 | H | peak |
| 12030.000 | 33.46 | 10.78 | 44.24 | 54.00 | -9.76 | H | AVG |



Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*



Operation Mode: TX / CH Mid

Test Date: January 11, 2013

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

| Freq. (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant. Pol H/V | Remark |
|-------------|----------------|-----------------------|-----------------|----------------|-------------|--------------|--------|
| 2180.000 | 53.00 | -1.78 | 51.22 | 74.00 | -22.78 | V | peak |
| 2288.000 | 52.86 | -1.52 | 51.34 | 74.00 | -22.66 | V | peak |
| 2666.000 | 53.38 | -1.71 | 51.67 | 74.00 | -22.33 | V | peak |
| 4890.000 | 54.75 | 4.15 | 58.90 | 74.00 | -15.10 | V | peak |
| 4890.000 | 45.88 | 4.15 | 50.03 | 54.00 | -3.97 | V | AVG |
| 5415.000 | 39.74 | 6.37 | 46.11 | 74.00 | -27.89 | V | peak |
| 7335.000 | 47.70 | 10.77 | 58.47 | 74.00 | -15.53 | V | peak |
| 7335.000 | 39.18 | 10.77 | 49.95 | 54.00 | -4.05 | V | AVG |
| 9300.000 | 39.82 | 16.11 | 55.93 | 74.00 | -18.07 | V | peak |
| 9300.000 | 28.35 | 16.11 | 44.46 | 54.00 | -9.54 | V | AVG |
| 9780.000 | 42.09 | 13.82 | 55.91 | 74.00 | -18.09 | V | peak |
| 9780.000 | 34.44 | 13.82 | 48.26 | 54.00 | -5.74 | V | AVG |
| 12220.000 | 46.30 | 10.88 | 57.18 | 74.00 | -16.82 | V | peak |
| 12220.000 | 37.25 | 10.88 | 48.13 | 54.00 | -5.87 | V | AVG |
| 14670.000 | 45.99 | 14.27 | 60.26 | 74.00 | -13.74 | V | peak |
| 14670.000 | 36.85 | 14.27 | 51.12 | 54.00 | -2.88 | V | AVG |
| 1862.000 | 53.43 | -6.16 | 47.27 | 74.00 | -26.73 | H | peak |
| 2150.000 | 52.74 | -3.67 | 49.07 | 74.00 | -24.93 | H | peak |
| 2740.000 | 52.77 | -3.01 | 49.76 | 74.00 | -24.24 | H | peak |
| 4890.000 | 55.12 | 6.98 | 62.10 | 74.00 | -11.90 | H | peak |
| 4890.000 | 46.18 | 6.98 | 53.16 | 54.00 | -0.84 | H | AVG |
| 6740.000 | 40.89 | 8.73 | 49.62 | 74.00 | -24.38 | H | peak |
| 7335.000 | 43.60 | 11.64 | 55.24 | 74.00 | -18.76 | H | peak |
| 7335.000 | 35.04 | 11.64 | 46.68 | 54.00 | -7.32 | H | AVG |
| 9780.000 | 48.19 | 13.99 | 62.18 | 74.00 | -11.82 | H | peak |
| 9780.000 | 39.33 | 13.99 | 53.32 | 54.00 | -0.68 | H | AVG |
| 12230.000 | 42.71 | 10.88 | 53.59 | 74.00 | -20.41 | H | peak |
| 12230.000 | 34.45 | 10.88 | 45.33 | 54.00 | -8.67 | H | AVG |
| 14670.000 | 40.57 | 14.27 | 54.84 | 74.00 | -19.16 | H | peak |
| 14670.000 | 30.76 | 14.27 | 45.03 | 54.00 | -8.97 | H | AVG |



Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*



Operation Mode: TX / CH High

Test Date: January 11, 2013

Temperature: 26°C

Tested by: Francis Lee

Humidity: 56 % RH

Polarity: Ver. / Hor.

| Freq. (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant. Pol H/V | Remark |
|-------------|----------------|-----------------------|-----------------|----------------|-------------|--------------|--------|
| 1964.000 | 52.71 | -1.87 | 50.84 | 74.00 | -23.16 | V | peak |
| 2250.000 | 52.57 | -1.44 | 51.13 | 74.00 | -22.87 | V | peak |
| 2616.000 | 53.30 | -2.06 | 51.24 | 74.00 | -22.76 | V | peak |
| 4960.000 | 57.86 | 4.94 | 62.80 | 74.00 | -11.20 | V | peak |
| 4960.000 | 48.56 | 4.94 | 53.50 | 54.00 | -0.50 | V | AVG |
| 5430.000 | 40.82 | 6.34 | 47.16 | 74.00 | -26.84 | V | peak |
| 7440.000 | 48.26 | 11.40 | 59.66 | 74.00 | -14.34 | V | peak |
| 7440.000 | 39.77 | 11.40 | 51.17 | 54.00 | -2.83 | V | AVG |
| 9690.000 | 40.21 | 13.36 | 53.57 | 74.00 | -20.43 | V | peak |
| 9690.000 | 30.11 | 13.36 | 43.47 | 54.00 | -10.53 | V | AVG |
| 9920.000 | 40.51 | 12.51 | 53.02 | 74.00 | -20.98 | V | peak |
| 9920.000 | 34.72 | 12.51 | 47.23 | 54.00 | -6.77 | V | AVG |
| 12400.000 | 44.98 | 10.98 | 55.96 | 74.00 | -18.04 | V | peak |
| 12400.000 | 35.35 | 10.98 | 46.33 | 54.00 | -7.67 | V | AVG |
| 14880.000 | 45.24 | 13.61 | 58.85 | 74.00 | -15.15 | V | peak |
| 14880.000 | 38.17 | 13.61 | 51.78 | 54.00 | -2.22 | V | AVG |
| 1900.000 | 52.41 | -5.81 | 46.60 | 74.00 | -27.40 | H | peak |
| 2192.000 | 53.40 | -3.58 | 49.82 | 74.00 | -24.18 | H | peak |
| 2764.000 | 53.61 | -2.80 | 50.81 | 74.00 | -23.19 | H | peak |
| 4960.000 | 57.39 | 7.41 | 64.80 | 74.00 | -9.20 | H | peak |
| 4960.000 | 46.00 | 7.41 | 53.41 | 54.00 | -0.59 | H | AVG |
| 5635.000 | 39.31 | 8.81 | 48.12 | 74.00 | -25.88 | H | peak |
| 7440.000 | 43.13 | 11.14 | 54.27 | 74.00 | -19.73 | H | peak |
| 7440.000 | 35.78 | 11.14 | 46.92 | 54.00 | -7.08 | H | AVG |
| 9290.000 | 40.38 | 15.57 | 55.95 | 74.00 | -18.05 | H | peak |
| 9290.000 | 28.27 | 15.57 | 43.84 | 54.00 | -10.16 | H | AVG |
| 9920.000 | 46.98 | 12.08 | 59.06 | 74.00 | -14.94 | H | peak |
| 9920.000 | 37.20 | 12.08 | 49.28 | 54.00 | -4.72 | H | AVG |
| 12400.000 | 41.15 | 10.98 | 52.13 | 74.00 | -21.87 | H | peak |
| 12400.000 | 31.68 | 10.98 | 42.66 | 54.00 | -11.34 | H | AVG |
| 14880.000 | 40.38 | 13.61 | 53.99 | 74.00 | -20.01 | H | peak |
| 14880.000 | 34.17 | 13.61 | 47.78 | 54.00 | -6.22 | H | AVG |



Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dBμV) | |
|-----------------------|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA

Not applicable (Since the EUT is powered by battery)