

FCC Radio Test Report

FCC ID: P27SZWTD02N

This report concerns (check one): ☒Original Grant ☐Class II Change

Project No. : 1507162
Equipment : Zigbee Water Sensor
Model Name : SZ-WTD02Nxxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, "blank" or "-", for marking purpose)
Applicant : Sercomm Corporation
Address : 8F, No. 3-1, YuanQu St., NanKang, Taipei, Taiwan 115

Date of Receipt : Nov. 27, 2014
Jul. 20, 2015
Date of Test : Nov. 27, 2014~ Dec. 19, 2014
Jul. 20, 2015 ~ Aug. 21, 2015
Issued Date : Aug. 24, 2015
Tested by : BTL Inc.

Testing Engineer

:

Rush Kao

(Rush Kao)

Technical Manager

:

Jeff Yang

(Jeff Yang)

Authorized Signatory

:

Andy Chiu

(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 RADIATED EMISSION MEASUREMENT	13
4.1.1 RADIATED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT TEST CONDITIONS	16
4.1.6 TEST RESULTS (9KHZ TO 30MHZ)	16
4.1.7 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	17
4.1.8 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . BANDWIDTH TEST	18
5.1 APPLIED PROCEDURES / LIMIT	18
5.1.1 TEST PROCEDURE	18
5.1.2 DEVIATION FROM STANDARD	18
5.1.3 TEST SETUP	18
5.1.4 EUT OPERATION CONDITIONS	18
5.1.5 EUT TEST CONDITIONS	18
5.1.6 TEST RESULTS	18
6 . MAXIMUM OUTPUT POWER TEST	19
6.1 APPLIED PROCEDURES / LIMIT	19
6.1.1 TEST PROCEDURE	19
6.1.2 DEVIATION FROM STANDARD	19
6.1.3 TEST SETUP	19
6.1.4 EUT OPERATION CONDITIONS	19
6.1.5 EUT TEST CONDITIONS	19
6.1.6 TEST RESULTS	19

Table of Contents	Page
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	20
7.1 APPLIED PROCEDURES / LIMIT	20
7.1.1 TEST PROCEDURE	20
7.1.2 DEVIATION FROM STANDARD	20
7.1.3 TEST SETUP	20
7.1.4 EUT OPERATION CONDITIONS	20
7.1.5 EUT OPERATION CONDITIONS	20
7.1.6 TEST RESULTS	20
8 . POWER SPECTRAL DENSITY TEST	21
8.1 APPLIED PROCEDURES / LIMIT	21
8.1.1 TEST PROCEDURE	21
8.1.2 DEVIATION FROM STANDARD	21
8.1.3 TEST SETUP	21
8.1.4 EUT OPERATION CONDITIONS	21
8.1.5 EUT TEST CONDITIONS	21
8.1.6 TEST RESULTS	21
9 . MEASUREMENT INSTRUMENTS LIST	22
10 . EUT TEST PHOTO	23
ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)	26
ATTACHMENT B - RADIATED EMISSION BETWEEN (30MHZ TO 1000MHZ)	28
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	31
ATTACHMENT D - BANDWIDTH	44
ATTACHMENT E - MAXIMUM OUTPUT POWER TEST	47
ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION	48
ATTACHMENT G - POWER SPECTRAL DENSITY TEST	52

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1507162	Original Issue.	Aug. 24, 2015

1. CERTIFICATION

Equipment : Zigbee Water Sensor
Brand Name : Sercomm
Model Name : SZ-WTD02Nxxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, "blank" or "-", for marking purpose)
Applicant : Sercomm Corporation
Manufacturer : SERCOMM CORP
Address : 3F 81 YUYI RD CHU-NAN MIAO-LI, 350 TAIWAN
Factory : SERCOMM CORP
Address : 3F 81 YUYI RD CHU-NAN MIAO-LI, 350 TAIWAN
Date of Test : Nov. 27, 2014~ Dec. 19, 2014
Jul. 20, 2015 ~ Aug. 21, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C :2014 (15.247) / ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1507162) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
	15.207	Conducted Emission	N/A	
	15.247(d)	Antenna conducted Spurious Emission	PASS	
	15.247(a)(2)	6dB Bandwidth	PASS	
	15.247(b)(3)	Peak Output Power	PASS	
	15.247(e)	Power Spectral Density	PASS	
	15.203	Antenna Requirement	PASS	
	15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Radiated emission Test:

CB08: (VCCI RN: R-4259; FCC RN:965108; FCC DN:TW1082; IC Assigned Code:20088)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Radiated emission test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08 (10m)	CISPR	30 MHz ~ 200 MHz	V	4.04	
		30 MHz ~ 200 MHz	H	4.04	
		200 MHz ~ 1, 000 MHz	V	4.08	
		200 MHz ~ 1, 000 MHz	H	4.02	

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
CB08 (3m)	CISPR	1 ~ 6 GHz	4.62	
		6 ~18 GHz	4.88	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Zigbee Water Sensor	
Brand Name	Sercomm	
Model Name	SZ-WTD02Nxxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, "blank" or "-"; for marking purpose)	
Model Difference	The 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, "blank" or "-"; for marking purpose.	
Product Description	Operation Frequency	2405~2480 MHz
	Modulation Technology	OQPSK
	Bit Rate of Transmitter	250Kbps
	Output Power (Max.)	3.53 dBm
Power Source	Supplied from AA Battery*2	
Power Rating	DC 3V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

3.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	SERCOM	SZ-WTD02	Internal	N/A	3.51

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:


(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test Software Version	N/A		
Frequency (MHz)	2405	2445	2480
-	0	0	0

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

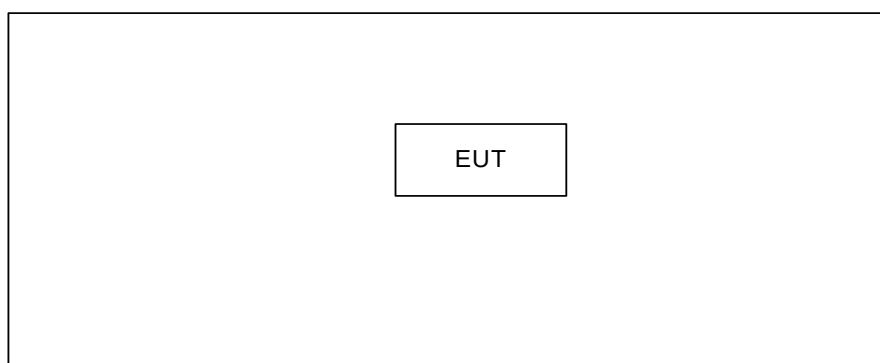

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.1.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

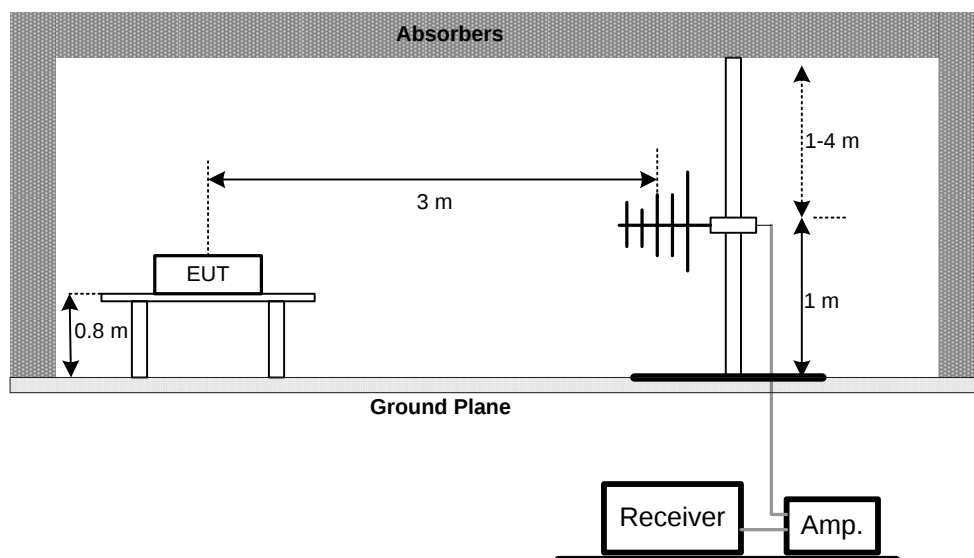

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

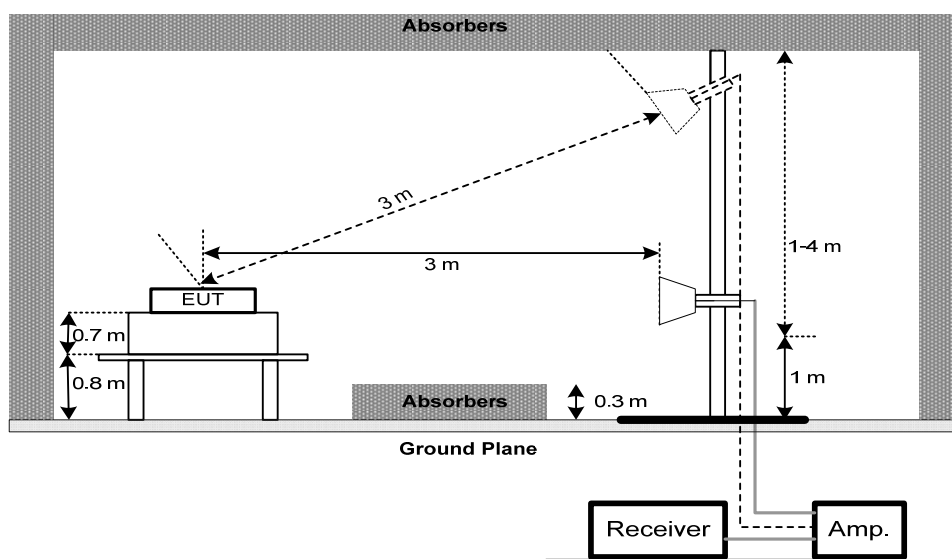

(C) For radiated emissions below 30MHz

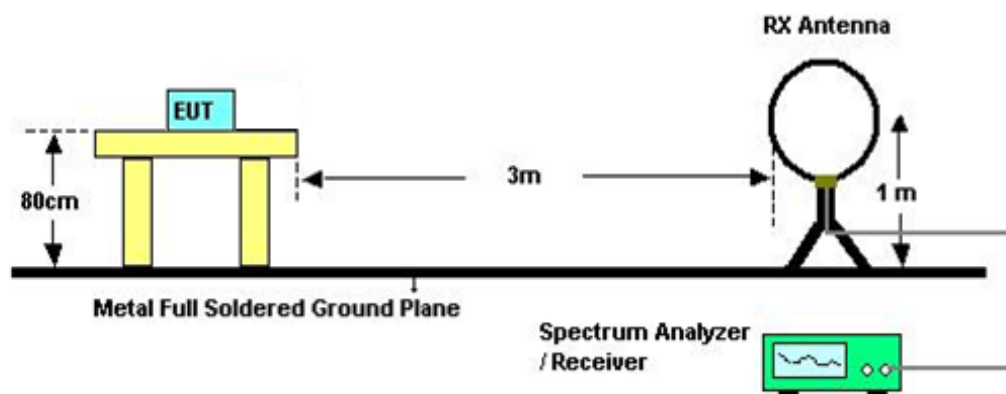

4.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3V

4.1.6 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment A.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.1.7 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment B.

Remark:

- (1) Measuring frequency range from 30MHz to 1000MHz.
- (2) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.1.8 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2405~2480 MHz	PASS


5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

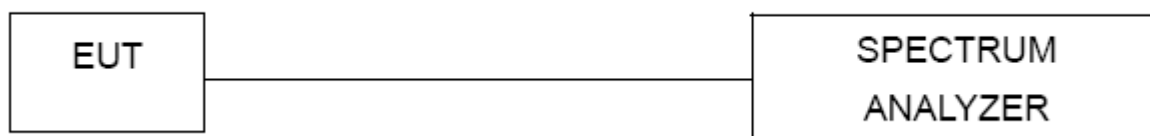

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3V

5.1.6 TEST RESULTS

Please refer to the Attachment D.

6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2405~2480 MHz	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.
 Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3V

6.1.6 TEST RESULTS

Please refer to the Attachment E.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain + cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

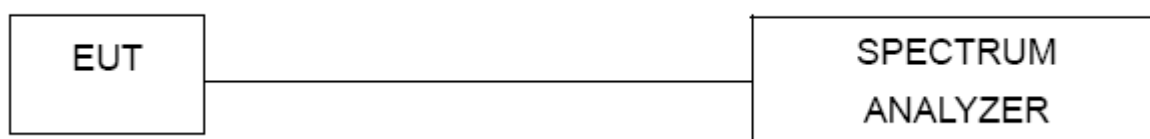

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3V

7.1.6 TEST RESULTS

Please refer to the Attachment F.

8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2405~2480 MHz	PASS


8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

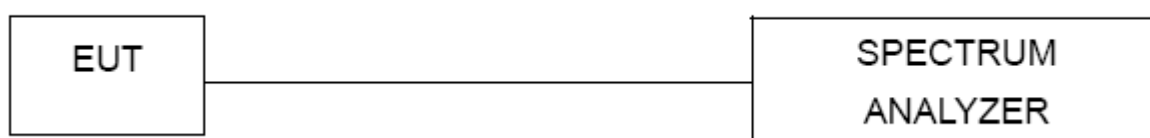

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3V

8.1.6 TEST RESULTS

Please refer to the Attachment G.

9. MEASUREMENT INSTRUMENTS LIST

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 07, 2016
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 20, 2016
3	Microwave Pre-amplifier	Agilent	8449B	3008A01714	Apr. 13, 2016
4	Microflex Cable	Harbour industries	27478LL142	1m	Apr. 13, 2016
5	Microflex Cable	EMC	S104-SMA	8m	May. 14, 2016
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2016
7	Test Cable	LMR	LMR-400	10m	May. 13, 2016
8	Test Cable	LMR	LMR-400	3m	May. 13, 2016
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 16, 2016
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jul. 30, 2016
11	Horn Antenna	Schwarzbeck	BBHA 9170	187	Mar. 22, 2016
12	Loop Antenna	EMCO	6502	00042960	Sep. 06, 2015

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2015

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter Sensor	Anritsu	MA2411B	1126001	Aug. 07, 2016
2	Signal Generator	R&S	SMR40	100502	Aug. 07, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2015


Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2015

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT TEST PHOTO


Radiated Measurement Photos

9KHz to 30MHz

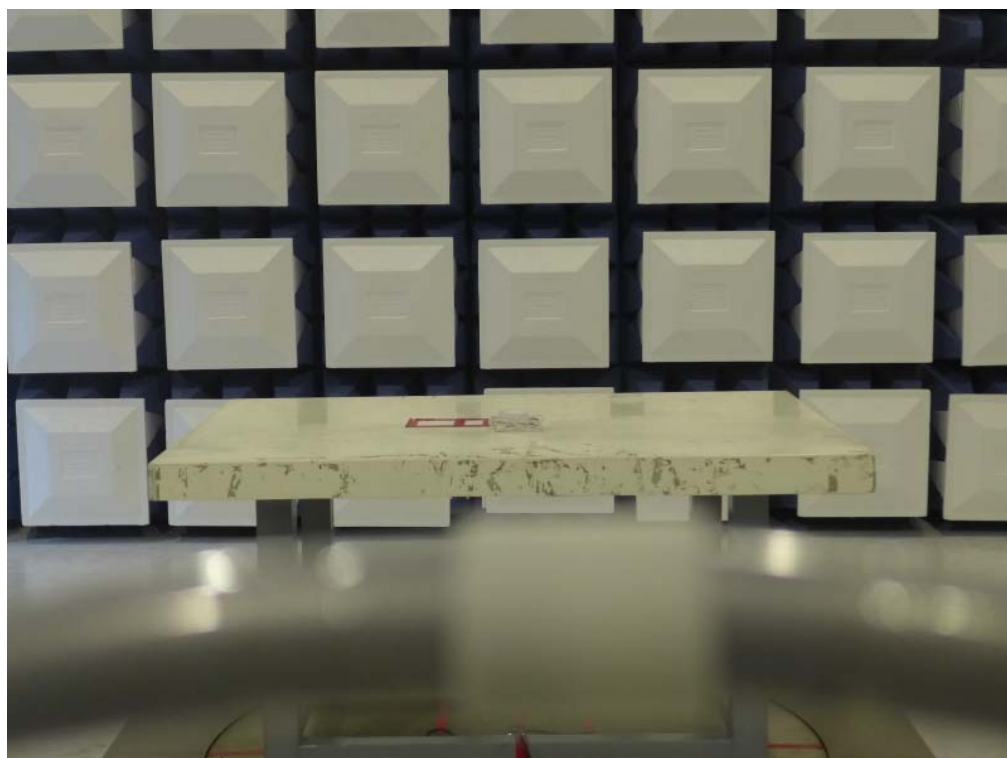


Radiated Measurement Photos

30M to 1000MHz

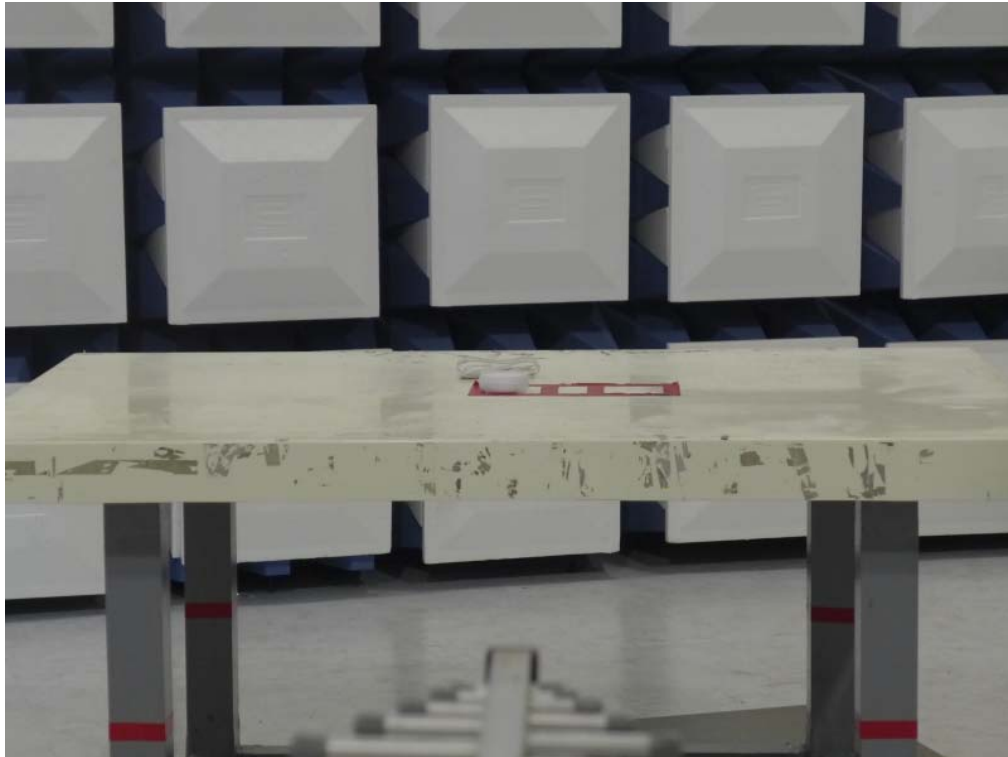

Radiated Measurement Photos

Above 1000MHz

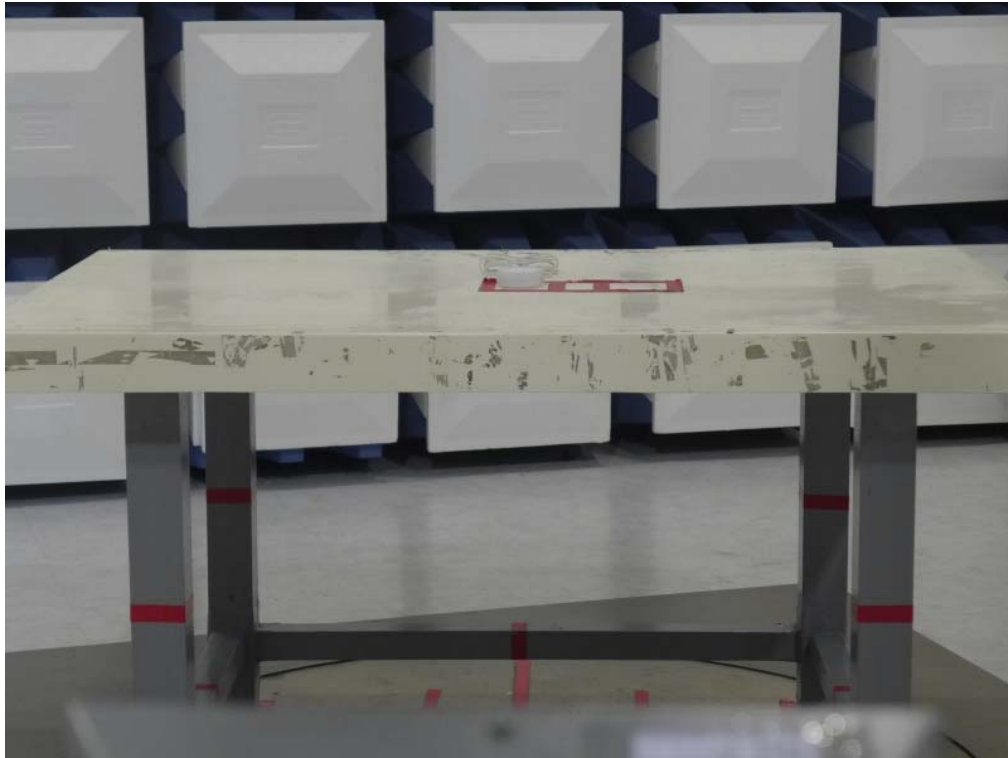

ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode
Test Date	Aug. 18, 2015


Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0150	0°	32.24	22.28	54.52	104.08	-49.57	AVG
0.0150	0°	43.20	22.28	65.48	124.08	-58.61	PK
0.0255	0°	28.99	22.01	51.00	99.47	-48.47	AVG
0.0255	0°	33.25	22.01	55.26	119.47	-64.21	PK
0.0366	0°	24.87	21.74	46.61	96.33	-49.73	AVG
0.0366	0°	32.65	21.74	54.39	116.33	-61.95	PK
0.0600	0°	24.68	21.24	45.92	92.04	-46.12	AVG
0.0600	0°	34.92	21.24	56.16	112.04	-55.88	PK
1.2650	0°	33.58	20.34	53.92	65.56	-11.65	QP
1.1353	0°	38.54	20.46	59.00	66.50	-7.50	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0132	90°	33.65	22.32	55.97	105.19	-49.22	AVG
0.0132	90°	48.84	22.32	71.16	125.19	-54.03	PK
0.0257	90°	27.16	22.01	49.17	99.41	-50.24	AVG
0.0257	90°	42.48	22.01	64.49	119.41	-54.92	PK
0.0345	90°	26.13	21.79	47.92	96.85	-48.93	AVG
0.0345	90°	35.93	21.79	57.72	116.85	-59.13	PK
0.0632	90°	22.85	21.19	44.04	91.59	-47.55	AVG
0.0632	90°	38.16	21.19	59.35	111.59	-52.24	PK
1.2510	90°	34.42	20.35	54.77	65.66	-10.89	QP
1.6500	90°	36.34	19.95	56.29	63.25	-6.96	QP

ATTACHMENT B - RADIATED EMISSION BETWEEN (30MHZ TO 1000MHZ)

Test Mode:	TX 2445MHz -CH19
Test Date	Aug. 17, 2015


Vertical

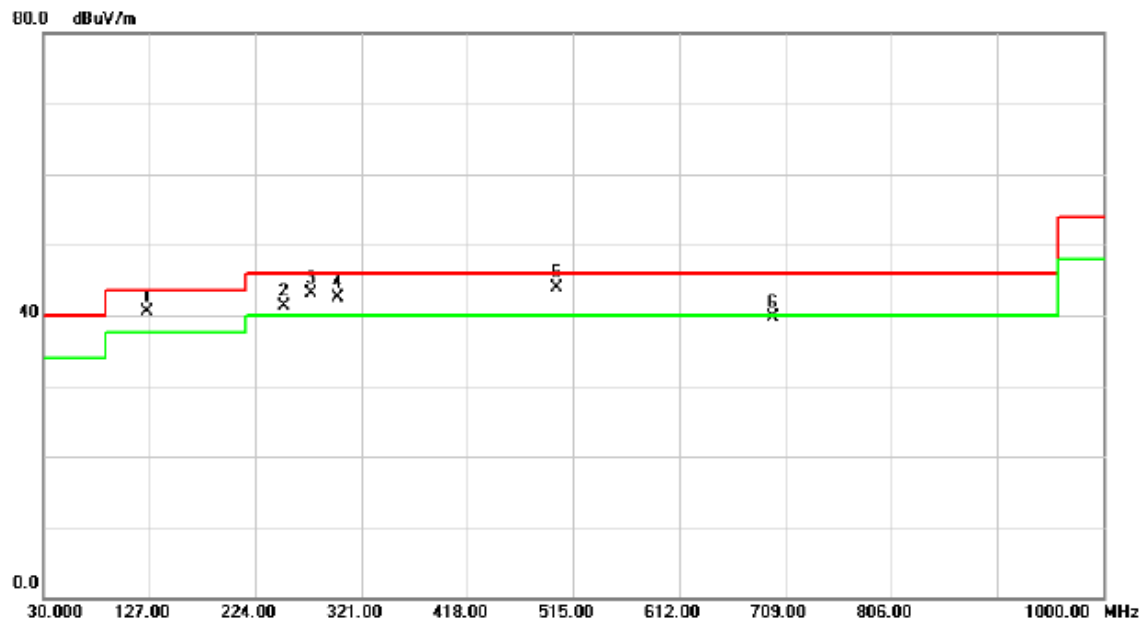

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	125.0600	54.70	-14.20	40.50	43.50	-3.00	peak	
2	!	250.1900	54.37	-13.04	41.33	46.00	-4.67	peak	
3	!	275.4100	55.32	-12.21	43.11	46.00	-2.89	peak	
4	!	299.6600	53.93	-11.41	42.52	46.00	-3.48	peak	
5	*	500.4500	52.08	-8.21	43.87	46.00	-2.13	peak	
6		697.3600	44.33	-4.55	39.78	46.00	-6.22	peak	

Test Mode:	TX 2445MHz -CH19
Test Date	Aug. 17, 2015

Horizontal

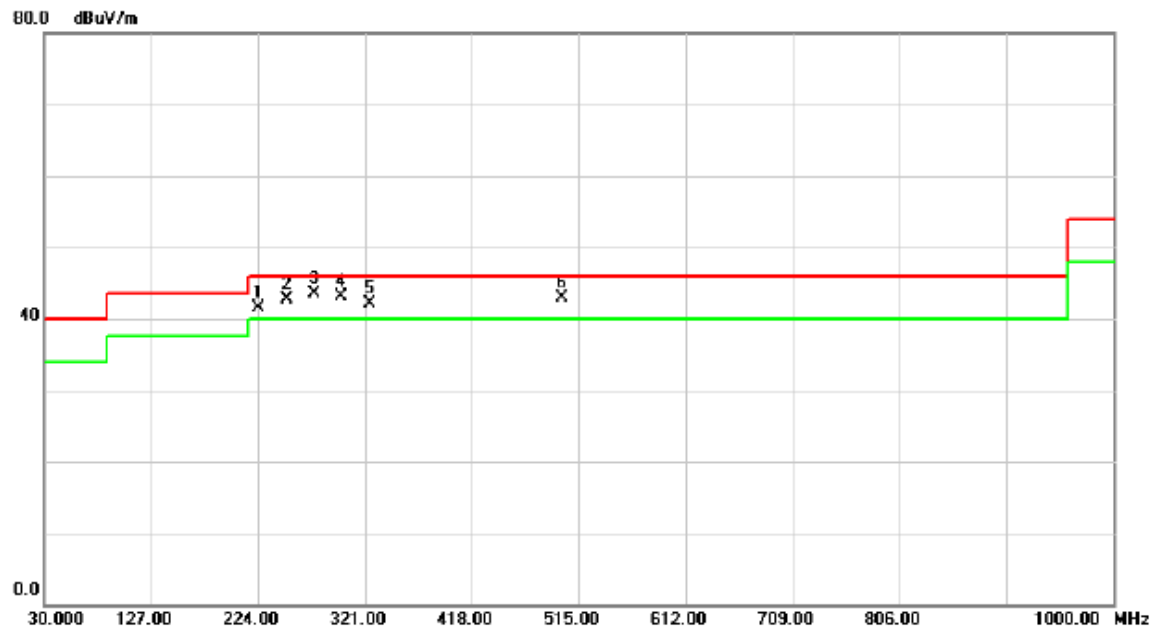


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	224.9700	55.71	-14.15	41.56	46.00	-4.44	peak	
2	!	250.1900	55.84	-13.04	42.80	46.00	-3.20	peak	
3	*	275.4100	55.73	-12.21	43.52	46.00	-2.48	peak	
4	!	299.6600	54.54	-11.41	43.13	46.00	-2.87	peak	
5	!	324.8800	53.07	-10.89	42.18	46.00	-3.82	peak	
6	!	500.4500	51.10	-8.21	42.89	46.00	-3.11	peak	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	TX 2405MHz _CH11
Test Date	Aug. 19, 2015


Vertical

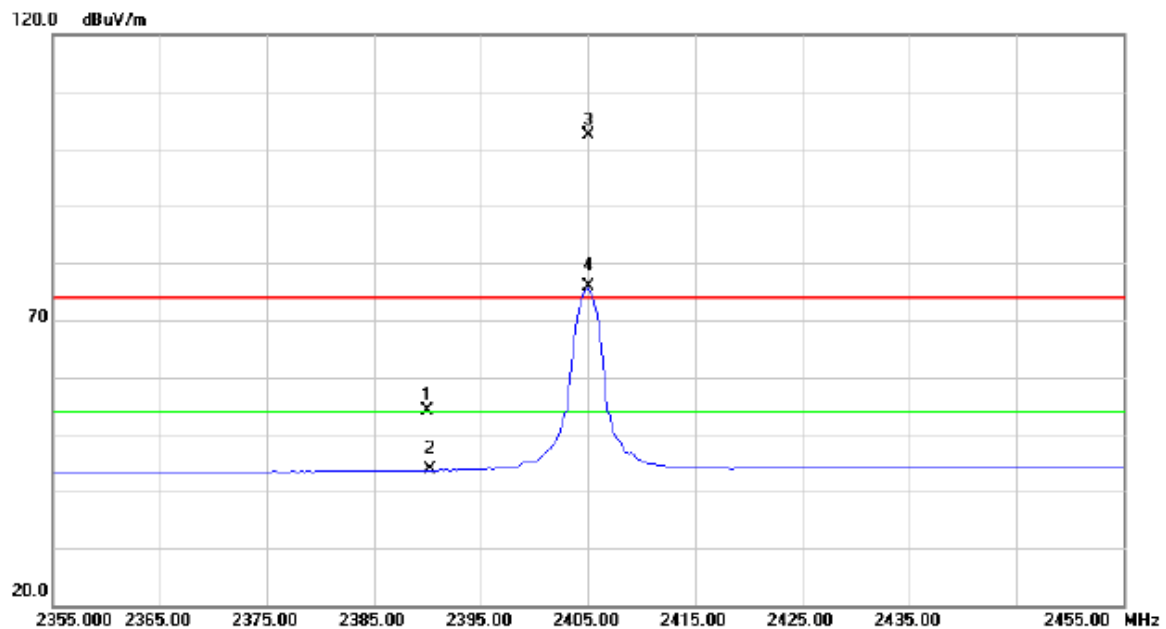

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.22	31.02	54.24	74.00	-19.76	peak	
2		2390.000	12.74	31.02	43.76	54.00	-10.24	AVG	
3	*	2405.000	71.26	31.09	102.35	74.00	28.35	peak	No Limit
4	X	2405.000	44.75	31.09	75.84	54.00	21.84	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2405MHz _CH11
Test Date	Aug. 19, 2015


Vertical

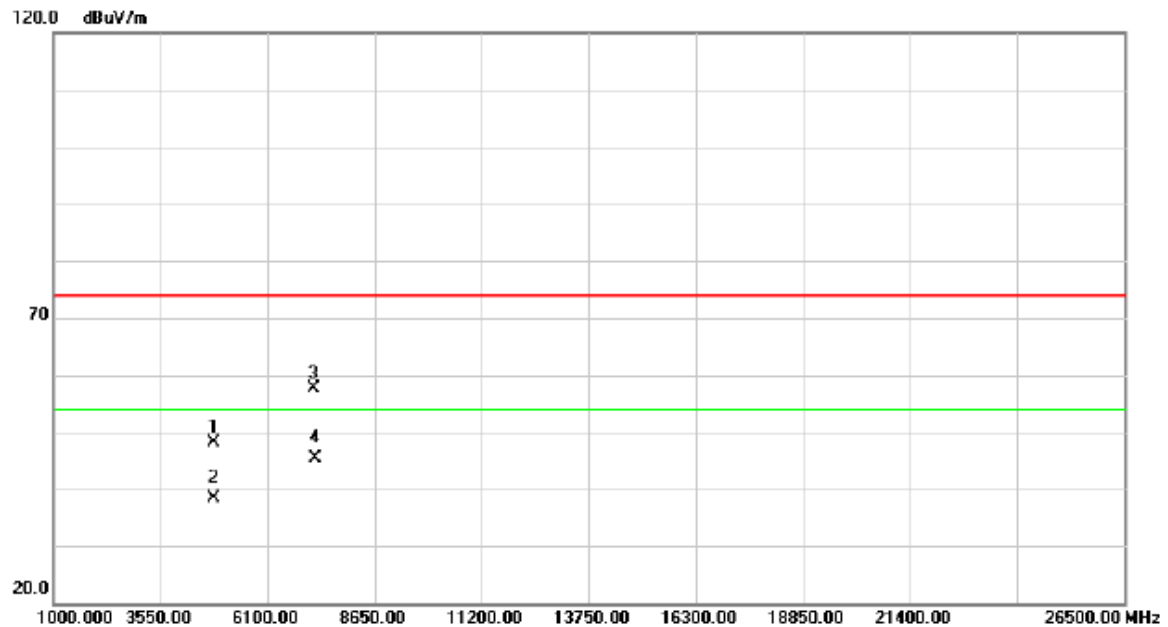

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4810.000	41.38	6.78	48.16	74.00	-25.84	peak	
2		4810.000	31.66	6.78	38.44	54.00	-15.56	AVG	
3		7215.000	42.68	15.06	57.74	74.00	-16.26	peak	
4	*	7215.000	30.28	15.06	45.34	54.00	-8.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2405MHz _CH11
Test Date	Aug. 19, 2015


Horizontal

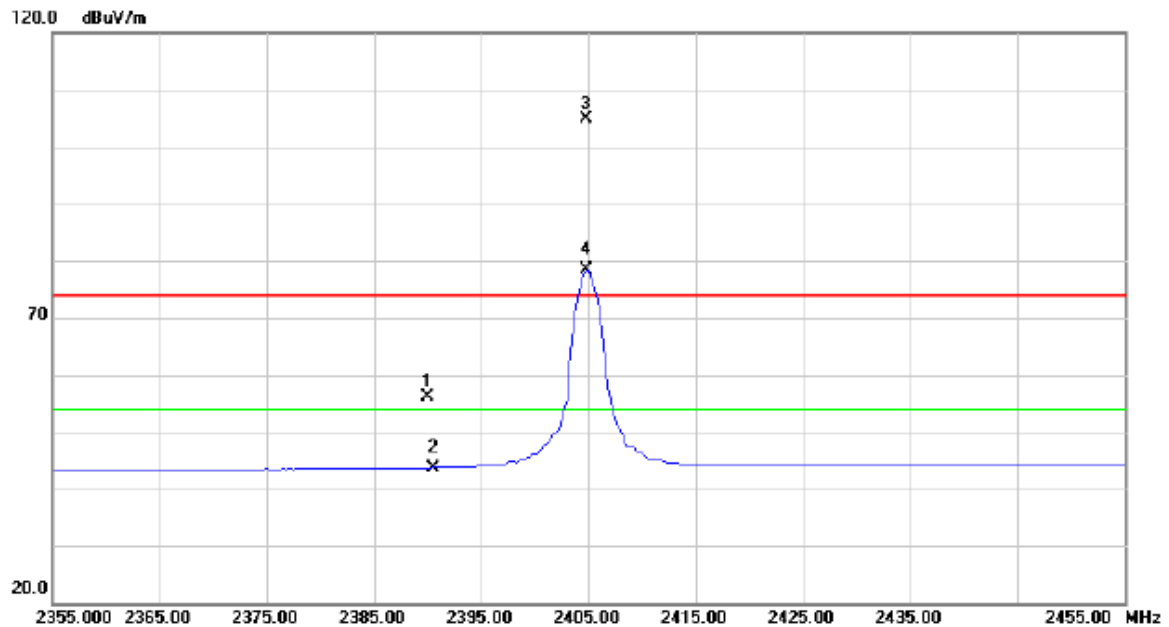

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.04	31.02	56.06	74.00	-17.94	peak	
2		2390.000	12.69	31.02	43.71	54.00	-10.29	AVG	
3	*	2404.750	73.88	31.09	104.97	74.00	30.97	peak	No Limit
4	X	2404.750	47.24	31.09	78.33	54.00	24.33	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2405MHz _CH11
Test Date	Aug. 19, 2015


Horizontal

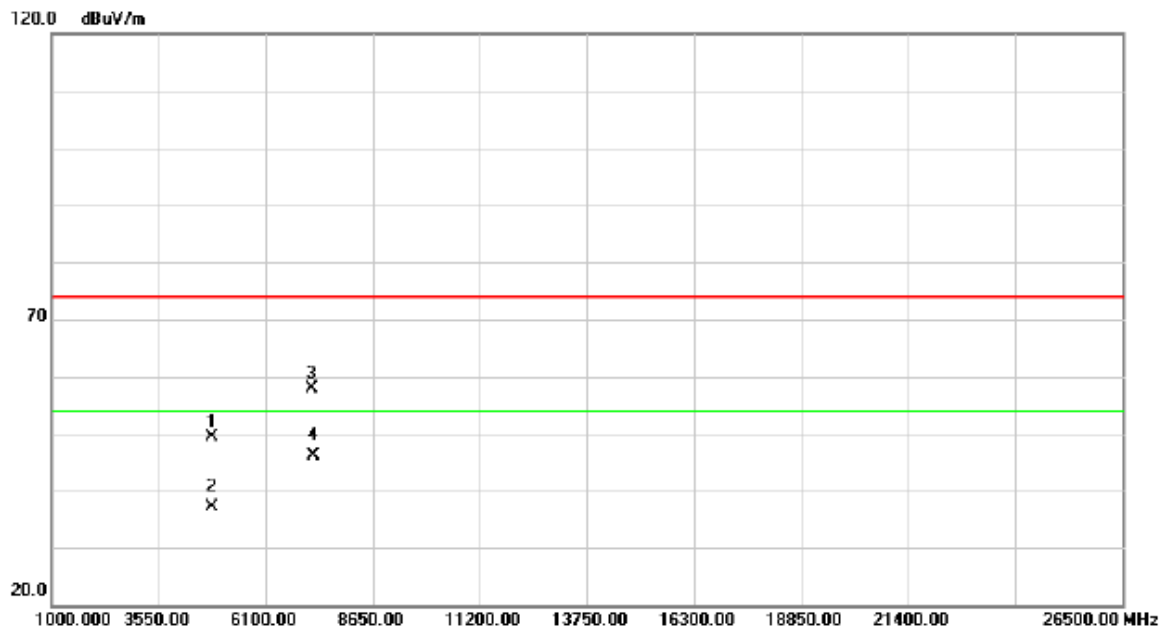

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4810.000	42.66	6.78	49.44	74.00	-24.56	peak	
2		4810.000	30.28	6.78	37.06	54.00	-16.94	AVG	
3		7215.000	42.86	15.06	57.92	74.00	-16.08	peak	
4	*	7215.000	31.08	15.06	46.14	54.00	-7.86	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2445MHz _CH19
Test Date	Aug. 19, 2015


Vertical

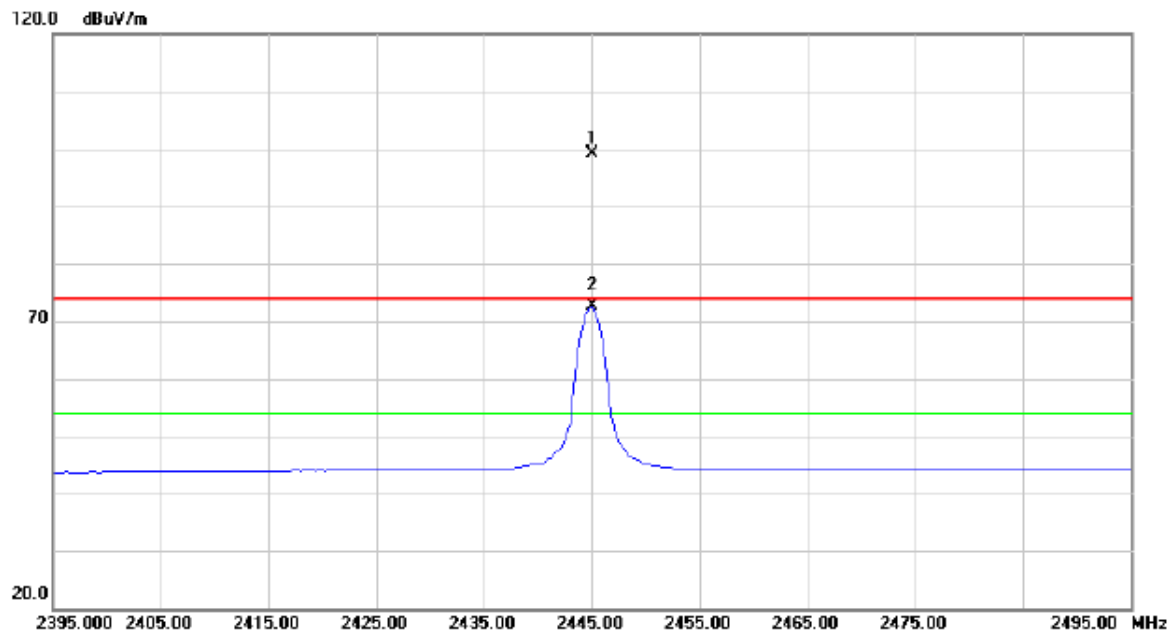

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2445.000	67.84	31.28	99.12	74.00	25.12	peak	No Limit
2	X	2445.000	41.29	31.28	72.57	54.00	18.57	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2445MHz _CH19
Test Date	Aug. 19, 2015


Vertical

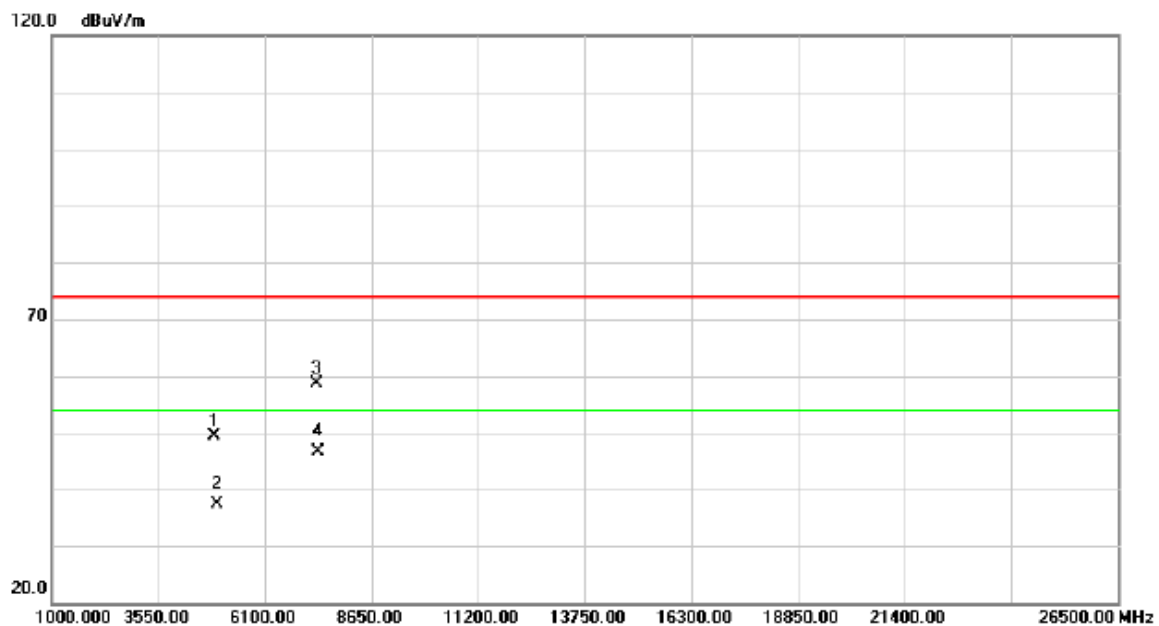

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4890.000	42.68	6.77	49.45	74.00	-24.55	peak	
2		4890.000	30.59	6.77	37.36	54.00	-16.64	AVG	
3		7335.000	42.98	15.72	58.70	74.00	-15.30	peak	
4	*	7335.000	30.86	15.72	46.58	54.00	-7.42	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2445MHz _CH19
Test Date	Aug. 19, 2015


Horizontal

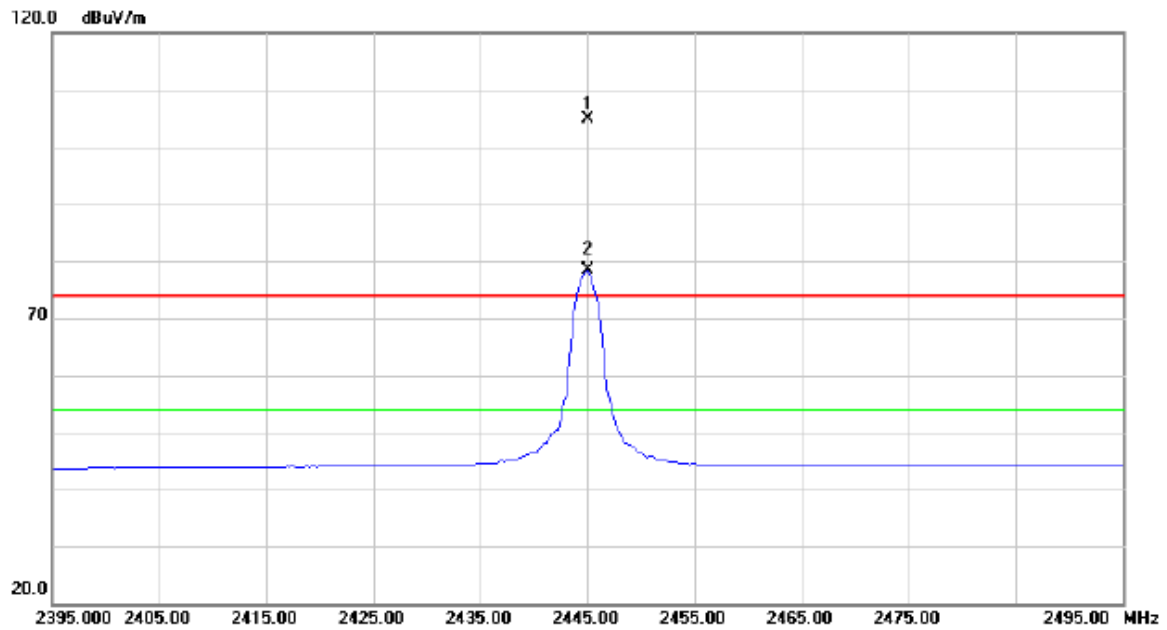

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2445.000	73.68	31.28	104.96	74.00	30.96	peak	No Limit
2	X	2445.000	47.10	31.28	78.38	54.00	24.38	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2445MHz _CH19
Test Date	Aug. 19, 2015


Horizontal

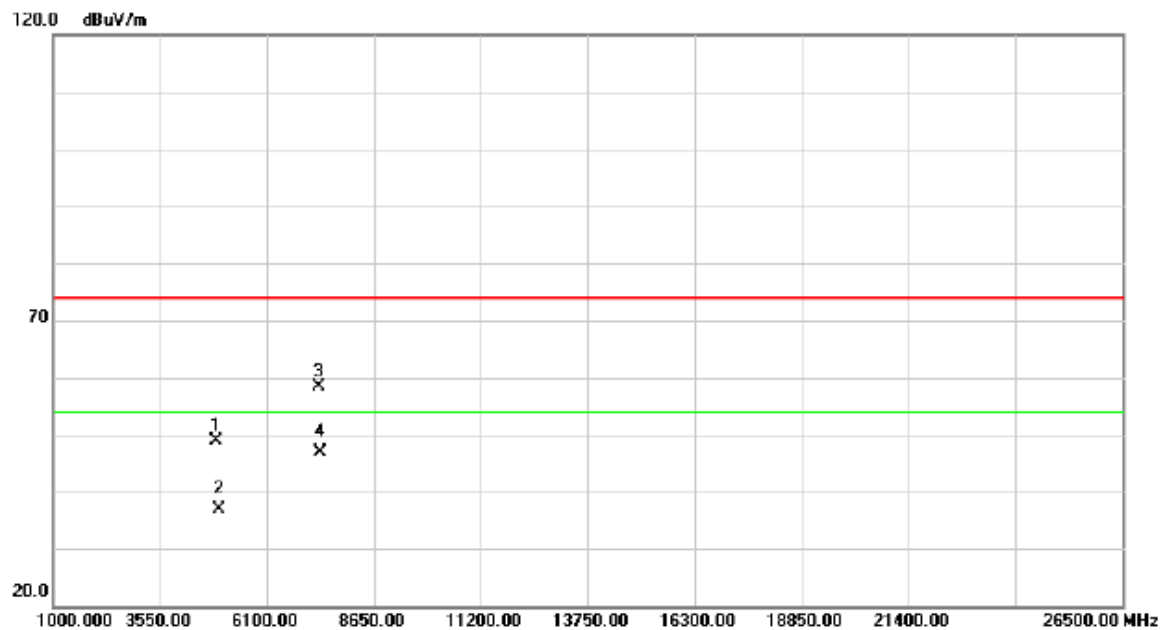

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4890.000	42.13	6.77	48.90	74.00	-25.10	peak	
2		4890.000	30.15	6.77	36.92	54.00	-17.08	AVG	
3		7335.000	42.68	15.72	58.40	74.00	-15.60	peak	
4	*	7335.000	31.12	15.72	46.84	54.00	-7.16	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH26
Test Date	Aug. 19, 2015


Vertical

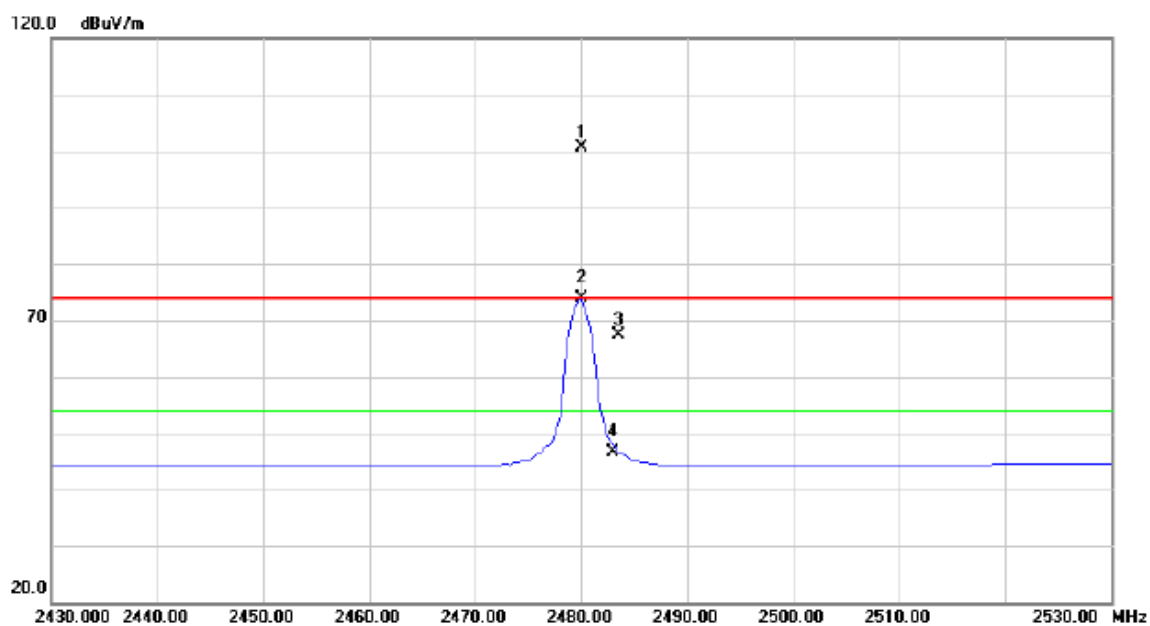

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2480.000	69.28	31.44	100.72	74.00	26.72	peak	No Limit
2	X	2480.000	42.39	31.44	73.83	54.00	19.83	AVG	No Limit
3		2483.500	35.94	31.46	67.40	74.00	-6.60	peak	
4		2483.500	15.29	31.46	46.75	54.00	-7.25	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH26
Test Date	Aug. 19, 2015


Vertical

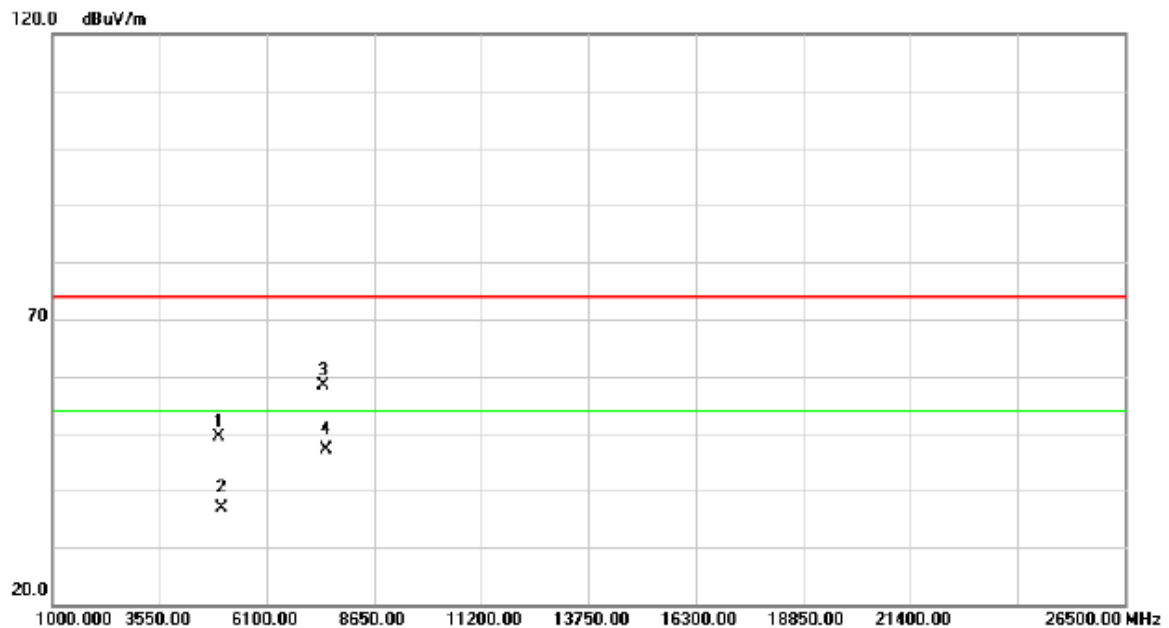

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4960.000	42.59	6.76	49.35	74.00	-24.65	peak	
2		4960.000	30.08	6.76	36.84	54.00	-17.16	AVG	
3		7440.000	42.18	16.28	58.46	74.00	-15.54	peak	
4	*	7440.000	30.82	16.28	47.10	54.00	-6.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH26
Test Date	Aug. 19, 2015


Horizontal

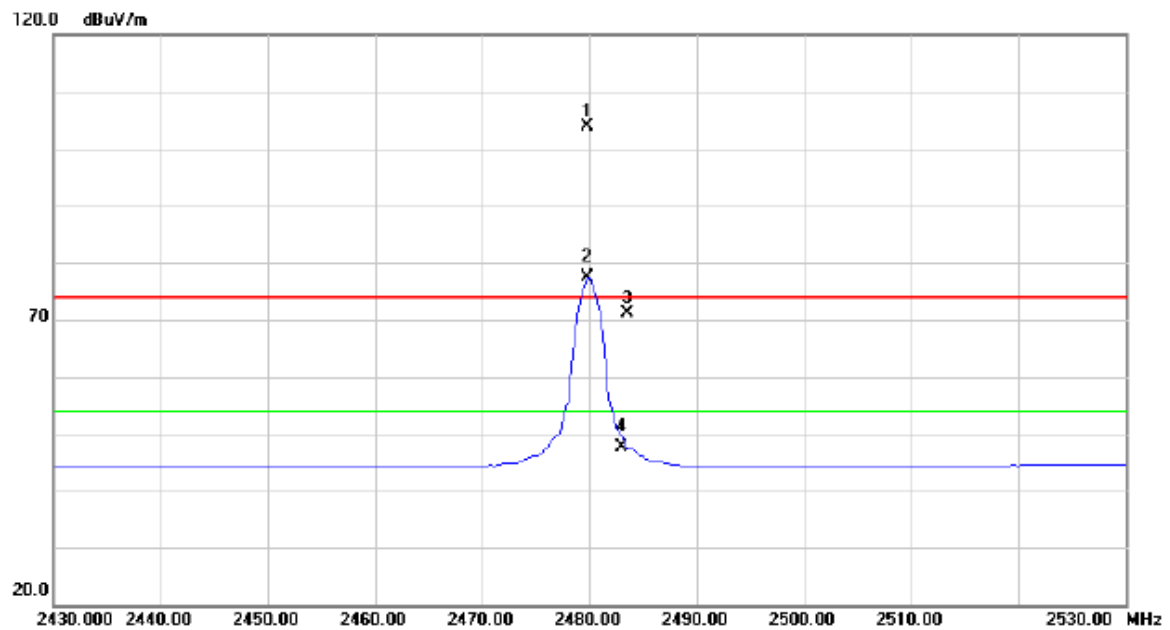

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2479.750	72.46	31.44	103.90	74.00	29.90	peak	No Limit
2	X	2479.750	45.87	31.44	77.31	54.00	23.31	AVG	No Limit
3		2483.500	39.76	31.46	71.22	74.00	-2.78	peak	
4		2483.500	16.05	31.46	47.51	54.00	-6.49	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH26
Test Date	Aug. 19, 2015

Horizontal

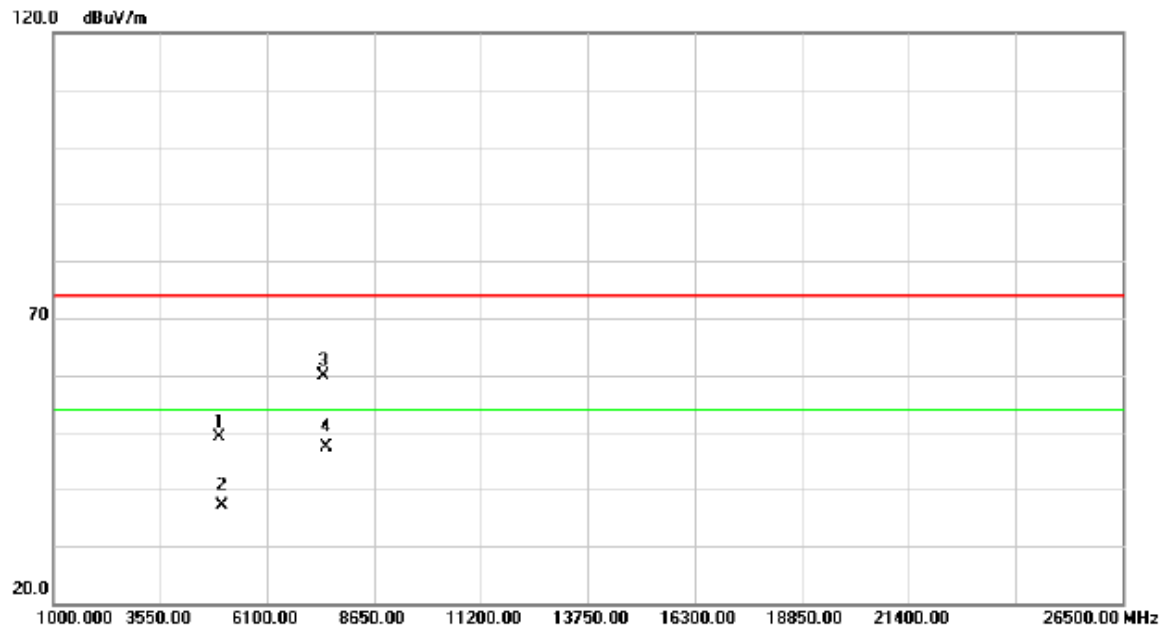


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4960.000	42.35	6.76	49.11	74.00	-24.89	peak	
2		4960.000	30.28	6.76	37.04	54.00	-16.96	AVG	
3		7440.000	43.54	16.28	59.82	74.00	-14.18	peak	
4	*	7440.000	31.18	16.28	47.46	54.00	-6.54	AVG	

ATTACHMENT D - BANDWIDTH

Test Date	Dec. 11, 2014
-----------	---------------


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2405	1.589	1.908	500	Complies
2445	1.581	1.908	500	Complies
2480	1.605	1.904	500	Complies

TX CH11

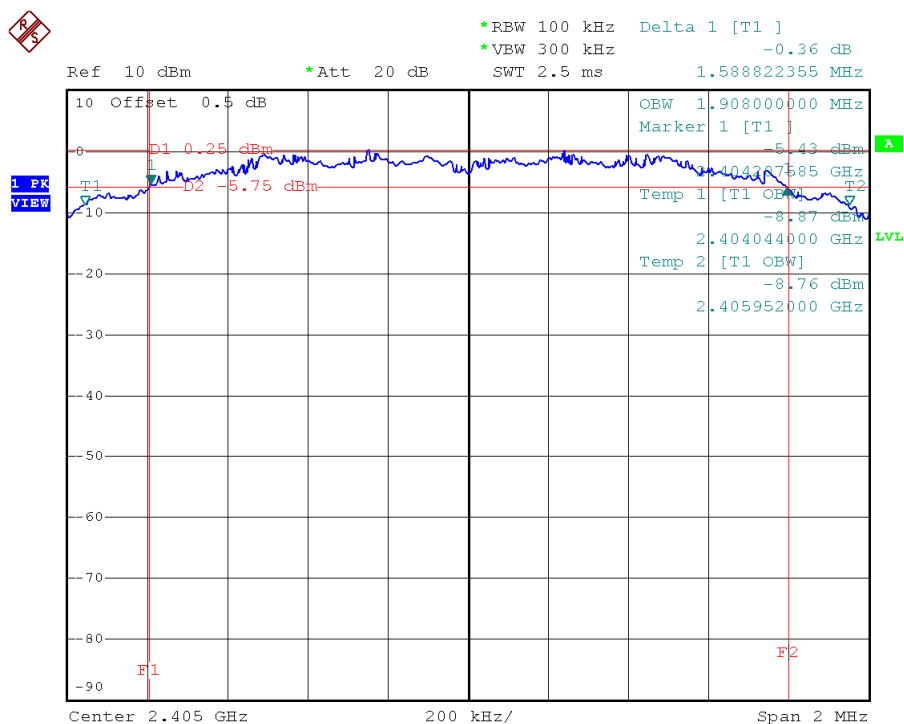


Date: 11.DEC.2014 13:51:36

TX CH19

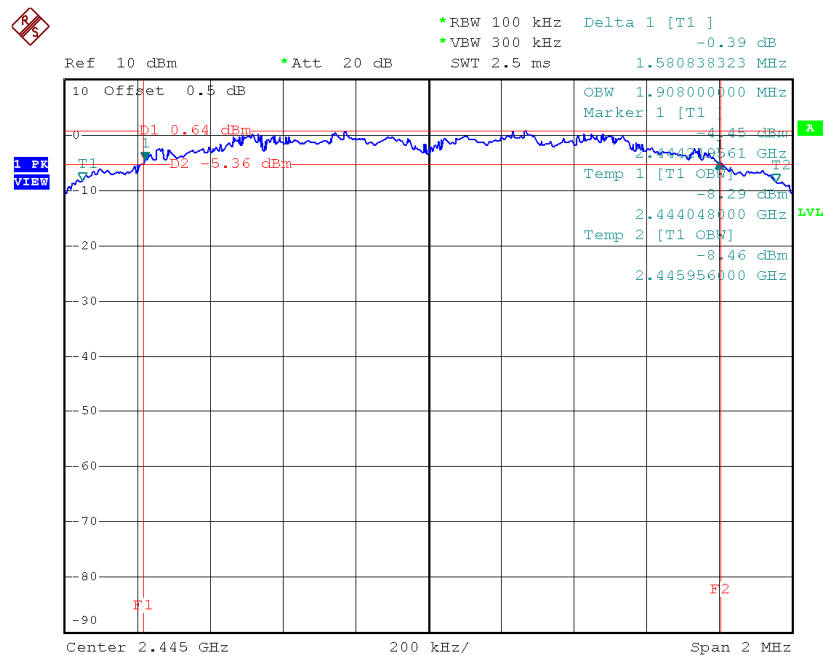

Date: 11.DEC.2014 13:53:38

TX CH26

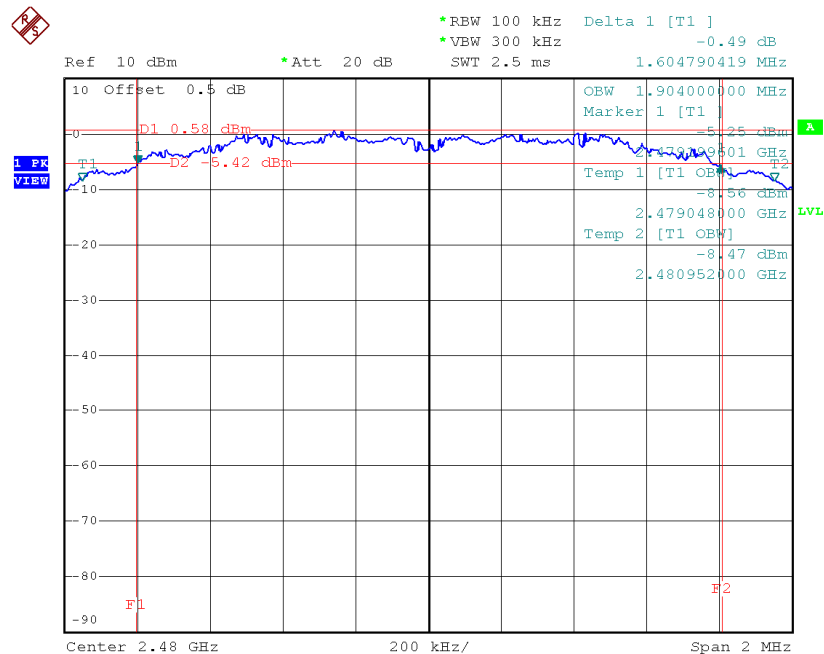

Date: 11.DEC.2014 13:55:00

ATTACHMENT E - MAXIMUM OUTPUT POWER TEST


Test Date	Dec. 11, 2014
-----------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2405	2.67	0.0018	30.00	1.00	Complies
2445	2.58	0.0018	30.00	1.00	Complies
2480	3.53	0.0023	30.00	1.00	Complies

ATTACHMENT F - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode :	CH11, CH19 , CH26
Test Date	Dec. 11, 2014

CH11 (Lower)

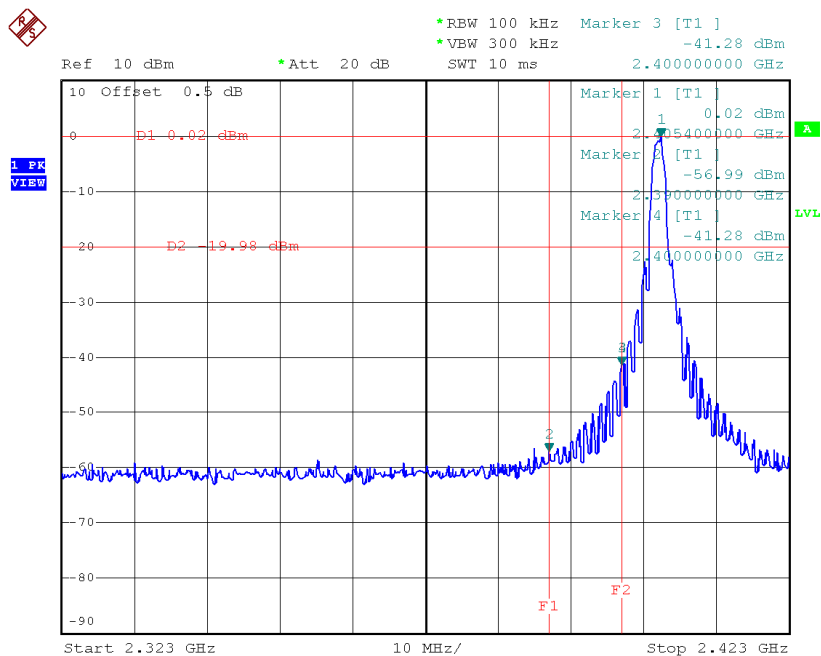


Date: 11.DEC.2014 13:51:50

CH26 (upper)

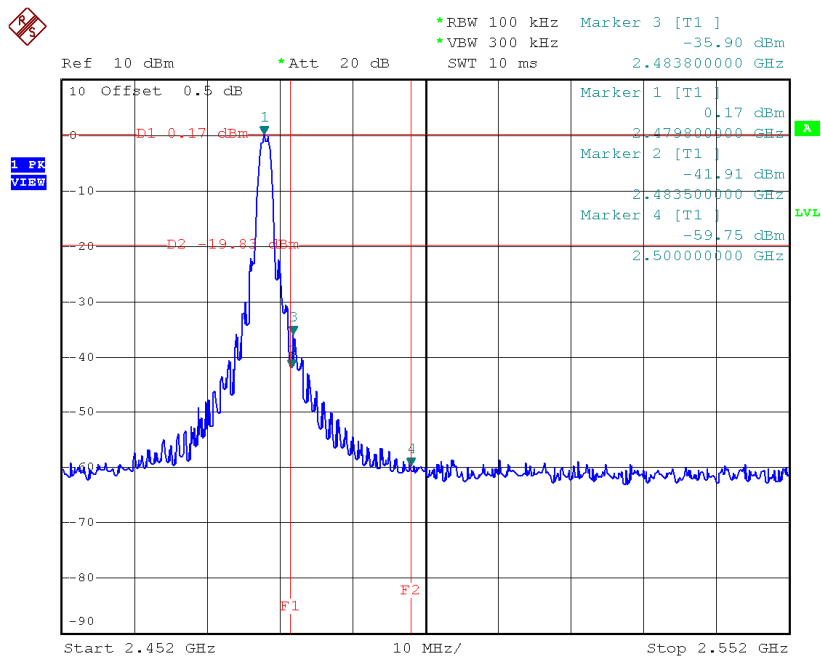


Date: 11.DEC.2014 13:55:10

CH11 (10 Harmonic of the frequency)

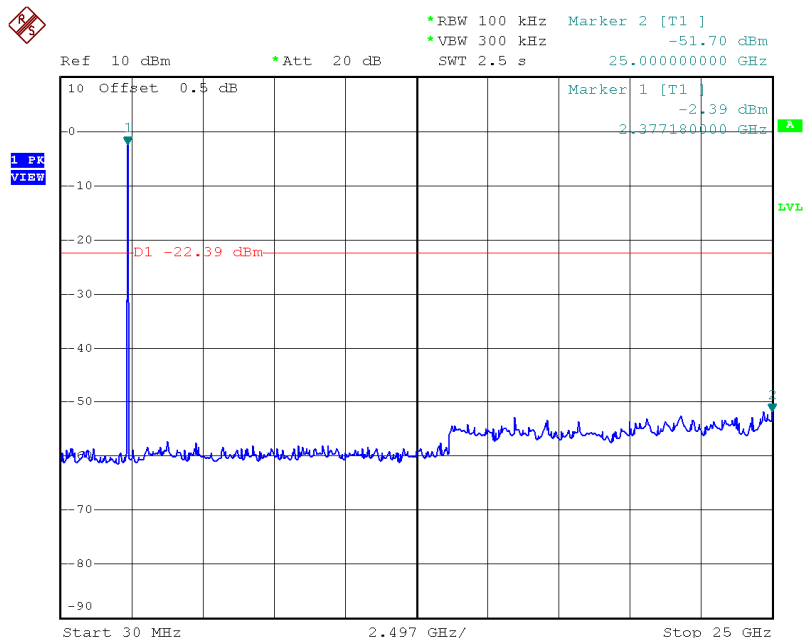


Date: 11.DEC.2014 13:51:13

CH19 (10 Harmonic of the frequency)

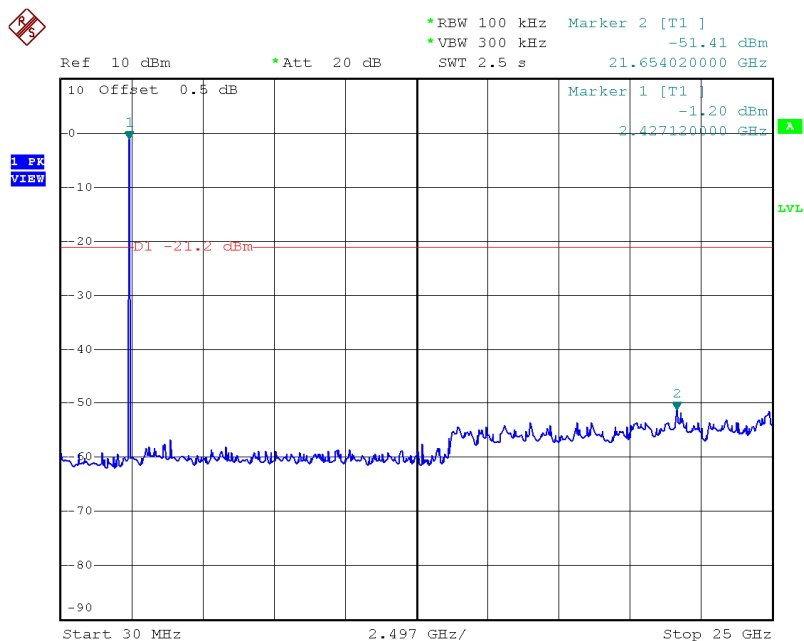

Date: 11.DEC.2014 13:53:03

CH26 (10 Harmonic of the frequency)

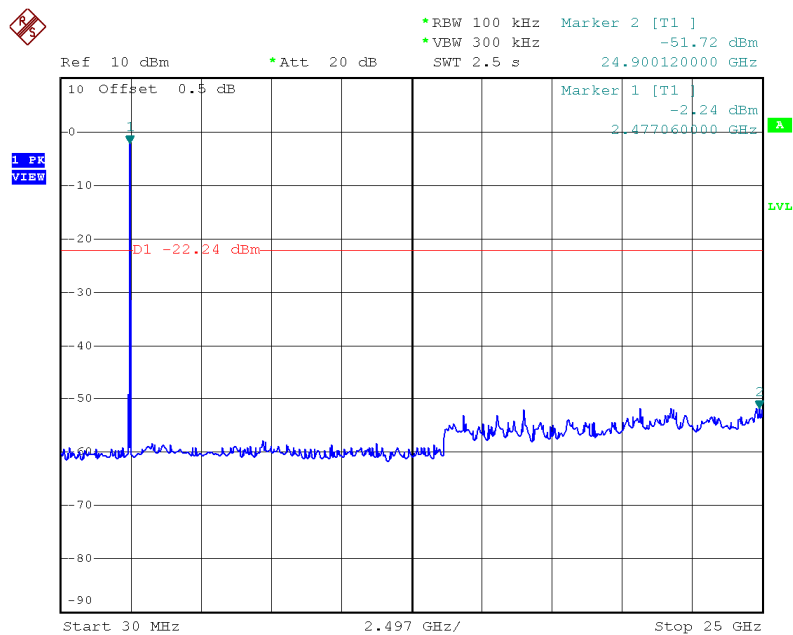


Date: 11.DEC.2014 13:54:39

ATTACHMENT G - POWER SPECTRAL DENSITY TEST

Test Date	Dec. 11, 2014
-----------	---------------


Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
2405	-12.11	8	Complies
2445	-11.66	8	Complies
2480	-12.54	8	Complies

TX CH11

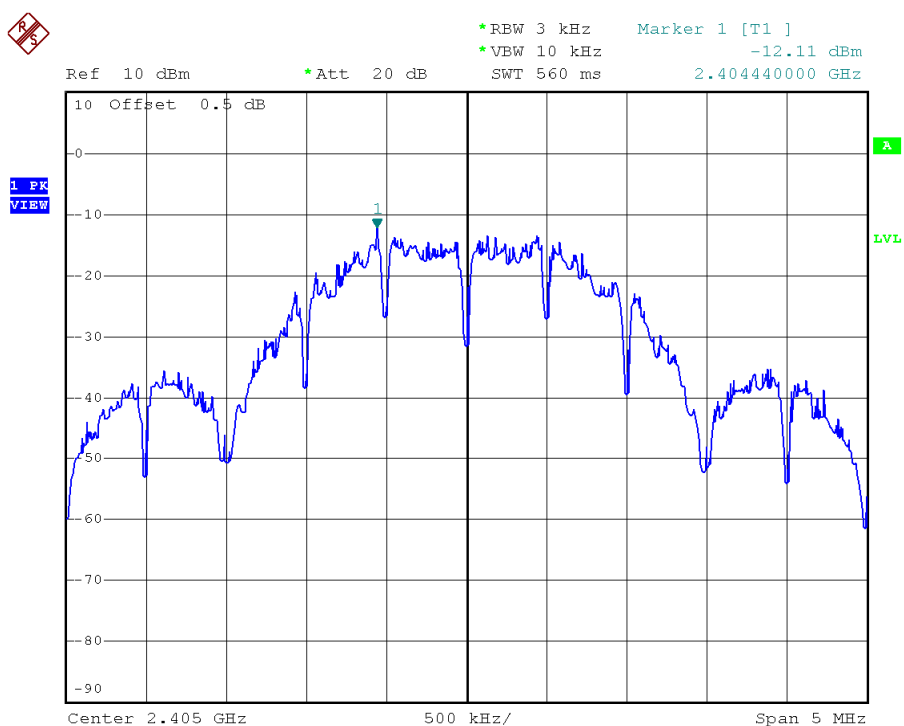


Date: 11.DEC.2014 13:52:18

TX CH19

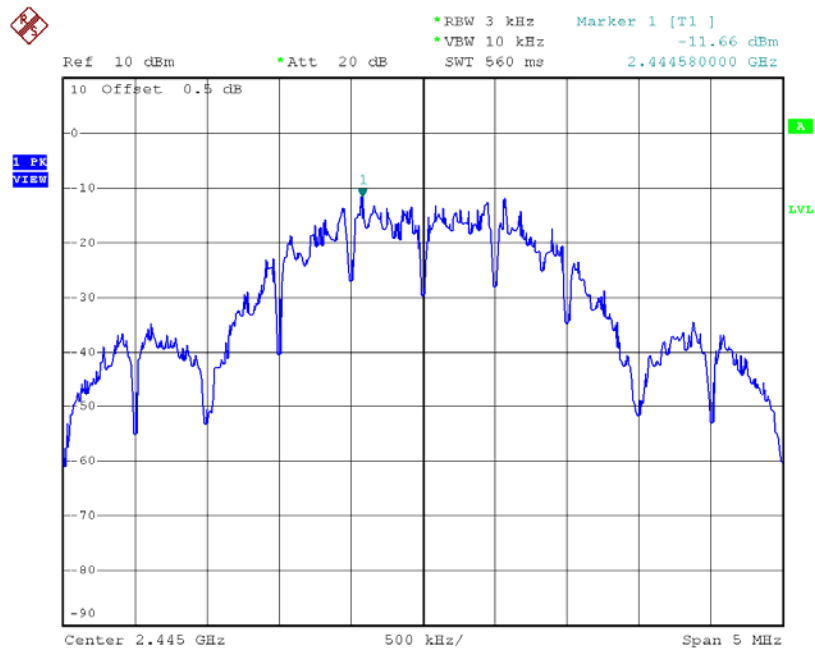

Date: 11.DEC.2014 13:53:55

TX CH26

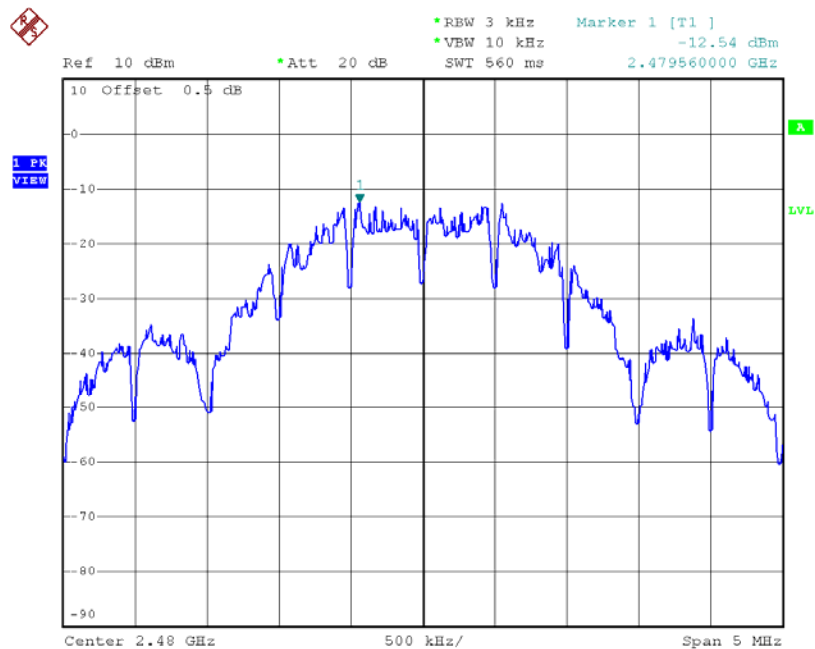

Date: 11.DEC.2014 13:55:26