



Plots of EUT ceased transmission in the time domain

CBP

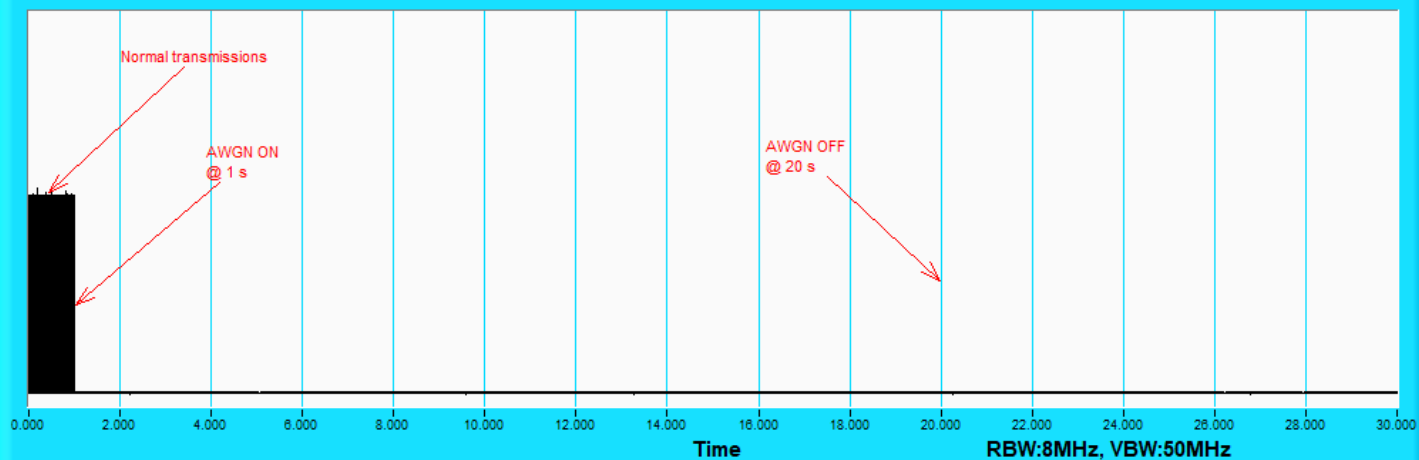


802.11be (EHT320) / CH31(Low Edge)

CBP

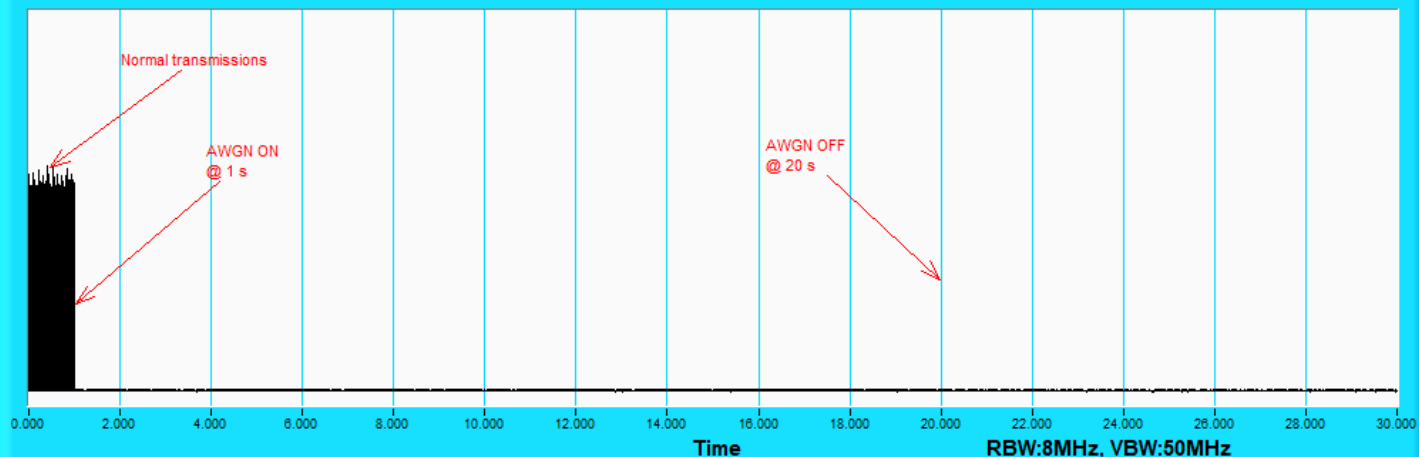

802.11be (EHT320) / CH31(Middle)

CBP

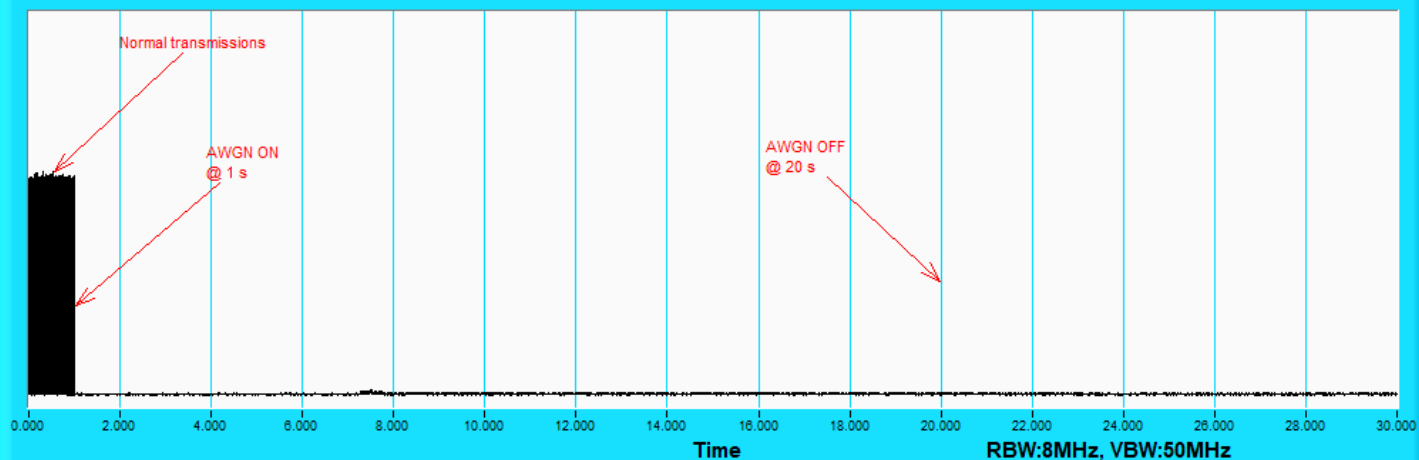

802.11be (EHT320) / CH31(High Edge)

For U-NII-6


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	105	6475	6475	-60	3	0	-63	-62	OFF
					-69	3	0	-72	-62	Minimal
					-79	3	0	-82	-62	ON
	320	95	6425	6270	-59	3	0	-62	-62	OFF
					-60	3	0	-63	-62	Minimal
					-79	3	0	-82	-62	ON
				6425	-59	3	0	-62	-62	OFF
					-72	3	0	-75	-62	Minimal
					-79	3	0	-82	-62	ON
				6580	-59	3	0	-62	-62	OFF
					-66	3	0	-69	-62	Minimal
					-79	3	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6475	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6270	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6425	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6580	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

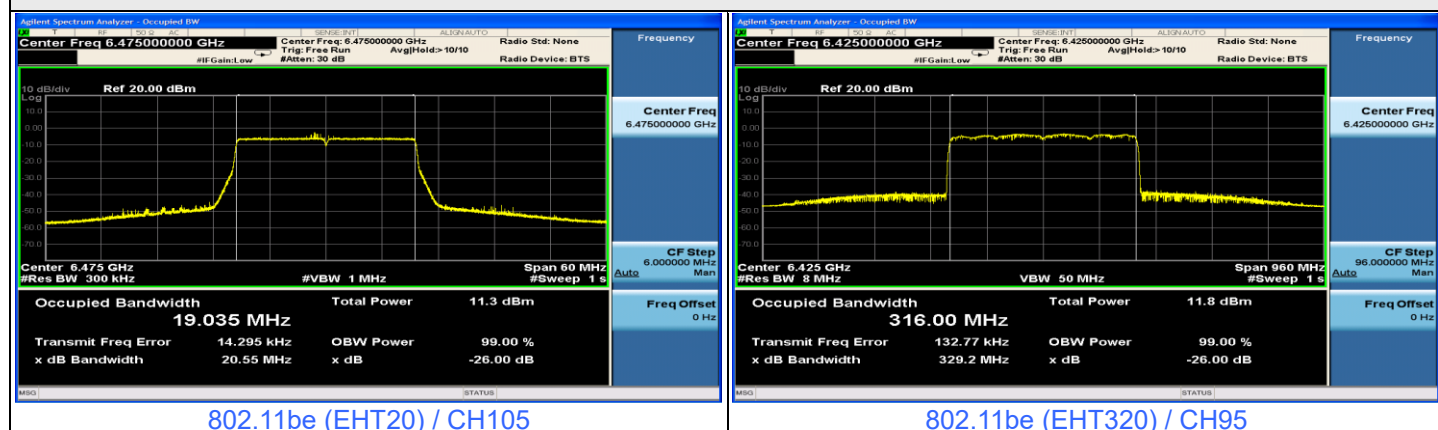

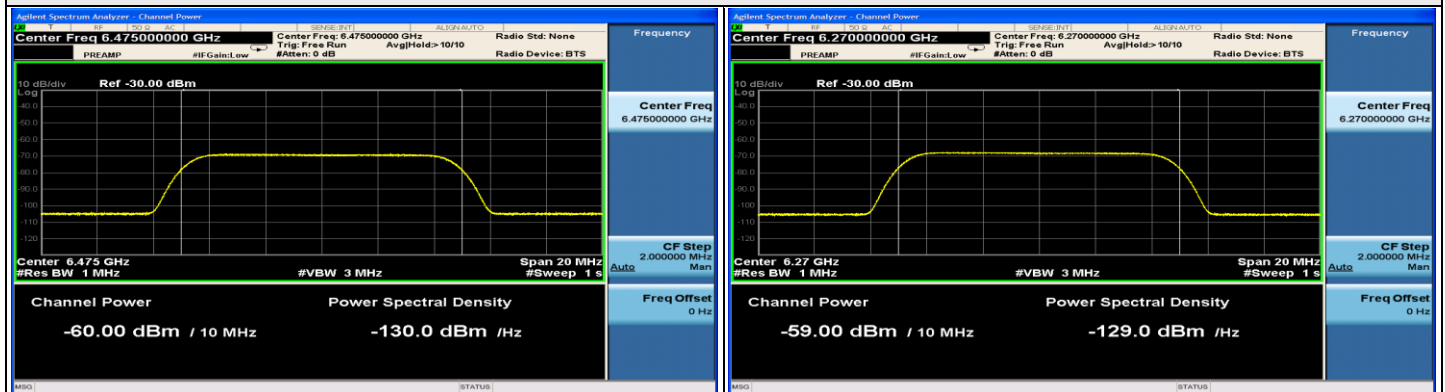

802.11be (EHT20) / CH105

802.11be (EHT320) / CH95(Low Edge)

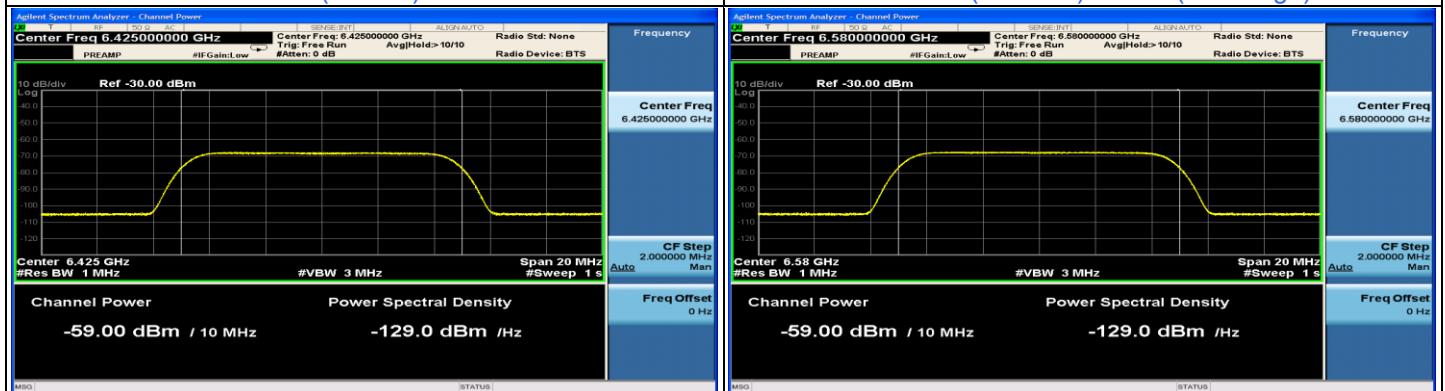


802.11be (EHT320) / CH95(Middle)

802.11be (EHT320) / CH95(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

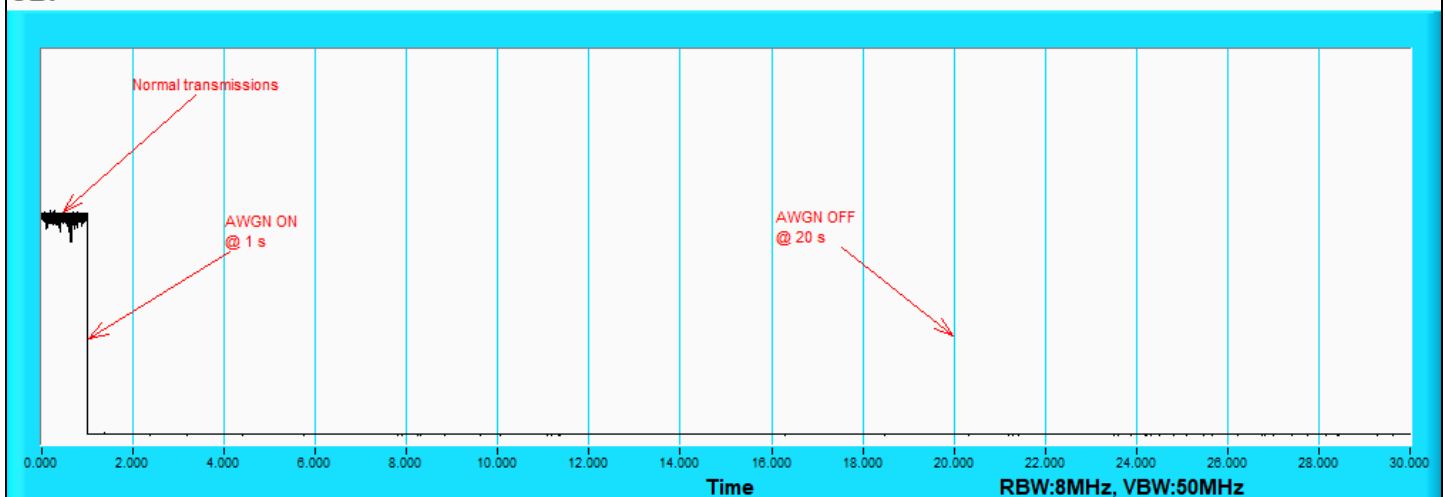

802.11be (EHT20) / CH105


Plots of EUT ceased transmission in the time domain

CBP

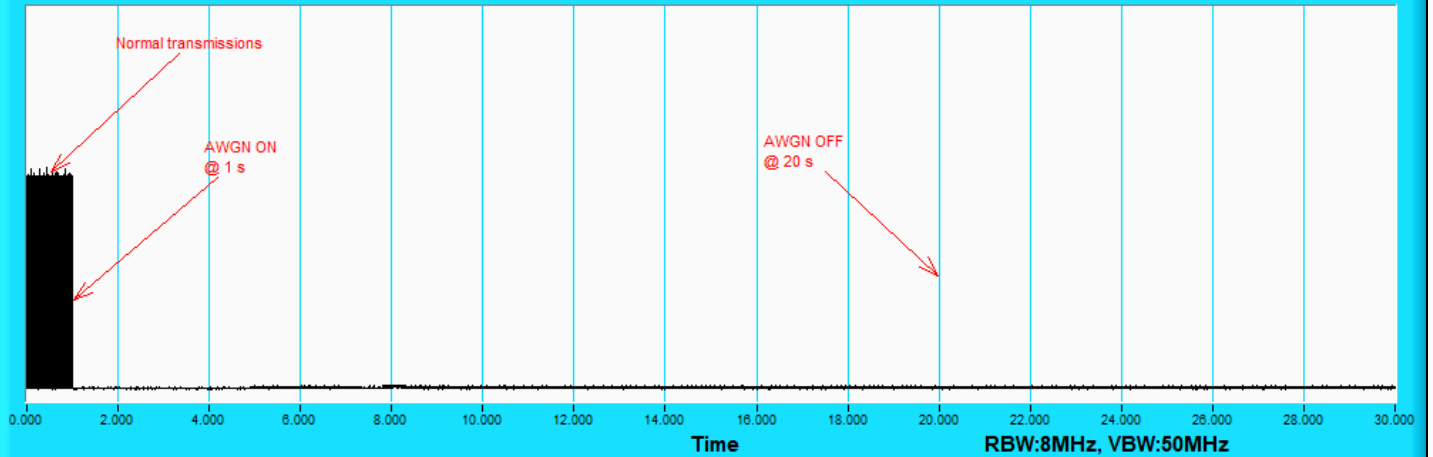


802.11be (EHT320) / CH95(Low Edge)

CBP

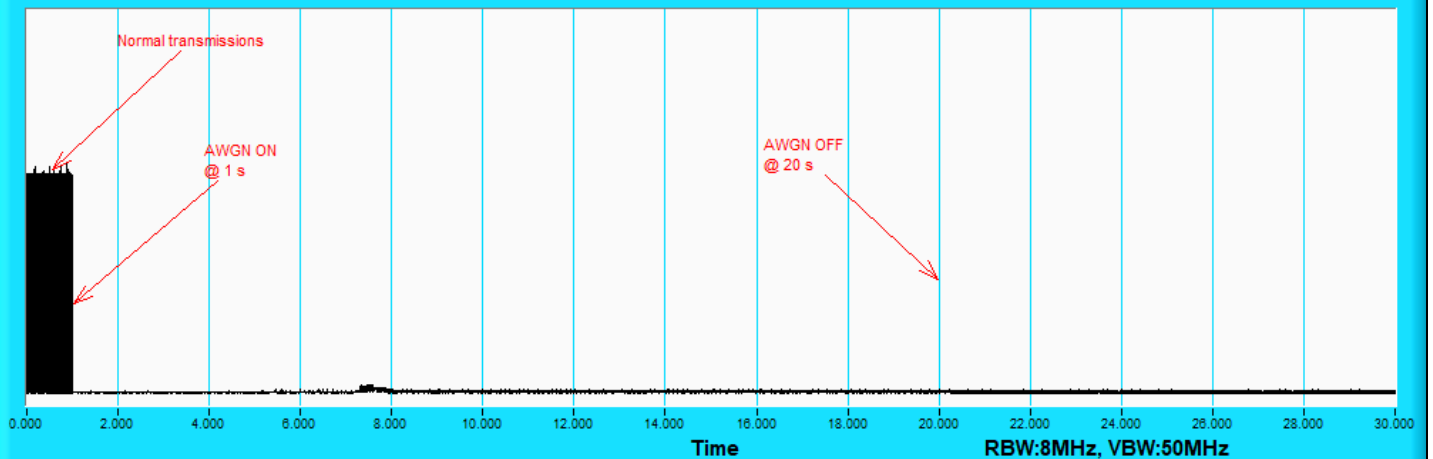

802.11be (EHT320) / CH95(Middle)

CBP

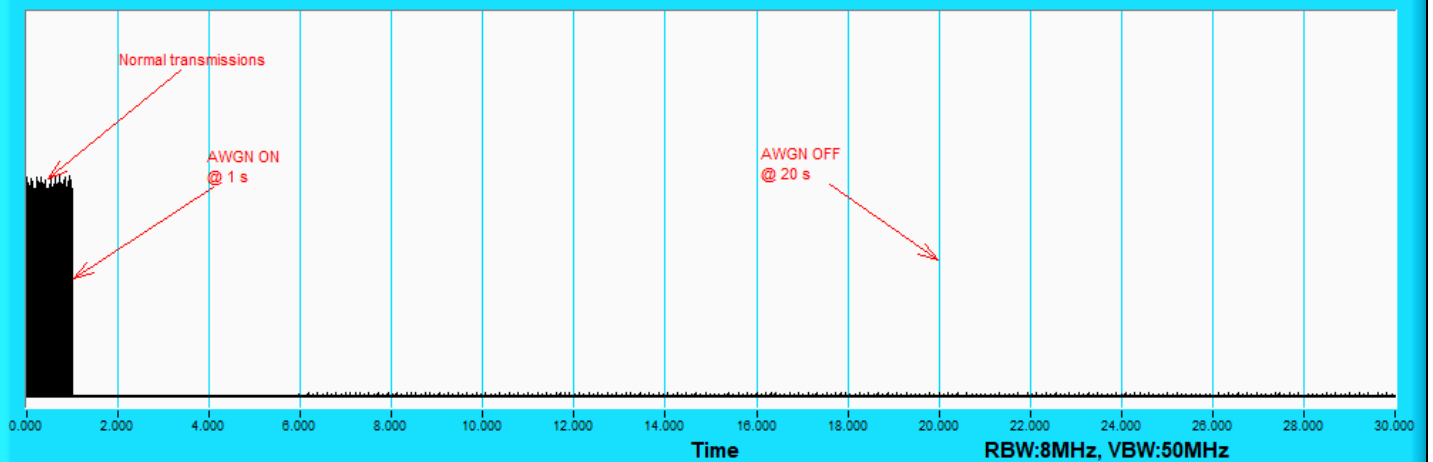

802.11be (EHT320) / CH95(High Edge)

For U-NII-7


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-59	3	0	-62	-62	OFF
					-70	3	0	-73	-62	Minimal
					-79	3	0	-82	-62	ON
	320	159	6745	6590	-59	3	0	-62	-62	OFF
					-61	3	0	-64	-62	Minimal
					-79	3	0	-82	-62	ON
				6745	-59	3	0	-62	-62	OFF
					-75	3	0	-78	-62	Minimal
					-79	3	0	-82	-62	ON
				6900	-59	3	0	-62	-62	OFF
					-62	3	0	-65	-62	Minimal
					-79	3	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6745	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6900	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

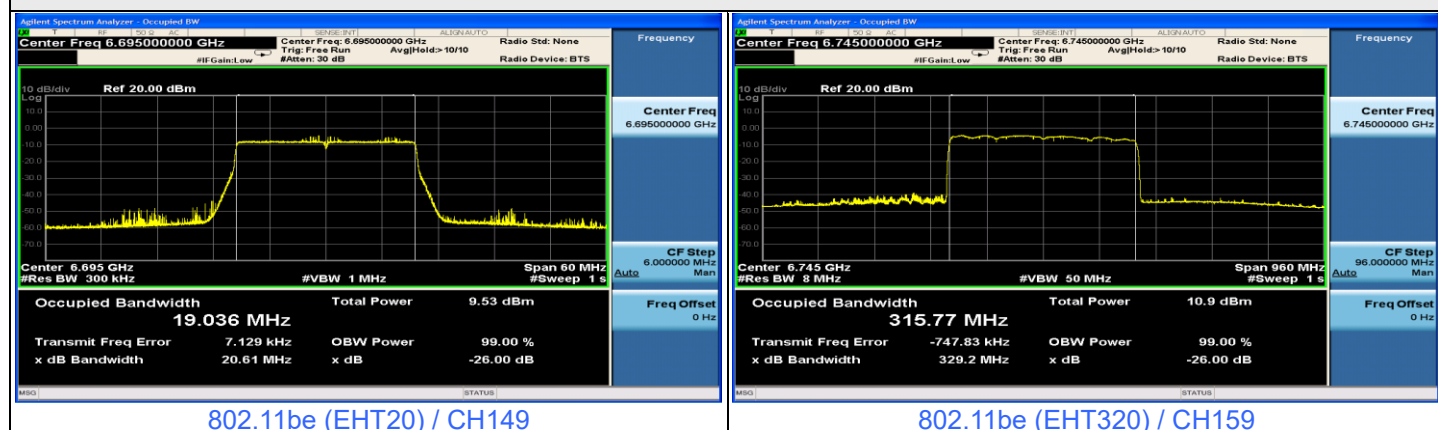


Plots of Injected signal (AWGN) level

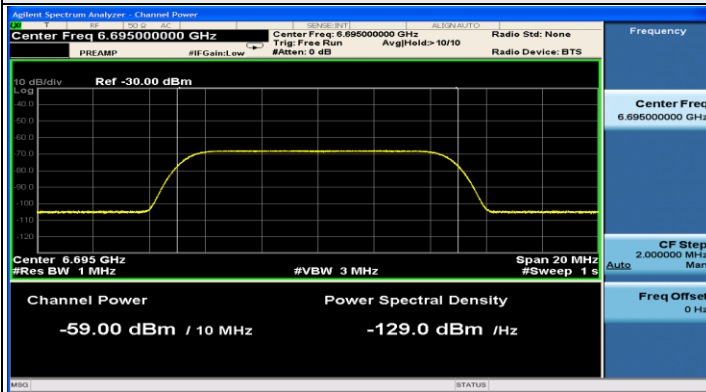


802.11be (EHT20) / CH149

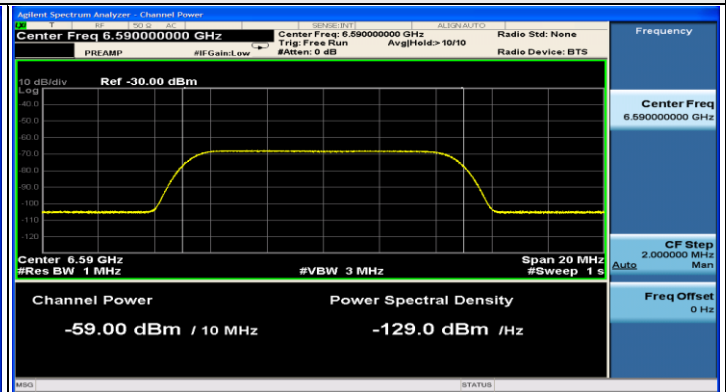

802.11be (EHT320) / CH159(Low Edge)

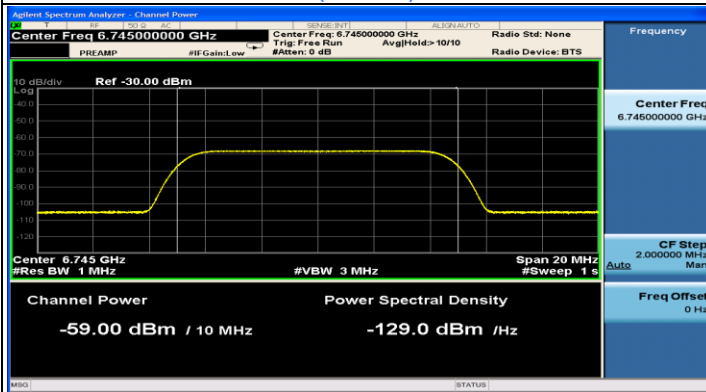


802.11be (EHT320) / CH159(Middle)

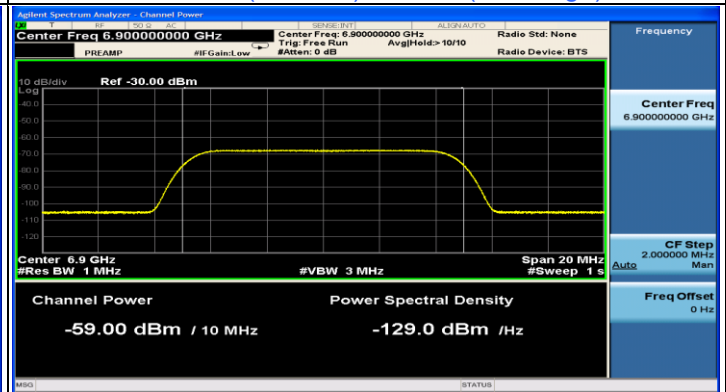

802.11be (EHT320) / CH159(High Edge)

Plots of EUT ceased transmission in the time domain


CBP

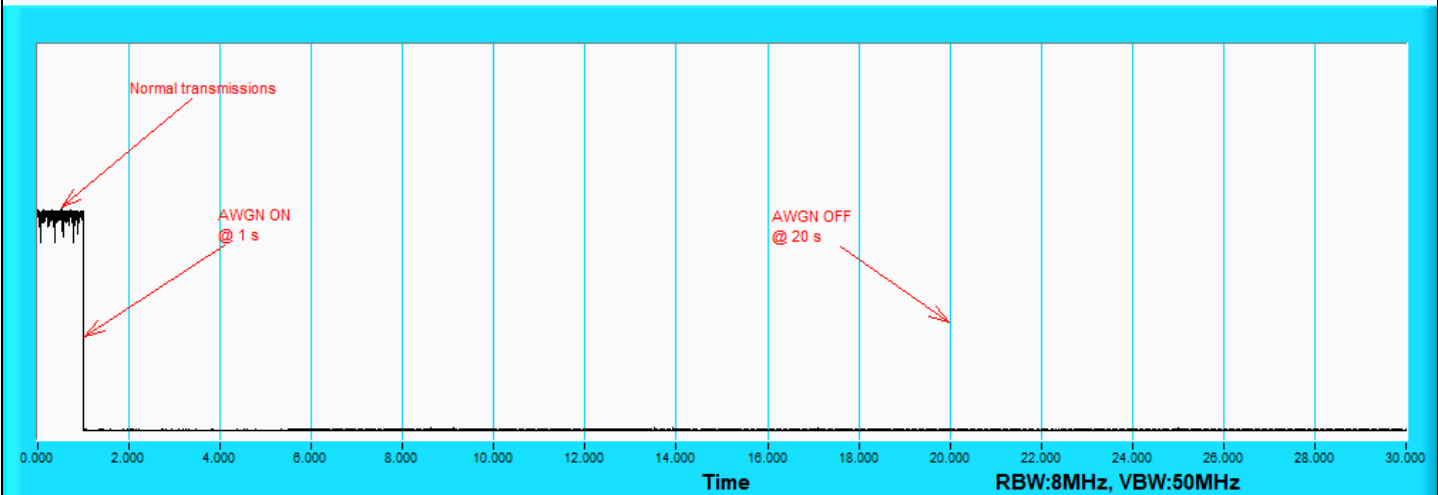

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

CBP

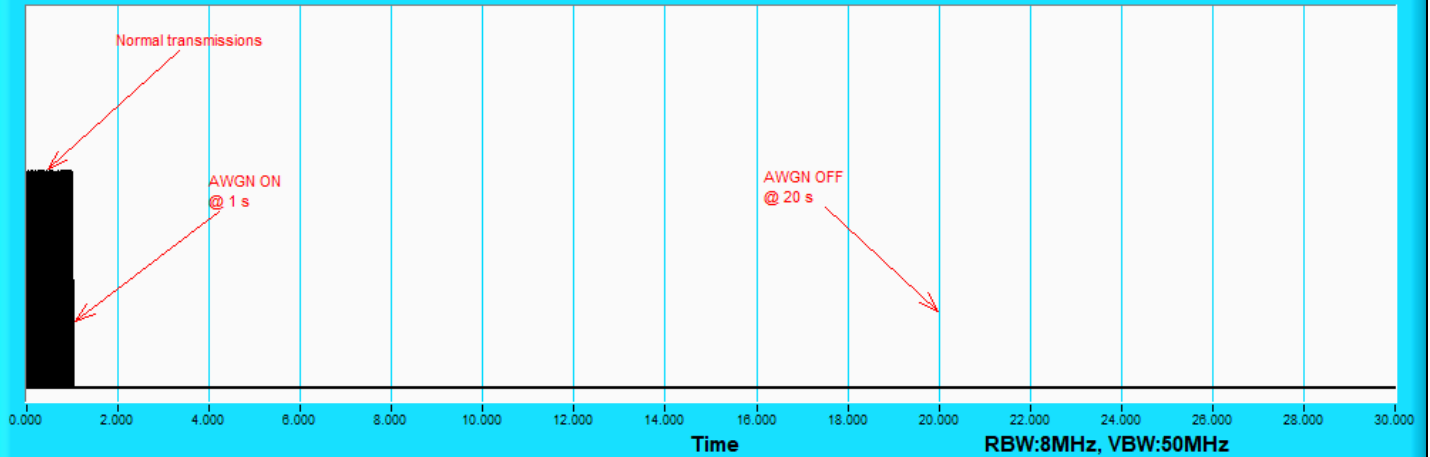


802.11be (EHT320) / CH159(Low Edge)

CBP

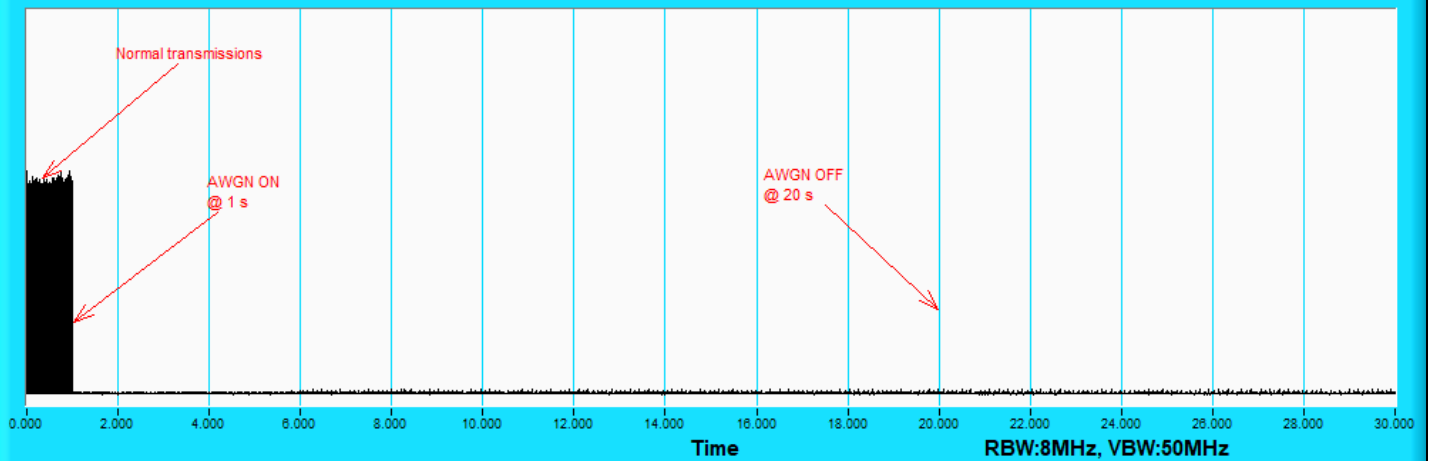

802.11be (EHT320) / CH159(Middle)

CBP

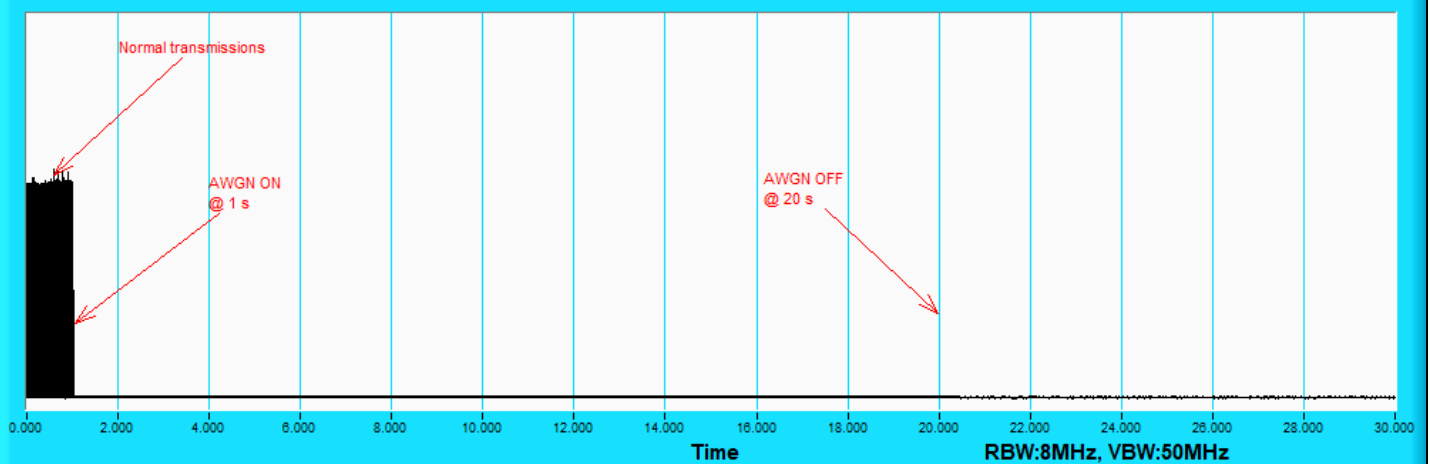

802.11be (EHT320) / CH159(High Edge)


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-60	3	0	-63	-62	OFF
					-63	3	0	-66	-62	Minimal
					-79	3	0	-82	-62	ON
	320	191	6905	6750	-60	3	0	-63	-62	OFF
					-70	3	0	-73	-62	Minimal
					-79	3	0	-82	-62	ON
				6905	-59	3	0	-62	-62	OFF
					-74	3	0	-77	-62	Minimal
					-79	3	0	-82	-62	ON
				7060	-59	3	0	-62	-62	OFF
					-62	3	0	-65	-62	Minimal
					-79	3	0	-82	-62	ON

Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 1) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

Plots of EUT Tx waveform

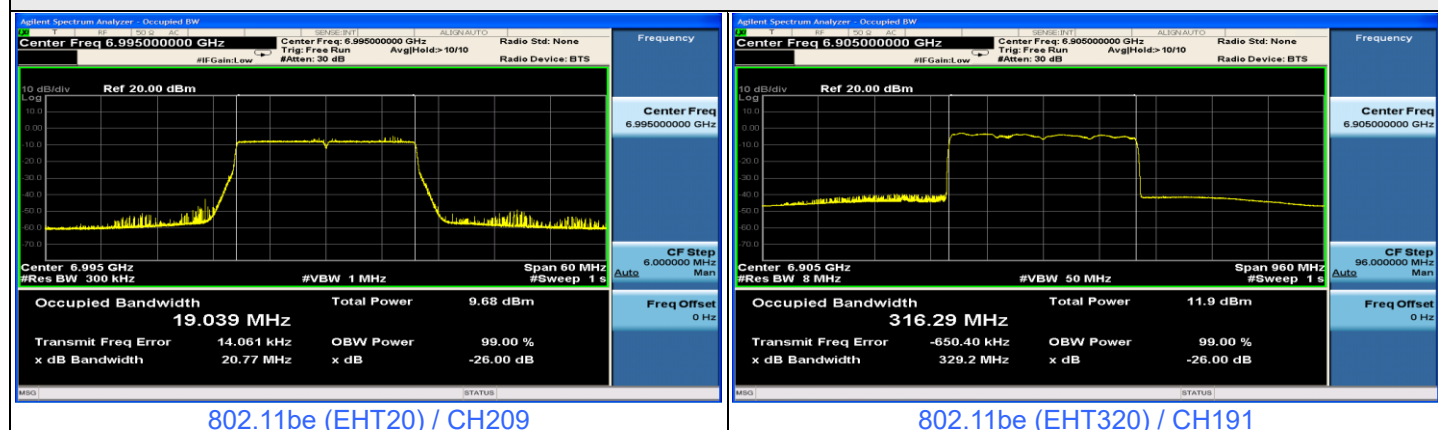

Agilent Spectrum Analyzer - Channel Power

Center Freq 6.750000000 GHz Radio Step: None Radio Device: BTS

PREAMP #IF Gain: Low + Trig: Free Run Avg: Hold > 10/10 #Atten: 0 dB

10 dB/div Ref -30.00 dBm

Center 6.75 GHz Span 20 MHz


#Res BW 1 MHz #VBW 3 MHz #Sweep 1 %

Channel Power Power Spectral Density

-60.00 dBm / 10 MHz -130.0 dBm /Hz

0.142

802.11be (EHT320) / CH191(Low Edge)

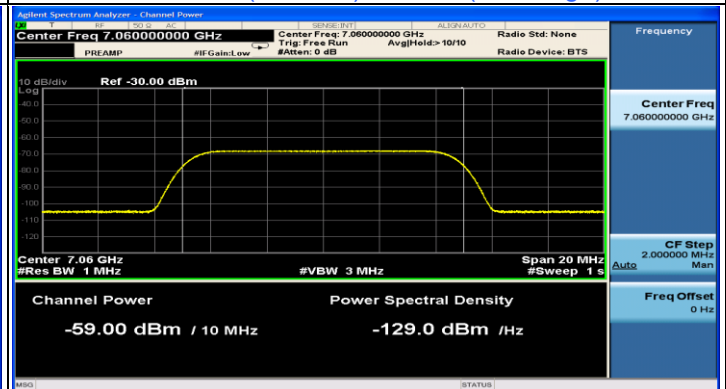

802.11be (EHT320) / CH191(High Edge)

Normal transmissions

AWGN ON @ 1 s

AWGN OFF @ 20 s


Time

RBW:8MHz, VBW:50MHz

802.11be (EHT20) / CH209


Plots of EUT ceased transmission in the time domain

CBP

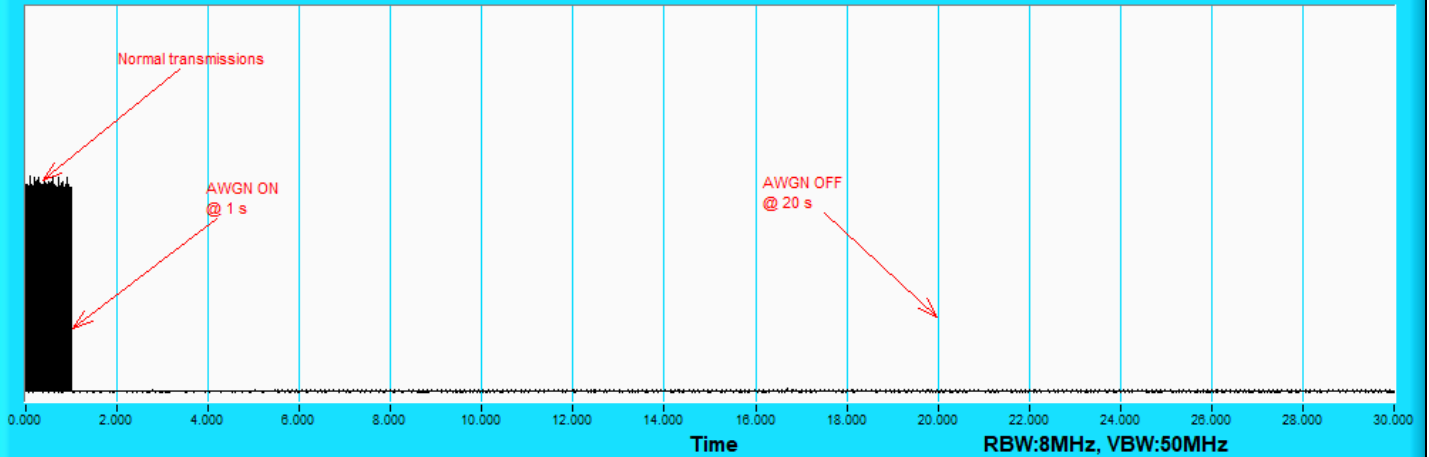


802.11be (EHT320) / CH191(Low Edge)

CBP

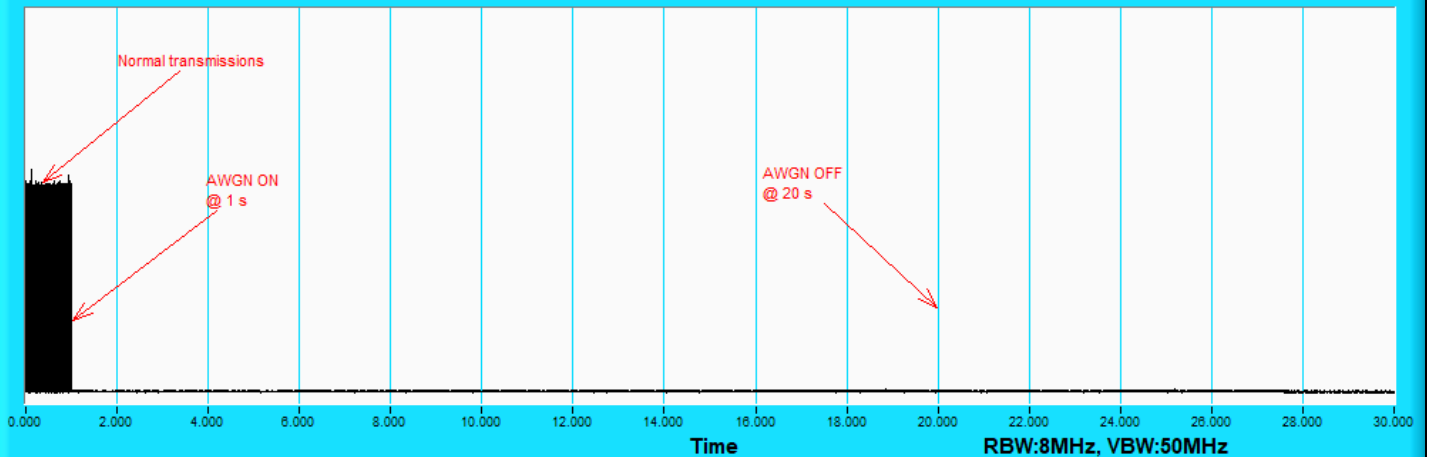

802.11be (EHT320) / CH191(Middle)

CBP

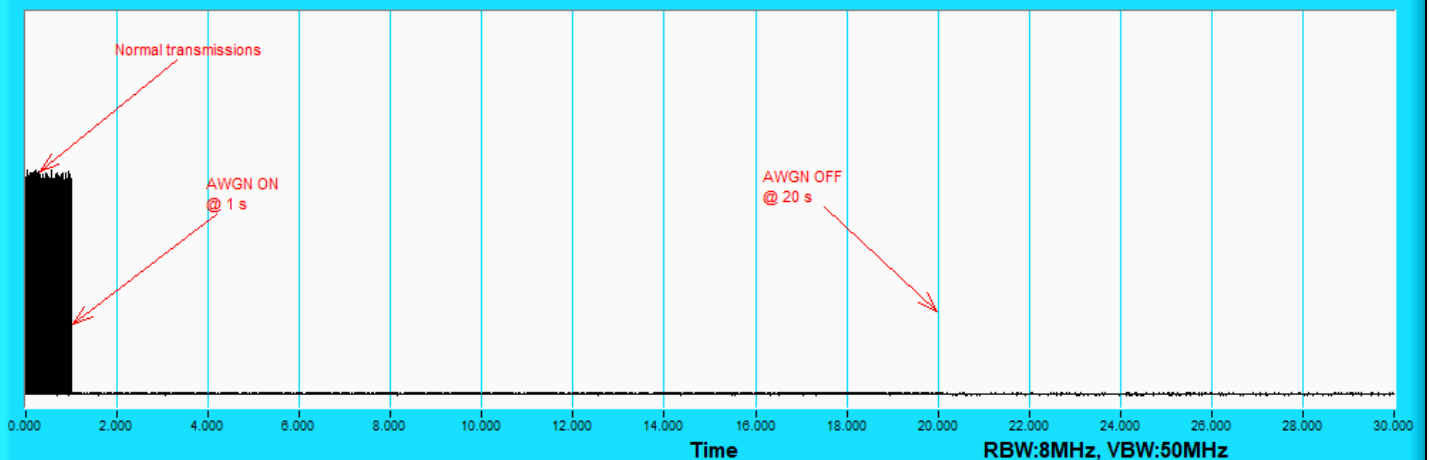

802.11be (EHT320) / CH191(High Edge)


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	9.64	44.60	23.00	54.24	32.64	65.18	55.18	-10.94	-22.54
2	0.25526	9.63	37.77	14.80	47.40	24.43	61.58	51.58	-14.18	-27.15
3	0.46679	9.64	27.21	21.29	36.85	30.93	56.57	46.57	-19.72	-15.64
4	2.49461	9.72	16.81	11.34	26.53	21.06	56.00	46.00	-29.47	-24.94
5	16.00946	10.23	10.43	5.63	20.66	15.86	60.00	50.00	-39.34	-34.14
6	25.97860	10.37	11.04	6.21	21.41	16.58	60.00	50.00	-38.59	-33.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

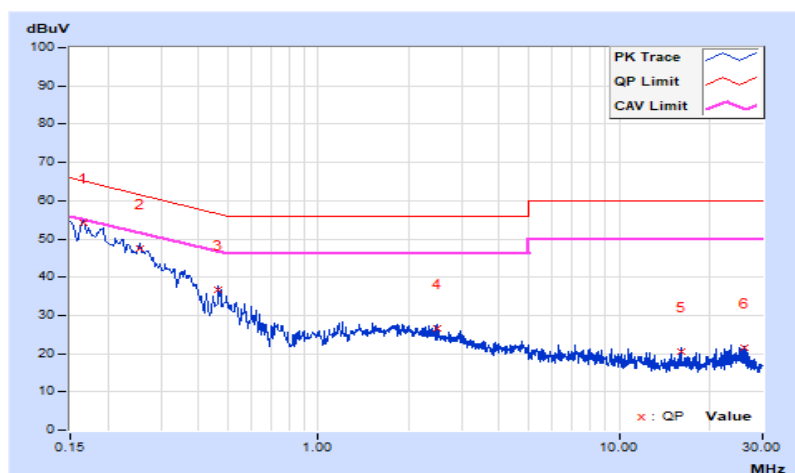


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.63	43.18	21.19	52.81	30.82	65.79	55.79	-12.98	-24.97
2	0.20839	9.61	38.83	16.27	48.44	25.88	63.27	53.27	-14.83	-27.39
3	0.47041	9.62	25.61	19.43	35.23	29.05	56.51	46.51	-21.28	-17.46
4	3.54276	9.76	14.89	9.22	24.65	18.98	56.00	46.00	-31.35	-27.02
5	5.16426	9.84	12.26	5.81	22.10	15.65	60.00	50.00	-37.90	-34.35
6	7.01417	9.93	11.56	4.33	21.49	14.26	60.00	50.00	-38.51	-35.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

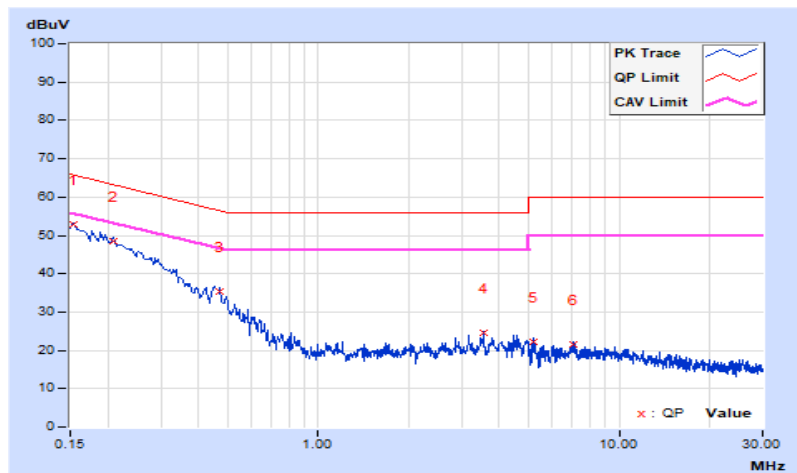


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	24.4 QP	40.0	-15.6	2.00 H	288	37.5	-13.1
2	112.45	26.8 QP	43.5	-16.7	1.51 H	254	42.7	-15.9
3	191.02	25.5 QP	43.5	-18.0	1.01 H	220	41.4	-15.9
4	290.93	28.2 QP	46.0	-17.8	1.01 H	226	40.8	-12.6
5	378.23	38.3 QP	46.0	-7.7	1.01 H	18	48.7	-10.4
6	783.69	35.2 QP	46.0	-10.8	1.51 H	275	37.3	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

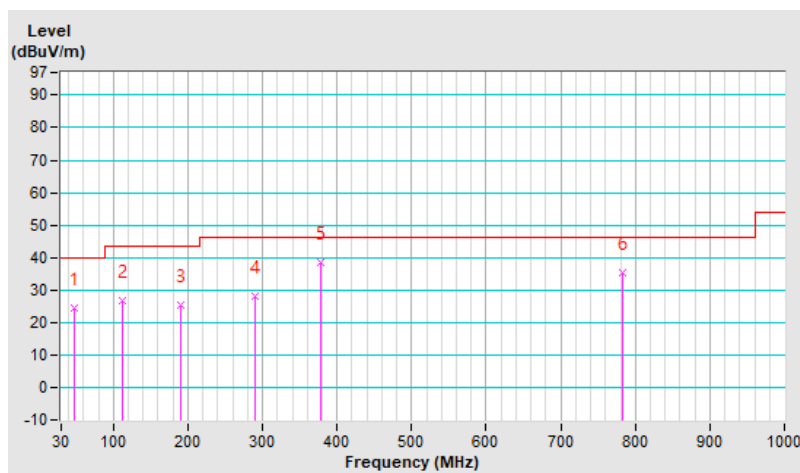


RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.98	28.6 QP	40.0	-11.4	1.00 V	227	42.8	-14.2
2	113.42	26.0 QP	43.5	-17.5	1.00 V	184	41.8	-15.8
3	200.72	24.1 QP	43.5	-19.4	1.00 V	2	40.4	-16.3
4	358.83	38.9 QP	46.0	-7.1	1.49 V	76	49.9	-11.0
5	391.81	34.1 QP	46.0	-11.9	1.49 V	264	44.1	-10.0
6	800.18	34.1 QP	46.0	-11.9	1.49 V	153	36.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

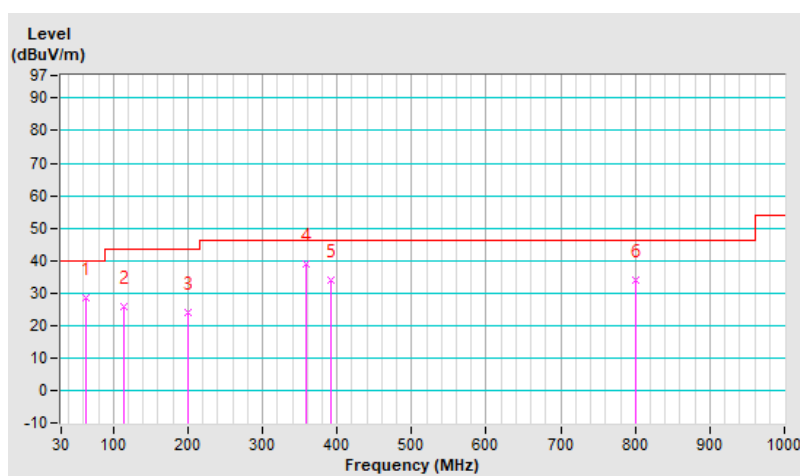

7.9 Unwanted Emissions above 1 GHz

CDD Mode

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.5 PK	88.2	-31.7	N/A H	N/A	50.9	5.6
2	#5925.00	43.5 AV	68.2	-24.7	N/A H	N/A	37.9	5.6
3	*5955.00	110.1 PK			1.38 H	201	66.9	43.2
4	*5955.00	100.2 AV			1.38 H	201	57.0	43.2
5	11910.00	59.3 PK	74.0	-14.7	1.93 H	316	48.0	11.3
6	11910.00	46.3 AV	54.0	-7.7	1.93 H	316	35.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	1.61 V	196	53.0	5.6
2	#5925.00	44.7 AV	68.2	-23.5	1.61 V	196	39.1	5.6
3	*5955.00	115.3 PK			1.61 V	196	72.1	43.2
4	*5955.00	103.8 AV			1.61 V	196	60.6	43.2
5	11910.00	60.6 PK	74.0	-13.4	2.23 V	181	49.3	11.3
6	11910.00	47.5 AV	54.0	-6.5	2.23 V	181	36.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.9 PK			1.73 H	239	65.6	44.3
2	*6175.00	100.7 AV			1.73 H	239	56.4	44.3
3	12350.00	57.4 PK	74.0	-16.6	1.95 H	302	46.3	11.1
4	12350.00	45.3 AV	54.0	-8.7	1.95 H	302	34.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	114.2 PK			1.47 V	193	69.9	44.3
2	*6175.00	104.6 AV			1.47 V	193	60.3	44.3
3	12350.00	58.1 PK	74.0	-15.9	2.21 V	190	47.0	11.1
4	12350.00	45.9 AV	54.0	-8.1	2.21 V	190	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.8 PK			1.66 H	235	65.0	45.8
2	*6415.00	101.9 AV			1.66 H	235	56.1	45.8
3	#12830.00	57.3 PK	88.2	-30.9	1.95 H	302	46.0	11.3
4	#12830.00	45.3 AV	68.2	-22.9	1.95 H	302	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			1.39 V	193	69.3	45.8
2	*6415.00	104.9 AV			1.39 V	193	59.1	45.8
3	#12830.00	58.1 PK	88.2	-30.1	2.21 V	195	46.8	11.3
4	#12830.00	45.9 AV	68.2	-22.3	2.21 V	195	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.0 PK			1.76 H	212	65.1	45.9
2	*6435.00	101.4 AV			1.76 H	212	55.5	45.9
3	#12870.00	57.2 PK	88.2	-31.0	1.95 H	312	46.0	11.2
4	#12870.00	45.1 AV	68.2	-23.1	1.95 H	312	33.9	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.0 PK			1.30 V	195	69.1	45.9
2	*6435.00	104.9 AV			1.30 V	195	59.0	45.9
3	#12870.00	57.9 PK	88.2	-30.3	2.22 V	197	46.7	11.2
4	#12870.00	45.7 AV	68.2	-22.5	2.22 V	197	34.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.1 PK			1.72 H	203	64.9	46.2
2	*6475.00	101.3 AV			1.71 H	203	55.1	46.2
3	#12950.00	57.2 PK	88.2	-31.0	1.93 H	316	46.1	11.1
4	#12950.00	45.3 AV	68.2	-22.9	1.93 H	316	34.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.1 PK			1.31 V	190	68.9	46.2
2	*6475.00	105.2 AV			1.31 V	190	59.0	46.2
3	#12950.00	58.0 PK	88.2	-30.2	2.18 V	190	46.9	11.1
4	#12950.00	45.8 AV	68.2	-22.4	2.18 V	190	34.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.6 PK			1.74 H	216	64.2	46.4
2	*6515.00	100.6 AV			1.74 H	216	54.2	46.4
3	#13030.00	57.2 PK	88.2	-31.0	1.97 H	315	46.1	11.1
4	#13030.00	45.1 AV	68.2	-23.1	1.97 H	315	34.0	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	114.8 PK			1.32 V	196	68.4	46.4
2	*6515.00	105.1 AV			1.32 V	196	58.7	46.4
3	#13030.00	58.1 PK	88.2	-30.1	2.30 V	187	47.0	11.1
4	#13030.00	45.9 AV	68.2	-22.3	2.30 V	187	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.9 PK			1.66 H	217	64.5	46.4
2	*6535.00	101.0 AV			1.66 H	217	54.6	46.4
3	#13070.00	57.7 PK	88.2	-30.5	1.97 H	315	46.4	11.3
4	#13070.00	45.6 AV	68.2	-22.6	1.97 H	315	34.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.8 PK			1.37 V	186	68.4	46.4
2	*6535.00	105.0 AV			1.37 V	186	58.6	46.4
3	#13070.00	58.3 PK	88.2	-29.9	2.08 V	193	47.0	11.3
4	#13070.00	46.2 AV	68.2	-22.0	2.08 V	193	34.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.8 PK			1.65 H	214	64.3	46.5
2	*6695.00	100.6 AV			1.65 H	214	54.1	46.5
3	13390.00	57.4 PK	74.0	-16.6	1.93 H	302	46.2	11.2
4	13390.00	45.2 AV	54.0	-8.8	1.93 H	302	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.5 PK			1.15 V	196	68.0	46.5
2	*6695.00	104.8 AV			1.15 V	196	58.3	46.5
3	13390.00	58.1 PK	74.0	-15.9	2.01 V	182	46.9	11.2
4	13390.00	45.8 AV	54.0	-8.2	2.01 V	182	34.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.2 PK			1.65 H	214	63.3	46.9
2	*6855.00	101.0 AV			1.65 H	214	54.1	46.9
3	#13710.00	57.2 PK	88.2	-31.0	1.93 H	302	46.3	10.9
4	#13710.00	45.0 AV	68.2	-23.2	1.93 H	302	34.1	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.8 PK			1.15 V	186	67.9	46.9
2	*6855.00	104.9 AV			1.15 V	186	58.0	46.9
3	#13710.00	57.8 PK	88.2	-30.4	2.21 V	192	46.9	10.9
4	#13710.00	45.7 AV	68.2	-22.5	2.21 V	192	34.8	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.8 PK			1.92 H	256	63.9	46.9
2	*6875.00	100.7 AV			1.92 H	256	53.8	46.9
3	#13750.00	57.1 PK	88.2	-31.1	1.95 H	302	46.2	10.9
4	#13750.00	44.9 AV	68.2	-23.3	1.95 H	308	34.0	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.2 PK			1.48 V	186	68.3	46.9
2	*6875.00	104.5 AV			1.48 V	186	57.6	46.9
3	#13750.00	57.7 PK	88.2	-30.5	2.32 V	195	46.8	10.9
4	#13750.00	45.5 AV	68.2	-22.7	2.32 V	195	34.6	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.3 PK			1.88 H	254	63.3	47.0
2	*6995.00	100.6 AV			1.88 H	254	53.6	47.0
3	#13990.00	57.9 PK	88.2	-30.3	1.96 H	312	46.0	11.9
4	#13990.00	46.1 AV	68.2	-22.1	1.96 H	312	34.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	114.9 PK			1.41 V	193	67.9	47.0
2	*6995.00	104.6 AV			1.41 V	193	57.6	47.0
3	#13990.00	58.7 PK	88.2	-29.5	2.29 V	190	46.8	11.9
4	#13990.00	46.9 AV	68.2	-21.3	2.29 V	190	35.0	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.9 PK			1.61 H	349	64.3	47.6
2	*7095.00	101.6 AV			1.61 H	349	54.0	47.6
3	#7125.00	60.5 PK	88.2	-27.7	1.61 H	349	51.0	9.5
4	#7125.00	47.0 AV	68.2	-21.2	1.61 H	349	37.5	9.5
5	#14190.00	60.1 PK	88.2	-28.1	1.79 H	321	48.6	11.5
6	#14190.00	46.8 AV	68.2	-21.4	1.79 H	321	35.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	115.1 PK			1.47 V	103	67.5	47.6
2	*7095.00	105.3 AV			1.47 V	103	57.7	47.6
3	#7125.00	61.6 PK	88.2	-26.6	1.47 V	103	52.1	9.5
4	#7125.00	48.0 AV	68.2	-20.2	1.47 V	103	38.5	9.5
5	#14190.00	60.2 PK	88.2	-28.0	2.32 V	195	48.7	11.5
6	#14190.00	47.5 AV	68.2	-20.7	2.32 V	195	36.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.6 PK			1.67 H	41	59.0	47.6
2	*7115.00	96.8 AV			1.67 H	41	49.2	47.6
3	#7125.00	80.4 PK	88.2	-7.8	1.80 H	41	70.9	9.5
4	#7125.00	52.0 AV	68.2	-16.2	1.80 H	41	42.5	9.5
5	#14230.00	59.8 PK	88.2	-28.4	1.99 H	312	48.4	11.4
6	#14230.00	46.9 AV	68.2	-21.3	1.99 H	312	35.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.3 PK			1.42 V	110	61.7	47.6
2	*7115.00	99.2 AV			1.42 V	110	51.6	47.6
3	#7125.00	88.0 PK	88.2	-0.2	1.42 V	110	78.5	9.5
4	#7125.00	59.9 AV	68.2	-8.3	1.42 V	110	50.4	9.5
5	#14230.00	60.9 PK	88.2	-27.3	2.21 V	190	49.5	11.4
6	#14230.00	47.9 AV	68.2	-20.3	2.21 V	190	36.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.9 PK	88.2	-30.3	1.18 H	206	52.3	5.6
2	#5925.00	43.4 AV	68.2	-24.8	1.18 H	206	37.8	5.6
3	*5955.00	112.2 PK			1.18 H	206	69.0	43.2
4	*5955.00	99.4 AV			1.18 H	206	56.2	43.2
5	11910.00	57.3 PK	74.0	-16.7	1.93 H	316	46.0	11.3
6	11910.00	45.2 AV	54.0	-8.8	1.93 H	316	33.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	1.72 V	194	53.0	5.6
2	#5925.00	44.6 AV	68.2	-23.6	1.72 V	194	39.0	5.6
3	*5955.00	114.7 PK			1.72 V	194	71.5	43.2
4	*5955.00	102.4 AV			1.72 V	194	59.2	43.2
5	11910.00	57.7 PK	74.0	-16.3	2.25 V	187	46.4	11.3
6	11910.00	45.8 AV	54.0	-8.2	2.25 V	187	34.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	110.8 PK			1.63 H	236	66.5	44.3
2	*6175.00	98.2 AV			1.63 H	236	53.9	44.3
3	12350.00	57.0 PK	74.0	-17.0	1.89 H	302	45.9	11.1
4	12350.00	45.2 AV	54.0	-8.8	1.89 H	302	34.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	114.3 PK			1.17 V	190	70.0	44.3
2	*6175.00	102.3 AV			1.17 V	190	58.0	44.3
3	12350.00	57.6 PK	74.0	-16.4	2.21 V	189	46.5	11.1
4	12350.00	46.0 AV	54.0	-8.0	2.21 V	189	34.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			1.63 H	219	66.7	45.8
2	*6415.00	100.0 AV			1.63 H	219	54.2	45.8
3	#12830.00	57.3 PK	88.2	-30.9	1.95 H	318	46.0	11.3
4	#12830.00	45.5 AV	68.2	-22.7	1.95 H	318	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.6 PK			1.26 V	182	69.8	45.8
2	*6415.00	103.7 AV			1.26 V	182	57.9	45.8
3	#12830.00	58.0 PK	88.2	-30.2	2.23 V	183	46.7	11.3
4	#12830.00	45.9 AV	68.2	-22.3	2.23 V	183	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.5 PK			1.55 H	219	66.6	45.9
2	*6435.00	100.2 AV			1.55 H	219	54.3	45.9
3	#12870.00	57.4 PK	88.2	-30.8	1.99 H	304	46.2	11.2
4	#12870.00	45.2 AV	68.2	-23.0	1.99 H	304	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.5 PK			1.20 V	187	70.6	45.9
2	*6435.00	103.7 AV			1.20 V	187	57.8	45.9
3	#12870.00	58.0 PK	88.2	-30.2	2.26 V	180	46.8	11.2
4	#12870.00	45.8 AV	68.2	-22.4	2.26 V	180	34.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.3 PK			1.62 H	220	66.1	46.2
2	*6475.00	100.2 AV			1.62 H	220	54.0	46.2
3	#12950.00	57.1 PK	88.2	-31.1	1.95 H	312	46.0	11.1
4	#12950.00	45.2 AV	68.2	-23.0	1.95 H	312	34.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.9 PK			1.18 V	181	70.7	46.2
2	*6475.00	103.5 AV			1.18 V	181	57.3	46.2
3	#12950.00	57.9 PK	88.2	-30.3	2.29 V	180	46.8	11.1
4	#12950.00	46.0 AV	68.2	-22.2	2.29 V	180	34.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.6 PK			1.64 H	217	66.2	46.4
2	*6515.00	101.3 AV			1.64 H	217	54.9	46.4
3	#13030.00	57.1 PK	88.2	-31.1	1.97 H	311	46.0	11.1
4	#13030.00	45.0 AV	68.2	-23.2	1.97 H	311	33.9	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.2 PK			1.28 V	182	70.8	46.4
2	*6515.00	104.6 AV			1.28 V	182	58.2	46.4
3	#13030.00	57.9 PK	88.2	-30.3	2.22 V	192	46.8	11.1
4	#13030.00	45.9 AV	68.2	-22.3	2.22 V	192	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.5 PK			1.64 H	168	66.1	46.4
2	*6535.00	100.3 AV			1.64 H	168	53.9	46.4
3	#13070.00	57.3 PK	88.2	-30.9	1.89 H	305	46.0	11.3
4	#13070.00	45.6 AV	68.2	-22.6	1.89 H	305	34.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.0 PK			1.18 V	182	70.6	46.4
2	*6535.00	104.9 AV			1.18 V	182	58.5	46.4
3	#13070.00	58.0 PK	88.2	-30.2	2.19 V	200	46.7	11.3
4	#13070.00	46.2 AV	68.2	-22.0	2.19 V	200	34.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.1 PK			1.70 H	167	66.6	46.5
2	*6695.00	101.7 AV			1.70 H	167	55.2	46.5
3	13390.00	57.4 PK	74.0	-16.6	1.95 H	318	46.2	11.2
4	13390.00	45.5 AV	54.0	-8.5	1.95 H	318	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			1.04 V	181	70.2	46.5
2	*6695.00	104.8 AV			1.04 V	182	58.3	46.5
3	13390.00	58.2 PK	74.0	-15.8	2.23 V	199	47.0	11.2
4	13390.00	46.2 AV	54.0	-7.8	2.23 V	199	35.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.3 PK			1.70 H	168	66.4	46.9
2	*6855.00	101.2 AV			1.70 H	168	54.3	46.9
3	#13710.00	57.2 PK	88.2	-31.0	2.02 H	315	46.3	10.9
4	#13710.00	45.4 AV	68.2	-22.8	2.02 H	315	34.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.0 PK			1.13 V	182	70.1	46.9
2	*6855.00	104.8 AV			1.13 V	182	57.9	46.9
3	#13710.00	57.9 PK	88.2	-30.3	2.23 V	191	47.0	10.9
4	#13710.00	46.1 AV	68.2	-22.1	2.23 V	191	35.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	112.8 PK			1.82 H	168	65.9	46.9
2	*6875.00	102.2 AV			1.82 H	168	55.3	46.9
3	#13750.00	57.3 PK	88.2	-30.9	1.99 H	305	46.4	10.9
4	#13750.00	45.4 AV	68.2	-22.8	1.99 H	305	34.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.4 PK			1.19 V	203	70.5	46.9
2	*6875.00	105.1 AV			1.19 V	203	58.2	46.9
3	#13750.00	57.7 PK	88.2	-30.5	2.20 V	190	46.8	10.9
4	#13750.00	46.2 AV	68.2	-22.0	2.20 V	190	35.3	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.5 PK			1.61 H	170	65.5	47.0
2	*6995.00	101.9 AV			1.61 H	170	54.9	47.0
3	#13990.00	58.5 PK	88.2	-29.7	1.89 H	315	46.6	11.9
4	#13990.00	46.6 AV	68.2	-21.6	1.89 H	315	34.7	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.0 PK			1.44 V	247	70.0	47.0
2	*6995.00	105.2 AV			1.44 V	247	58.2	47.0
3	#13990.00	59.0 PK	88.2	-29.2	2.25 V	189	47.1	11.9
4	#13990.00	47.2 AV	68.2	-21.0	2.25 V	189	35.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	112.8 PK			1.60 H	333	65.2	47.6
2	*7095.00	100.8 AV			1.60 H	333	53.2	47.6
3	#7125.00	60.6 PK	88.2	-27.6	1.60 H	333	51.1	9.5
4	#7125.00	48.3 AV	68.2	-19.9	1.60 H	333	38.8	9.5
5	#14190.00	59.9 PK	88.2	-28.3	1.96 H	312	48.4	11.5
6	#14190.00	46.7 AV	68.2	-21.5	1.96 H	312	35.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	116.8 PK			1.38 V	249	69.2	47.6
2	*7095.00	103.8 AV			1.38 V	249	56.2	47.6
3	#7125.00	61.9 PK	88.2	-26.3	1.38 V	249	52.4	9.5
4	#7125.00	48.0 AV	68.2	-20.2	1.38 V	249	38.5	9.5
5	#14190.00	60.0 PK	88.2	-28.2	2.29 V	193	48.5	11.5
6	#14190.00	47.3 AV	68.2	-20.9	2.29 V	193	35.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.6 PK			1.50 H	163	57.0	47.6
2	*7115.00	92.4 AV			1.50 H	163	44.8	47.6
3	#7125.00	74.5 PK	88.2	-13.7	1.50 H	163	65.0	9.5
4	#7125.00	64.6 AV	68.2	-3.6	1.50 H	163	55.1	9.5
5	#14230.00	59.5 PK	88.2	-28.7	1.93 H	316	48.1	11.4
6	#14230.00	46.5 AV	68.2	-21.7	1.93 H	316	35.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.9 PK			1.59 V	260	62.3	47.6
2	*7115.00	96.6 AV			1.59 V	260	49.0	47.6
3	#7125.50	78.6 PK	88.2	-9.6	1.59 V	260	69.1	9.5
4	#7125.50	68.0 AV	68.2	-0.2	1.59 V	260	58.5	9.5
5	#14230.00	60.4 PK	88.2	-27.8	2.22 V	189	49.0	11.4
6	#14230.00	47.4 AV	68.2	-20.8	2.22 V	189	36.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 69 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.7 PK	88.2	-17.5	1.54 H	266	65.1	5.6
2	#5925.00	51.6 AV	68.2	-16.6	1.54 H	266	46.0	5.6
3	*5965.00	112.1 PK			1.54 H	266	68.9	43.2
4	*5965.00	99.0 AV			1.54 H	266	55.8	43.2
5	11930.00	58.1 PK	74.0	-15.9	1.99 H	300	46.9	11.2
6	11930.00	46.0 AV	54.0	-8.0	1.99 H	300	34.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	1.50 V	189	65.5	5.6
2	#5925.00	55.9 AV	68.2	-12.3	1.50 V	189	50.3	5.6
3	*5965.00	115.6 PK			1.50 V	189	72.4	43.2
4	*5965.00	103.9 AV			1.50 V	189	60.7	43.2
5	11930.00	58.4 PK	74.0	-15.6	2.26 V	186	47.2	11.2
6	11930.00	46.7 AV	54.0	-7.3	2.26 V	186	35.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	111.1 PK			1.92 H	207	66.8	44.3
2	*6165.00	98.9 AV			1.92 H	207	54.6	44.3
3	12330.00	57.1 PK	74.0	-16.9	1.87 H	302	46.1	11.0
4	12330.00	44.8 AV	54.0	-9.2	1.87 H	302	33.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	115.1 PK			1.39 V	190	70.8	44.3
2	*6165.00	103.0 AV			1.39 V	190	58.7	44.3
3	12330.00	57.9 PK	74.0	-16.1	2.18 V	192	46.9	11.0
4	12330.00	45.5 AV	54.0	-8.5	2.18 V	192	34.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.4 PK			1.55 H	222	66.7	45.7
2	*6405.00	99.8 AV			1.55 H	222	54.1	45.7
3	#12810.00	57.6 PK	88.2	-30.6	2.01 H	321	46.4	11.2
4	#12810.00	45.2 AV	68.2	-23.0	2.01 H	321	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	116.2 PK			1.39 V	188	70.5	45.7
2	*6405.00	104.0 AV			1.39 V	188	58.3	45.7
3	#12810.00	58.0 PK	88.2	-30.2	2.19 V	182	46.8	11.2
4	#12810.00	45.9 AV	68.2	-22.3	2.19 V	182	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.7 PK			1.62 H	207	65.8	45.9
2	*6445.00	99.6 AV			1.62 H	207	53.7	45.9
3	#12890.00	57.5 PK	88.2	-30.7	1.89 H	299	46.2	11.3
4	#12890.00	45.3 AV	68.2	-22.9	1.89 H	299	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	115.8 PK			1.21 V	188	69.9	45.9
2	*6445.00	103.5 AV			1.21 V	188	57.6	45.9
3	#12890.00	58.0 PK	88.2	-30.2	2.18 V	179	46.7	11.3
4	#12890.00	46.1 AV	68.2	-22.1	2.18 V	179	34.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.4 PK			1.63 H	219	65.2	46.2
2	*6485.00	99.6 AV			1.63 H	219	53.4	46.2
3	#12970.00	57.1 PK	88.2	-31.1	1.99 H	318	46.1	11.0
4	#12970.00	45.3 AV	68.2	-22.9	1.99 H	318	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	116.5 PK			1.28 V	187	70.3	46.2
2	*6485.00	104.7 AV			1.28 V	187	58.5	46.2
3	#12970.00	57.8 PK	88.2	-30.4	2.26 V	187	46.8	11.0
4	#12970.00	45.9 AV	68.2	-22.3	2.26 V	187	34.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.3 PK			1.60 H	212	65.9	46.4
2	*6525.00	99.9 AV			1.60 H	212	53.5	46.4
3	#13050.00	57.2 PK	88.2	-31.0	1.96 H	306	46.0	11.2
4	#13050.00	46.6 AV	68.2	-21.6	1.96 H	306	35.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	116.4 PK			1.33 V	187	70.0	46.4
2	*6525.00	104.5 AV			1.33 V	187	58.1	46.4
3	#13050.00	58.1 PK	88.2	-30.1	2.21 V	201	46.9	11.2
4	#13050.00	47.2 AV	68.2	-21.0	2.21 V	201	36.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.6 PK			1.56 H	217	66.2	46.4
2	*6565.00	100.7 AV			1.56 H	217	54.3	46.4
3	#13130.00	57.7 PK	88.2	-30.5	1.89 H	301	46.4	11.3
4	#13130.00	47.5 AV	68.2	-20.7	1.89 H	301	36.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	117.2 PK			1.30 V	189	70.8	46.4
2	*6565.00	105.0 AV			1.30 V	189	58.6	46.4
3	#13130.00	58.3 PK	88.2	-29.9	2.20 V	197	47.0	11.3
4	#13130.00	48.2 AV	68.2	-20.0	2.20 V	197	36.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	112.8 PK			1.71 H	165	66.3	46.5
2	*6725.00	100.5 AV			1.71 H	165	54.0	46.5
3	#13450.00	57.5 PK	88.2	-30.7	2.02 H	315	46.4	11.1
4	#13450.00	47.3 AV	68.2	-20.9	2.02 H	315	36.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	117.0 PK			1.32 V	213	70.5	46.5
2	*6725.00	105.1 AV			1.32 V	213	58.6	46.5
3	#13450.00	58.0 PK	88.2	-30.2	2.30 V	188	46.9	11.1
4	#13450.00	48.1 AV	68.2	-20.1	2.30 V	188	37.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.8 PK			1.70 H	166	66.9	46.9
2	*6845.00	101.9 AV			1.70 H	166	55.0	46.9
3	#13690.00	57.1 PK	88.2	-31.1	2.08 H	311	46.2	10.9
4	#13690.00	47.1 AV	68.2	-21.1	2.08 H	311	36.2	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	116.9 PK			1.42 V	212	70.0	46.9
2	*6845.00	105.0 AV			1.42 V	212	58.1	46.9
3	#13690.00	57.9 PK	88.2	-30.3	2.13 V	201	47.0	10.9
4	#13690.00	47.8 AV	68.2	-20.4	2.13 V	201	36.9	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	113.4 PK			1.66 H	173	66.5	46.9
2	*6885.00	101.2 AV			1.66 H	173	54.3	46.9
3	#13770.00	56.9 PK	88.2	-31.3	1.99 H	307	46.0	10.9
4	#13770.00	46.9 AV	68.2	-21.3	1.99 H	307	36.0	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	116.7 PK			1.40 V	212	69.8	46.9
2	*6885.00	105.6 AV			1.40 V	212	58.7	46.9
3	#13770.00	57.8 PK	88.2	-30.4	2.22 V	193	46.9	10.9
4	#13770.00	47.9 AV	68.2	-20.3	2.22 V	193	37.0	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	113.3 PK			1.55 H	210	66.2	47.1
2	*7005.00	101.2 AV			1.55 H	210	54.1	47.1
3	#14010.00	58.3 PK	88.2	-29.9	1.90 H	312	46.5	11.8
4	#14010.00	48.3 AV	68.2	-19.9	1.91 H	312	36.5	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	117.6 PK			1.35 V	208	70.5	47.1
2	*7005.00	105.5 AV			1.35 V	208	58.4	47.1
3	#14010.00	59.0 PK	88.2	-29.2	2.22 V	196	47.2	11.8
4	#14010.00	49.0 AV	68.2	-19.2	2.22 V	196	37.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.9 PK			1.50 H	343	64.4	47.5
2	*7085.00	100.0 AV			1.50 H	343	52.5	47.5
3	#7125.00	65.5 PK	88.2	-22.7	1.50 H	343	56.0	9.5
4	#7125.00	51.8 AV	68.2	-16.4	1.50 H	343	42.3	9.5
5	#14170.00	59.0 PK	88.2	-29.2	1.96 H	312	47.6	11.4
6	#14170.00	45.9 AV	68.2	-22.3	1.96 H	312	34.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	116.3 PK			1.50 V	259	68.8	47.5
2	*7085.00	104.5 AV			1.50 V	259	57.0	47.5
3	#7125.00	70.0 PK	88.2	-18.2	1.50 V	259	60.5	9.5
4	#7125.00	55.0 AV	68.2	-13.2	1.50 V	259	45.5	9.5
5	#14170.00	59.7 PK	88.2	-28.5	2.22 V	190	48.3	11.4
6	#14170.00	46.6 AV	68.2	-21.6	2.22 V	190	35.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	1.50 H	268	66.9	5.6
2	#5925.00	59.7 AV	68.2	-8.5	1.50 H	268	54.1	5.6
3	*5985.00	112.2 PK			1.50 H	268	68.9	43.3
4	*5985.00	99.7 AV			1.50 H	268	56.4	43.3
5	11970.00	57.3 PK	74.0	-16.7	1.83 H	312	46.0	11.3
6	11970.00	45.1 AV	54.0	-8.9	1.83 H	312	33.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.9 PK	88.2	-12.3	1.50 V	90	70.3	5.6
2	#5925.00	62.7 AV	68.2	-5.5	1.50 V	90	57.1	5.6
3	*5985.00	114.7 PK			1.51 V	91	71.4	43.3
4	*5985.00	103.6 AV			1.51 V	91	60.3	43.3
5	11970.00	58.0 PK	74.0	-16.0	2.23 V	190	46.7	11.3
6	11970.00	45.9 AV	54.0	-8.1	2.23 V	190	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	111.2 PK			1.57 H	212	67.0	44.2
2	*6145.00	98.8 AV			1.57 H	212	54.6	44.2
3	12290.00	57.1 PK	74.0	-16.9	1.90 H	312	46.0	11.1
4	12290.00	47.3 AV	54.0	-6.7	1.91 H	312	36.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	115.1 PK			1.36 V	66	70.9	44.2
2	*6145.00	103.2 AV			1.36 V	66	59.0	44.2
3	12290.00	57.7 PK	74.0	-16.3	2.10 V	192	46.6	11.1
4	12290.00	48.0 AV	54.0	-6.0	2.10 V	192	36.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.7 PK			1.67 H	208	67.0	45.7
2	*6385.00	100.0 AV			1.67 H	208	54.3	45.7
3	#12770.00	57.3 PK	88.2	-30.9	1.93 H	306	46.1	11.2
4	#12770.00	47.2 AV	68.2	-21.0	1.93 H	306	36.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	116.2 PK			1.40 V	188	70.5	45.7
2	*6385.00	104.3 AV			1.40 V	188	58.6	45.7
3	#12770.00	57.7 PK	88.2	-30.5	2.31 V	196	46.5	11.2
4	#12770.00	47.9 AV	68.2	-20.3	2.31 V	196	36.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.6 PK			1.63 H	222	66.5	46.1
2	*6465.00	100.4 AV			1.63 H	222	54.3	46.1
3	#12930.00	57.4 PK	88.2	-30.8	1.88 H	325	46.3	11.1
4	#12930.00	47.4 AV	68.2	-20.8	1.88 H	325	36.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	116.8 PK			1.41 V	188	70.7	46.1
2	*6465.00	105.0 AV			1.41 V	188	58.9	46.1
3	#12930.00	58.0 PK	88.2	-30.2	2.26 V	181	46.9	11.1
4	#12930.00	47.9 AV	68.2	-20.3	2.26 V	181	36.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.7 PK			1.55 H	232	57.3	46.4
2	*6545.00	101.8 AV			1.55 H	232	55.4	46.4
3	#13090.00	57.7 PK	88.2	-30.5	1.93 H	306	46.3	11.4
4	#13090.00	47.8 AV	68.2	-20.4	1.93 H	306	36.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	117.4 PK			1.40 V	190	71.0	46.4
2	*6545.00	105.7 AV			1.40 V	190	59.3	46.4
3	#13090.00	58.5 PK	88.2	-29.7	2.23 V	200	47.1	11.4
4	#13090.00	48.3 AV	68.2	-19.9	2.23 V	200	36.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.5 PK			1.63 H	170	67.0	46.5
2	*6705.00	101.8 AV			1.63 H	170	55.3	46.5
3	#13410.00	57.7 PK	88.2	-30.5	1.95 H	332	46.5	11.2
4	#13410.00	47.7 AV	68.2	-20.5	1.95 H	332	36.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	117.3 PK			1.49 V	190	70.8	46.5
2	*6705.00	105.4 AV			1.49 V	190	58.9	46.5
3	#13410.00	58.4 PK	88.2	-29.8	2.18 V	182	47.2	11.2
4	#13410.00	48.5 AV	68.2	-19.7	2.18 V	182	37.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.0 PK			1.70 H	168	66.1	46.9
2	*6865.00	101.2 AV			1.70 H	168	54.3	46.9
3	#13730.00	56.9 PK	88.2	-31.3	2.02 H	315	46.0	10.9
4	#13730.00	46.7 AV	68.2	-21.5	2.02 H	315	35.8	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	117.0 PK			1.41 V	212	70.1	46.9
2	*6865.00	105.5 AV			1.41 V	212	58.6	46.9
3	#13730.00	57.4 PK	88.2	-30.8	2.22 V	191	46.5	10.9
4	#13730.00	47.2 AV	68.2	-21.0	2.22 V	191	36.3	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	113.1 PK			1.70 H	162	66.0	47.1
2	*6945.00	101.1 AV			1.70 H	162	54.0	47.1
3	#13890.00	58.0 PK	88.2	-30.2	1.95 H	314	46.3	11.7
4	#13890.00	48.0 AV	68.2	-20.2	1.95 H	314	36.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	118.1 PK			1.41 V	212	71.0	47.1
2	*6945.00	106.4 AV			1.41 V	212	59.3	47.1
3	#13890.00	58.7 PK	88.2	-29.5	2.20 V	197	47.0	11.7
4	#13890.00	49.0 AV	68.2	-19.2	2.20 V	197	37.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.5 PK			1.51 H	163	63.4	47.1
2	*7025.00	99.0 AV			1.51 H	163	51.9	47.1
3	#7125.00	71.3 PK	88.2	-16.9	1.51 H	163	61.8	9.5
4	#7125.00	54.3 AV	68.2	-13.9	1.51 H	163	44.8	9.5
5	#14050.00	59.5 PK	88.2	-28.7	1.93 H	312	47.9	11.6
6	#14050.00	46.6 AV	68.2	-21.6	1.93 H	312	35.0	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	114.5 PK			1.20 V	106	67.4	47.1
2	*7025.00	102.3 AV			1.20 V	106	55.2	47.1
3	#7125.00	71.5 PK	88.2	-16.7	1.20 V	106	62.0	9.5
4	#7125.00	55.7 AV	68.2	-12.5	1.20 V	106	46.2	9.5
5	#14050.00	60.1 PK	88.2	-28.1	2.19 V	183	48.5	11.6
6	#14050.00	47.4 AV	68.2	-20.8	2.19 V	183	35.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.2 PK	88.2	-12.0	1.23 H	179	70.6	5.6
2	#5925.00	63.8 AV	68.2	-4.4	1.23 H	179	58.2	5.6
3	*6025.00	110.6 PK			1.23 H	179	67.1	43.5
4	*6025.00	97.7 AV			1.23 H	179	54.2	43.5
5	12050.00	56.2 PK	74.0	-17.8	1.95 H	311	45.1	11.1
6	12050.00	44.7 AV	54.0	-9.3	1.95 H	311	33.6	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.6 PK	88.2	-7.6	1.62 V	190	75.0	5.6
2	#5925.00	68.1 AV	68.2	-0.1	1.62 V	190	62.5	5.6
3	*6025.00	114.5 PK			1.62 V	190	71.0	43.5
4	*6025.00	102.2 AV			1.62 V	190	58.7	43.5
5	12050.00	57.1 PK	74.0	-16.9	2.23 V	181	46.0	11.1
6	12050.00	45.1 AV	54.0	-8.9	2.23 V	181	34.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.9 PK			1.67 H	231	67.5	44.4
2	*6185.00	99.8 AV			1.67 H	231	55.4	44.4
3	12370.00	57.2 PK	74.0	-16.8	1.89 H	305	46.1	11.1
4	12370.00	45.3 AV	54.0	-8.7	1.89 H	305	34.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	115.4 PK			1.49 V	193	71.0	44.4
2	*6185.00	102.9 AV			1.49 V	193	58.5	44.4
3	12370.00	58.0 PK	74.0	-16.0	2.22 V	189	46.9	11.1
4	12370.00	45.8 AV	54.0	-8.2	2.22 V	189	34.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.4 PK			1.62 H	226	66.9	45.5
2	*6345.00	100.6 AV			1.62 H	226	55.1	45.5
3	12690.00	57.3 PK	74.0	-16.7	1.82 H	315	46.0	11.3
4	12690.00	45.3 AV	54.0	-8.7	1.82 H	315	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	115.6 PK			1.43 V	185	70.1	45.5
2	*6345.00	104.0 AV			1.43 V	185	58.5	45.5
3	12690.00	57.9 PK	74.0	-16.1	2.22 V	191	46.6	11.3
4	12690.00	45.8 AV	54.0	-8.2	2.22 V	191	34.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.9 PK			1.65 H	230	63.5	46.4
2	*6505.00	99.0 AV			1.65 H	230	52.6	46.4
3	#13010.00	57.1 PK	88.2	-31.1	1.89 H	301	46.2	10.9
4	#13010.00	44.8 AV	68.2	-23.4	1.89 H	301	33.9	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	116.9 PK			1.50 V	190	70.5	46.4
2	*6505.00	104.1 AV			1.50 V	190	57.7	46.4
3	#13010.00	57.7 PK	88.2	-30.5	2.25 V	180	46.8	10.9
4	#13010.00	45.3 AV	68.2	-22.9	2.25 V	180	34.4	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	112.6 PK			1.73 H	180	66.1	46.5
2	*6665.00	99.7 AV			1.73 H	180	53.2	46.5
3	13330.00	57.5 PK	74.0	-16.5	1.92 H	302	46.4	11.1
4	13330.00	45.3 AV	54.0	-8.7	1.92 H	302	34.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	116.0 PK			1.48 V	257	69.5	46.5
2	*6665.00	103.0 AV			1.48 V	257	56.5	46.5
3	13330.00	58.0 PK	74.0	-16.0	2.23 V	180	46.9	11.1
4	13330.00	45.8 AV	54.0	-8.2	2.23 V	180	34.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.3 PK			1.73 H	180	63.5	46.8
2	*6825.00	99.4 AV			1.73 H	180	52.6	46.8
3	#13650.00	57.2 PK	88.2	-31.0	1.89 H	301	46.5	10.7
4	#13650.00	44.7 AV	68.2	-23.5	1.89 H	301	34.0	10.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	113.7 PK			1.42 V	213	66.9	46.8
2	*6825.00	102.0 AV			1.42 V	213	55.2	46.8
3	#13650.00	57.9 PK	88.2	-30.3	2.21 V	193	47.2	10.7
4	#13650.00	45.3 AV	68.2	-22.9	2.21 V	193	34.6	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.1 PK			1.87 H	167	64.1	47.0
2	*6985.00	98.2 AV			1.87 H	167	51.2	47.0
3	#7125.00	73.2 PK	88.2	-15.0	1.87 H	167	63.7	9.5
4	#7125.00	59.9 AV	68.2	-8.3	1.87 H	167	50.4	9.5
5	7250.00	66.2 PK	74.0	-7.8	1.87 H	167	56.5	9.7
6	7250.00	53.3 AV	54.0	-0.7	1.87 H	167	43.6	9.7
7	#13970.00	58.2 PK	88.2	-30.0	1.82 H	301	46.3	11.9
8	#13970.00	46.1 AV	68.2	-22.1	1.82 H	301	34.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	114.3 PK			1.18 V	212	67.3	47.0
2	*6985.00	102.1 AV			1.18 V	212	55.1	47.0
3	#7125.00	78.9 PK	88.2	-9.3	1.18 V	212	69.4	9.5
4	#7125.00	64.4 AV	68.2	-3.8	1.18 V	212	54.9	9.5
5	7250.00	67.8 PK	74.0	-6.2	1.18 V	212	58.1	9.7
6	7250.00	53.9 AV	54.0	-0.1	1.18 V	212	44.2	9.7
7	#13970.00	59.9 PK	88.2	-28.3	2.21 V	192	48.0	11.9
8	#13970.00	47.7 AV	68.2	-20.5	2.21 V	192	35.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	1.66 H	230	70.5	5.6
2	#5925.00	63.3 AV	68.2	-4.9	1.66 H	230	57.7	5.6
3	*6105.00	106.8 PK			1.66 H	230	62.8	44.0
4	*6105.00	95.7 AV			1.66 H	230	51.7	44.0
5	12210.00	58.6 PK	74.0	-15.4	1.89 H	312	47.8	10.8
6	12210.00	44.7 AV	54.0	-9.3	1.89 H	312	33.9	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.0 PK	88.2	-7.2	1.40 V	191	75.4	5.6
2	#5925.00	67.9 AV	68.2	-0.3	1.40 V	191	62.3	5.6
3	*6105.00	111.2 PK			1.40 V	191	67.2	44.0
4	*6105.00	99.2 AV			1.40 V	191	55.2	44.0
5	12210.00	59.1 PK	74.0	-14.9	2.19 V	193	48.3	10.8
6	12210.00	45.3 AV	54.0	-8.7	2.19 V	193	34.5	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.1 PK			1.68 H	226	66.2	44.9
2	*6265.00	99.0 AV			1.68 H	226	54.1	44.9
3	12530.00	58.0 PK	74.0	-16.0	1.89 H	301	46.5	11.5
4	12530.00	45.5 AV	54.0	-8.5	1.87 H	301	34.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	113.9 PK			1.51 V	196	69.0	44.9
2	*6265.00	102.6 AV			1.51 V	196	57.7	44.9
3	12530.00	58.7 PK	74.0	-15.3	2.21 V	195	47.2	11.5
4	12530.00	46.0 AV	54.0	-8.0	2.21 V	195	34.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.2 PK			1.62 H	222	64.3	45.9
2	*6425.00	98.9 AV			1.62 H	222	53.0	45.9
3	#12850.00	57.5 PK	88.2	-30.7	1.95 H	307	46.3	11.2
4	#12850.00	45.2 AV	68.2	-23.0	1.95 H	307	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	112.8 PK			1.51 V	272	66.9	45.9
2	*6425.00	102.3 AV			1.51 V	272	56.4	45.9
3	#12850.00	58.2 PK	88.2	-30.0	2.13 V	185	47.0	11.2
4	#12850.00	45.9 AV	68.2	-22.3	2.13 V	185	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.6 PK			1.63 H	222	64.1	46.5
2	*6585.00	99.8 AV			1.63 H	222	53.3	46.5
3	#13170.00	57.6 PK	88.2	-30.6	1.82 H	302	46.5	11.1
4	#13170.00	45.1 AV	68.2	-23.1	1.82 H	302	34.0	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	115.4 PK			1.29 V	188	68.9	46.5
2	*6585.00	102.5 AV			1.29 V	188	56.0	46.5
3	#13170.00	58.1 PK	88.2	-30.1	2.25 V	192	47.0	11.1
4	#13170.00	45.7 AV	68.2	-22.5	2.25 V	192	34.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.1 PK			1.30 H	187	64.5	46.6
2	*6745.00	98.8 AV			1.83 H	171	52.2	46.6
3	#13490.00	58.0 PK	88.2	-30.2	1.87 H	305	47.0	11.0
4	#13490.00	45.4 AV	68.2	-22.8	1.87 H	305	34.4	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	114.5 PK			1.30 V	187	67.9	46.6
2	*6745.00	102.3 AV			1.30 V	187	55.7	46.6
3	#13490.00	58.5 PK	88.2	-29.7	2.29 V	193	47.5	11.0
4	#13490.00	46.0 AV	68.2	-22.2	2.29 V	193	35.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.99 H	299	59.5	46.9
2	*6905.00	94.1 AV			1.99 H	299	47.2	46.9
3	#7125.00	65.2 PK	88.2	-23.0	1.99 H	229	55.7	9.5
4	#7125.00	52.2 AV	68.2	-16.0	1.99 H	229	42.7	9.5
5	7250.00	65.1 PK	74.0	-8.9	1.99 H	229	55.4	9.7
6	7250.00	51.0 AV	54.0	-3.0	1.99 H	229	41.3	9.7
7	#13810.00	56.5 PK	88.2	-31.7	1.89 H	311	45.5	11.0
8	#13810.00	44.8 AV	68.2	-23.4	1.89 H	311	33.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.0 PK			1.66 V	259	63.1	46.9
2	*6905.00	97.8 AV			1.66 V	259	50.9	46.9
3	#7125.00	70.0 PK	88.2	-18.2	1.66 V	259	60.5	9.5
4	#7125.00	58.2 AV	68.2	-10.0	1.66 V	259	48.7	9.5
5	7250.00	67.0 PK	74.0	-7.0	1.66 V	259	57.3	9.7
6	7250.00	53.9 AV	54.0	-0.1	1.66 V	259	44.2	9.7
7	#13810.00	58.2 PK	88.2	-30.0	2.21 V	187	47.2	11.0
8	#13810.00	45.5 AV	68.2	-22.7	2.21 V	187	34.5	11.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge_CDD Mode

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

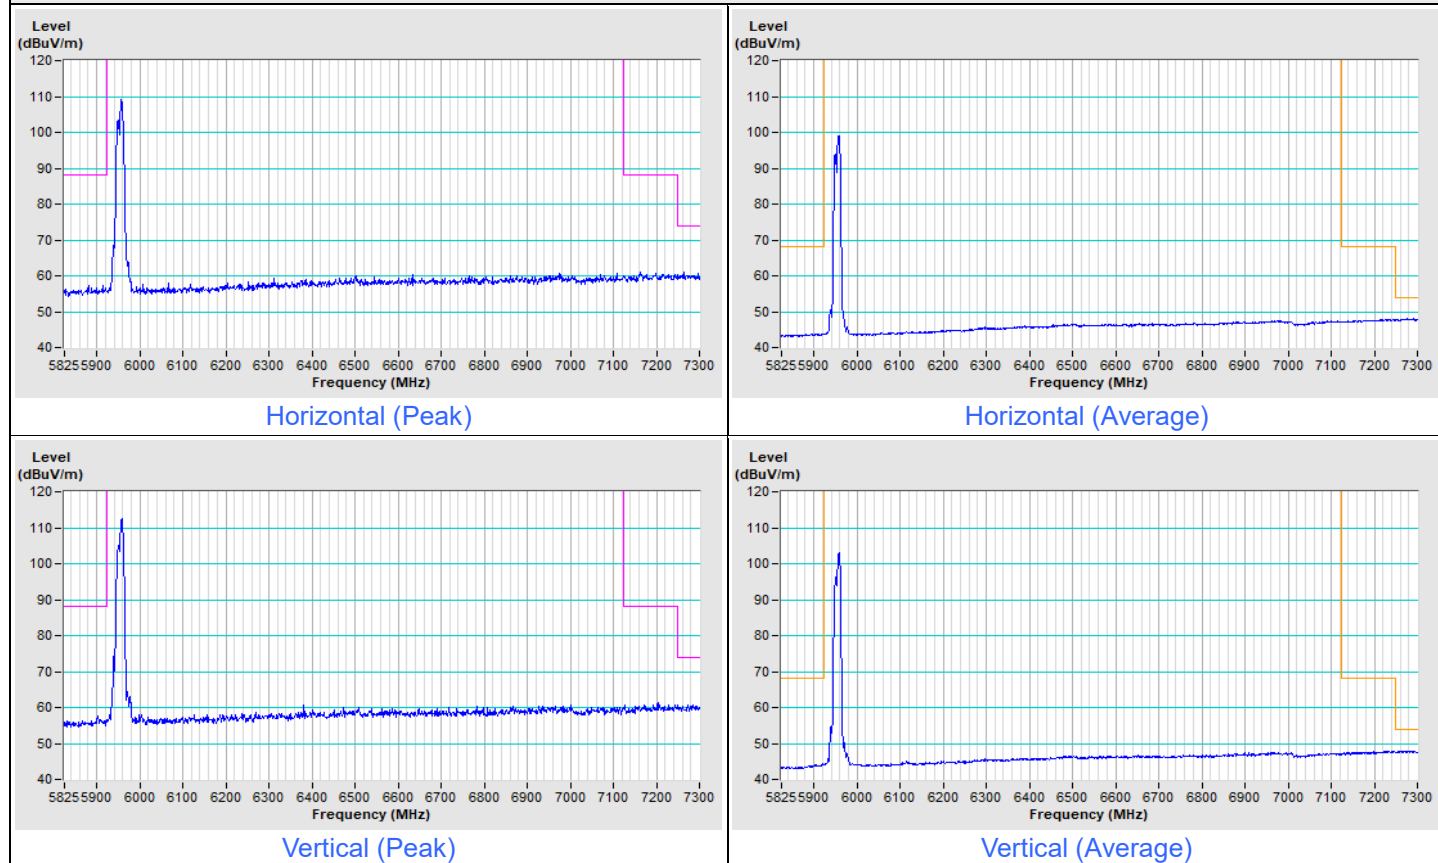


802.11a Channel 233

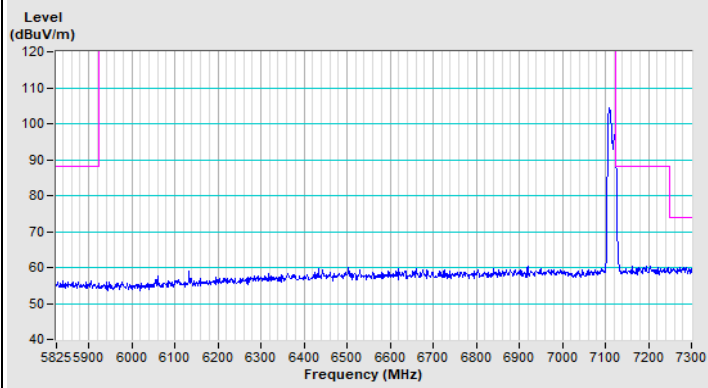


Horizontal (Peak)

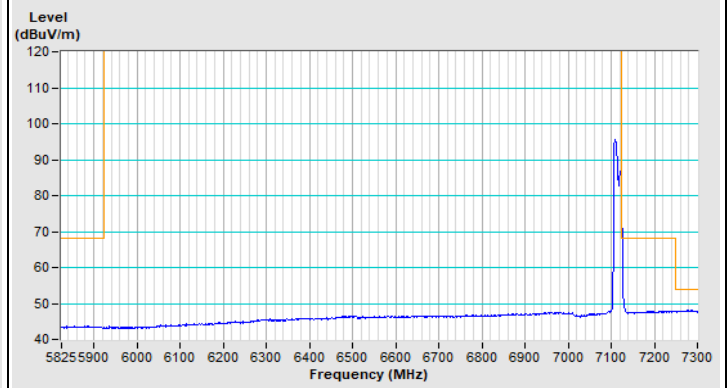

Horizontal (Average)

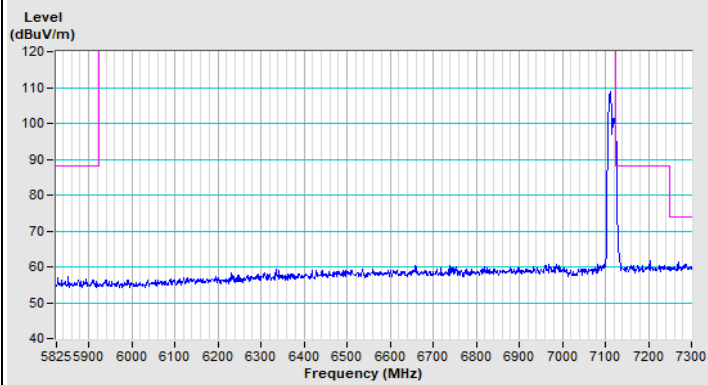


Vertical (Peak)

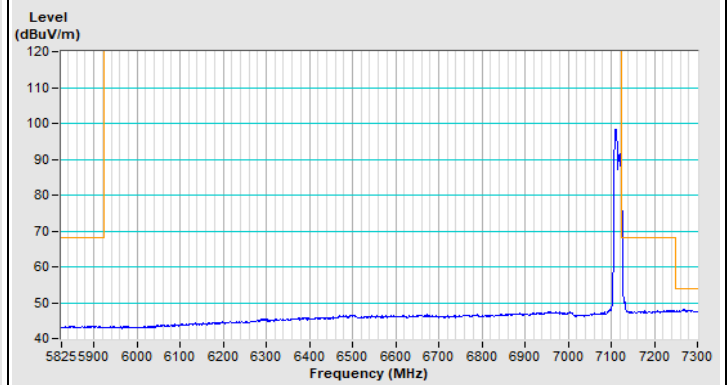


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

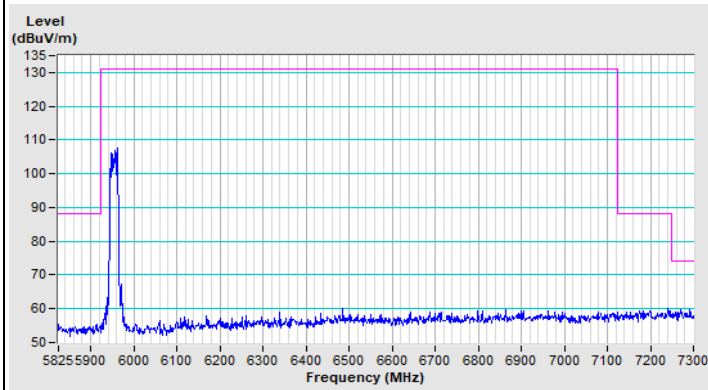


Horizontal (Peak)

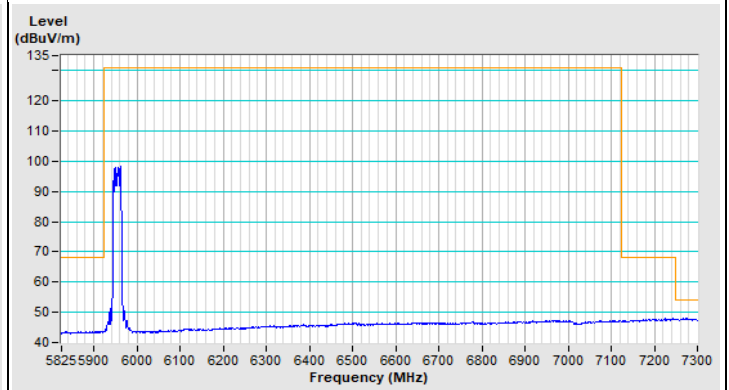

Horizontal (Average)




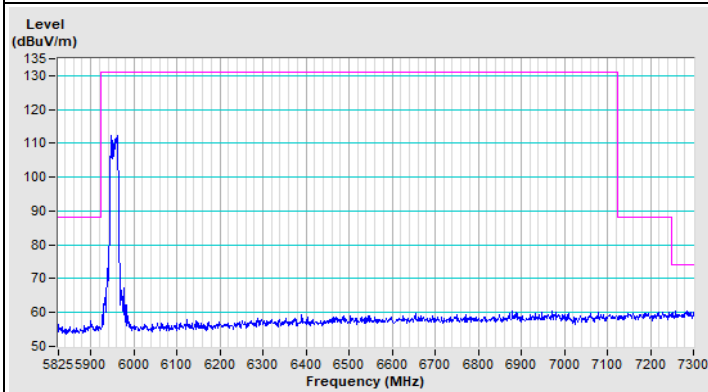


Vertical (Peak)

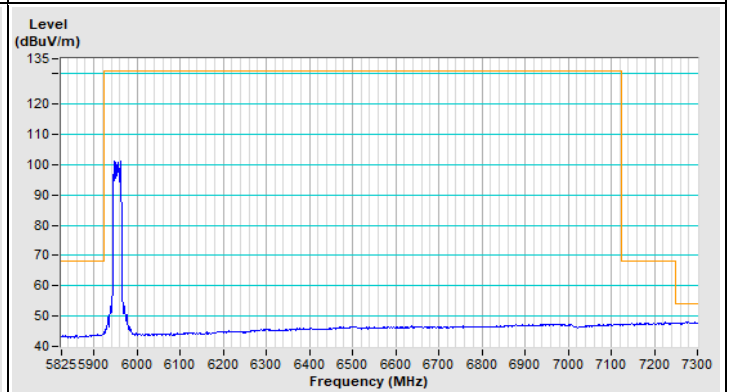


Vertical (Average)

802.11be (EHT20) Channel 233

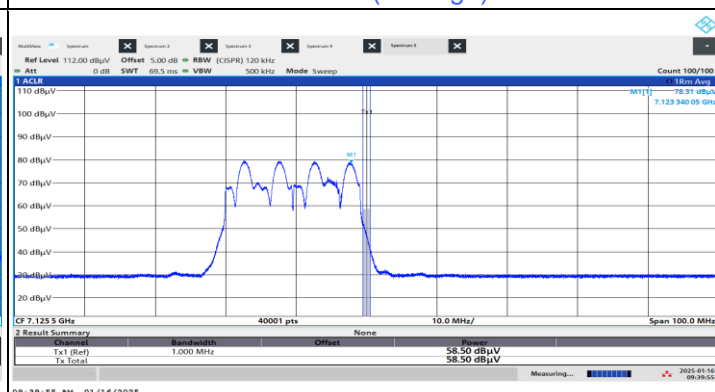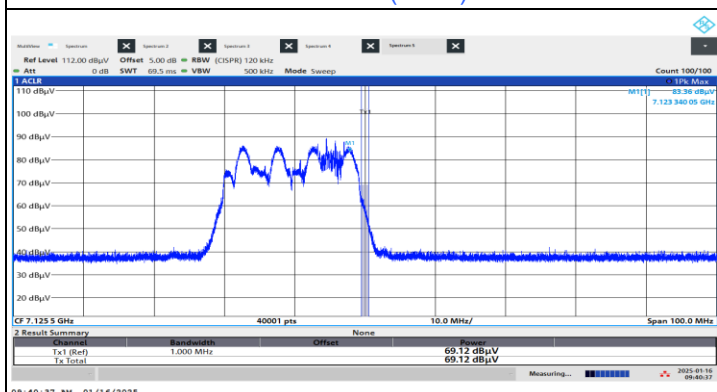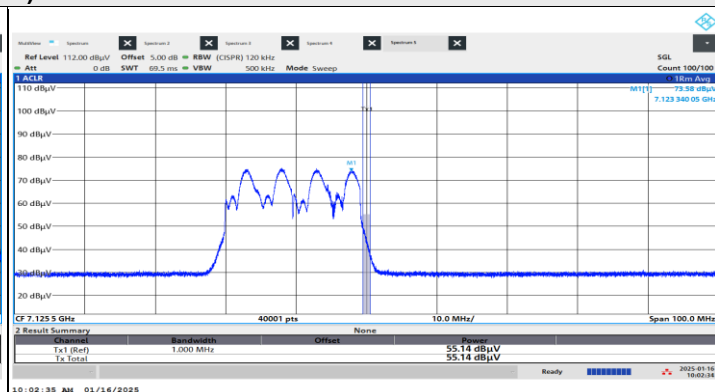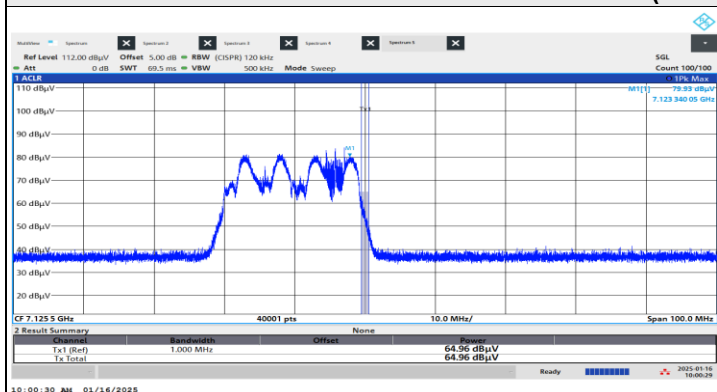


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

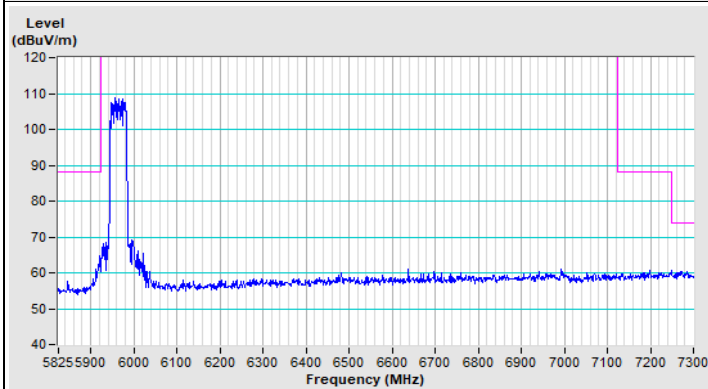


Horizontal (Peak)

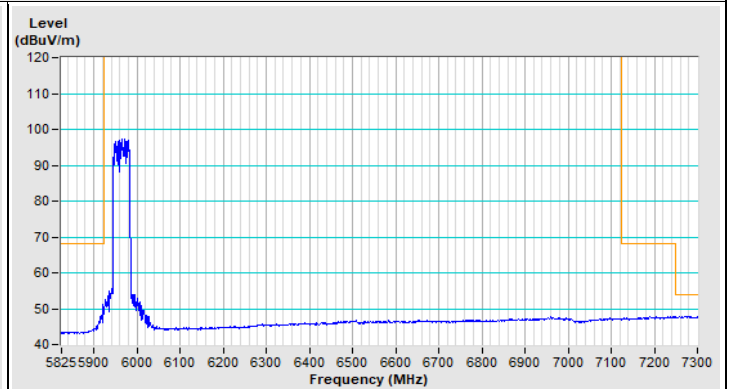

Horizontal (Average)

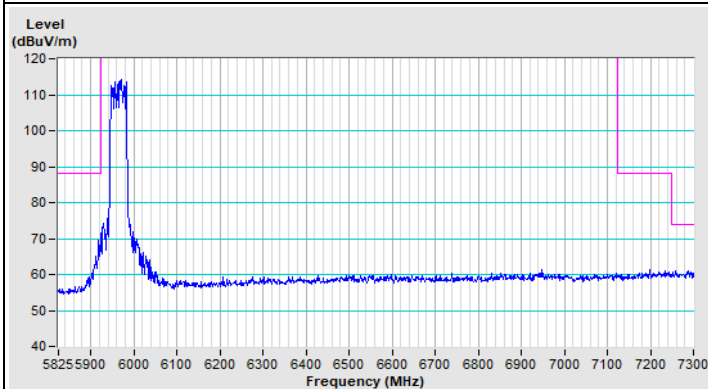


Vertical (Peak)

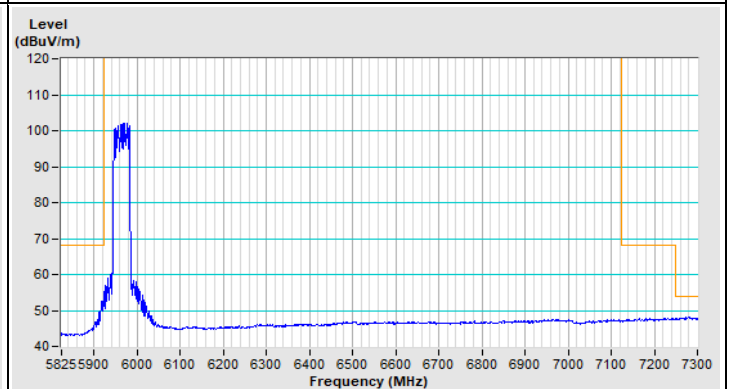


Vertical (Average)


802.11be (EHT40) Channel 227

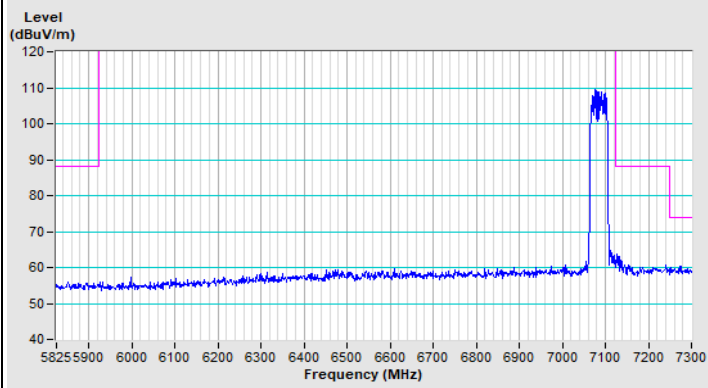


Horizontal (Peak)

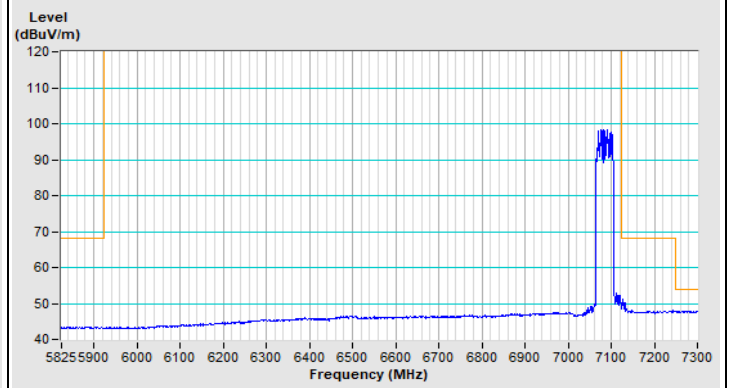

Horizontal (Average)

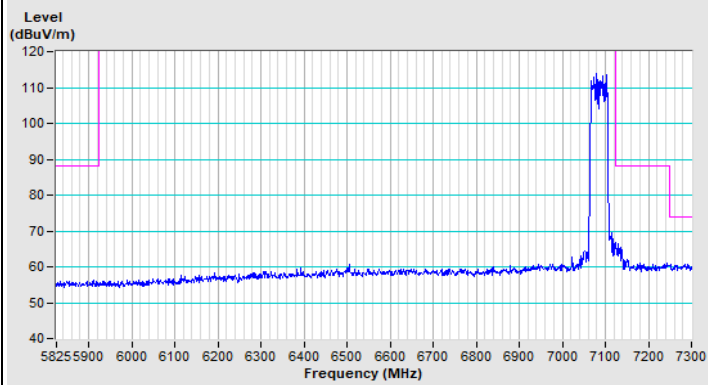


Vertical (Peak)

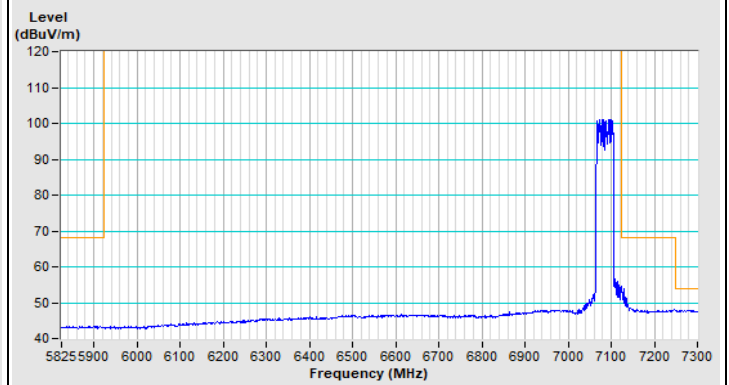


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

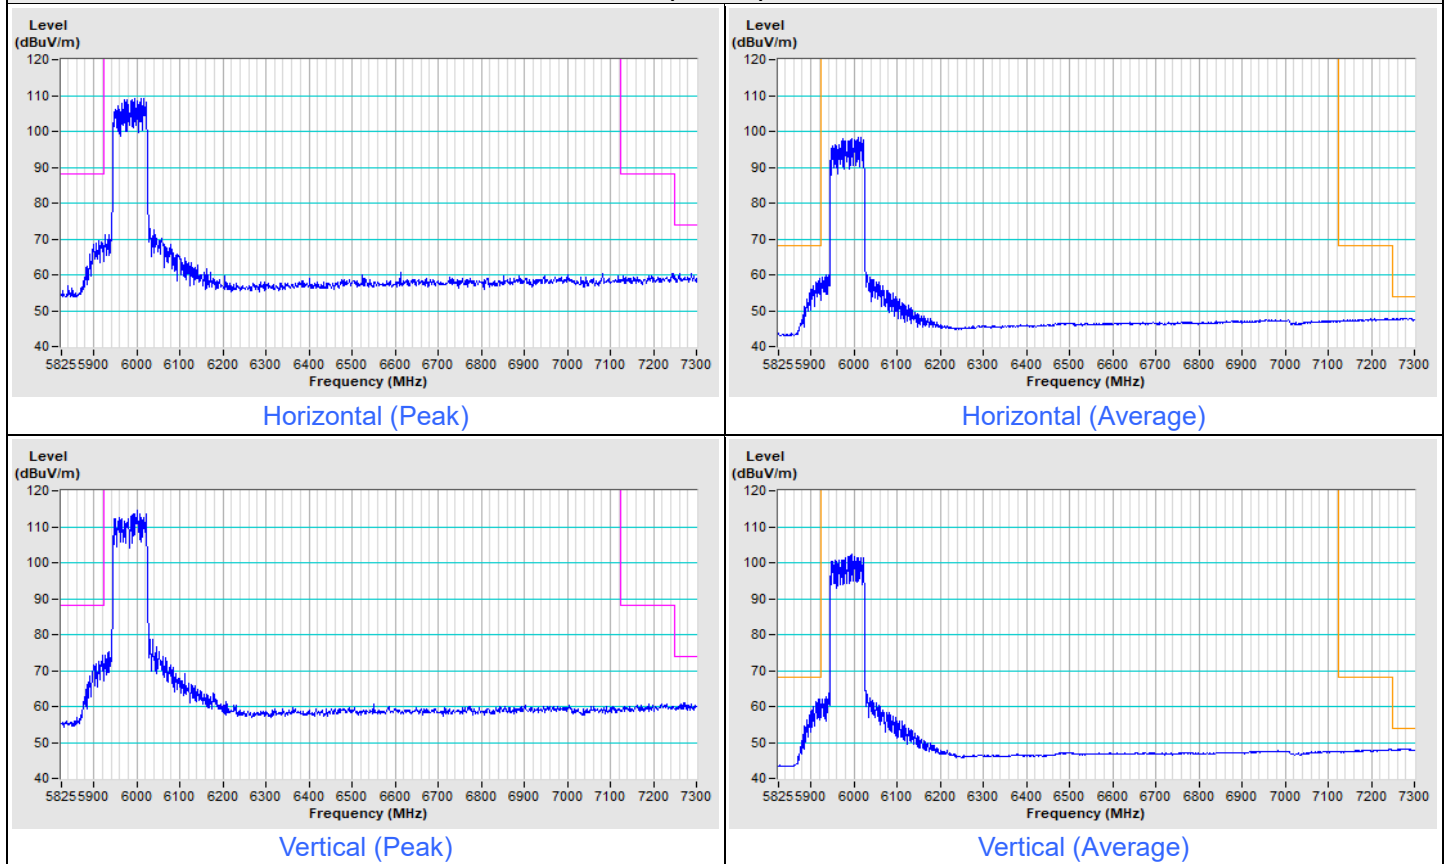


802.11be (EHT80) Channel 215

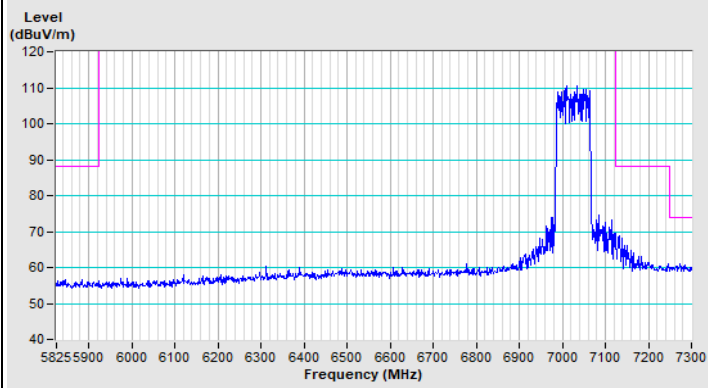


Horizontal (Peak)

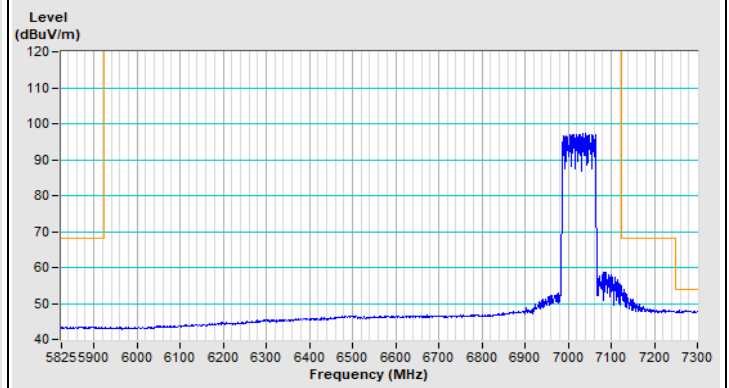

Horizontal (Average)

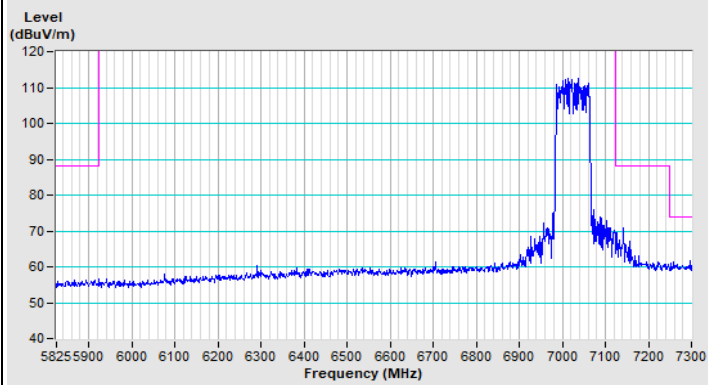


Vertical (Peak)

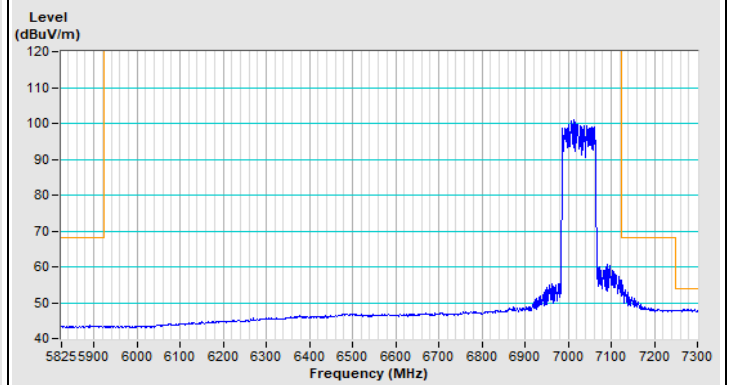


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

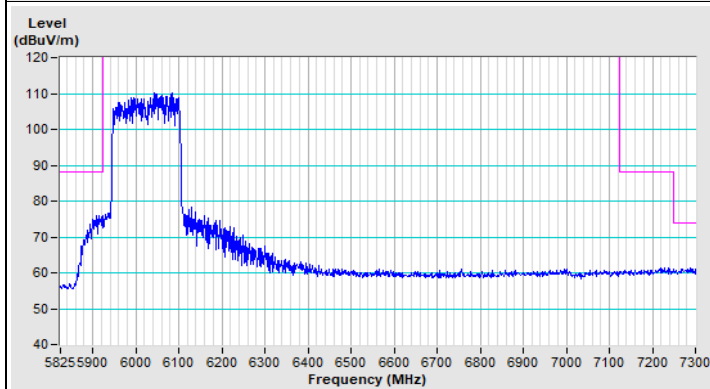


Horizontal (Peak)

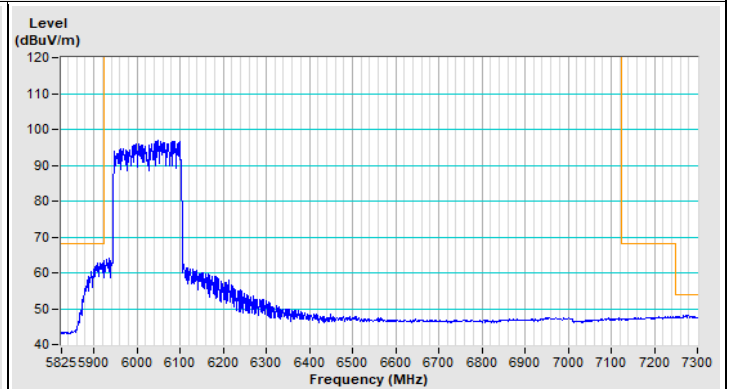

Horizontal (Average)

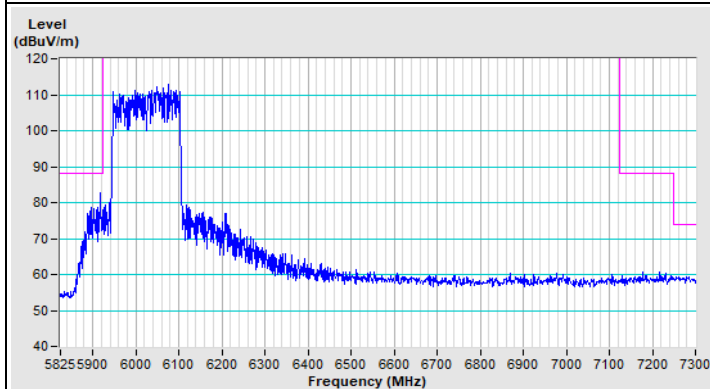


Vertical (Peak)

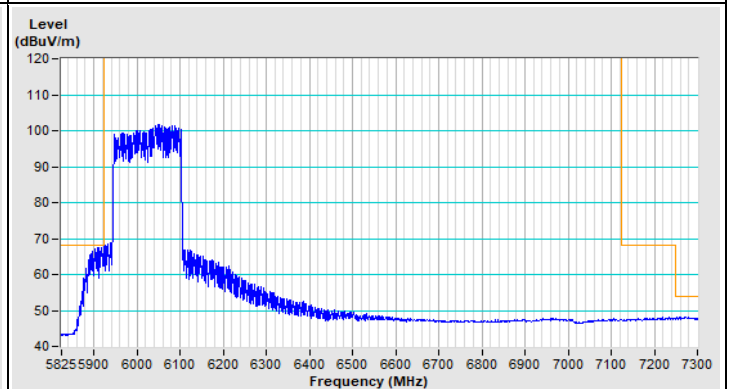


Vertical (Average)


802.11be (EHT160) Channel 207

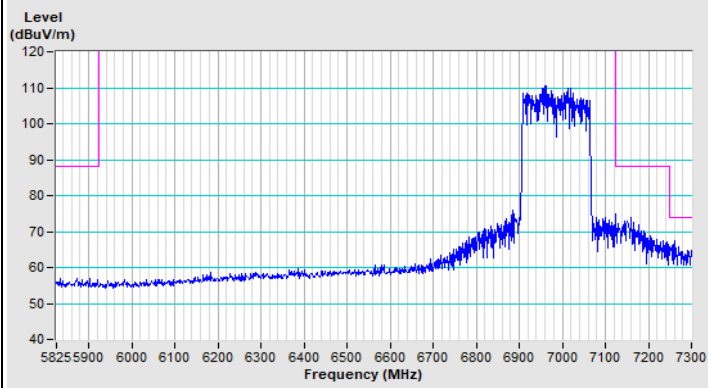


Horizontal (Peak)

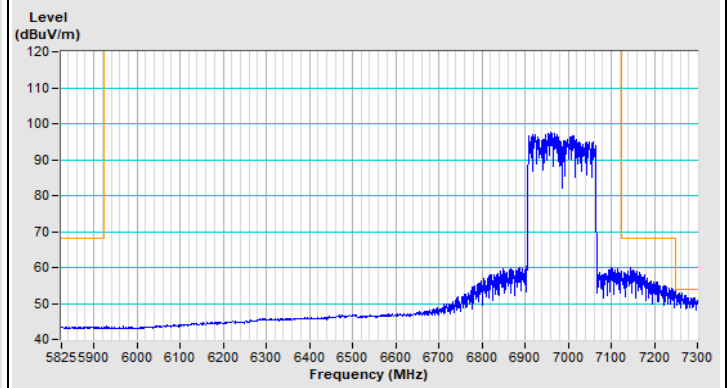

Horizontal (Average)

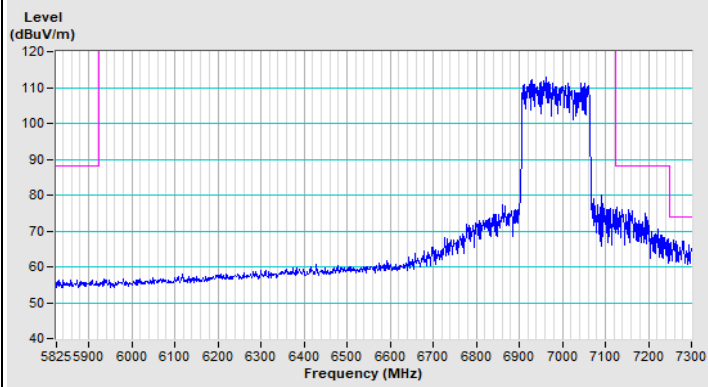


Vertical (Peak)

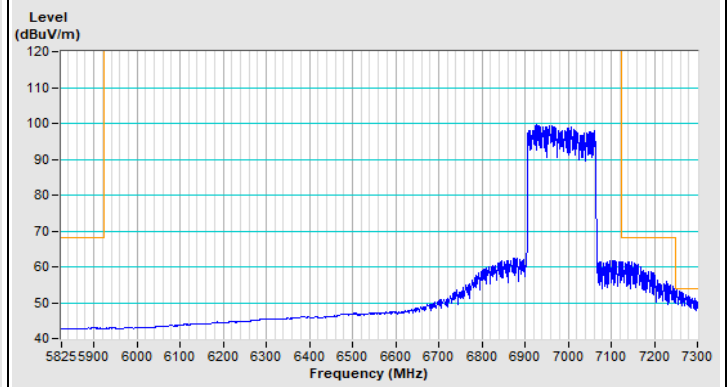


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

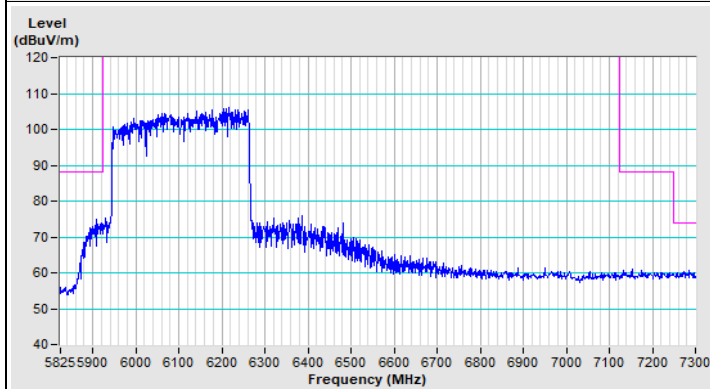


Horizontal (Peak)

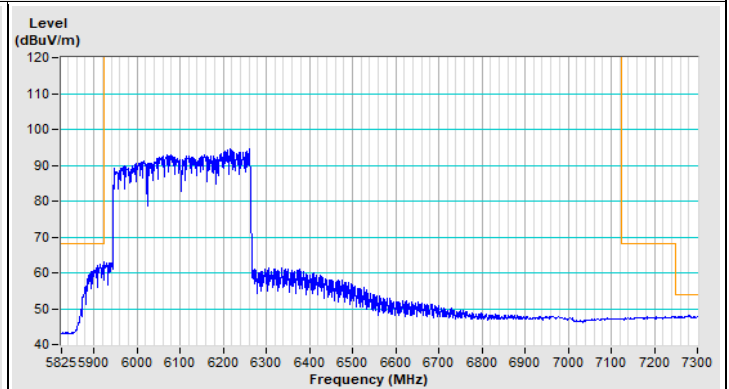

Horizontal (Average)

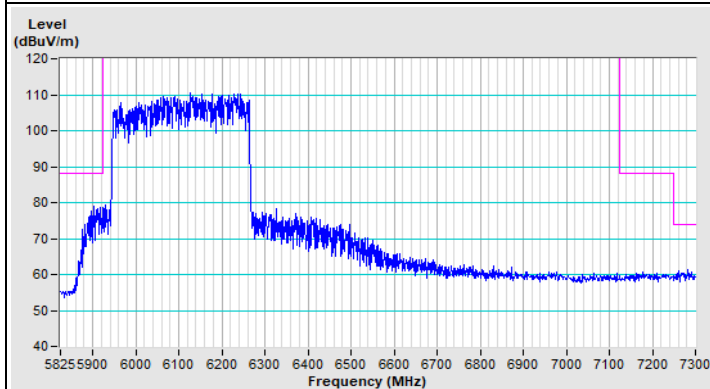


Vertical (Peak)

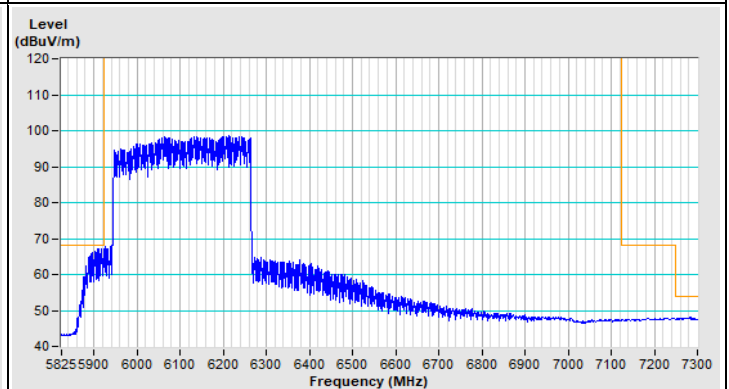


Vertical (Average)


802.11be (EHT320) Channel 191

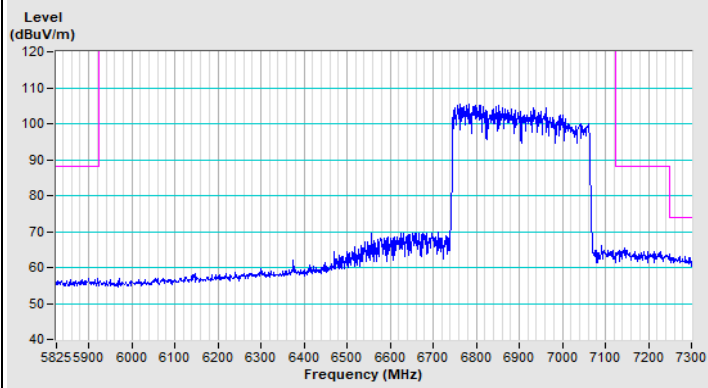


Horizontal (Peak)

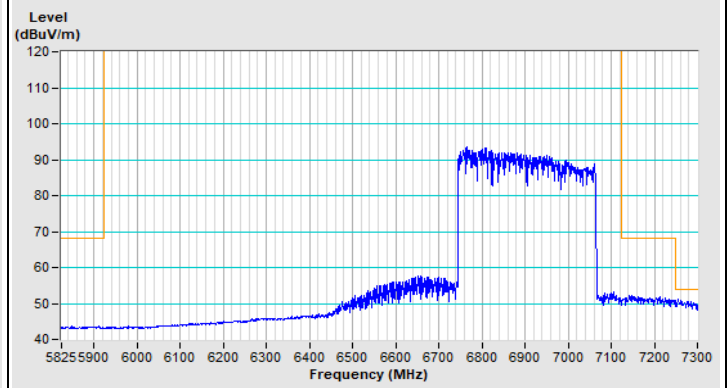

Horizontal (Average)

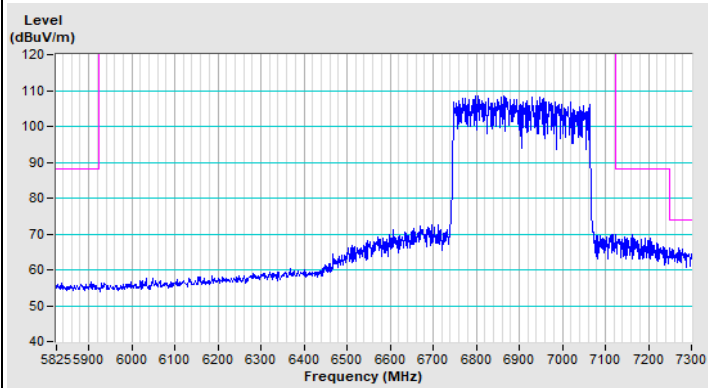

Vertical (Peak)

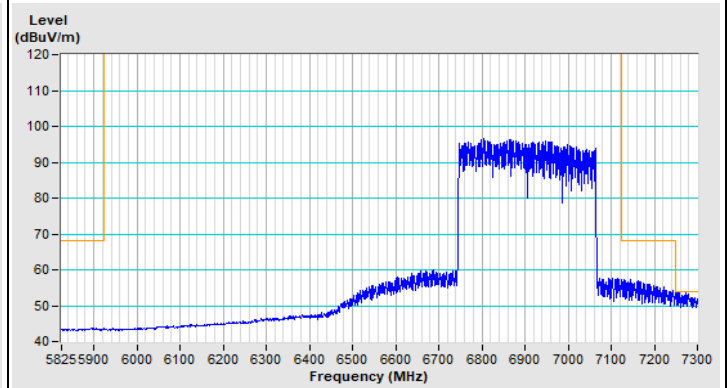

Vertical (Average)

Beamforming Mode

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	1.49 H	102	51.3	5.6
2	#5925.00	43.5 AV	68.2	-24.7	1.49 H	102	37.9	5.6
3	*5955.00	108.7 PK			1.49 H	102	65.5	43.2
4	*5955.00	96.5 AV			1.49 H	102	53.3	43.2
5	11910.00	59.3 PK	74.0	-14.7	1.95 H	311	48.0	11.3
6	11910.00	46.4 AV	54.0	-7.6	1.95 H	311	35.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.6 PK	88.2	-30.6	1.33 V	184	52.0	5.6
2	#5925.00	45.1 AV	68.2	-23.1	1.33 V	184	39.5	5.6
3	*5955.00	113.7 PK			1.33 V	184	70.5	43.2
4	*5955.00	100.7 AV			1.33 V	184	57.5	43.2
5	11910.00	57.8 PK	74.0	-16.2	2.23 V	183	46.5	11.3
6	11910.00	45.9 AV	54.0	-8.1	2.23 V	183	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	107.9 PK			1.49 H	237	63.6	44.3
2	*6175.00	95.5 AV			1.49 H	237	51.2	44.3
3	12350.00	57.2 PK	74.0	-16.8	1.95 H	302	46.1	11.1
4	12350.00	45.1 AV	54.0	-8.9	1.95 H	302	34.0	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.5 PK			1.47 V	265	67.2	44.3
2	*6175.00	100.0 AV			1.47 V	265	55.7	44.3
3	12350.00	58.1 PK	74.0	-15.9	2.21 V	190	47.0	11.1
4	12350.00	45.9 AV	54.0	-8.1	2.21 V	190	34.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			1.65 H	210	66.7	45.8
2	*6415.00	98.3 AV			1.65 H	210	52.5	45.8
3	#12830.00	57.6 PK	88.2	-30.6	1.99 H	317	46.3	11.3
4	#12830.00	45.5 AV	68.2	-22.7	1.99 H	317	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.3 PK			1.37 V	178	68.5	45.8
2	*6415.00	101.1 AV			1.37 V	178	55.3	45.8
3	#12830.00	58.0 PK	88.2	-30.2	2.20 V	196	46.7	11.3
4	#12830.00	45.9 AV	68.2	-22.3	2.20 V	196	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.1 PK			1.60 H	219	66.2	45.9
2	*6435.00	98.0 AV			1.60 H	219	52.1	45.9
3	#12870.00	57.5 PK	88.2	-30.7	1.91 H	305	46.3	11.2
4	#12870.00	45.4 AV	68.2	-22.8	1.91 H	305	34.2	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	114.4 PK			1.30 V	187	68.5	45.9
2	*6435.00	101.4 AV			1.30 V	187	55.5	45.9
3	#12870.00	58.1 PK	88.2	-30.1	2.26 V	181	46.9	11.2
4	#12870.00	46.1 AV	68.2	-22.1	2.26 V	181	34.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.4 PK			1.66 H	223	64.2	46.2
2	*6475.00	98.3 AV			1.66 H	223	52.1	46.2
3	#12950.00	57.2 PK	88.2	-31.0	1.96 H	310	46.1	11.1
4	#12950.00	45.2 AV	68.2	-23.0	1.96 H	310	34.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.7 PK			1.29 V	178	66.5	46.2
2	*6475.00	100.2 AV			1.29 V	178	54.0	46.2
3	#12950.00	57.9 PK	88.2	-30.3	2.32 V	182	46.8	11.1
4	#12950.00	46.0 AV	68.2	-22.2	2.32 V	182	34.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.6 PK			1.62 H	222	64.2	46.4
2	*6515.00	98.3 AV			1.62 H	222	51.9	46.4
3	#13030.00	57.3 PK	88.2	-30.9	1.92 H	320	46.2	11.1
4	#13030.00	45.1 AV	68.2	-23.1	1.92 H	320	34.0	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	113.6 PK			1.29 V	179	67.2	46.4
2	*6515.00	100.9 AV			1.29 V	179	54.5	46.4
3	#13030.00	57.8 PK	88.2	-30.4	2.22 V	192	46.7	11.1
4	#13030.00	46.0 AV	68.2	-22.2	2.22 V	180	34.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.9 PK			1.64 H	168	64.5	46.4
2	*6535.00	98.0 AV			1.64 H	168	51.6	46.4
3	#13070.00	57.7 PK	88.2	-30.5	1.88 H	310	46.4	11.3
4	#13070.00	45.5 AV	68.2	-22.7	1.88 H	310	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.0 PK			1.44 V	2	66.6	46.4
2	*6535.00	100.7 AV			1.44 V	2	54.3	46.4
3	#13070.00	58.1 PK	88.2	-30.1	2.19 V	202	46.8	11.3
4	#13070.00	46.1 AV	68.2	-22.1	2.19 V	202	34.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.7 PK			1.70 H	167	62.2	46.5
2	*6695.00	96.6 AV			1.70 H	167	50.1	46.5
3	13390.00	57.4 PK	74.0	-16.6	1.99 H	302	46.2	11.2
4	13390.00	45.5 AV	54.0	-8.5	1.99 H	302	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.9 PK			1.43 V	288	65.4	46.5
2	*6695.00	99.2 AV			1.43 V	288	52.7	46.5
3	13390.00	58.3 PK	74.0	-15.7	2.29 V	186	47.1	11.2
4	13390.00	46.2 AV	54.0	-7.8	2.29 V	186	35.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.3 PK			1.77 H	162	64.4	46.9
2	*6855.00	98.8 AV			1.77 H	162	51.9	46.9
3	#13710.00	57.4 PK	88.2	-30.8	1.99 H	318	46.5	10.9
4	#13710.00	45.5 AV	68.2	-22.7	1.99 H	318	34.6	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.9 PK			1.10 V	134	67.0	46.9
2	*6855.00	100.4 AV			1.10 V	134	53.5	46.9
3	#13710.00	58.0 PK	88.2	-30.2	2.22 V	185	47.1	10.9
4	#13710.00	46.1 AV	68.2	-22.1	2.22 V	185	35.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.9 PK			1.56 H	208	65.0	46.9
2	*6875.00	99.0 AV			1.56 H	208	52.1	46.9
3	#13750.00	57.5 PK	88.2	-30.7	1.93 H	315	46.6	10.9
4	#13750.00	45.4 AV	68.2	-22.8	1.93 H	315	34.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.6 PK			1.10 V	284	66.7	46.9
2	*6875.00	101.0 AV			1.10 V	284	54.1	46.9
3	#13750.00	57.8 PK	88.2	-30.4	2.22 V	183	46.9	10.9
4	#13750.00	46.1 AV	68.2	-22.1	2.22 V	183	35.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.9 PK			1.53 H	170	62.9	47.0
2	*6995.00	98.0 AV			1.53 H	170	51.0	47.0
3	#13990.00	58.5 PK	88.2	-29.7	1.88 H	316	46.6	11.9
4	#13990.00	46.6 AV	68.2	-21.6	1.88 H	316	34.7	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.4 PK			1.29 V	196	65.4	47.0
2	*6995.00	99.5 AV			1.29 V	196	52.5	47.0
3	#13990.00	59.0 PK	88.2	-29.2	2.26 V	187	47.1	11.9
4	#13990.00	47.5 AV	68.2	-20.7	2.26 V	187	35.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.6 PK			1.55 H	162	64.0	47.6
2	*7095.00	98.8 AV			1.55 H	162	51.2	47.6
3	#14190.00	58.2 PK	88.2	-30.0	1.90 H	315	46.7	11.5
4	#14190.00	46.2 AV	68.2	-22.0	1.90 H	315	34.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	114.5 PK			1.32 V	199	66.9	47.6
2	*7095.00	101.6 AV			1.32 V	199	54.0	47.6
3	#14190.00	58.7 PK	88.2	-29.5	2.32 V	185	47.2	11.5
4	#14190.00	46.7 AV	68.2	-21.5	2.32 V	185	35.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.9 PK			1.59 H	183	57.3	47.6
2	*7115.00	92.1 AV			1.59 H	183	44.5	47.6
3	#7125.00	75.4 PK	88.2	-12.8	1.59 H	173	65.9	9.5
4	#7125.00	64.5 AV	68.2	-3.7	1.59 H	173	55.0	9.5
5	#14230.00	58.9 PK	88.2	-29.3	1.79 H	322	47.5	11.4
6	#14230.00	47.4 AV	68.2	-20.8	1.79 H	322	36.0	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.7 PK			1.52 V	136	60.1	47.6
2	*7115.00	95.2 AV			1.52 V	136	47.6	47.6
3	#7125.00	77.0 PK	88.2	-11.2	1.52 V	136	67.5	9.5
4	#7125.00	65.1 AV	68.2	-3.1	1.52 V	136	55.6	9.5
5	#14230.00	59.5 PK	88.2	-28.7	2.21 V	190	48.1	11.4
6	#14230.00	47.9 AV	68.2	-20.3	2.21 V	190	36.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.1 PK	88.2	-31.1	1.68 H	233	51.5	5.6
2	#5925.00	43.8 AV	68.2	-24.4	1.68 H	233	38.2	5.6
3	*5965.00	109.2 PK			1.68 H	233	66.0	43.2
4	*5965.00	96.7 AV			1.68 H	233	53.5	43.2
5	11930.00	57.7 PK	74.0	-16.3	1.82 H	309	46.5	11.2
6	11930.00	45.6 AV	54.0	-8.4	1.82 H	305	34.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.4 PK	88.2	-24.8	1.50 V	227	57.8	5.6
2	#5925.00	48.1 AV	68.2	-20.1	1.50 V	227	42.5	5.6
3	*5965.00	111.6 PK			1.50 V	227	68.4	43.2
4	*5965.00	99.3 AV			1.50 V	227	56.1	43.2
5	11930.00	58.3 PK	74.0	-15.7	2.22 V	193	47.1	11.2
6	11930.00	46.4 AV	54.0	-7.6	2.22 V	193	35.2	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	108.6 PK			1.79 H	238	64.3	44.3
2	*6165.00	96.5 AV			1.79 H	238	52.2	44.3
3	12330.00	57.2 PK	74.0	-16.8	1.85 H	292	46.2	11.0
4	12330.00	44.8 AV	54.0	-9.2	1.85 H	292	33.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	113.1 PK			1.50 V	261	68.8	44.3
2	*6165.00	100.8 AV			1.50 V	261	56.5	44.3
3	12330.00	57.8 PK	74.0	-16.2	2.15 V	193	46.8	11.0
4	12330.00	45.4 AV	54.0	-8.6	2.15 V	193	34.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.0 PK			1.55 H	215	64.3	45.7
2	*6405.00	98.6 AV			1.55 H	215	52.9	45.7
3	#12810.00	57.4 PK	88.2	-30.8	1.99 H	331	46.2	11.2
4	#12810.00	45.3 AV	68.2	-22.9	1.99 H	331	34.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.8 PK			1.34 V	228	67.1	45.7
2	*6405.00	101.4 AV			1.34 V	228	55.7	45.7
3	#12810.00	58.1 PK	88.2	-30.1	2.09 V	183	46.9	11.2
4	#12810.00	45.9 AV	68.2	-22.3	2.09 V	183	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.4 PK			1.69 H	209	65.5	45.9
2	*6445.00	98.4 AV			1.69 H	209	52.5	45.9
3	#12890.00	57.6 PK	88.2	-30.6	1.82 H	291	46.3	11.3
4	#12890.00	45.5 AV	68.2	-22.7	1.82 H	291	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	114.4 PK			1.26 V	169	68.5	45.9
2	*6445.00	101.4 AV			1.26 V	169	55.5	45.9
3	#12890.00	60.2 PK	88.2	-28.0	2.23 V	171	48.9	11.3
4	#12890.00	46.1 AV	68.2	-22.1	2.23 V	171	34.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.7 PK			1.66 H	218	65.5	46.2
2	*6485.00	98.4 AV			1.66 H	218	52.2	46.2
3	#12970.00	57.3 PK	88.2	-30.9	1.92 H	315	46.3	11.0
4	#12970.00	45.3 AV	68.2	-22.9	1.92 H	315	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.8 PK			1.28 V	181	67.6	46.2
2	*6485.00	100.7 AV			1.28 V	181	54.5	46.2
3	#12970.00	57.7 PK	88.2	-30.5	2.29 V	193	46.7	11.0
4	#12970.00	45.8 AV	68.2	-22.4	2.29 V	193	34.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.5 PK			1.61 H	215	66.1	46.4
2	*6525.00	99.4 AV			1.61 H	215	53.0	46.4
3	#13050.00	57.4 PK	88.2	-30.8	1.95 H	310	46.2	11.2
4	#13050.00	46.6 AV	68.2	-21.6	1.95 H	310	35.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	113.8 PK			1.38 V	171	67.4	46.4
2	*6525.00	102.4 AV			1.38 V	171	56.0	46.4
3	#13050.00	59.9 PK	88.2	-28.3	2.22 V	208	48.7	11.2
4	#13050.00	47.4 AV	68.2	-20.8	2.22 V	208	36.2	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.5 PK			1.60 H	211	65.1	46.4
2	*6565.00	100.4 AV			1.60 H	211	54.0	46.4
3	#13130.00	57.8 PK	88.2	-30.4	1.90 H	312	46.5	11.3
4	#13130.00	47.3 AV	68.2	-20.9	1.90 H	312	36.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.9 PK			1.29 V	183	67.5	46.4
2	*6565.00	102.7 AV			1.29 V	183	56.3	46.4
3	#13130.00	58.2 PK	88.2	-30.0	2.27 V	198	46.9	11.3
4	#13130.00	48.1 AV	68.2	-20.1	2.27 V	198	36.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	111.4 PK			1.75 H	166	64.9	46.5
2	*6725.00	98.6 AV			1.75 H	166	52.1	46.5
3	#13450.00	57.6 PK	88.2	-30.6	2.02 H	312	46.5	11.1
4	#13450.00	47.4 AV	68.2	-20.8	2.02 H	312	36.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	114.3 PK			1.28 V	189	67.8	46.5
2	*6725.00	101.8 AV			1.28 V	189	55.3	46.5
3	#13450.00	57.8 PK	88.2	-30.4	2.15 V	190	46.7	11.1
4	#13450.00	48.1 AV	68.2	-20.1	2.15 V	190	37.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.7 PK			1.81 H	169	65.8	46.9
2	*6845.00	99.4 AV			1.81 H	169	52.5	46.9
3	#13690.00	57.2 PK	88.2	-31.0	2.09 H	307	46.3	10.9
4	#13690.00	47.3 AV	68.2	-20.9	2.09 H	307	36.4	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.8 PK			1.30 V	192	67.9	46.9
2	*6845.00	102.1 AV			1.30 V	192	55.2	46.9
3	#13690.00	58.1 PK	88.2	-30.1	2.25 V	213	47.2	10.9
4	#13690.00	47.6 AV	68.2	-20.6	2.25 V	213	36.7	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.2 PK			1.69 H	180	65.3	46.9
2	*6885.00	100.7 AV			1.69 H	180	53.8	46.9
3	#13770.00	57.2 PK	88.2	-31.0	1.90 H	301	46.3	10.9
4	#13770.00	47.3 AV	68.2	-20.9	1.90 H	301	36.4	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	115.1 PK			1.30 V	198	68.2	46.9
2	*6885.00	103.1 AV			1.30 V	198	56.2	46.9
3	#13770.00	57.9 PK	88.2	-30.3	2.28 V	197	47.0	10.9
4	#13770.00	48.0 AV	68.2	-20.2	2.28 V	197	37.1	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.4 PK			1.55 H	217	65.3	47.1
2	*7005.00	101.0 AV			1.55 H	217	53.9	47.1
3	#14010.00	58.3 PK	88.2	-29.9	1.95 H	315	46.5	11.8
4	#14010.00	48.2 AV	68.2	-20.0	1.95 H	315	36.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	114.6 PK			1.35 V	207	67.5	47.1
2	*7005.00	103.1 AV			1.35 V	207	56.0	47.1
3	#14010.00	59.0 PK	88.2	-29.2	2.12 V	201	47.2	11.8
4	#14010.00	48.9 AV	68.2	-19.3	2.12 V	201	37.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.3 PK			1.51 H	258	63.8	47.5
2	*7085.00	97.3 AV			1.51 H	258	49.8	47.5
3	#7125.00	63.5 PK	88.2	-24.7	1.51 H	258	54.0	9.5
4	#7125.00	47.5 AV	68.2	-20.7	1.51 H	258	38.0	9.5
5	#14170.00	58.6 PK	88.2	-29.6	1.99 H	315	47.2	11.4
6	#14170.00	45.8 AV	68.2	-22.4	1.99 H	315	34.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	112.0 PK			1.52 V	136	64.5	47.5
2	*7085.00	99.7 AV			1.52 V	136	52.2	47.5
3	#7125.00	64.5 PK	88.2	-23.7	1.52 V	136	55.0	9.5
4	#7125.00	48.1 AV	68.2	-20.1	1.52 V	136	38.6	9.5
5	#14170.00	59.5 PK	88.2	-28.7	2.22 V	195	48.1	11.4
6	#14170.00	47.9 AV	68.2	-20.3	2.22 V	195	36.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.3 PK	88.2	-27.9	1.51 H	278	54.7	5.6
2	#5925.00	46.0 AV	68.2	-22.2	1.51 H	278	40.4	5.6
3	*5985.00	108.3 PK			1.51 H	278	65.0	43.3
4	*5985.00	95.8 AV			1.51 H	278	52.5	43.3
5	11970.00	57.5 PK	74.0	-16.5	1.88 H	310	46.2	11.3
6	11970.00	45.3 AV	54.0	-8.7	1.88 H	310	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	1.51 V	258	63.4	5.6
2	#5925.00	55.9 AV	68.2	-12.3	1.51 V	258	50.3	5.6
3	*5985.00	113.5 PK			1.51 V	258	70.2	43.3
4	*5985.00	100.6 AV			1.51 V	258	57.3	43.3
5	11970.00	58.1 PK	74.0	-15.9	2.20 V	196	46.8	11.3
6	11970.00	45.9 AV	54.0	-8.1	2.20 V	196	34.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	111.0 PK			1.55 H	218	66.8	44.2
2	*6145.00	98.3 AV			1.55 H	218	54.1	44.2
3	12290.00	57.3 PK	74.0	-16.7	1.92 H	302	46.2	11.1
4	12290.00	47.3 AV	54.0	-6.7	1.92 H	302	36.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	112.2 PK			1.41 V	52	68.0	44.2
2	*6145.00	100.4 AV			1.41 V	52	56.2	44.2
3	12290.00	57.7 PK	74.0	-16.3	2.11 V	193	46.6	11.1
4	12290.00	47.8 AV	54.0	-6.2	2.11 V	193	36.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.8 PK			1.66 H	205	65.1	45.7
2	*6385.00	99.6 AV			1.66 H	205	53.9	45.7
3	#12770.00	57.3 PK	88.2	-30.9	1.92 H	305	46.1	11.2
4	#12770.00	47.3 AV	68.2	-20.9	1.92 H	305	36.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.5 PK			1.41 V	174	67.8	45.7
2	*6385.00	101.9 AV			1.41 V	174	56.2	45.7
3	#12770.00	57.7 PK	88.2	-30.5	2.38 V	190	46.5	11.2
4	#12770.00	47.8 AV	68.2	-20.4	2.38 V	190	36.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.2 PK			1.66 H	234	64.1	46.1
2	*6465.00	99.3 AV			1.66 H	234	53.2	46.1
3	#12930.00	57.3 PK	88.2	-30.9	1.82 H	326	46.2	11.1
4	#12930.00	47.2 AV	68.2	-21.0	1.82 H	326	36.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.8 PK			1.44 V	189	66.7	46.1
2	*6465.00	101.6 AV			1.44 V	189	55.5	46.1
3	#12930.00	57.9 PK	88.2	-30.3	2.26 V	181	46.8	11.1
4	#12930.00	47.8 AV	68.2	-20.4	2.26 V	181	36.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.3 PK			1.52 H	233	64.9	46.4
2	*6545.00	99.0 AV			1.52 H	233	52.6	46.4
3	#13090.00	57.9 PK	88.2	-30.3	1.98 H	304	46.5	11.4
4	#13090.00	47.7 AV	68.2	-20.5	1.98 H	304	36.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.4 PK			1.32 V	169	67.0	46.4
2	*6545.00	101.7 AV			1.32 V	169	55.3	46.4
3	#13090.00	58.4 PK	88.2	-29.8	2.22 V	203	47.0	11.4
4	#13090.00	48.1 AV	68.2	-20.1	2.22 V	203	36.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.6 PK			1.66 H	183	66.1	46.5
2	*6705.00	99.1 AV			1.66 H	183	52.6	46.5
3	#13410.00	57.6 PK	88.2	-30.6	1.95 H	332	46.4	11.2
4	#13410.00	47.5 AV	68.2	-20.7	1.95 H	332	36.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.7 PK			1.44 V	198	68.2	46.5
2	*6705.00	102.5 AV			1.44 V	198	56.0	46.5
3	#13410.00	58.1 PK	88.2	-30.1	2.19 V	183	46.9	11.2
4	#13410.00	48.2 AV	68.2	-20.0	2.19 V	183	37.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.6 PK			1.70 H	166	63.7	46.9
2	*6865.00	99.2 AV			1.70 H	166	52.3	46.9
3	#13730.00	57.1 PK	88.2	-31.1	2.05 H	318	46.2	10.9
4	#13730.00	47.1 AV	68.2	-21.1	2.05 H	318	36.2	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.9 PK			1.47 V	213	67.0	46.9
2	*6865.00	103.1 AV			1.47 V	213	56.2	46.9
3	#13730.00	57.6 PK	88.2	-30.6	2.23 V	195	46.7	10.9
4	#13730.00	47.5 AV	68.2	-20.7	2.23 V	195	36.6	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	113.3 PK			1.71 H	158	66.2	47.1
2	*6945.00	100.2 AV			1.71 H	158	53.1	47.1
3	#13890.00	58.2 PK	88.2	-30.0	1.93 H	314	46.5	11.7
4	#13890.00	48.1 AV	68.2	-20.1	1.93 H	314	36.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	115.4 PK			1.45 V	199	68.3	47.1
2	*6945.00	102.6 AV			1.45 V	199	55.5	47.1
3	#13890.00	58.7 PK	88.2	-29.5	2.22 V	198	47.0	11.7
4	#13890.00	48.6 AV	68.2	-19.6	2.22 V	198	36.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.4 PK			1.56 H	168	62.3	47.1
2	*7025.00	98.7 AV			1.56 H	168	51.6	47.1
3	#7125.00	61.0 PK	88.2	-27.2	1.56 H	168	51.5	9.5
4	#7125.00	48.1 AV	68.2	-20.1	1.56 H	168	38.6	9.5
5	#14050.00	58.5 PK	88.2	-29.7	1.92 H	311	46.9	11.6
6	#14050.00	46.6 AV	68.2	-21.6	1.92 H	311	35.0	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	113.7 PK			1.31 V	101	66.6	47.1
2	*7025.00	100.8 AV			1.31 V	101	53.7	47.1
3	#7125.00	62.5 PK	88.2	-25.7	1.31 V	101	53.0	9.5
4	#7125.00	48.5 AV	68.2	-19.7	1.31 V	101	39.0	9.5
5	#14050.00	58.8 PK	88.2	-29.4	2.18 V	189	47.2	11.6
6	#14050.00	47.2 AV	68.2	-21.0	2.18 V	189	35.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.0 PK	88.2	-23.2	1.56 H	191	59.4	5.6
2	#5925.00	48.5 AV	68.2	-19.7	1.56 H	191	42.9	5.6
3	*6025.00	106.4 PK			1.56 H	191	62.9	43.5
4	*6025.00	94.1 AV			1.56 H	191	50.6	43.5
5	12050.00	57.9 PK	74.0	-16.1	1.94 H	44	46.8	11.1
6	12050.00	46.6 AV	54.0	-7.4	1.94 H	44	35.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.1 PK	88.2	-21.1	1.50 V	258	61.5	5.6
2	#5925.00	55.4 AV	68.2	-12.8	1.50 V	258	49.8	5.6
3	*6025.00	110.4 PK			1.50 V	258	66.9	43.5
4	*6025.00	97.6 AV			1.50 V	258	54.1	43.5
5	12050.00	58.4 PK	74.0	-15.6	1.45 V	111	47.3	11.1
6	12050.00	47.0 AV	54.0	-7.0	1.45 V	111	35.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.9 PK			1.57 H	191	62.5	44.4
2	*6185.00	94.5 AV			1.57 H	191	50.1	44.4
3	12370.00	57.6 PK	74.0	-16.4	1.57 H	188	46.5	11.1
4	12370.00	46.5 AV	54.0	-7.5	1.57 H	188	35.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.6 PK			1.51 V	258	66.2	44.4
2	*6185.00	97.7 AV			1.51 V	258	53.3	44.4
3	12370.00	57.8 PK	74.0	-16.2	1.97 V	199	46.7	11.1
4	12370.00	46.8 AV	54.0	-7.2	1.97 V	199	35.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.7 PK			1.55 H	192	61.2	45.5
2	*6345.00	94.0 AV			1.55 H	192	48.5	45.5
3	12690.00	57.0 PK	74.0	-17.0	1.67 H	166	45.7	11.3
4	12690.00	46.4 AV	54.0	-7.6	1.67 H	166	35.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.2 PK			1.50 V	259	64.7	45.5
2	*6345.00	97.3 AV			1.50 V	259	51.8	45.5
3	12690.00	57.3 PK	74.0	-16.7	1.05 V	200	46.0	11.3
4	12690.00	47.2 AV	54.0	-6.8	1.05 V	200	35.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.6 PK			1.55 H	190	60.2	46.4
2	*6505.00	94.3 AV			1.55 H	190	47.9	46.4
3	#13010.00	57.2 PK	88.2	-31.0	1.99 H	322	46.3	10.9
4	#13010.00	46.6 AV	68.2	-21.6	1.99 H	322	35.7	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.0 PK			1.52 V	261	63.6	46.4
2	*6505.00	97.3 AV			1.52 V	261	50.9	46.4
3	#13010.00	57.4 PK	88.2	-30.8	1.65 V	109	46.5	10.9
4	#13010.00	47.3 AV	68.2	-20.9	1.65 V	109	36.4	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.4 PK			1.55 H	197	59.9	46.5
2	*6665.00	94.4 AV			1.55 H	197	47.9	46.5
3	13330.00	57.5 PK	74.0	-16.5	1.05 H	214	46.4	11.1
4	13330.00	47.1 AV	54.0	-6.9	1.05 H	214	36.0	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.1 PK			1.50 V	257	63.6	46.5
2	*6665.00	97.4 AV			1.50 V	257	50.9	46.5
3	13330.00	57.6 PK	74.0	-16.4	1.55 V	215	46.5	11.1
4	13330.00	47.5 AV	54.0	-6.5	1.55 V	215	36.4	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.8 PK			1.54 H	188	59.0	46.8
2	*6825.00	93.2 AV			1.54 H	188	46.4	46.8
3	#13650.00	57.1 PK	88.2	-31.1	1.65 H	309	46.4	10.7
4	#13650.00	46.9 AV	68.2	-21.3	1.65 H	309	36.2	10.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.3 PK			1.50 V	266	62.5	46.8
2	*6825.00	96.7 AV			1.50 V	266	49.9	46.8
3	#13650.00	57.4 PK	88.2	-30.8	1.95 V	5	46.7	10.7
4	#13650.00	47.6 AV	68.2	-20.6	1.95 V	5	36.9	10.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.1 PK			1.55 H	169	60.1	47.0
2	*6985.00	94.8 AV			1.55 H	169	47.8	47.0
3	#7125.00	64.8 PK	88.2	-23.4	1.55 H	169	55.3	9.5
4	#7125.00	50.9 AV	68.2	-17.3	1.55 H	169	41.4	9.5
5	#13970.00	57.5 PK	88.2	-30.7	1.15 H	12	45.6	11.9
6	#13970.00	47.0 AV	68.2	-21.2	1.15 H	12	35.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.4 PK			1.97 V	282	64.4	47.0
2	*6985.00	98.6 AV			1.97 V	282	51.6	47.0
3	#7125.00	67.2 PK	88.2	-21.0	1.97 V	282	57.7	9.5
4	#7125.00	54.3 AV	68.2	-13.9	1.97 V	282	44.8	9.5
5	#13970.00	57.7 PK	88.2	-30.5	1.65 V	111	45.8	11.9
6	#13970.00	47.3 AV	68.2	-20.9	1.65 V	111	35.4	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.7 PK	88.2	-18.5	1.56 H	192	64.1	5.6
2	#5925.00	58.3 AV	68.2	-9.9	1.56 H	192	52.7	5.6
3	*6105.00	107.7 PK			1.56 H	192	101.3	6.4
4	*6105.00	94.8 AV			1.56 H	192	88.4	6.4
5	12210.00	57.0 PK	74.0	-17.0	1.08 H	144	46.2	10.8
6	12210.00	46.5 AV	54.0	-7.5	1.08 H	144	35.7	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.2 PK	88.2	-12.0	1.50 V	254	70.6	5.6
2	#5925.00	64.3 AV	68.2	-3.9	1.50 V	254	58.7	5.6
3	*6105.00	111.0 PK			1.50 V	254	67.0	44.0
4	*6105.00	98.1 AV			1.50 V	254	54.1	44.0
5	12210.00	57.6 PK	74.0	-16.4	1.69 V	77	46.8	10.8
6	12210.00	46.9 AV	54.0	-7.1	1.69 V	77	36.1	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	106.3 PK			1.55 H	194	61.4	44.9
2	*6265.00	93.1 AV			1.55 H	194	48.2	44.9
3	12530.00	57.7 PK	74.0	-16.3	1.05 H	200	46.2	11.5
4	12530.00	47.0 AV	54.0	-7.0	1.05 H	200	35.5	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	110.5 PK			1.50 V	255	65.6	44.9
2	*6265.00	97.6 AV			1.50 V	255	52.7	44.9
3	12530.00	57.8 PK	74.0	-16.2	1.66 V	297	46.3	11.5
4	12530.00	47.3 AV	54.0	-6.7	1.66 V	297	35.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.4 PK			1.60 H	191	60.5	45.9
2	*6425.00	93.6 AV			1.60 H	191	47.7	45.9
3	#12850.00	57.6 PK	88.2	-30.6	1.14 H	154	46.4	11.2
4	#12850.00	47.7 AV	68.2	-20.5	1.14 H	154	36.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.5 PK			1.51 V	250	64.6	45.9
2	*6425.00	97.6 AV			1.51 V	250	51.7	45.9
3	#12850.00	58.1 PK	88.2	-30.1	1.45 V	177	46.9	11.2
4	#12850.00	48.0 AV	68.2	-20.2	1.45 V	177	36.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.4 PK			1.59 H	184	59.9	46.5
2	*6585.00	93.7 AV			1.59 H	184	47.2	46.5
3	#13170.00	57.5 PK	88.2	-30.7	1.95 H	306	46.4	11.1
4	#13170.00	47.3 AV	68.2	-20.9	1.95 H	306	36.2	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.2 PK			1.51 V	251	63.7	46.5
2	*6585.00	97.4 AV			1.51 V	251	50.9	46.5
3	#13170.00	58.1 PK	88.2	-30.1	1.55 V	15	47.0	11.1
4	#13170.00	48.2 AV	68.2	-20.0	1.55 V	15	37.1	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.6 PK			1.55 H	188	60.0	46.6
2	*6745.00	93.8 AV			1.55 H	188	47.2	46.6
3	#13490.00	57.7 PK	88.2	-30.5	1.69 H	190	46.7	11.0
4	#13490.00	47.6 AV	68.2	-20.6	1.69 H	190	36.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.4 PK			1.50 V	254	63.8	46.6
2	*6745.00	97.8 AV			1.50 V	254	51.2	46.6
3	#13490.00	58.0 PK	88.2	-30.2	1.97 V	9	47.0	11.0
4	#13490.00	48.3 AV	68.2	-19.9	1.97 V	9	37.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 66 % RH
Tested By	Charles Hsiao		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.3 PK			1.55 H	249	59.4	46.9
2	*6905.00	94.0 AV			1.55 H	249	47.1	46.9
3	7250.00	63.5 PK	74.0	-10.5	1.55 H	249	53.8	9.7
4	7250.00	50.1 AV	54.0	-3.9	1.55 H	249	40.4	9.7
5	#13810.00	58.0 PK	88.2	-30.2	1.17 H	48	47.0	11.0
6	#13810.00	47.7 AV	68.2	-20.5	1.17 H	48	36.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.50 V	252	63.3	46.9
2	*6905.00	97.0 AV			1.50 V	252	50.1	46.9
3	7250.00	67.1 PK	74.0	-6.9	1.50 V	252	57.4	9.7
4	7250.00	53.4 AV	54.0	-0.6	1.50 V	252	43.7	9.7
5	#13810.00	58.1 PK	88.2	-30.1	1.15 V	245	47.1	11.0
6	#13810.00	48.2 AV	68.2	-20.0	1.15 V	245	37.2	11.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge_Beamforming Mode


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

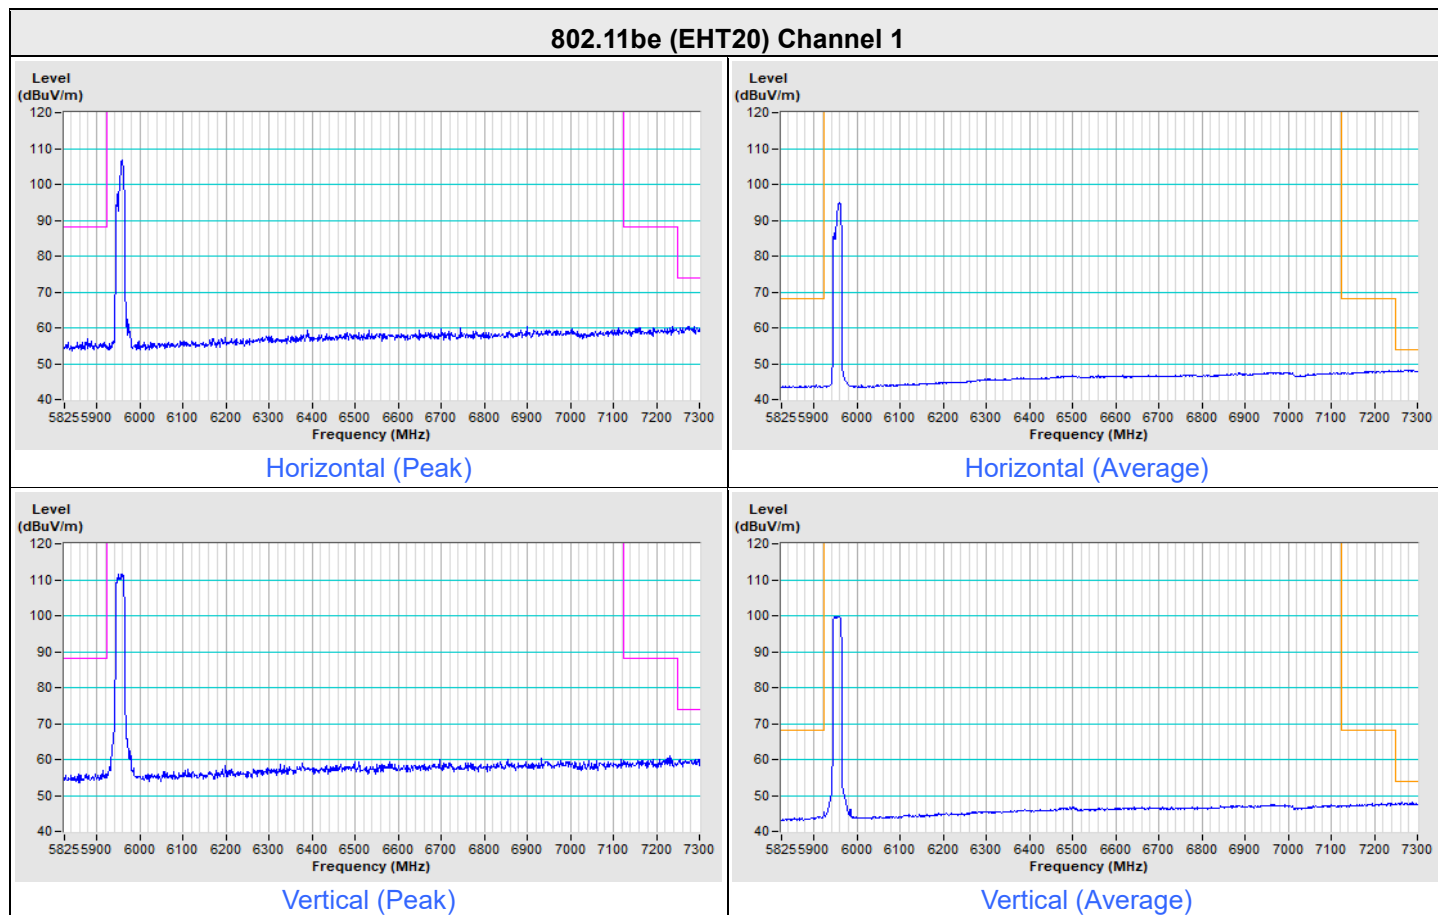


802.11be (EHT20) Channel 233

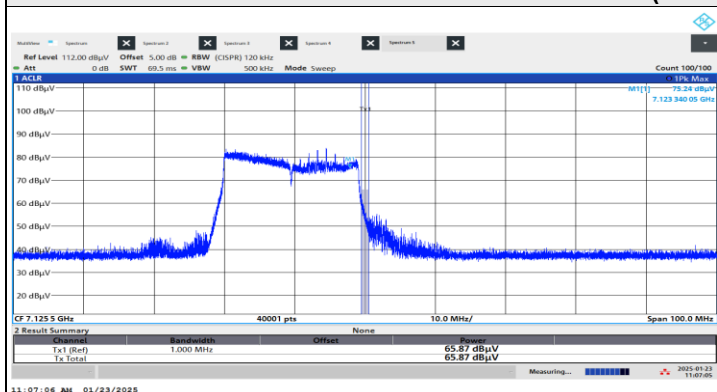


Horizontal (Peak)

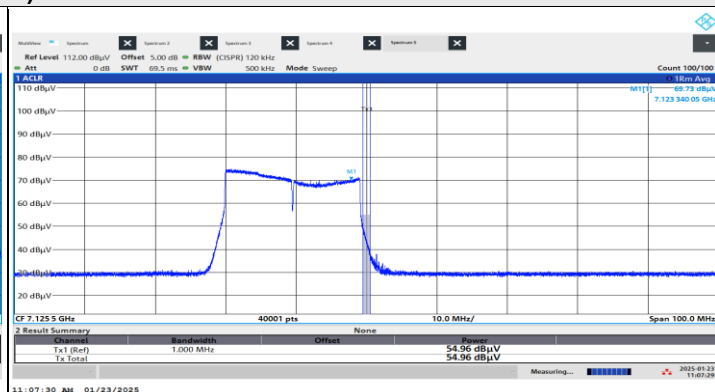

Horizontal (Average)

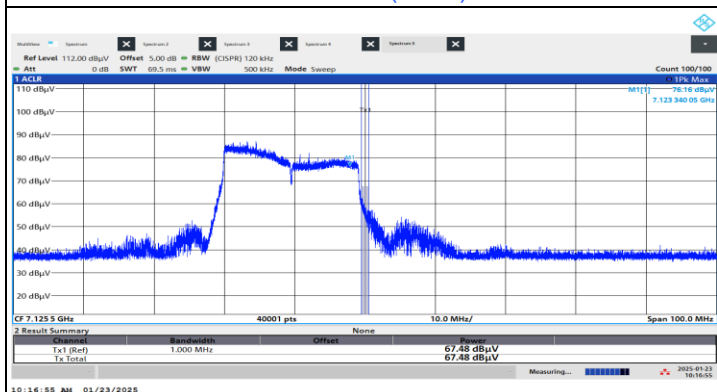


Vertical (Peak)

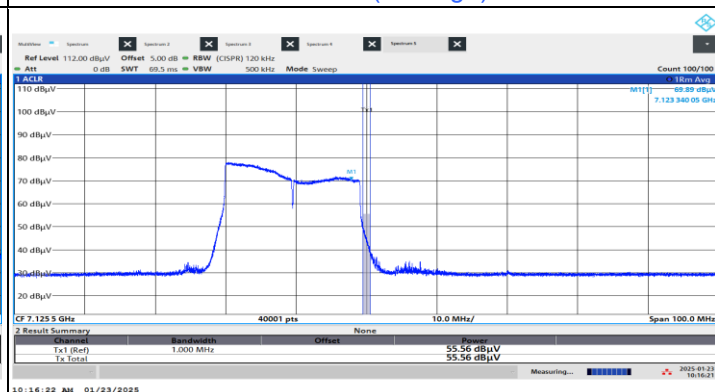


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

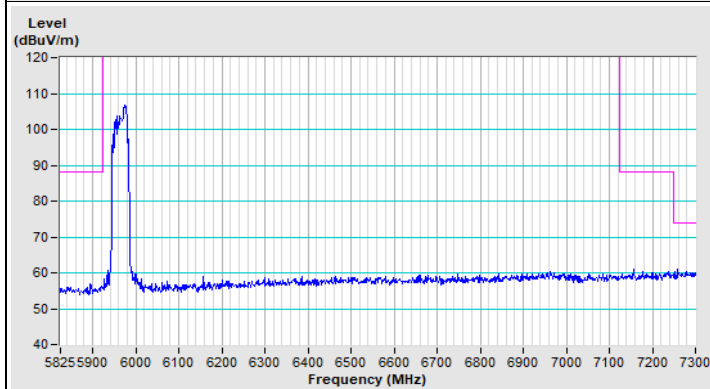


Horizontal (Peak)

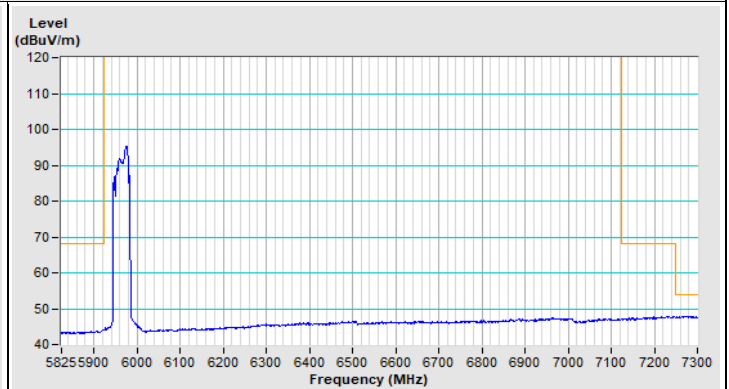

Horizontal (Average)

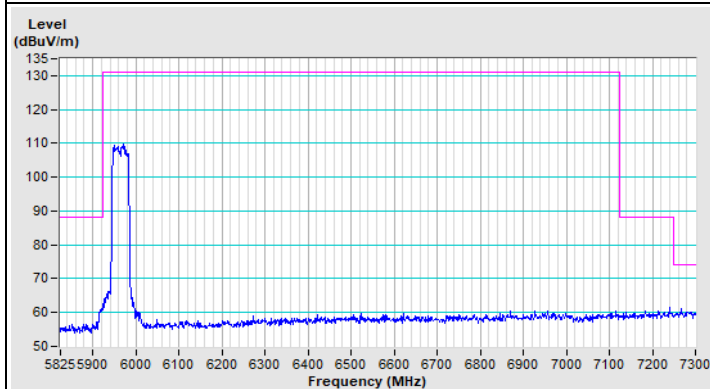


Vertical (Peak)

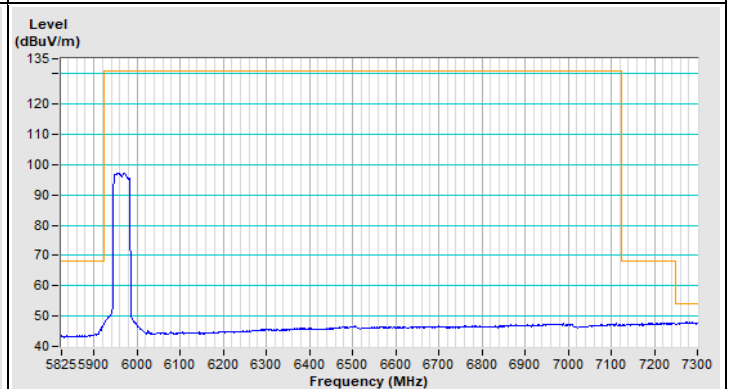


Vertical (Average)


802.11be (EHT40) Channel 227

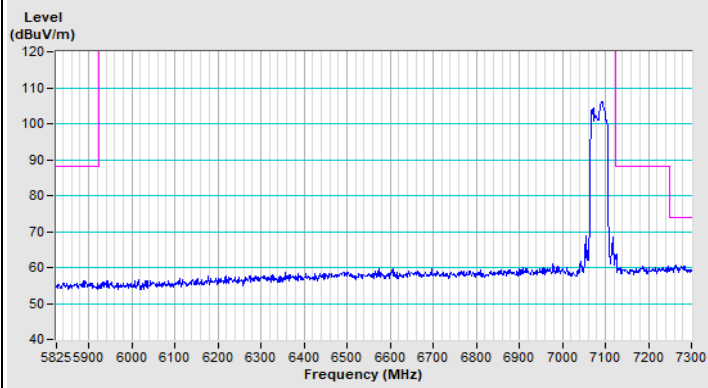


Horizontal (Peak)

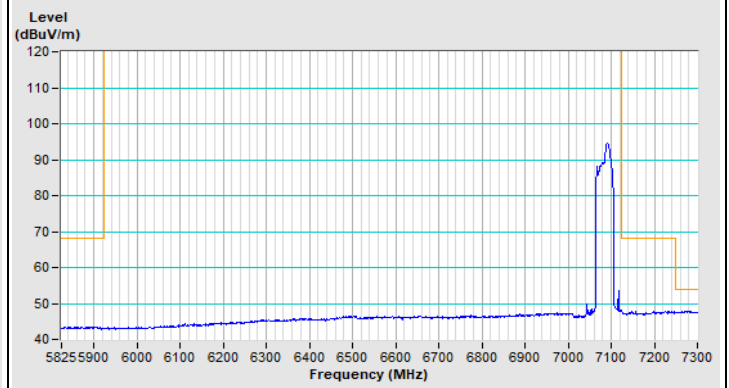

Horizontal (Average)

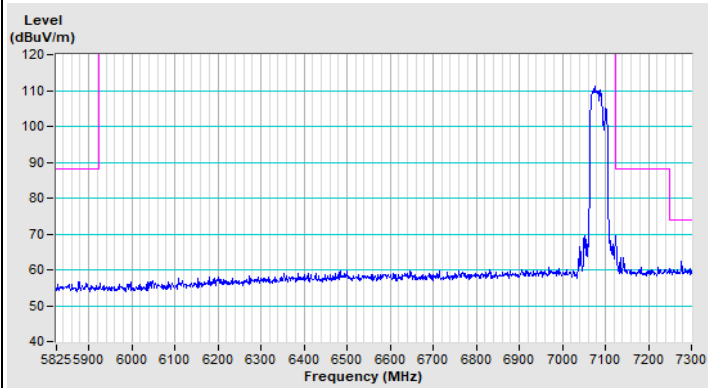


Vertical (Peak)

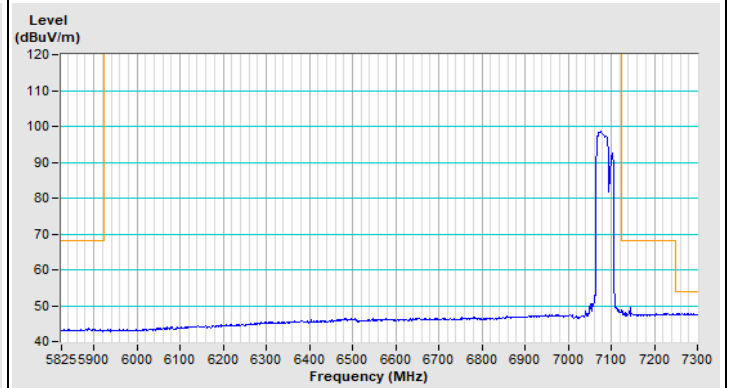


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

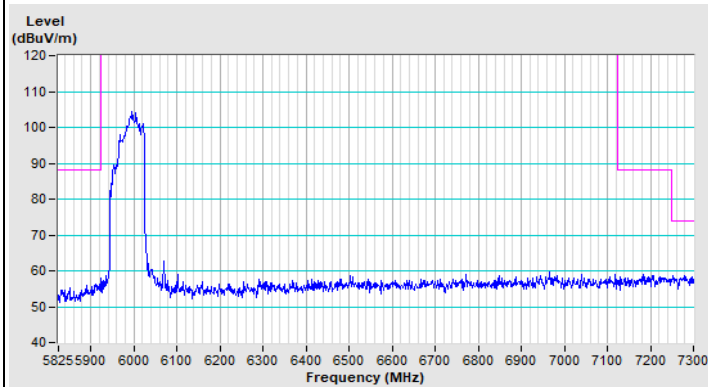


Horizontal (Peak)

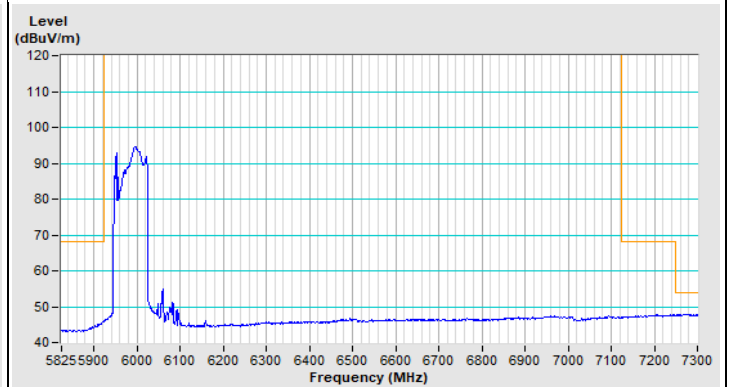

Horizontal (Average)

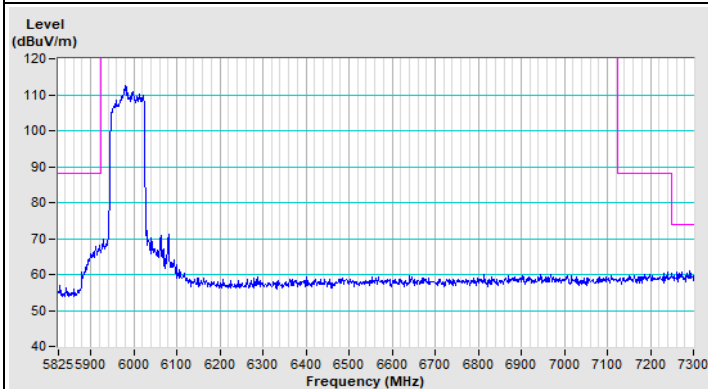


Vertical (Peak)

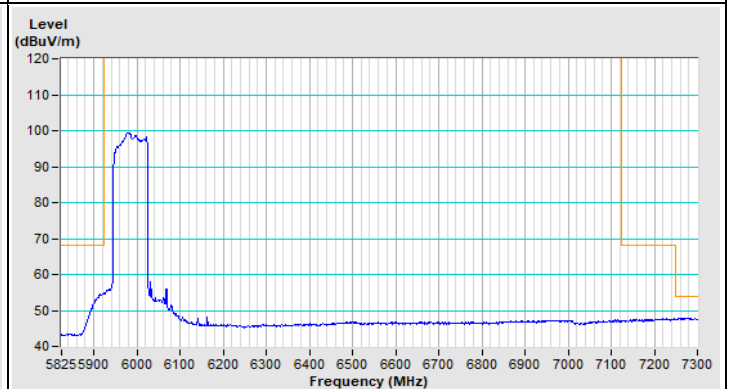


Vertical (Average)


802.11be (EHT80) Channel 215

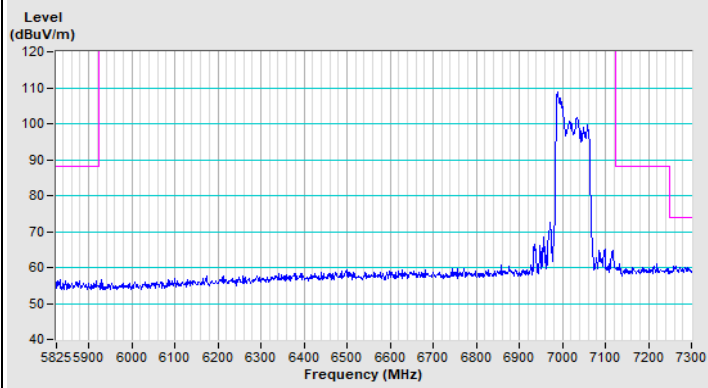


Horizontal (Peak)

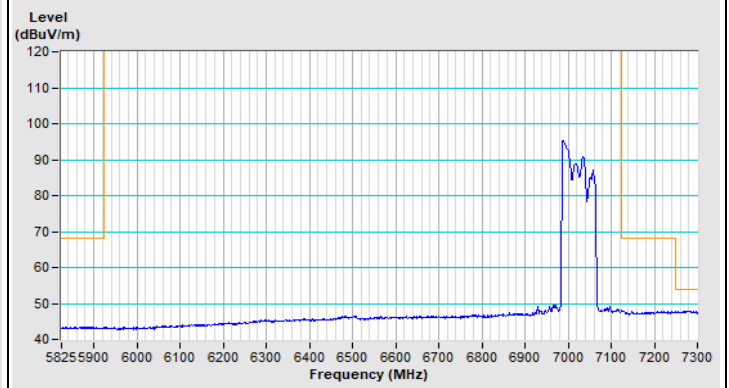

Horizontal (Average)

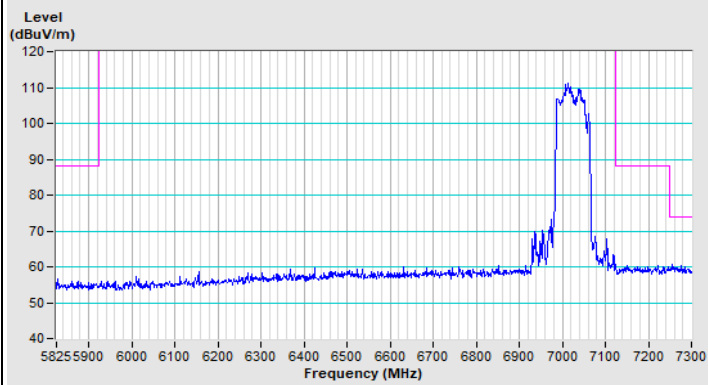


Vertical (Peak)

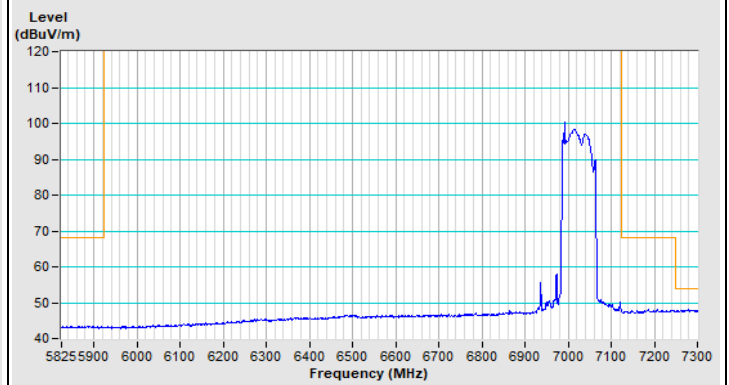


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

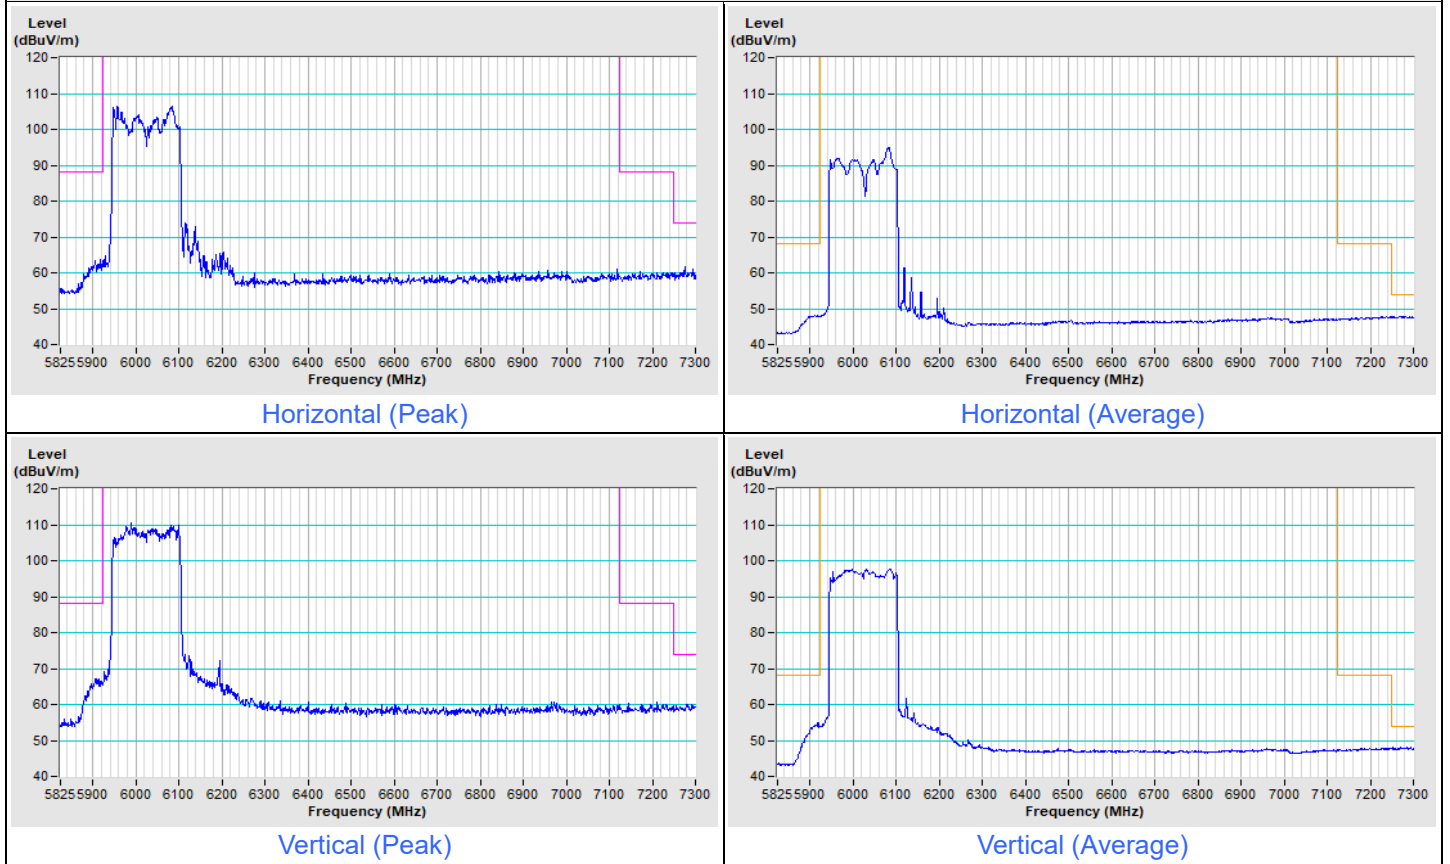


802.11be (EHT160) Channel 207

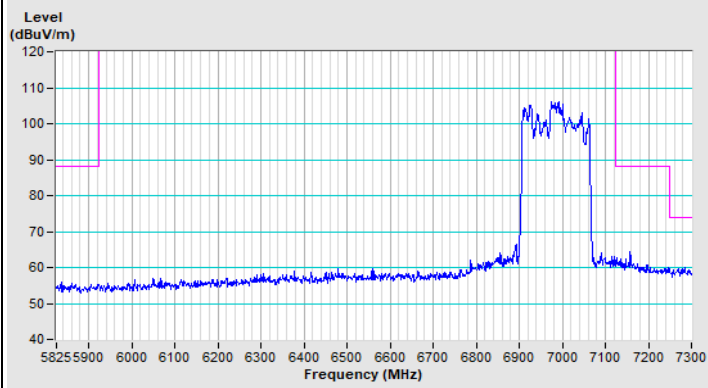


Horizontal (Peak)

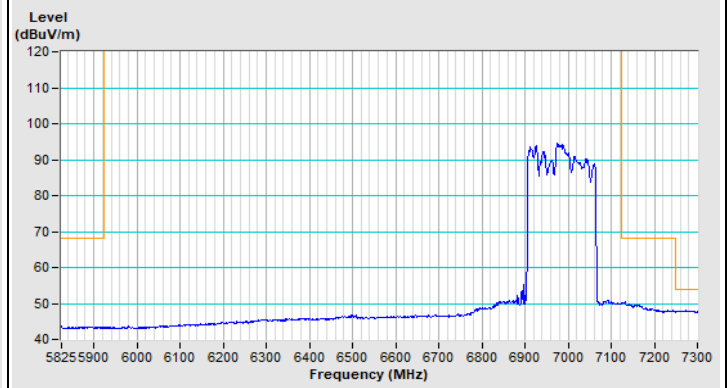

Horizontal (Average)

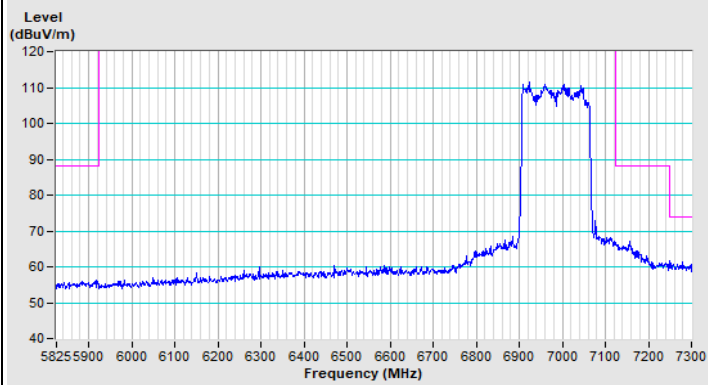


Vertical (Peak)

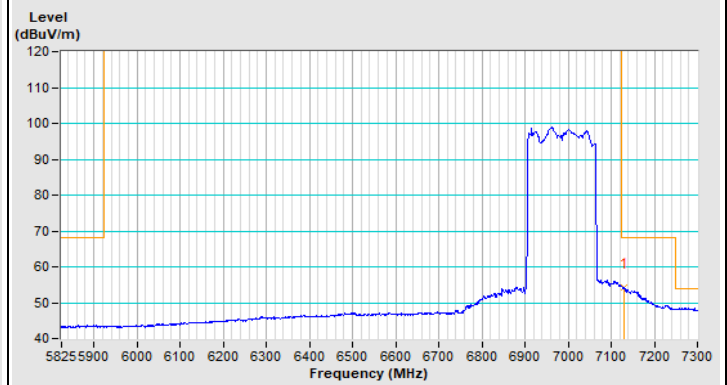


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

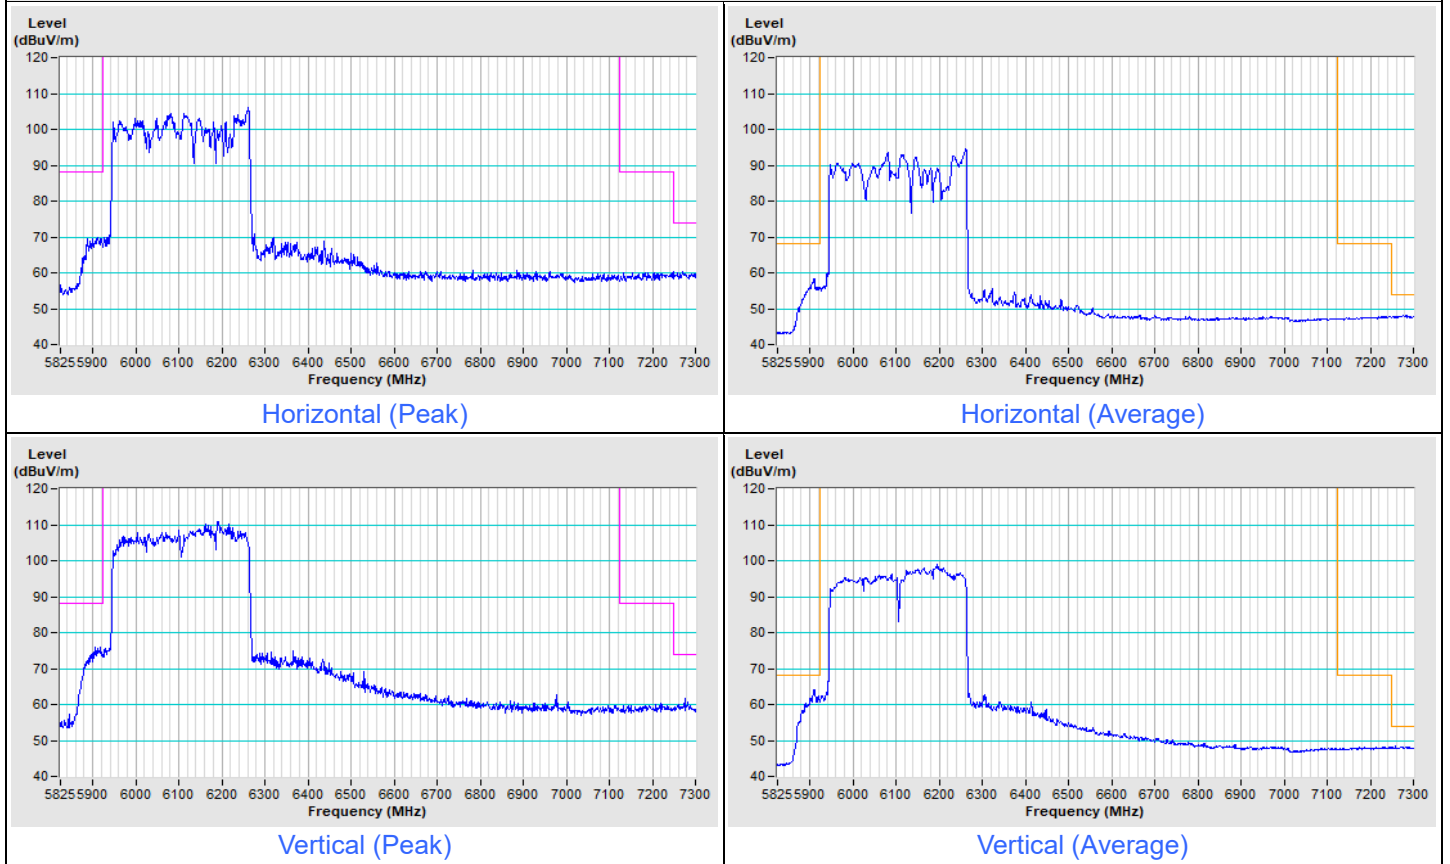


802.11be (EHT320) Channel 191

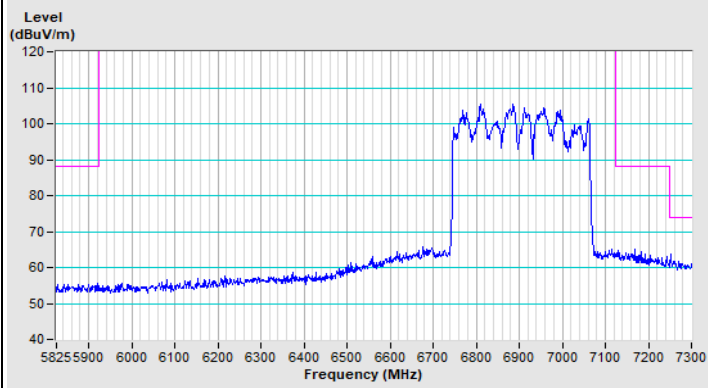


Horizontal (Peak)

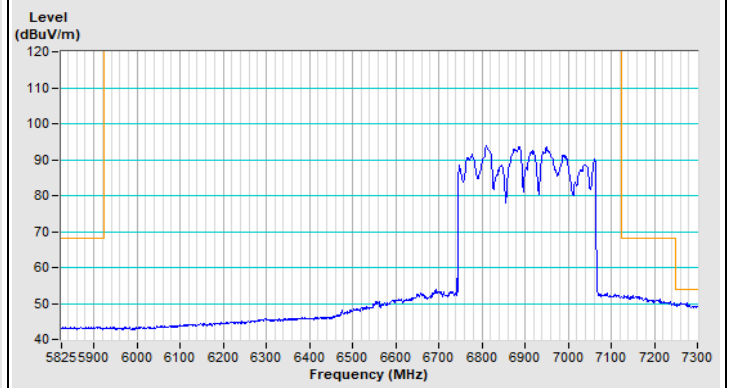

Horizontal (Average)

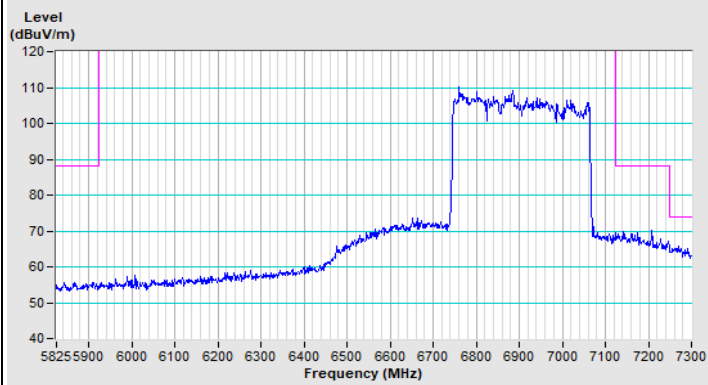

Vertical (Peak)

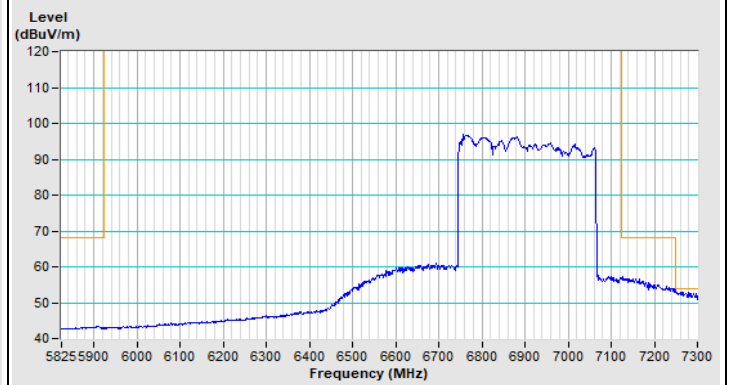

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---