

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	114.0 PK			3.48 H	117	104.1	9.9
2	*5320.00	103.1 AV			3.48 H	117	93.2	9.9
3	5350.00	61.5 PK	74.0	-12.5	3.48 H	117	51.7	9.8
4	5350.00	49.4 AV	54.0	-4.6	3.48 H	117	39.6	9.8
5	10640.00	55.5 PK	74.0	-18.5	3.12 H	110	37.9	17.6
6	10640.00	43.0 AV	54.0	-11.0	3.12 H	110	25.4	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.6 PK			2.53 V	11	107.7	9.9
2	*5320.00	106.3 AV			2.53 V	11	96.4	9.9
3	5350.00	62.0 PK	74.0	-12.0	2.53 V	11	52.2	9.8
4	5350.00	49.9 AV	54.0	-4.1	2.53 V	11	40.1	9.8
5	10640.00	56.0 PK	74.0	-18.0	2.28 V	179	38.4	17.6
6	10640.00	43.5 AV	54.0	-10.5	2.28 V	179	25.9	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.3 PK	74.0	-10.7	3.66 H	133	53.3	10.0
2	5460.00	50.4 AV	54.0	-3.6	3.66 H	133	40.4	10.0
3	#5470.00	61.7 PK	68.2	-6.5	3.66 H	133	51.6	10.1
4	*5500.00	112.8 PK			3.66 H	133	102.3	10.5
5	*5500.00	101.4 AV			3.66 H	133	90.9	10.5
6	11000.00	55.5 PK	74.0	-18.5	3.30 H	119	37.4	18.1
7	11000.00	43.0 AV	54.0	-11.0	3.30 H	119	24.9	18.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	2.34 V	9	53.7	10.0
2	5460.00	50.8 AV	54.0	-3.2	2.34 V	9	40.8	10.0
3	#5470.00	62.2 PK	68.2	-6.0	2.34 V	9	52.1	10.1
4	*5500.00	116.1 PK			2.34 V	9	105.6	10.5
5	*5500.00	105.5 AV			2.34 V	9	95.0	10.5
6	11000.00	56.0 PK	74.0	-18.0	2.06 V	177	37.9	18.1
7	11000.00	43.5 AV	54.0	-10.5	2.06 V	177	25.4	18.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	112.4 PK			3.82 H	127	101.9	10.5
2	*5580.00	100.9 AV			3.82 H	127	90.4	10.5
3	11160.00	55.6 PK	74.0	-18.4	2.98 H	120	36.9	18.7
4	11160.00	43.1 AV	54.0	-10.9	2.98 H	120	24.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	116.0 PK			1.99 V	3	105.5	10.5
2	*5580.00	105.3 AV			1.99 V	3	94.8	10.5
3	11160.00	56.1 PK	74.0	-17.9	1.72 V	171	37.4	18.7
4	11160.00	43.6 AV	54.0	-10.4	1.72 V	171	24.9	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.1 PK			2.25 H	149	103.2	9.9
2	*5700.00	102.2 AV			2.25 H	149	92.3	9.9
3	#5725.00	65.4 PK	68.2	-2.8	2.25 H	149	55.5	9.9
4	11400.00	56.8 PK	74.0	-17.2	1.89 H	156	37.8	19.0
5	11400.00	44.3 AV	54.0	-9.7	1.89 H	156	25.3	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.0 PK			3.62 V	295	106.1	9.9
2	*5700.00	105.1 AV			3.62 V	295	95.2	9.9
3	#5725.00	66.7 PK	68.2	-1.5	3.62 V	295	56.8	9.9
4	11400.00	57.3 PK	74.0	-16.7	3.35 V	109	38.3	19.0
5	11400.00	44.8 AV	54.0	-9.2	3.35 V	109	25.8	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.2 PK	68.2	-7.0	3.88 H	260	51.1	10.1
2	*5720.00	112.7 PK			3.88 H	260	102.8	9.9
3	*5720.00	101.5 AV			3.88 H	260	91.6	9.9
4	11440.00	58.0 PK	74.0	-16.0	3.56 H	252	39.1	18.9
5	11440.00	47.2 AV	54.0	-6.8	3.56 H	252	28.3	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.6 PK	68.2	-6.6	2.30 V	82	51.5	10.1
2	*5720.00	116.1 PK			2.30 V	82	106.2	9.9
3	*5720.00	104.9 AV			2.30 V	82	95.0	9.9
4	11440.00	58.5 PK	74.0	-15.5	2.05 V	56	39.6	18.9
5	11440.00	47.7 AV	54.0	-6.3	2.05 V	56	28.8	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.30	61.2 PK	68.2	-7.0	3.45 H	312	51.1	10.1
2	*5745.00	121.2 PK			3.45 H	312	111.3	9.9
3	*5745.00	110.2 AV			3.45 H	312	100.3	9.9
4	#5961.35	60.2 PK	68.2	-8.0	3.45 H	312	50.2	10.0
5	11490.00	57.1 PK	74.0	-16.9	3.11 H	305	38.3	18.8
6	11490.00	44.6 AV	54.0	-9.4	3.11 H	305	25.8	18.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.32	61.4 PK	68.2	-6.8	2.55 V	188	51.3	10.1
2	*5745.00	124.3 PK			2.55 V	188	114.4	9.9
3	*5745.00	112.6 AV			2.55 V	188	102.7	9.9
4	#5969.90	59.8 PK	68.2	-8.4	2.55 V	188	49.8	10.0
5	11490.00	57.6 PK	74.0	-16.4	2.29 V	8	38.8	18.8
6	11490.00	45.1 AV	54.0	-8.9	2.29 V	8	26.3	18.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.37	62.2 PK	68.2	-6.0	3.66 H	206	52.0	10.2
2	*5785.00	120.8 PK			3.66 H	206	110.8	10.0
3	*5785.00	109.5 AV			3.66 H	206	99.5	10.0
4	#5952.80	59.3 PK	68.2	-8.9	3.66 H	206	49.2	10.1
5	11570.00	57.3 PK	74.0	-16.7	3.32 H	199	38.4	18.9
6	11570.00	44.8 AV	54.0	-9.2	3.32 H	199	25.9	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.80	61.0 PK	68.2	-7.2	2.24 V	82	50.8	10.2
2	*5785.00	124.1 PK			2.24 V	82	114.1	10.0
3	*5785.00	112.7 AV			2.24 V	82	102.7	10.0
4	#5927.62	59.9 PK	68.2	-8.3	2.24 V	82	49.8	10.1
5	11570.00	57.8 PK	74.0	-16.2	1.98 V	114	38.9	18.9
6	11570.00	45.3 AV	54.0	-8.7	1.98 V	114	26.4	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5563.30	60.9 PK	68.2	-7.3	3.53 H	215	50.5	10.4
2	*5825.00	119.4 PK			3.53 H	215	109.5	9.9
3	*5825.00	109.4 AV			3.53 H	215	99.5	9.9
4	#6014.55	59.8 PK	68.2	-8.4	3.53 H	215	49.8	10.0
5	11650.00	57.5 PK	74.0	-16.5	3.17 H	208	38.6	18.9
6	11650.00	45.0 AV	54.0	-9.0	3.17 H	208	26.1	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5562.35	61.4 PK	68.2	-6.8	2.18 V	91	51.0	10.4
2	*5825.00	123.1 PK			2.18 V	91	113.2	9.9
3	*5825.00	113.2 AV			2.18 V	91	103.3	9.9
4	#5936.18	60.1 PK	68.2	-8.1	2.18 V	91	50.0	10.1
5	11650.00	58.0 PK	74.0	-16.0	1.92 V	109	39.1	18.9
6	11650.00	45.5 AV	54.0	-8.5	1.92 V	109	26.6	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	3.36 H	323	56.3	8.8
2	5150.00	52.5 AV	54.0	-1.5	3.36 H	323	43.7	8.8
3	*5190.00	113.4 PK			3.36 H	323	104.4	9.0
4	*5190.00	102.9 AV			3.36 H	323	93.9	9.0
5	#10380.00	55.5 PK	68.2	-12.7	3.03 H	314	38.0	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	2.17 V	9	58.0	8.8
2	5150.00	53.5 AV	54.0	-0.5	2.17 V	9	44.7	8.8
3	*5190.00	116.2 PK			2.17 V	9	107.2	9.0
4	*5190.00	104.8 AV			2.17 V	9	95.8	9.0
5	#10380.00	56.0 PK	68.2	-12.2	1.90 V	191	38.5	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	3.23 H	339	56.3	8.8
2	5150.00	51.4 AV	54.0	-2.6	3.23 H	339	42.6	8.8
3	*5230.00	117.4 PK			3.23 H	339	108.1	9.3
4	*5230.00	105.8 AV			3.23 H	339	96.5	9.3
5	5350.00	61.9 PK	74.0	-12.1	3.23 H	339	52.1	9.8
6	5350.00	50.3 AV	54.0	-3.7	3.23 H	339	40.5	9.8
7	#10460.00	57.8 PK	68.2	-10.4	3.00 H	310	40.3	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	2.16 V	7	58.7	8.8
2	5150.00	53.5 AV	54.0	-0.5	2.16 V	7	44.7	8.8
3	*5230.00	120.2 PK			2.16 V	7	110.9	9.3
4	*5230.00	108.9 AV			2.16 V	7	99.6	9.3
5	5350.00	62.4 PK	74.0	-11.6	2.16 V	7	52.6	9.8
6	5350.00	50.7 AV	54.0	-3.3	2.16 V	7	40.9	9.8
7	#10460.00	58.3 PK	68.2	-9.9	1.90 V	179	40.8	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	3.02 H	331	51.0	8.8
2	5150.00	47.7 AV	54.0	-6.3	3.02 H	331	38.9	8.8
3	*5270.00	114.7 PK			3.02 H	331	105.0	9.7
4	*5270.00	103.5 AV			3.02 H	331	93.8	9.7
5	#10540.00	54.5 PK	68.2	-13.7	2.69 H	304	36.9	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	2.41 V	17	51.3	8.8
2	5150.00	48.0 AV	54.0	-6.0	2.41 V	17	39.2	8.8
3	*5270.00	116.8 PK			2.41 V	17	107.1	9.7
4	*5270.00	105.7 AV			2.41 V	17	96.0	9.7
5	#10540.00	55.0 PK	68.2	-13.2	2.16 V	199	37.4	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	113.2 PK			3.00 H	329	103.4	9.8
2	*5310.00	102.0 AV			3.00 H	329	92.2	9.8
3	5350.00	60.6 PK	74.0	-13.4	3.00 H	329	50.8	9.8
4	5350.00	50.0 AV	54.0	-4.0	3.00 H	329	40.2	9.8
5	10620.00	53.9 PK	74.0	-20.1	2.66 H	306	36.3	17.6
6	10620.00	41.4 AV	54.0	-12.6	2.66 H	306	23.8	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	115.3 PK			2.54 V	16	105.5	9.8
2	*5310.00	104.5 AV			2.54 V	16	94.7	9.8
3	5350.00	61.2 PK	74.0	-12.8	2.54 V	16	51.4	9.8
4	5350.00	50.6 AV	54.0	-3.4	2.54 V	16	40.8	9.8
5	10620.00	54.4 PK	74.0	-19.6	2.30 V	197	36.8	17.6
6	10620.00	41.9 AV	54.0	-12.1	2.30 V	197	24.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.3 PK	74.0	-12.7	3.61 H	336	51.3	10.0
2	5460.00	50.3 AV	54.0	-3.7	3.61 H	336	40.3	10.0
3	#5470.00	62.9 PK	68.2	-5.3	3.61 H	336	52.8	10.1
4	*5510.00	112.4 PK			3.61 H	336	102.0	10.4
5	*5510.00	101.2 AV			3.61 H	336	90.8	10.4
6	11020.00	55.2 PK	74.0	-18.8	3.28 H	315	36.9	18.3
7	11020.00	42.7 AV	54.0	-11.3	3.28 H	315	24.4	18.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	3.16 V	12	51.9	10.0
2	5460.00	50.6 AV	54.0	-3.4	3.16 V	12	40.6	10.0
3	#5470.00	64.0 PK	68.2	-4.2	3.16 V	12	53.9	10.1
4	*5510.00	114.2 PK			3.16 V	12	103.8	10.4
5	*5510.00	103.0 AV			3.16 V	12	92.6	10.4
6	11020.00	55.7 PK	74.0	-18.3	2.91 V	194	37.4	18.3
7	11020.00	43.2 AV	54.0	-10.8	2.91 V	194	24.9	18.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	112.6 PK			3.29 H	249	102.2	10.4
2	*5550.00	102.0 AV			3.29 H	249	91.6	10.4
3	11100.00	55.3 PK	74.0	-18.7	2.60 H	228	36.9	18.4
4	11100.00	42.8 AV	54.0	-11.2	2.60 H	228	24.4	18.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	114.4 PK			2.90 V	277	104.0	10.4
2	*5550.00	103.6 AV			2.90 V	277	93.2	10.4
3	11100.00	55.8 PK	74.0	-18.2	2.65 V	113	37.4	18.4
4	11100.00	43.3 AV	54.0	-10.7	2.65 V	113	24.9	18.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	114.0 PK			2.82 H	152	104.0	10.0
2	*5670.00	103.0 AV			2.82 H	152	93.0	10.0
3	#5725.00	66.6 PK	68.2	-1.6	2.82 H	152	56.7	9.9
4	11340.00	56.5 PK	74.0	-17.5	2.59 H	130	37.8	18.7
5	11340.00	44.0 AV	54.0	-10.0	2.59 H	130	25.3	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	115.8 PK			2.43 V	193	105.8	10.0
2	*5670.00	104.5 AV			2.43 V	193	94.5	10.0
3	#5725.00	67.0 PK	68.2	-1.2	2.43 V	193	57.1	9.9
4	11340.00	57.0 PK	74.0	-17.0	2.18 V	16	38.3	18.7
5	11340.00	44.5 AV	54.0	-9.5	2.18 V	16	25.8	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.2 PK	68.2	-8.0	3.82 H	146	50.1	10.1
2	*5710.00	112.8 PK			3.82 H	146	102.8	10.0
3	*5710.00	101.7 AV			3.82 H	146	91.7	10.0
4	11420.00	57.6 PK	74.0	-16.4	2.49 H	139	38.7	18.9
5	11420.00	46.8 AV	54.0	-7.2	2.49 H	139	27.9	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.6 PK	68.2	-7.6	2.33 V	190	50.5	10.1
2	*5710.00	115.3 PK			2.33 V	190	105.3	10.0
3	*5710.00	104.0 AV			2.33 V	190	94.0	10.0
4	11420.00	58.1 PK	74.0	-15.9	2.09 V	168	39.2	18.9
5	11420.00	47.3 AV	54.0	-6.7	2.09 V	168	28.4	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.85	65.4 PK	68.2	-2.8	2.61 H	137	55.3	10.1
2	*5755.00	118.4 PK			2.61 H	137	108.5	9.9
3	*5755.00	106.9 AV			2.61 H	137	97.0	9.9
4	#5930.00	59.8 PK	68.2	-8.4	2.61 H	137	49.7	10.1
5	11510.00	56.8 PK	74.0	-17.2	2.22 H	116	38.0	18.8
6	11510.00	44.3 AV	54.0	-9.7	2.22 H	116	25.5	18.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.95	66.2 PK	68.2	-2.0	2.74 V	207	56.1	10.1
2	*5755.00	120.4 PK			2.74 V	207	110.5	9.9
3	*5755.00	109.4 AV			2.74 V	207	99.5	9.9
4	#5956.12	59.8 PK	68.2	-8.4	2.74 V	207	49.8	10.0
5	11510.00	57.3 PK	74.0	-16.7	2.49 V	29	38.5	18.8
6	11510.00	44.8 AV	54.0	-9.2	2.49 V	29	26.0	18.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.23	62.8 PK	68.2	-5.4	2.73 H	153	52.7	10.1
2	*5795.00	119.3 PK			2.73 H	153	109.3	10.0
3	*5795.00	108.1 AV			2.73 H	153	98.1	10.0
4	#5982.25	60.4 PK	68.2	-7.8	2.73 H	153	50.4	10.0
5	11590.00	57.4 PK	74.0	-16.6	2.35 H	134	38.4	19.0
6	11590.00	44.9 AV	54.0	-9.1	2.35 H	134	25.9	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.62	64.1 PK	68.2	-4.1	2.28 V	191	54.0	10.1
2	*5795.00	121.2 PK			2.28 V	191	111.2	10.0
3	*5795.00	109.8 AV			2.28 V	191	99.8	10.0
4	#6022.15	60.1 PK	68.2	-8.1	2.28 V	191	50.1	10.0
5	11590.00	57.9 PK	74.0	-16.1	2.03 V	157	38.9	19.0
6	11590.00	45.4 AV	54.0	-8.6	2.03 V	157	26.4	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.2 PK	74.0	-10.8	3.30 H	336	54.4	8.8
2	5150.00	51.0 AV	54.0	-3.0	3.30 H	336	42.2	8.8
3	*5210.00	109.9 PK			3.30 H	336	100.8	9.1
4	*5210.00	99.4 AV			3.30 H	336	90.3	9.1
5	5350.00	60.7 PK	74.0	-13.3	3.30 H	336	50.9	9.8
6	5350.00	49.3 AV	54.0	-4.7	3.30 H	336	39.5	9.8
7	#10420.00	55.0 PK	68.2	-13.2	2.97 H	313	37.4	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	2.23 V	10	56.3	8.8
2	5150.00	53.4 AV	54.0	-0.6	2.23 V	10	44.6	8.8
3	*5210.00	113.1 PK			2.23 V	10	104.0	9.1
4	*5210.00	101.8 AV			2.23 V	10	92.7	9.1
5	5350.00	60.9 PK	74.0	-13.1	2.23 V	10	51.1	9.8
6	5350.00	49.7 AV	54.0	-4.3	2.23 V	10	39.9	9.8
7	#10420.00	55.5 PK	68.2	-12.7	1.98 V	192	37.9	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	3.24 H	334	50.5	8.8
2	5150.00	47.5 AV	54.0	-6.5	3.24 H	334	38.7	8.8
3	*5290.00	112.1 PK			3.24 H	334	102.3	9.8
4	*5290.00	101.1 AV			3.24 H	334	91.3	9.8
5	5350.00	64.8 PK	74.0	-9.2	3.24 H	334	55.0	9.8
6	5350.00	53.3 AV	54.0	-0.7	3.24 H	334	43.5	9.8
7	#10580.00	55.9 PK	68.2	-12.3	2.89 H	319	38.3	17.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.7 PK	74.0	-13.3	2.02 V	12	51.9	8.8
2	5150.00	48.6 AV	54.0	-5.4	2.02 V	12	39.8	8.8
3	*5290.00	114.2 PK			2.02 V	12	104.4	9.8
4	*5290.00	102.8 AV			2.02 V	12	93.0	9.8
5	5350.00	65.2 PK	74.0	-8.8	2.02 V	12	55.4	9.8
6	5350.00	53.7 AV	54.0	-0.3	2.02 V	12	43.9	9.8
7	#10580.00	56.4 PK	68.2	-11.8	1.78 V	186	38.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.8 PK	74.0	-11.2	3.12 H	341	52.8	10.0
2	5460.00	51.7 AV	54.0	-2.3	3.12 H	341	41.7	10.0
3	#5470.00	63.0 PK	68.2	-5.2	3.12 H	341	52.9	10.1
4	*5530.00	108.1 PK			3.12 H	341	97.7	10.4
5	*5530.00	96.8 AV			3.12 H	341	86.4	10.4
6	11060.00	55.0 PK	74.0	-19.0	2.79 H	308	36.8	18.2
7	11060.00	42.5 AV	54.0	-11.5	2.79 H	308	24.3	18.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	2.13 V	1	53.9	10.0
2	5460.00	53.4 AV	54.0	-0.6	2.13 V	1	43.4	10.0
3	#5470.00	65.6 PK	68.2	-2.6	2.13 V	1	55.5	10.1
4	*5530.00	111.3 PK			2.13 V	1	100.9	10.4
5	*5530.00	100.0 AV			2.13 V	1	89.6	10.4
6	11060.00	55.5 PK	74.0	-18.5	1.88 V	179	37.3	18.2
7	11060.00	43.0 AV	54.0	-11.0	1.88 V	179	24.8	18.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	109.2 PK			3.03 H	260	98.8	10.4
2	*5610.00	98.2 AV			3.03 H	260	87.8	10.4
3	#5725.00	62.2 PK	68.2	-6.0	3.03 H	260	52.3	9.9
4	11220.00	56.1 PK	74.0	-17.9	2.71 H	229	37.2	18.9
5	11220.00	43.6 AV	54.0	-10.4	2.71 H	229	24.7	18.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	112.1 PK			2.22 V	94	101.7	10.4
2	*5610.00	100.6 AV			2.22 V	94	90.2	10.4
3	#5725.00	63.9 PK	68.2	-4.3	2.22 V	94	54.0	9.9
4	11220.00	56.6 PK	74.0	-17.4	1.98 V	271	37.7	18.9
5	11220.00	44.1 AV	54.0	-9.9	1.98 V	271	25.2	18.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.3 PK	68.2	-7.9	3.04 H	325	50.2	10.1
2	*5690.00	109.8 PK			3.04 H	325	99.8	10.0
3	*5690.00	98.6 AV			3.04 H	325	88.6	10.0
4	11380.00	57.4 PK	74.0	-16.6	1.70 H	318	38.4	19.0
5	11380.00	46.6 AV	54.0	-7.4	1.70 H	318	27.6	19.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	60.6 PK	68.2	-7.6	3.12 V	13	50.5	10.1
2	*5690.00	113.1 PK			3.12 V	13	103.1	10.0
3	*5690.00	101.2 AV			3.12 V	13	91.2	10.0
4	11380.00	57.9 PK	74.0	-16.1	2.86 V	346	38.9	19.0
5	11380.00	47.1 AV	54.0	-6.9	2.86 V	346	28.1	19.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.23	66.4 PK	68.2	-1.8	3.15 H	255	56.2	10.2
2	*5775.00	114.3 PK			3.15 H	255	104.3	10.0
3	*5775.00	103.0 AV			3.15 H	255	93.0	10.0
4	#5946.15	59.9 PK	68.2	-8.3	3.15 H	255	49.8	10.1
5	11550.00	57.7 PK	74.0	-16.3	2.83 H	236	38.9	18.8
6	11550.00	45.2 AV	54.0	-8.8	2.83 H	236	26.4	18.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	67.8 PK	68.2	-0.4	2.10 V	87	57.7	10.1
2	*5775.00	117.0 PK			2.10 V	87	107.0	10.0
3	*5775.00	105.8 AV			2.10 V	87	95.8	10.0
4	#5933.32	60.3 PK	68.2	-7.9	2.10 V	87	50.2	10.1
5	11550.00	58.2 PK	74.0	-15.8	1.84 V	265	39.4	18.8
6	11550.00	45.7 AV	54.0	-8.3	1.84 V	265	26.9	18.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.2 PK	74.0	-8.8	3.28 H	172	56.4	8.8
2	5150.00	52.0 AV	54.0	-2.0	3.28 H	172	43.2	8.8
3	*5250.00	107.4 PK			3.28 H	172	97.9	9.5
4	*5250.00	96.9 AV			3.28 H	172	87.4	9.5
5	5350.00	66.8 PK	74.0	-7.2	3.28 H	172	57.0	9.8
6	5350.00	52.7 AV	54.0	-1.3	3.28 H	172	42.9	9.8
7	#10500.00	55.6 PK	68.2	-12.6	2.95 H	157	38.1	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	2.49 V	14	58.2	8.8
2	5150.00	53.6 AV	54.0	-0.4	2.49 V	14	44.8	8.8
3	*5250.00	109.7 PK			2.49 V	14	100.2	9.5
4	*5250.00	98.7 AV			2.49 V	14	89.2	9.5
5	5350.00	68.7 PK	74.0	-5.3	2.49 V	14	58.9	9.8
6	5350.00	53.2 AV	54.0	-0.8	2.49 V	14	43.4	9.8
7	#10500.00	56.1 PK	68.2	-12.1	2.24 V	348	38.6	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.0 PK	74.0	-9.0	2.95 H	186	55.0	10.0
2	5460.00	52.7 AV	54.0	-1.3	2.95 H	186	42.7	10.0
3	#5470.00	65.1 PK	68.2	-3.1	2.95 H	186	55.0	10.1
4	*5570.00	106.7 PK			2.95 H	186	96.3	10.4
5	*5570.00	96.0 AV			2.95 H	186	85.6	10.4
6	#5725.00	66.2 PK	68.2	-2.0	2.95 H	186	56.3	9.9
7	11140.00	56.6 PK	74.0	-17.4	2.62 H	155	37.9	18.7
8	11140.00	44.1 AV	54.0	-9.9	2.62 H	155	25.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.3 PK	74.0	-7.7	2.10 V	16	56.3	10.0
2	5460.00	53.5 AV	54.0	-0.5	2.10 V	16	43.5	10.0
3	#5470.00	66.5 PK	68.2	-1.7	2.10 V	16	56.4	10.1
4	*5570.00	109.4 PK			2.10 V	16	99.0	10.4
5	*5570.00	97.8 AV			2.10 V	16	87.4	10.4
6	#5725.00	67.4 PK	68.2	-0.8	2.10 V	16	57.5	9.9
7	11140.00	57.1 PK	74.0	-16.9	1.65 V	178	38.4	18.7
8	11140.00	44.6 AV	54.0	-9.4	1.65 V	178	25.9	18.7


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge_CDD Mode

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 36

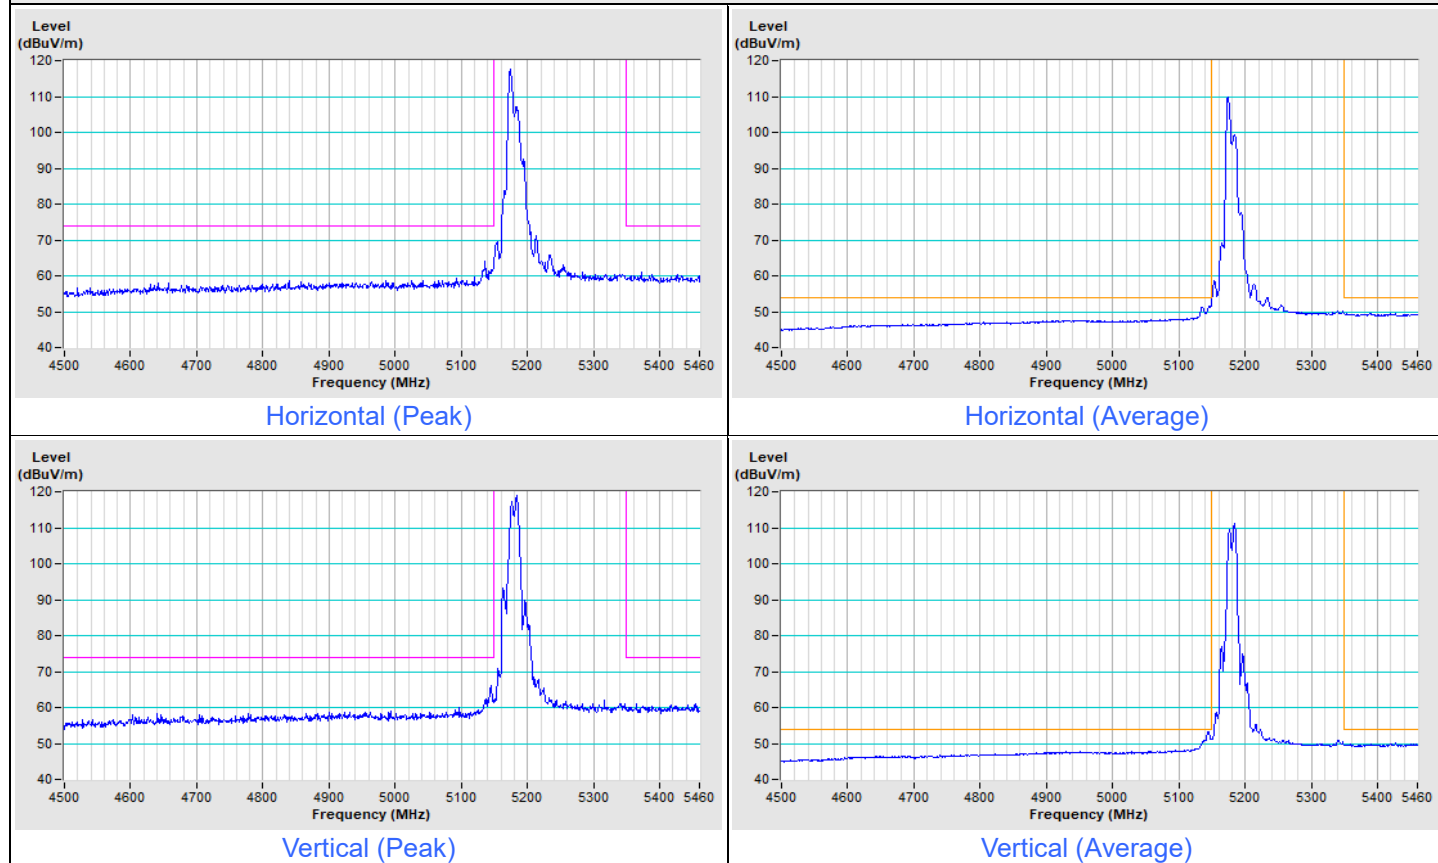


802.11a Channel 48

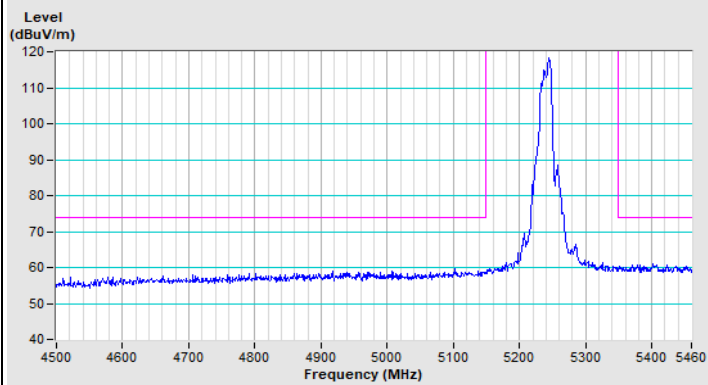


Horizontal (Peak)

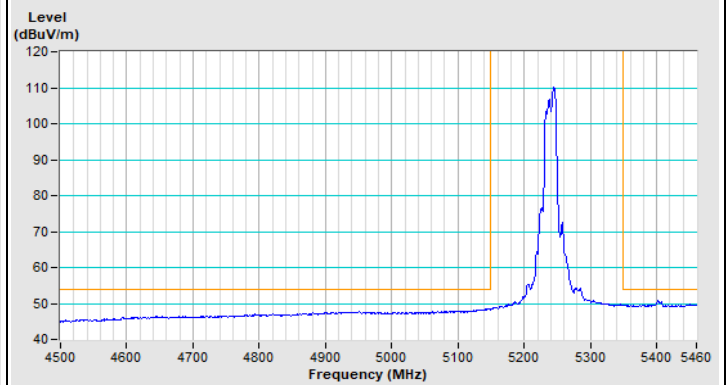

Horizontal (Average)

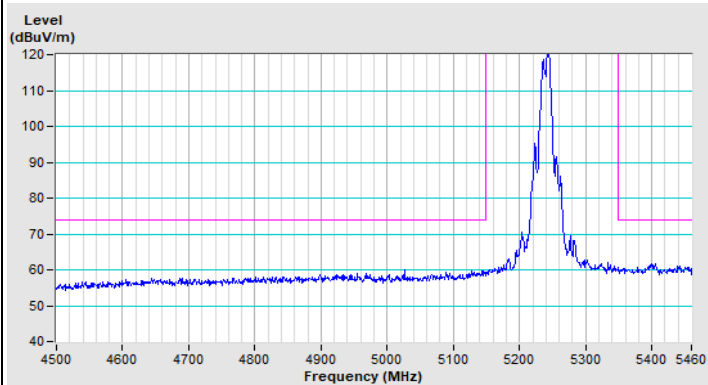


Vertical (Peak)

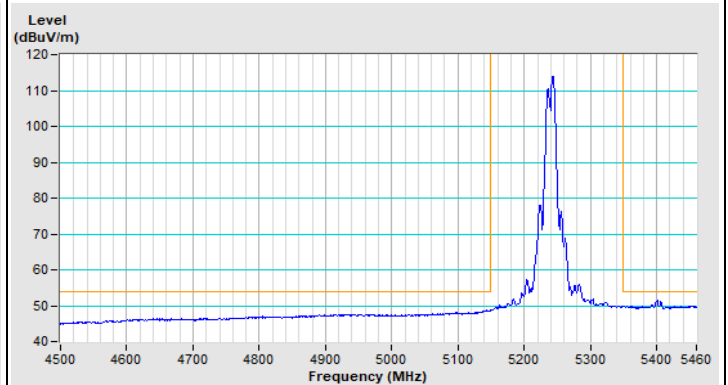


Vertical (Average)


802.11a Channel 52

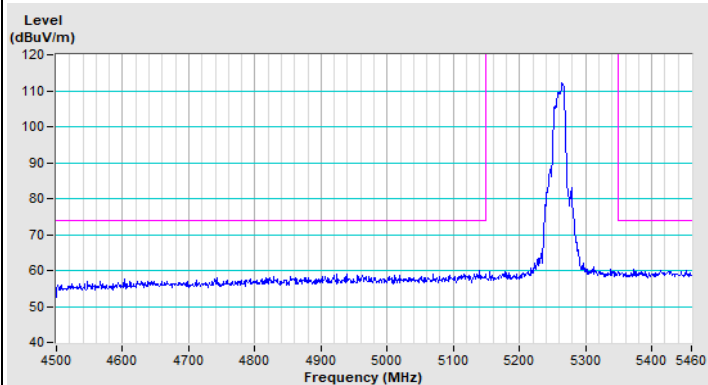


Horizontal (Peak)

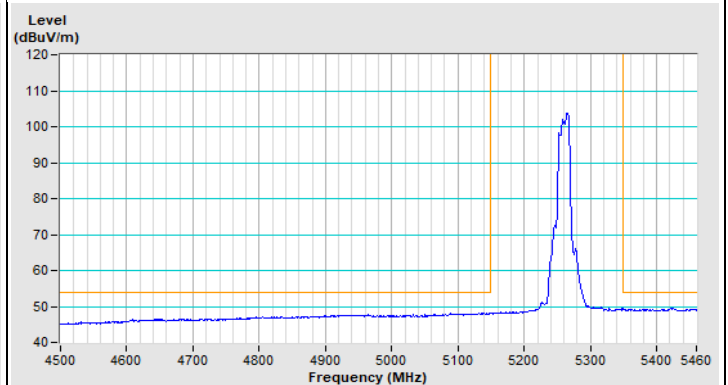

Horizontal (Average)

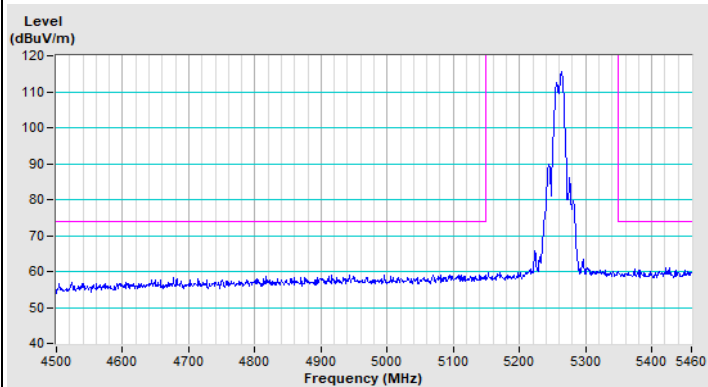


Vertical (Peak)

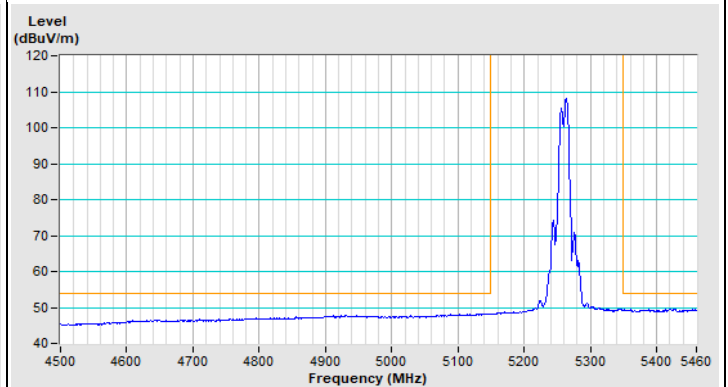


Vertical (Average)


802.11a Channel 64

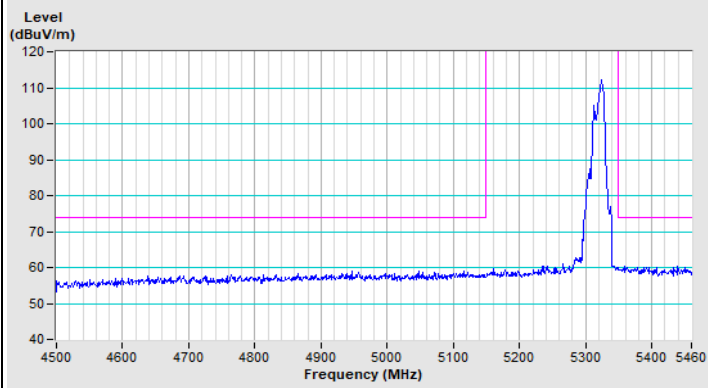


Horizontal (Peak)

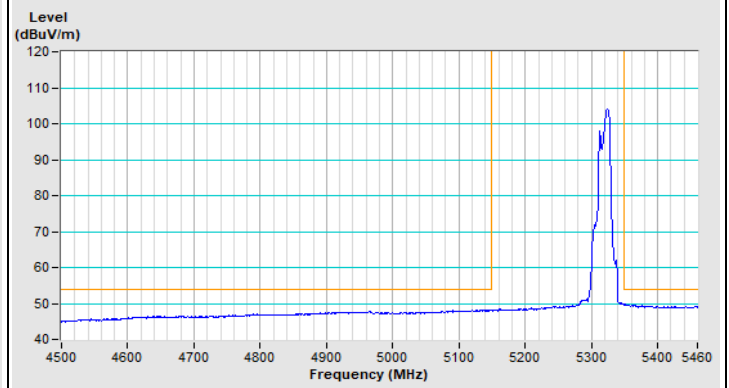

Horizontal (Average)

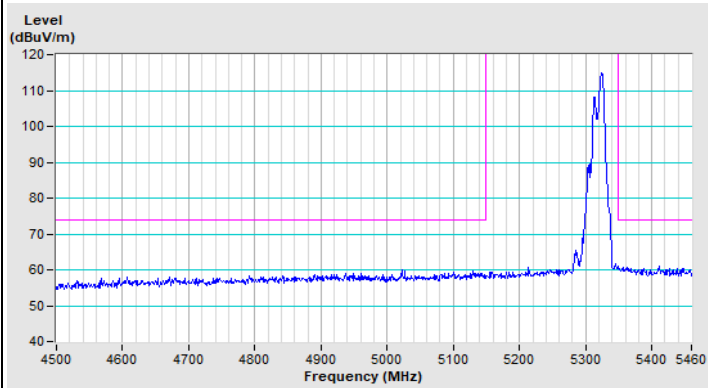


Vertical (Peak)

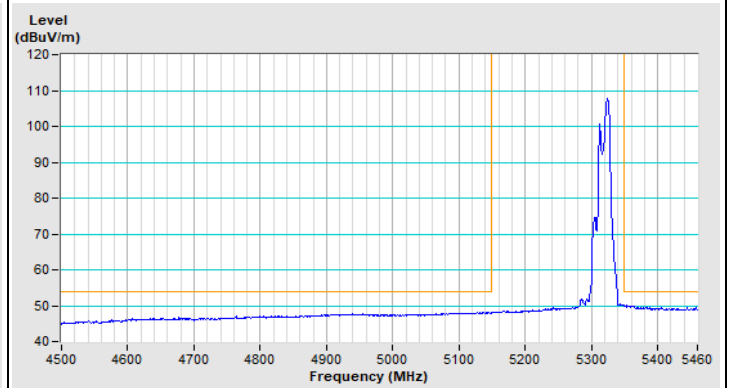


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

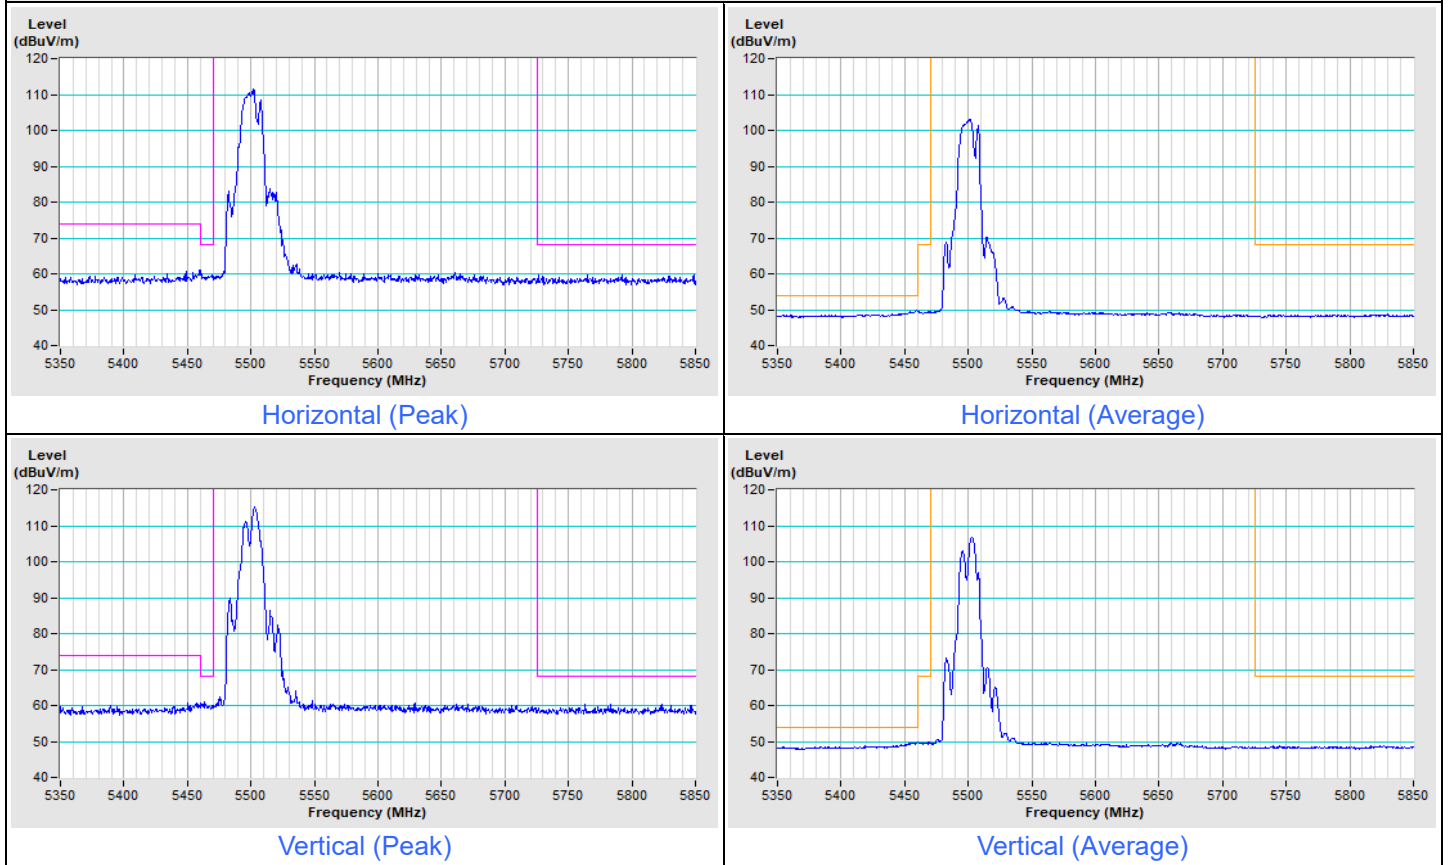



802.11a Channel 140

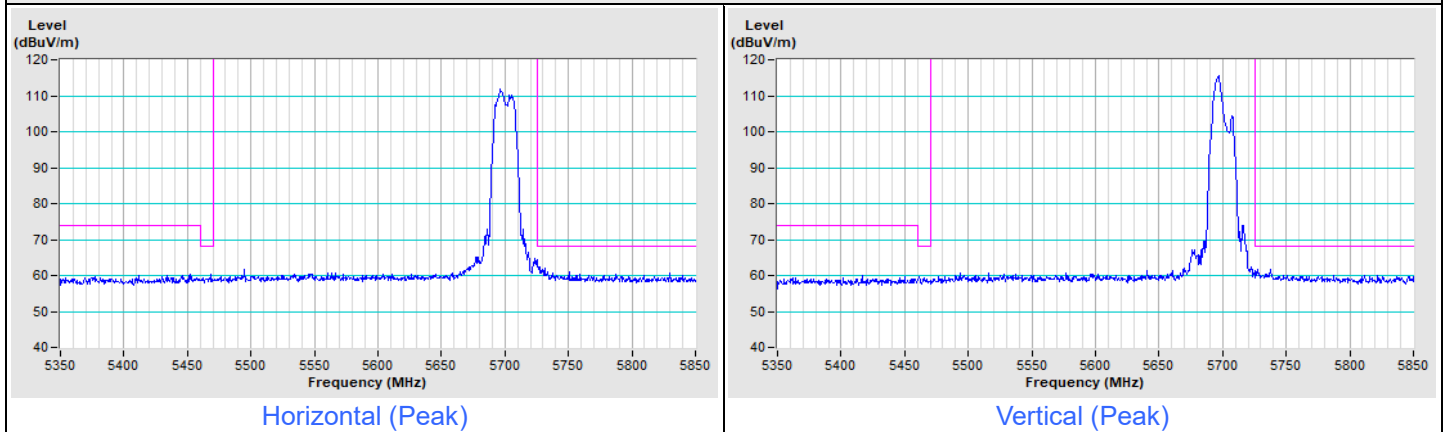


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

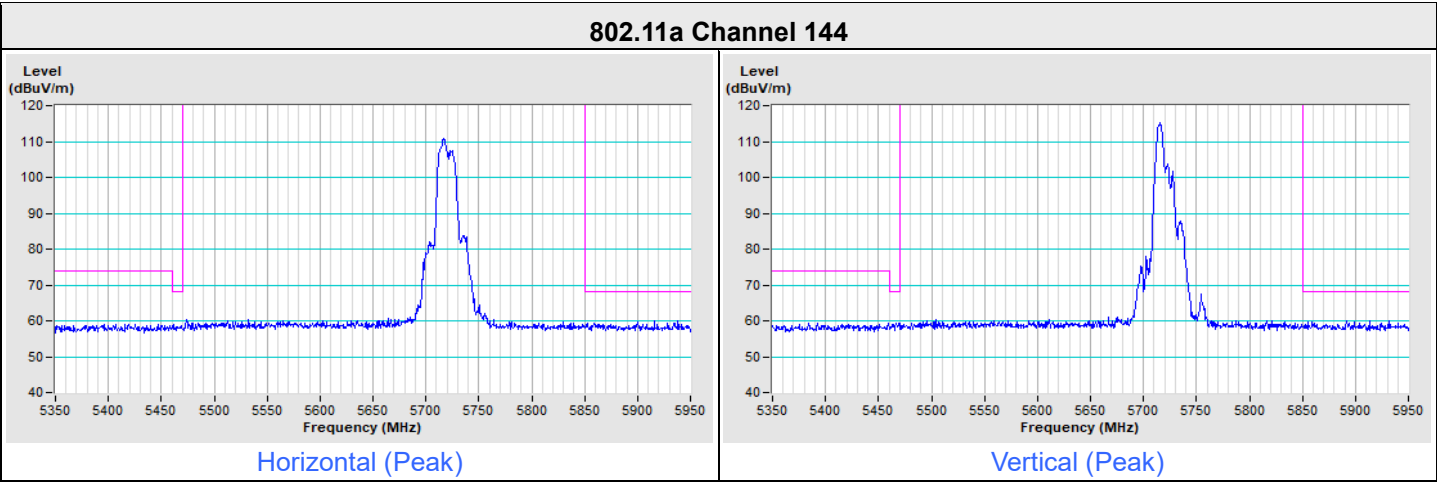


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

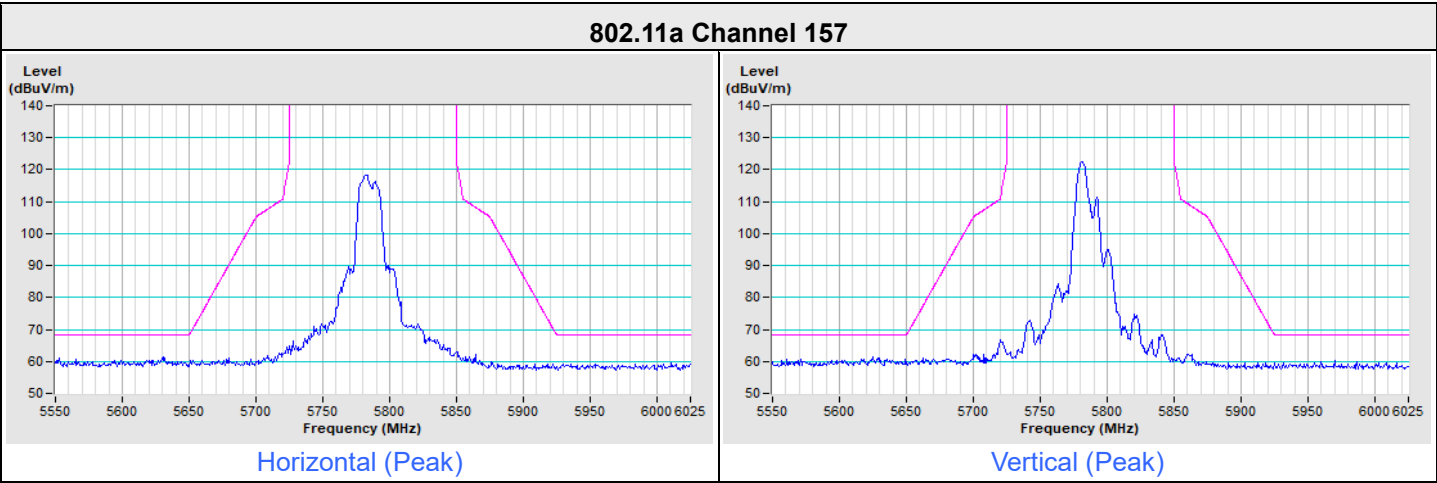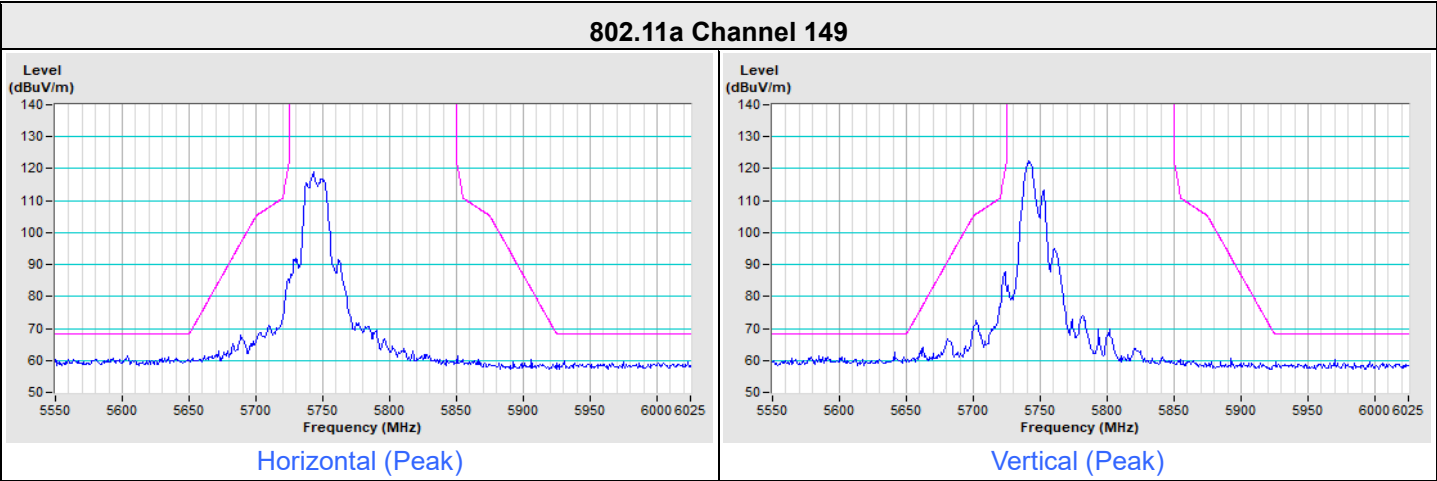

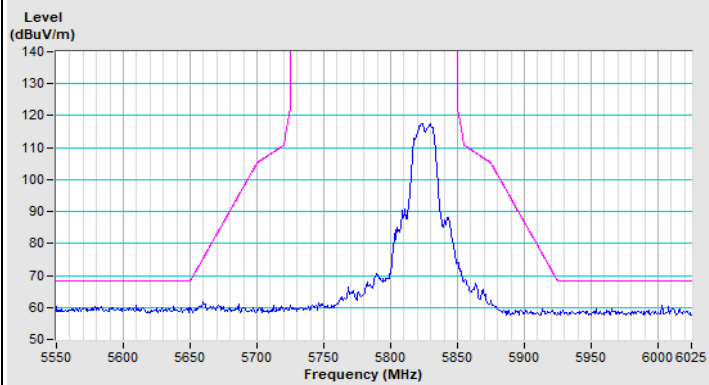802.11a Channel 165


Horizontal (Peak)

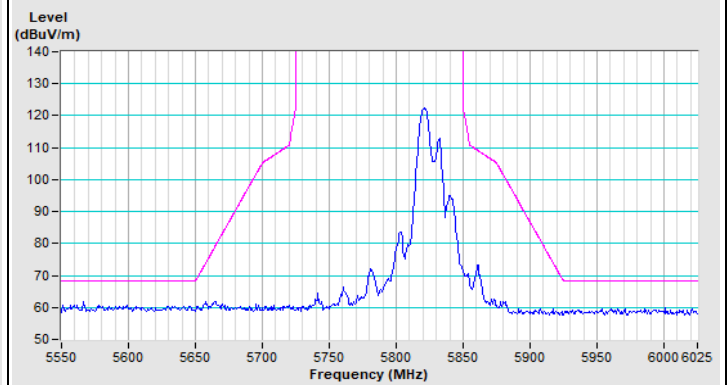


Vertical (Peak)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 36

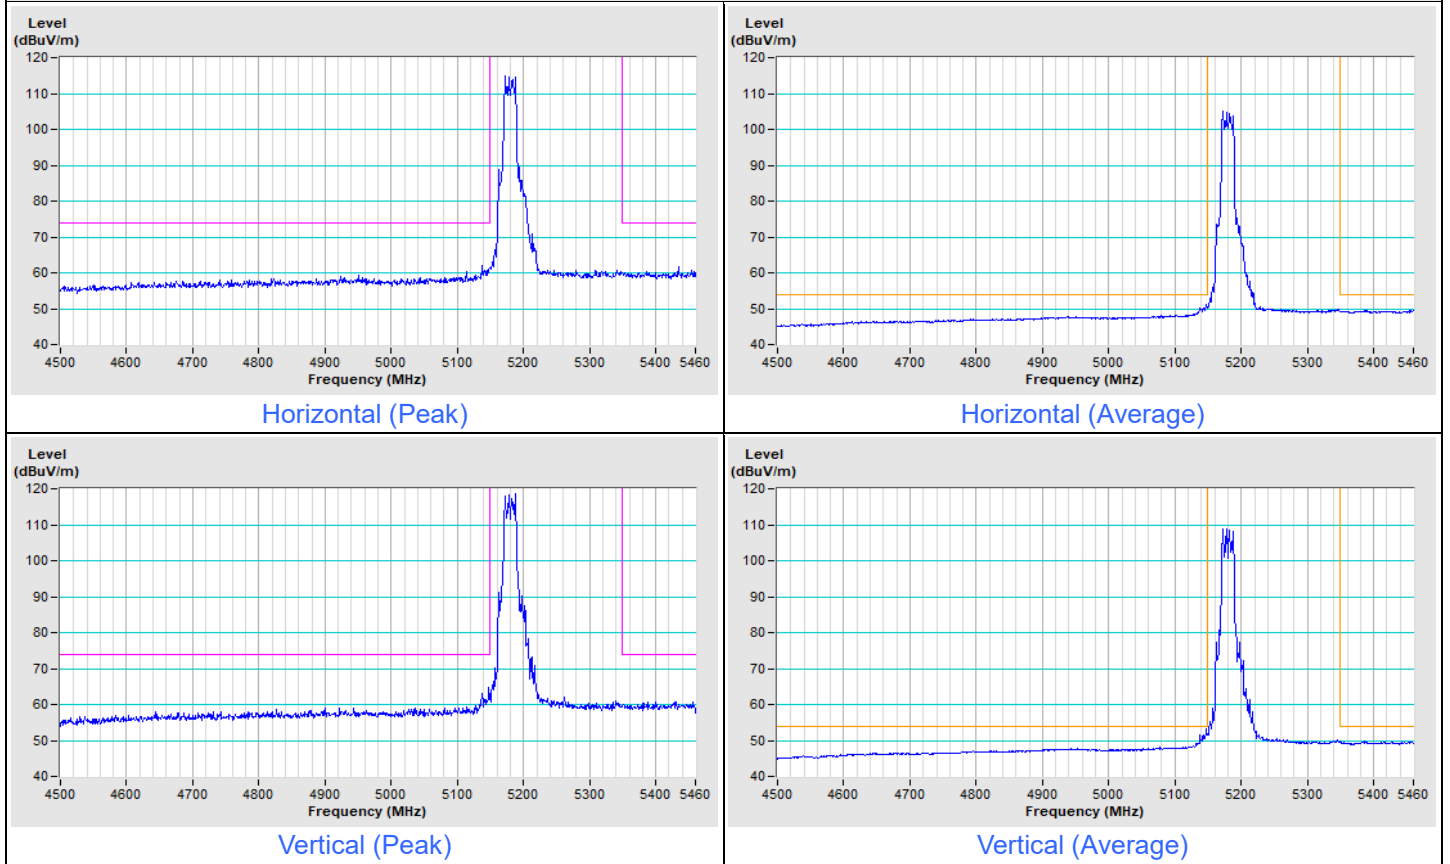


802.11be (EHT20) Channel 48

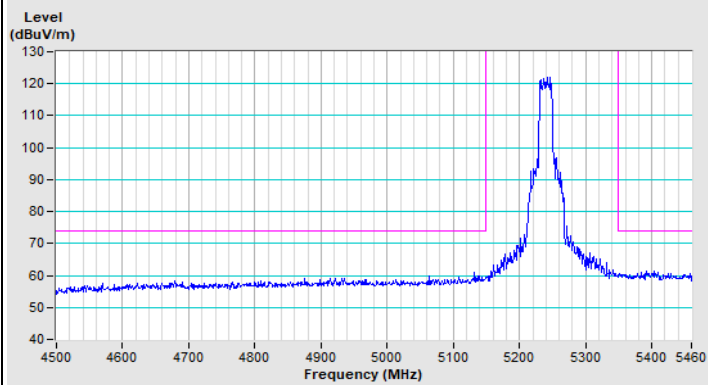


Horizontal (Peak)

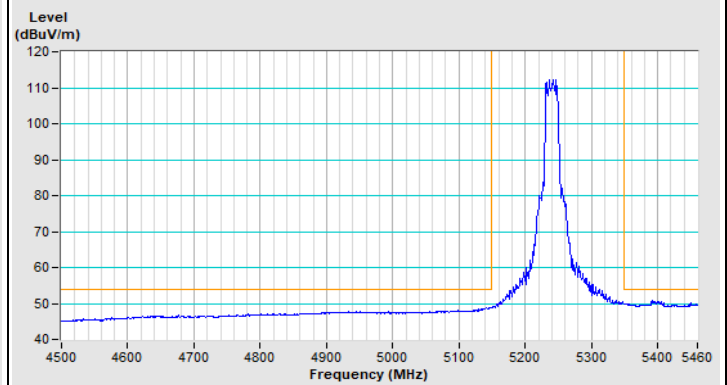

Horizontal (Average)

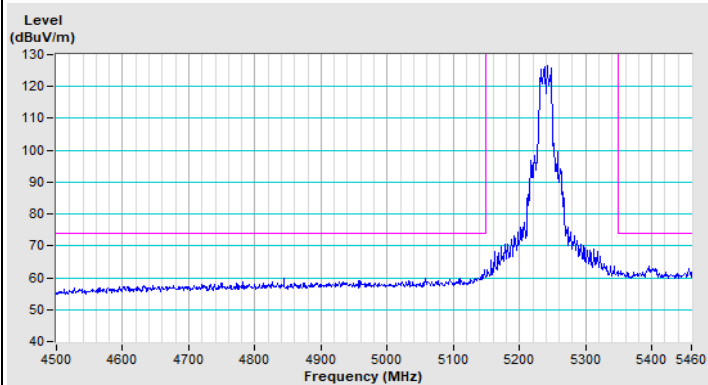


Vertical (Peak)

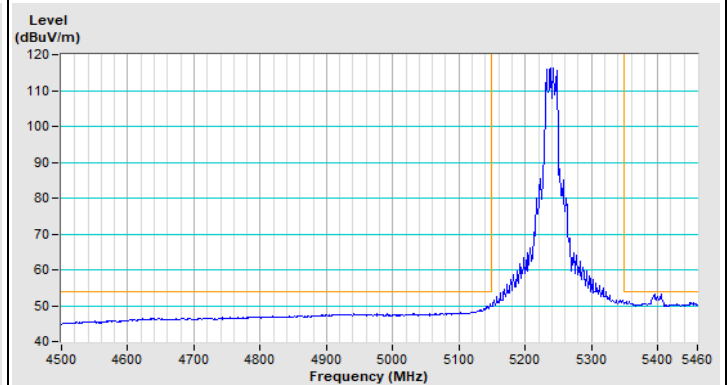


Vertical (Average)


802.11be (EHT20) Channel 52

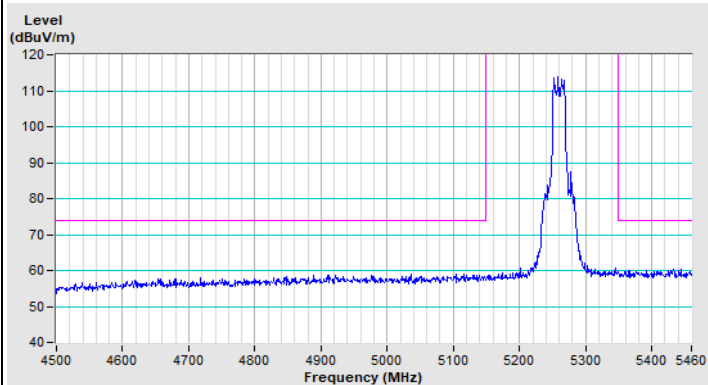


Horizontal (Peak)

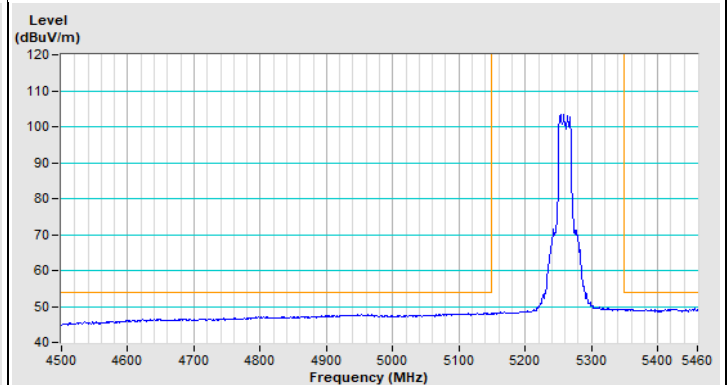

Horizontal (Average)

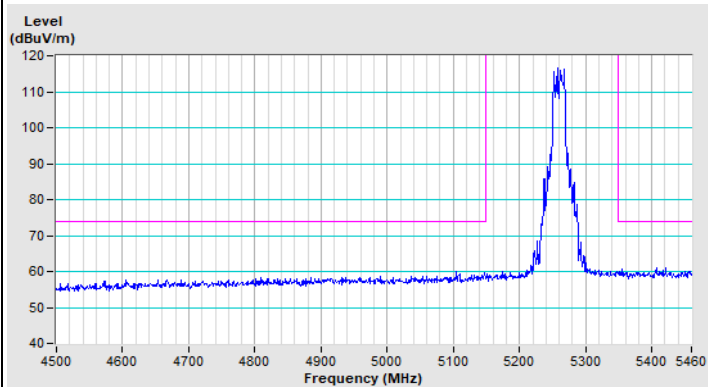


Vertical (Peak)

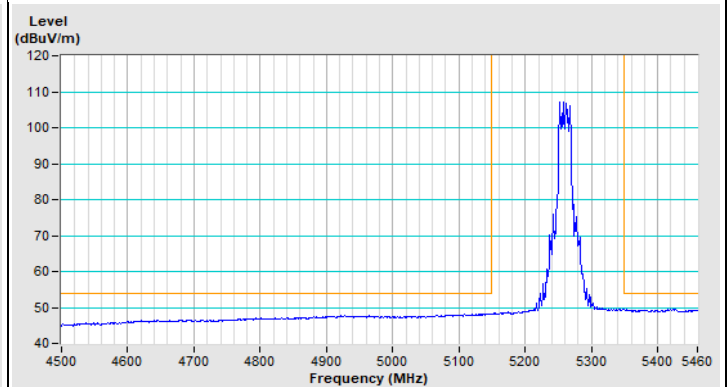


Vertical (Average)


802.11be (EHT20) Channel 64

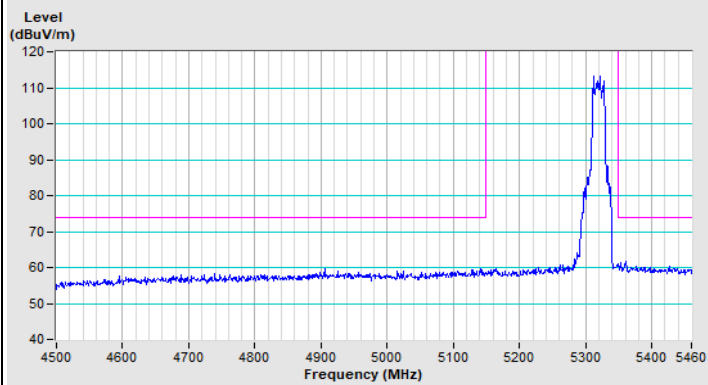


Horizontal (Peak)

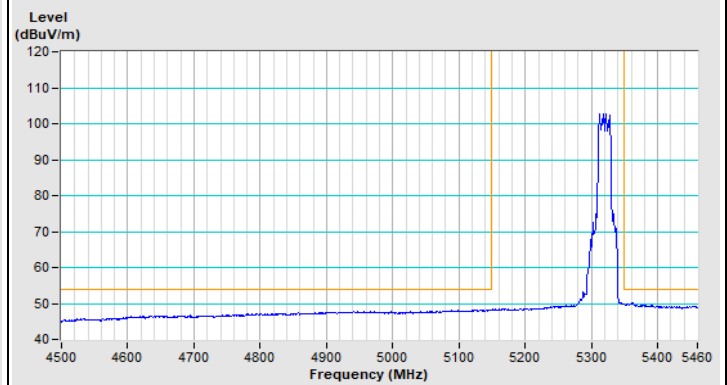

Horizontal (Average)

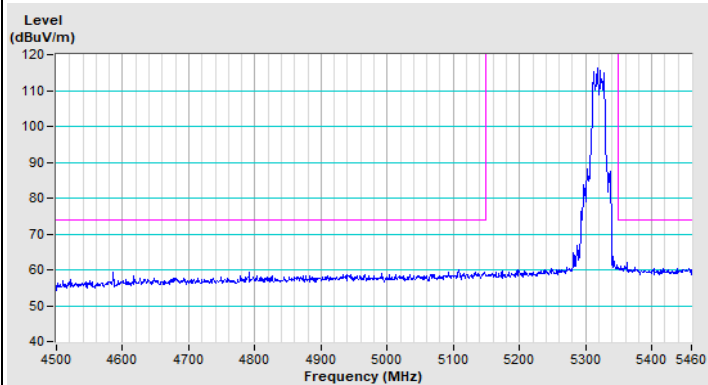


Vertical (Peak)

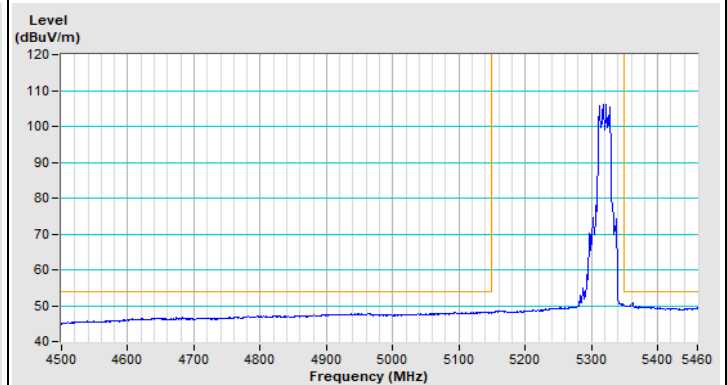


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 100

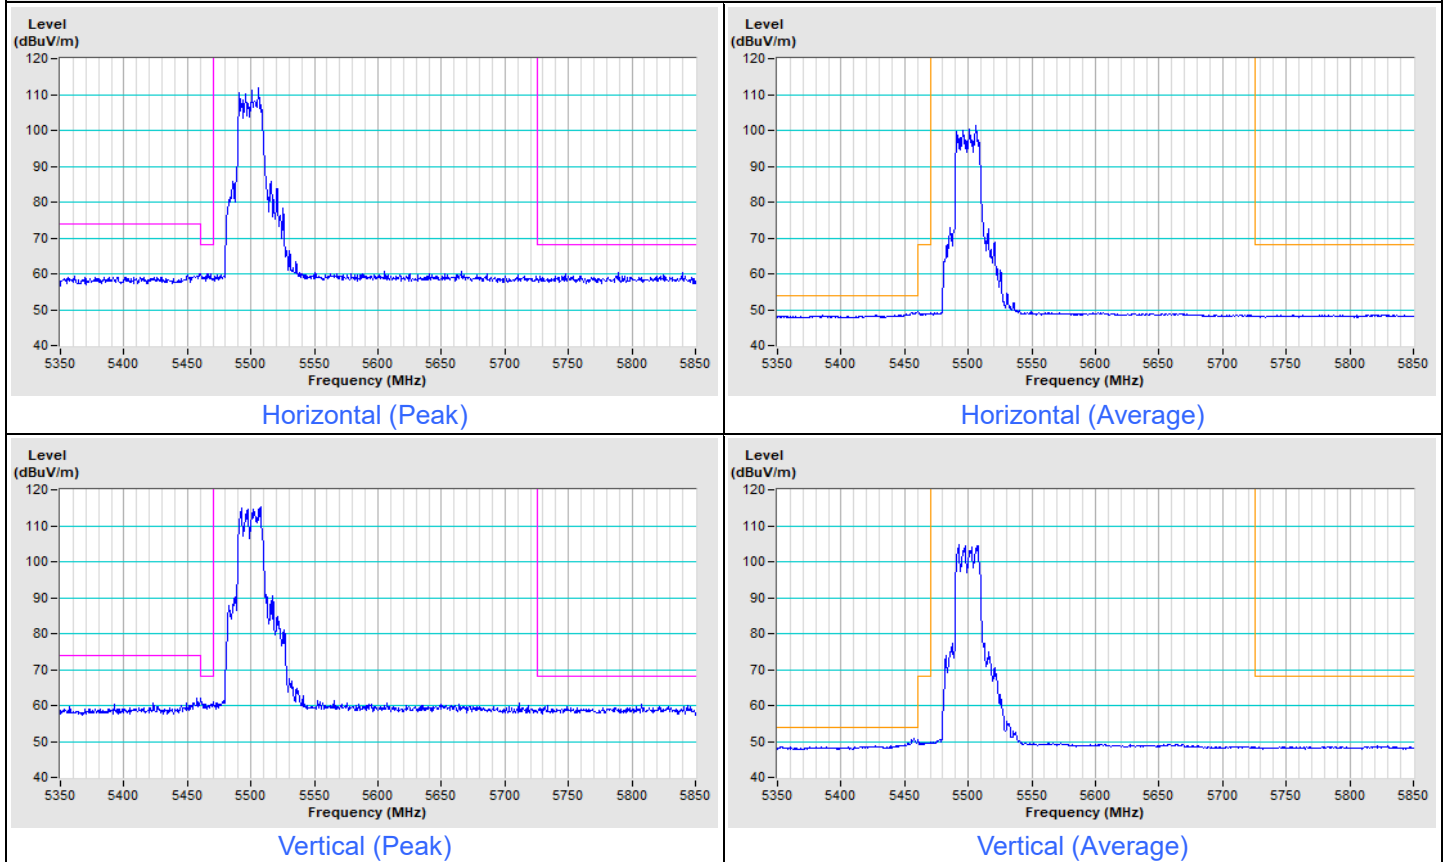


802.11be (EHT20) Channel 140

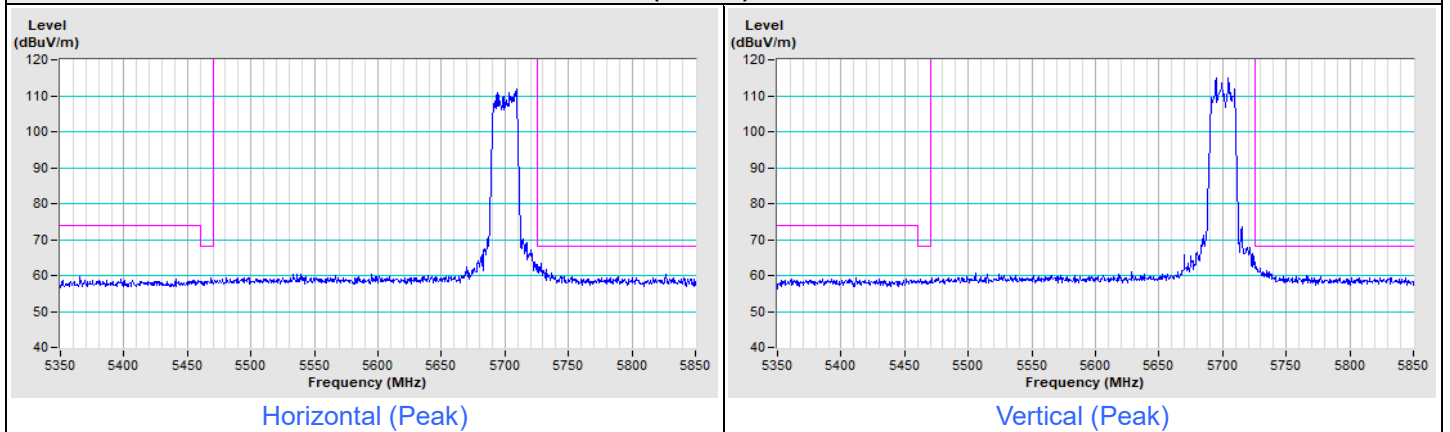


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) Channel 144

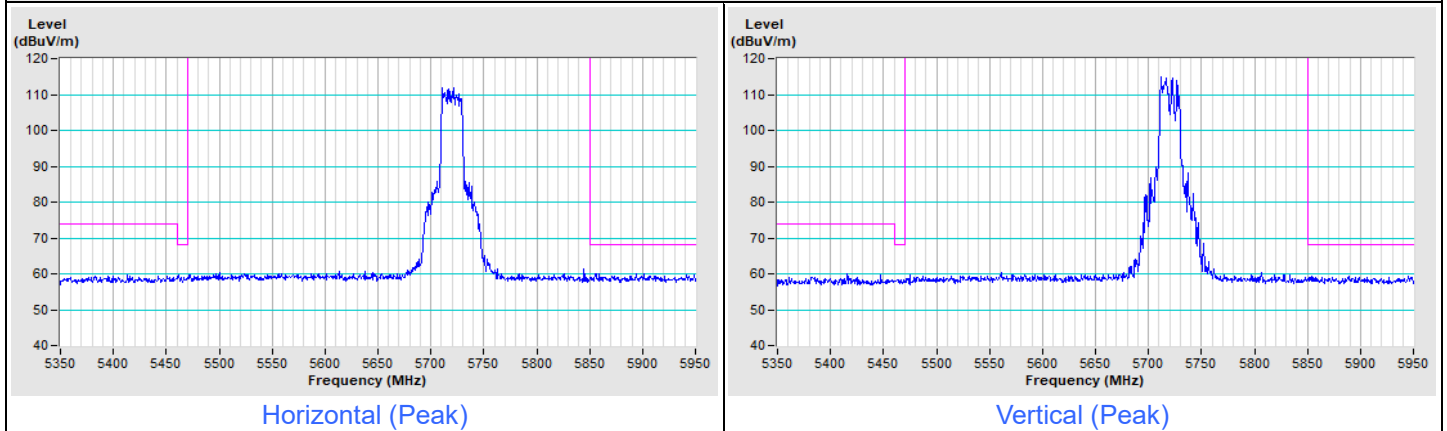



Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT20) Channel 149

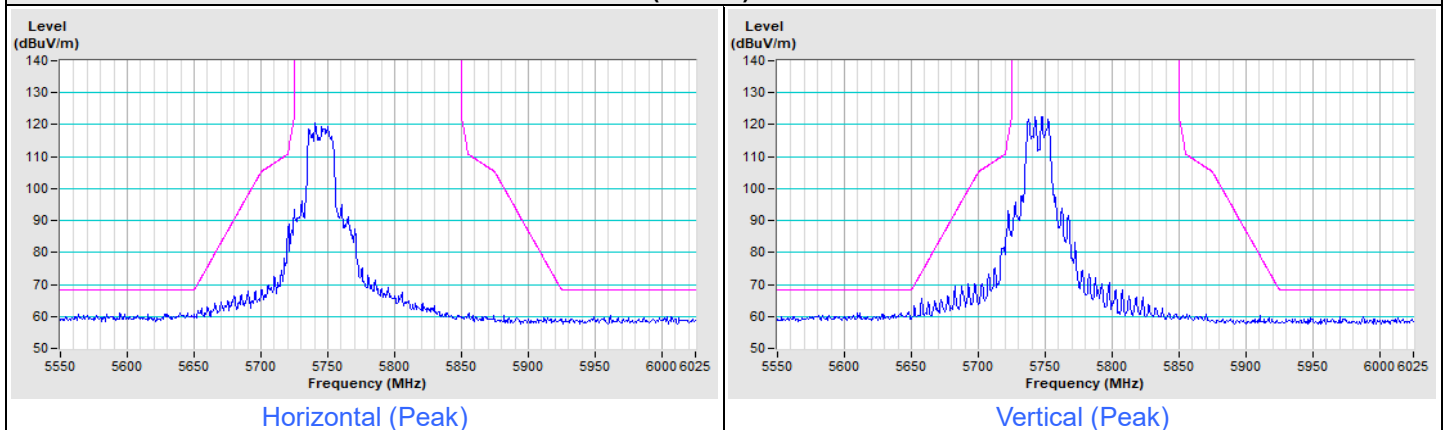


802.11be (EHT20) Channel 157

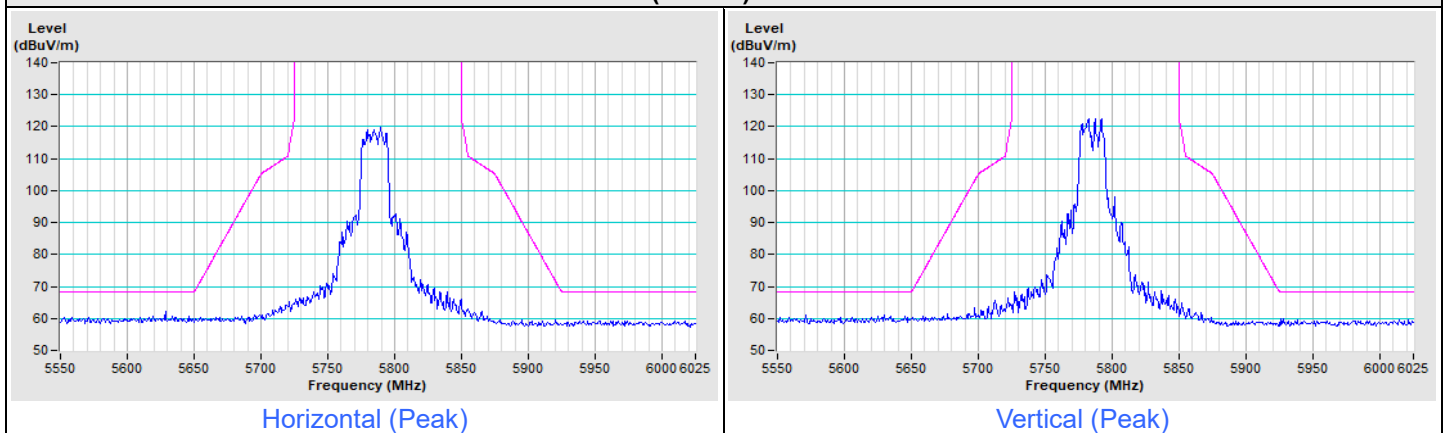

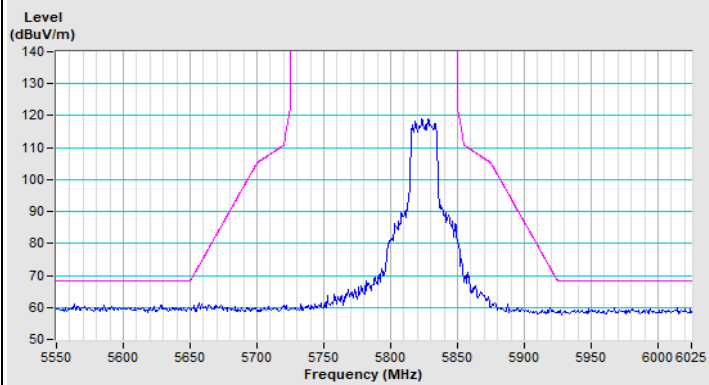802.11be (EHT20) Channel 165


Horizontal (Peak)

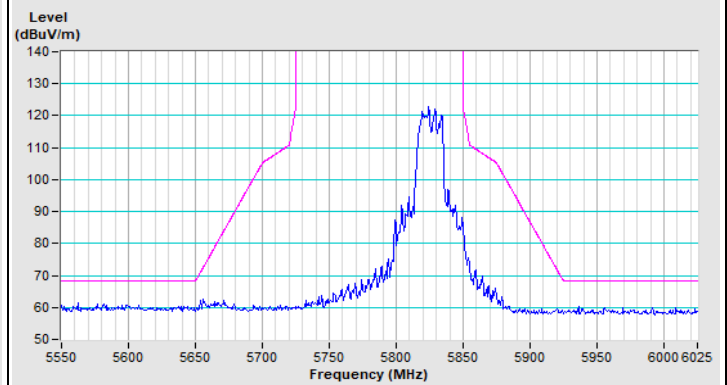


Vertical (Peak)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 38

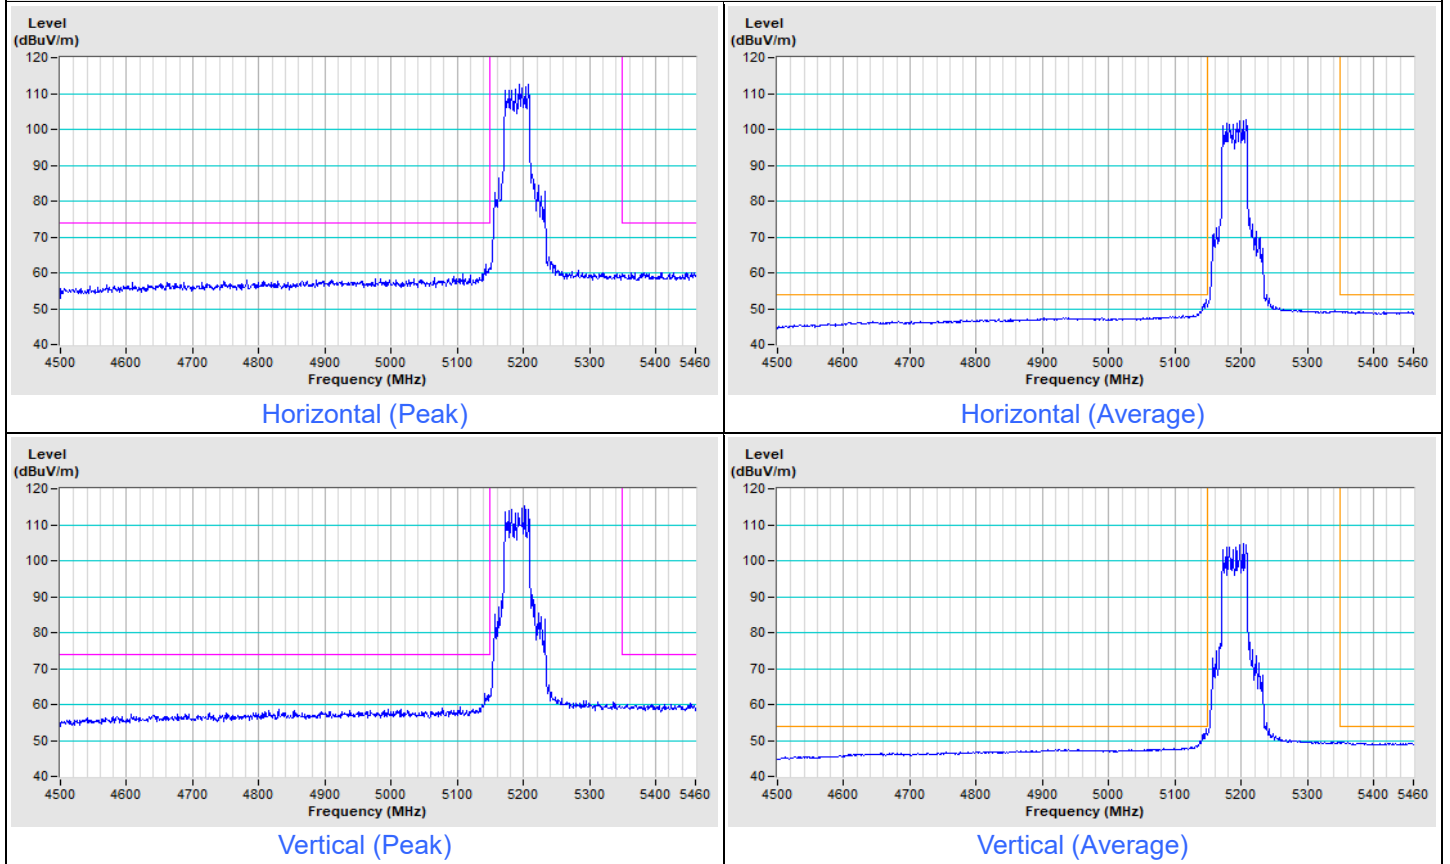


802.11be (EHT40) Channel 46

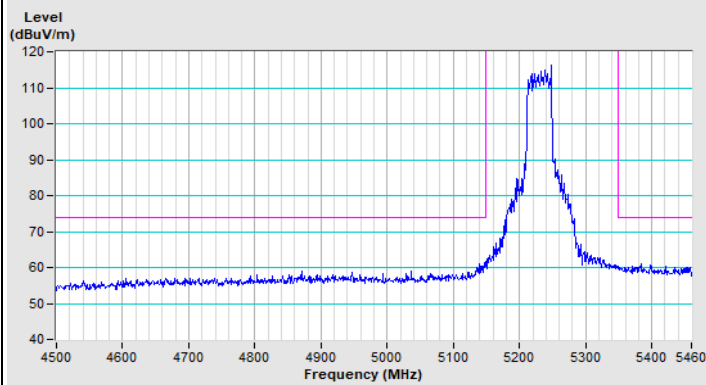


Horizontal (Peak)

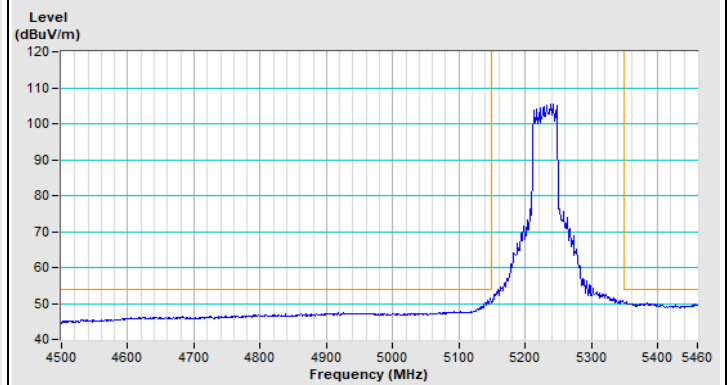

Horizontal (Average)

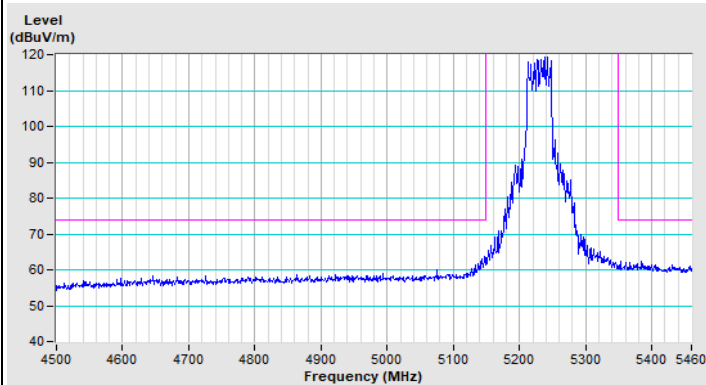


Vertical (Peak)

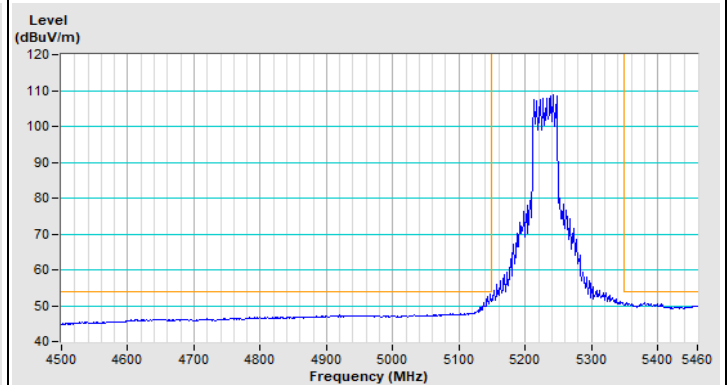


Vertical (Average)


802.11be (EHT40) Channel 54

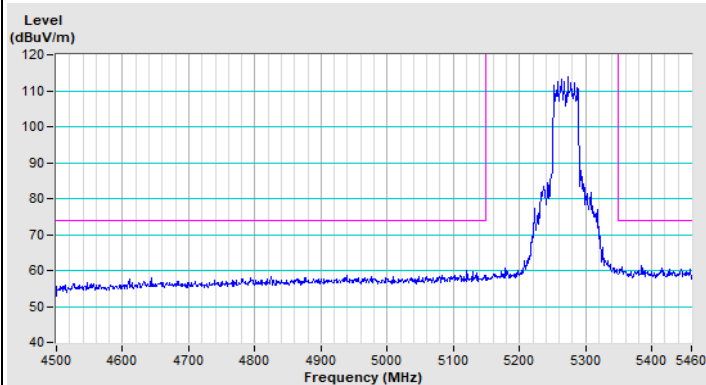


Horizontal (Peak)

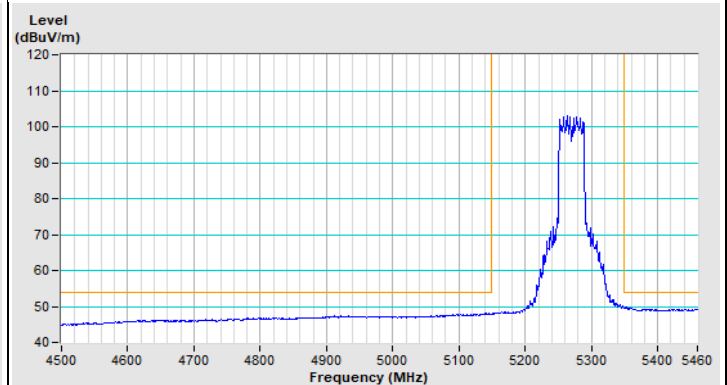

Horizontal (Average)

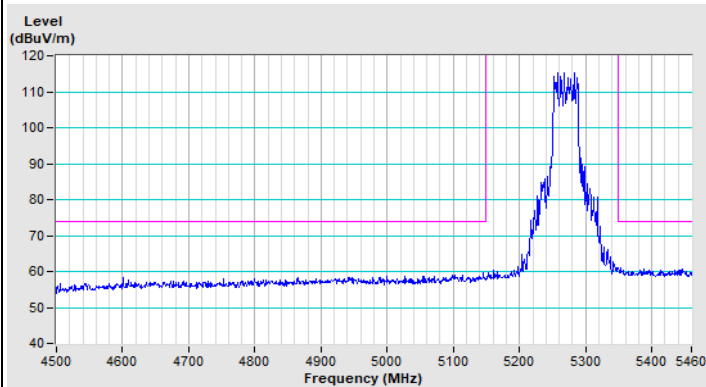


Vertical (Peak)

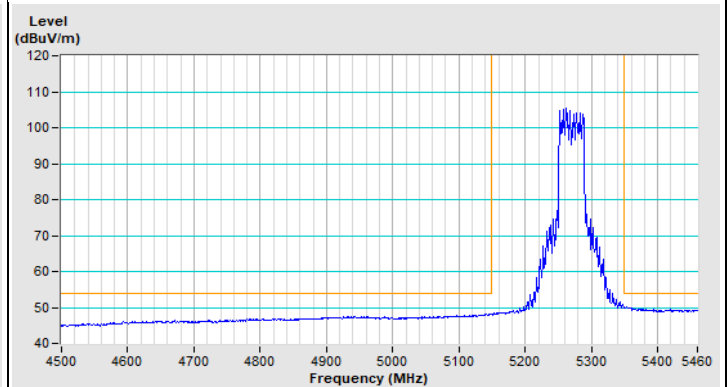


Vertical (Average)


802.11be (EHT40) Channel 62

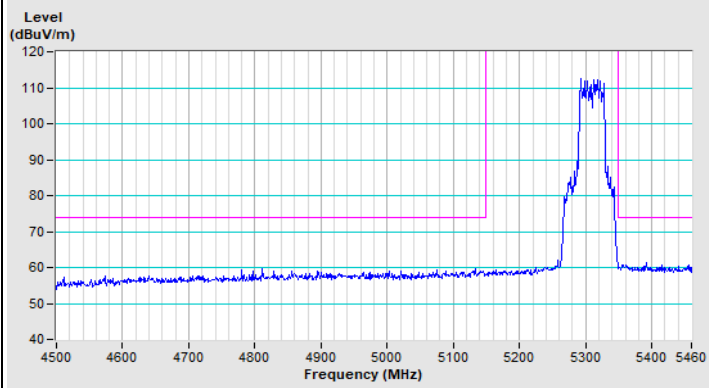


Horizontal (Peak)

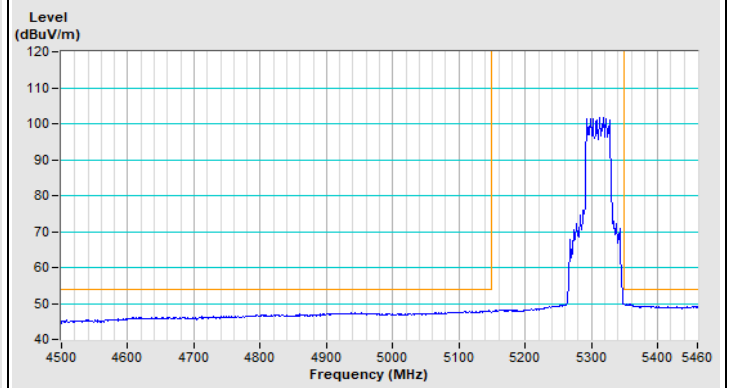

Horizontal (Average)

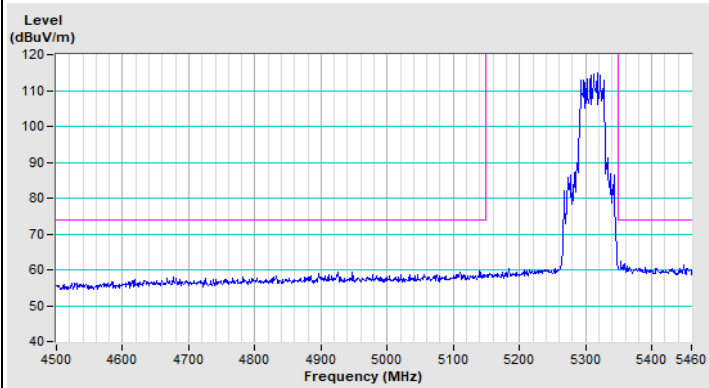


Vertical (Peak)

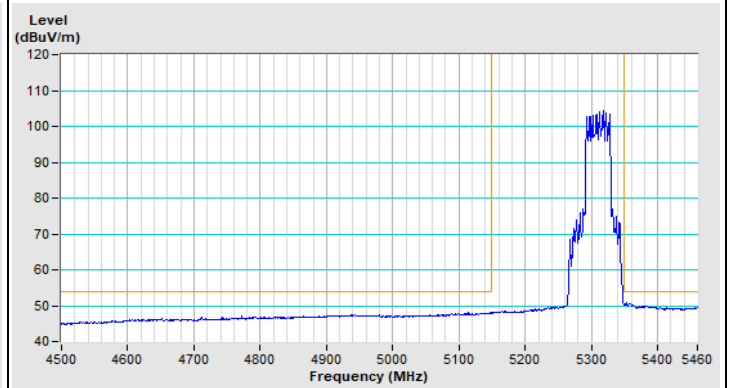


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

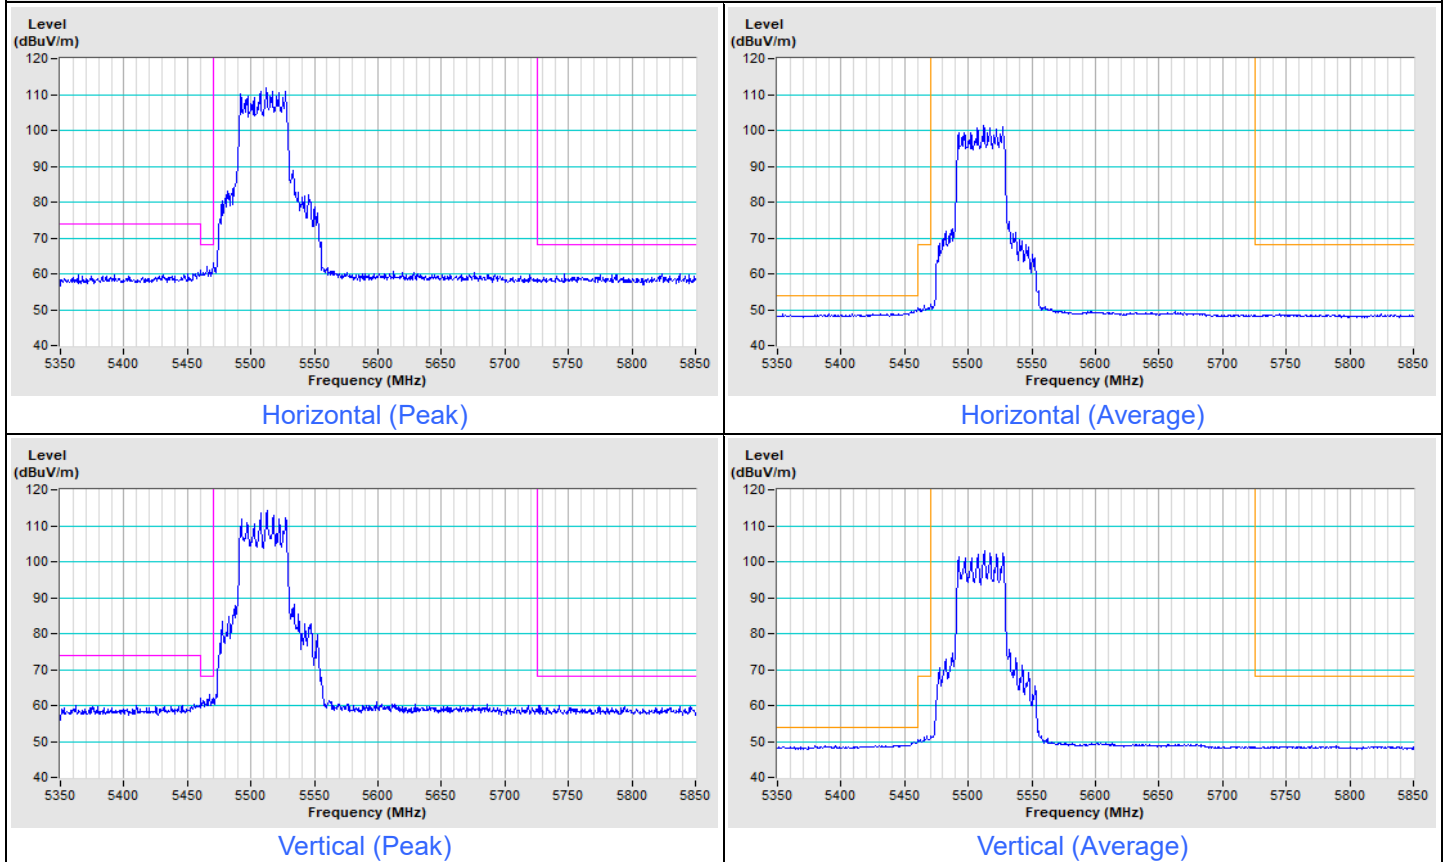


802.11be (EHT40) Channel 134

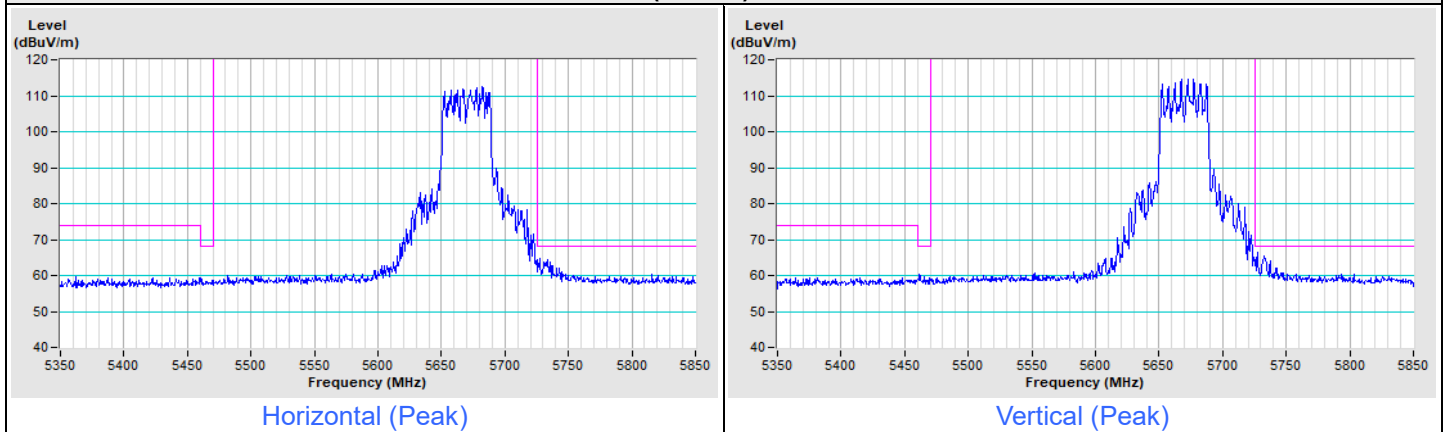


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

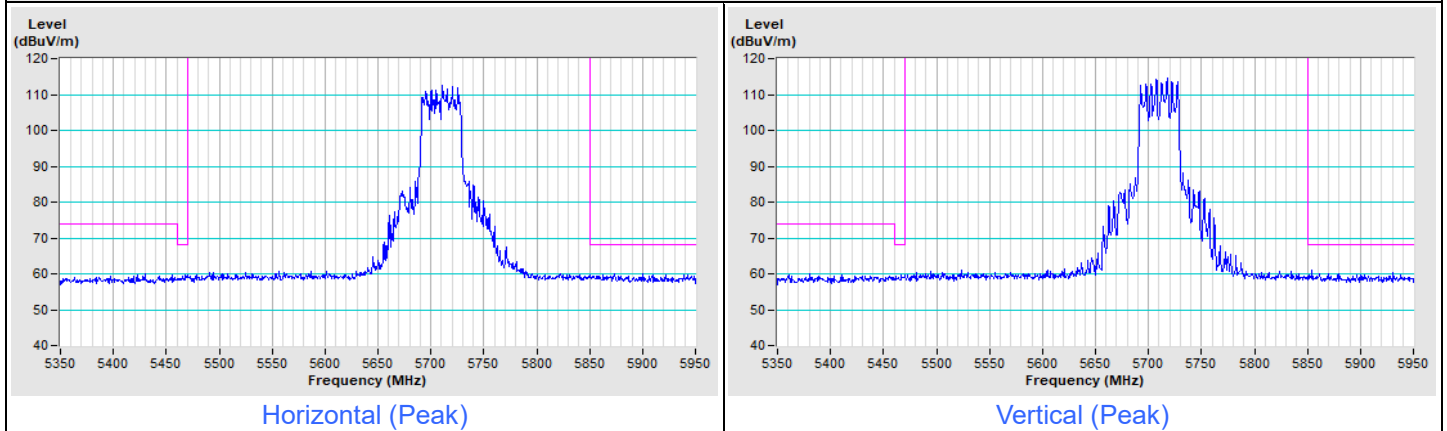


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

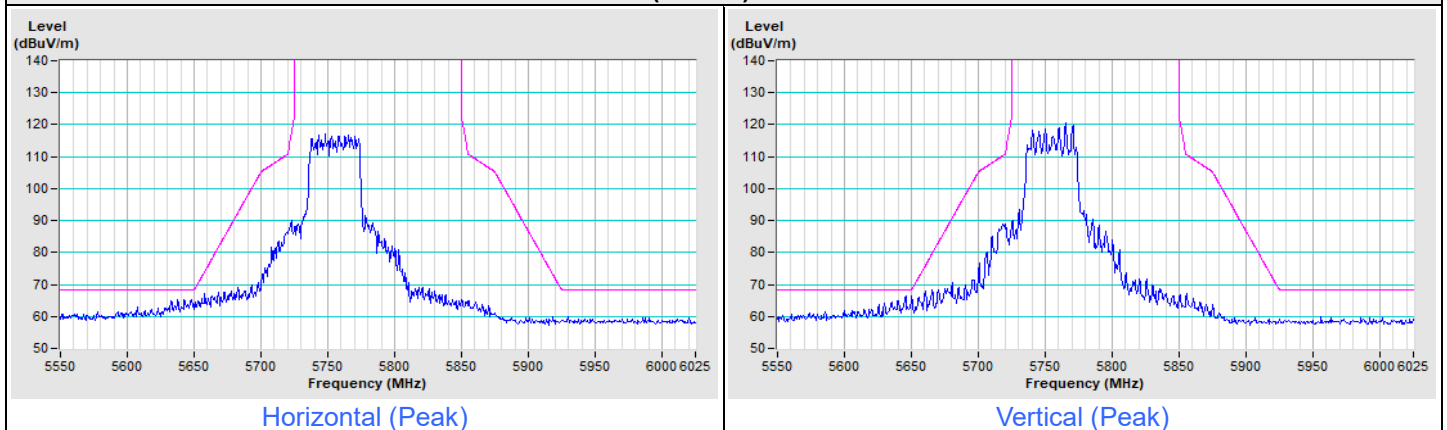


802.11be (EHT40) Channel 159

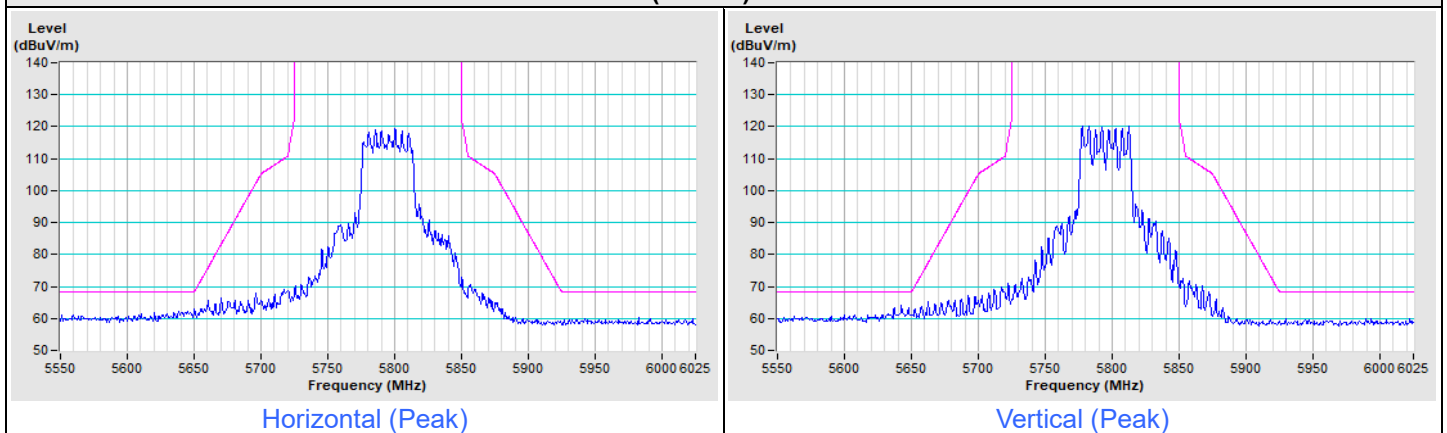


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

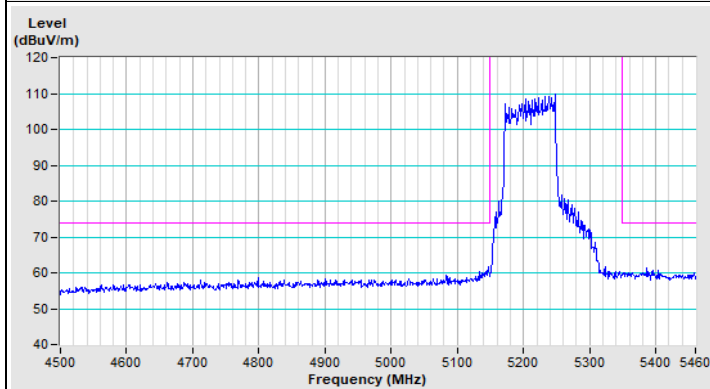


Horizontal (Peak)

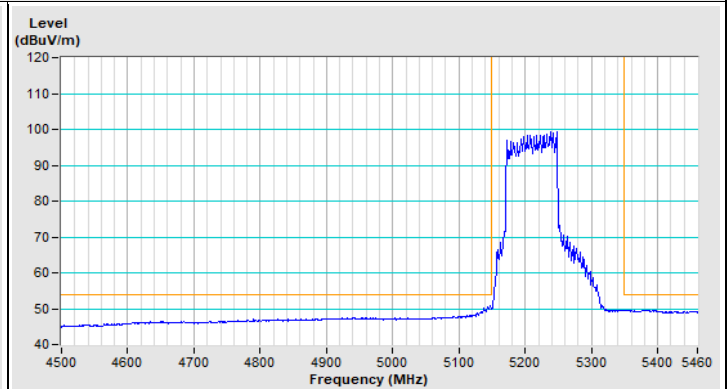

Horizontal (Average)

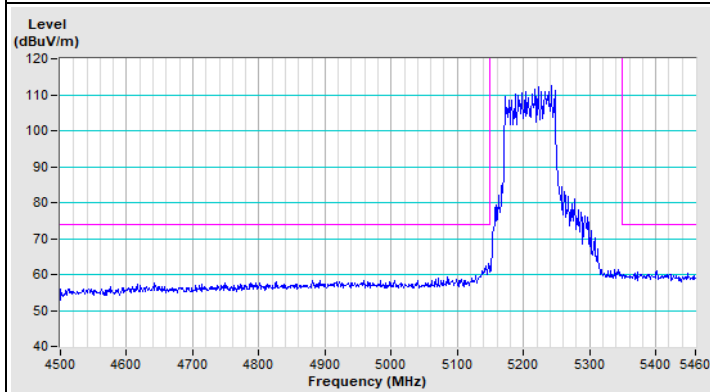


Vertical (Peak)

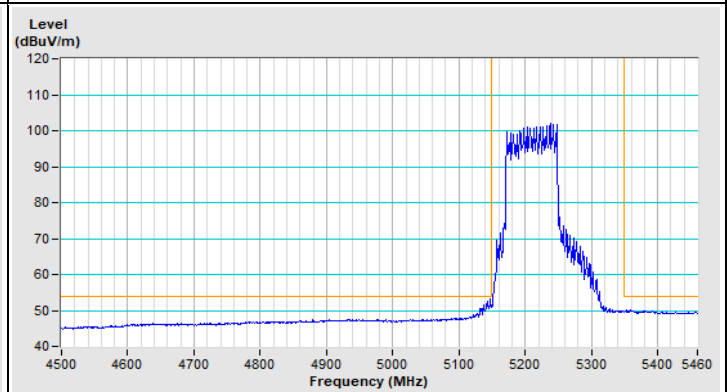


Vertical (Average)


802.11be (EHT80) Channel 58

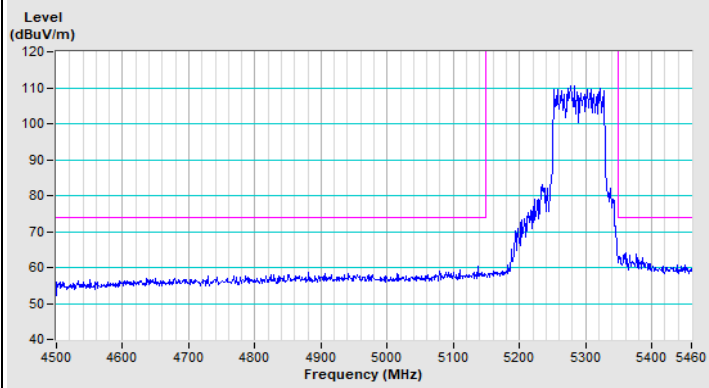


Horizontal (Peak)

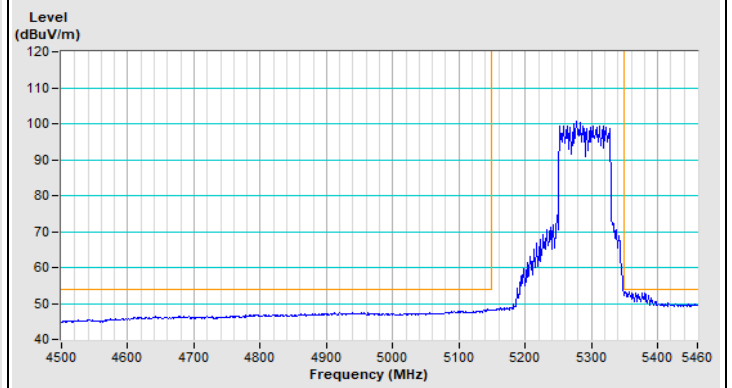

Horizontal (Average)

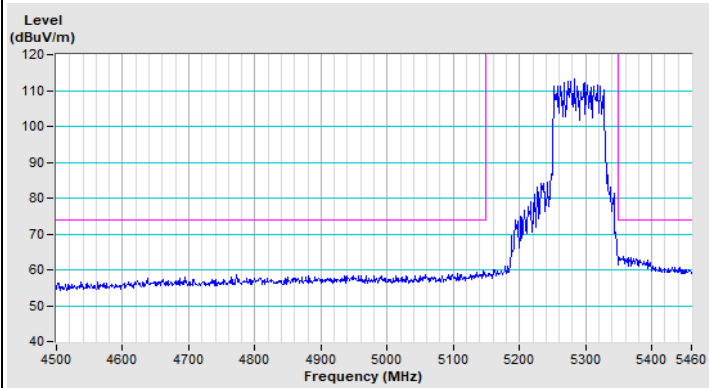


Vertical (Peak)

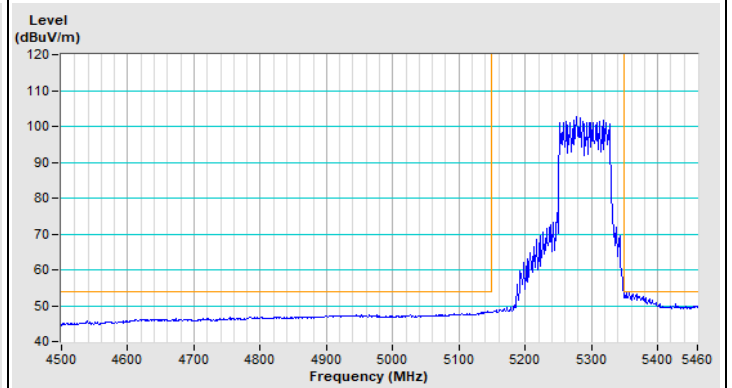


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 106

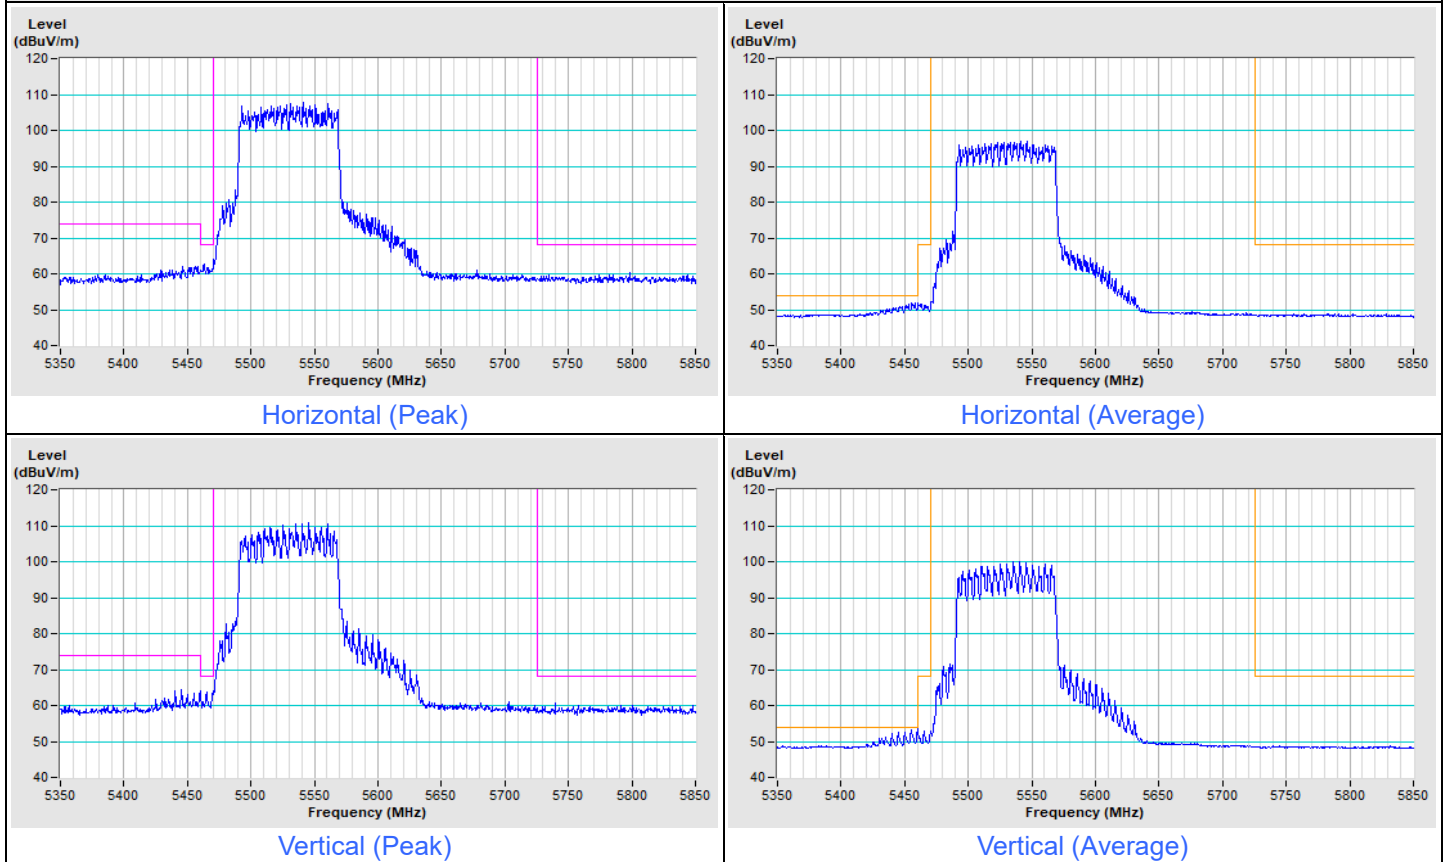


802.11be (EHT80) Channel 122

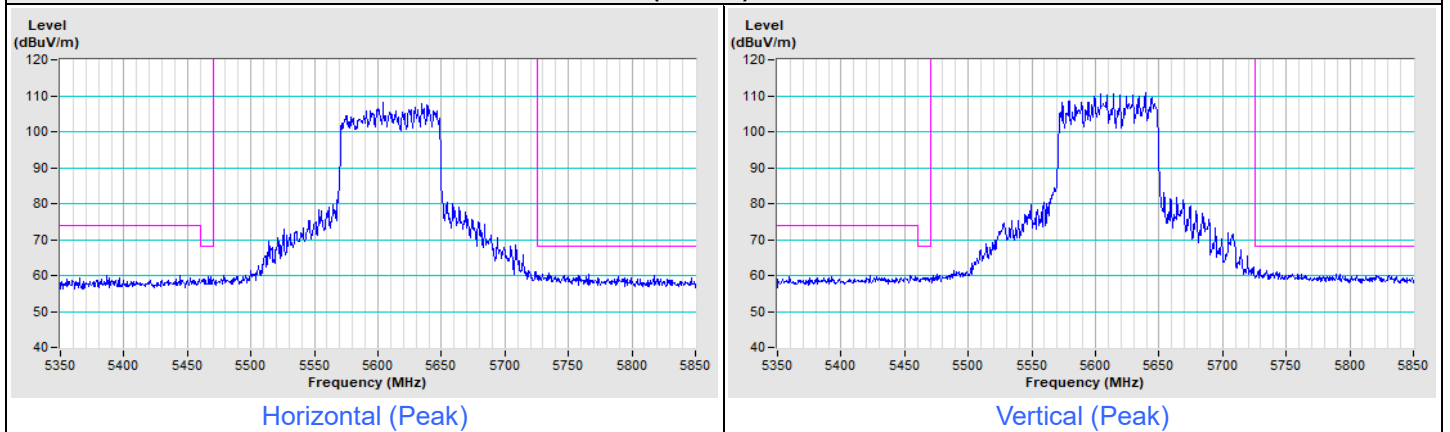


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

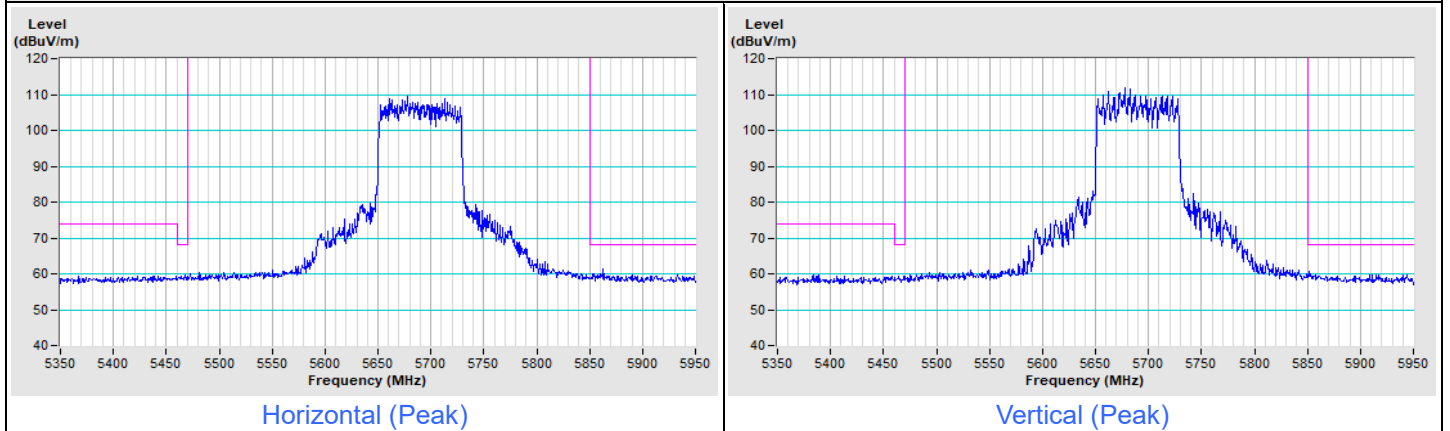


Frequency Range	5.55 GHz ~ 6.025 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	----------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

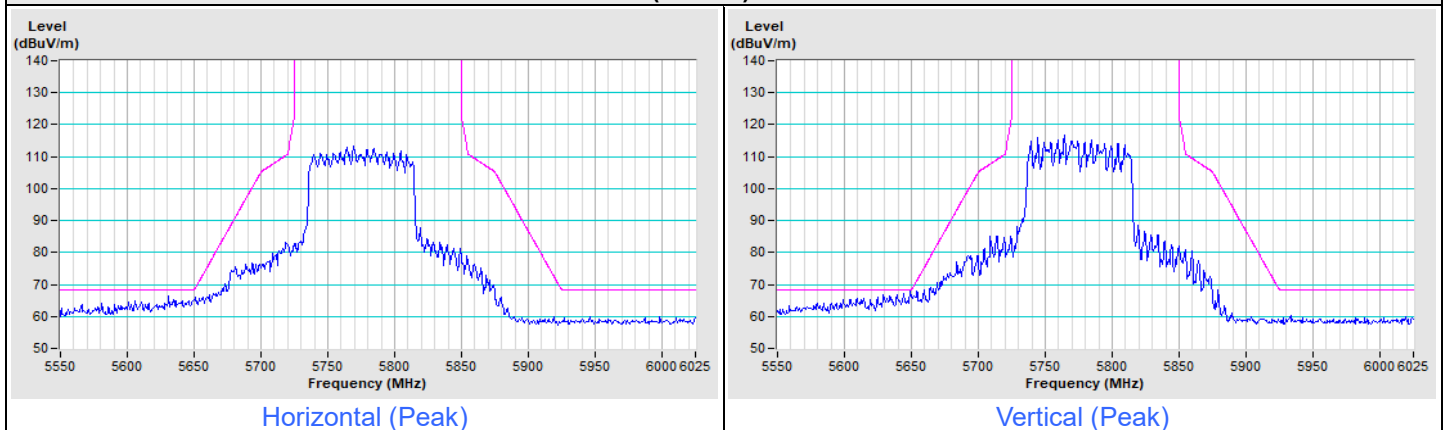


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

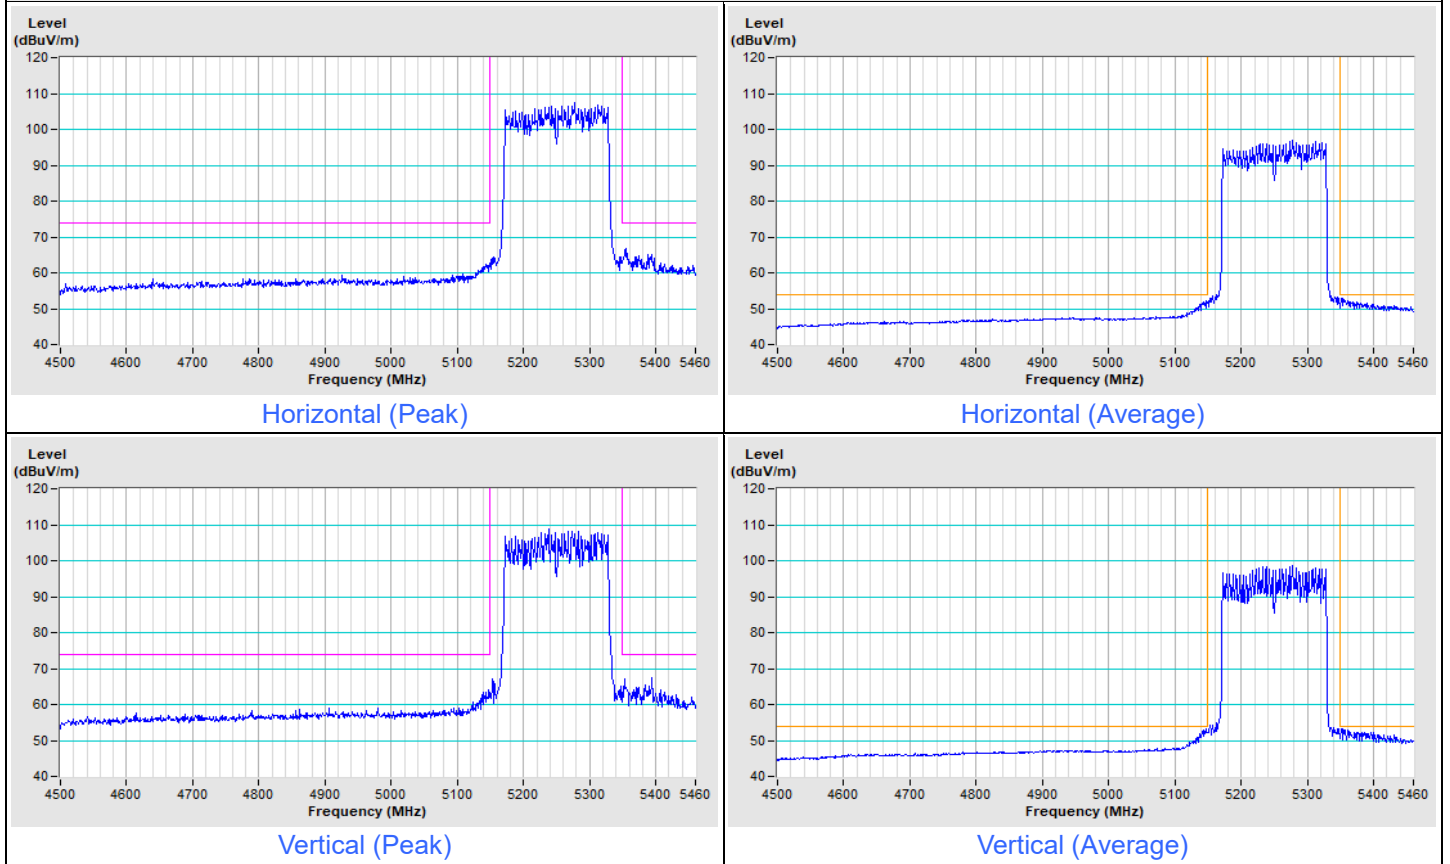

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

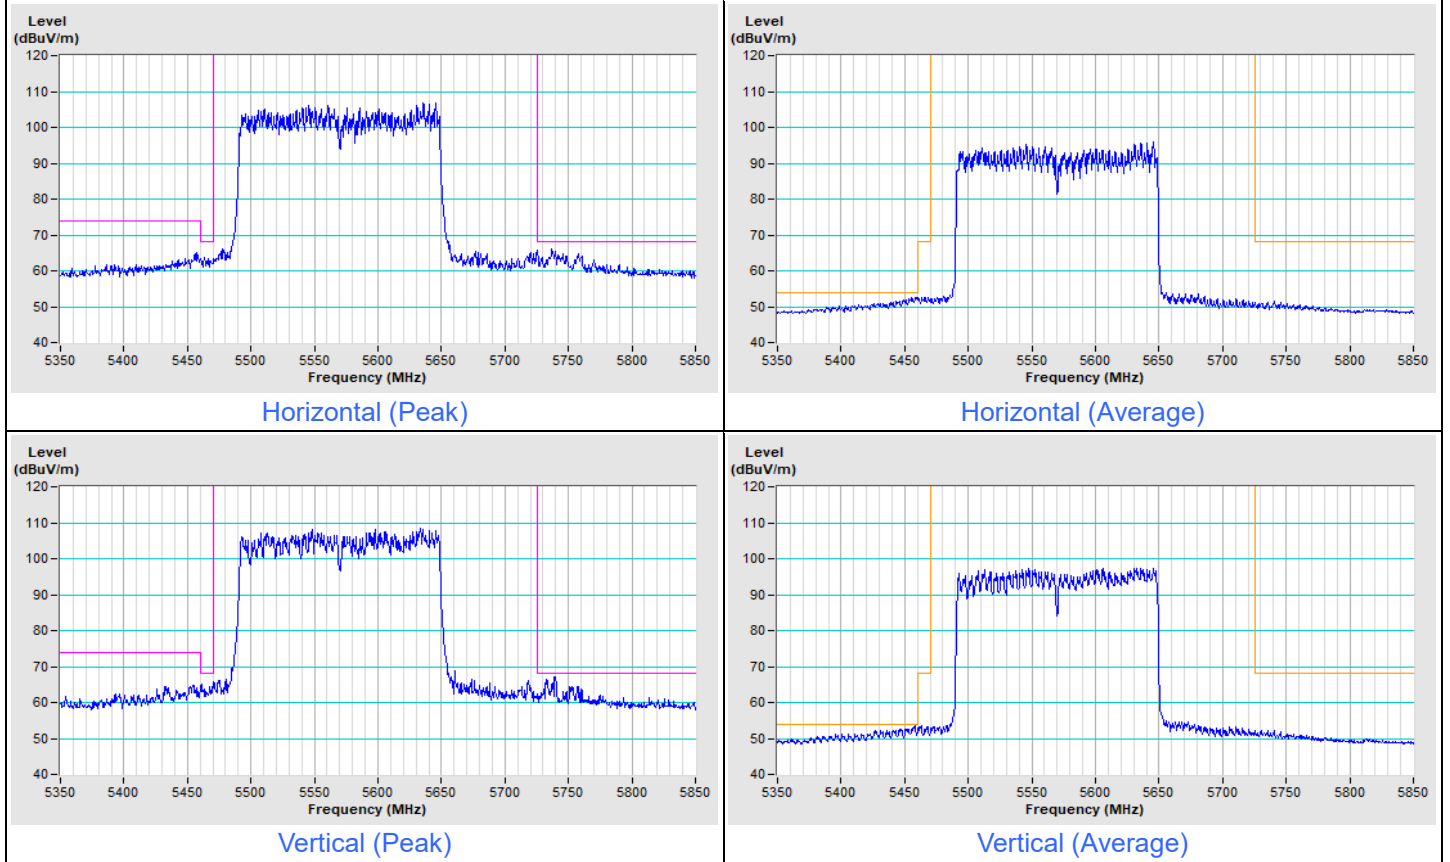

Beamforming Mode

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.7 PK	74.0	-14.3	1.74 H	276	57.1	2.6
2	5150.00	52.8 AV	54.0	-1.2	1.74 H	276	50.2	2.6
3	*5180.00	112.9 PK			1.74 H	276	72.1	40.8
4	*5180.00	103.4 AV			1.74 H	276	62.6	40.8
5	#10360.00	54.7 PK	68.2	-13.5	2.17 H	136	45.2	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.2 PK	74.0	-11.8	2.91 V	13	59.6	2.6
2	5150.00	53.6 AV	54.0	-0.4	2.91 V	13	51.0	2.6
3	*5180.00	118.3 PK			2.91 V	13	77.5	40.8
4	*5180.00	107.9 AV			2.91 V	13	67.1	40.8
5	#10360.00	55.1 PK	68.2	-13.1	1.72 V	300	45.6	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	113.4 PK			1.74 H	279	72.6	40.8
2	*5200.00	103.9 AV			1.74 H	279	63.1	40.8
3	5350.00	56.6 PK	74.0	-17.4	1.74 H	279	53.8	2.8
4	5350.00	50.4 AV	54.0	-3.6	1.74 H	279	47.6	2.8
5	#10400.00	54.4 PK	68.2	-13.8	2.15 H	133	45.0	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.4 PK			2.63 V	14	77.6	40.8
2	*5200.00	108.3 AV			2.63 V	14	67.5	40.8
3	5350.00	60.7 PK	74.0	-13.3	2.63 V	14	57.9	2.8
4	5350.00	53.8 AV	54.0	-0.2	2.63 V	14	51.0	2.8
5	#10400.00	54.9 PK	68.2	-13.3	1.77 V	305	45.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.9 PK			1.71 H	277	73.0	40.9
2	*5240.00	105.0 AV			1.71 H	277	64.1	40.9
3	5400.00	57.0 PK	74.0	-17.0	1.71 H	277	54.1	2.9
4	5400.00	49.4 AV	54.0	-4.6	1.71 H	277	46.5	2.9
5	#10480.00	54.6 PK	68.2	-13.6	2.16 H	138	45.4	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.1 PK			2.54 V	14	76.2	40.9
2	*5240.00	108.4 AV			2.54 V	14	67.5	40.9
3	5400.00	60.3 PK	74.0	-13.7	2.54 V	14	57.4	2.9
4	5400.00	52.9 AV	54.0	-1.1	2.54 V	14	50.0	2.9
5	#10480.00	55.0 PK	68.2	-13.2	1.69 V	298	45.8	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.8 PK	74.0	-23.2	1.80 H	262	48.2	2.6
2	5150.00	42.3 AV	54.0	-11.7	1.80 H	262	39.7	2.6
3	*5260.00	111.4 PK			1.80 H	262	70.5	40.9
4	*5260.00	103.7 AV			1.80 H	262	62.8	40.9
5	5420.00	53.9 PK	74.0	-20.1	1.80 H	262	51.0	2.9
6	5420.00	46.9 AV	54.0	-7.1	1.80 H	262	44.0	2.9
7	#10520.00	54.5 PK	68.2	-13.7	2.16 H	148	45.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.7 PK	74.0	-22.3	2.59 V	15	49.1	2.6
2	5150.00	42.7 AV	54.0	-11.3	2.59 V	15	40.1	2.6
3	*5260.00	113.3 PK			2.59 V	15	72.4	40.9
4	*5260.00	106.7 AV			2.59 V	15	65.8	40.9
5	5420.00	57.2 PK	74.0	-16.8	2.59 V	15	54.3	2.9
6	5420.00	49.6 AV	54.0	-4.4	2.59 V	15	46.7	2.9
7	#10520.00	55.0 PK	68.2	-13.2	1.69 V	305	45.7	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.0 PK			1.77 H	279	68.2	40.8
2	*5300.00	100.3 AV			1.77 H	279	59.5	40.8
3	5460.00	53.8 PK	74.0	-20.2	1.77 H	279	50.7	3.1
4	5460.00	45.6 AV	54.0	-8.4	1.77 H	279	42.5	3.1
5	10600.00	54.3 PK	74.0	-19.7	2.17 H	138	45.0	9.3
6	10600.00	44.8 AV	54.0	-9.2	2.17 H	138	35.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.7 PK			2.50 V	15	72.9	40.8
2	*5300.00	104.9 AV			2.50 V	15	64.1	40.8
3	5460.00	56.3 PK	74.0	-17.7	2.50 V	15	53.2	3.1
4	5460.00	50.1 AV	54.0	-3.9	2.50 V	15	47.0	3.1
5	10600.00	54.8 PK	74.0	-19.2	1.74 V	308	45.5	9.3
6	10600.00	45.5 AV	54.0	-8.5	1.74 V	308	36.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.6 PK			N/A H	N/A	68.9	40.7
2	*5320.00	100.2 AV			N/A H	N/A	59.5	40.7
3	5350.00	52.5 PK	74.0	-21.5	1.77 H	275	49.7	2.8
4	5350.00	45.0 AV	54.0	-9.0	1.77 H	275	42.2	2.8
5	10640.00	54.4 PK	74.0	-19.6	2.08 H	129	45.1	9.3
6	10640.00	45.3 AV	54.0	-8.7	2.08 H	129	36.0	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.9 PK			2.33 V	16	72.2	40.7
2	*5320.00	105.1 AV			2.33 V	16	64.4	40.7
3	5350.00	53.6 PK	74.0	-20.4	2.33 V	16	50.8	2.8
4	5350.00	47.7 AV	54.0	-6.3	2.33 V	16	44.9	2.8
5	10640.00	55.0 PK	74.0	-19.0	1.72 V	300	45.7	9.3
6	10640.00	45.4 AV	54.0	-8.6	1.72 V	300	36.1	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.2 PK	74.0	-18.8	1.62 H	269	52.1	3.1
2	5460.00	44.5 AV	54.0	-9.5	1.62 H	269	41.4	3.1
3	#5470.00	55.1 PK	68.2	-13.1	1.62 H	269	51.9	3.2
4	*5500.00	109.1 PK			1.62 H	269	67.8	41.3
5	*5500.00	100.3 AV			1.62 H	269	59.0	41.3
6	11000.00	54.9 PK	74.0	-19.1	2.10 H	137	45.5	9.4
7	11000.00	45.5 AV	54.0	-8.5	2.10 H	137	36.1	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	2.52 V	18	52.2	3.1
2	5460.00	48.2 AV	54.0	-5.8	2.52 V	18	45.1	3.1
3	#5470.00	55.2 PK	68.2	-13.0	2.52 V	18	52.0	3.2
4	*5500.00	113.6 PK			2.52 V	18	72.3	41.3
5	*5500.00	104.5 AV			2.52 V	18	63.2	41.3
6	11000.00	55.4 PK	74.0	-18.6	1.79 V	308	46.0	9.4
7	11000.00	45.8 AV	54.0	-8.2	1.79 V	308	36.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5420.00	53.9 PK	74.0	-20.1	1.61 H	264	51.0	2.9
2	5420.00	45.3 AV	54.0	-8.7	1.61 H	264	42.4	2.9
3	*5580.00	108.5 PK			1.61 H	264	67.1	41.4
4	*5580.00	98.9 AV			1.61 H	264	57.5	41.4
5	#5725.00	54.5 PK	68.2	-13.7	1.61 H	264	49.9	4.6
6	11160.00	55.1 PK	74.0	-18.9	2.20 H	140	45.5	9.6
7	11160.00	46.0 AV	54.0	-8.0	2.20 H	140	36.4	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5420.00	54.1 PK	74.0	-19.9	2.34 V	18	51.2	2.9
2	5420.00	49.9 AV	54.0	-4.1	2.34 V	18	47.0	2.9
3	*5580.00	113.5 PK			2.34 V	18	72.1	41.4
4	*5580.00	104.2 AV			2.34 V	18	62.8	41.4
5	#5725.00	56.7 PK	68.2	-11.5	2.34 V	18	52.1	4.6
6	11160.00	55.7 PK	74.0	-18.3	1.72 V	301	46.1	9.6
7	11160.00	46.1 AV	54.0	-7.9	1.72 V	301	36.5	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.5 PK			1.59 H	269	67.1	42.4
2	*5700.00	99.8 AV			1.59 H	269	57.4	42.4
3	#5725.00	58.9 PK	68.2	-9.3	1.59 H	269	54.3	4.6
4	11400.00	55.1 PK	74.0	-18.9	2.11 H	135	45.3	9.8
5	11400.00	46.1 AV	54.0	-7.9	2.11 H	135	36.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.9 PK			2.25 V	19	70.5	42.4
2	*5700.00	104.1 AV			2.25 V	19	61.7	42.4
3	#5725.00	64.8 PK	68.2	-3.4	2.25 V	19	60.2	4.6
4	11400.00	55.5 PK	74.0	-18.5	1.72 V	300	45.7	9.8
5	11400.00	46.3 AV	54.0	-7.7	1.72 V	300	36.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	51.5 PK	68.2	-16.7	1.67 H	269	48.3	3.2
2	*5720.00	108.1 PK			1.67 H	269	65.7	42.4
3	*5720.00	98.7 AV			1.67 H	269	56.3	42.4
4	#5850.00	52.9 PK	68.2	-15.3	1.67 H	269	47.9	5.0
5	11440.00	55.3 PK	74.0	-18.7	2.11 H	131	45.5	9.8
6	11440.00	46.0 AV	54.0	-8.0	2.11 H	131	36.2	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	52.0 PK	68.2	-16.2	2.31 V	14	48.8	3.2
2	*5720.00	112.8 PK			2.31 V	114	70.4	42.4
3	*5720.00	104.2 AV			2.31 V	114	61.8	42.4
4	#5850.00	54.5 PK	68.2	-13.7	2.31 V	14	49.5	5.0
5	11440.00	56.0 PK	74.0	-18.0	1.78 V	305	46.2	9.8
6	11440.00	46.4 AV	54.0	-7.6	1.78 V	305	36.6	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.40	54.1 PK	68.2	-14.1	1.75 H	230	50.0	4.1
2	*5745.00	115.1 PK			1.75 H	230	72.7	42.4
3	*5745.00	105.5 AV			1.75 H	230	63.1	42.4
4	#5954.40	54.8 PK	68.2	-13.4	1.75 H	230	50.1	4.7
5	11490.00	55.3 PK	74.0	-18.7	1.00 H	126	45.7	9.6
6	11490.00	46.1 AV	54.0	-7.9	1.00 H	126	36.5	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.20	54.9 PK	68.2	-13.3	2.42 V	18	50.7	4.2
2	*5745.00	118.3 PK			2.42 V	18	75.9	42.4
3	*5745.00	109.4 AV			2.42 V	18	67.0	42.4
4	#5944.40	54.0 PK	68.2	-14.2	2.42 V	18	49.3	4.7
5	11490.00	55.7 PK	74.0	-18.3	1.72 V	305	46.1	9.6
6	11490.00	46.2 AV	54.0	-7.8	1.72 V	305	36.6	9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.00	58.8 PK	68.2	-9.4	1.77 H	214	55.0	3.8
2	*5785.00	115.6 PK			1.77 H	214	73.1	42.5
3	*5785.00	107.0 AV			1.77 H	214	64.5	42.5
4	#5928.40	53.4 PK	68.2	-14.8	1.74 H	214	48.7	4.7
5	11570.00	55.8 PK	74.0	-18.2	2.21 H	142	46.0	9.8
6	11570.00	46.1 AV	54.0	-7.9	2.21 H	142	36.3	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	60.7 PK	68.2	-7.5	2.39 V	18	56.9	3.8
2	*5785.00	119.0 PK			2.39 V	18	76.5	42.5
3	*5785.00	109.6 AV			2.39 V	18	67.1	42.5
4	#5932.00	52.6 PK	68.2	-15.6	2.39 V	18	47.9	4.7
5	11570.00	55.8 PK	74.0	-18.2	1.69 V	292	46.0	9.8
6	11570.00	46.3 AV	54.0	-7.7	1.69 V	292	36.5	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5606.80	54.9 PK	68.2	-13.3	1.79 H	218	51.3	3.6
2	*5825.00	116.1 PK			1.79 H	218	73.4	42.7
3	*5825.00	106.7 AV			1.79 H	218	64.0	42.7
4	#5928.40	53.5 PK	68.2	-14.7	1.79 H	218	48.8	4.7
5	11650.00	56.0 PK	74.0	-18.0	2.20 H	136	46.0	10.0
6	11650.00	46.5 AV	54.0	-7.5	2.20 H	136	36.5	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.60	54.1 PK	68.2	-14.1	2.46 V	17	50.0	4.1
2	*5825.00	119.3 PK			2.46 V	17	76.6	42.7
3	*5825.00	109.4 AV			2.46 V	17	66.7	42.7
4	#5954.40	52.9 PK	68.2	-15.3	2.46 V	17	48.2	4.7
5	11650.00	56.2 PK	74.0	-17.8	1.79 V	311	46.2	10.0
6	11650.00	46.6 AV	54.0	-7.4	1.79 V	311	36.6	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.9 PK	74.0	-12.1	1.74 H	282	59.3	2.6
2	5150.00	52.1 AV	54.0	-1.9	1.74 H	282	49.5	2.6
3	*5190.00	110.2 PK			1.74 H	282	69.4	40.8
4	*5190.00	101.3 AV			1.74 H	282	60.5	40.8
5	#10380.00	54.9 PK	68.2	-13.3	2.15 H	144	45.5	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.9 PK	74.0	-12.1	2.41 V	14	59.3	2.6
2	5150.00	53.8 AV	54.0	-0.2	2.41 V	14	51.2	2.6
3	*5190.00	112.8 PK			2.41 V	14	72.0	40.8
4	*5190.00	102.2 AV			2.41 V	14	61.4	40.8
5	#10380.00	55.4 PK	68.2	-12.8	1.73 V	307	46.0	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.0 PK	74.0	-13.0	1.73 H	277	58.4	2.6
2	5150.00	52.3 AV	54.0	-1.7	1.73 H	277	49.7	2.6
3	*5230.00	114.7 PK			1.73 H	277	73.9	40.8
4	*5230.00	104.9 AV			1.73 H	277	64.1	40.8
5	5380.00	56.5 PK	74.0	-17.5	1.73 H	277	53.7	2.8
6	5380.00	48.3 AV	54.0	-5.7	1.73 H	277	45.5	2.8
7	#10460.00	54.8 PK	68.2	-13.4	2.21 H	133	45.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.1 PK	74.0	-10.9	2.43 V	20	60.5	2.6
2	5150.00	53.6 AV	54.0	-0.4	2.43 V	20	51.0	2.6
3	*5230.00	116.8 PK			2.43 V	20	76.0	40.8
4	*5230.00	107.2 AV			2.43 V	20	66.4	40.8
5	5380.00	60.8 PK	74.0	-13.2	2.43 V	20	58.0	2.8
6	5380.00	53.3 AV	54.0	-0.7	2.43 V	20	50.5	2.8
7	#10460.00	55.5 PK	68.2	-12.7	1.75 V	315	46.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.5 PK	74.0	-22.5	1.75 H	279	48.9	2.6
2	5150.00	42.6 AV	54.0	-11.4	1.75 H	279	40.0	2.6
3	*5270.00	107.3 PK			1.75 H	279	66.4	40.9
4	*5270.00	98.6 AV			1.75 H	279	57.7	40.9
5	5420.00	52.9 PK	74.0	-21.1	1.75 H	279	50.0	2.9
6	5420.00	45.8 AV	54.0	-8.2	1.75 H	279	42.9	2.9
7	#10540.00	54.6 PK	68.2	-13.6	2.22 H	131	45.3	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	2.33 V	21	49.8	2.6
2	5150.00	43.1 AV	54.0	-10.9	2.33 V	21	40.5	2.6
3	*5270.00	112.2 PK			2.33 V	21	71.3	40.9
4	*5270.00	103.9 AV			2.33 V	21	63.0	40.9
5	5420.00	54.9 PK	74.0	-19.1	2.33 V	21	52.0	2.9
6	5420.00	47.9 AV	54.0	-6.1	2.33 V	21	45.0	2.9
7	#10540.00	55.2 PK	68.2	-13.0	1.66 V	293	45.9	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	106.5 PK			1.72 H	271	65.8	40.7
2	*5310.00	97.6 AV			1.72 H	271	56.9	40.7
3	5350.00	53.9 PK	74.0	-20.1	1.72 H	271	51.1	2.8
4	5350.00	45.8 AV	54.0	-8.2	1.72 H	271	43.0	2.8
5	10620.00	54.9 PK	74.0	-19.1	2.18 H	143	45.6	9.3
6	10620.00	45.5 AV	54.0	-8.5	2.18 H	143	36.2	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	113.2 PK			2.46 V	14	72.5	40.7
2	*5310.00	102.2 AV			2.46 V	14	61.5	40.7
3	5350.00	54.3 PK	74.0	-19.7	2.46 V	14	51.5	2.8
4	5350.00	47.1 AV	54.0	-6.9	2.46 V	14	44.3	2.8
5	10620.00	55.2 PK	74.0	-18.8	1.78 V	309	45.9	9.3
6	10620.00	45.7 AV	54.0	-8.3	1.78 V	309	36.4	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.58 H	261	51.1	3.1
2	5460.00	46.1 AV	54.0	-7.9	1.58 H	261	43.0	3.1
3	#5470.00	54.7 PK	68.2	-13.5	1.58 H	261	51.5	3.2
4	*5510.00	106.3 PK			1.58 H	261	65.0	41.3
5	*5510.00	97.4 AV			1.58 H	261	56.1	41.3
6	11020.00	54.9 PK	74.0	-19.1	2.21 H	129	45.5	9.4
7	11020.00	45.7 AV	54.0	-8.3	2.21 H	129	36.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	2.37 V	21	52.2	3.1
2	5460.00	47.3 AV	54.0	-6.7	2.37 V	21	44.2	3.1
3	#5470.00	56.2 PK	68.2	-12.0	2.37 V	21	53.0	3.2
4	*5510.00	111.4 PK			2.37 V	21	70.1	41.3
5	*5510.00	102.3 AV			2.37 V	21	61.0	41.3
6	11020.00	55.5 PK	74.0	-18.5	1.80 V	317	46.1	9.4
7	11020.00	46.0 AV	54.0	-8.0	1.80 V	317	36.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5380.00	52.0 PK	74.0	-22.0	1.57 H	265	49.2	2.8
2	5380.00	45.2 AV	54.0	-8.8	1.57 H	265	42.4	2.8
3	*5550.00	104.7 PK			1.57 H	265	63.4	41.3
4	*5550.00	96.4 AV			1.57 H	265	55.1	41.3
5	11100.00	54.9 PK	74.0	-19.1	2.07 H	146	45.4	9.5
6	11100.00	45.6 AV	54.0	-8.4	2.07 H	146	36.1	9.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5380.00	55.6 PK	74.0	-18.4	2.45 V	15	52.8	2.8
2	5380.00	48.5 AV	54.0	-5.5	2.45 V	15	45.7	2.8
3	*5550.00	110.3 PK			2.45 V	15	69.0	41.3
4	*5550.00	101.6 AV			2.45 V	15	60.3	41.3
5	11100.00	55.8 PK	74.0	-18.2	1.81 V	312	46.3	9.5
6	11100.00	46.2 AV	54.0	-7.8	1.81 V	312	36.7	9.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	107.5 PK			1.65 H	270	65.3	42.2
2	*5670.00	97.2 AV			1.65 H	270	55.0	42.2
3	#5725.00	58.1 PK	68.2	-10.1	1.65 H	270	53.5	4.6
4	11340.00	55.9 PK	74.0	-18.1	2.18 H	135	45.9	10.0
5	11340.00	45.9 AV	54.0	-8.1	2.18 H	135	35.9	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.3 PK			2.47 V	21	68.1	42.2
2	*5670.00	101.1 AV			2.47 V	21	58.9	42.2
3	#5725.00	60.1 PK	68.2	-8.1	2.47 V	21	55.5	4.6
4	11340.00	56.1 PK	74.0	-17.9	1.66 V	289	46.1	10.0
5	11340.00	46.5 AV	54.0	-7.5	1.66 V	289	36.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	53.3 PK	68.2	-14.9	1.65 H	269	50.1	3.2
2	*5710.00	106.6 PK			1.65 H	269	64.2	42.4
3	*5710.00	97.3 AV			1.65 H	269	54.9	42.4
4	#5850.00	54.0 PK	68.2	-14.2	1.65 H	269	49.0	5.0
5	11420.00	55.6 PK	74.0	-18.4	2.10 H	134	45.8	9.8
6	11420.00	45.9 AV	54.0	-8.1	2.10 H	134	36.1	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	54.0 PK	68.2	-14.2	2.31 V	13	50.8	3.2
2	*5710.00	110.8 PK			2.31 V	13	68.4	42.4
3	*5710.00	102.1 AV			2.31 V	13	59.7	42.4
4	#5850.00	56.1 PK	68.2	-12.1	2.31 V	13	51.1	5.0
5	11420.00	56.1 PK	74.0	-17.9	2.20 V	135	46.3	9.8
6	11420.00	46.0 AV	54.0	-8.0	2.20 V	135	36.2	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.40	55.9 PK	68.2	-12.3	1.78 H	205	51.8	4.1
2	*5755.00	111.5 PK			1.78 H	205	69.1	42.4
3	*5755.00	103.2 AV			1.78 H	205	60.8	42.4
4	#5984.80	55.6 PK	68.2	-12.6	1.78 H	205	50.9	4.7
5	11510.00	55.5 PK	74.0	-18.5	2.11 H	133	45.8	9.7
6	11510.00	45.6 AV	54.0	-8.4	2.11 H	133	35.9	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	60.6 PK	68.2	-7.6	2.38 V	20	56.4	4.2
2	*5755.00	115.1 PK			2.38 V	20	72.7	42.4
3	*5755.00	105.6 AV			2.38 V	20	63.2	42.4
4	#5939.60	54.4 PK	68.2	-13.8	2.38 V	20	49.7	4.7
5	11510.00	56.1 PK	74.0	-17.9	1.80 V	302	46.4	9.7
6	11510.00	46.3 AV	54.0	-7.7	1.80 V	302	36.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.80	58.1 PK	68.2	-10.1	1.76 H	219	54.4	3.7
2	*5795.00	114.8 PK			1.76 H	219	72.2	42.6
3	*5795.00	104.6 AV			1.76 H	219	62.0	42.6
4	#5940.00	53.3 PK	68.2	-14.9	1.76 H	219	48.6	4.7
5	11590.00	55.9 PK	74.0	-18.1	2.20 H	141	45.9	10.0
6	11590.00	46.3 AV	54.0	-7.7	2.20 H	141	36.3	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.40	59.5 PK	68.2	-8.7	2.36 V	18	55.5	4.0
2	*5795.00	115.3 PK			2.36 V	18	72.7	42.6
3	*5795.00	106.4 AV			2.36 V	18	63.8	42.6
4	#5952.00	53.2 PK	68.2	-15.0	2.36 V	18	48.5	4.7
5	11590.00	56.6 PK	74.0	-17.4	1.79 V	312	46.6	10.0
6	11590.00	46.5 AV	54.0	-7.5	1.79 V	312	36.5	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.74 H	273	57.3	2.6
2	5150.00	50.9 AV	54.0	-3.1	1.74 H	273	48.3	2.6
3	*5210.00	106.0 PK			1.74 H	273	65.2	40.8
4	*5210.00	96.3 AV			1.74 H	273	55.5	40.8
5	5350.00	54.1 PK	74.0	-19.9	1.74 H	273	51.3	2.8
6	5350.00	46.6 AV	54.0	-7.4	1.74 H	273	43.8	2.8
7	#10420.00	54.7 PK	68.2	-13.5	2.17 H	135	45.5	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.4 PK	74.0	-11.6	2.20 V	10	59.8	2.6
2	5150.00	53.7 AV	54.0	-0.3	2.20 V	10	51.1	2.6
3	*5210.00	109.6 PK			2.20 V	10	68.8	40.8
4	*5210.00	99.2 AV			2.20 V	10	58.4	40.8
5	5350.00	56.6 PK	74.0	-17.4	2.20 V	10	53.8	2.8
6	5350.00	49.3 AV	54.0	-4.7	2.20 V	10	46.5	2.8
7	#10420.00	55.5 PK	68.2	-12.7	1.77 V	308	46.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	1.79 H	265	48.3	2.6
2	5150.00	43.6 AV	54.0	-10.4	1.79 H	265	41.0	2.6
3	*5290.00	101.9 PK			1.79 H	265	61.1	40.8
4	*5290.00	91.3 AV			1.79 H	265	50.5	40.8
5	5350.00	52.8 PK	74.0	-21.2	1.79 H	265	50.0	2.8
6	5350.00	46.9 AV	54.0	-7.1	1.79 H	265	44.1	2.8
7	#10580.00	54.8 PK	68.2	-13.4	2.06 H	128	45.6	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.7 PK	74.0	-21.3	2.38 V	14	50.1	2.6
2	5150.00	44.6 AV	54.0	-9.4	2.38 V	14	42.0	2.6
3	*5290.00	106.7 PK			2.38 V	14	65.9	40.8
4	*5290.00	97.0 AV			2.38 V	14	56.2	40.8
5	5350.00	57.1 PK	74.0	-16.9	2.38 V	14	54.3	2.8
6	5350.00	51.3 AV	54.0	-2.7	2.38 V	14	48.5	2.8
7	#10580.00	55.7 PK	68.2	-12.5	1.70 V	299	46.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.6 PK	74.0	-17.4	2.31 H	15	53.5	3.1
2	5460.00	51.0 AV	54.0	-3.0	2.31 H	15	47.9	3.1
3	#5470.00	57.6 PK	68.2	-10.6	2.31 H	15	54.4	3.2
4	*5530.00	103.5 PK			2.31 H	15	62.2	41.3
5	*5530.00	94.2 AV			2.31 H	15	52.9	41.3
6	#5725.00	54.4 PK	68.2	-13.8	2.31 H	15	49.8	4.6
7	11060.00	55.2 PK	74.0	-18.8	2.18 H	149	45.8	9.4
8	11060.00	45.1 AV	54.0	-8.9	2.18 H	149	35.7	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	2.40 V	15	54.2	3.1
2	5460.00	51.5 AV	54.0	-2.5	2.40 V	15	48.4	3.1
3	#5470.00	57.9 PK	68.2	-10.3	2.40 V	15	54.7	3.2
4	*5530.00	106.0 PK			2.40 V	15	64.7	41.3
5	*5530.00	96.5 AV			2.40 V	15	55.2	41.3
6	#5725.00	54.6 PK	68.2	-13.6	2.40 V	15	50.0	4.6
7	11060.00	55.9 PK	74.0	-18.1	1.69 V	312	46.5	9.4
8	11060.00	46.0 AV	54.0	-8.0	1.69 V	312	36.6	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.8 PK	74.0	-23.2	2.24 H	15	47.7	3.1
2	5460.00	44.4 AV	54.0	-9.6	2.24 H	15	41.3	3.1
3	#5470.00	52.2 PK	68.2	-16.0	2.24 H	15	49.0	3.2
4	*5610.00	102.9 PK			2.24 H	15	61.3	41.6
5	*5610.00	92.7 AV			2.24 H	15	51.1	41.6
6	#5725.00	53.4 PK	68.2	-14.8	2.24 H	15	48.8	4.6
7	11220.00	55.6 PK	74.0	-18.4	2.17 H	138	45.8	9.8
8	11220.00	45.3 AV	54.0	-8.7	2.17 H	138	35.5	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.8 PK	74.0	-21.2	2.11 V	14	49.7	3.1
2	5460.00	48.0 AV	54.0	-6.0	2.11 V	14	44.9	3.1
3	#5470.00	53.9 PK	68.2	-14.3	2.11 V	14	50.7	3.2
4	*5610.00	104.3 PK			2.11 V	14	62.7	41.6
5	*5610.00	95.4 AV			2.11 V	14	53.8	41.6
6	#5725.00	55.0 PK	68.2	-13.2	2.11 V	14	50.4	4.6
7	11220.00	56.3 PK	74.0	-17.7	1.77 V	297	46.5	9.8
8	11220.00	46.5 AV	54.0	-7.5	1.77 V	297	36.7	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	51.5 PK	68.2	-16.7	2.18 H	16	48.3	3.2
2	*5690.00	102.2 PK			2.18 H	16	59.8	42.4
3	*5690.00	92.9 AV			2.18 H	16	50.5	42.4
4	#5850.00	52.5 PK	68.2	-15.7	2.18 H	16	47.5	5.0
5	11380.00	55.6 PK	74.0	-18.4	2.17 H	136	45.7	9.9
6	11380.00	46.5 AV	54.0	-7.5	2.17 H	136	36.6	9.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	51.7 PK	68.2	-16.5	2.27 V	9	48.5	3.2
2	*5690.00	104.9 PK			2.27 V	9	62.5	42.4
3	*5690.00	94.6 AV			2.27 V	9	52.2	42.4
4	#5850.00	53.2 PK	68.2	-15.0	2.27 V	9	48.2	5.0
5	11380.00	56.3 PK	74.0	-17.7	1.72 V	300	46.4	9.9
6	11380.00	46.4 AV	54.0	-7.6	1.72 V	300	36.5	9.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.40	59.8 PK	68.2	-8.4	2.13 H	30	56.0	3.8
2	*5775.00	105.5 PK			2.13 H	30	63.0	42.5
3	*5775.00	95.7 AV			2.13 H	30	53.2	42.5
4	#5985.20	54.5 PK	68.2	-13.7	2.13 H	30	49.8	4.7
5	11550.00	55.4 PK	74.0	-18.6	2.10 H	130	45.6	9.8
6	11550.00	45.8 AV	54.0	-8.2	2.10 H	130	36.0	9.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.80	62.2 PK	68.2	-6.0	2.22 V	57	58.1	4.1
2	*5775.00	108.3 PK			2.22 V	57	65.8	42.5
3	*5775.00	99.2 AV			2.22 V	57	56.7	42.5
4	#5955.20	53.1 PK	68.2	-15.1	2.22 V	57	48.4	4.7
5	11550.00	56.4 PK	74.0	-17.6	1.80 V	296	46.6	9.8
6	11550.00	46.2 AV	54.0	-7.8	1.80 V	296	36.4	9.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	2.59 H	157	54.3	2.6
2	5150.00	45.9 AV	54.0	-8.1	2.59 H	157	43.3	2.6
3	*5250.00	102.6 PK			2.59 H	157	61.7	40.9
4	*5250.00	92.3 AV			2.59 H	157	51.4	40.9
5	5350.00	61.5 PK	74.0	-12.5	2.59 H	157	58.7	2.8
6	5350.00	50.1 AV	54.0	-3.9	2.59 H	157	47.3	2.8
7	#10500.00	54.8 PK	68.2	-13.4	2.26 H	141	45.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	2.40 V	3	55.7	2.6
2	5150.00	47.8 AV	54.0	-6.2	2.40 V	3	45.2	2.6
3	*5250.00	105.9 PK			2.40 V	3	65.0	40.9
4	*5250.00	95.5 AV			2.40 V	3	54.6	40.9
5	5350.00	64.4 PK	74.0	-9.6	2.40 V	3	61.6	2.8
6	5350.00	51.7 AV	54.0	-2.3	2.40 V	3	48.9	2.8
7	#10500.00	55.5 PK	68.2	-12.7	1.81 V	312	46.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68 % RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.0 PK	74.0	-14.0	2.51 H	162	56.9	3.1
2	5460.00	50.5 AV	54.0	-3.5	2.51 H	162	47.4	3.1
3	#5470.00	59.6 PK	68.2	-8.6	2.51 H	162	56.4	3.2
4	*5570.00	102.0 PK			2.51 H	162	60.6	41.4
5	*5570.00	91.7 AV			2.51 H	162	50.3	41.4
6	#5725.00	58.5 PK	68.2	-9.7	2.51 H	162	53.9	4.6
7	11140.00	55.2 PK	74.0	-18.8	2.26 H	139	45.6	9.6
8	11140.00	45.3 AV	54.0	-8.7	2.26 H	139	35.7	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	2.43 V	6	57.9	3.1
2	5460.00	51.4 AV	54.0	-2.6	2.43 V	6	48.3	3.1
3	#5470.00	60.5 PK	68.2	-7.7	2.43 V	6	57.3	3.2
4	*5570.00	104.6 PK			2.43 V	6	63.2	41.4
5	*5570.00	94.4 AV			2.43 V	6	53.0	41.4
6	#5725.00	59.4 PK	68.2	-8.8	2.43 V	6	54.8	4.6
7	11140.00	55.9 PK	74.0	-18.1	1.76 V	305	46.3	9.6
8	11140.00	46.0 AV	54.0	-8.0	1.76 V	305	36.4	9.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.





Plot of Band Edge_Beamforming Mode

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT20) Channel 36

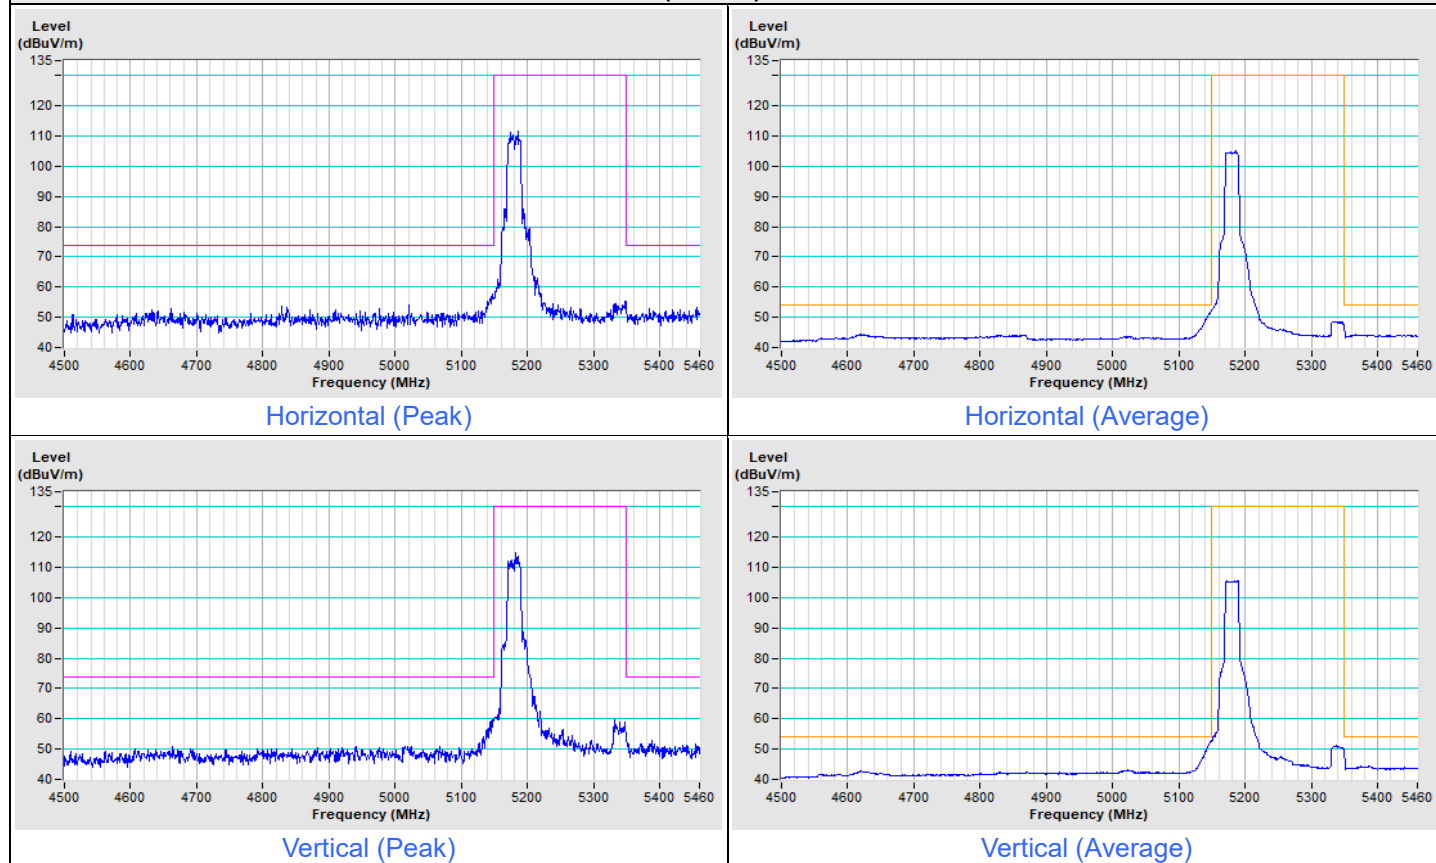


802.11be (EHT20) Channel 48

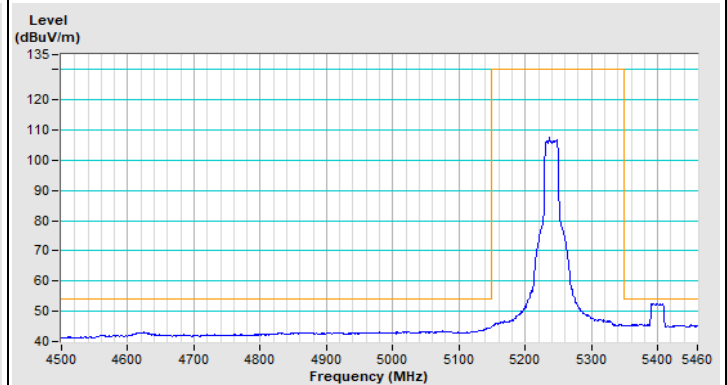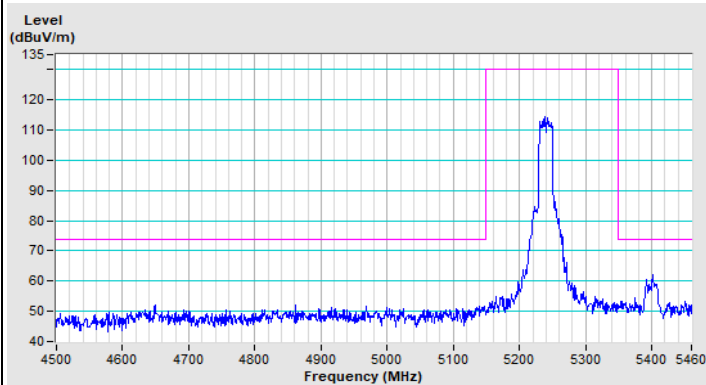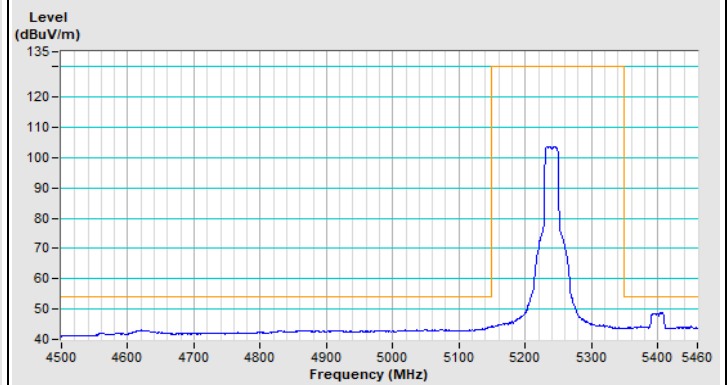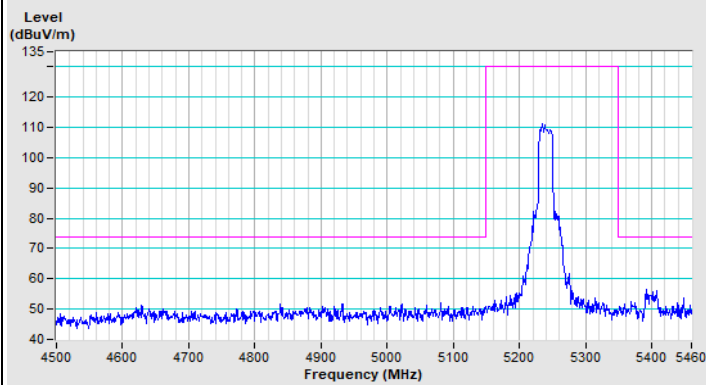


802.11be (EHT20) Channel 52

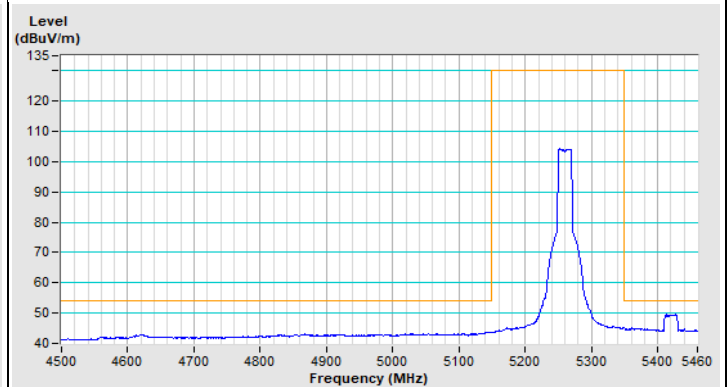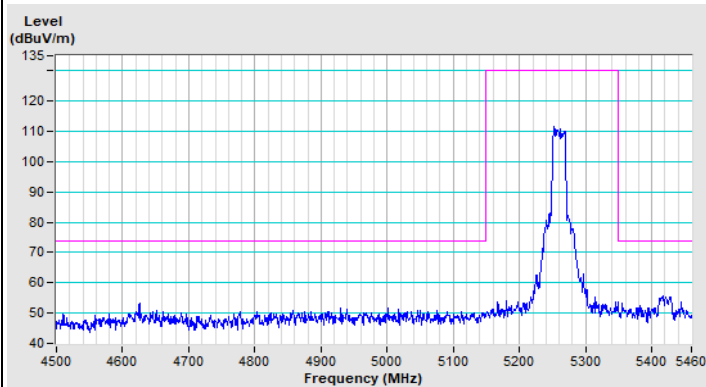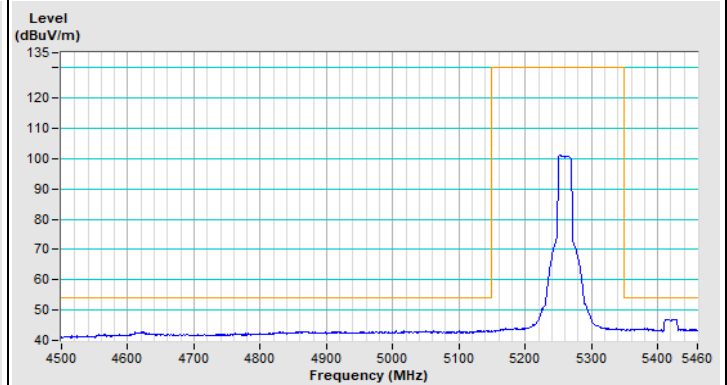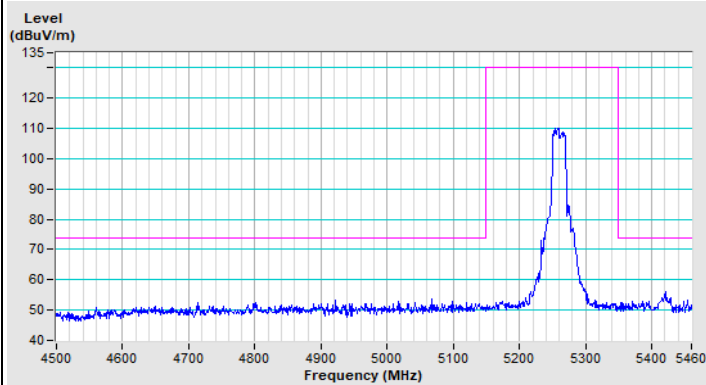


802.11be (EHT20) Channel 64

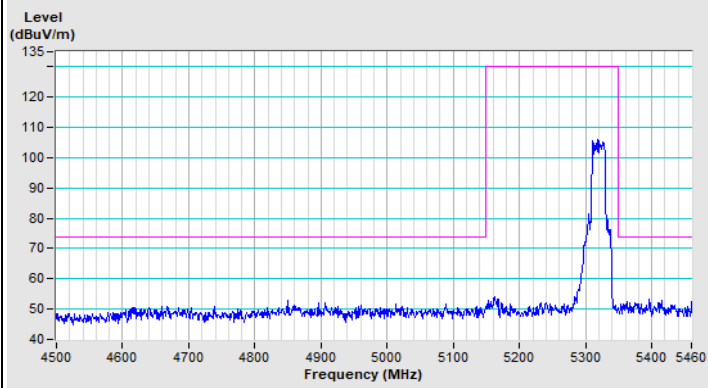


Horizontal (Peak)

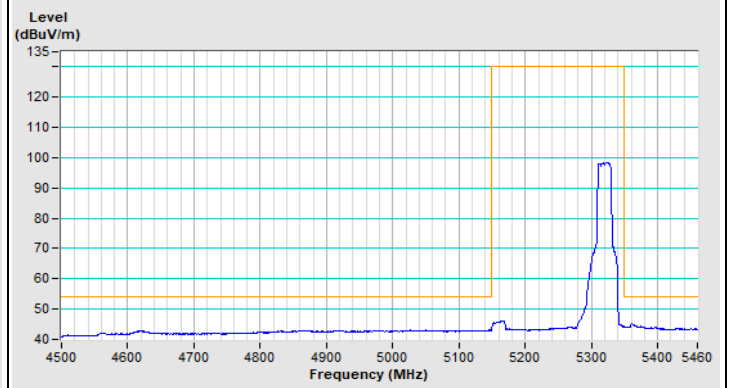

Horizontal (Average)

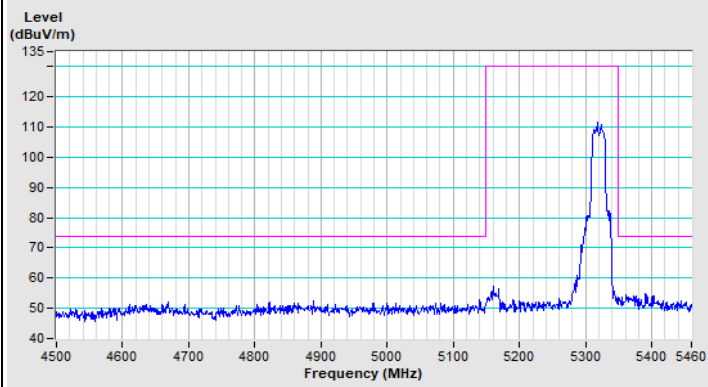


Vertical (Peak)

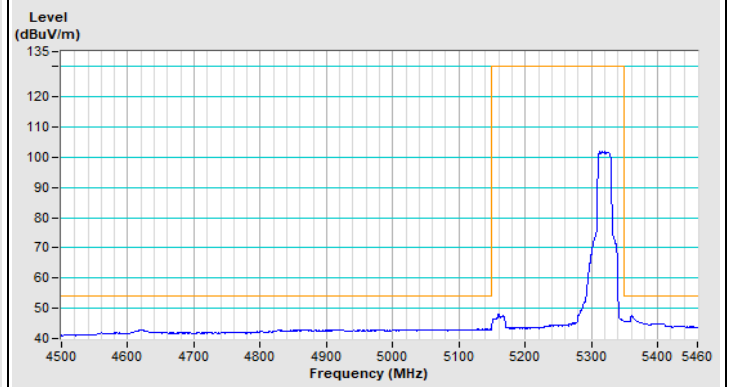


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

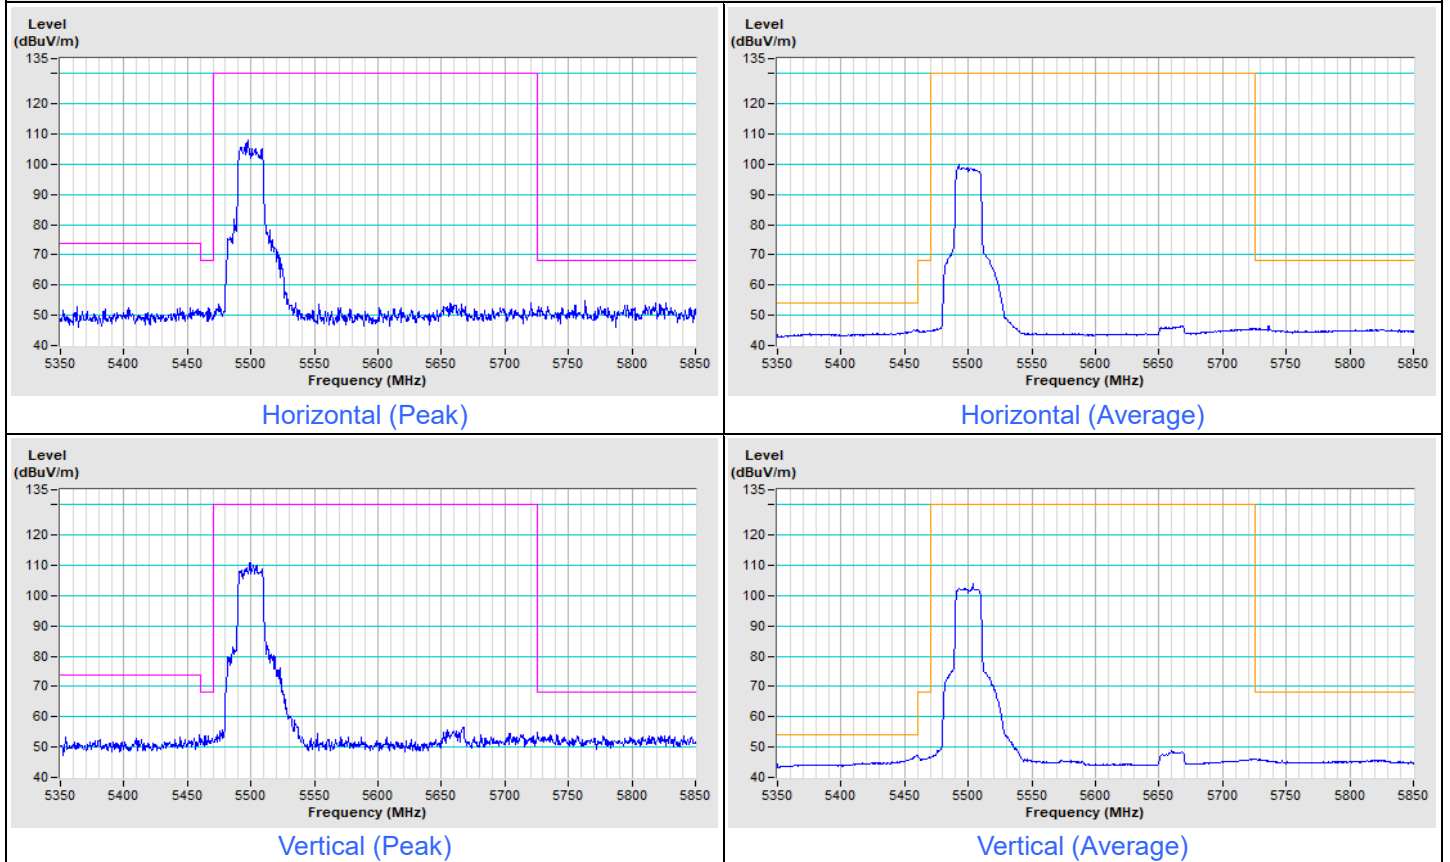



802.11be (EHT20) Channel 140

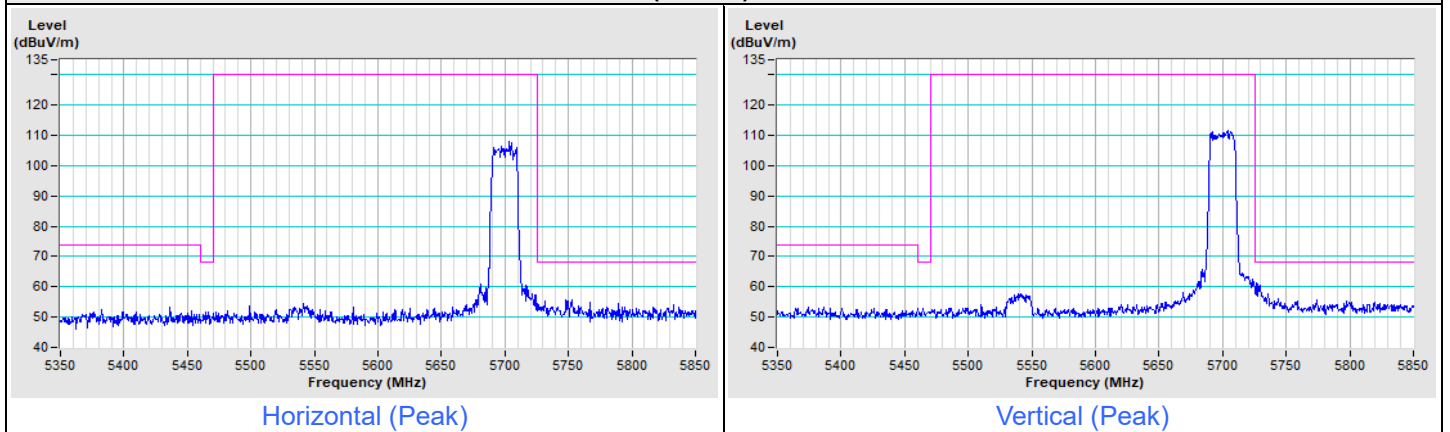



Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

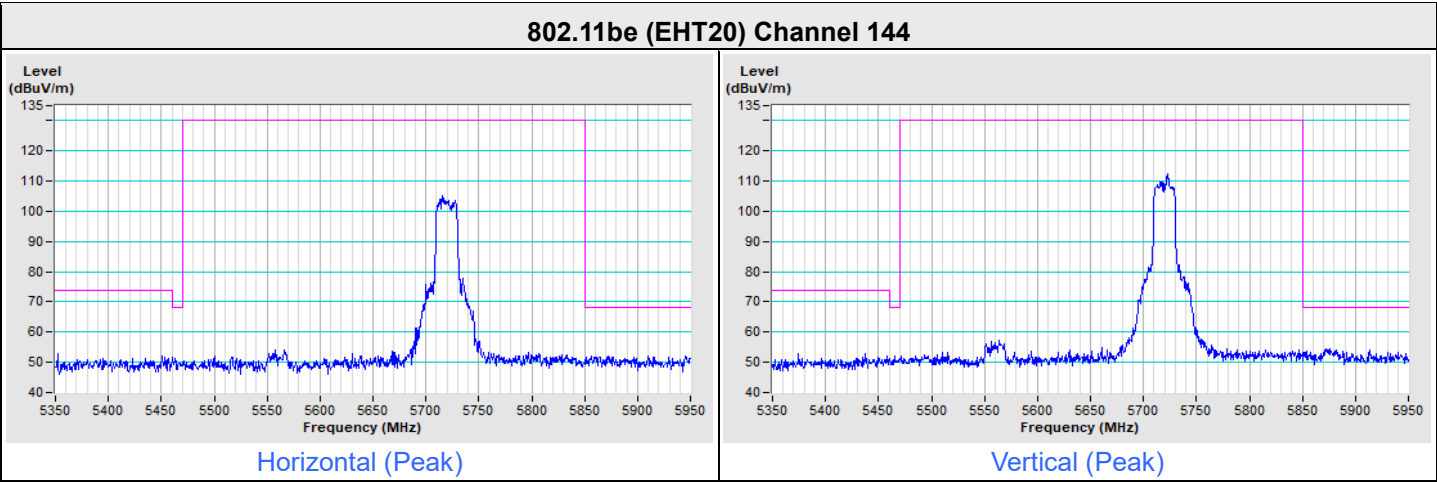

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

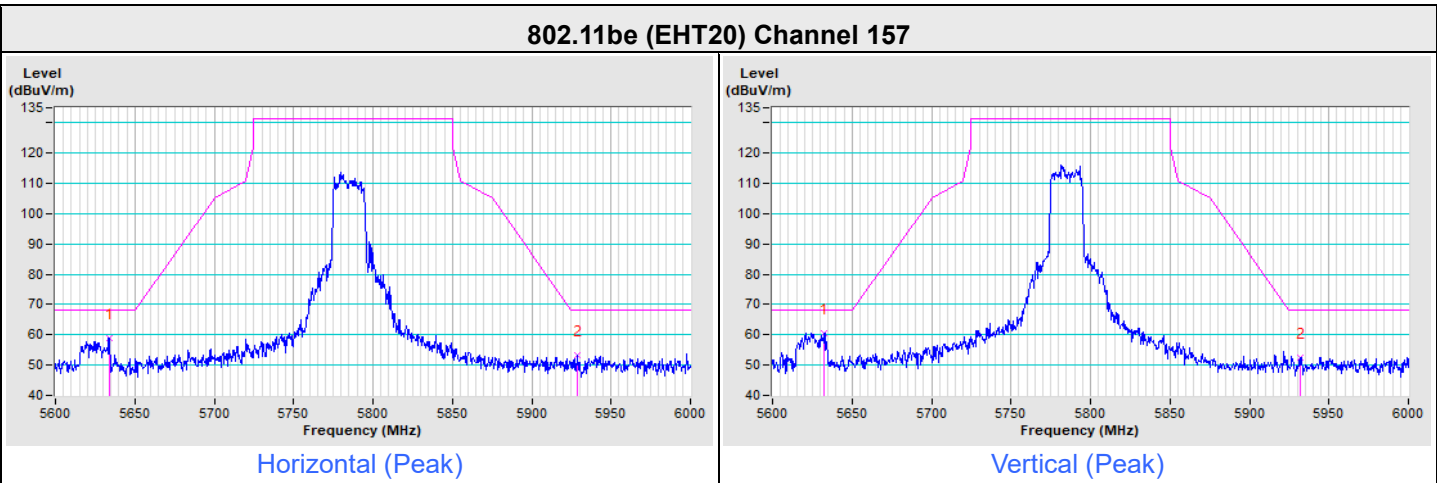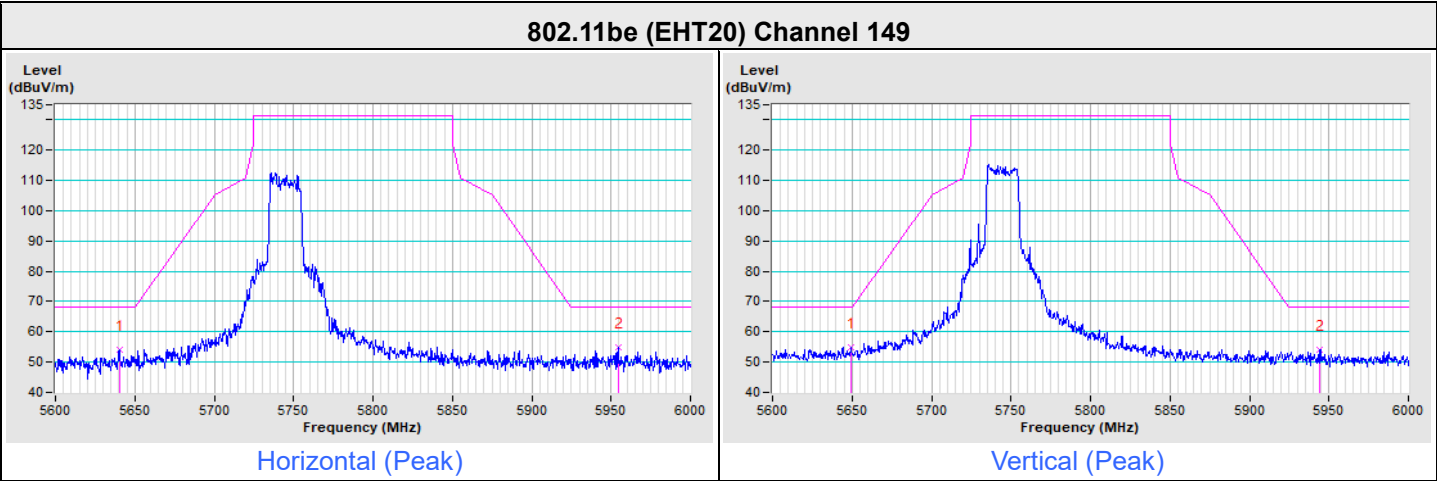


802.11be (EHT20) Channel 165



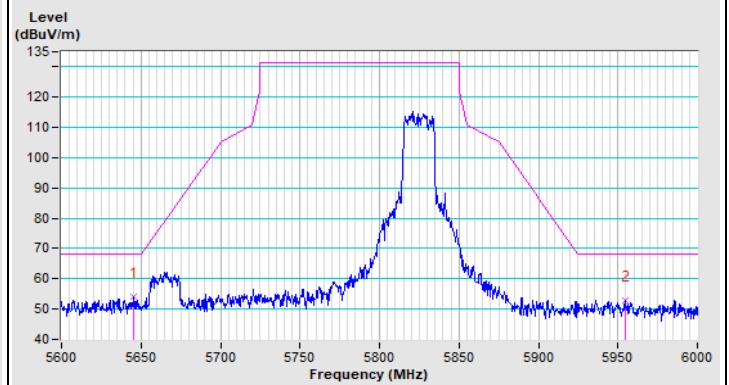
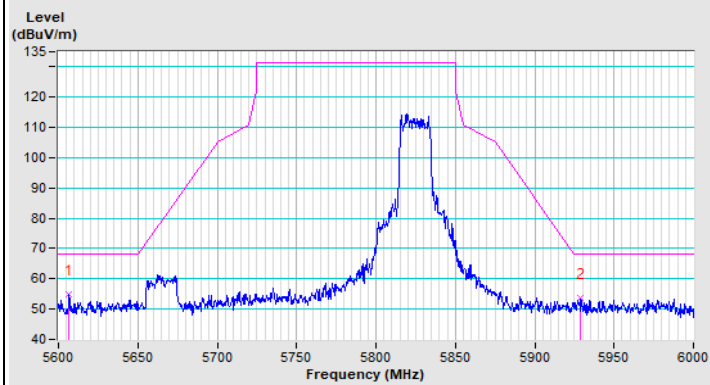


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--





802.11be (EHT40) Channel 38

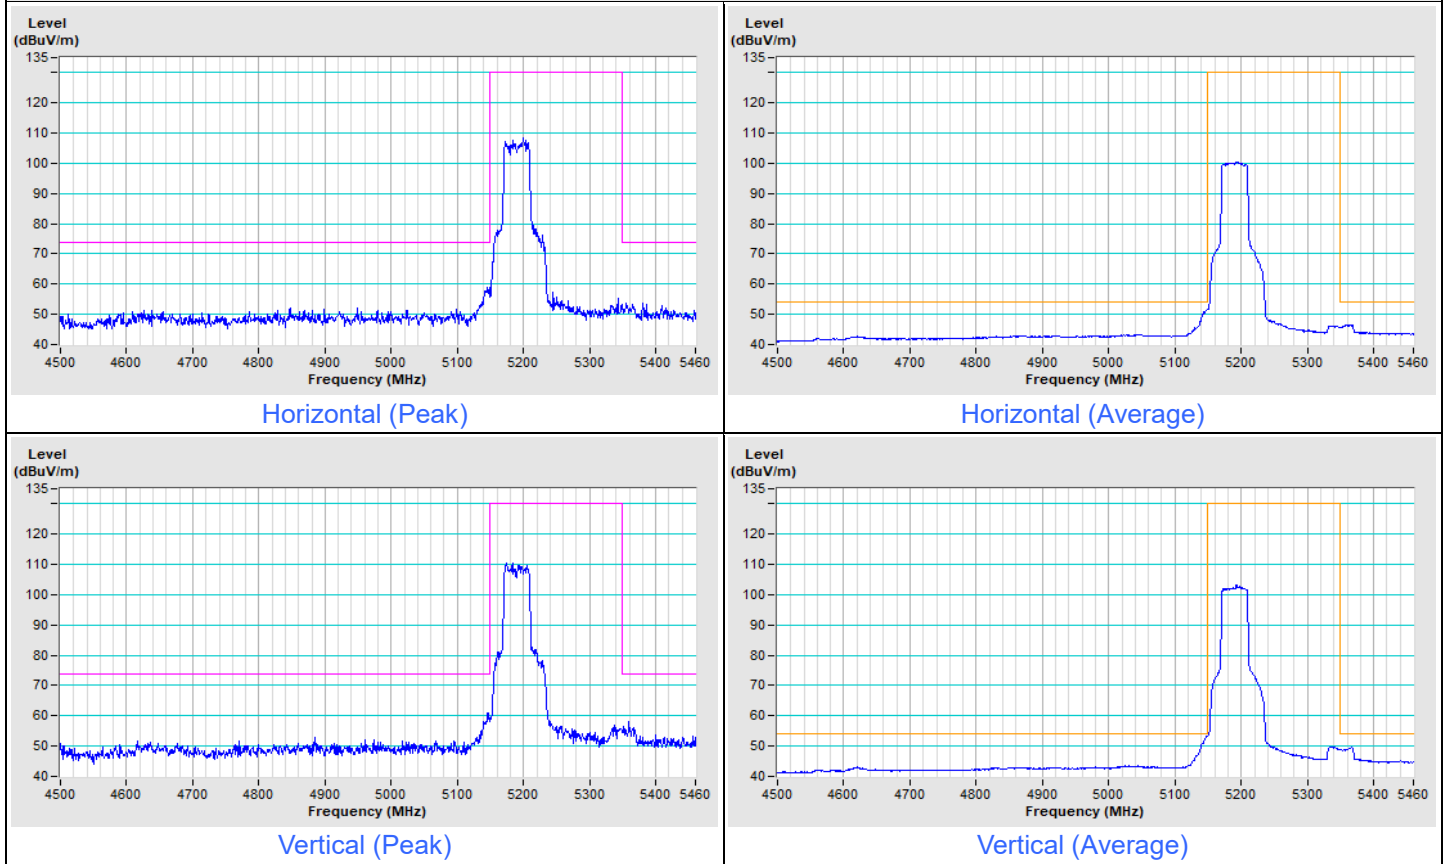


802.11be (EHT40) Channel 46

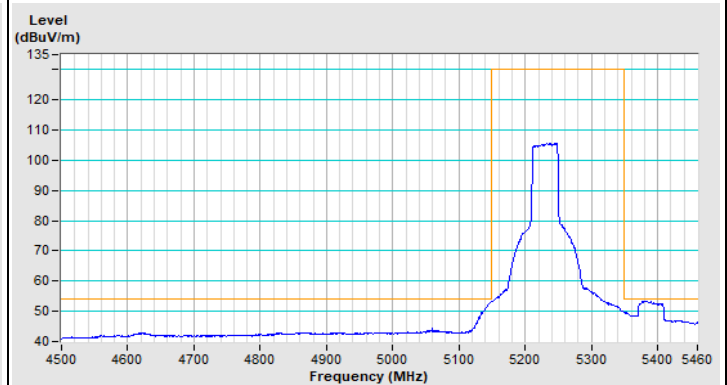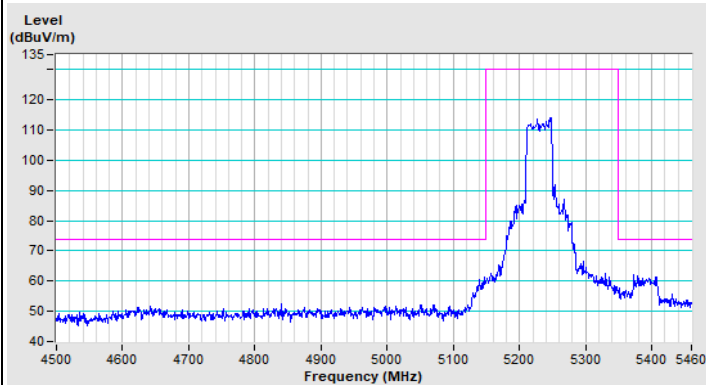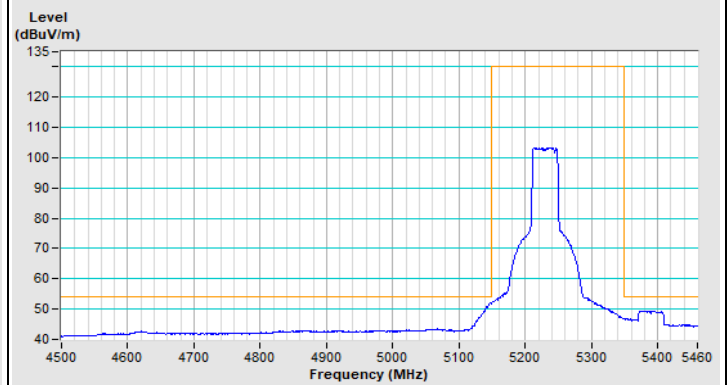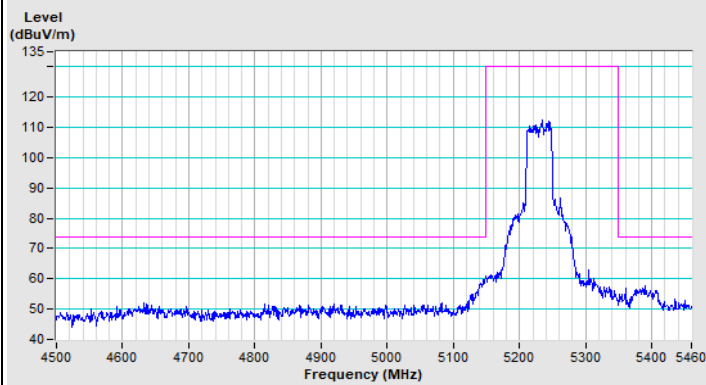


802.11be (EHT40) Channel 54

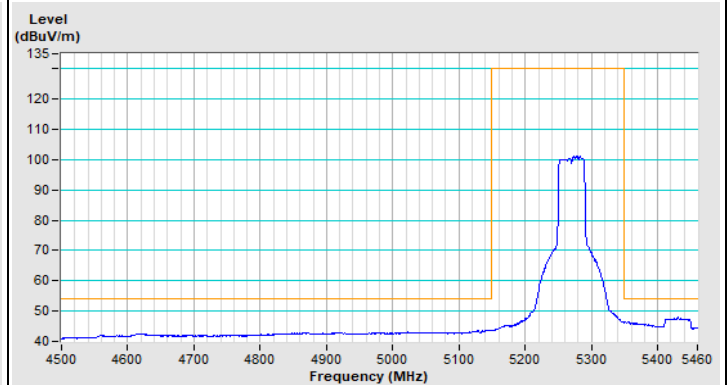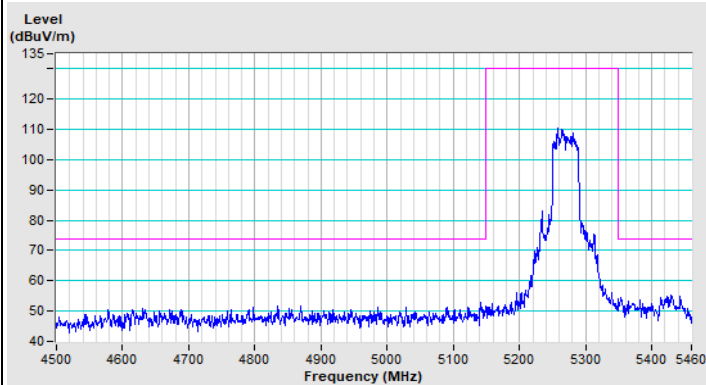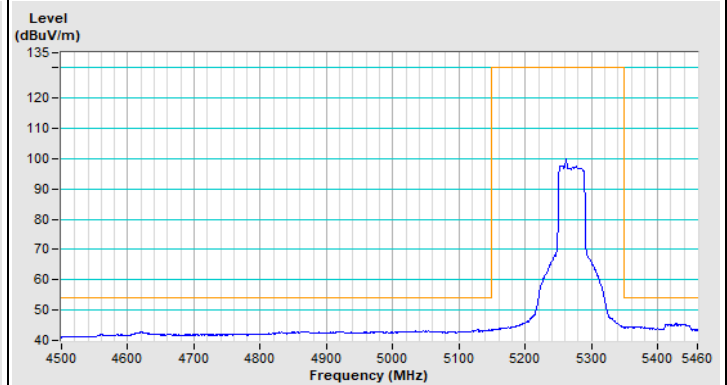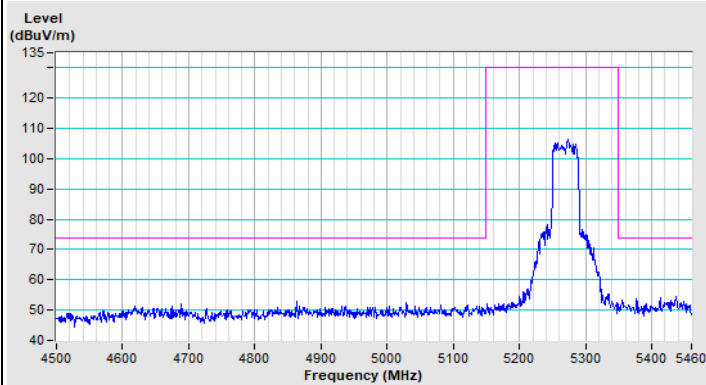


802.11be (EHT40) Channel 62

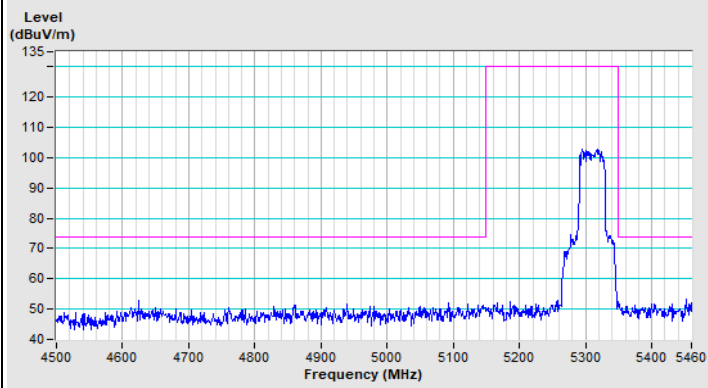


Horizontal (Peak)

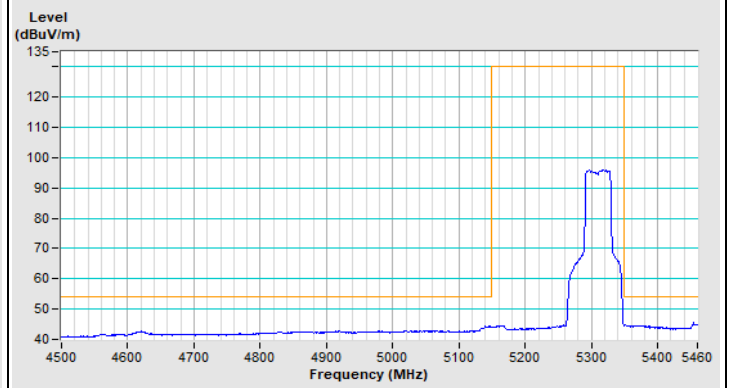

Horizontal (Average)

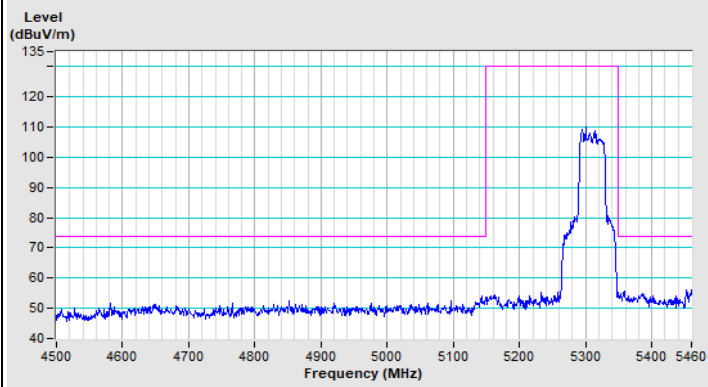


Vertical (Peak)

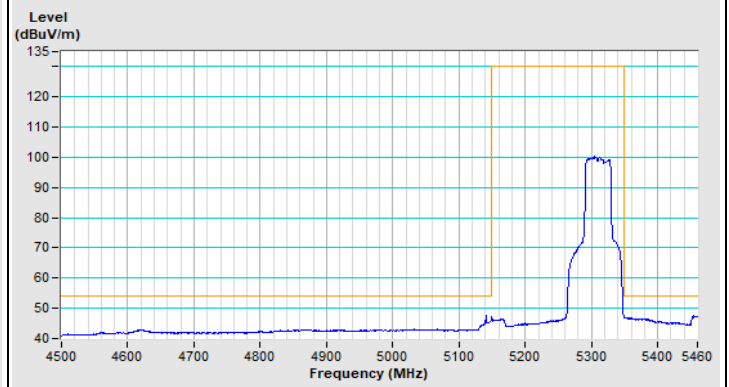


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 102

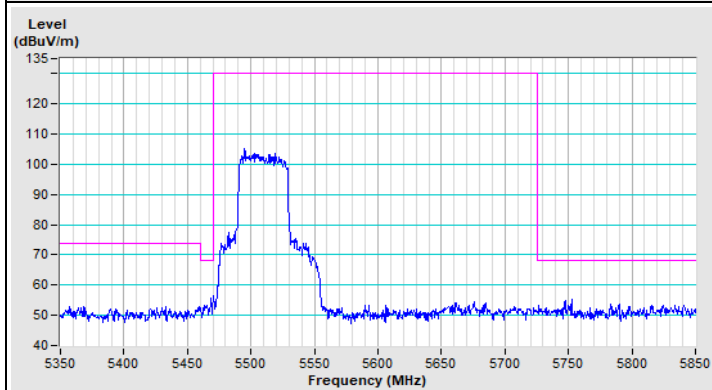


Horizontal (Peak)

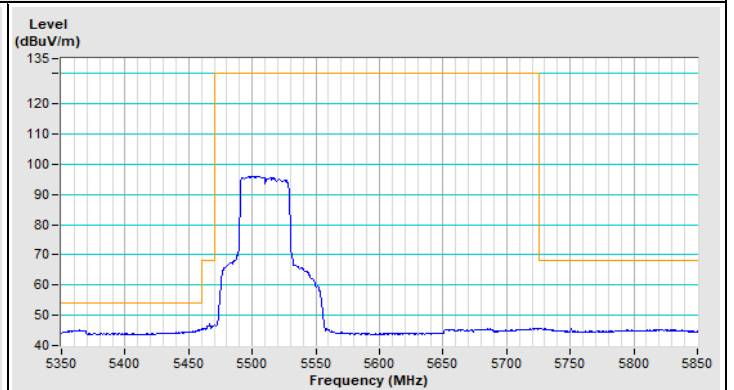

Horizontal (Average)

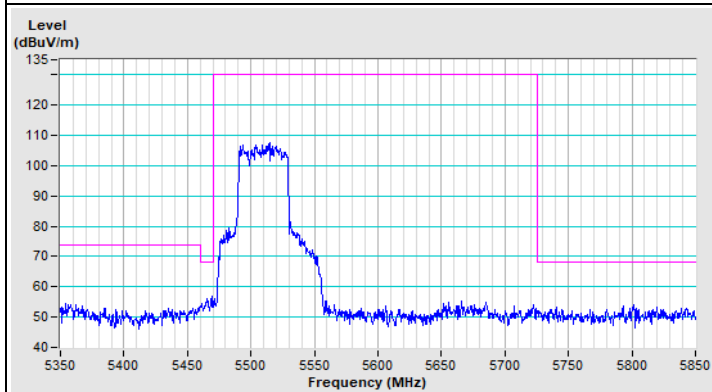


Vertical (Peak)

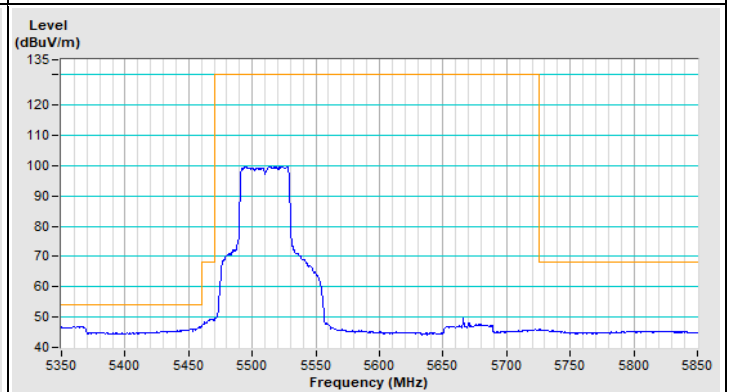


Vertical (Average)

802.11be (EHT40) Channel 134

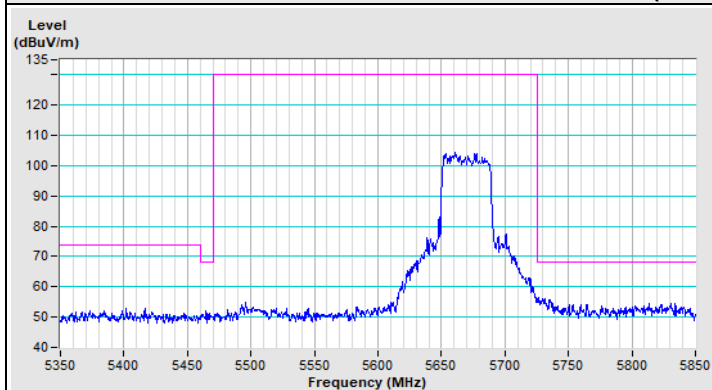


Horizontal (Peak)


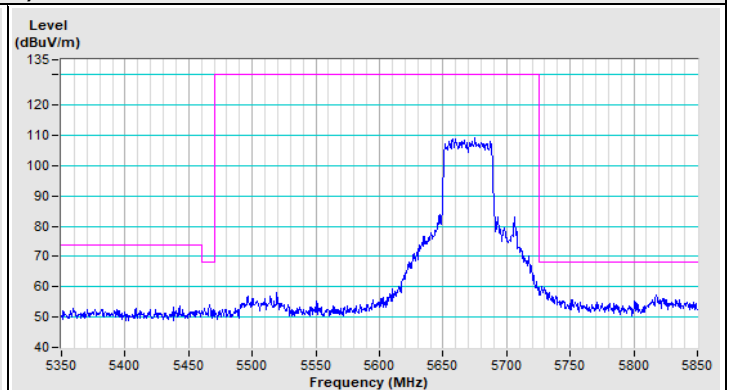


Vertical (Peak)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

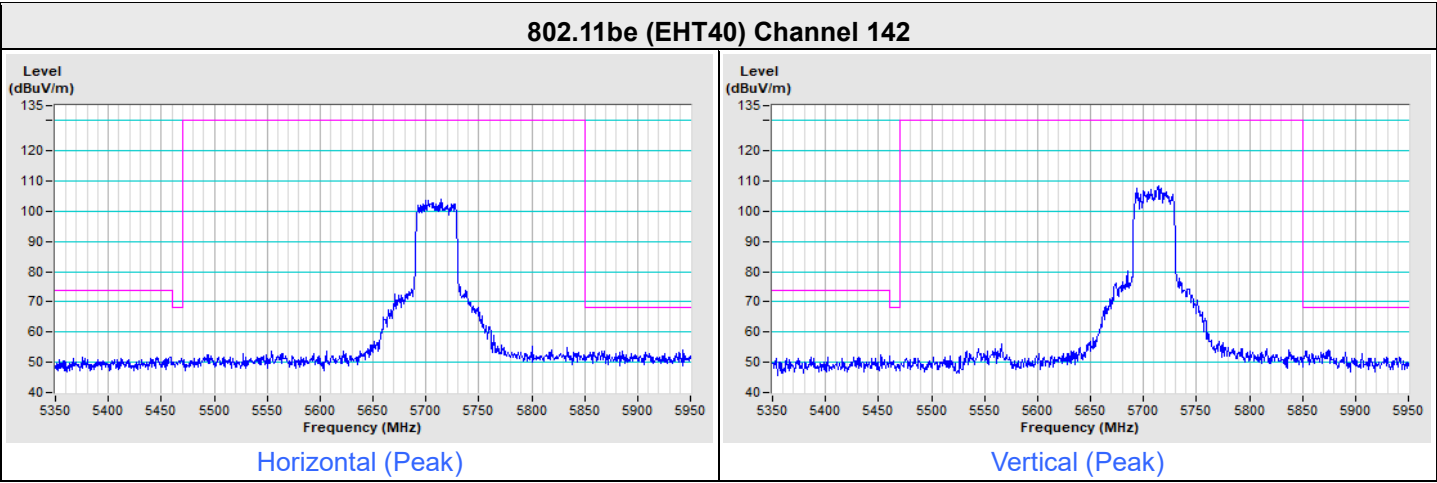


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

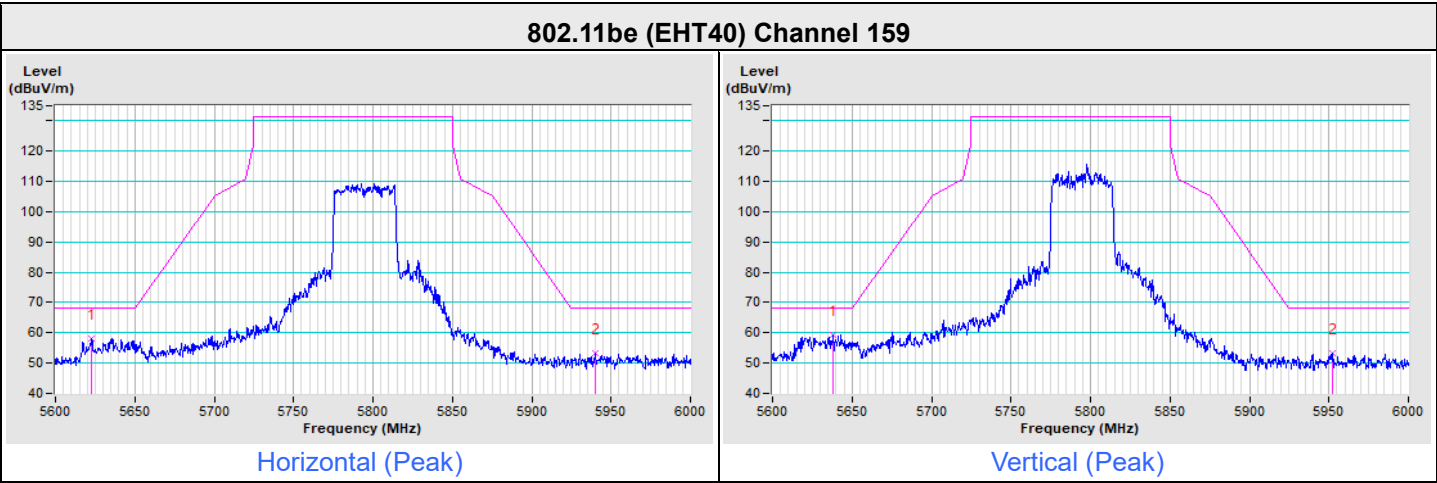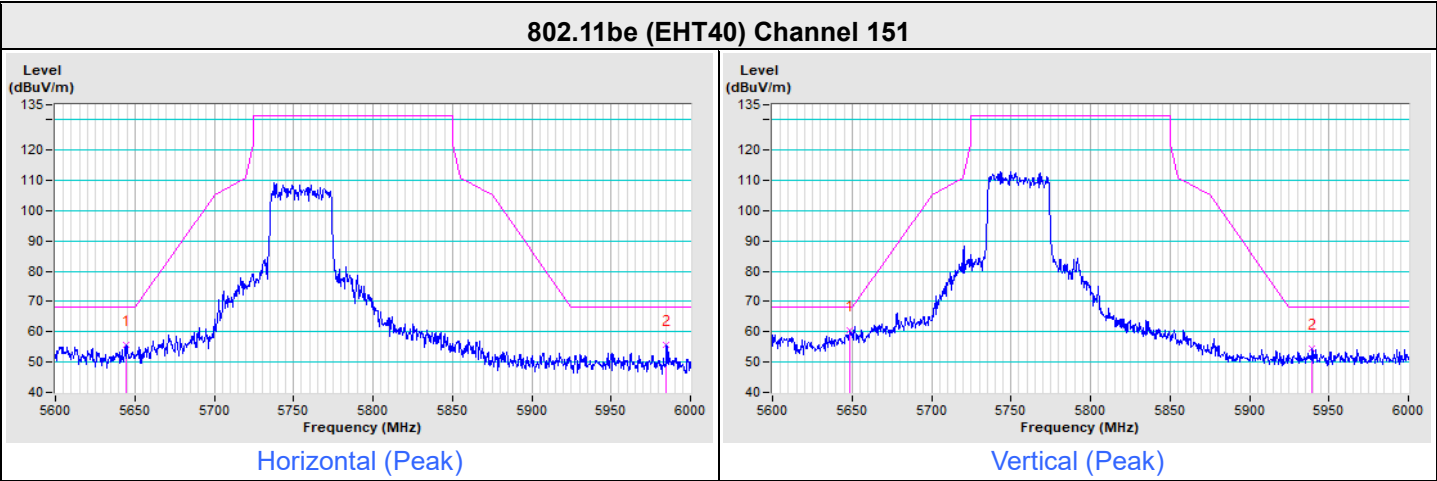


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

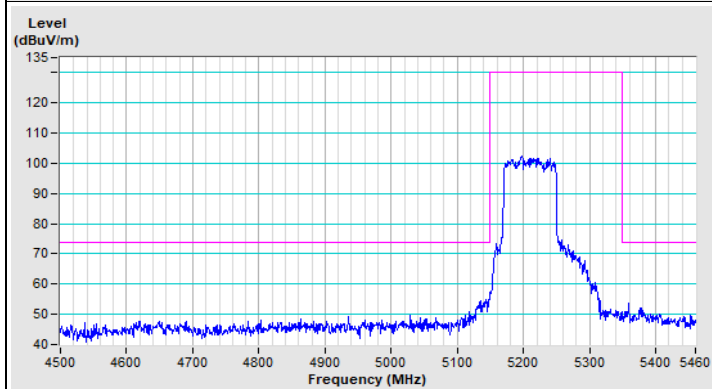


Horizontal (Peak)

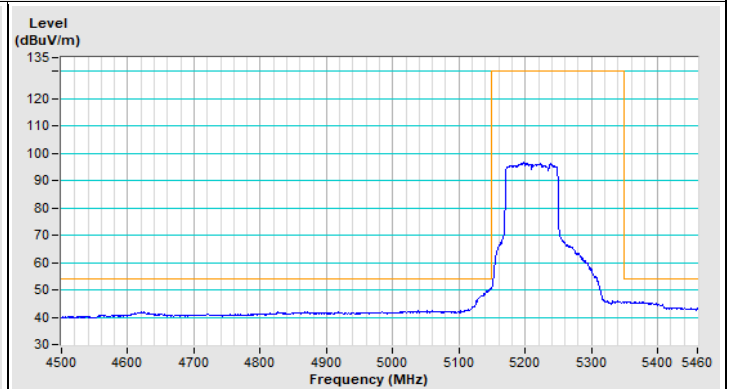

Horizontal (Average)

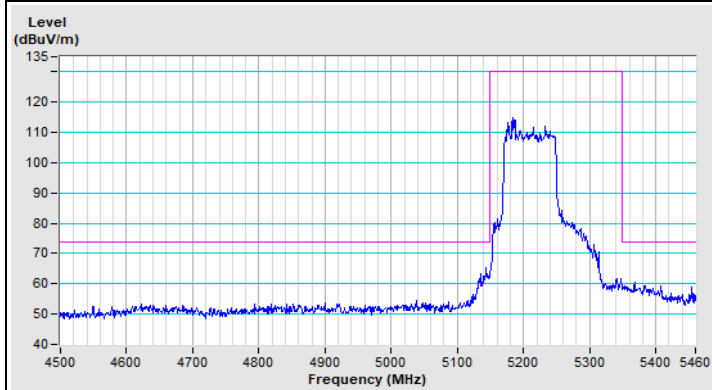


Vertical (Peak)

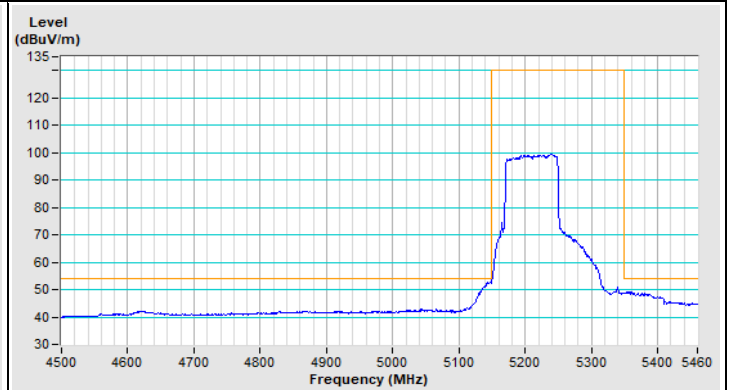


Vertical (Average)


802.11be (EHT80) Channel 58

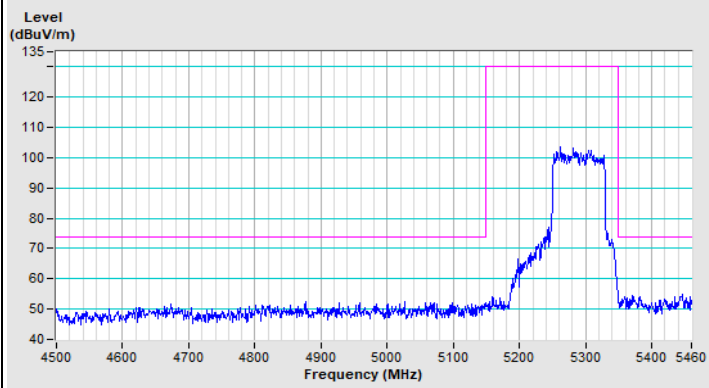


Horizontal (Peak)

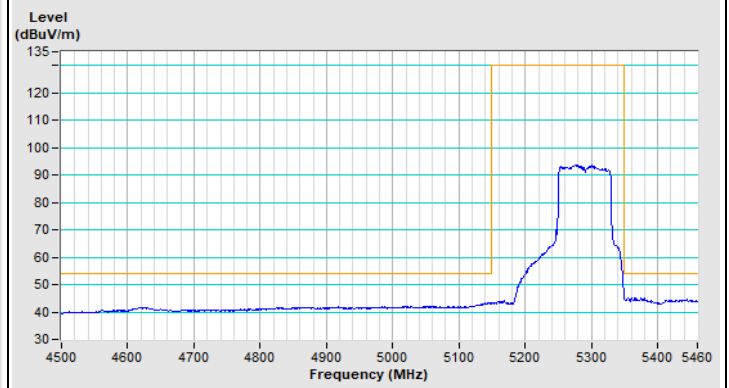

Horizontal (Average)

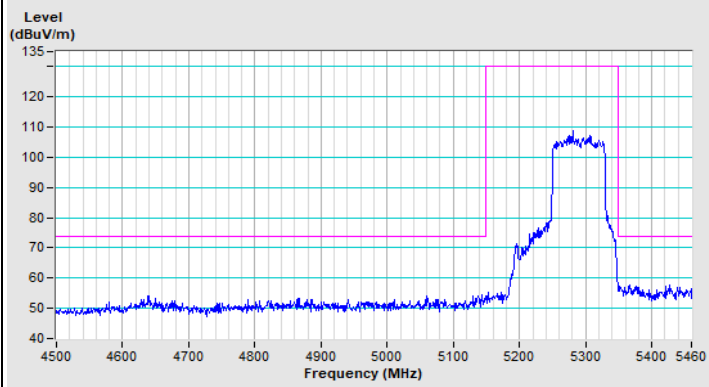


Vertical (Peak)

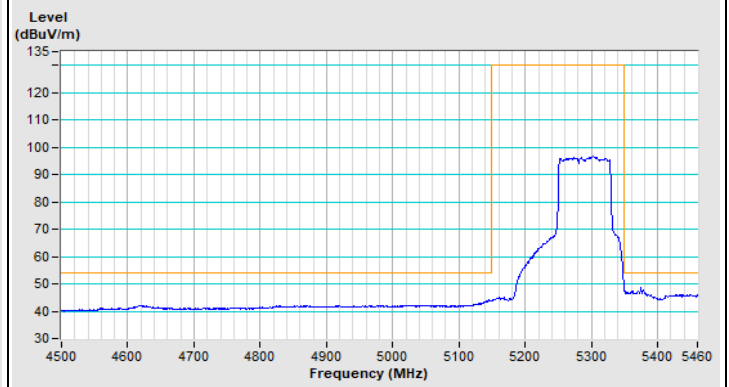


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

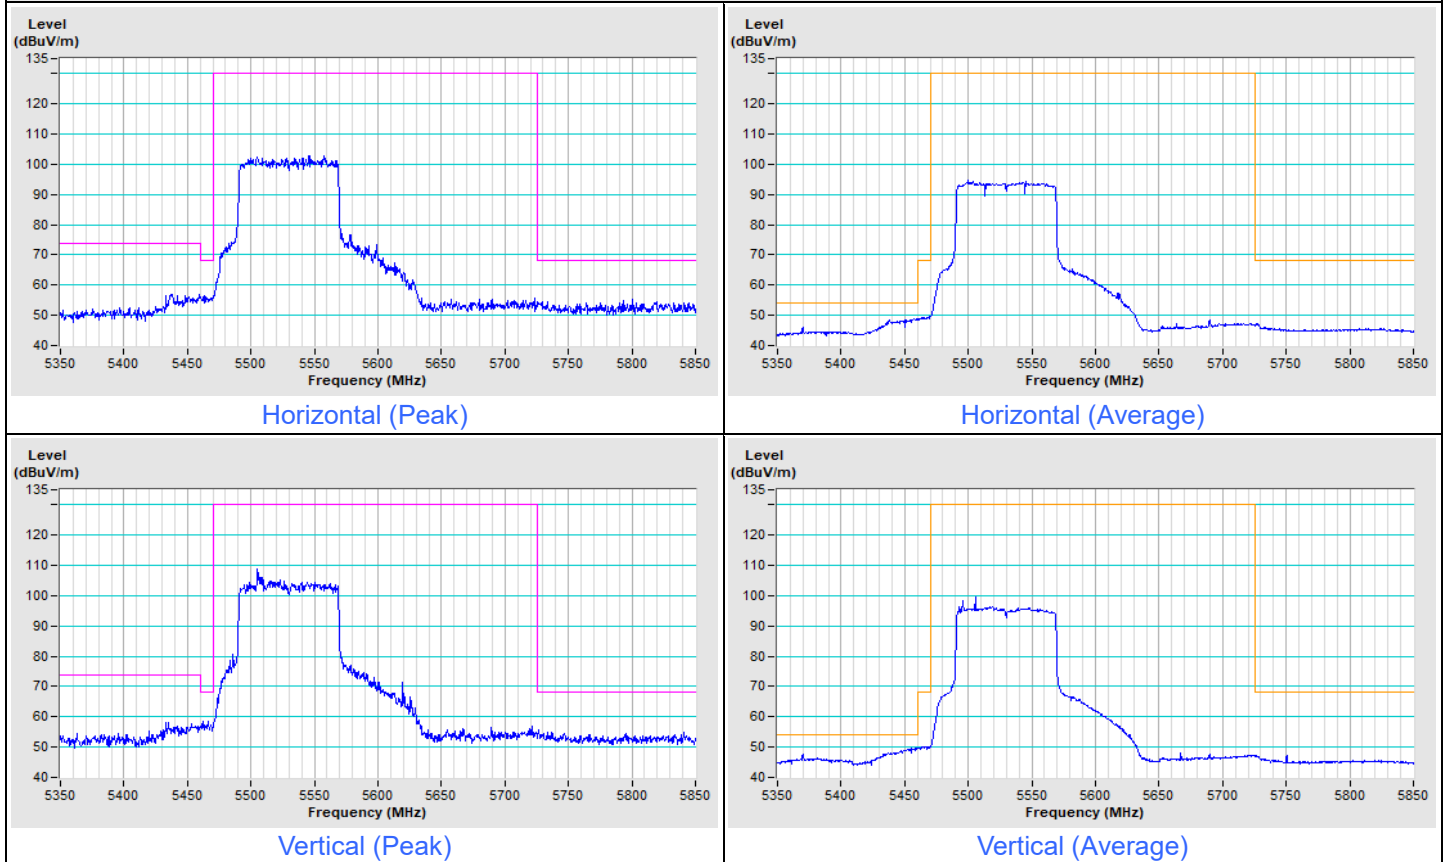


802.11be (EHT80) Channel 122

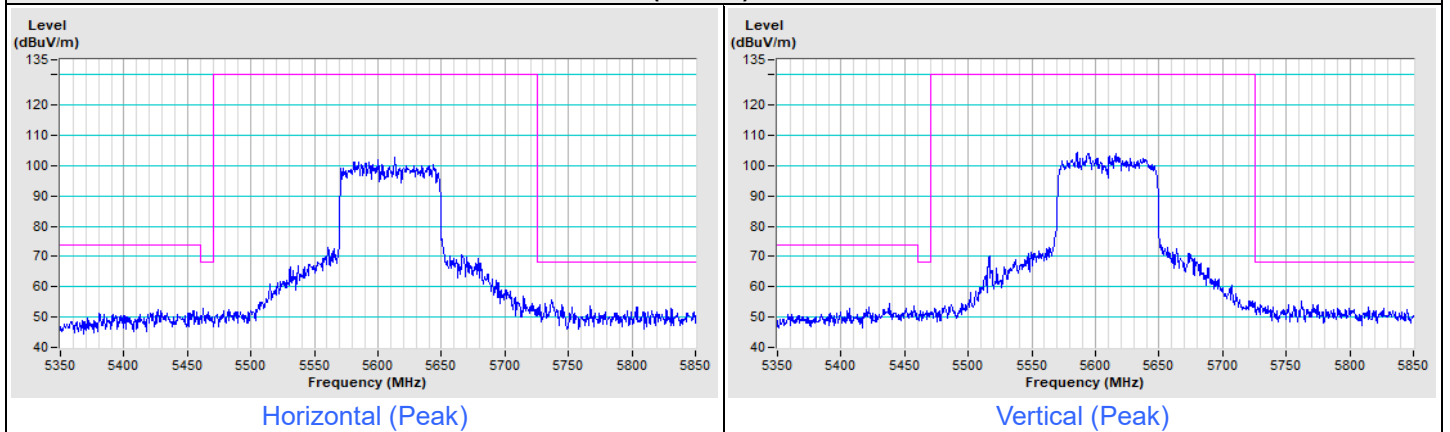

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

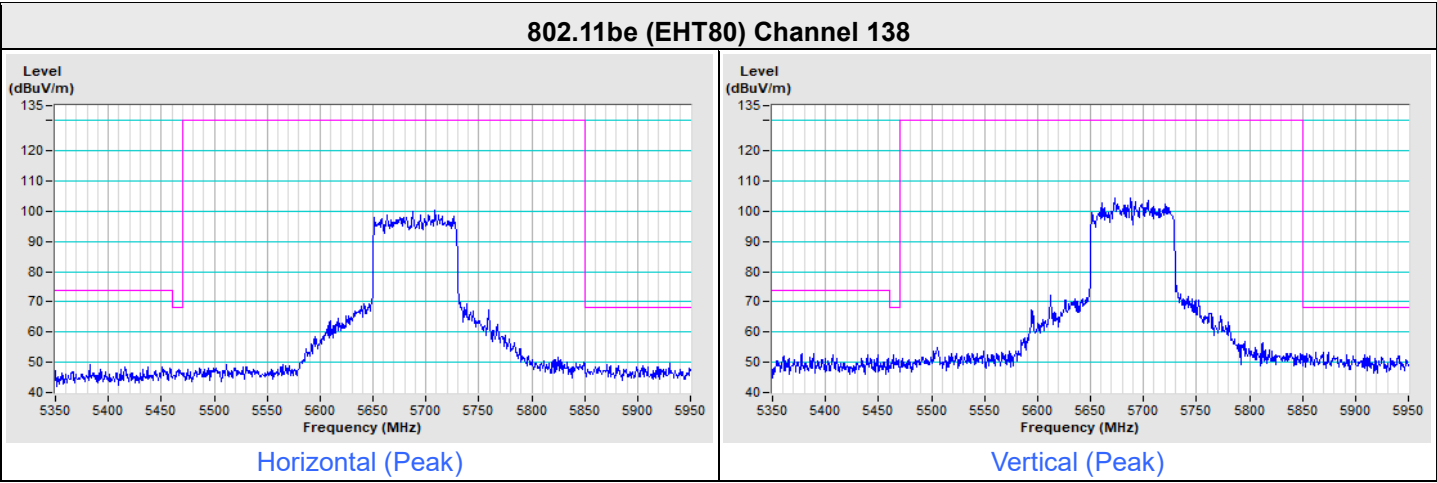


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

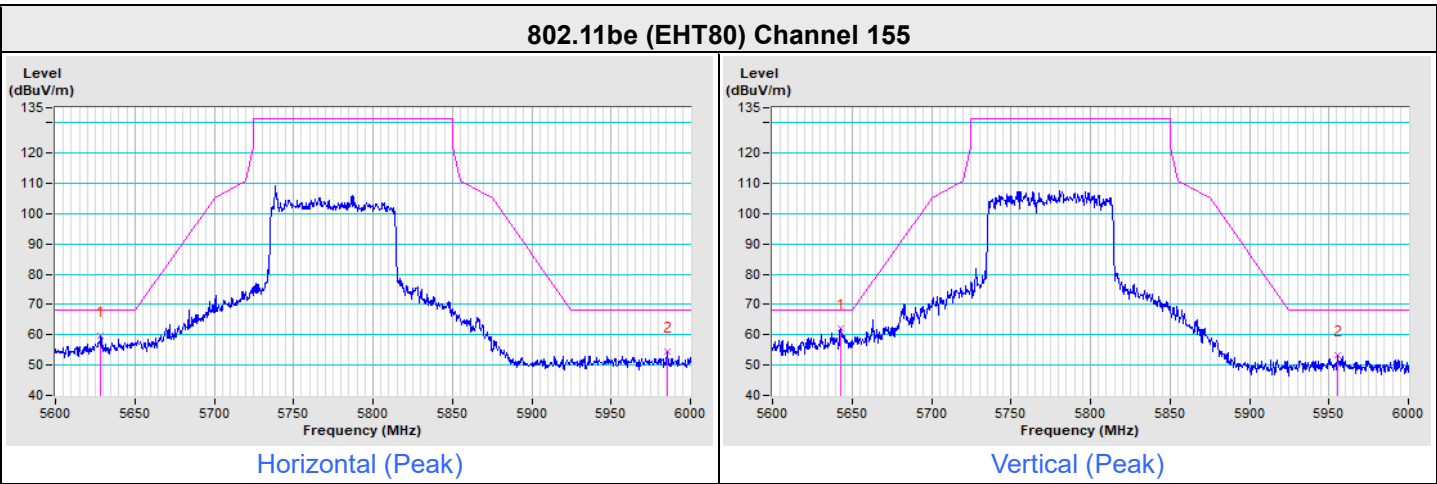


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

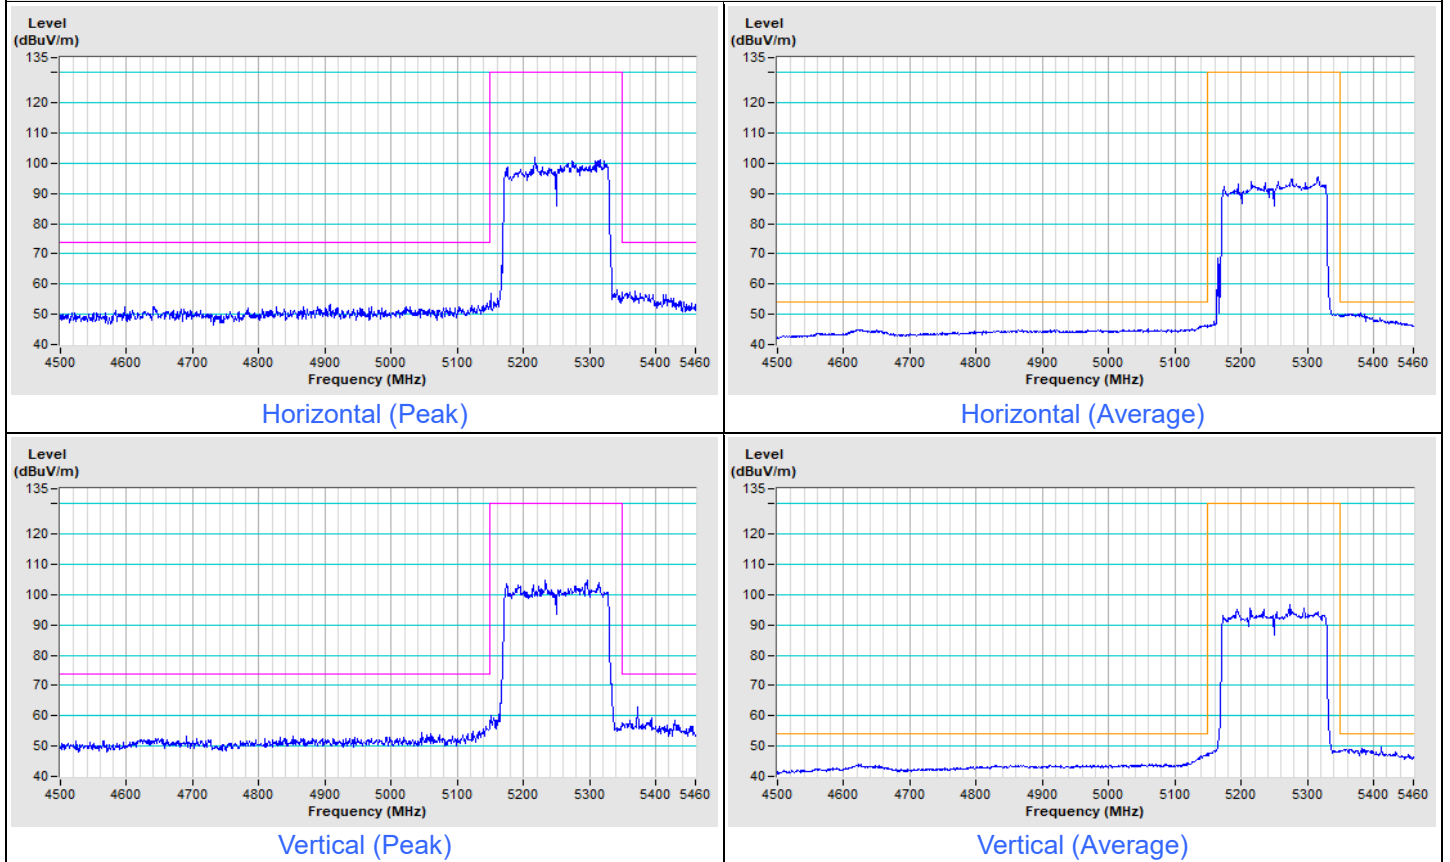

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

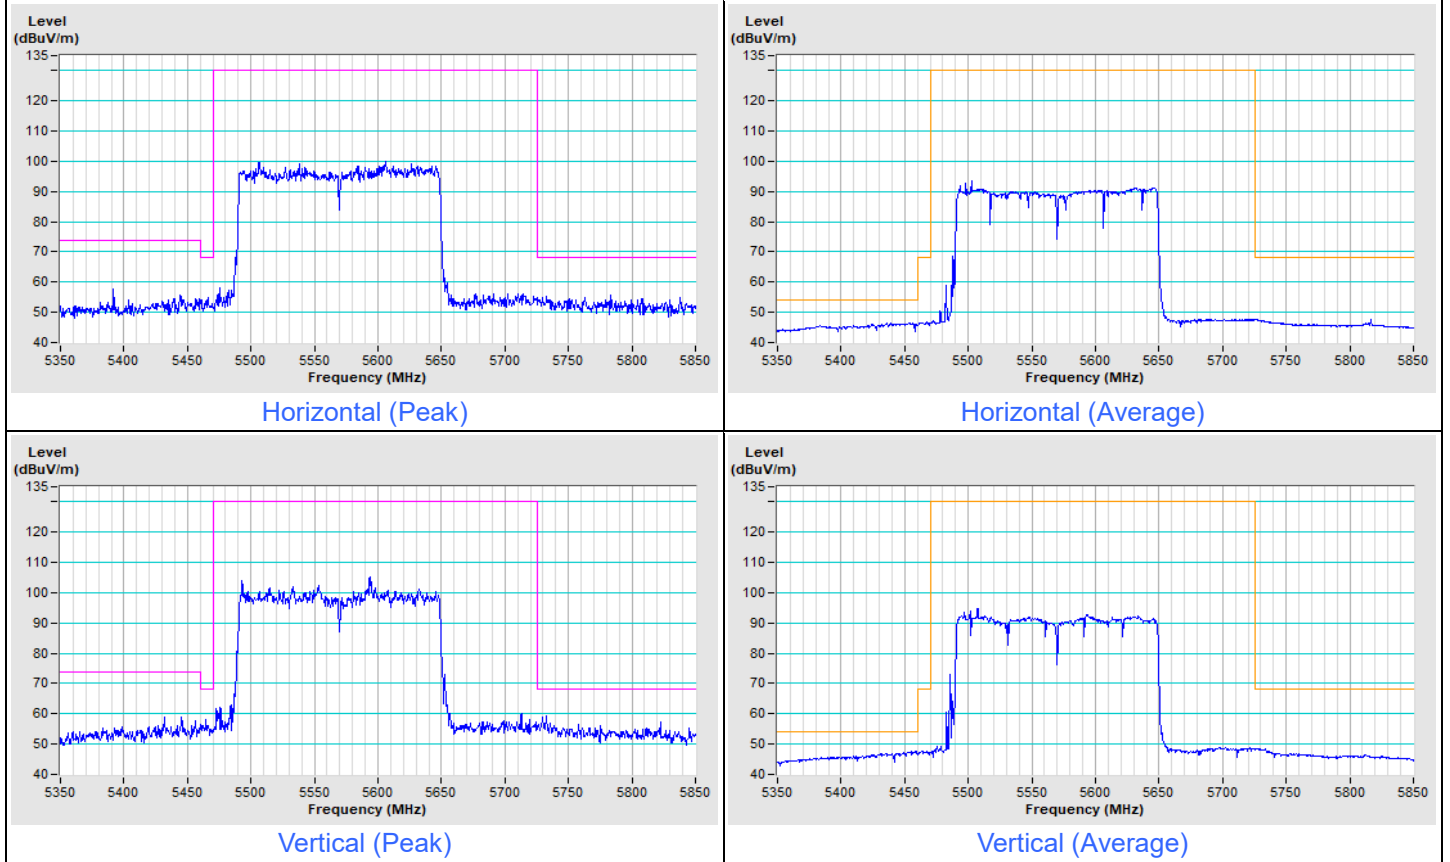

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---