




Plots of Injected signal (AWGN) level

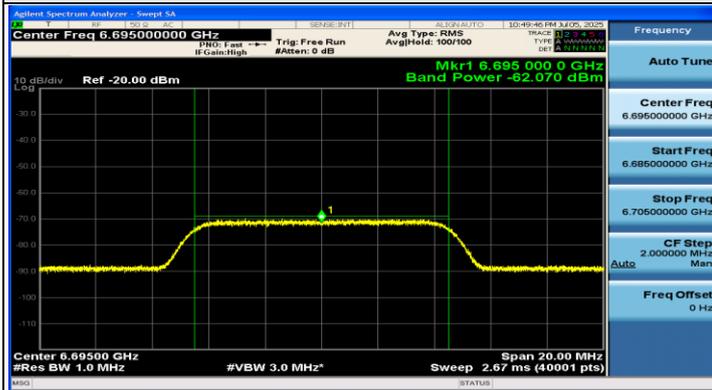


802.11be (EHT20) / CH149

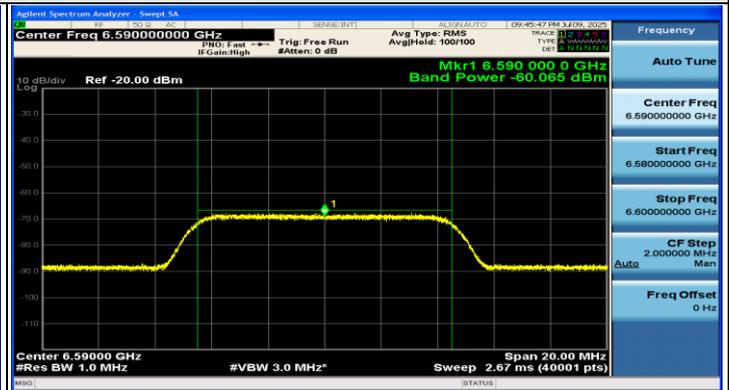

802.11be (EHT320) / CH159(Low Edge)

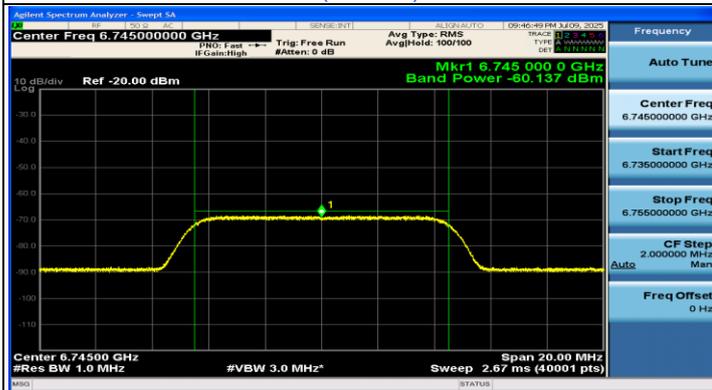


802.11be (EHT320) / CH159(Middle)

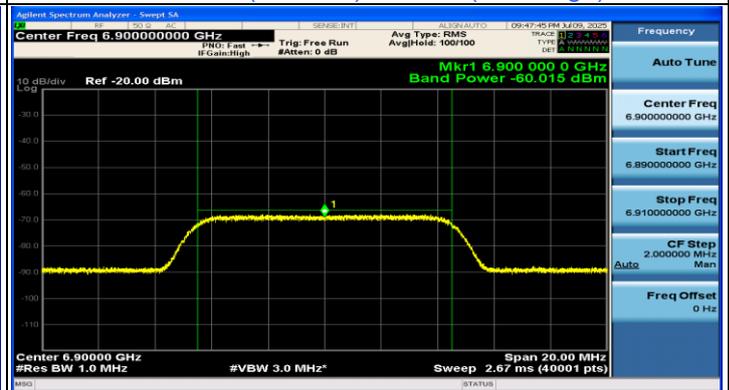

802.11be (EHT320) / CH159(High Edge)


Plots of EUT ceased transmission in the time domain

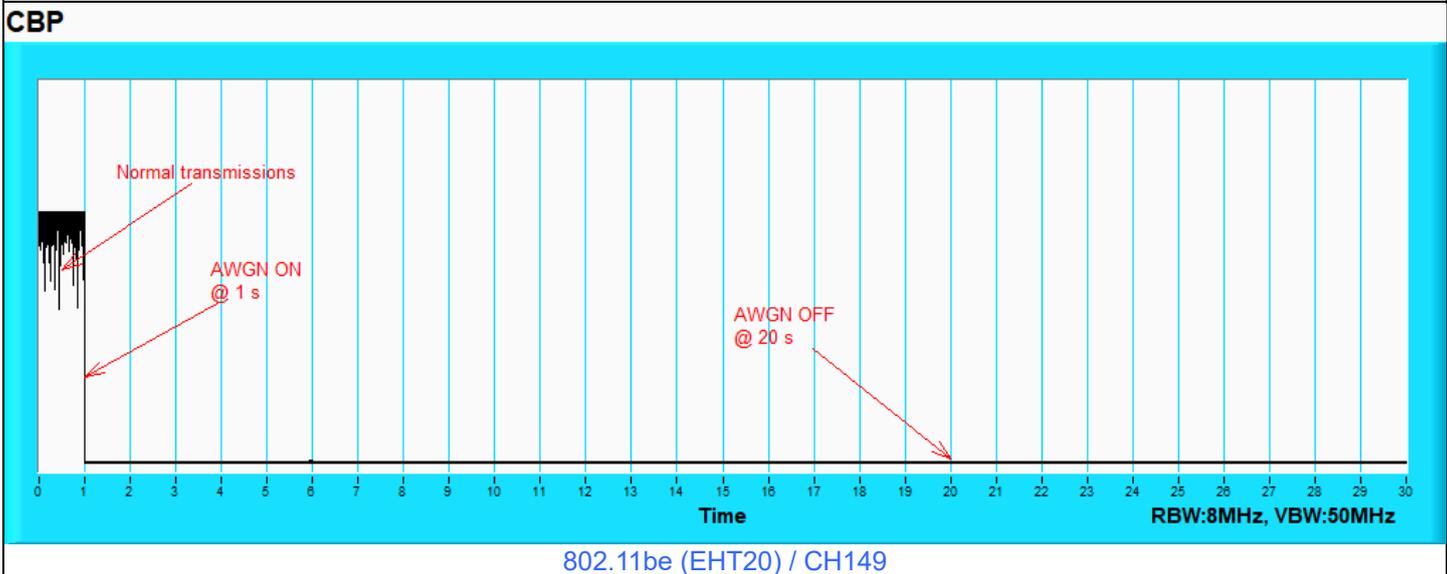

802.11be (EHT20) / CH149


Plots of EUT ceased transmission in the time domain

CBP

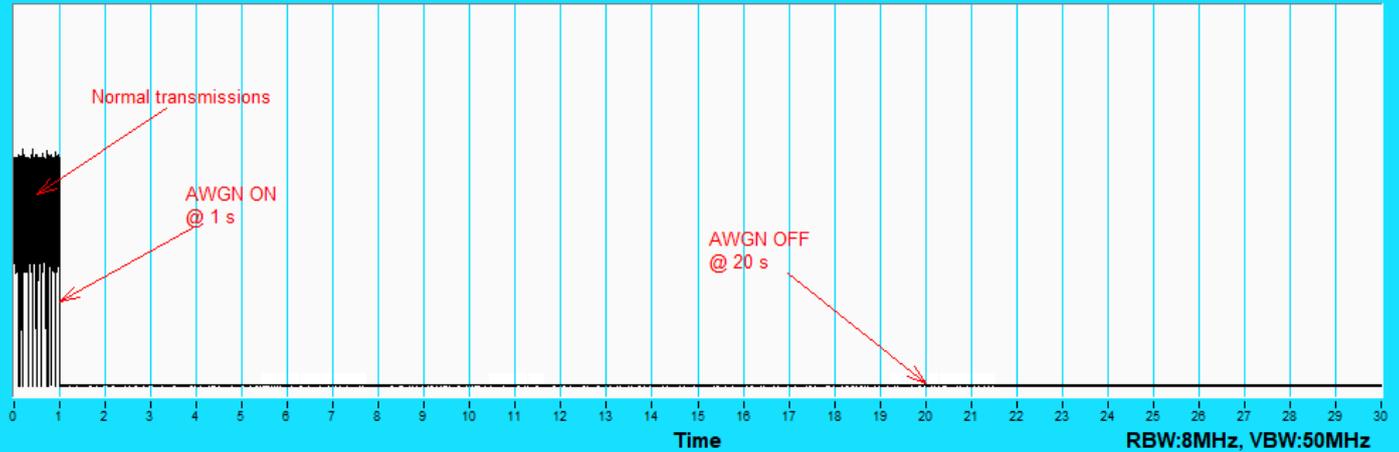


802.11be (EHT320) / CH159(Low Edge)

CBP

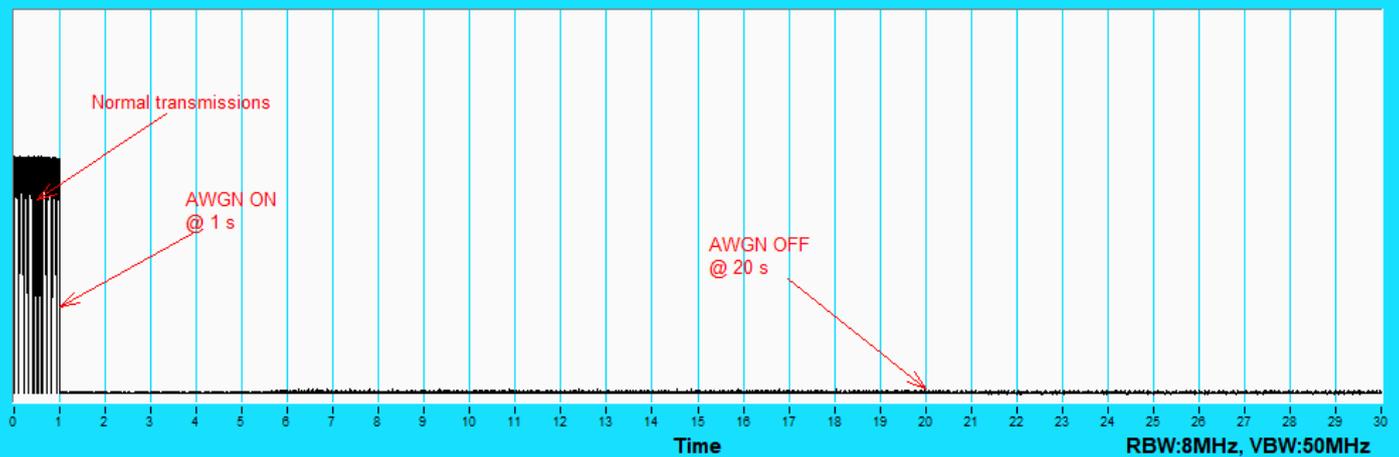

802.11be (EHT320) / CH159(Middle)

CBP

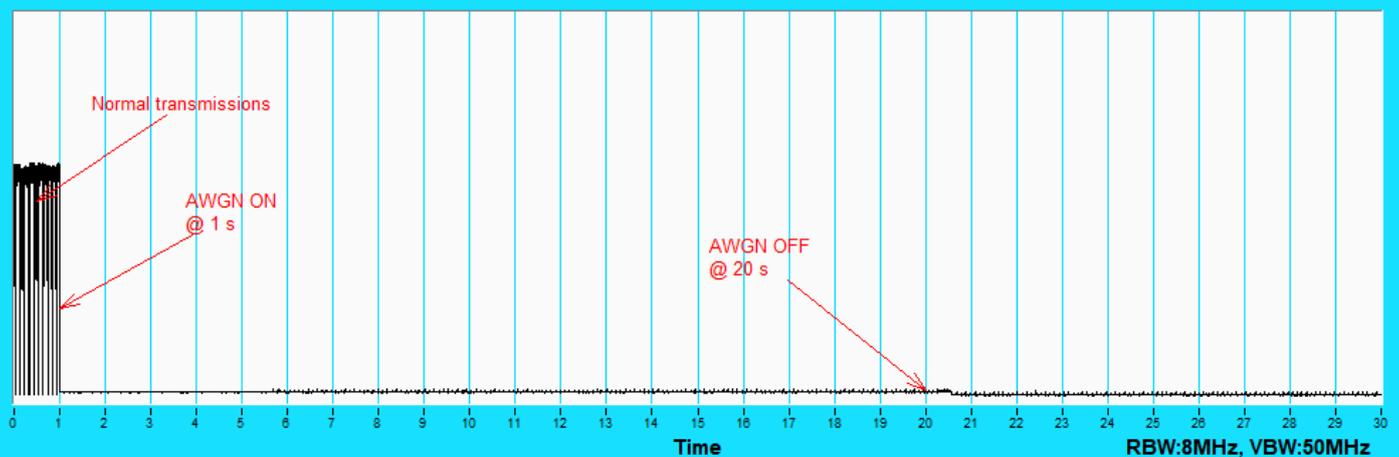

802.11be (EHT320) / CH159(High Edge)




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-63	2.6	0	-65.6	-62	OFF
					-69	2.6	0	-71.6	-62	Minimal
					-79.4	2.6	0	-82	-62	ON
	320	191	6905	6750	-60	2.6	0	-62.6	-62	OFF
					-63	2.6	0	-65.6	-62	Minimal
					-79.4	2.6	0	-82	-62	ON
				7060	-60	2.6	0	-62.6	-62	OFF
					-64	2.6	0	-66.6	-62	Minimal
					-79.4	2.6	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
			802.11be	20	6995	v	v	v	v	v	v	v			
802.11be	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

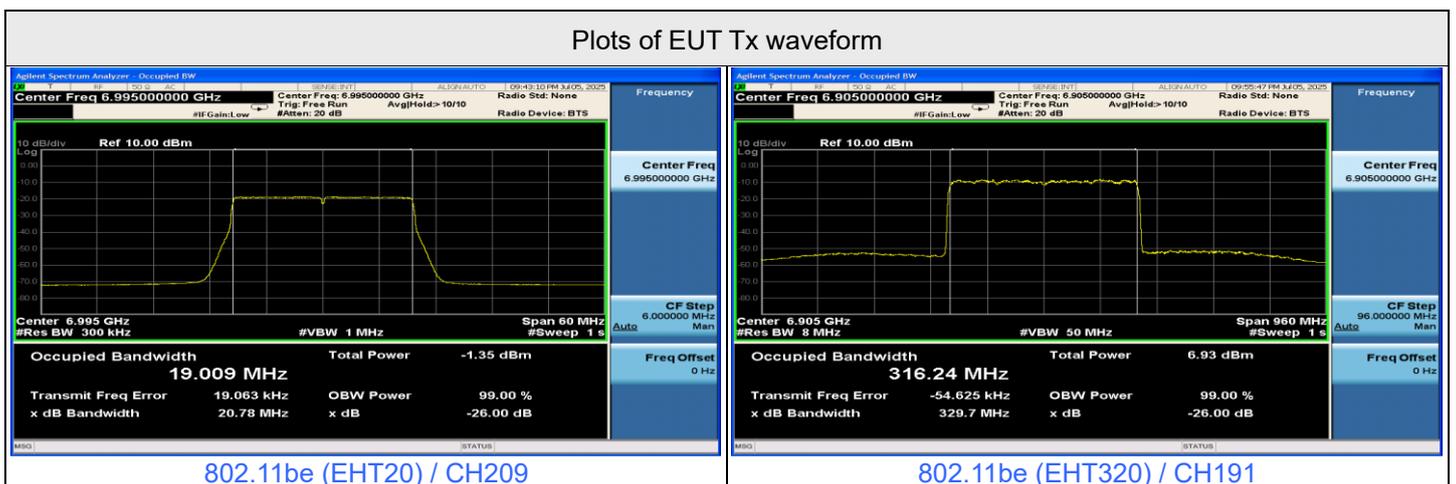


Plots of Injected signal (AWGN) level

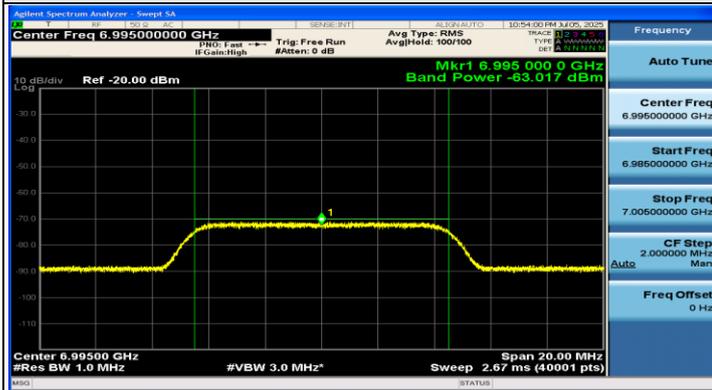


802.11be (EHT20) / CH209

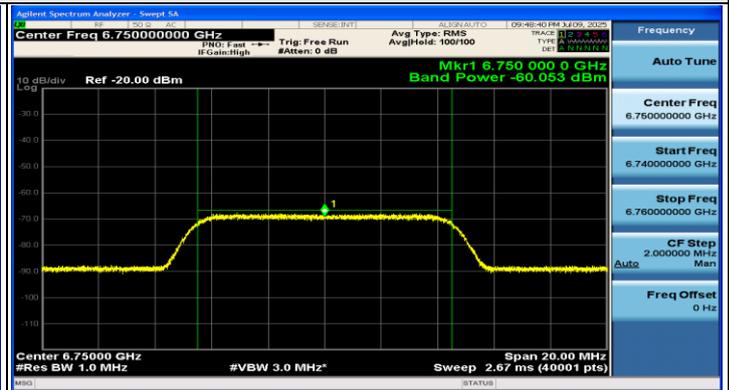

802.11be (EHT320) / CH191(Low Edge)

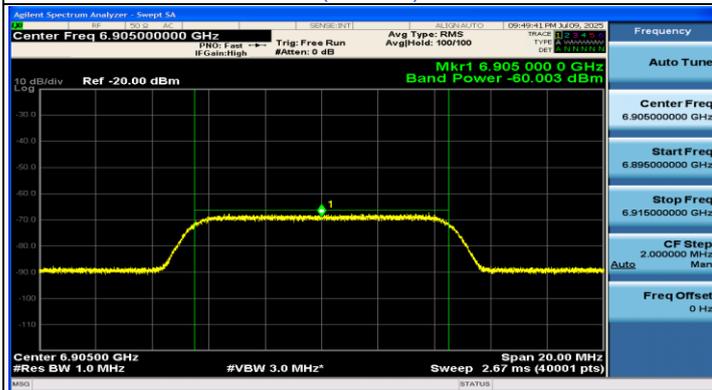


802.11be (EHT320) / CH191(Middle)

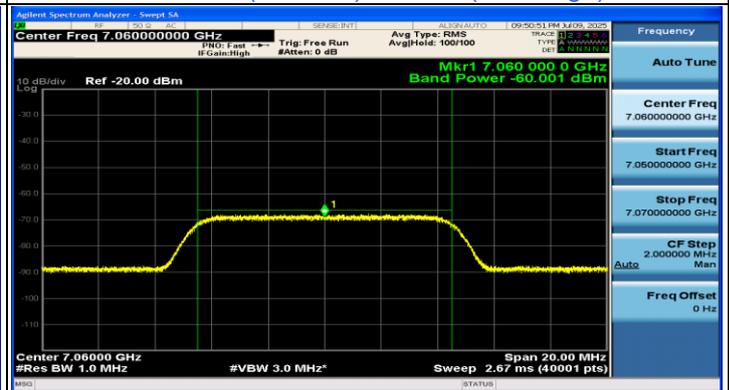

802.11be (EHT320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

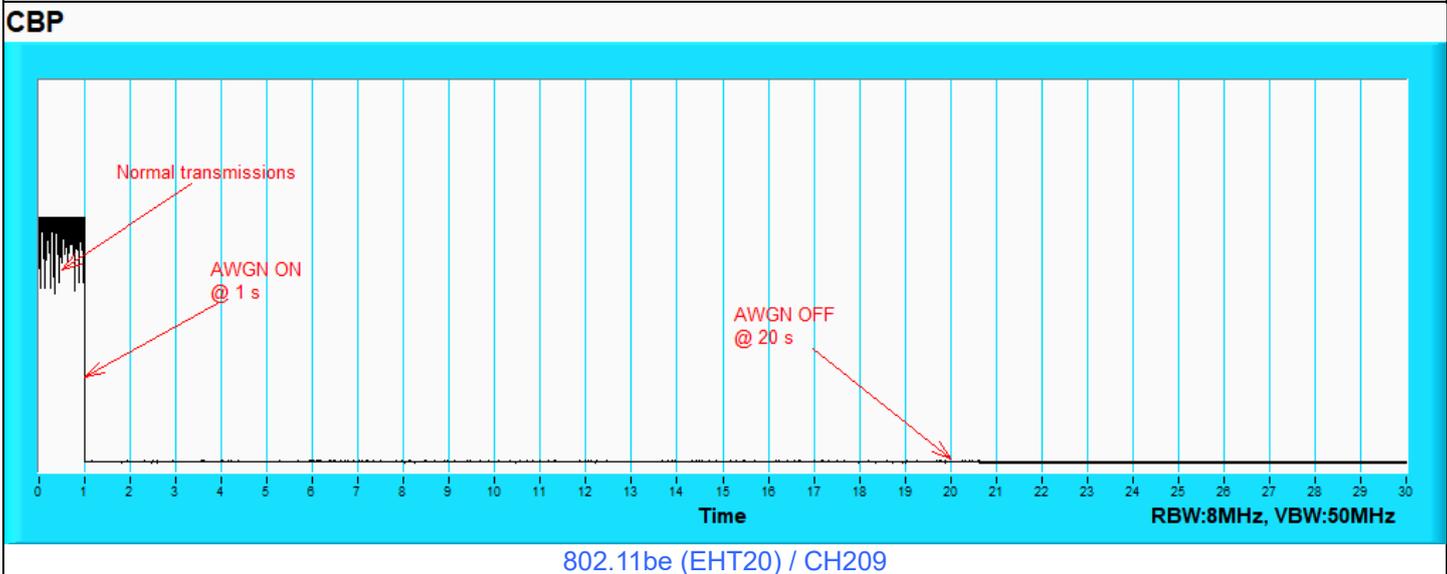

802.11be (EHT20) / CH209


Plots of EUT ceased transmission in the time domain

CBP

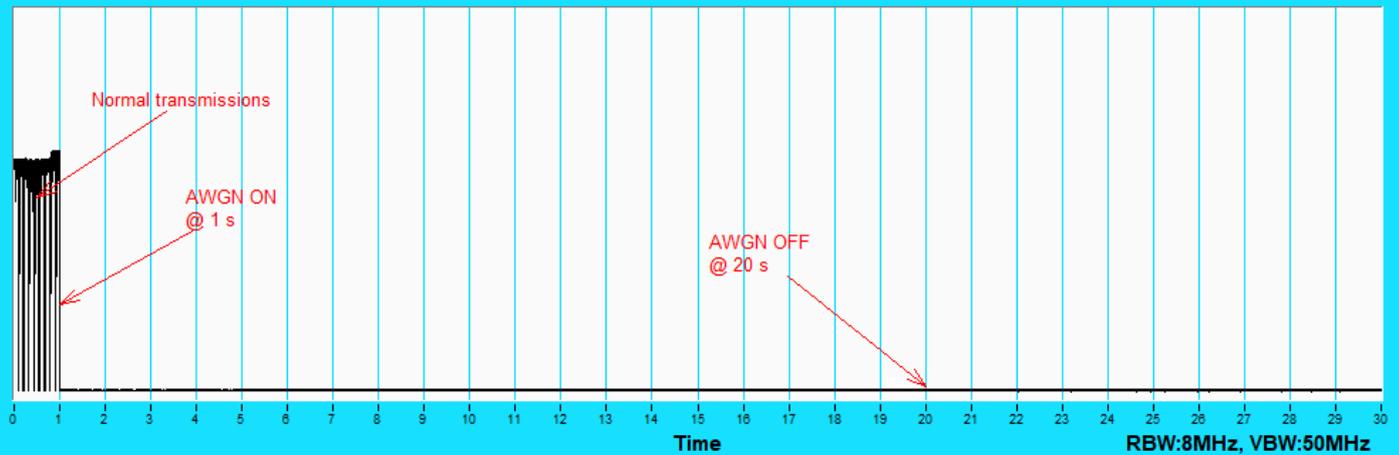


802.11be (EHT320) / CH191(Low Edge)

CBP

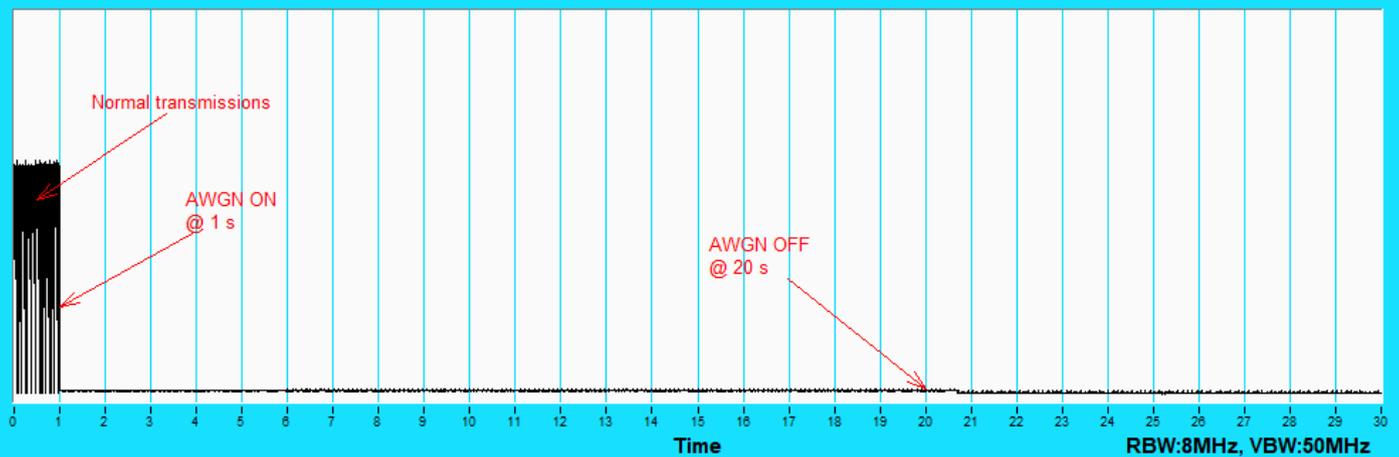

802.11be (EHT320) / CH191(Middle)

CBP

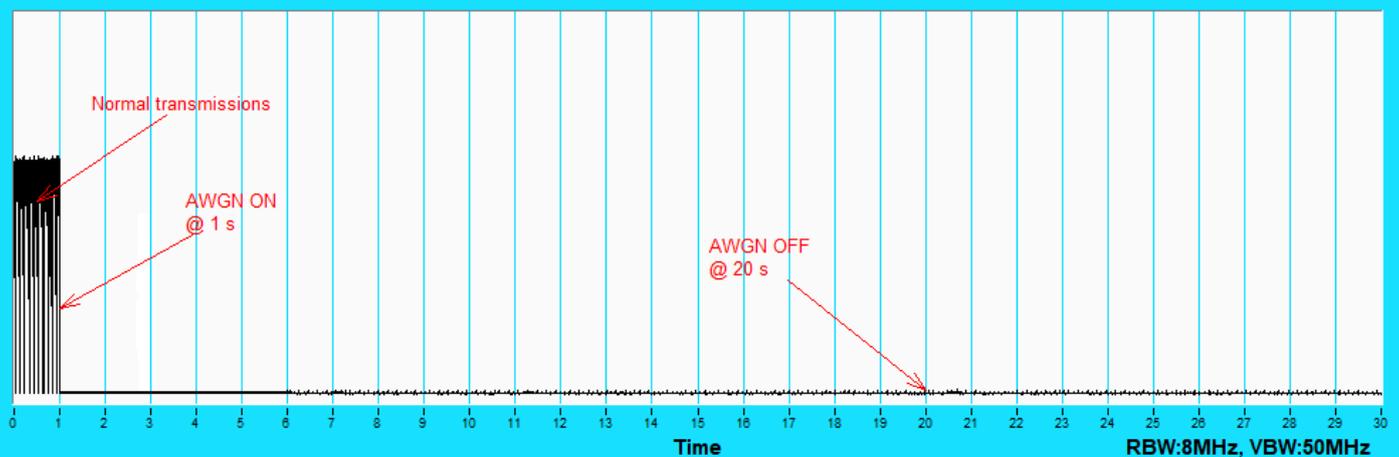

802.11be (EHT320) / CH191(High Edge)


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	8.80	37.78	24.87	46.58	33.67	66.00	56.00	-19.42	-22.33
2	0.16956	8.79	35.29	21.76	44.08	30.55	64.98	54.98	-20.90	-24.43
3	2.90135	9.25	22.87	16.76	32.12	26.01	56.00	46.00	-23.88	-19.99
4	5.30115	9.68	20.67	14.92	30.35	24.60	60.00	50.00	-29.65	-25.40
5	10.30332	9.07	23.21	18.71	32.28	27.78	60.00	50.00	-27.72	-22.22
6	15.47366	9.15	21.58	14.69	30.73	23.84	60.00	50.00	-29.27	-26.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

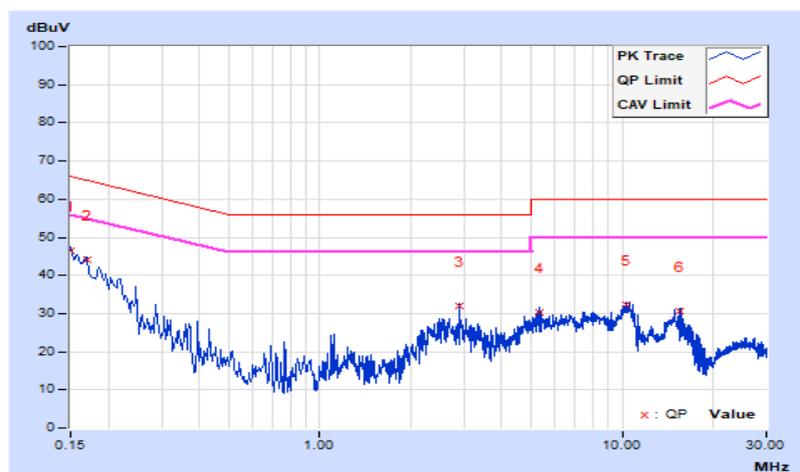


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15760	8.80	33.06	18.90	41.86	27.70	65.59	55.59	-23.73	-27.89
2	0.18520	8.78	29.82	16.74	38.60	25.52	64.25	54.25	-25.65	-28.73
3	1.09056	8.70	18.18	12.76	26.88	21.46	56.00	46.00	-29.12	-24.54
4	6.40014	8.93	20.55	15.25	29.48	24.18	60.00	50.00	-30.52	-25.82
5	10.92125	9.07	26.10	21.25	35.17	30.32	60.00	50.00	-24.83	-19.68
6	15.37588	9.15	23.76	16.57	32.91	25.72	60.00	50.00	-27.09	-24.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

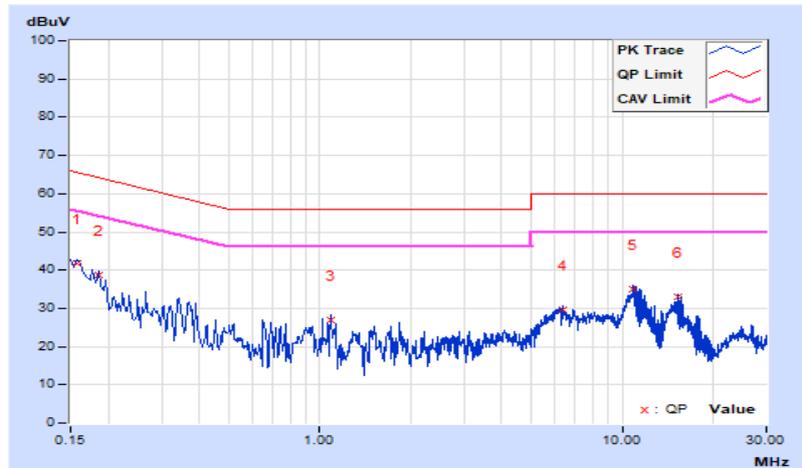

7.8 Unwanted Emissions below 1 GHz


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.98	25.9 QP	40.0	-14.1	1.25 H	102	40.1	-14.2
2	160.95	29.2 QP	43.5	-14.3	1.00 H	80	42.1	-12.9
3	366.59	27.3 QP	46.0	-18.7	1.50 H	86	37.9	-10.6
4	445.16	32.0 QP	46.0	-14.0	1.00 H	123	40.2	-8.2
5	465.53	29.7 QP	46.0	-16.3	1.25 H	123	37.5	-7.8
6	944.71	32.1 QP	46.0	-13.9	1.00 H	312	31.9	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

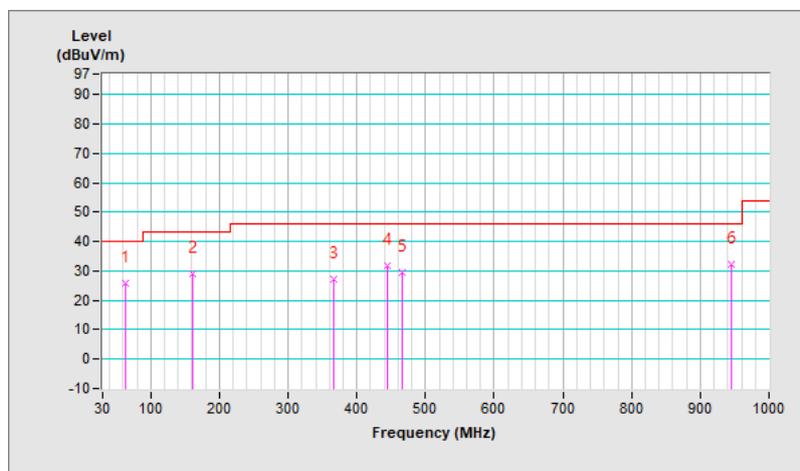


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	38.3 QP	40.0	-1.7	1.00 V	273	52.4	-14.1
2	52.31	33.7 QP	40.0	-6.3	1.25 V	310	46.7	-13.0
3	159.98	31.7 QP	43.5	-11.8	1.25 V	87	44.5	-12.8
4	470.38	34.6 QP	46.0	-11.4	1.50 V	346	42.4	-7.8
5	579.02	30.2 QP	46.0	-15.8	1.00 V	16	35.8	-5.6
6	944.71	32.3 QP	46.0	-13.7	1.50 V	334	32.1	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

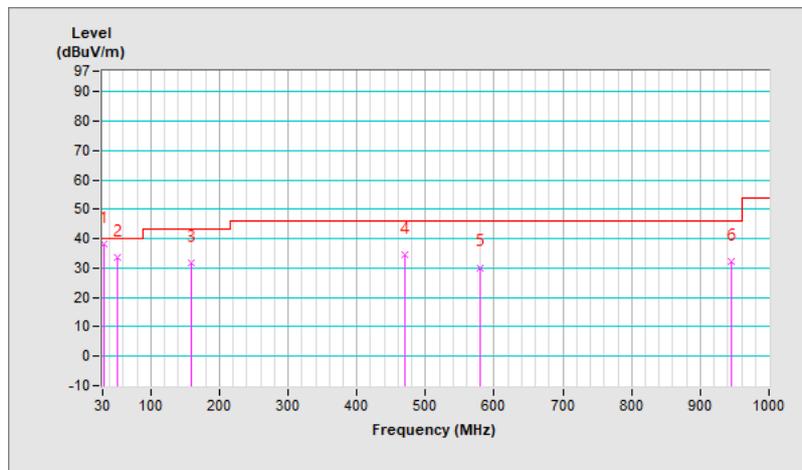

7.9 Unwanted Emissions above 1 GHz

CDD

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.9 PK	88.2	-32.3	1.38 H	145	50.0	5.9
2	#5925.00	43.9 AV	68.2	-24.3	1.38 H	145	38.0	5.9
3	*5955.00	107.3 PK			1.38 H	145	63.9	43.4
4	*5955.00	98.2 AV			1.38 H	145	54.8	43.4
5	11910.00	59.2 PK	74.0	-14.8	1.56 H	138	47.8	11.4
6	11910.00	45.3 AV	54.0	-8.7	1.56 H	138	33.9	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.4 PK	88.2	-31.8	3.19 V	320	50.5	5.9
2	#5925.00	44.4 AV	68.2	-23.8	3.19 V	320	38.5	5.9
3	*5955.00	108.6 PK			3.19 V	320	65.2	43.4
4	*5955.00	98.9 AV			3.19 V	320	55.5	43.4
5	11910.00	60.3 PK	74.0	-13.7	3.04 V	200	48.9	11.4
6	11910.00	46.7 AV	54.0	-7.3	3.04 V	200	35.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.0 PK			1.39 H	141	63.5	44.5
2	*6175.00	98.5 AV			1.39 H	141	54.0	44.5
3	12350.00	49.4 PK	74.0	-24.6	1.55 H	138	38.2	11.2
4	12350.00	45.2 AV	54.0	-8.8	1.55 H	138	34.0	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.8 PK			1.88 V	4	64.3	44.5
2	*6175.00	99.5 AV			1.88 V	4	55.0	44.5
3	12350.00	60.2 PK	74.0	-13.8	3.00 V	196	49.0	11.2
4	12350.00	46.5 AV	54.0	-7.5	3.00 V	196	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.7 PK			1.40 H	138	62.8	45.9
2	*6415.00	98.9 AV			1.40 H	138	53.0	45.9
3	#12830.00	48.8 PK	88.2	-39.4	1.51 H	136	37.5	11.3
4	#12830.00	44.8 AV	68.2	-23.4	1.51 H	136	33.5	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.3 PK			1.81 V	3	63.4	45.9
2	*6415.00	99.7 AV			1.81 V	3	53.8	45.9
3	#12830.00	59.8 PK	88.2	-28.4	3.05 V	199	48.5	11.3
4	#12830.00	46.2 AV	68.2	-22.0	3.05 V	199	34.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.7 PK			1.44 H	149	62.8	45.9
2	*6435.00	100.5 AV			1.44 H	139	54.6	45.9
3	#12870.00	49.2 PK	88.2	-39.0	1.49 H	130	37.8	11.4
4	#12870.00	45.0 AV	68.2	-23.2	1.49 H	130	33.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.9 PK			1.77 V	9	64.0	45.9
2	*6435.00	101.4 AV			1.77 V	9	55.5	45.9
3	#12870.00	60.2 PK	88.2	-28.0	2.99 V	198	48.8	11.4
4	#12870.00	46.4 AV	68.2	-21.8	2.99 V	198	35.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.0 PK			1.50 H	136	62.8	46.2
2	*6475.00	98.4 AV			1.50 H	136	52.2	46.2
3	#12950.00	59.4 PK	88.2	-28.8	1.55 H	138	48.2	11.2
4	#12950.00	45.2 AV	68.2	-23.0	1.55 H	138	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.7 PK			2.32 V	6	63.5	46.2
2	*6475.00	99.4 AV			2.32 V	6	53.2	46.2
3	#12950.00	60.2 PK	88.2	-28.0	3.06 V	205	49.0	11.2
4	#12950.00	46.5 AV	68.2	-21.7	3.06 V	205	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.6 PK			1.59 H	142	63.2	46.4
2	*6515.00	99.4 AV			1.59 H	142	53.0	46.4
3	#13030.00	59.3 PK	88.2	-28.9	1.59 H	136	48.1	11.2
4	#13030.00	45.4 AV	68.2	-22.8	1.59 H	136	34.2	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.9 PK			2.00 V	5	64.5	46.4
2	*6515.00	100.5 AV			2.00 V	5	54.1	46.4
3	#13030.00	60.5 PK	88.2	-27.7	3.08 V	206	49.3	11.2
4	#13030.00	46.5 AV	68.2	-21.7	3.08 V	206	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.1 PK			1.33 H	142	62.7	46.4
2	*6535.00	98.7 AV			1.33 H	142	52.3	46.4
3	#13070.00	59.9 PK	88.2	-28.3	1.48 H	132	48.4	11.5
4	#13070.00	45.8 AV	68.2	-22.4	1.48 H	132	34.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.9 PK			1.99 V	7	63.5	46.4
2	*6535.00	99.4 AV			1.99 V	7	53.0	46.4
3	#13070.00	60.7 PK	88.2	-27.5	3.05 V	203	49.2	11.5
4	#13070.00	46.5 AV	68.2	-21.7	3.05 V	203	35.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.7 PK			1.42 H	155	63.1	46.6
2	*6695.00	99.7 AV			1.42 H	155	53.1	46.6
3	13390.00	59.8 PK	74.0	-14.2	1.56 H	143	48.6	11.2
4	13390.00	45.7 AV	54.0	-8.3	1.56 H	143	34.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.0 PK			2.03 V	2	64.4	46.6
2	*6695.00	101.0 AV			2.03 V	2	54.4	46.6
3	13390.00	60.5 PK	74.0	-13.5	3.00 V	209	49.3	11.2
4	13390.00	46.5 AV	54.0	-7.5	3.00 V	209	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.1 PK			2.36 H	20	62.0	47.1
2	*6855.00	100.0 AV			2.36 H	20	52.9	47.1
3	#13710.00	59.2 PK	88.2	-29.0	1.60 H	148	48.2	11.0
4	#13710.00	45.3 AV	68.2	-22.9	1.60 H	148	34.3	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			2.00 V	313	63.6	47.1
2	*6855.00	100.4 AV			2.00 V	313	53.3	47.1
3	#13710.00	59.9 PK	88.2	-28.3	3.10 V	209	48.9	11.0
4	#13710.00	46.2 AV	68.2	-22.0	3.10 V	209	35.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.5 PK			2.33 H	22	62.4	47.1
2	*6875.00	99.0 AV			2.33 H	22	51.9	47.1
3	#13750.00	59.3 PK	88.2	-28.9	1.50 H	147	48.2	11.1
4	#13750.00	46.7 AV	68.2	-21.5	1.50 H	147	35.6	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.5 PK			1.98 V	238	63.4	47.1
2	*6875.00	100.1 AV			1.98 V	238	53.0	47.1
3	#13750.00	60.3 PK	88.2	-27.9	3.15 V	207	49.2	11.1
4	#13750.00	46.6 AV	68.2	-21.6	3.15 V	207	35.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.5 PK			2.18 H	31	62.4	47.1
2	*6995.00	99.4 AV			2.18 H	31	52.3	47.1
3	#13990.00	60.3 PK	88.2	-27.9	1.44 H	152	48.3	12.0
4	#13990.00	47.5 AV	68.2	-20.7	1.44 H	152	35.5	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.2 PK			2.25 V	13	64.1	47.1
2	*6995.00	100.1 AV			2.25 V	13	53.0	47.1
3	#13990.00	60.3 PK	88.2	-27.9	1.44 V	152	48.3	12.0
4	#13990.00	47.5 AV	68.2	-20.7	1.44 V	152	35.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.2 PK			2.35 H	20	58.6	47.6
2	*7115.00	96.0 AV			2.35 H	20	48.4	47.6
3	#7125.00	85.3 PK	88.2	-2.9	2.35 H	20	75.6	9.7
4	#7125.00	56.8 AV	68.2	-11.4	2.35 H	20	47.1	9.7
5	#14230.00	59.4 PK	88.2	-28.8	1.56 H	137	47.9	11.5
6	#14230.00	45.3 AV	68.2	-22.9	1.56 H	137	33.8	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	108.2 PK			2.10 V	8	60.6	47.6
2	*7115.00	98.0 AV			2.10 V	8	50.4	47.6
3	#7125.00	87.8 PK	88.2	-0.4	2.10 V	8	78.1	9.7
4	#7125.00	57.3 AV	68.2	-10.9	2.10 V	8	47.6	9.7
5	#14230.00	60.3 PK	88.2	-27.9	3.04 V	201	48.8	11.5
6	#14230.00	46.5 AV	68.2	-21.7	3.04 V	201	35.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.1 PK	88.2	-32.1	1.56 H	142	50.2	5.9
2	#5925.00	44.4 AV	68.2	-23.8	1.56 H	142	38.5	5.9
3	*5955.00	109.4 PK			1.56 H	142	66.0	43.4
4	*5955.00	98.1 AV			1.56 H	142	54.7	43.4
5	11910.00	58.9 PK	74.0	-15.1	1.55 H	148	47.5	11.4
6	11910.00	45.0 AV	54.0	-9.0	1.55 H	148	33.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.7 PK	88.2	-31.5	2.18 V	246	50.8	5.9
2	#5925.00	43.5 AV	68.2	-24.7	2.18 V	246	37.6	5.9
3	*5955.00	111.0 PK			2.18 V	246	67.6	43.4
4	*5955.00	98.4 AV			2.18 V	246	55.0	43.4
5	11910.00	59.9 PK	74.0	-14.1	3.00 V	197	48.5	11.4
6	11910.00	46.2 AV	54.0	-7.8	3.00 V	197	34.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.0 PK			1.55 H	141	66.5	44.5
2	*6175.00	98.4 AV			1.55 H	141	53.9	44.5
3	12350.00	58.7 PK	74.0	-15.3	1.56 H	137	47.5	11.2
4	12350.00	44.7 AV	54.0	-9.3	1.56 H	137	33.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	112.0 PK			2.11 V	250	67.5	44.5
2	*6175.00	99.4 AV			2.11 V	250	54.9	44.5
3	12350.00	59.8 PK	74.0	-14.2	3.09 V	205	48.6	11.2
4	12350.00	45.9 AV	54.0	-8.1	3.09 V	205	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.5 PK			1.55 H	138	63.6	45.9
2	*6415.00	97.9 AV			1.55 H	138	52.0	45.9
3	#12830.00	58.8 PK	88.2	-29.4	1.60 H	128	47.5	11.3
4	#12830.00	45.9 AV	68.2	-22.3	1.60 H	128	34.6	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.4 PK			2.13 V	4	64.5	45.9
2	*6415.00	98.5 AV			2.13 V	4	52.6	45.9
3	#12830.00	59.3 PK	88.2	-28.9	3.12 V	201	48.0	11.3
4	#12830.00	46.3 AV	68.2	-21.9	3.12 V	201	35.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.7 PK			1.50 H	146	63.8	45.9
2	*6435.00	98.4 AV			1.50 H	146	52.5	45.9
3	#12870.00	59.0 PK	88.2	-29.2	1.52 H	133	47.6	11.4
4	#12870.00	46.2 AV	68.2	-22.0	1.52 H	133	34.8	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.4 PK			2.06 V	20	64.5	45.9
2	*6435.00	99.6 AV			2.06 V	20	53.7	45.9
3	#12870.00	59.9 PK	88.2	-28.3	2.99 V	212	48.5	11.4
4	#12870.00	47.0 AV	68.2	-21.2	2.99 V	212	35.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.4 PK			1.56 H	138	64.2	46.2
2	*6475.00	98.6 AV			1.56 H	128	52.4	46.2
3	#12950.00	59.1 PK	88.2	-29.1	1.42 H	136	47.9	11.2
4	#12950.00	45.2 AV	68.2	-23.0	1.42 H	136	34.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.4 PK			1.96 V	6	66.2	46.2
2	*6475.00	99.4 AV			1.96 V	6	53.2	46.2
3	#12950.00	59.8 PK	88.2	-28.4	3.17 V	202	48.6	11.2
4	#12950.00	46.7 AV	68.2	-21.5	3.17 V	202	35.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.4 PK			1.50 H	122	64.0	46.4
2	*6515.00	98.4 AV			1.50 H	122	52.0	46.4
3	#13030.00	59.3 PK	88.2	-28.9	1.44 H	142	48.1	11.2
4	#13030.00	45.5 AV	68.2	-22.7	1.44 H	142	34.3	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.5 PK			2.16 V	7	66.1	46.4
2	*6515.00	99.4 AV			2.16 V	7	53.0	46.4
3	#13030.00	60.0 PK	88.2	-28.2	3.04 V	201	48.8	11.2
4	#13030.00	46.5 AV	68.2	-21.7	3.04 V	201	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.5 PK			1.56 H	128	64.1	46.4
2	*6535.00	98.4 AV			1.56 H	128	52.0	46.4
3	#13070.00	59.2 PK	88.2	-29.0	1.59 H	138	47.7	11.5
4	#13070.00	45.7 AV	68.2	-22.5	1.59 H	138	34.2	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.9 PK			2.23 V	5	65.5	46.4
2	*6535.00	99.4 AV			2.23 V	5	53.0	46.4
3	#13070.00	60.4 PK	88.2	-27.8	3.00 V	206	48.9	11.5
4	#13070.00	46.5 AV	68.2	-21.7	3.00 V	206	35.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.1 PK			1.55 H	132	64.5	46.6
2	*6695.00	98.9 AV			1.55 H	132	52.3	46.6
3	13390.00	58.4 PK	74.0	-15.6	1.60 H	133	47.2	11.2
4	13390.00	45.5 AV	54.0	-8.5	1.60 H	133	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.4 PK			2.01 V	11	65.8	46.6
2	*6695.00	99.8 AV			2.01 V	11	53.2	46.6
3	13390.00	59.8 PK	74.0	-14.2	3.00 V	200	48.6	11.2
4	13390.00	46.3 AV	54.0	-7.7	3.00 V	200	35.1	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.1 PK			1.63 H	147	65.0	47.1
2	*6855.00	98.9 AV			1.63 H	147	51.8	47.1
3	#13710.00	58.9 PK	88.2	-29.3	1.59 H	123	47.9	11.0
4	#13710.00	45.8 AV	68.2	-22.4	1.59 H	123	34.8	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.8 PK			2.22 V	16	66.7	47.1
2	*6855.00	100.1 AV			2.22 V	16	53.0	47.1
3	#13710.00	59.8 PK	88.2	-28.4	2.95 V	207	48.8	11.0
4	#13710.00	46.4 AV	68.2	-21.8	2.95 V	207	35.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.9 PK			1.58 H	155	64.8	47.1
2	*6875.00	99.1 AV			1.58 H	155	52.0	47.1
3	#13750.00	58.9 PK	88.2	-29.3	1.44 H	135	47.8	11.1
4	#13750.00	45.5 AV	68.2	-22.7	1.44 H	135	34.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.1 PK			2.00 V	6	66.0	47.1
2	*6875.00	99.7 AV			2.00 V	6	52.6	47.1
3	#13750.00	59.7 PK	88.2	-28.5	3.06 V	200	48.6	11.1
4	#13750.00	46.3 AV	68.2	-21.9	3.06 V	200	35.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.1 PK			1.62 H	141	64.0	47.1
2	*6995.00	99.4 AV			1.62 H	141	52.3	47.1
3	#13990.00	60.0 PK	88.2	-28.2	1.49 H	139	48.0	12.0
4	#13990.00	47.0 AV	68.2	-21.2	1.49 H	139	35.0	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.3 PK			2.06 V	17	65.2	47.1
2	*6995.00	100.1 AV			2.06 V	17	53.0	47.1
3	#13990.00	60.6 PK	88.2	-27.6	3.17 V	216	48.6	12.0
4	#13990.00	47.9 AV	68.2	-20.3	3.17 V	216	35.9	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.1 PK			2.35 H	15	59.5	47.6
2	*7115.00	94.3 AV			2.35 H	15	46.7	47.6
3	#7125.00	74.7 PK	88.2	-13.5	2.35 H	15	65.0	9.7
4	#7125.00	65.1 AV	68.2	-3.1	2.35 H	15	55.4	9.7
5	#14230.00	59.0 PK	88.2	-29.2	1.59 H	142	47.5	11.5
6	#14230.00	45.0 AV	68.2	-23.2	1.59 H	142	33.5	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	110.4 PK			2.25 V	1	62.8	47.6
2	*7115.00	96.9 AV			2.25 V	1	49.3	47.6
3	#7125.00	77.9 PK	88.2	-10.3	2.25 V	1	68.2	9.7
4	#7125.00	68.0 AV	68.2	-0.2	2.25 V	1	58.3	9.7
5	#14230.00	60.2 PK	88.2	-28.0	3.03 V	197	48.7	11.5
6	#14230.00	46.3 AV	68.2	-21.9	3.03 V	197	34.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	1.46 H	150	51.6	5.9
2	#5925.00	44.0 AV	68.2	-24.2	1.46 H	150	38.1	5.9
3	*5965.00	112.4 PK			1.46 H	150	69.0	43.4
4	*5965.00	100.2 AV			1.46 H	150	56.8	43.4
5	11930.00	58.9 PK	74.0	-15.1	1.65 H	148	47.4	11.5
6	11930.00	45.1 AV	54.0	-8.9	1.65 H	148	33.6	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.9 PK	88.2	-30.3	2.17 V	259	52.0	5.9
2	#5925.00	44.4 AV	68.2	-23.8	2.17 V	259	38.5	5.9
3	*5965.00	113.5 PK			2.17 V	259	70.1	43.4
4	*5965.00	101.9 AV			2.17 V	259	58.5	43.4
5	11930.00	60.0 PK	74.0	-14.0	3.22 V	188	48.5	11.5
6	11930.00	46.0 AV	54.0	-8.0	3.22 V	188	34.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	110.3 PK			1.56 H	148	65.9	44.4
2	*6165.00	97.7 AV			1.56 H	148	53.3	44.4
3	12330.00	58.6 PK	74.0	-15.4	1.62 H	149	47.4	11.2
4	12330.00	44.7 AV	54.0	-9.3	1.62 H	149	33.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	112.5 PK			1.93 V	10	68.1	44.4
2	*6165.00	99.5 AV			1.93 V	10	55.1	44.4
3	12330.00	59.8 PK	74.0	-14.2	3.18 V	192	48.6	11.2
4	12330.00	45.9 AV	54.0	-8.1	3.18 V	192	34.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.7 PK			1.49 H	150	65.9	45.8
2	*6405.00	97.7 AV			1.49 H	150	51.9	45.8
3	#12810.00	59.0 PK	88.2	-29.2	1.64 H	143	47.7	11.3
4	#12810.00	44.8 AV	68.2	-23.4	1.64 H	143	33.5	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.8 PK			1.86 V	9	67.0	45.8
2	*6405.00	100.4 AV			1.86 V	9	54.6	45.8
3	#12810.00	59.5 PK	88.2	-28.7	3.15 V	195	48.2	11.3
4	#12810.00	45.7 AV	68.2	-22.5	3.15 V	195	34.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.7 PK			1.48 H	360	65.7	46.0
2	*6445.00	98.9 AV			1.48 H	360	52.9	46.0
3	#12890.00	58.9 PK	88.2	-29.3	1.62 H	149	47.5	11.4
4	#12890.00	45.0 AV	68.2	-23.2	1.62 H	149	33.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.9 PK			1.93 V	360	66.9	46.0
2	*6445.00	100.5 AV			1.93 V	360	54.5	46.0
3	#12890.00	59.9 PK	88.2	-28.3	3.11 V	195	48.5	11.4
4	#12890.00	45.9 AV	68.2	-22.3	3.11 V	195	34.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.5 PK			1.48 H	150	65.2	46.3
2	*6485.00	99.0 AV			1.48 H	150	52.7	46.3
3	#12970.00	58.4 PK	88.2	-29.8	1.58 H	144	47.3	11.1
4	#12970.00	44.6 AV	68.2	-23.6	1.58 H	144	33.5	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.6 PK			1.80 V	10	67.3	46.3
2	*6485.00	100.9 AV			1.80 V	10	54.6	46.3
3	#12970.00	59.2 PK	88.2	-29.0	3.10 V	193	48.1	11.1
4	#12970.00	45.4 AV	68.2	-22.8	3.10 V	193	34.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.7 PK			1.50 H	146	66.3	46.4
2	*6525.00	99.2 AV			1.50 H	146	52.8	46.4
3	#13050.00	59.1 PK	88.2	-29.1	1.66 H	141	47.8	11.3
4	#13050.00	44.7 AV	68.2	-23.5	1.66 H	141	33.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.2 PK			1.86 V	8	68.8	46.4
2	*6525.00	101.4 AV			1.86 V	8	55.0	46.4
3	#13050.00	59.6 PK	88.2	-28.6	3.16 V	197	48.3	11.3
4	#13050.00	45.2 AV	68.2	-23.0	3.16 V	197	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.9 PK			1.46 H	150	64.4	46.5
2	*6565.00	98.8 AV			1.46 H	150	52.3	46.5
3	#13130.00	58.8 PK	88.2	-29.4	1.65 H	148	47.3	11.5
4	#13130.00	44.6 AV	68.2	-23.6	1.65 H	148	33.1	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.9 PK			1.84 V	8	66.4	46.5
2	*6565.00	100.6 AV			1.84 V	8	54.1	46.5
3	#13130.00	59.5 PK	88.2	-28.7	3.19 V	194	48.0	11.5
4	#13130.00	45.4 AV	68.2	-22.8	3.19 V	194	33.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.8 PK			1.50 H	148	64.1	46.7
2	*6725.00	98.4 AV			1.50 H	148	51.7	46.7
3	#13450.00	58.6 PK	88.2	-29.6	1.64 H	153	47.5	11.1
4	#13450.00	44.2 AV	68.2	-24.0	1.64 H	153	33.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	112.6 PK			1.90 V	9	65.9	46.7
2	*6725.00	100.6 AV			1.90 V	9	53.9	46.7
3	#13450.00	59.1 PK	88.2	-29.1	3.12 V	188	48.0	11.1
4	#13450.00	44.9 AV	68.2	-23.3	3.12 V	188	33.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.6 PK			1.50 H	148	64.6	47.0
2	*6845.00	98.8 AV			1.50 H	148	51.8	47.0
3	#13690.00	58.0 PK	88.2	-30.2	1.66 H	149	47.0	11.0
4	#13690.00	44.5 AV	68.2	-23.7	1.66 H	149	33.5	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.0 PK			1.50 V	284	66.0	47.0
2	*6845.00	100.1 AV			1.50 V	284	53.1	47.0
3	#13690.00	58.8 PK	88.2	-29.4	3.00 V	190	47.8	11.0
4	#13690.00	45.2 AV	68.2	-23.0	3.00 V	190	34.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.7 PK			1.50 H	154	64.6	47.1
2	*6885.00	99.9 AV			1.50 H	154	52.8	47.1
3	#13770.00	58.6 PK	88.2	-29.6	1.68 H	151	47.5	11.1
4	#13770.00	44.1 AV	68.2	-24.1	1.68 H	151	33.0	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	113.5 PK			1.68 V	257	66.4	47.1
2	*6885.00	100.6 AV			1.68 V	257	53.5	47.1
3	#13770.00	59.4 PK	88.2	-28.8	3.20 V	198	48.3	11.1
4	#13770.00	44.7 AV	68.2	-23.5	3.20 V	198	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	111.2 PK			1.50 H	152	64.1	47.1
2	*7005.00	98.1 AV			1.50 H	152	51.0	47.1
3	#14010.00	59.1 PK	88.2	-29.1	1.65 H	150	47.1	12.0
4	#14010.00	45.6 AV	68.2	-22.6	1.65 H	150	33.6	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	113.7 PK			1.73 V	258	66.6	47.1
2	*7005.00	100.4 AV			1.73 V	258	53.3	47.1
3	#14010.00	59.9 PK	88.2	-28.3	3.21 V	199	47.9	12.0
4	#14010.00	46.4 AV	68.2	-21.8	3.21 V	199	34.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.1 PK			1.51 H	151	60.5	47.6
2	*7085.00	97.0 AV			1.51 H	151	49.4	47.6
3	#7125.00	61.9 PK	88.2	-26.3	1.51 H	151	52.2	9.7
4	#7125.00	48.5 AV	68.2	-19.7	1.51 H	151	38.8	9.7
5	#14170.00	58.9 PK	88.2	-29.3	1.62 H	146	47.3	11.6
6	#14170.00	45.0 AV	68.2	-23.2	1.62 H	146	33.4	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.9 PK			1.65 V	256	64.3	47.6
2	*7085.00	98.8 AV			1.65 V	256	51.2	47.6
3	#7125.00	63.1 PK	88.2	-25.1	1.65 V	256	53.4	9.7
4	#7125.00	48.8 AV	68.2	-19.4	1.65 V	256	39.1	9.7
5	#14170.00	60.2 PK	88.2	-28.0	3.10 V	196	48.6	11.6
6	#14170.00	46.0 AV	68.2	-22.2	3.10 V	196	34.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.5 PK	88.2	-24.7	1.41 H	150	57.6	5.9
2	#5925.00	45.0 AV	68.2	-23.2	1.41 H	150	39.1	5.9
3	*5985.00	110.9 PK			1.41 H	150	67.5	43.4
4	*5985.00	98.9 AV			1.41 H	150	55.5	43.4
5	11970.00	58.6 PK	74.0	-15.4	1.67 H	145	47.3	11.3
6	11970.00	44.7 AV	54.0	-9.3	1.67 H	145	33.4	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.9 PK	88.2	-23.3	1.50 V	245	59.0	5.9
2	#5925.00	45.2 AV	68.2	-23.0	1.50 V	245	39.3	5.9
3	*5985.00	111.5 PK			1.50 V	245	68.1	43.4
4	*5985.00	99.6 AV			1.50 V	245	56.2	43.4
5	11970.00	59.8 PK	74.0	-14.2	3.23 V	189	48.5	11.3
6	11970.00	45.1 AV	54.0	-8.9	3.23 V	189	33.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.9 PK			1.50 H	145	65.7	44.2
2	*6145.00	97.9 AV			1.50 H	145	53.7	44.2
3	12290.00	58.3 PK	74.0	-15.7	1.65 H	144	47.2	11.1
4	12290.00	44.6 AV	54.0	-9.4	1.65 H	144	33.5	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	112.2 PK			1.50 V	10	68.0	44.2
2	*6145.00	99.1 AV			1.50 V	10	54.9	44.2
3	12290.00	59.5 PK	74.0	-14.5	3.15 V	191	48.4	11.1
4	12290.00	45.2 AV	54.0	-8.8	3.15 V	191	34.1	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.6 PK			1.50 H	145	62.9	45.7
2	*6385.00	98.2 AV			1.50 H	145	52.5	45.7
3	#12770.00	58.8 PK	88.2	-29.4	1.69 H	143	47.4	11.4
4	#12770.00	44.7 AV	68.2	-23.5	1.69 H	143	33.3	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.3 PK			1.95 V	6	67.6	45.7
2	*6385.00	100.9 AV			1.95 V	6	55.2	45.7
3	#12770.00	59.3 PK	88.2	-28.9	3.15 V	198	47.9	11.4
4	#12770.00	45.2 AV	68.2	-23.0	3.15 V	198	33.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.5 PK			1.50 H	146	64.3	46.2
2	*6465.00	98.6 AV			1.50 H	146	52.4	46.2
3	#12930.00	58.8 PK	88.2	-29.4	1.62 H	143	47.5	11.3
4	#12930.00	44.6 AV	68.2	-23.6	1.62 H	143	33.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	114.8 PK			1.94 V	10	68.6	46.2
2	*6465.00	101.5 AV			1.94 V	10	55.3	46.2
3	#12930.00	59.5 PK	88.2	-28.7	3.15 V	190	48.2	11.3
4	#12930.00	45.1 AV	68.2	-23.1	3.15 V	190	33.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.6 PK			1.50 H	147	63.2	46.4
2	*6545.00	98.5 AV			1.50 H	147	52.1	46.4
3	#13090.00	58.7 PK	88.2	-29.5	1.69 H	146	47.1	11.6
4	#13090.00	45.1 AV	68.2	-23.1	1.69 H	146	33.5	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.1 PK			1.96 V	8	66.7	46.4
2	*6545.00	101.5 AV			1.96 V	8	55.1	46.4
3	#13090.00	59.7 PK	88.2	-28.5	3.21 V	197	48.1	11.6
4	#13090.00	45.6 AV	68.2	-22.6	3.21 V	197	34.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			1.50 H	144	64.2	46.7
2	*6705.00	98.4 AV			1.50 H	144	51.7	46.7
3	#13410.00	58.6 PK	88.2	-29.6	1.69 H	146	47.3	11.3
4	#13410.00	44.5 AV	68.2	-23.7	1.69 H	146	33.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.0 PK			2.08 V	5	67.3	46.7
2	*6705.00	101.9 AV			2.08 V	5	55.2	46.7
3	#13410.00	59.6 PK	88.2	-28.6	3.15 V	188	48.3	11.3
4	#13410.00	45.5 AV	68.2	-22.7	3.15 V	188	34.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.0 PK			1.50 H	149	63.9	47.1
2	*6865.00	99.9 AV			1.50 H	149	52.8	47.1
3	#13730.00	58.7 PK	88.2	-29.5	1.65 H	143	47.6	11.1
4	#13730.00	44.5 AV	68.2	-23.7	1.65 H	143	33.4	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	114.1 PK			1.54 V	280	67.0	47.1
2	*6865.00	101.5 AV			1.54 V	280	54.4	47.1
3	#13730.00	59.4 PK	88.2	-28.8	3.01 V	186	48.3	11.1
4	#13730.00	44.9 AV	68.2	-23.3	3.01 V	186	33.8	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.7 PK			1.50 H	153	64.5	47.2
2	*6945.00	99.4 AV			1.50 H	153	52.2	47.2
3	#13890.00	58.8 PK	88.2	-29.4	1.65 H	143	47.1	11.7
4	#13890.00	45.1 AV	68.2	-23.1	1.65 H	143	33.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	113.8 PK			2.62 V	155	66.6	47.2
2	*6945.00	101.5 AV			2.62 V	155	54.3	47.2
3	#13890.00	60.1 PK	88.2	-28.1	3.15 V	196	48.4	11.7
4	#13890.00	46.2 AV	68.2	-22.0	3.15 V	196	34.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	TitanHSU		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.2 PK			1.50 H	156	61.9	47.3
2	*7025.00	97.3 AV			1.50 H	156	50.0	47.3
3	#7125.00	63.9 PK	88.2	-24.3	1.50 H	156	54.2	9.7
4	#7125.00	49.0 AV	68.2	-19.2	1.50 H	156	39.3	9.7
5	#14050.00	59.1 PK	88.2	-29.1	1.65 H	143	47.3	11.8
6	#14050.00	45.2 AV	68.2	-23.0	1.65 H	143	33.4	11.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.5 PK			1.55 V	260	65.2	47.3
2	*7025.00	100.2 AV			1.55 V	260	52.9	47.3
3	#7125.00	63.2 PK	88.2	-25.0	1.55 V	260	53.5	9.7
4	#7125.00	49.3 AV	68.2	-18.9	1.55 V	260	39.6	9.7
5	#14050.00	60.1 PK	88.2	-28.1	3.11 V	198	48.3	11.8
6	#14050.00	46.2 AV	68.2	-22.0	3.11 V	198	34.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.3 PK	88.2	-19.9	1.65 H	148	62.4	5.9
2	#5925.00	53.6 AV	68.2	-14.6	1.65 H	148	47.7	5.9
3	*6025.00	111.0 PK			1.65 H	148	67.4	43.6
4	*6025.00	98.5 AV			1.65 H	148	54.9	43.6
5	12050.00	58.2 PK	74.0	-15.8	1.92 H	174	46.8	11.4
6	12050.00	45.0 AV	54.0	-9.0	1.92 H	174	33.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.5 PK	88.2	-15.7	3.01 V	325	66.6	5.9
2	#5925.00	55.5 AV	68.2	-12.7	3.01 V	325	49.6	5.9
3	*6025.00	114.2 PK			3.01 V	325	70.6	43.6
4	*6025.00	101.4 AV			3.01 V	325	57.8	43.6
5	12050.00	58.9 PK	74.0	-15.1	3.12 V	197	47.5	11.4
6	12050.00	45.8 AV	54.0	-8.2	3.12 V	197	34.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.0 PK			1.55 H	146	65.5	44.5
2	*6185.00	97.2 AV			1.55 H	146	52.7	44.5
3	12370.00	57.7 PK	74.0	-16.3	1.86 H	174	46.6	11.1
4	12370.00	44.6 AV	54.0	-9.4	1.86 H	174	33.5	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	113.1 PK			3.00 V	324	68.6	44.5
2	*6185.00	100.4 AV			3.00 V	324	55.9	44.5
3	12370.00	58.5 PK	74.0	-15.5	3.07 V	192	47.4	11.1
4	12370.00	45.4 AV	54.0	-8.6	3.07 V	192	34.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.0 PK			1.57 H	136	64.5	45.5
2	*6345.00	97.4 AV			1.57 H	136	51.9	45.5
3	12690.00	58.2 PK	74.0	-15.8	1.82 H	167	46.8	11.4
4	12690.00	45.0 AV	54.0	-9.0	1.82 H	167	33.6	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	113.1 PK			1.78 V	11	67.6	45.5
2	*6345.00	100.6 AV			1.78 V	11	55.1	45.5
3	12690.00	58.9 PK	74.0	-15.1	3.03 V	190	47.5	11.4
4	12690.00	45.8 AV	54.0	-8.2	3.03 V	190	34.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.1 PK			1.61 H	143	63.7	46.4
2	*6505.00	97.7 AV			1.61 H	143	51.3	46.4
3	#13010.00	57.7 PK	88.2	-30.5	1.87 H	177	46.7	11.0
4	#13010.00	44.5 AV	68.2	-23.7	1.87 H	177	33.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	113.0 PK			1.75 V	10	66.6	46.4
2	*6505.00	100.4 AV			1.75 V	10	54.0	46.4
3	#13010.00	58.3 PK	88.2	-29.9	3.16 V	198	47.3	11.0
4	#13010.00	45.2 AV	68.2	-23.0	3.16 V	198	34.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.0 PK			1.57 H	149	64.4	46.6
2	*6665.00	98.4 AV			1.57 H	149	51.8	46.6
3	13330.00	58.2 PK	74.0	-15.8	1.93 H	178	46.8	11.4
4	13330.00	44.8 AV	54.0	-9.2	1.93 H	178	33.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.9 PK			1.50 V	6	67.3	46.6
2	*6665.00	101.3 AV			1.50 V	6	54.7	46.6
3	13330.00	58.8 PK	74.0	-15.2	3.03 V	184	47.4	11.4
4	13330.00	45.5 AV	54.0	-8.5	3.03 V	184	34.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.3 PK			1.66 H	141	62.4	46.9
2	*6825.00	96.7 AV			1.66 H	141	49.8	46.9
3	#13650.00	57.5 PK	88.2	-30.7	2.03 H	179	46.6	10.9
4	#13650.00	44.4 AV	68.2	-23.8	2.03 H	179	33.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.8 PK			1.35 V	20	64.9	46.9
2	*6825.00	99.3 AV			1.35 V	20	52.4	46.9
3	#13650.00	58.3 PK	88.2	-29.9	3.07 V	199	47.4	10.9
4	#13650.00	45.1 AV	68.2	-23.1	3.07 V	199	34.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.0 PK			1.65 H	154	63.8	47.2
2	*6985.00	98.5 AV			1.65 H	154	51.3	47.2
3	#7125.00	69.6 PK	88.2	-18.6	1.65 H	154	59.9	9.7
4	#7125.00	51.0 AV	68.2	-17.2	1.65 H	154	41.3	9.7
5	#13970.00	58.6 PK	88.2	-29.6	1.82 H	169	46.7	11.9
6	#13970.00	45.4 AV	68.2	-22.8	1.82 H	169	33.5	11.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	113.6 PK			1.56 V	253	66.4	47.2
2	*6985.00	101.1 AV			1.56 V	253	53.9	47.2
3	#7125.00	72.1 PK	88.2	-16.1	1.56 V	253	62.4	9.7
4	#7125.00	52.1 AV	68.2	-16.1	1.56 V	253	42.4	9.7
5	#13970.00	59.1 PK	88.2	-29.1	3.03 V	194	47.2	11.9
6	#13970.00	46.0 AV	68.2	-22.2	3.03 V	194	34.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.2 PK	88.2	-24.0	1.68 H	148	58.3	5.9
2	#5925.00	48.8 AV	68.2	-19.4	1.68 H	148	42.9	5.9
3	*6105.00	107.6 PK			1.68 H	148	63.6	44.0
4	*6105.00	95.1 AV			1.68 H	148	51.1	44.0
5	12210.00	57.5 PK	74.0	-16.5	2.03 H	175	46.5	11.0
6	12210.00	44.3 AV	54.0	-9.7	2.03 H	175	33.3	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.5 PK	88.2	-22.7	1.57 V	7	59.6	5.9
2	#5925.00	50.1 AV	68.2	-18.1	1.57 V	7	44.2	5.9
3	*6105.00	110.8 PK			1.57 V	7	66.8	44.0
4	*6105.00	98.1 AV			1.57 V	7	54.1	44.0
5	12210.00	58.3 PK	74.0	-15.7	3.08 V	197	47.3	11.0
6	12210.00	45.1 AV	54.0	-8.9	3.08 V	197	34.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	108.1 PK			1.66 H	137	63.1	45.0
2	*6265.00	95.5 AV			1.66 H	137	50.5	45.0
3	12530.00	58.0 PK	74.0	-16.0	2.06 H	171	46.4	11.6
4	12530.00	44.8 AV	54.0	-9.2	2.06 H	171	33.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.3 PK			1.86 V	9	66.3	45.0
2	*6265.00	98.6 AV			1.86 V	9	53.6	45.0
3	12530.00	58.8 PK	74.0	-15.2	3.03 V	189	47.2	11.6
4	12530.00	45.7 AV	54.0	-8.3	3.03 V	189	34.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.0 PK			1.57 H	143	62.1	45.9
2	*6425.00	95.3 AV			1.57 H	143	49.4	45.9
3	#12850.00	57.7 PK	88.2	-30.5	2.07 H	167	46.3	11.4
4	#12850.00	44.6 AV	68.2	-23.6	2.07 H	167	33.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.8 PK			1.80 V	6	64.9	45.9
2	*6425.00	98.2 AV			1.80 V	6	52.3	45.9
3	#12850.00	58.6 PK	88.2	-29.6	3.03 V	187	47.2	11.4
4	#12850.00	45.4 AV	68.2	-22.8	3.03 V	187	34.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.9 PK			1.73 H	142	62.4	46.5
2	*6585.00	96.2 AV			1.73 H	142	49.7	46.5
3	#13170.00	57.7 PK	88.2	-30.5	2.08 H	179	46.4	11.3
4	#13170.00	44.5 AV	68.2	-23.7	2.08 H	179	33.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.7 PK			1.76 V	8	65.2	46.5
2	*6585.00	99.0 AV			1.76 V	8	52.5	46.5
3	#13170.00	58.4 PK	88.2	-29.8	3.03 V	182	47.1	11.3
4	#13170.00	45.2 AV	68.2	-23.0	3.03 V	182	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.1 PK			1.67 H	141	62.4	46.7
2	*6745.00	96.5 AV			1.67 H	141	49.8	46.7
3	#13490.00	57.3 PK	88.2	-30.9	2.01 H	166	46.3	11.0
4	#13490.00	44.2 AV	68.2	-24.0	2.01 H	166	33.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.5 PK			1.81 V	11	64.8	46.7
2	*6745.00	99.1 AV			1.81 V	11	52.4	46.7
3	#13490.00	58.2 PK	88.2	-30.0	3.09 V	185	47.2	11.0
4	#13490.00	45.2 AV	68.2	-23.0	3.09 V	185	34.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 66% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	108.7 PK			1.69 H	144	61.6	47.1
2	*6905.00	96.2 AV			1.69 H	144	49.1	47.1
3	#7125.00	65.9 PK	88.2	-22.3	1.69 H	144	56.2	9.7
4	#7125.00	52.0 AV	68.2	-16.2	1.69 H	144	42.3	9.7
5	#13810.00	57.4 PK	88.2	-30.8	2.12 H	171	46.3	11.1
6	#13810.00	44.4 AV	68.2	-23.8	2.12 H	171	33.3	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	111.2 PK			1.54 V	261	64.1	47.1
2	*6905.00	98.6 AV			1.54 V	261	51.5	47.1
3	#7125.00	69.4 PK	88.2	-18.8	1.54 V	261	59.7	9.7
4	#7125.00	53.6 AV	68.2	-14.6	1.54 V	261	43.9	9.7
5	#13810.00	58.2 PK	88.2	-30.0	3.12 V	196	47.1	11.1
6	#13810.00	45.0 AV	68.2	-23.2	3.12 V	196	33.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.8 PK	88.2	-31.4	1.56 H	116	50.9	5.9
2	#5925.00	43.1 AV	68.2	-25.1	1.56 H	116	37.2	5.9
3	*5955.00	108.7 PK			1.56 H	116	65.3	43.4
4	*5955.00	95.9 AV			1.56 H	116	52.5	43.4
5	11910.00	59.2 PK	74.0	-14.8	1.84 H	256	47.8	11.4
6	11910.00	45.0 AV	54.0	-9.0	1.84 H	256	33.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.0 PK	88.2	-31.2	1.66 V	3	51.1	5.9
2	#5925.00	43.4 AV	68.2	-24.8	1.66 V	3	37.5	5.9
3	*5955.00	110.8 PK			1.66 V	3	67.4	43.4
4	*5955.00	98.0 AV			1.66 V	3	54.6	43.4
5	11910.00	60.0 PK	74.0	-14.0	2.73 V	167	48.6	11.4
6	11910.00	45.8 AV	54.0	-8.2	2.73 V	167	34.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.8 PK			1.55 H	124	64.3	44.5
2	*6175.00	96.2 AV			1.55 H	124	51.7	44.5
3	12350.00	58.8 PK	74.0	-15.2	1.78 H	251	47.6	11.2
4	12350.00	44.7 AV	54.0	-9.3	1.78 H	251	33.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.0 PK			1.47 V	9	66.5	44.5
2	*6175.00	98.4 AV			1.47 V	9	53.9	44.5
3	12350.00	57.6 PK	74.0	-16.4	2.74 V	159	46.4	11.2
4	12350.00	45.5 AV	54.0	-8.5	2.74 V	159	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.3 PK			1.58 H	117	62.4	45.9
2	*6415.00	96.0 AV			1.58 H	117	50.1	45.9
3	#12830.00	58.7 PK	88.2	-29.5	1.82 H	256	47.4	11.3
4	#12830.00	44.6 AV	68.2	-23.6	1.82 H	256	33.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.7 PK			1.52 V	7	64.8	45.9
2	*6415.00	98.2 AV			1.52 V	7	52.3	45.9
3	#12830.00	59.4 PK	88.2	-28.8	2.78 V	165	48.1	11.3
4	#12830.00	45.3 AV	68.2	-22.9	2.78 V	165	34.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.0 PK			1.56 H	117	62.1	45.9
2	*6435.00	95.3 AV			1.56 H	117	49.4	45.9
3	#12870.00	58.9 PK	88.2	-29.3	1.82 H	254	47.5	11.4
4	#12870.00	44.8 AV	68.2	-23.4	1.82 H	254	33.4	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.3 PK			1.34 V	7	64.4	45.9
2	*6435.00	97.5 AV			1.34 V	7	51.6	45.9
3	#12870.00	59.7 PK	88.2	-28.5	2.69 V	155	48.3	11.4
4	#12870.00	45.6 AV	68.2	-22.6	2.69 V	155	34.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.5 PK			1.62 H	113	62.3	46.2
2	*6475.00	96.0 AV			1.62 H	113	49.8	46.2
3	#12950.00	58.6 PK	88.2	-29.6	1.96 H	252	47.4	11.2
4	#12950.00	44.5 AV	68.2	-23.7	1.96 H	252	33.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.8 PK			1.73 V	9	64.6	46.2
2	*6475.00	98.4 AV			1.73 V	9	52.2	46.2
3	#12950.00	59.6 PK	88.2	-28.6	2.83 V	166	48.4	11.2
4	#12950.00	45.5 AV	68.2	-22.7	2.83 V	166	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.5 PK			1.58 H	113	63.1	46.4
2	*6515.00	96.7 AV			1.58 H	113	50.3	46.4
3	#13030.00	58.8 PK	88.2	-29.4	1.86 H	247	47.6	11.2
4	#13030.00	44.6 AV	68.2	-23.6	1.86 H	247	33.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.7 PK			2.02 V	317	65.3	46.4
2	*6515.00	99.0 AV			2.02 V	317	52.6	46.4
3	#13030.00	59.8 PK	88.2	-28.4	2.73 V	159	48.6	11.2
4	#13030.00	45.6 AV	68.2	-22.6	2.73 V	159	34.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.1 PK			1.62 H	117	62.7	46.4
2	*6535.00	96.4 AV			1.62 H	117	50.0	46.4
3	#13070.00	59.3 PK	88.2	-28.9	1.77 H	252	47.8	11.5
4	#13070.00	45.2 AV	68.2	-23.0	1.77 H	252	33.7	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	111.3 PK			1.97 V	313	64.9	46.4
2	*6535.00	98.7 AV			1.97 V	313	52.3	46.4
3	#13070.00	60.2 PK	88.2	-28.0	2.73 V	161	48.7	11.5
4	#13070.00	46.2 AV	68.2	-22.0	2.73 V	161	34.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.2 PK			1.62 H	127	62.6	46.6
2	*6695.00	96.7 AV			1.62 H	127	50.1	46.6
3	13390.00	58.9 PK	74.0	-15.1	1.92 H	248	47.7	11.2
4	13390.00	44.7 AV	54.0	-9.3	1.92 H	248	33.5	11.2

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.8 PK			2.01 V	317	65.2	46.6
2	*6695.00	99.0 AV			2.01 V	317	52.4	46.6
3	13390.00	59.6 PK	74.0	-14.4	2.71 V	156	48.4	11.2
4	13390.00	45.6 AV	54.0	-8.4	2.71 V	156	34.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.4 PK			1.53 H	119	62.3	47.1
2	*6855.00	96.7 AV			1.53 H	119	49.6	47.1
3	#13710.00	58.5 PK	88.2	-29.7	1.85 H	249	47.5	11.0
4	#13710.00	44.4 AV	68.2	-23.8	1.85 H	249	33.4	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.7 PK			1.57 V	275	64.6	47.1
2	*6855.00	98.9 AV			1.57 V	275	51.8	47.1
3	#13710.00	59.7 PK	88.2	-28.5	2.73 V	164	48.7	11.0
4	#13710.00	45.6 AV	68.2	-22.6	2.73 V	164	34.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.4 PK			1.51 H	114	62.3	47.1
2	*6875.00	96.6 AV			1.51 H	114	49.5	47.1
3	#13750.00	58.7 PK	88.2	-29.5	1.82 H	258	47.6	11.1
4	#13750.00	44.6 AV	68.2	-23.6	1.82 H	258	33.5	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.5 PK			1.62 V	279	64.4	47.1
2	*6875.00	98.9 AV			1.62 V	279	51.8	47.1
3	#13750.00	59.5 PK	88.2	-28.7	2.63 V	150	48.4	11.1
4	#13750.00	45.4 AV	68.2	-22.8	2.63 V	150	34.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.2 PK			1.52 H	113	62.1	47.1
2	*6995.00	96.4 AV			1.52 H	113	49.3	47.1
3	#13990.00	59.6 PK	88.2	-28.6	1.92 H	257	47.6	12.0
4	#13990.00	45.4 AV	68.2	-22.8	1.92 H	257	33.4	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.4 PK			1.58 V	284	64.3	47.1
2	*6995.00	98.6 AV			1.58 V	284	51.5	47.1
3	#13990.00	60.4 PK	88.2	-27.8	2.80 V	162	48.4	12.0
4	#13990.00	46.3 AV	68.2	-21.9	2.80 V	162	34.3	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			2.20 H	213	54.4	47.6
2	*7115.00	89.9 AV			2.20 H	213	42.3	47.6
3	#7125.00	76.3 PK	88.2	-11.9	2.20 H	213	66.6	9.7
4	#7125.00	65.5 AV	68.2	-2.7	2.20 H	213	55.8	9.7
5	#14230.00	58.7 PK	88.2	-29.5	1.55 H	140	47.2	11.5
6	#14230.00	44.8 AV	68.2	-23.4	1.55 H	140	33.3	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.1 PK			1.50 V	256	58.5	47.6
2	*7115.00	92.9 AV			1.50 V	256	45.3	47.6
3	#7125.00	78.7 PK	88.2	-9.5	1.50 V	256	69.0	9.7
4	#7125.00	67.9 AV	68.2	-0.3	1.50 V	256	58.2	9.7
5	#14230.00	59.9 PK	88.2	-28.3	3.09 V	199	48.4	11.5
6	#14230.00	46.3 AV	68.2	-21.9	3.09 V	199	34.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.2 PK	88.2	-31.0	1.52 H	110	51.3	5.9
2	#5925.00	44.0 AV	68.2	-24.2	1.52 H	110	38.1	5.9
3	*5965.00	109.8 PK			1.52 H	110	66.4	43.4
4	*5965.00	97.0 AV			1.52 H	110	53.6	43.4
5	11930.00	59.0 PK	74.0	-15.0	1.85 H	259	47.5	11.5
6	11930.00	44.9 AV	54.0	-9.1	1.85 H	259	33.4	11.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.5 PK	88.2	-30.7	1.49 V	2	51.6	5.9
2	#5925.00	44.2 AV	68.2	-24.0	1.49 V	2	38.3	5.9
3	*5965.00	112.2 PK			1.49 V	2	68.8	43.4
4	*5965.00	99.2 AV			1.49 V	2	55.8	43.4
5	11930.00	59.8 PK	74.0	-14.2	2.89 V	157	48.3	11.5
6	11930.00	45.7 AV	54.0	-8.3	2.89 V	157	34.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	110.3 PK			1.51 H	112	65.9	44.4
2	*6165.00	97.7 AV			1.51 H	112	53.3	44.4
3	12330.00	58.9 PK	74.0	-15.1	1.87 H	262	47.7	11.2
4	12330.00	44.7 AV	54.0	-9.3	1.87 H	262	33.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	112.6 PK			1.52 V	7	68.2	44.4
2	*6165.00	99.9 AV			1.52 V	7	55.5	44.4
3	12330.00	59.7 PK	74.0	-14.3	2.76 V	153	48.5	11.2
4	12330.00	45.5 AV	54.0	-8.5	2.76 V	153	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.2 PK			1.56 H	121	64.4	45.8
2	*6405.00	97.6 AV			1.56 H	121	51.8	45.8
3	#12810.00	58.8 PK	88.2	-29.4	1.79 H	244	47.5	11.3
4	#12810.00	44.7 AV	68.2	-23.5	1.79 H	244	33.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.5 PK			1.42 V	6	66.7	45.8
2	*6405.00	99.9 AV			1.42 V	6	54.1	45.8
3	#12810.00	59.4 PK	88.2	-28.8	2.75 V	153	48.1	11.3
4	#12810.00	45.3 AV	68.2	-22.9	2.75 V	153	34.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.7 PK			1.46 H	115	64.7	46.0
2	*6445.00	98.1 AV			1.46 H	115	52.1	46.0
3	#12890.00	59.0 PK	88.2	-29.2	1.93 H	265	47.6	11.4
4	#12890.00	44.9 AV	68.2	-23.3	1.93 H	265	33.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.8 PK			1.46 V	5	66.8	46.0
2	*6445.00	100.3 AV			1.46 V	5	54.3	46.0
3	#12890.00	59.7 PK	88.2	-28.5	2.77 V	163	48.3	11.4
4	#12890.00	45.5 AV	68.2	-22.7	2.77 V	163	34.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.0 PK			1.49 H	12	64.7	46.3
2	*6485.00	98.4 AV			1.49 H	12	52.1	46.3
3	#12970.00	58.5 PK	88.2	-29.7	1.88 H	253	47.4	11.1
4	#12970.00	44.4 AV	68.2	-23.8	1.88 H	253	33.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.5 PK			1.53 V	11	67.2	46.3
2	*6485.00	100.7 AV			1.53 V	11	54.4	46.3
3	#12970.00	59.1 PK	88.2	-29.1	2.73 V	156	48.0	11.1
4	#12970.00	45.0 AV	68.2	-23.2	2.73 V	156	33.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.3 PK			1.50 H	118	64.9	46.4
2	*6525.00	98.7 AV			1.50 H	118	52.3	46.4
3	#13050.00	58.8 PK	88.2	-29.4	1.96 H	253	47.5	11.3
4	#13050.00	44.7 AV	68.2	-23.5	1.96 H	253	33.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	113.7 PK			1.57 V	9	67.3	46.4
2	*6525.00	100.9 AV			1.57 V	9	54.5	46.4
3	#13050.00	59.6 PK	88.2	-28.6	2.79 V	157	48.3	11.3
4	#13050.00	45.5 AV	68.2	-22.7	2.79 V	157	34.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.9 PK			1.53 H	120	63.4	46.5
2	*6565.00	96.9 AV			1.53 H	120	50.4	46.5
3	#13130.00	58.9 PK	88.2	-29.3	1.87 H	245	47.4	11.5
4	#13130.00	44.7 AV	68.2	-23.5	1.87 H	245	33.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.3 PK			2.16 V	8	65.8	46.5
2	*6565.00	99.2 AV			2.16 V	8	52.7	46.5
3	#13130.00	59.4 PK	88.2	-28.8	2.71 V	154	47.9	11.5
4	#13130.00	45.3 AV	68.2	-22.9	2.71 V	154	33.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.3 PK			1.59 H	110	63.6	46.7
2	*6725.00	97.5 AV			1.59 H	110	50.8	46.7
3	#13450.00	58.5 PK	88.2	-29.7	1.75 H	241	47.4	11.1
4	#13450.00	44.4 AV	68.2	-23.8	1.75 H	241	33.3	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	112.5 PK			2.14 V	7	65.8	46.7
2	*6725.00	99.9 AV			2.14 V	7	53.2	46.7
3	#13450.00	59.2 PK	88.2	-29.0	2.83 V	172	48.1	11.1
4	#13450.00	45.1 AV	68.2	-23.1	2.83 V	172	34.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.1 PK			1.50 H	119	63.1	47.0
2	*6845.00	97.2 AV			1.50 H	119	50.2	47.0
3	#13690.00	58.3 PK	88.2	-29.9	1.89 H	256	47.3	11.0
4	#13690.00	44.2 AV	68.2	-24.0	1.89 H	256	33.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.4 PK			2.11 V	11	65.4	47.0
2	*6845.00	99.5 AV			2.11 V	11	52.5	47.0
3	#13690.00	59.2 PK	88.2	-29.0	2.79 V	162	48.2	11.0
4	#13690.00	45.1 AV	68.2	-23.1	2.79 V	162	34.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.4 PK			1.61 H	127	63.3	47.1
2	*6885.00	97.5 AV			1.61 H	127	50.4	47.1
3	#13770.00	58.6 PK	88.2	-29.6	1.83 H	254	47.5	11.1
4	#13770.00	44.5 AV	68.2	-23.7	1.83 H	254	33.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.8 PK			2.14 V	5	65.7	47.1
2	*6885.00	99.9 AV			2.14 V	5	52.8	47.1
3	#13770.00	59.5 PK	88.2	-28.7	2.77 V	160	48.4	11.1
4	#13770.00	45.4 AV	68.2	-22.8	2.77 V	160	34.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.3 PK			1.47 H	115	63.2	47.1
2	*7005.00	97.5 AV			1.47 H	115	50.4	47.1
3	#14010.00	59.3 PK	88.2	-28.9	1.92 H	253	47.3	12.0
4	#14010.00	45.1 AV	68.2	-23.1	1.92 H	253	33.1	12.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.6 PK			2.12 V	10	65.5	47.1
2	*7005.00	99.7 AV			2.12 V	10	52.6	47.1
3	#14010.00	60.3 PK	88.2	-27.9	2.85 V	168	48.3	12.0
4	#14010.00	46.2 AV	68.2	-22.0	2.85 V	168	34.2	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.0 PK			1.55 H	111	61.4	47.6
2	*7085.00	96.0 AV			1.55 H	111	48.4	47.6
3	#7125.00	61.0 PK	88.2	-27.2	1.55 H	111	51.3	9.7
4	#7125.00	47.8 AV	68.2	-20.4	1.55 H	111	38.1	9.7
5	#14170.00	58.9 PK	88.2	-29.3	1.97 H	253	47.3	11.6
6	#14170.00	44.7 AV	68.2	-23.5	1.97 H	253	33.1	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.9 PK			2.06 V	284	63.3	47.6
2	*7085.00	98.1 AV			2.06 V	284	50.5	47.6
3	#7125.00	62.3 PK	88.2	-25.9	2.06 V	284	52.6	9.7
4	#7125.00	48.1 AV	68.2	-20.1	2.06 V	284	38.4	9.7
5	#14170.00	60.0 PK	88.2	-28.2	2.91 V	166	48.4	11.6
6	#14170.00	46.0 AV	68.2	-22.2	2.91 V	166	34.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.2 PK	88.2	-30.0	1.63 H	124	52.3	5.9
2	#5925.00	44.4 AV	68.2	-23.8	1.63 H	124	38.5	5.9
3	*5985.00	109.6 PK			1.63 H	124	66.2	43.4
4	*5985.00	96.8 AV			1.63 H	124	53.4	43.4
5	11970.00	58.8 PK	74.0	-15.2	1.81 H	257	47.5	11.3
6	11970.00	44.7 AV	54.0	-9.3	1.81 H	257	33.4	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	2.11 V	4	52.7	5.9
2	#5925.00	44.8 AV	68.2	-23.4	2.11 V	4	38.9	5.9
3	*5985.00	111.7 PK			2.11 V	4	68.3	43.4
4	*5985.00	99.0 AV			2.11 V	4	55.6	43.4
5	11970.00	59.6 PK	74.0	-14.4	2.72 V	150	48.3	11.3
6	11970.00	45.5 AV	54.0	-8.5	2.72 V	150	34.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.6 PK			1.67 H	123	65.4	44.2
2	*6145.00	97.0 AV			1.67 H	123	52.8	44.2
3	12290.00	58.5 PK	74.0	-15.5	1.72 H	268	47.4	11.1
4	12290.00	44.4 AV	54.0	-9.6	1.72 H	268	33.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	112.0 PK			2.12 V	8	67.8	44.2
2	*6145.00	99.4 AV			2.12 V	8	55.2	44.2
3	12290.00	59.4 PK	74.0	-14.6	2.83 V	162	48.3	11.1
4	12290.00	45.2 AV	54.0	-8.8	2.83 V	162	34.1	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.9 PK			1.69 H	118	65.2	45.7
2	*6385.00	98.1 AV			1.69 H	118	52.4	45.7
3	#12770.00	58.7 PK	88.2	-29.5	1.95 H	258	47.3	11.4
4	#12770.00	44.5 AV	68.2	-23.7	1.95 H	258	33.1	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	113.1 PK			2.13 V	4	67.4	45.7
2	*6385.00	100.4 AV			2.13 V	4	54.7	45.7
3	#12770.00	59.6 PK	88.2	-28.6	2.79 V	164	48.2	11.4
4	#12770.00	45.5 AV	68.2	-22.7	2.79 V	164	34.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.6 PK			1.57 H	113	65.4	46.2
2	*6465.00	98.7 AV			1.57 H	113	52.5	46.2
3	#12930.00	58.7 PK	88.2	-29.5	1.98 H	247	47.4	11.3
4	#12930.00	44.5 AV	68.2	-23.7	1.98 H	247	33.2	11.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.9 PK			2.15 V	7	67.7	46.2
2	*6465.00	101.0 AV			2.15 V	7	54.8	46.2
3	#12930.00	59.5 PK	88.2	-28.7	2.71 V	159	48.2	11.3
4	#12930.00	45.4 AV	68.2	-22.8	2.71 V	159	34.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.6 PK			1.55 H	119	65.2	46.4
2	*6545.00	98.9 AV			1.55 H	119	52.5	46.4
3	#13090.00	59.0 PK	88.2	-29.2	1.82 H	261	47.4	11.6
4	#13090.00	44.7 AV	68.2	-23.5	1.82 H	261	33.1	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.9 PK			2.03 V	5	67.5	46.4
2	*6545.00	101.2 AV			2.03 V	5	54.8	46.4
3	#13090.00	60.1 PK	88.2	-28.1	2.86 V	173	48.5	11.6
4	#13090.00	45.9 AV	68.2	-22.3	2.86 V	173	34.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.0 PK			1.53 H	121	65.3	46.7
2	*6705.00	99.1 AV			1.53 H	121	52.4	46.7
3	#13410.00	58.8 PK	88.2	-29.4	1.88 H	256	47.5	11.3
4	#13410.00	44.6 AV	68.2	-23.6	1.88 H	256	33.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.0 PK			2.12 V	10	67.3	46.7
2	*6705.00	101.4 AV			2.12 V	10	54.7	46.7
3	#13410.00	59.7 PK	88.2	-28.5	2.79 V	166	48.4	11.3
4	#13410.00	45.6 AV	68.2	-22.6	2.79 V	166	34.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.8 PK			1.53 H	117	64.7	47.1
2	*6865.00	99.1 AV			1.53 H	117	52.0	47.1
3	#13730.00	58.5 PK	88.2	-29.7	1.84 H	245	47.4	11.1
4	#13730.00	44.2 AV	68.2	-24.0	1.84 H	245	33.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	114.2 PK			2.09 V	9	67.1	47.1
2	*6865.00	101.4 AV			2.09 V	9	54.3	47.1
3	#13730.00	59.3 PK	88.2	-28.9	2.78 V	156	48.2	11.1
4	#13730.00	45.1 AV	68.2	-23.1	2.78 V	156	34.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.2 PK			1.69 H	121	65.0	47.2
2	*6945.00	99.4 AV			1.69 H	121	52.2	47.2
3	#13890.00	59.3 PK	88.2	-28.9	1.97 H	248	47.6	11.7
4	#13890.00	45.1 AV	68.2	-23.1	1.97 H	248	33.4	11.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	114.3 PK			2.01 V	8	67.1	47.2
2	*6945.00	101.6 AV			2.01 V	8	54.4	47.2
3	#13890.00	60.2 PK	88.2	-28.0	2.73 V	154	48.5	11.7
4	#13890.00	46.1 AV	68.2	-22.1	2.73 V	154	34.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.7 PK			1.56 H	117	62.4	47.3
2	*7025.00	96.9 AV			1.56 H	117	49.6	47.3
3	#7125.00	60.2 PK	88.2	-28.0	1.56 H	117	50.5	9.7
4	#7125.00	46.8 AV	68.2	-21.4	1.56 H	117	37.1	9.7
5	#14050.00	59.2 PK	88.2	-29.0	1.92 H	244	47.4	11.8
6	#14050.00	45.0 AV	68.2	-23.2	1.92 H	244	33.2	11.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.9 PK			2.19 V	22	64.6	47.3
2	*7025.00	99.0 AV			2.19 V	22	51.7	47.3
3	#7125.00	61.0 PK	88.2	-27.2	2.19 V	22	51.3	9.7
4	#7125.00	47.0 AV	68.2	-21.2	2.19 V	22	37.3	9.7
5	#14050.00	60.0 PK	88.2	-28.2	2.70 V	165	48.2	11.8
6	#14050.00	45.7 AV	68.2	-22.5	2.70 V	165	33.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.7 PK	88.2	-27.5	1.60 H	119	54.8	5.9
2	#5925.00	46.3 AV	68.2	-21.9	1.60 H	119	40.4	5.9
3	*6025.00	111.4 PK			1.60 H	119	67.8	43.6
4	*6025.00	98.7 AV			1.60 H	119	55.1	43.6
5	12050.00	58.6 PK	74.0	-15.4	1.78 H	240	47.2	11.4
6	12050.00	44.5 AV	54.0	-9.5	1.78 H	240	33.1	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.2 PK	88.2	-27.0	2.12 V	11	55.3	5.9
2	#5925.00	46.7 AV	68.2	-21.5	2.12 V	11	40.8	5.9
3	*6025.00	113.9 PK			2.12 V	11	70.3	43.6
4	*6025.00	101.0 AV			2.12 V	11	57.4	43.6
5	12050.00	59.1 PK	74.0	-14.9	2.82 V	153	47.7	11.4
6	12050.00	45.0 AV	54.0	-9.0	2.82 V	153	33.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.0 PK			1.61 H	115	65.5	44.5
2	*6185.00	97.2 AV			1.61 H	115	52.7	44.5
3	12370.00	58.4 PK	74.0	-15.6	1.87 H	246	47.3	11.1
4	12370.00	44.2 AV	54.0	-9.8	1.87 H	246	33.1	11.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	112.7 PK			2.14 V	9	68.2	44.5
2	*6185.00	99.9 AV			2.14 V	9	55.4	44.5
3	12370.00	58.9 PK	74.0	-15.1	2.85 V	154	47.8	11.1
4	12370.00	44.7 AV	54.0	-9.3	2.85 V	154	33.6	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.6 PK			1.62 H	124	65.1	45.5
2	*6345.00	97.7 AV			1.62 H	124	52.2	45.5
3	12690.00	58.0 PK	74.0	-16.0	1.91 H	254	46.6	11.4
4	12690.00	44.8 AV	54.0	-9.2	1.91 H	254	33.4	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	112.9 PK			2.10 V	6	67.4	45.5
2	*6345.00	100.3 AV			2.10 V	6	54.8	45.5
3	12690.00	58.8 PK	74.0	-15.2	2.84 V	165	47.4	11.4
4	12690.00	45.7 AV	54.0	-8.3	2.84 V	165	34.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.5 PK			1.56 H	124	64.1	46.4
2	*6505.00	97.9 AV			1.56 H	124	51.5	46.4
3	#13010.00	57.7 PK	88.2	-30.5	1.89 H	255	46.7	11.0
4	#13010.00	44.5 AV	68.2	-23.7	1.89 H	255	33.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.8 PK			2.17 V	7	66.4	46.4
2	*6505.00	100.2 AV			2.17 V	7	53.8	46.4
3	#13010.00	58.2 PK	88.2	-30.0	2.71 V	168	47.2	11.0
4	#13010.00	45.2 AV	68.2	-23.0	2.71 V	168	34.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.9 PK			1.55 H	119	64.3	46.6
2	*6665.00	98.4 AV			1.55 H	119	51.8	46.6
3	13330.00	58.0 PK	74.0	-16.0	1.89 H	127	46.6	11.4
4	13330.00	44.7 AV	54.0	-9.3	1.89 H	127	33.3	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.8 PK			2.15 V	4	67.2	46.6
2	*6665.00	101.0 AV			2.15 V	4	54.4	46.6
3	13330.00	58.8 PK	74.0	-15.2	2.70 V	168	47.4	11.4
4	13330.00	45.7 AV	54.0	-8.3	2.70 V	168	34.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.0 PK			1.66 H	111	63.1	46.9
2	*6825.00	97.2 AV			1.66 H	111	50.3	46.9
3	#13650.00	57.4 PK	88.2	-30.8	1.90 H	257	46.5	10.9
4	#13650.00	44.2 AV	68.2	-24.0	1.90 H	257	33.3	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	112.2 PK			2.13 V	5	65.3	46.9
2	*6825.00	99.6 AV			2.13 V	5	52.7	46.9
3	#13650.00	58.3 PK	88.2	-29.9	2.77 V	169	47.4	10.9
4	#13650.00	45.2 AV	68.2	-23.0	2.77 V	169	34.3	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.8 PK			1.61 H	113	63.6	47.2
2	*6985.00	98.0 AV			1.61 H	113	50.8	47.2
3	#7125.00	62.6 PK	88.2	-25.6	1.61 H	113	52.9	9.7
4	#7125.00	48.6 AV	68.2	-19.6	1.61 H	113	38.9	9.7
5	#13970.00	58.4 PK	88.2	-29.8	1.95 H	253	46.5	11.9
6	#13970.00	45.3 AV	68.2	-22.9	1.95 H	253	33.4	11.9

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	113.4 PK			2.21 V	23	66.2	47.2
2	*6985.00	100.4 AV			2.21 V	23	53.2	47.2
3	#7125.00	63.8 PK	88.2	-24.4	2.21 V	23	54.1	9.7
4	#7125.00	49.2 AV	68.2	-19.0	2.21 V	23	39.5	9.7
5	#13970.00	59.1 PK	88.2	-29.1	2.73 V	169	47.2	11.9
6	#13970.00	45.9 AV	68.2	-22.3	2.73 V	169	34.0	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.7 PK	88.2	-31.5	1.55 H	126	50.8	5.9
2	#5925.00	41.3 AV	68.2	-26.9	1.55 H	126	35.4	5.9
3	*6105.00	109.2 PK			1.55 H	126	65.2	44.0
4	*6105.00	96.2 AV			1.55 H	126	52.2	44.0
5	12210.00	57.4 PK	74.0	-16.6	1.91 H	257	46.4	11.0
6	12210.00	44.2 AV	54.0	-9.8	1.91 H	257	33.2	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	2.16 V	13	57.4	5.9
2	#5925.00	48.3 AV	68.2	-19.9	2.16 V	13	42.4	5.9
3	*6105.00	111.4 PK			2.16 V	13	67.4	44.0
4	*6105.00	98.8 AV			2.16 V	13	54.8	44.0
5	12210.00	58.3 PK	74.0	-15.7	2.78 V	165	47.3	11.0
6	12210.00	45.2 AV	54.0	-8.8	2.78 V	165	34.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	108.5 PK			1.68 H	115	63.5	45.0
2	*6265.00	95.9 AV			1.68 H	115	50.9	45.0
3	12530.00	58.1 PK	74.0	-15.9	1.90 H	247	46.5	11.6
4	12530.00	44.9 AV	54.0	-9.1	1.90 H	247	33.3	11.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.1 PK			2.15 V	10	66.1	45.0
2	*6265.00	98.3 AV			2.15 V	10	53.3	45.0
3	12530.00	58.6 PK	74.0	-15.4	2.84 V	162	47.0	11.6
4	12530.00	45.6 AV	54.0	-8.4	2.84 V	162	34.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.



RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.2 PK			1.65 H	116	62.3	45.9
2	*6425.00	95.4 AV			1.65 H	116	49.5	45.9
3	#12850.00	57.8 PK	88.2	-30.4	1.84 H	242	46.4	11.4
4	#12850.00	44.5 AV	68.2	-23.7	1.84 H	242	33.1	11.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			2.09 V	4	64.5	45.9
2	*6425.00	97.8 AV			2.09 V	4	51.9	45.9
3	#12850.00	58.7 PK	88.2	-29.5	2.79 V	152	47.3	11.4
4	#12850.00	45.4 AV	68.2	-22.8	2.79 V	152	34.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.8 PK			1.66 H	115	62.3	46.5
2	*6585.00	96.1 AV			1.66 H	115	49.6	46.5
3	#13170.00	57.6 PK	88.2	-30.6	1.92 H	245	46.3	11.3
4	#13170.00	44.5 AV	68.2	-23.7	1.92 H	245	33.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.2 PK			2.12 V	7	64.7	46.5
2	*6585.00	98.6 AV			2.12 V	7	52.1	46.5
3	#13170.00	58.5 PK	88.2	-29.7	2.71 V	155	47.2	11.3
4	#13170.00	45.2 AV	68.2	-23.0	2.71 V	155	33.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.8 PK			1.62 H	114	62.1	46.7
2	*6745.00	96.1 AV			1.62 H	114	49.4	46.7
3	#13490.00	57.2 PK	88.2	-31.0	1.81 H	250	46.2	11.0
4	#13490.00	44.2 AV	68.2	-24.0	1.81 H	250	33.2	11.0

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.3 PK			2.08 V	9	64.6	46.7
2	*6745.00	98.7 AV			2.08 V	9	52.0	46.7
3	#13490.00	58.2 PK	88.2	-30.0	2.79 V	161	47.2	11.0
4	#13490.00	45.0 AV	68.2	-23.2	2.79 V	161	34.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	108.9 PK			1.61 H	113	61.8	47.1
2	*6905.00	96.2 AV			1.61 H	113	49.1	47.1
3	#7125.00	64.3 PK	88.2	-23.9	1.61 H	113	54.6	9.7
4	#7125.00	50.0 AV	68.2	-18.2	1.61 H	113	40.3	9.7
5	#13810.00	57.4 PK	88.2	-30.8	1.89 H	253	46.3	11.1
6	#13810.00	44.4 AV	68.2	-23.8	1.89 H	253	33.3	11.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.9 PK			2.08 V	284	63.8	47.1
2	*6905.00	98.4 AV			2.08 V	284	51.3	47.1
3	#7125.00	67.4 PK	88.2	-20.8	2.08 V	284	57.7	9.7
4	#7125.00	51.8 AV	68.2	-16.4	2.08 V	284	42.1	9.7
5	#13810.00	58.1 PK	88.2	-30.1	2.78 V	152	47.0	11.1
6	#13810.00	45.0 AV	68.2	-23.2	2.78 V	152	33.9	11.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

CDD


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

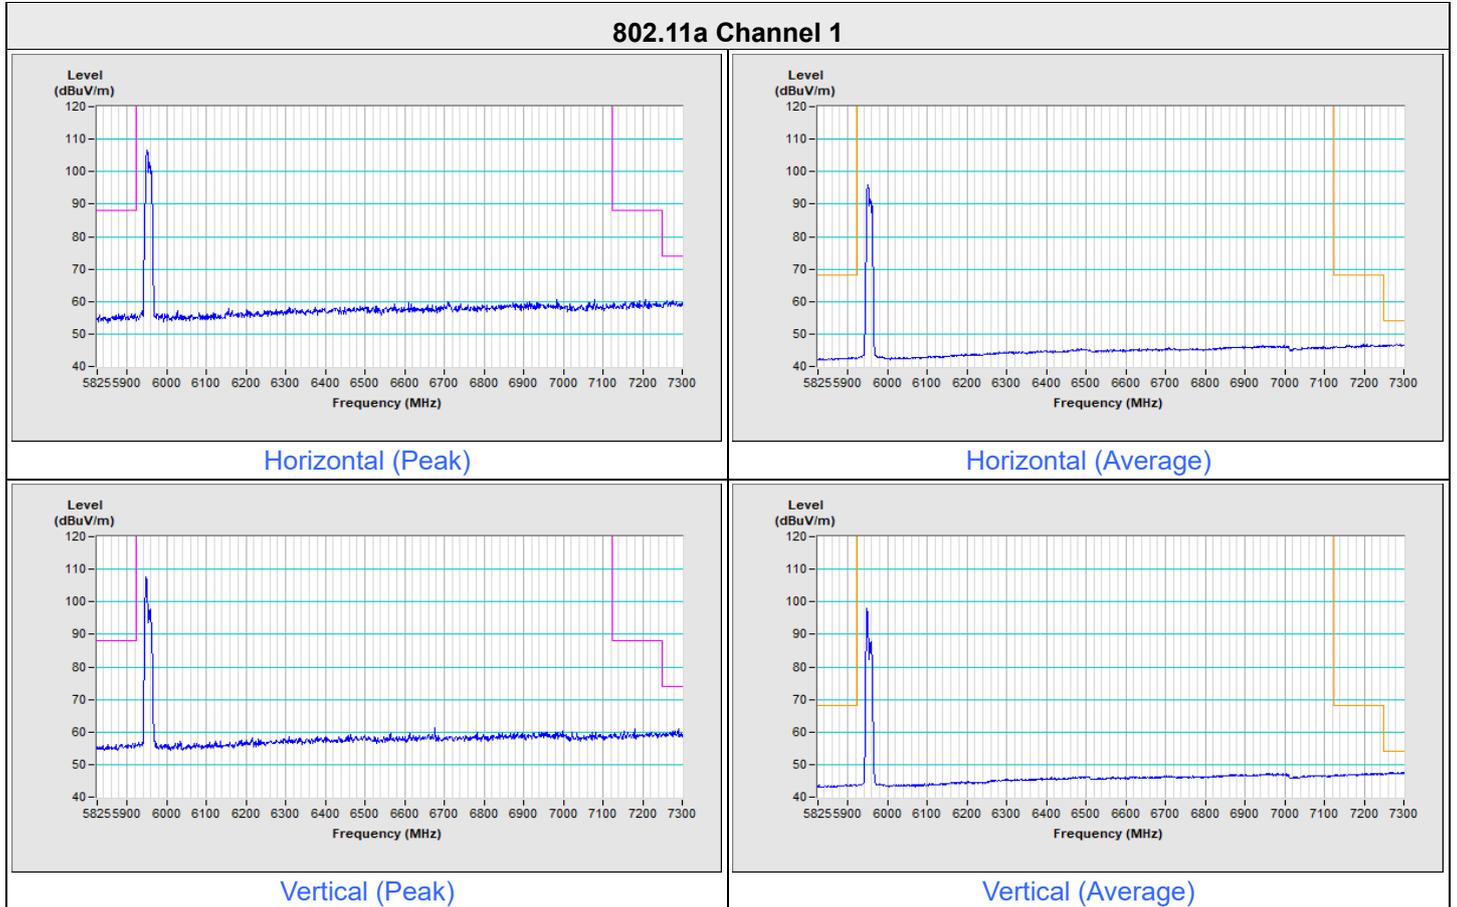


802.11a Channel 233

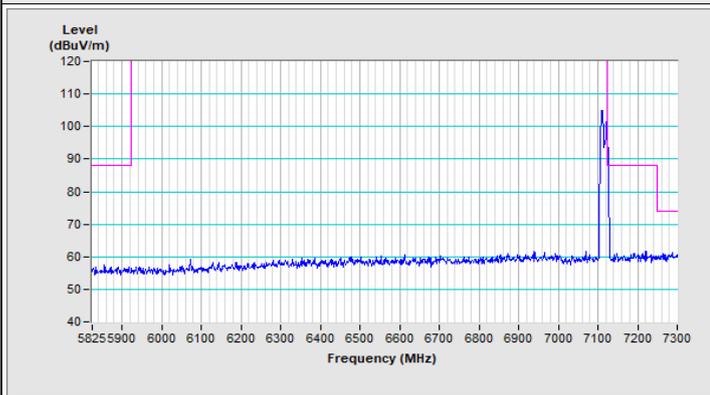


Horizontal (Peak)

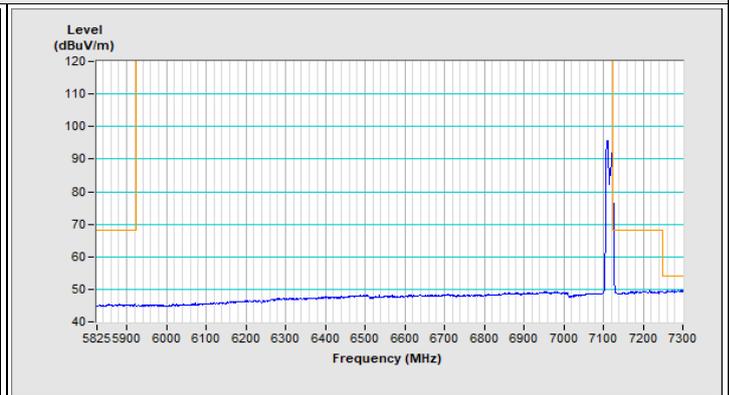

Horizontal (Average)

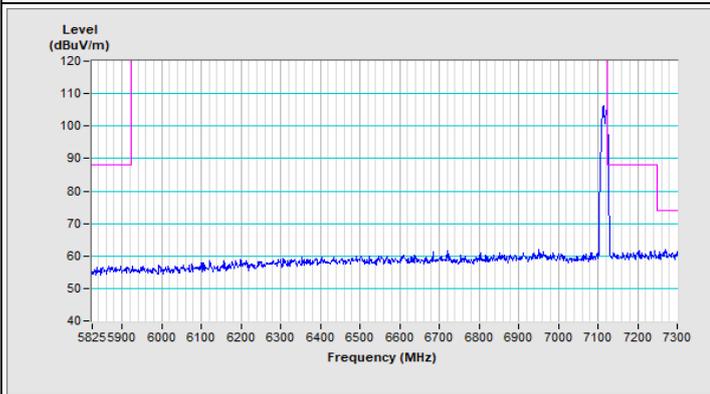


Vertical (Peak)

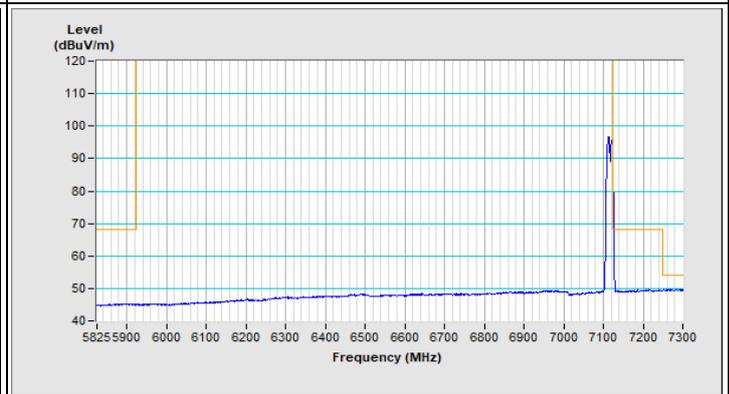


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

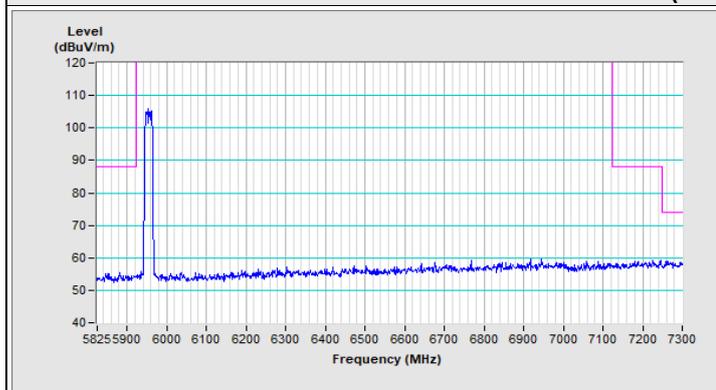


Horizontal (Peak)

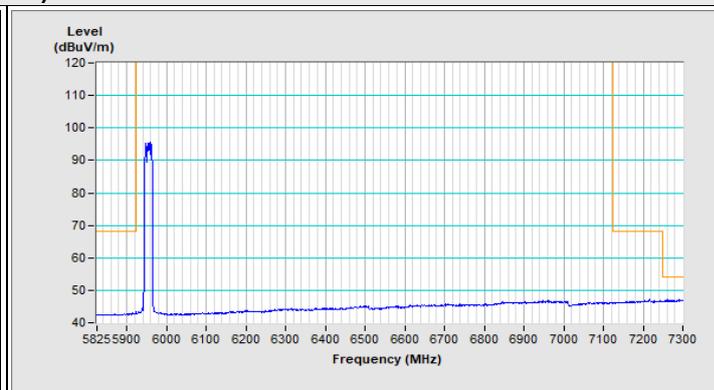

Horizontal (Average)

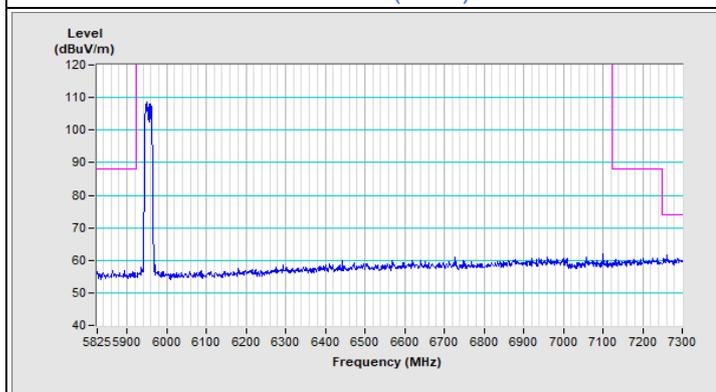

Vertical (Peak)

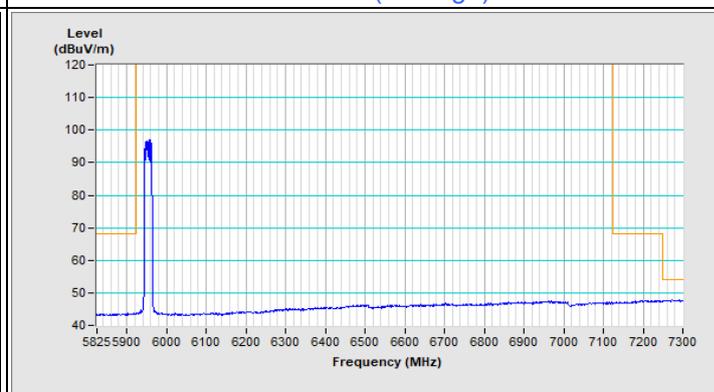


Vertical (Average)




Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

802.11be (EHT20) Channel 233

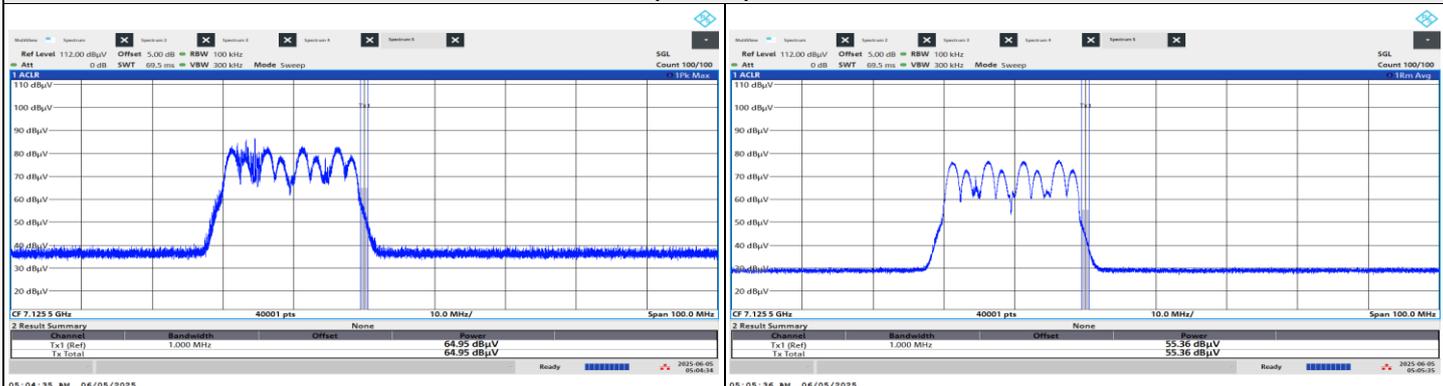

Horizontal (Peak)

Horizontal (Average)

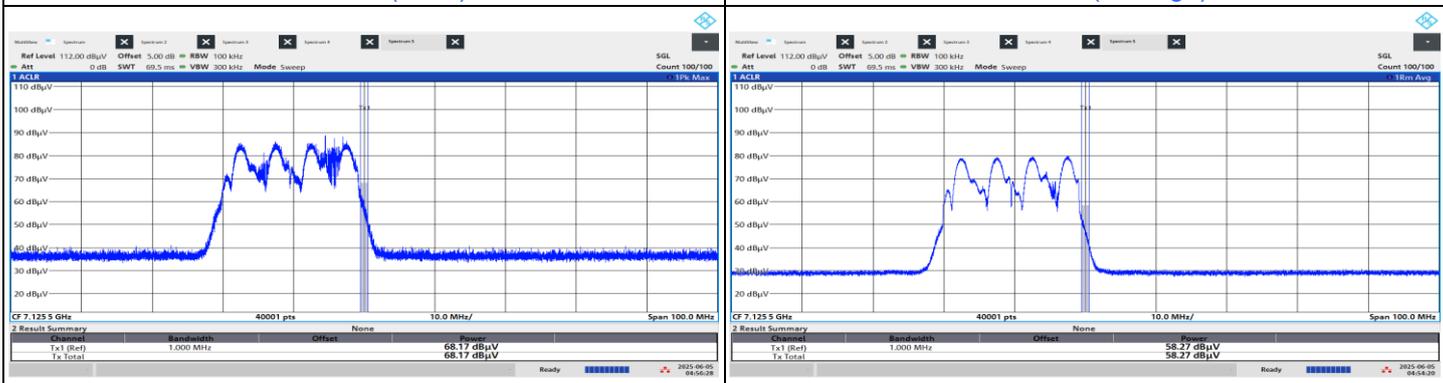


Vertical (Peak)


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

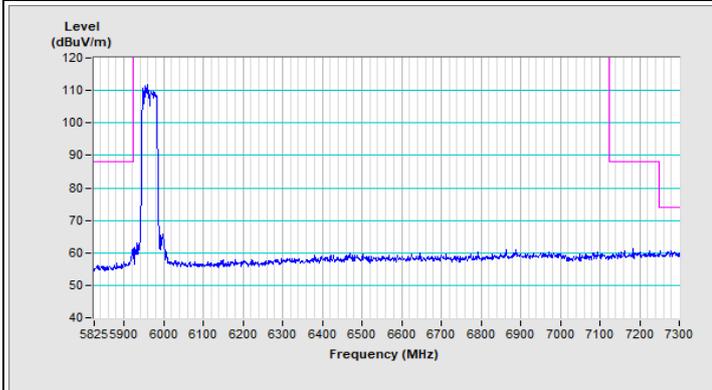


Horizontal (Peak)

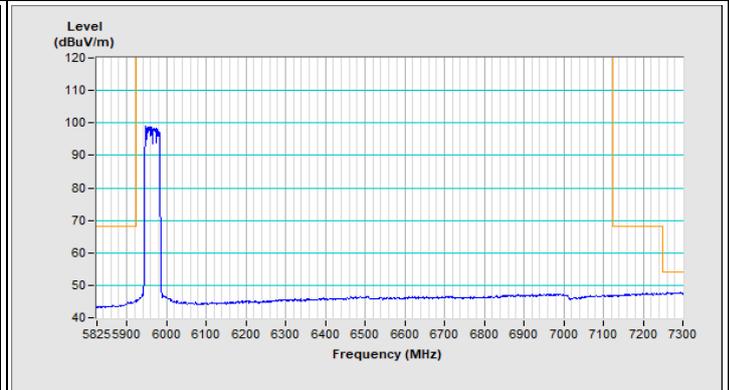

Horizontal (Average)

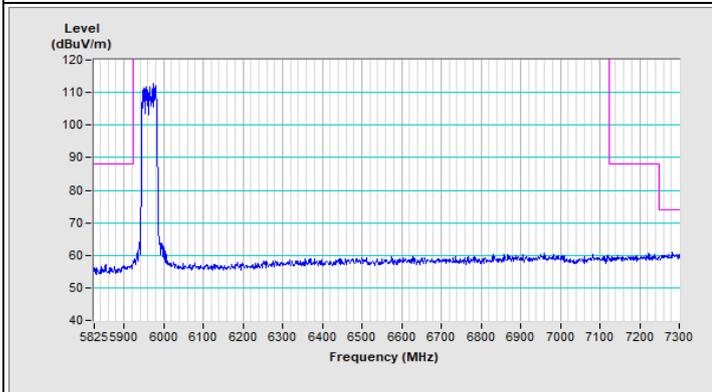


Vertical (Peak)

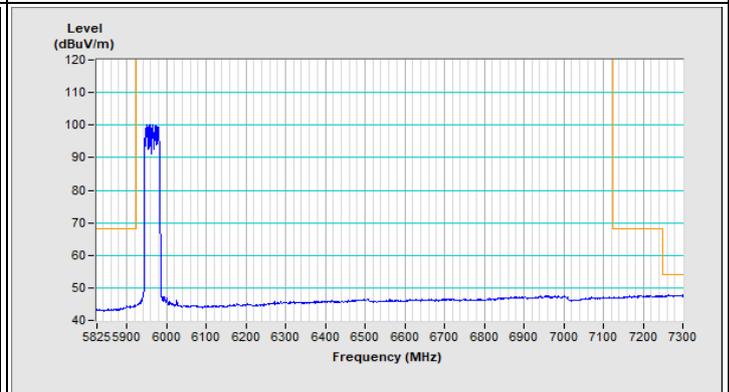


Vertical (Average)


802.11be (EHT40) Channel 227

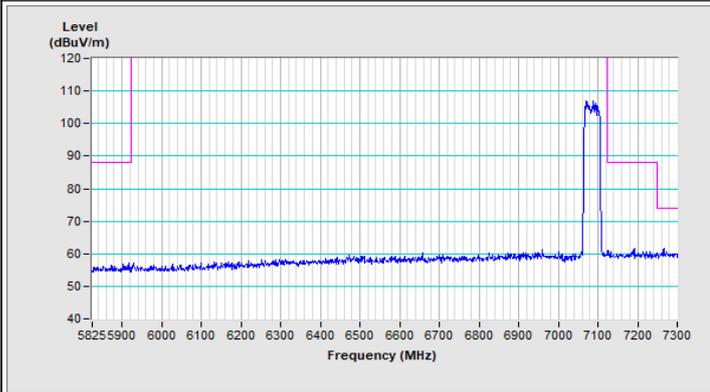


Horizontal (Peak)

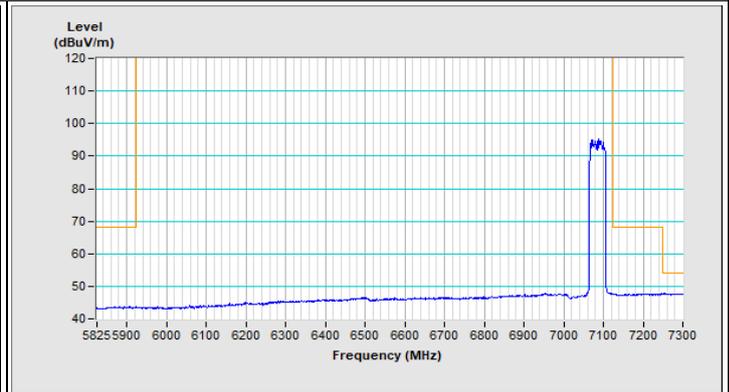

Horizontal (Average)

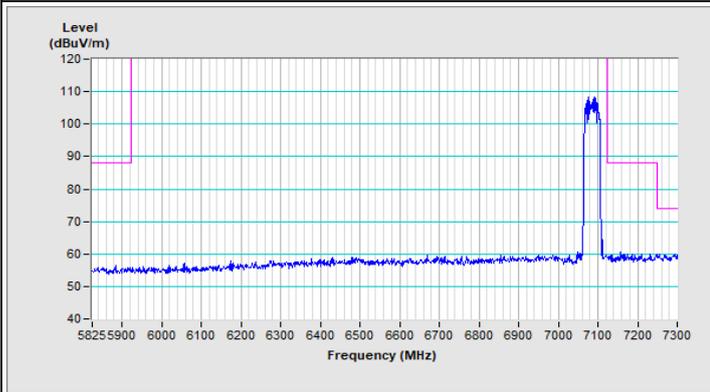


Vertical (Peak)

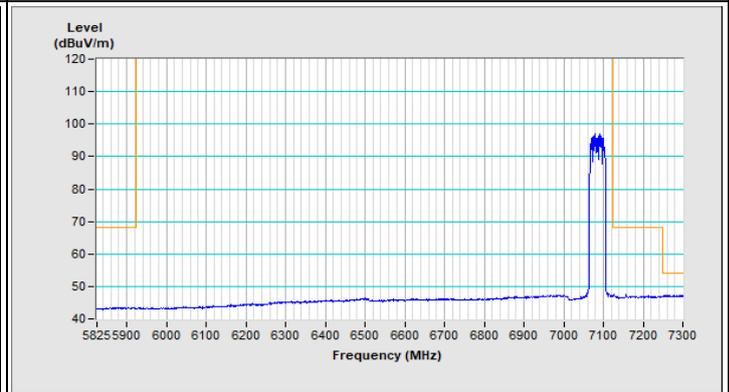


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

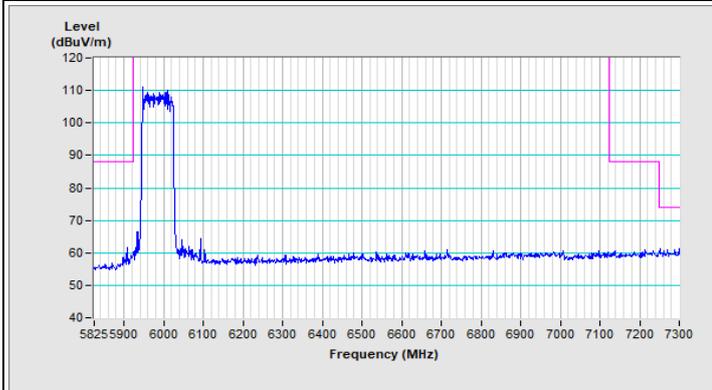


Horizontal (Peak)

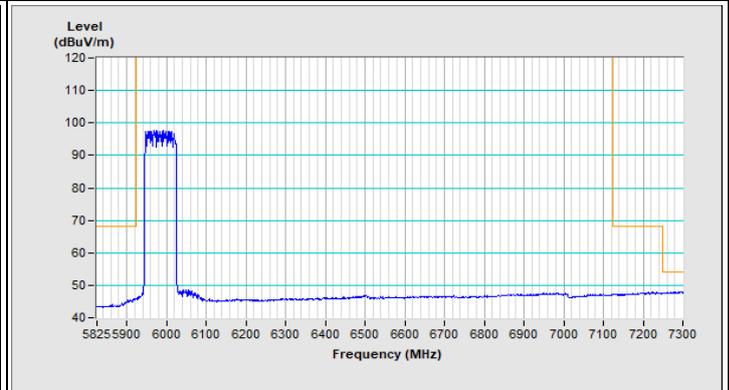

Horizontal (Average)

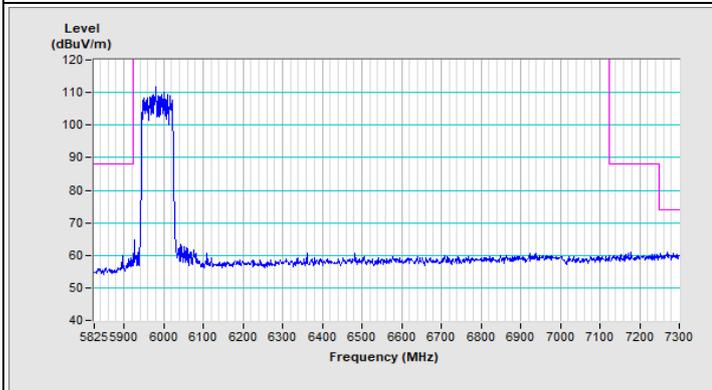


Vertical (Peak)

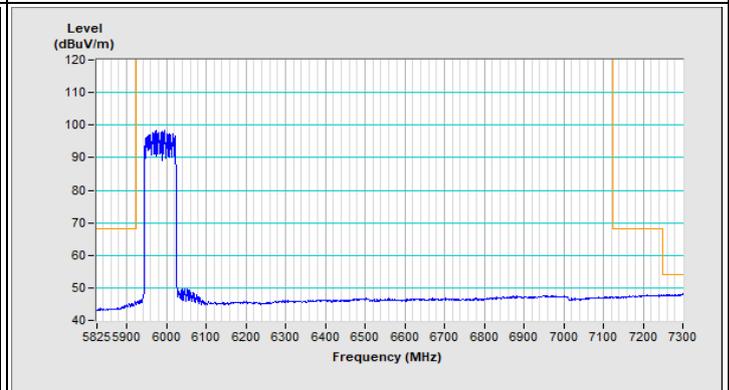


Vertical (Average)


802.11be (EHT80) Channel 215

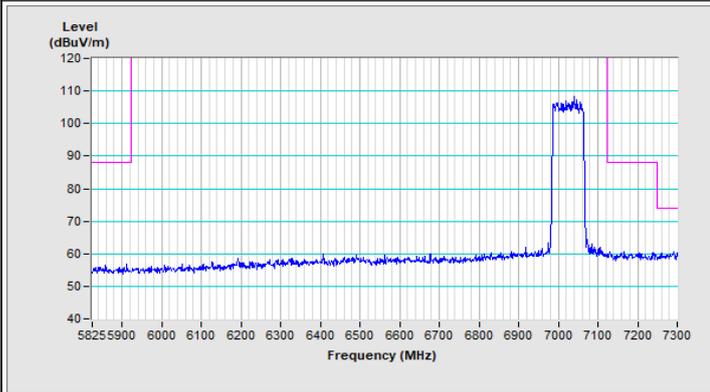


Horizontal (Peak)

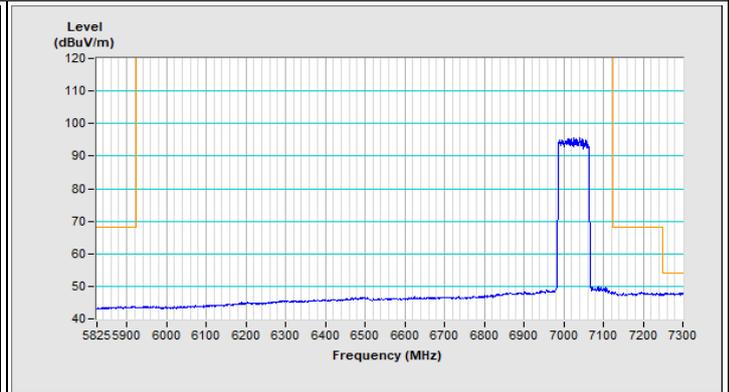

Horizontal (Average)

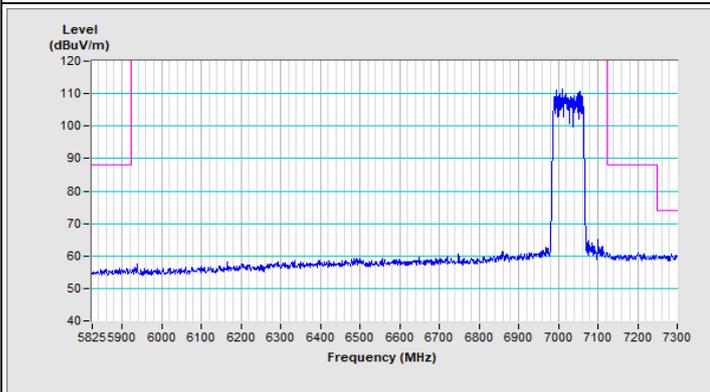


Vertical (Peak)

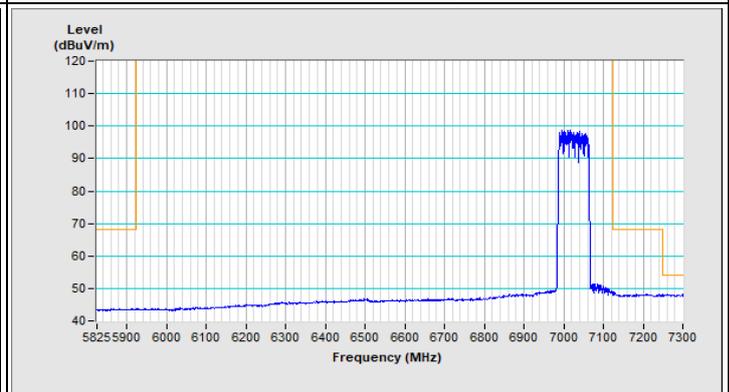


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

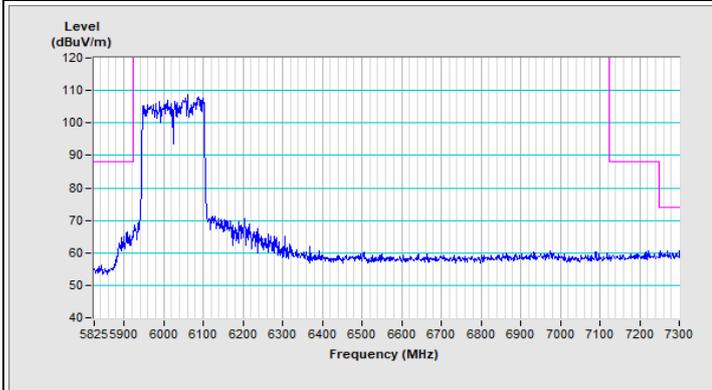


Horizontal (Peak)

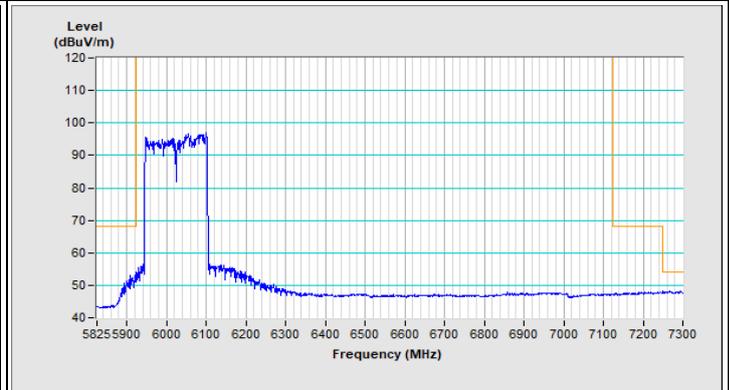

Horizontal (Average)

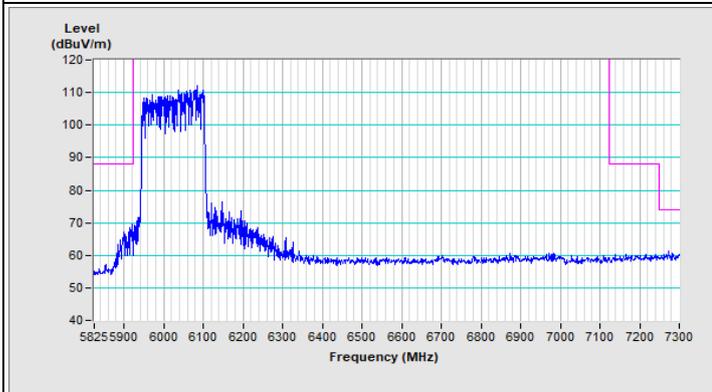


Vertical (Peak)

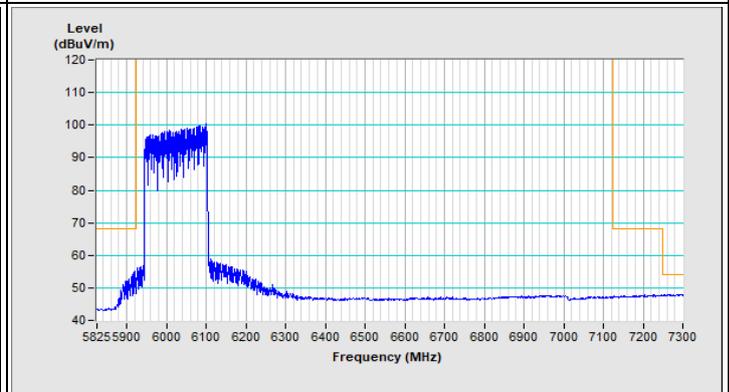


Vertical (Average)


802.11be (EHT160) Channel 207

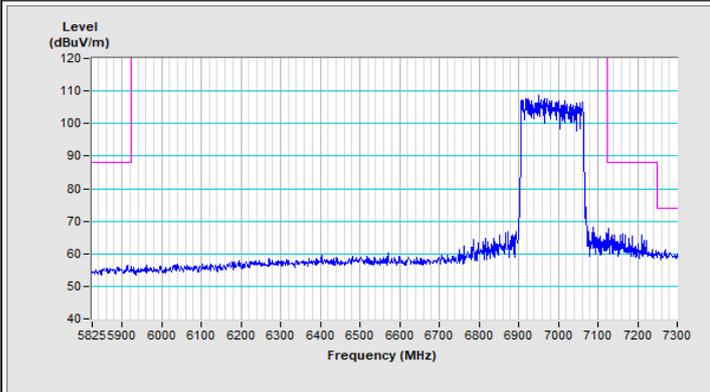


Horizontal (Peak)

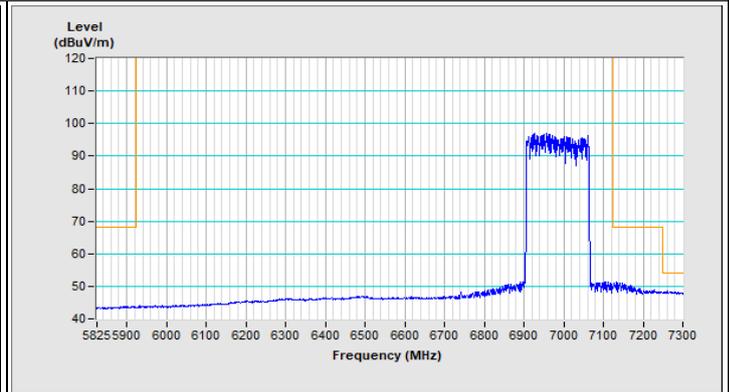

Horizontal (Average)

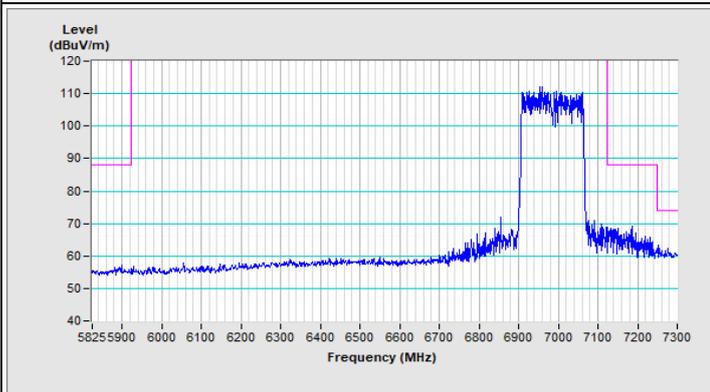


Vertical (Peak)

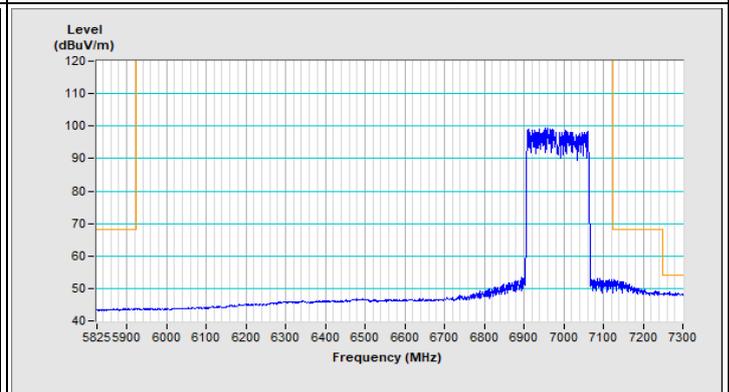


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

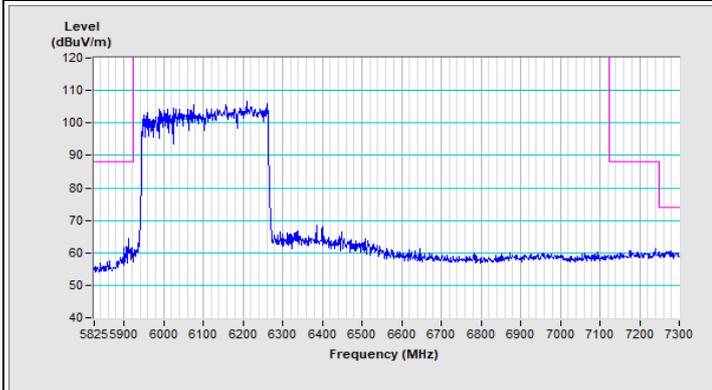


Horizontal (Peak)

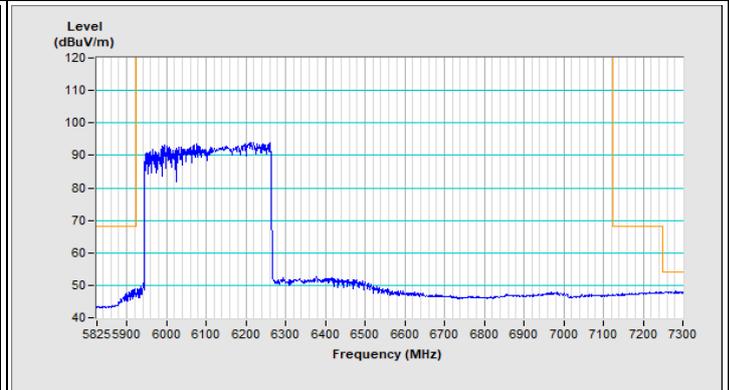

Horizontal (Average)

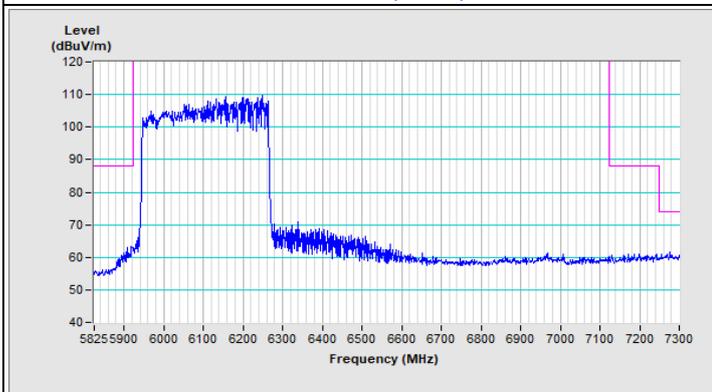


Vertical (Peak)

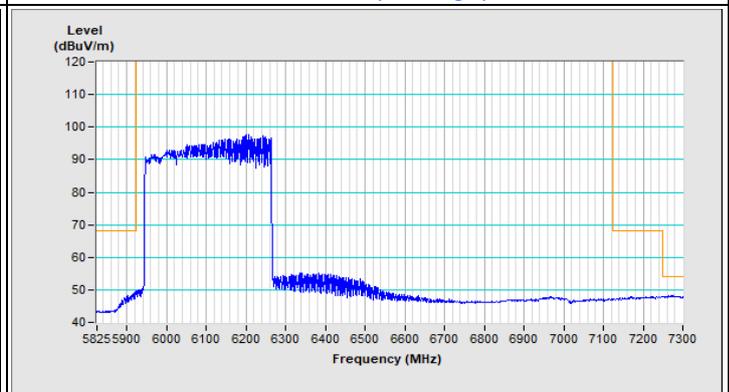


Vertical (Average)


802.11be (EHT320) Channel 191

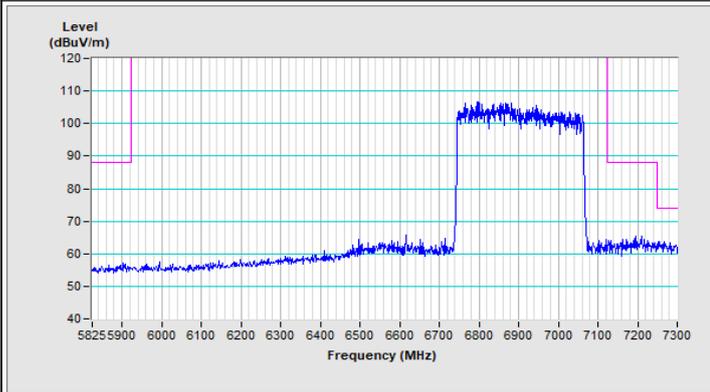


Horizontal (Peak)

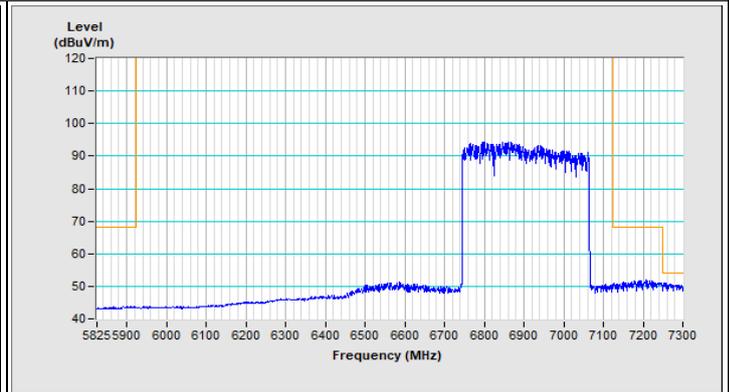

Horizontal (Average)

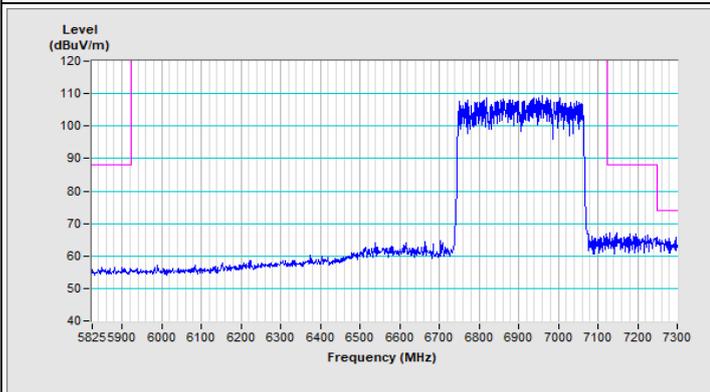


Vertical (Peak)

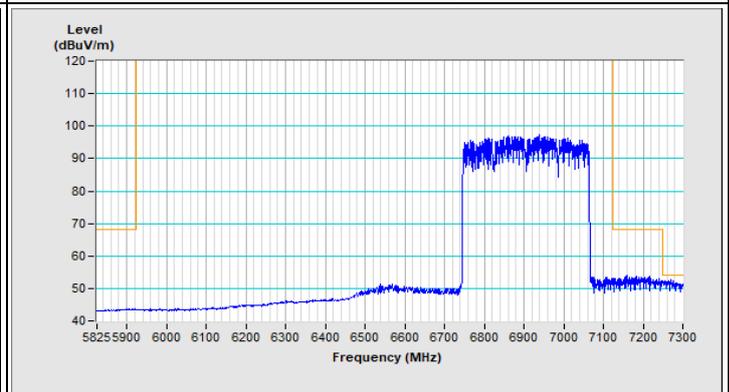

Vertical (Average)

Beamforming


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

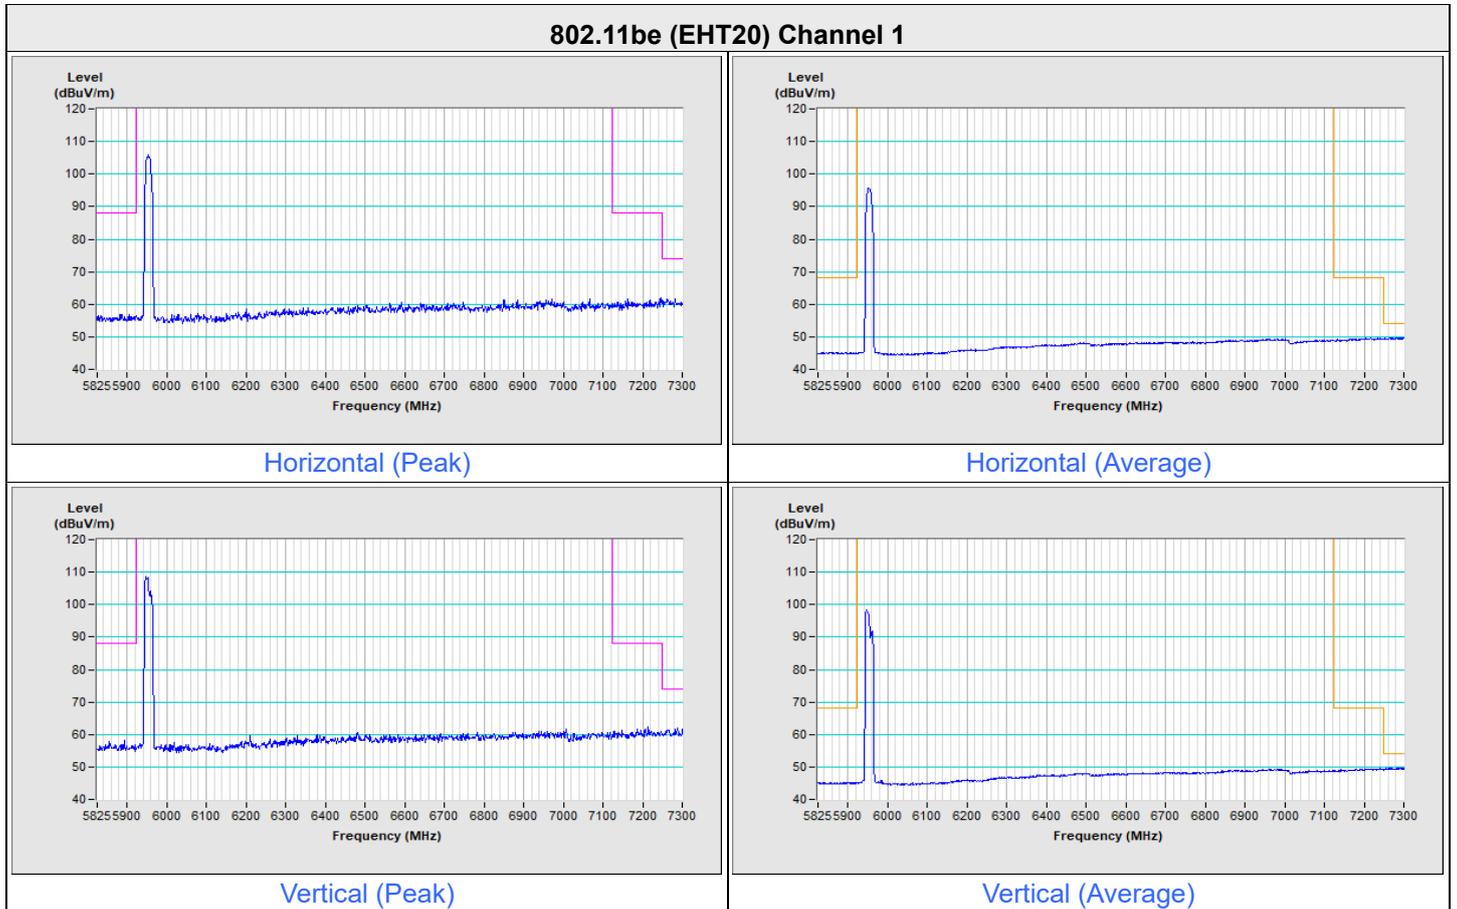




Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--


802.11be (EHT20) Channel 233

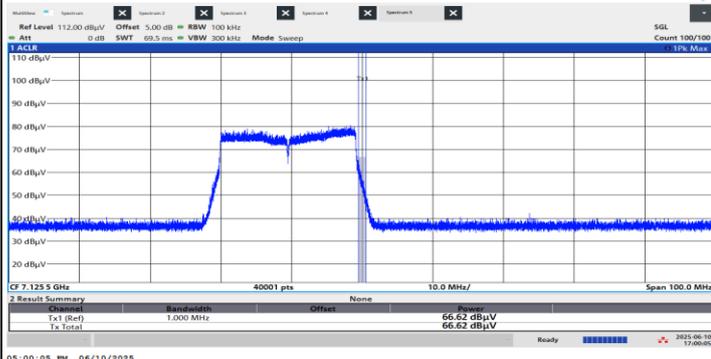


Horizontal (Peak)

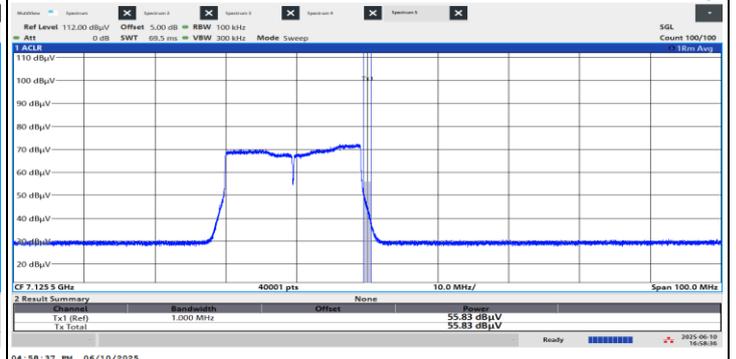

Horizontal (Average)

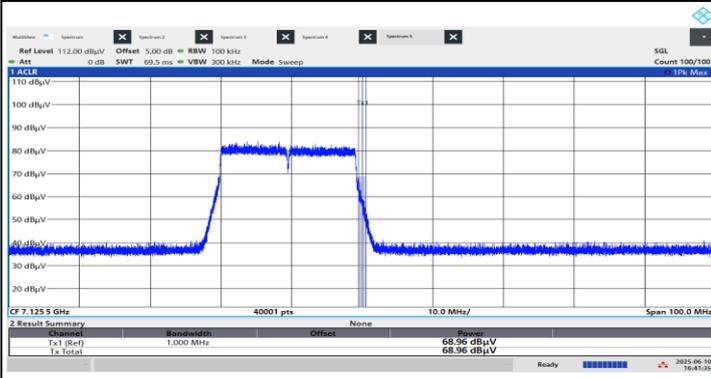


Vertical (Peak)

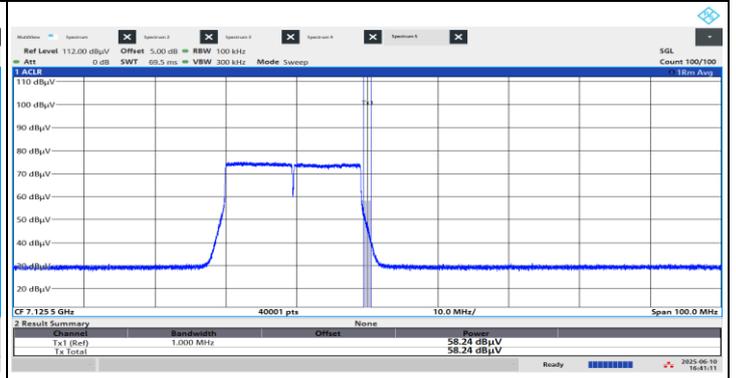


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

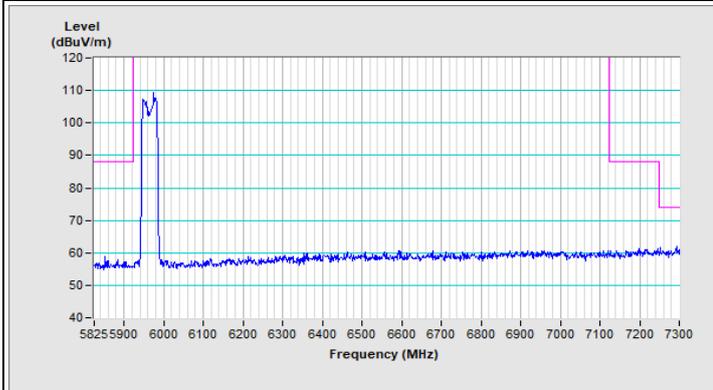


Horizontal (Peak)

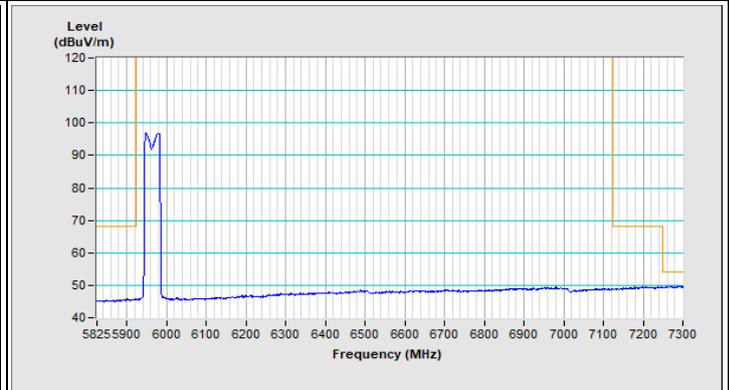

Horizontal (Average)

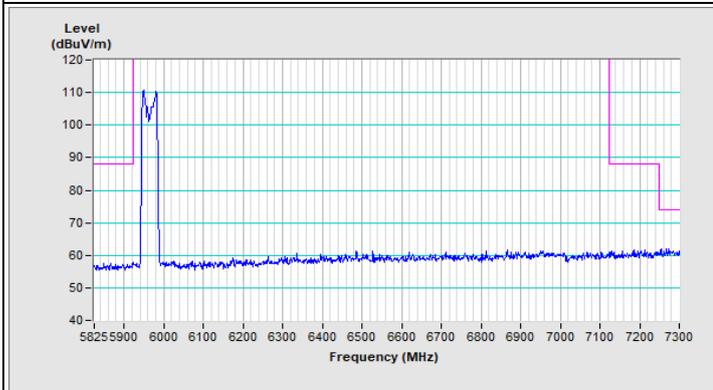


Vertical (Peak)

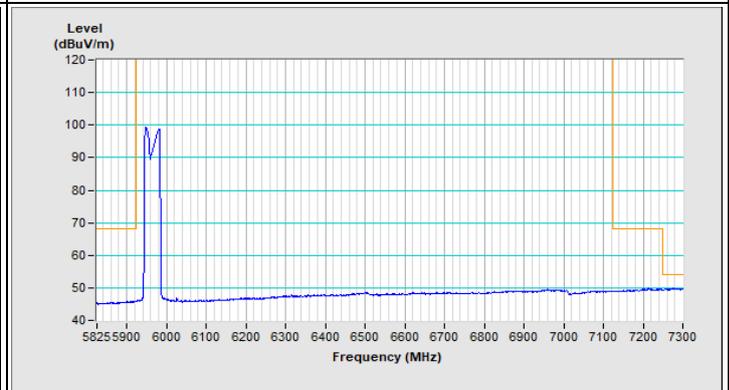


Vertical (Average)


802.11be (EHT40) Channel 227

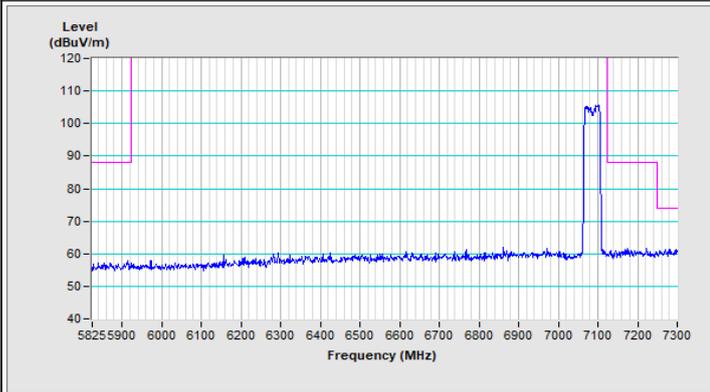


Horizontal (Peak)

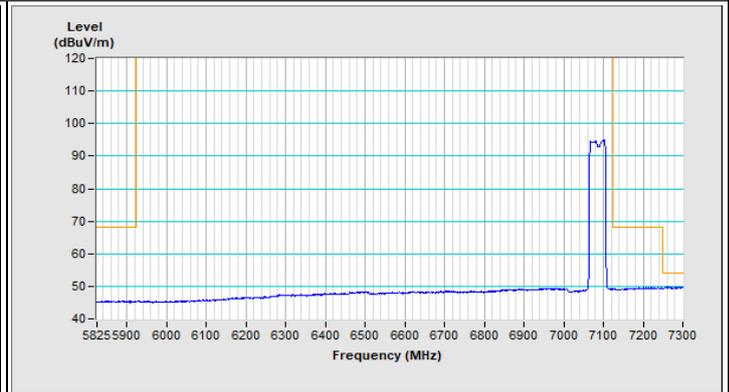

Horizontal (Average)

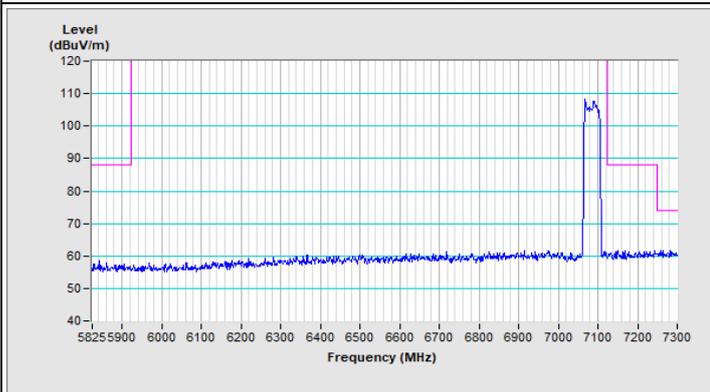


Vertical (Peak)

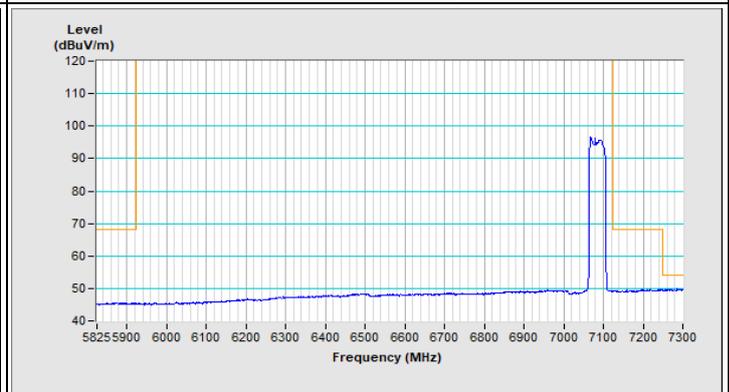


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

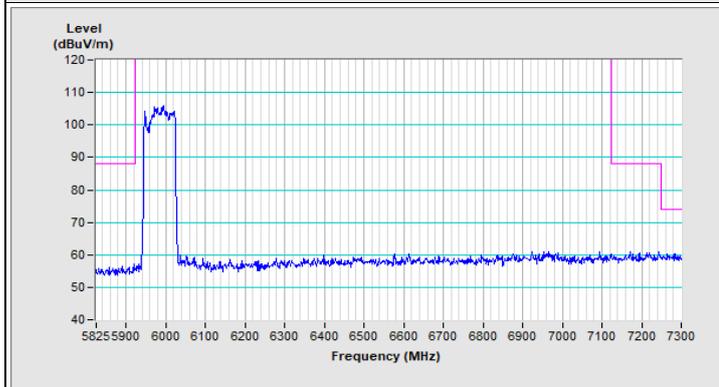


Horizontal (Peak)

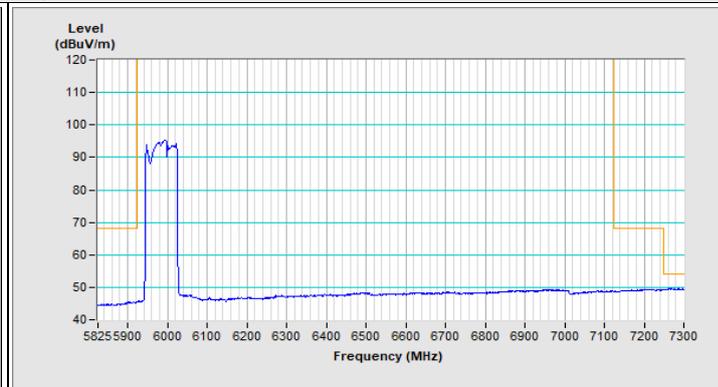

Horizontal (Average)

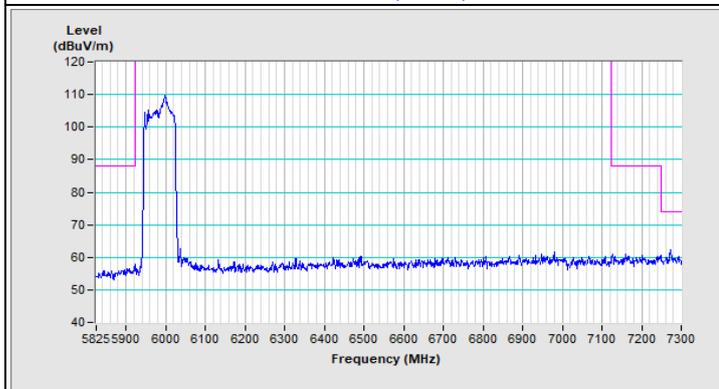


Vertical (Peak)

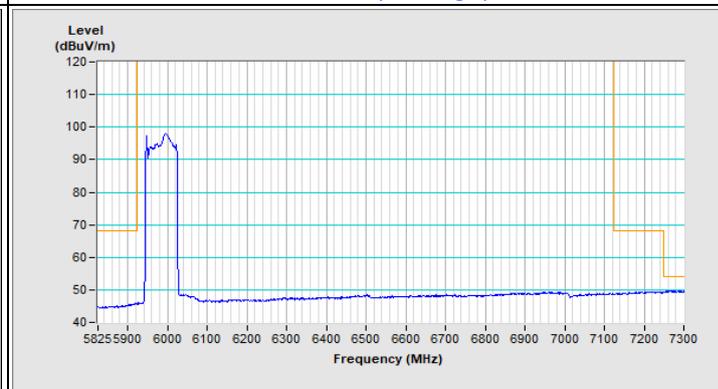


Vertical (Average)


802.11be (EHT80) Channel 215

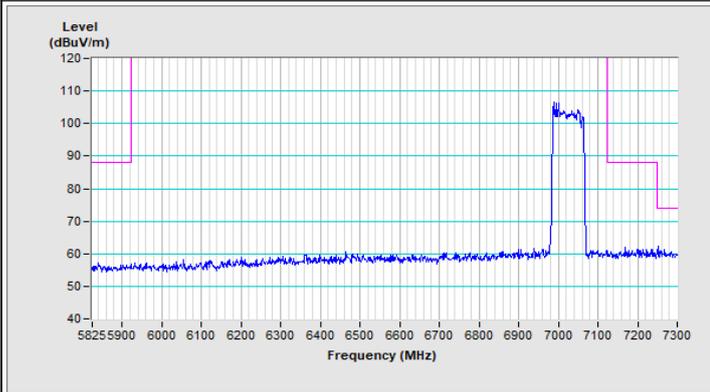


Horizontal (Peak)

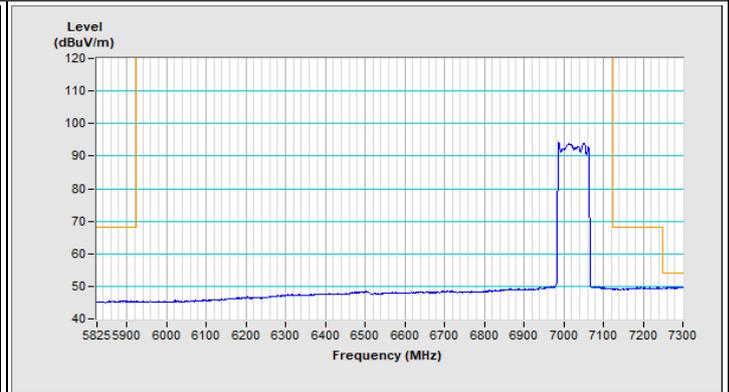

Horizontal (Average)

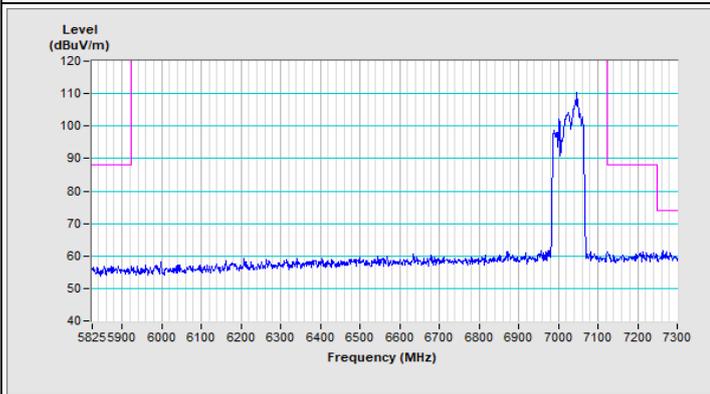


Vertical (Peak)

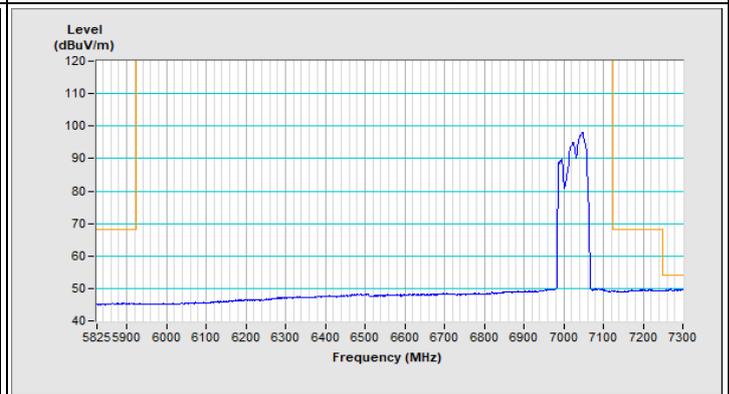


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

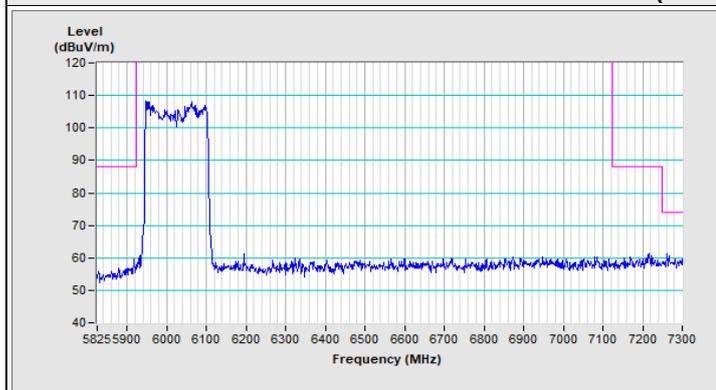


Horizontal (Peak)

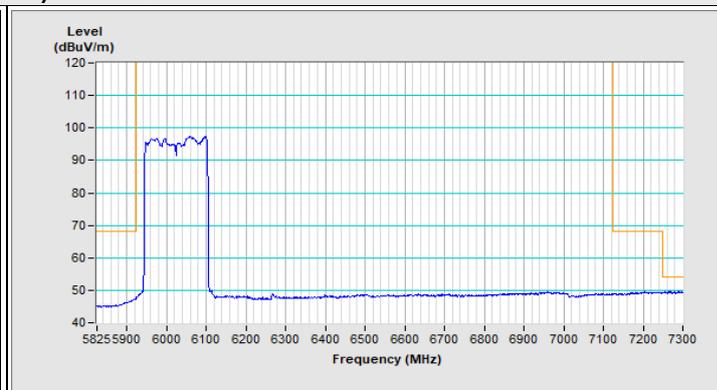

Horizontal (Average)

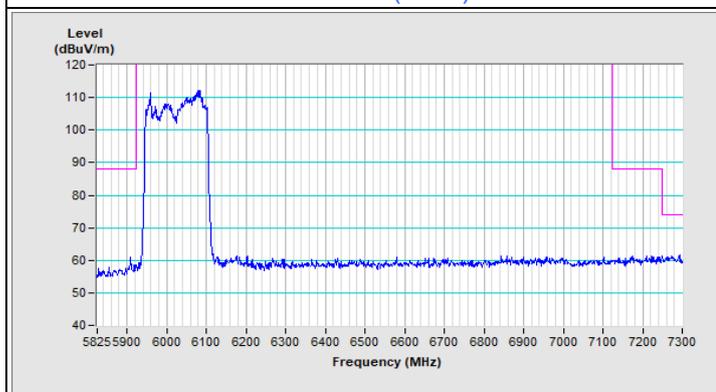


Vertical (Peak)

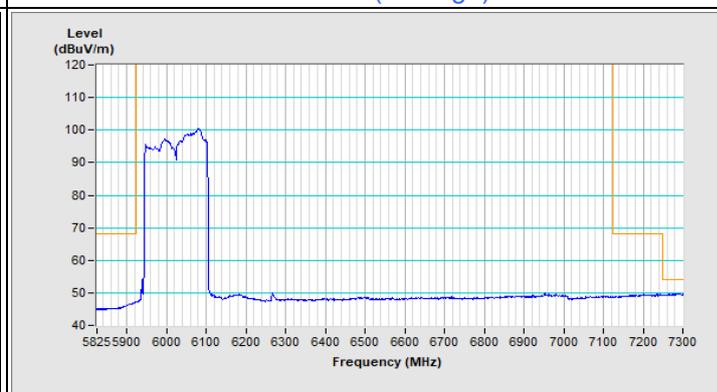


Vertical (Average)


802.11be (EHT160) Channel 207

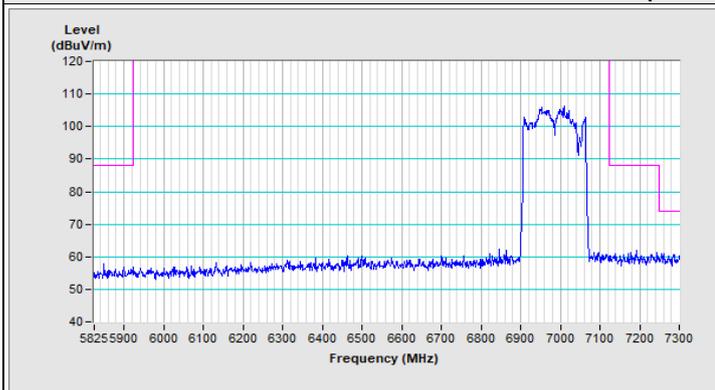


Horizontal (Peak)

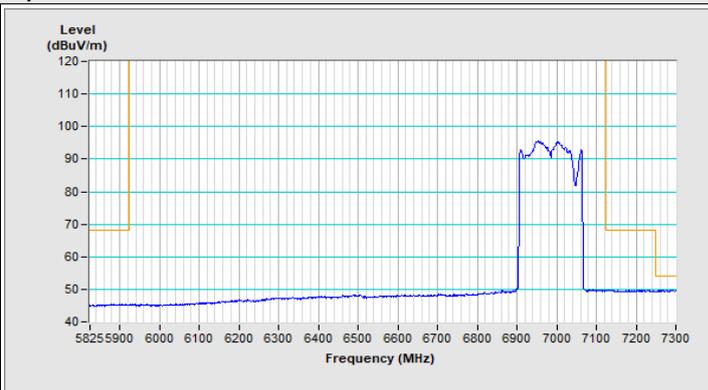

Horizontal (Average)

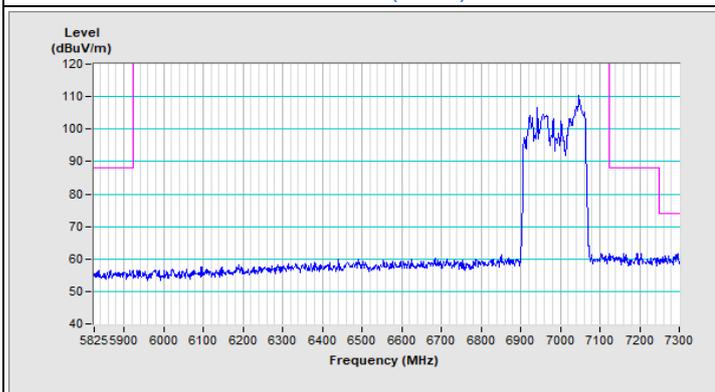


Vertical (Peak)

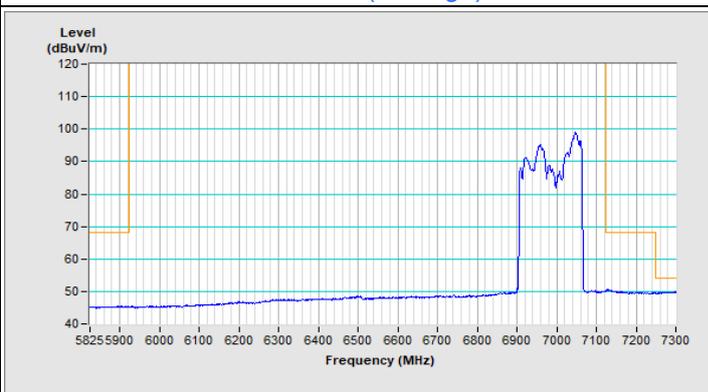


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 31

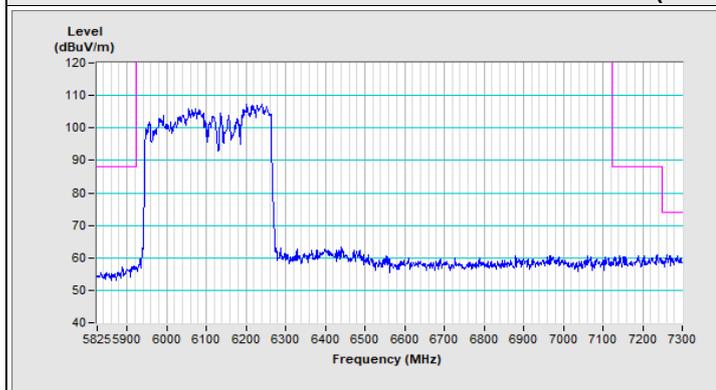


Horizontal (Peak)

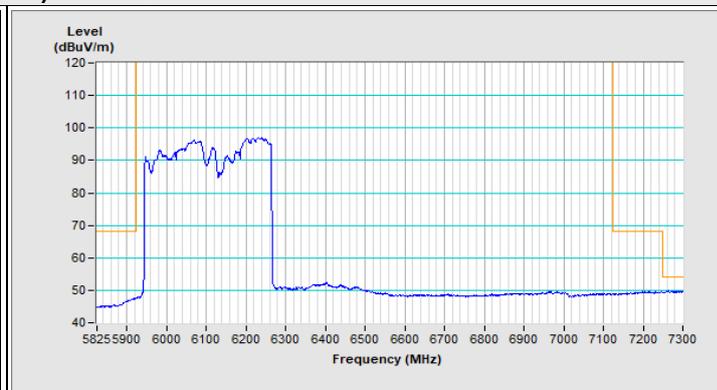

Horizontal (Average)

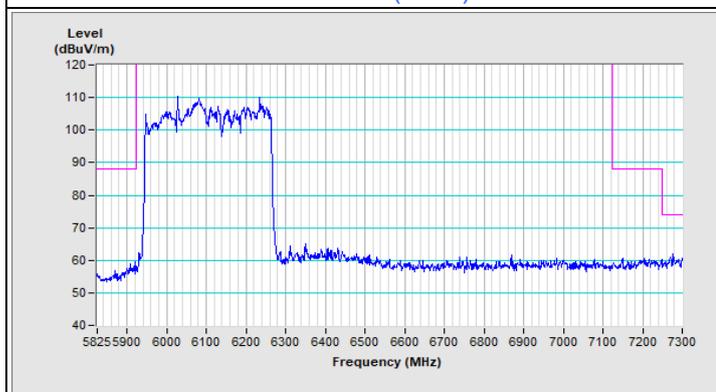


Vertical (Peak)

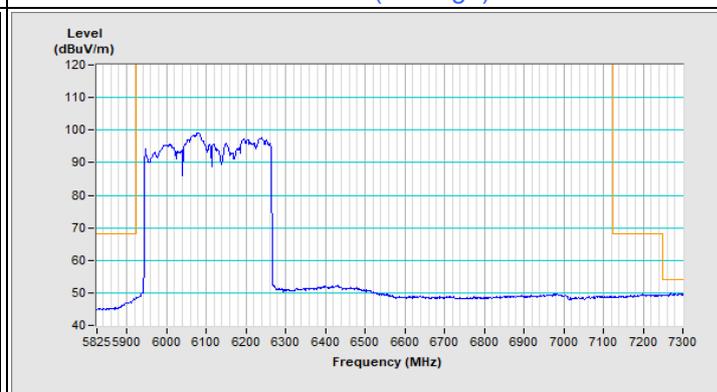


Vertical (Average)


802.11be (EHT320) Channel 191

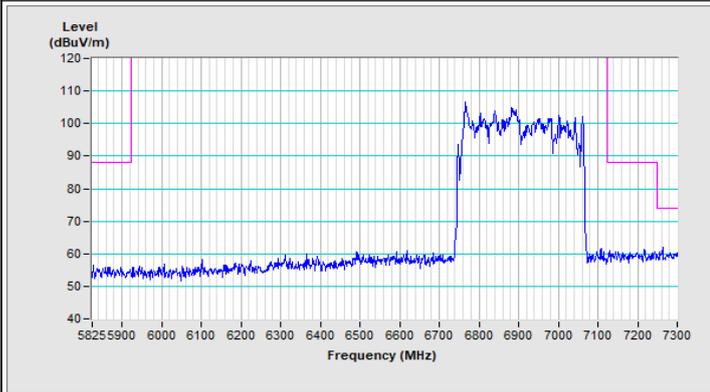


Horizontal (Peak)

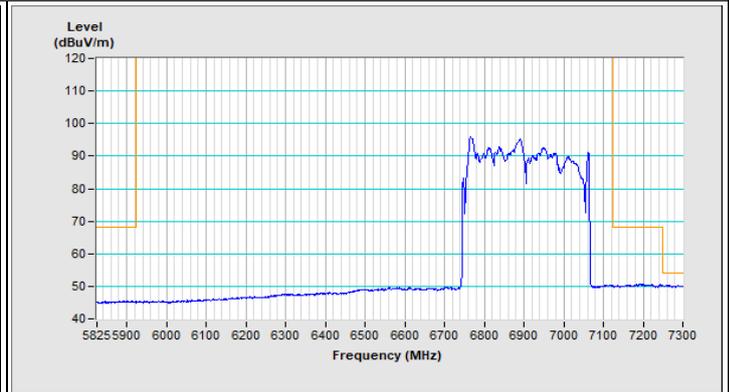

Horizontal (Average)

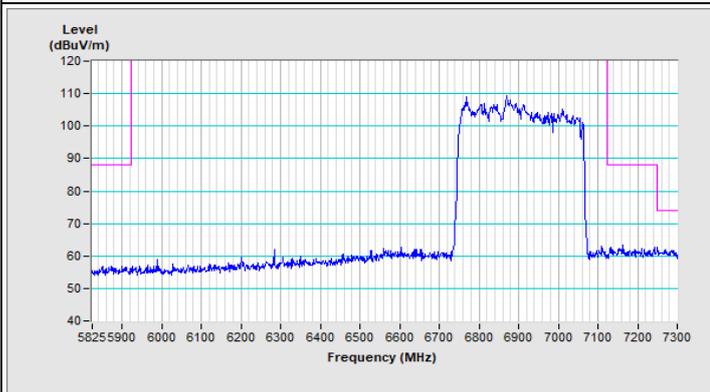

Vertical (Peak)

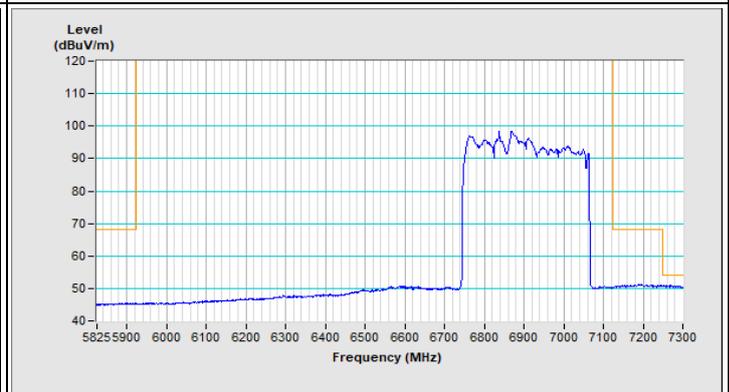

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---