

FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

| | |
|------------|---|
| Applicant | : SerComm Corporation |
| Address | : 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. |
| Equipment | : Wireless Network Camera |
| Model No. | : RC8021 |
| FCC ID | : P27YL500 |
| Trade Name | : SerComm |

Laboratory Accreditation



- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

| | |
|--|-----------|
| 1. Report of Measurements and Examinations | 5 |
| 1.1 List of Measurements and Examinations | 5 |
| 2. Test Configuration of Equipment under Test | 6 |
| 2.1 RF Specifications | 6 |
| 2.2 Feature of Equipment under Test | 7 |
| 2.3 Test Manner | 7 |
| 2.4 Description of Test System | 7 |
| 2.5 Connection Diagram of Test System | 8 |
| 2.6 Carrier Frequency of Channels | 8 |
| 2.7 General Information of Test | 9 |
| 2.8 Measurement Uncertainty | 9 |
| 2.9 History of this test report | 10 |
| 3. Antenna Requirements | 11 |
| 3.1 Standard Applicable | 11 |
| 3.2 Antenna Construction and Directional Gain | 11 |
| 4. Test of Conducted Emission | 12 |
| 4.1 Test Limit | 12 |
| 4.2 Test Procedures | 12 |
| 4.3 Typical Test Setup | 13 |
| 4.4 Measurement equipment | 13 |
| 4.5 Test Result and Data | 14 |
| 4.6 Test Photographs | 16 |
| 5. Test of Radiated Emission | 17 |
| 5.1 Test Limit | 17 |
| 5.2 Test Procedures | 17 |
| 5.3 Typical Test Setup | 18 |
| 5.4 Measurement equipment | 18 |
| 5.5 Test Result and Data | 19 |
| 5.6 Test Photographs | 35 |
| 6. 6dB Bandwidth Measurement Data | 36 |
| 6.1 Test Limit | 36 |
| 6.2 Test Procedures | 36 |
| 6.3 Test Setup Layout | 36 |
| 6.4 Measurement Equipment | 36 |
| 6.5 Test Result and Data | 36 |
| 7. Maximum Peak Output Power | 40 |
| 7.1 Test Limit | 40 |
| 7.2 Test Procedures | 40 |
| 7.3 Test Setup Layout | 40 |
| 7.4 Measurement equipment | 40 |
| 7.5 Test Result and Data | 40 |
| 8. Band Edges Measurement | 44 |
| 8.1 Test Limit | 44 |
| 8.2 Test Procedure | 44 |
| 8.3 Test Setup Layout | 44 |
| 8.4 Measurement equipment | 44 |

8.5 Test Result and Data 44

8.6 Restrict Band Emission Measurement Data 49

9. Power Spectral Density 50

9.1 Test Limit 50

9.2 Test Procedures 50

9.3 Test Setup Layout : 50

9.4 Measurement equipment 50

9.5 Test Result and Data 50

10. Restricted Bands of Operation 54

10.1 Labeling Requirement 54

Appendix A. Photographs of EUT A1 ~ A9

CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant : SerComm Corporation

Address : 8F, No. 3-1, YuanQu St., NanKang, Taipei 115,
Taiwan, R.O.C.

Equipment : Wireless Network Camera

Model No. : RC8021

FCC ID : P27YL500

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to

FCC Rules and Regulations Part 15 Subpart C (2007).

The test was carried out on Jul. 21, 2008 at **Exclusive Certification Corp.**

Signature


Anson Chou / Manager

1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

| FCC Rule | Description of Test | Result |
|--------------------------------------|--|--------|
| 15.203 | . Antenna Requirement | Pass |
| 15.207 | . Conducted Emission | Pass |
| 15.209 15.247(d) | . Radiated Emission | Pass |
| 15.247(a)(2) | . 6dB Bandwidth | Pass |
| 15.247(b) | . Maximum Peak Output Power | Pass |
| 15.247(d) | . 100kHz Bandwidth of Frequency Band Edges | Pass |
| 15.247(e) | . Power Spectral Density | Pass |
| 1.1307 1.1310 2.1091 2.1093 | . RF Exposure Compliance | Pass |

2. Test Configuration of Equipment under Test

2.1 RF Specifications

| | |
|----------------------|---|
| Spreading | 802.11b: DSSS, CCK(QPSK, BPSK) 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| Frequency Range | 802.11b/g: 2.4 ~ 2.4835GHz |
| Number of Channels | USA, Canada and Taiwan: 1 ~ 11 Japan: 1 ~ 14 Most European Countries: 1 ~ 13 France: 10 ~ 13 |
| Data Rate | 802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps |
| Modulation | 802.11g: OFDM 802.11b: CCK, DQPSK, DBPSK |
| Antenna | 1/2 Dipole Peak gain: 1.8dBi |
| Security | IEEE 802.1x and WPA (available in the future) WEP 64 bit, 128 bit |
| Transmit Power | FCC: 802.11b: 17 ~ 19.5 dBm (Average) Max Gain : 25dBm 802.11g: 54M = 13 ~ 15dBm (Average) 36M ~ 48M = 13dBm ~ 16dBm (Average) 6M ~ 24M = 13dBm ~ 16dBm (Average) Max Gain : 24dBm |
| ETSI | 802.11b: 17 ~ 18dBm (Average) EIRP = 20dBm (Ave + antenna gain) 802.11g: 48M ~ 54M = 13dBm ~ 14dBm (Average) 6M ~ 36M = 12dBm ~ 15dBm (Average) EIRP = 20dBm (Ave + antenna gain) |
| Receive Sensitivity | 11Mbps: -85dBm (Typical) 54Mbps: -72dBm (Typical) |
| Power Consumption | TX : 570mA RX : 300mA |
| TX and RX Throughput | TX : 22Mbps RX : 22Mbps |

2.2 Feature of Equipment under Test

| | |
|-----------------------|---|
| Dimensions | 90mm (W) * 35mm (H) * 90mm (D) |
| Operating Temperature | 0° C to 40° C |
| Storage Temperature | 0° C to 40° C |
| Network Protocols | TCP/IP, DHCP, SMTP, NTP, HTTP, FTP, NTP, RTP, RTSP, UPnP (Discovery only) |
| Network Interface | 1 Ethernet 10/100BaseT (RJ45) LAN connection |
| Wireless Interface | IEEE 802.11b/802.11g compatible, Infrastructure/Ad-hoc mode, WEP/WPA Personal/WPA2 Personal security support, roaming support |
| LEDs | 3 |
| Power Adapter | 5V DC External |
| Lens | F2.0mm @F2.0 Fixed Focus lens (cell phone size) in socket type |

2.3 Test Manner

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included remote workstation, Earphone and EUT for RF test. The remote workstation means Notebook and USB Mouse.
- c. An executive program, Telnet.exe under WIN XP, which generates a continuous signal by the following frequency to test.
 - 802.11b/g:
CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz


2.4 Description of Test System

| Device | Manufacturer | Model No. | Description |
|-----------------------------------|--------------|-----------|-------------------------------------|
| Earphone | MIC | MIC-4 | Data Cable, Audio Unshielding 1.6 m |
| Notebook (Remote Workstation) | DELL | 510m | Power Cable, Unshielding 1.8 m |
| USB Mouse (Remote Workstation) | IBM | MO28VO | Data Cable, USB Shielding 1.85 m |

Use Cable:

| Cable | Quantity | Description |
|-------|----------|-------------------|
| RJ45 | 1 | Unshielding, 3.0m |

2.5 Connection Diagram of Test System

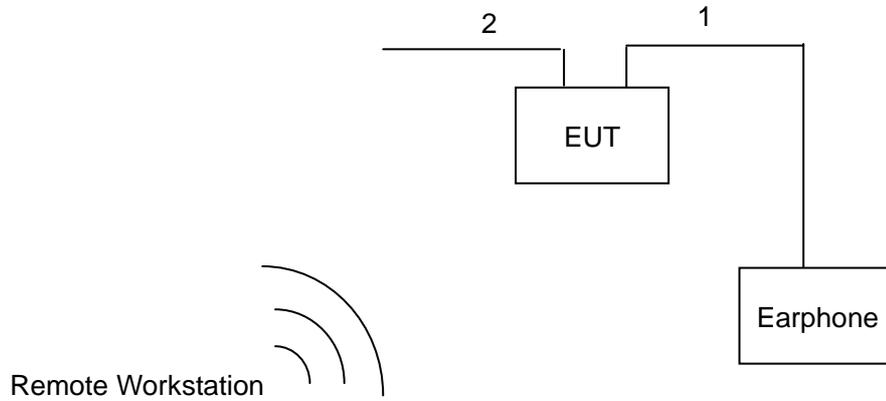

1. The Audio cable is connected from EUT to the Earphone.
2. The RJ45 cable is floating.

2.6 Carrier Frequency of Channels

802.11b, 802.11g

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 01 | 2412 | 07 | 2442 |
| 02 | 2417 | 08 | 2447 |
| 03 | 2422 | 09 | 2452 |
| 04 | 2427 | 10 | 2457 |
| 05 | 2432 | 11 | 2462 |
| 06 | 2437 | 12 | --- |

2.7 General Information of Test

| | |
|--------------------------------|---|
| Test Site : | Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C. |
| Test Site Location (OATS1-SD): | No.68-1, Shihbachongsi, shihding Township, Taipei City 223, Taiwan, R.O.C. Registration Number: 632249. |
| FCC Registration Number : | 632249 |
| IC Registration Number : | 6597A-1 |
| VCCI Registration Number : | T-338 for Telecommunication Test C-2188 for Conducted emission test R-1902 for Radiated emission test |
| Test Voltage: | AC 120V |
| Test in Compliance with: | ANSI C63.4-2003 FCC Part 15 Subpart C |
| Frequency Range Investigated: | Conducted: from 150kHz to 30MHz Radiation: from 30MHz to 24620MHz |
| Test Distance: | The test distance of radiated emission from antenna to EUT is 3 M. |

2.8 Measurement Uncertainty

| Measurement Item | Measurement Frequency | Polarization | Uncertainty |
|---|-----------------------|--------------|-------------|
| Conducted Emission | 9 kHz ~ 30 MHz | LINE/NEUTRAL | 2.71 dB |
| Radiated Emission | 30 MHz ~ 1GHz | Vertical | 4.11 dB |
| | | Horizontal | 4.10 dB |
| 6 dB Bandwidth | --- | --- | 7500 Hz |
| Maximum Peak Output Power | --- | --- | 1.4 dB |
| 100kHz Bandwidth of Frequency Band Edges | --- | --- | 2.2 dB |
| Power Spectral Density | --- | --- | 2.2 dB |

3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: Dipole Antenna

Antenna Gain: 1.8 dBi

4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


| Frequency (MHz) | Quasi Peak (dB μ V) | Average (dB μ V) |
|-----------------|-------------------------|----------------------|
| 0.15 – 0.5 | 66-56* | 56-46* |
| 0.5 – 5.0 | 56 | 46 |
| 5.0 – 30.0 | 60 | 50 |

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3 Typical Test Setup

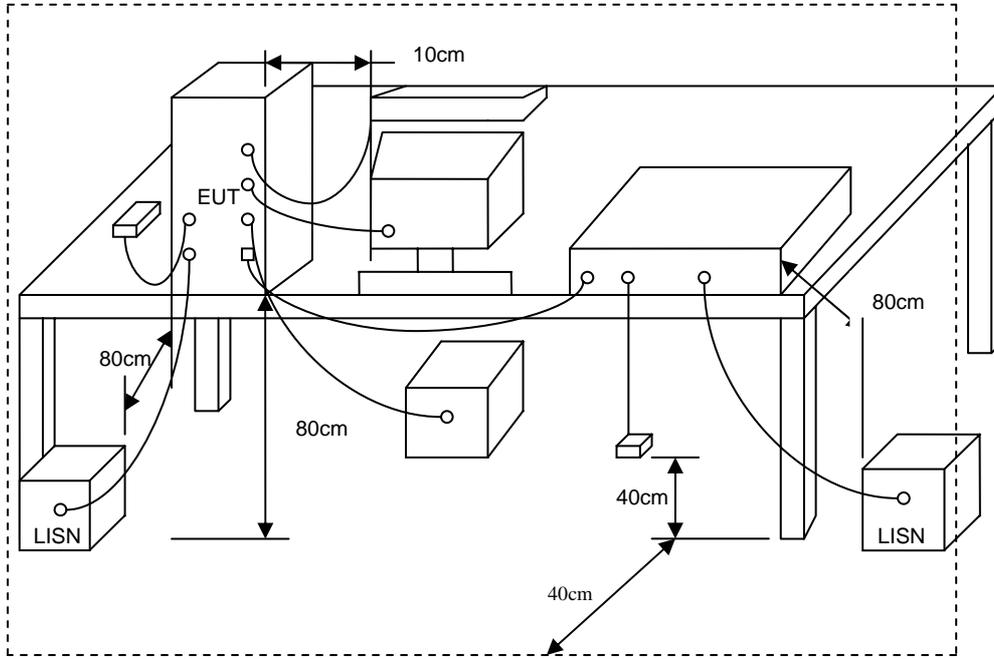


4.4 Measurement equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date. |
|----------------------|-----------|--------------|------------|------------------|-------------|
| Receiver | R&S | ESCI | 100443 | 2007/09/27 | 2008/09/26 |
| LISN | NNB-2/16Z | MESS TEC | 02/10191 | 2008/06/03 | 2009/06/02 |
| LISN | NNB-2/16Z | ROLF HEINE | 03/10058 | 2008/04/19 | 2009/04/18 |

4.5 Test Result and Data

| | | | |
|-----------|------------------------|-------------|---------|
| Power | : AC 120V | Pol/Phase | : LINE |
| Test Mode | : 802.11g, CH1 | Temperature | : 25 °C |
| Memo | : DSA-6G-05 FUS 050100 | Humidity | : 60 % |

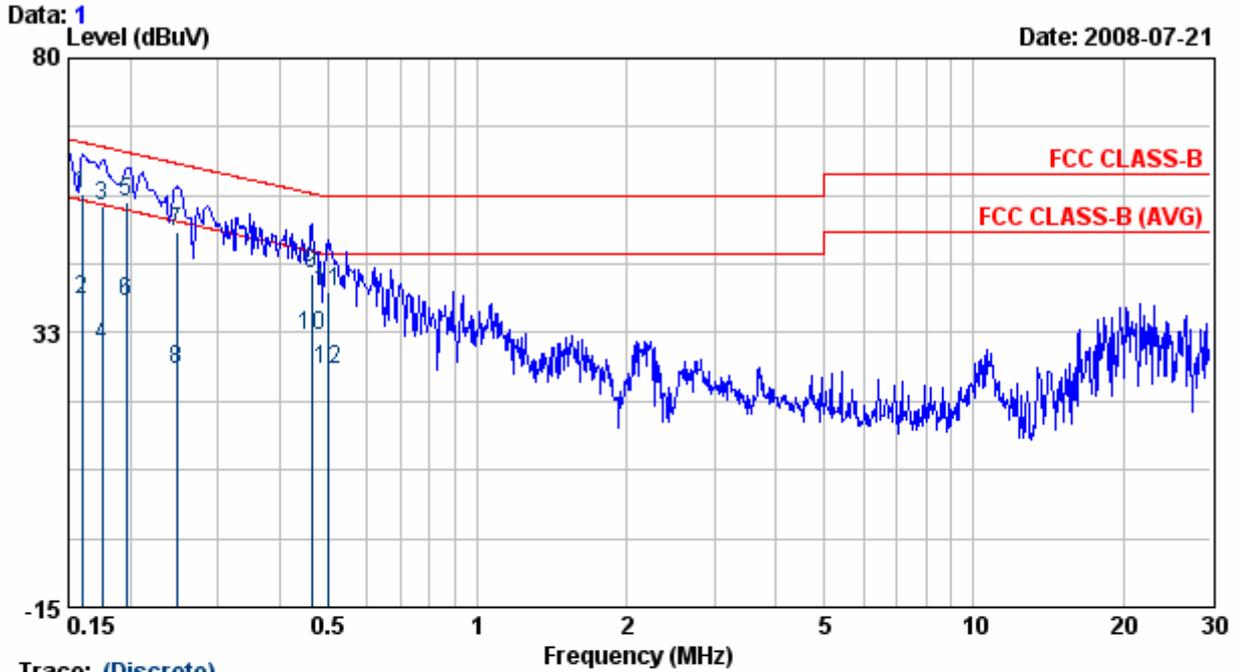


Trace: (Discrete)

| Item | Freq MHz | Read Value dBuV | Factor dB | Result dBuV | Limit dBuV | Margin dBuV | Remark |
|------|-------------|-----------------------|--------------|----------------|---------------|----------------|---------|
| 1 | 0.16 | 56.51 | 0.11 | 56.62 | 65.46 | -8.84 | QP |
| 2 | 0.16 | 38.25 | 0.11 | 38.36 | 55.46 | -17.10 | AVERAGE |
| 3 | 0.18 | 54.39 | 0.11 | 54.50 | 64.69 | -10.19 | QP |
| 4 | 0.18 | 30.00 | 0.11 | 30.11 | 54.69 | -24.58 | AVERAGE |
| 5 | 0.20 | 54.97 | 0.11 | 55.08 | 63.76 | -8.67 | QP |
| 6 | 0.20 | 37.65 | 0.11 | 37.76 | 53.76 | -16.00 | AVERAGE |
| 7 | 0.25 | 49.80 | 0.11 | 49.91 | 61.82 | -11.91 | QP |
| 8 | 0.25 | 26.13 | 0.11 | 26.24 | 51.82 | -25.58 | AVERAGE |
| 9 | 0.46 | 42.71 | 0.12 | 42.83 | 56.62 | -13.80 | QP |
| 10 | 0.46 | 31.84 | 0.12 | 31.95 | 46.62 | -14.67 | AVERAGE |
| 11 | 0.50 | 39.52 | 0.12 | 39.65 | 56.00 | -16.35 | QP |
| 12 | 0.50 | 25.86 | 0.12 | 25.99 | 46.00 | -20.01 | AVERAGE |

Remarks: 1. Result = Read Value + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

| | | | |
|-----------|------------------------|-------------|-----------|
| Power | : AC 120V | Pol/Phase | : NEUTRAL |
| Test Mode | : 802.11g, CH1 | Temperature | : 25 °C |
| Memo | : DSA-6G-05 FUS 050100 | Humidity | : 60 % |

Data: 2

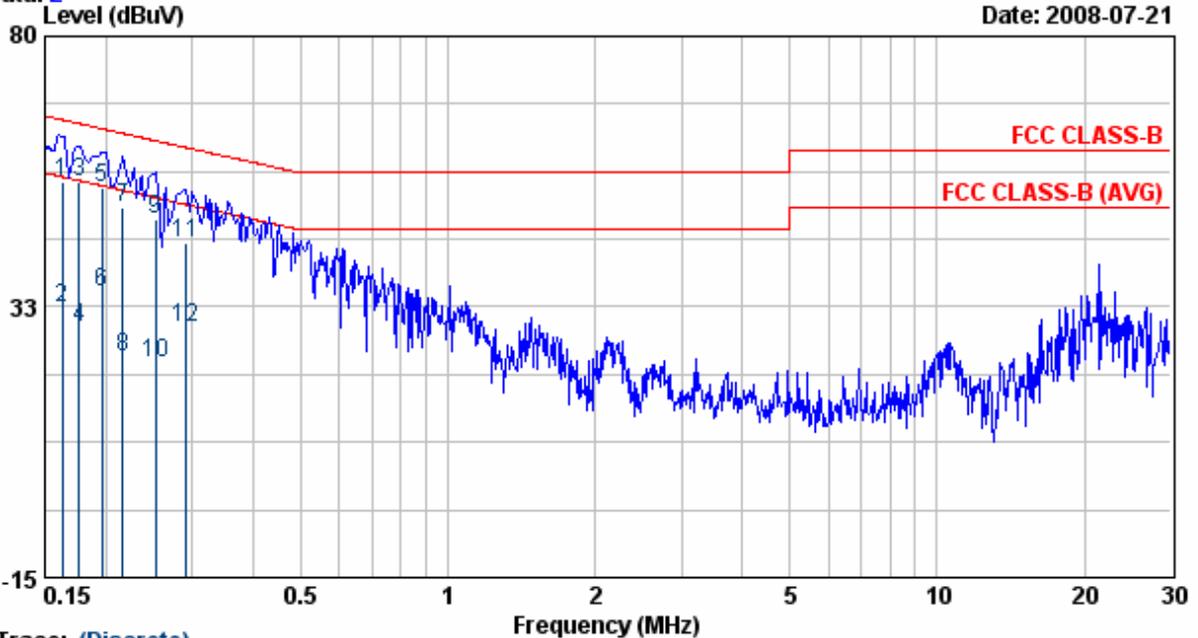

Trace: (Discrete)

| Item | Freq MHz | Read Value dBuV | Factor dB | Result dBuV | Limit dBuV | Margin dBuV | Remark |
|------|-------------|-----------------------|--------------|----------------|---------------|----------------|---------|
| 1 | 0.16 | 54.18 | 0.14 | 54.32 | 65.32 | -11.00 | QP |
| 2 | 0.16 | 32.29 | 0.14 | 32.43 | 55.32 | -22.89 | AVERAGE |
| 3 | 0.18 | 54.15 | 0.14 | 54.29 | 64.68 | -10.39 | QP |
| 4 | 0.18 | 28.76 | 0.14 | 28.90 | 54.68 | -25.78 | AVERAGE |
| 5 | 0.20 | 53.21 | 0.14 | 53.35 | 63.76 | -10.41 | QP |
| 6 | 0.20 | 34.82 | 0.14 | 34.95 | 53.76 | -18.80 | AVERAGE |
| 7 | 0.22 | 49.95 | 0.14 | 50.09 | 62.96 | -12.88 | QP |
| 8 | 0.22 | 23.52 | 0.14 | 23.66 | 52.96 | -29.30 | AVERAGE |
| 9 | 0.25 | 47.72 | 0.14 | 47.85 | 61.69 | -13.84 | QP |
| 10 | 0.25 | 22.68 | 0.14 | 22.82 | 51.69 | -28.87 | AVERAGE |
| 11 | 0.29 | 43.73 | 0.14 | 43.86 | 60.46 | -16.59 | QP |
| 12 | 0.29 | 28.57 | 0.14 | 28.71 | 50.46 | -21.75 | AVERAGE |

Remarks: 1. Result = Read Value + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss

Test engineer: Ben

5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency (MHz) | Distance Meters | Radiated (μ V / M) | Radiated (dB μ V/ M) |
|-----------------|-----------------|-------------------------|--------------------------|
| 30-88 | 3 | 100 | 40.0 |
| 88-216 | 3 | 150 | 43.5 |
| 216-960 | 3 | 200 | 46.0 |
| Above 960 | 3 | 500 | 54.0 |


For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

| Frequency (MHz) | Distance Meters | Radiated (dB μ V/ M) |
|-----------------|-----------------|--------------------------|
| 30-230 | 10 | 30 |
| 230-1000 | 10 | 37 |

5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

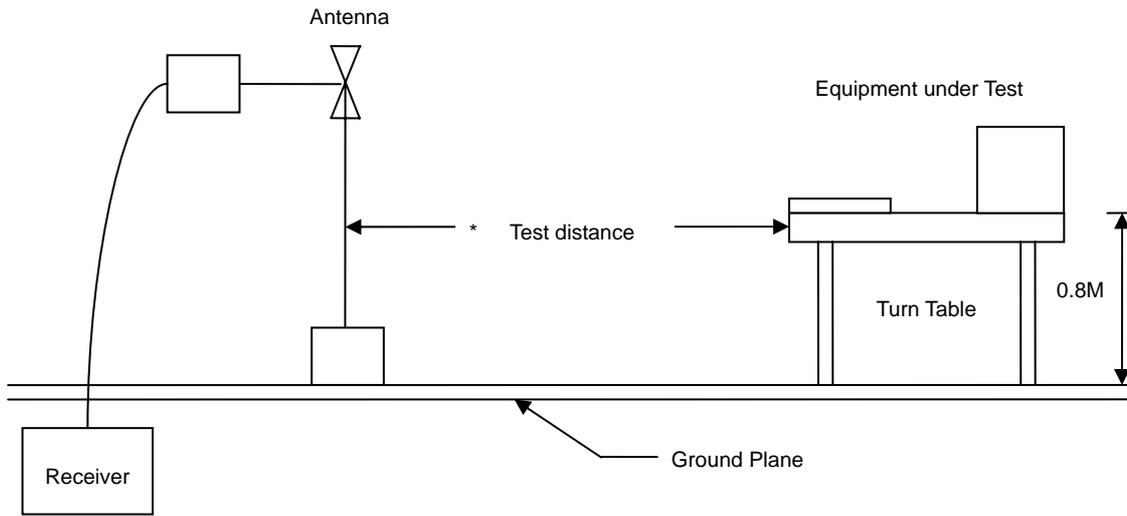


5.4 Measurement equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date |
|----------------------|-----------|--------------|------------|------------------|------------|
| Bilog Antenna | CBL6112B | Schaffner | 2840 | 2008/05/15 | 2009/05/14 |
| Signal Generator | 8648B | HP | 3629U00612 | 2007/10/09 | 2008/10/08 |
| Amplifier | 8447D | Agilent | 2944A10593 | 2008/05/26 | 2009/05/25 |
| EMI Receiver | SCR-3501 | SCHAFFNER | 437 | 2007/11/26 | 2008/11/25 |
| Spectrum | FSP40 | R&S | 100047 | 2008/02/22 | 2009/02/21 |
| Horn Antenna | 3115 | EMCO | 31589 | 2008/04/01 | 2009/03/30 |
| Amplifier | 8449B | Agilent | 3008A01954 | 2008/01/24 | 2009/01/23 |

5.5 Test Result and Data

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

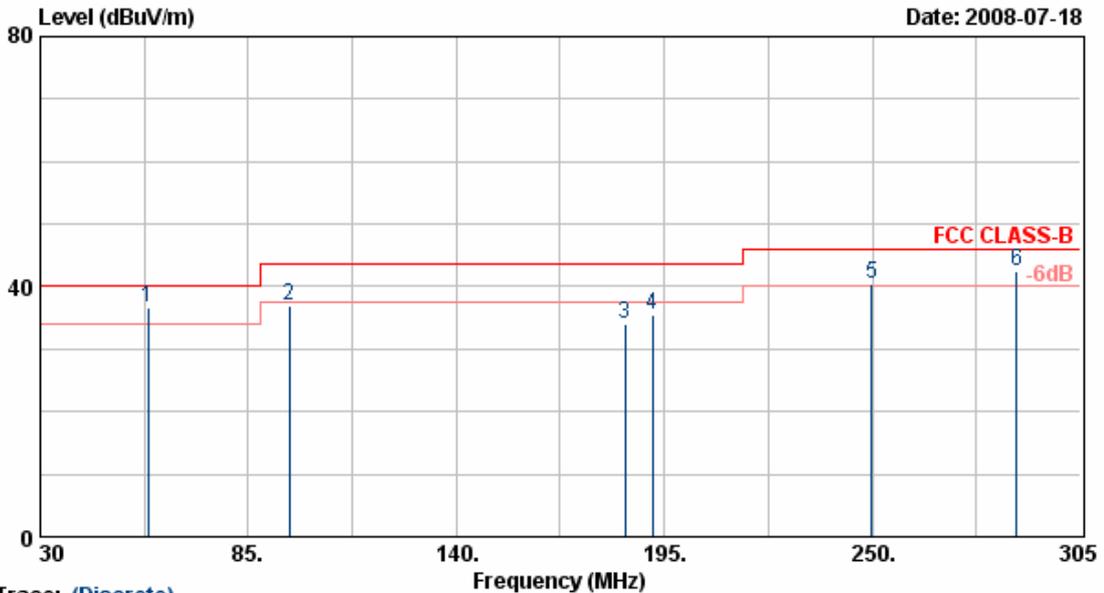


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|--------|------------|--------|--------|--------|--------|--------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 58.60 | 53.22 | -16.43 | 36.79 | 40.00 | -3.21 | QP | 100 | 45 |
| 2 | 95.73 | 52.14 | -15.07 | 37.07 | 43.50 | -6.43 | Peak | 100 | 124 |
| 3 | 184.55 | 43.64 | -9.51 | 34.13 | 43.50 | -9.37 | Peak | 100 | 41 |
| 4 | 191.98 | 46.31 | -10.93 | 35.38 | 43.50 | -8.12 | Peak | 100 | 141 |
| 5 | 249.73 | 53.40 | -12.88 | 40.52 | 46.00 | -5.48 | QP | 100 | 104 |
| 6 | 288.23 | 48.82 | -6.44 | 42.37 | 46.00 | -3.63 | QP | 100 | 112 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

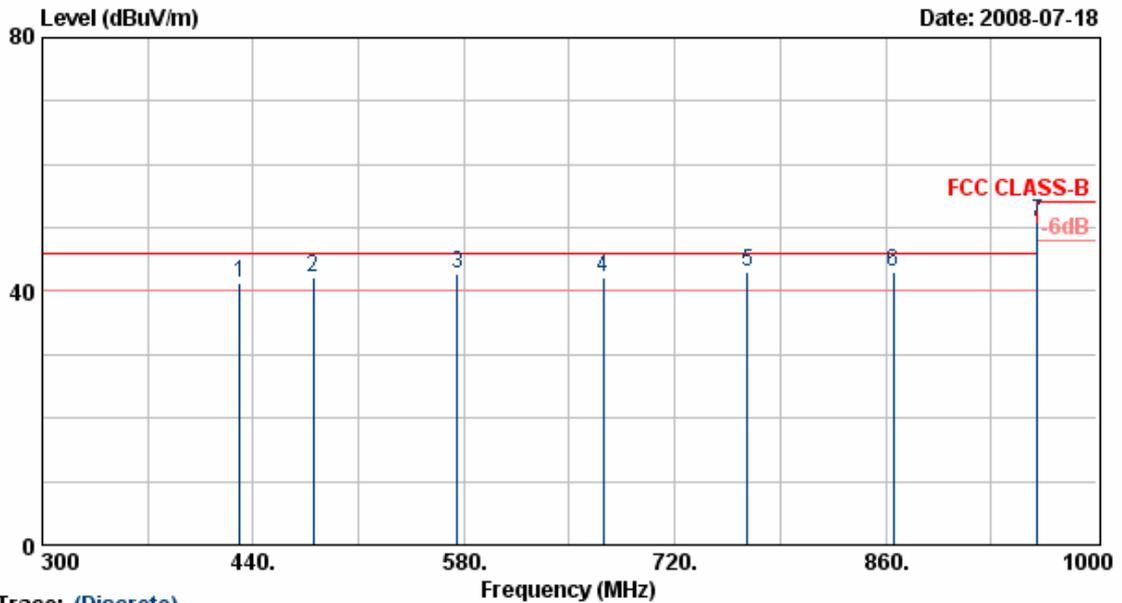


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|--------|------------|--------|--------|--------|--------|--------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 430.90 | 47.13 | -5.83 | 41.30 | 46.00 | -4.70 | QP | 100 | 120 |
| 2 | 479.90 | 46.61 | -4.50 | 42.11 | 46.00 | -3.89 | QP | 100 | 100 |
| 3 | 575.80 | 42.61 | 0.21 | 42.82 | 46.00 | -3.18 | QP | 100 | 103 |
| 4 | 672.40 | 45.84 | -3.75 | 42.09 | 46.00 | -3.91 | QP | 100 | 104 |
| 5 | 768.30 | 43.39 | -0.42 | 42.97 | 46.00 | -3.03 | QP | 100 | 134 |
| 6 | 864.90 | 42.16 | 0.81 | 42.97 | 46.00 | -3.03 | QP | 100 | 111 |
| 7 | 960.80 | 47.60 | 3.28 | 50.88 | 54.00 | -3.12 | QP | 100 | 141 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

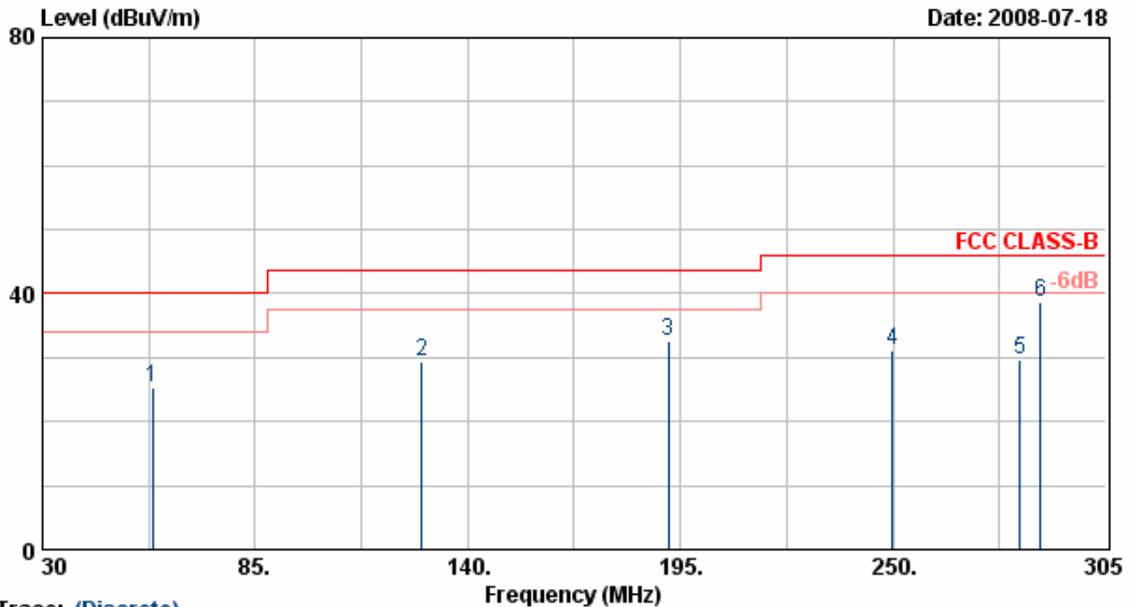


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|--------|------------|--------|--------|--------|--------|--------|---------|---------|
| | MHz | dBUV/m | dB | dBUV/m | dBUV/m | dB | | cm | Deg |
| 1 | 58.60 | 47.64 | -22.39 | 25.24 | 40.00 | -14.76 | Peak | 100 | 115 |
| 2 | 128.18 | 49.26 | -19.79 | 29.47 | 43.50 | -14.03 | Peak | 100 | 102 |
| 3 | 191.98 | 49.00 | -16.47 | 32.53 | 43.50 | -10.97 | Peak | 100 | 104 |
| 4 | 249.73 | 48.89 | -17.72 | 31.18 | 46.00 | -14.82 | Peak | 100 | 87 |
| 5 | 282.73 | 43.51 | -13.82 | 29.70 | 46.00 | -16.30 | Peak | 100 | 56 |
| 6 | 288.23 | 53.22 | -14.56 | 38.66 | 46.00 | -7.34 | Peak | 100 | 88 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

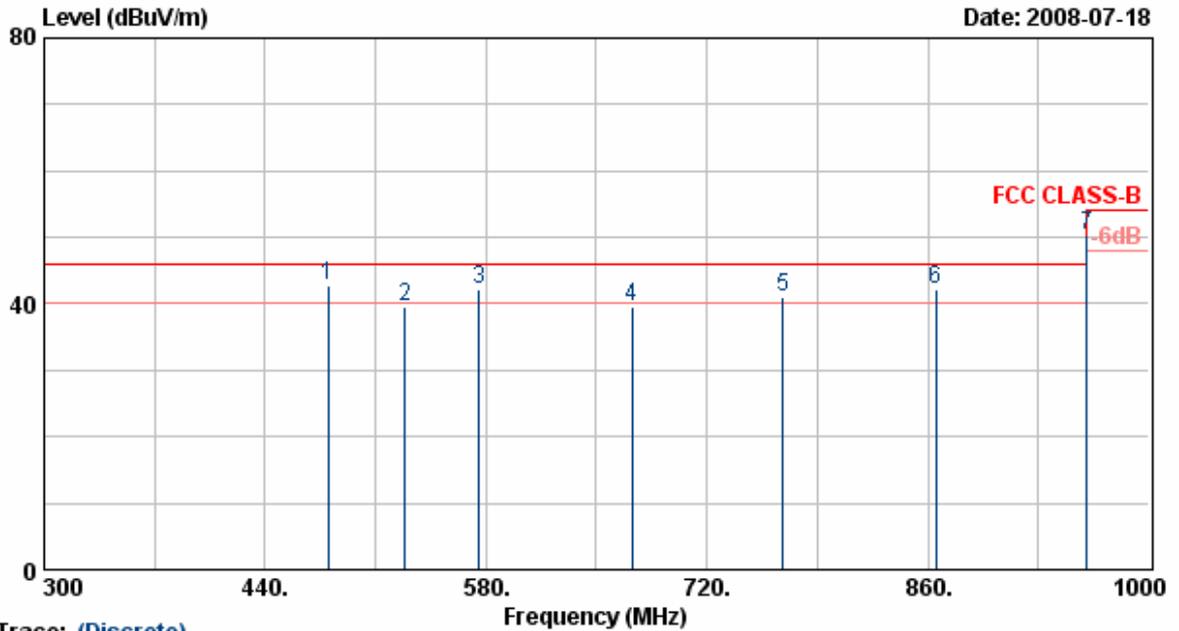


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|--------|------------|--------|--------|--------|--------|--------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 479.90 | 48.20 | -5.48 | 42.72 | 46.00 | -3.28 | QP | 100 | 102 |
| 2 | 528.90 | 43.68 | -4.01 | 39.67 | 46.00 | -6.33 | Peak | 100 | 121 |
| 3 | 575.80 | 45.72 | -3.57 | 42.15 | 46.00 | -3.85 | QP | 100 | 174 |
| 4 | 672.40 | 43.96 | -4.42 | 39.54 | 46.00 | -6.46 | Peak | 100 | 132 |
| 5 | 768.30 | 41.98 | -0.85 | 41.13 | 46.00 | -4.87 | QP | 100 | 107 |
| 6 | 864.90 | 38.71 | 3.46 | 42.17 | 46.00 | -3.83 | QP | 100 | 132 |
| 7 | 960.80 | 43.78 | 6.40 | 50.19 | 54.00 | -3.81 | QP | 100 | 114 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

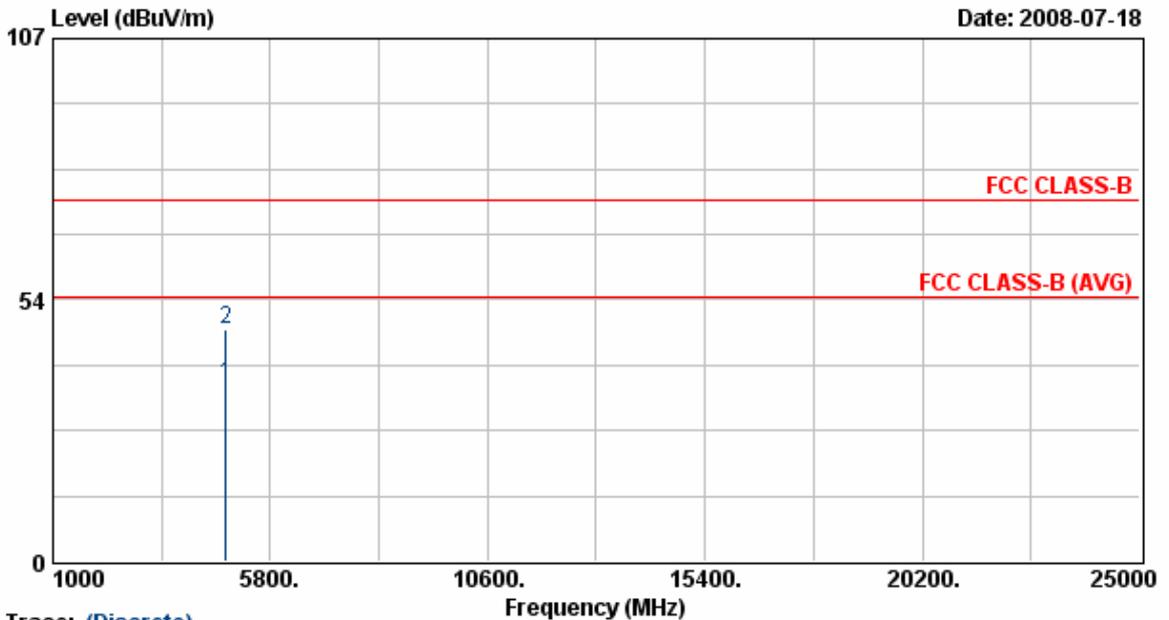


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4823.30 | 30.48 | 5.67 | 36.15 | 54.00 | -17.85 | Average | 127 | 162 |
| 2 | 4823.30 | 41.77 | 5.67 | 47.44 | 74.00 | -26.56 | Peak | 127 | 162 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

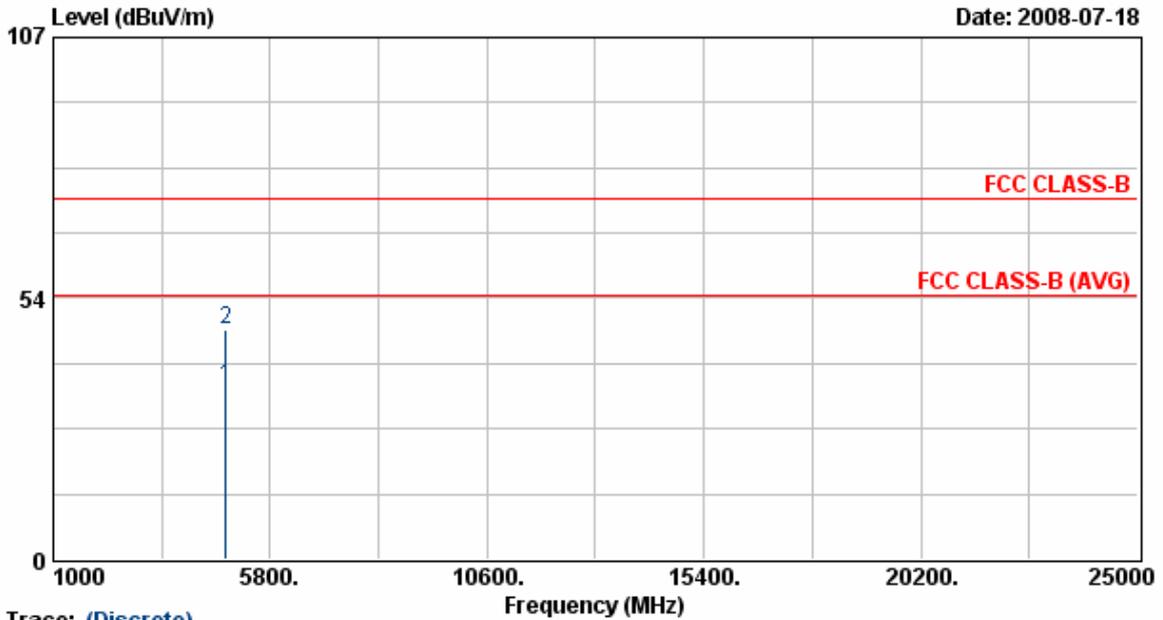


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4823.70 | 29.87 | 5.67 | 35.54 | 54.00 | -18.46 | Average | 127 | 159 |
| 2 | 4823.70 | 41.27 | 5.67 | 46.94 | 74.00 | -27.06 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 6 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

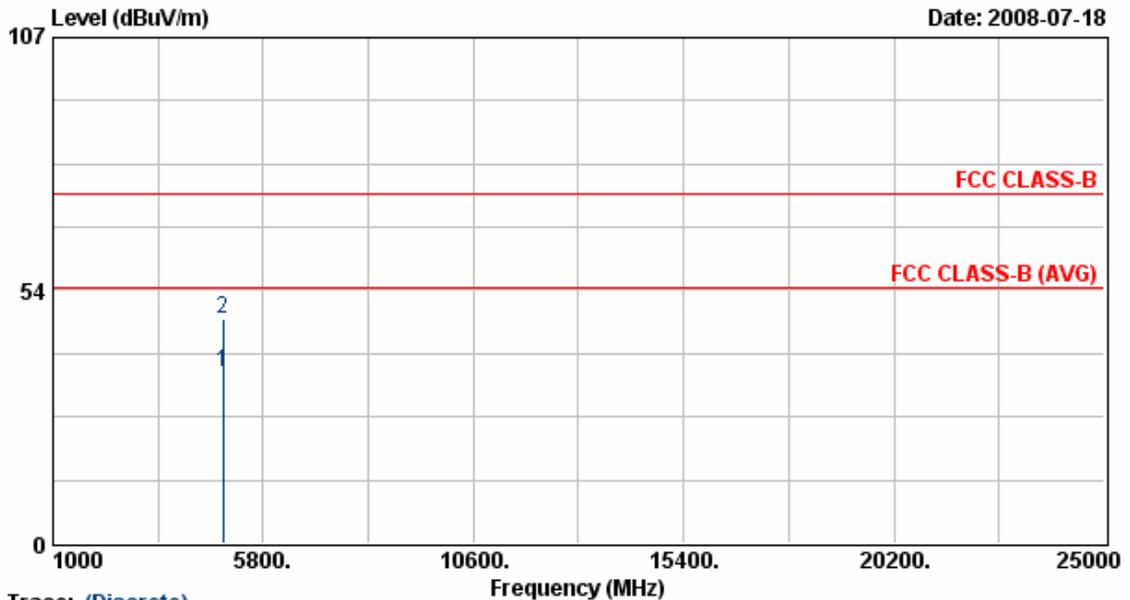


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4873.93 | 30.42 | 5.80 | 36.22 | 54.00 | -17.78 | Average | 127 | 162 |
| 2 | 4873.93 | 41.72 | 5.80 | 47.52 | 74.00 | -26.48 | Peak | 127 | 162 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 6 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

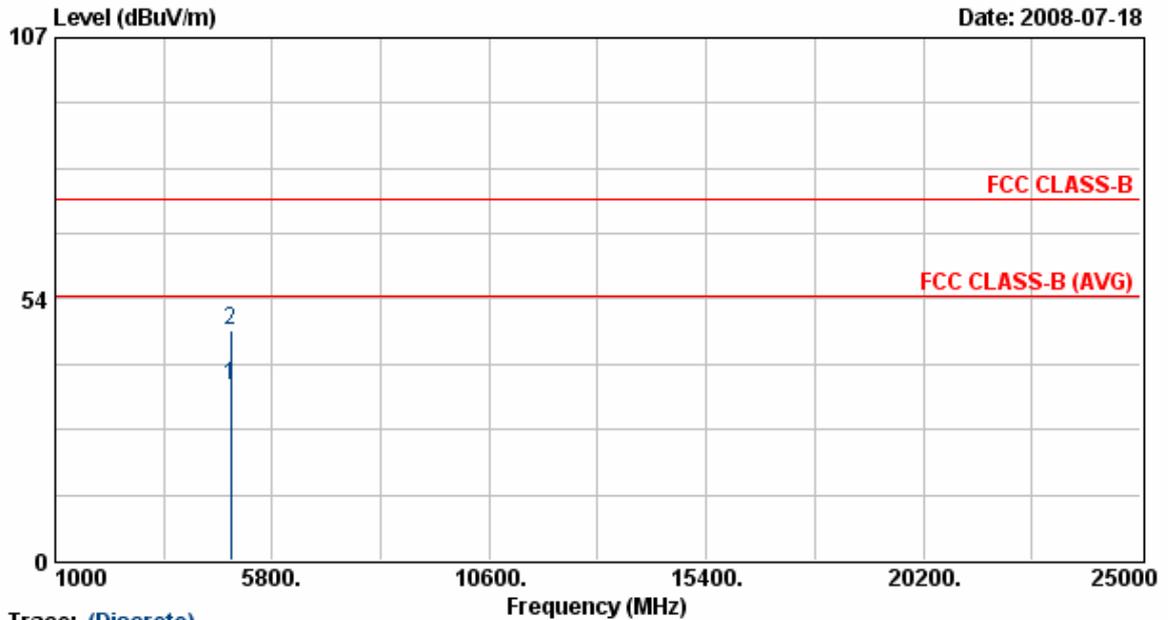


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4873.88 | 29.83 | 5.80 | 35.63 | 54.00 | -18.37 | Average | 127 | 159 |
| 2 | 4873.88 | 41.27 | 5.80 | 47.07 | 74.00 | -26.93 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 11 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

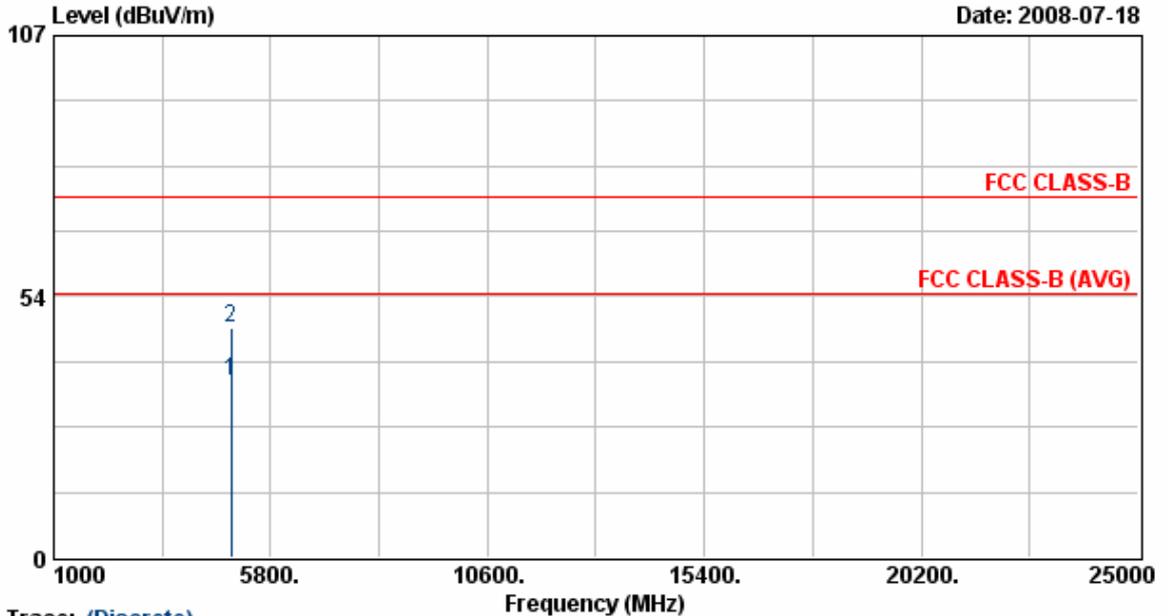


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4924.05 | 30.43 | 5.93 | 36.37 | 54.00 | -17.63 | Average | 127 | 162 |
| 2 | 4924.05 | 41.03 | 5.93 | 46.97 | 74.00 | -27.03 | Peak | 127 | 162 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 11 | Humidity | : 70 % |
| Modulation Type | : 802.11b | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 11 Mbps |

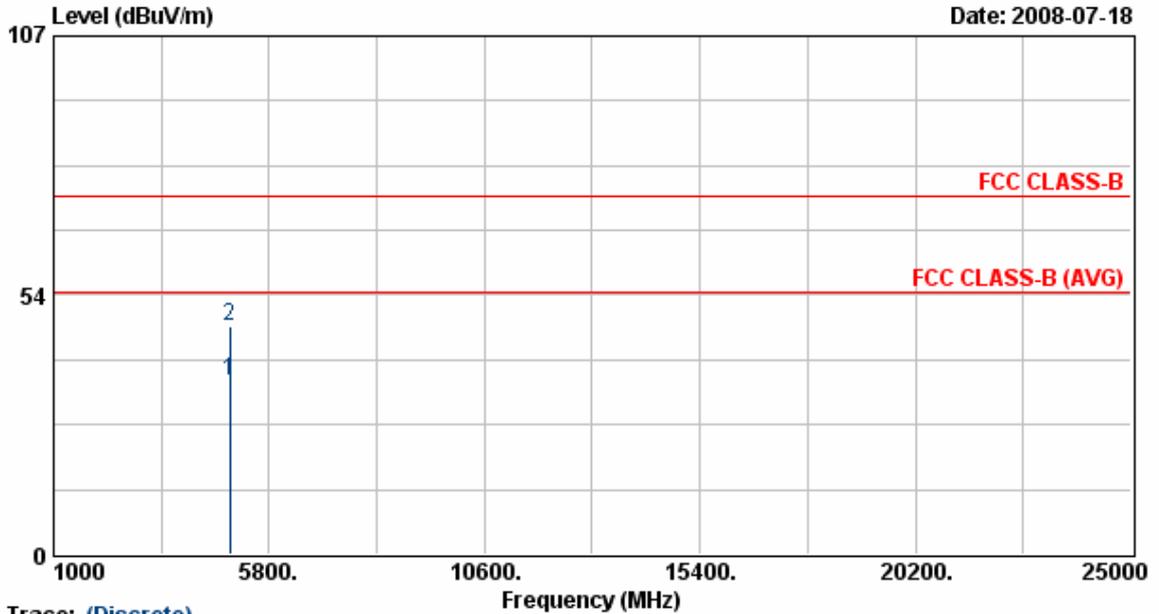


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4924.05 | 29.68 | 5.93 | 35.61 | 54.00 | -18.39 | Average | 127 | 159 |
| 2 | 4924.05 | 41.18 | 5.93 | 47.11 | 74.00 | -26.89 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

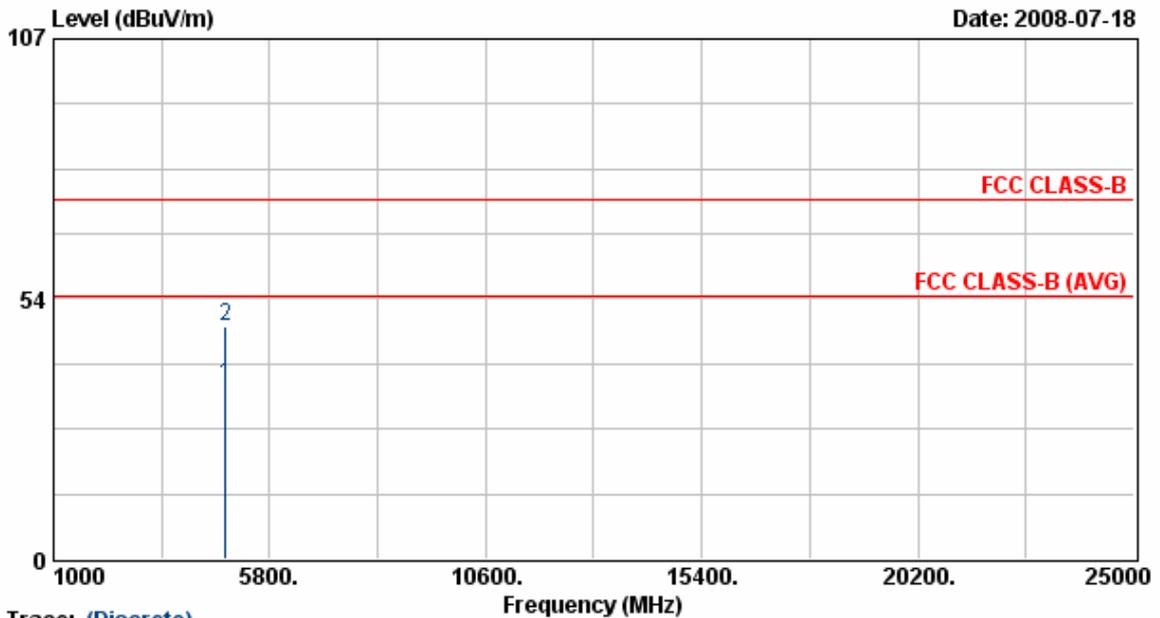


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBUV/m | dB | dBUV/m | dBUV/m | dB | | cm | Deg |
| 1 | 4823.95 | 30.06 | 5.67 | 35.73 | 54.00 | -18.27 | Average | 127 | 162 |
| 2 | 4823.95 | 42.06 | 5.67 | 47.73 | 74.00 | -26.27 | Peak | 127 | 162 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONRAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 1 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

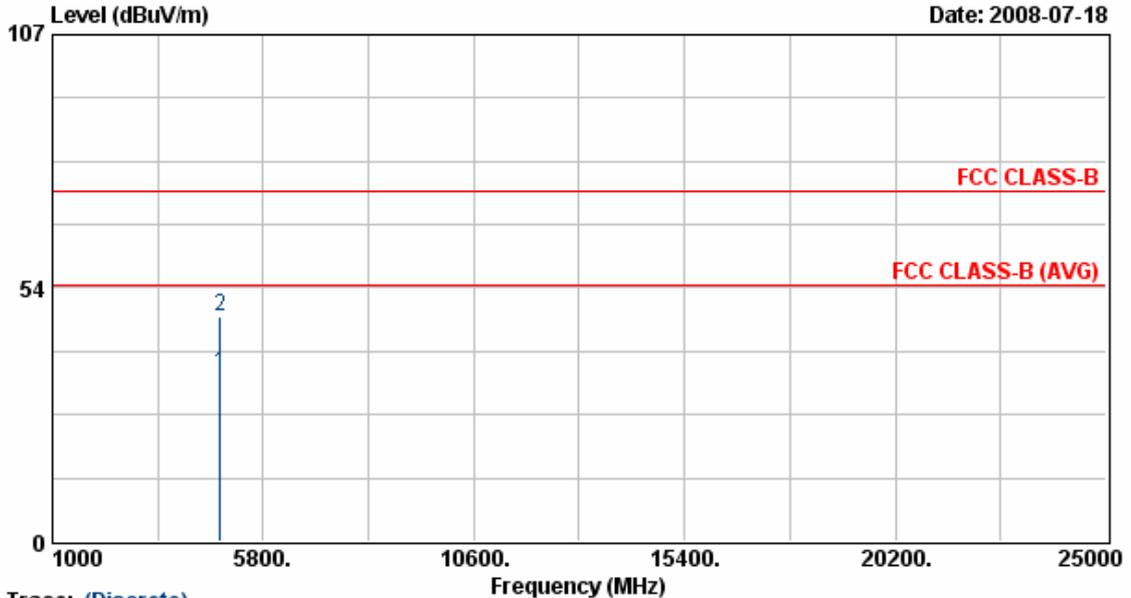


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4823.85 | 29.76 | 5.67 | 35.43 | 54.00 | -18.57 | Average | 127 | 159 |
| 2 | 4823.85 | 41.76 | 5.67 | 47.43 | 74.00 | -26.57 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 6 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

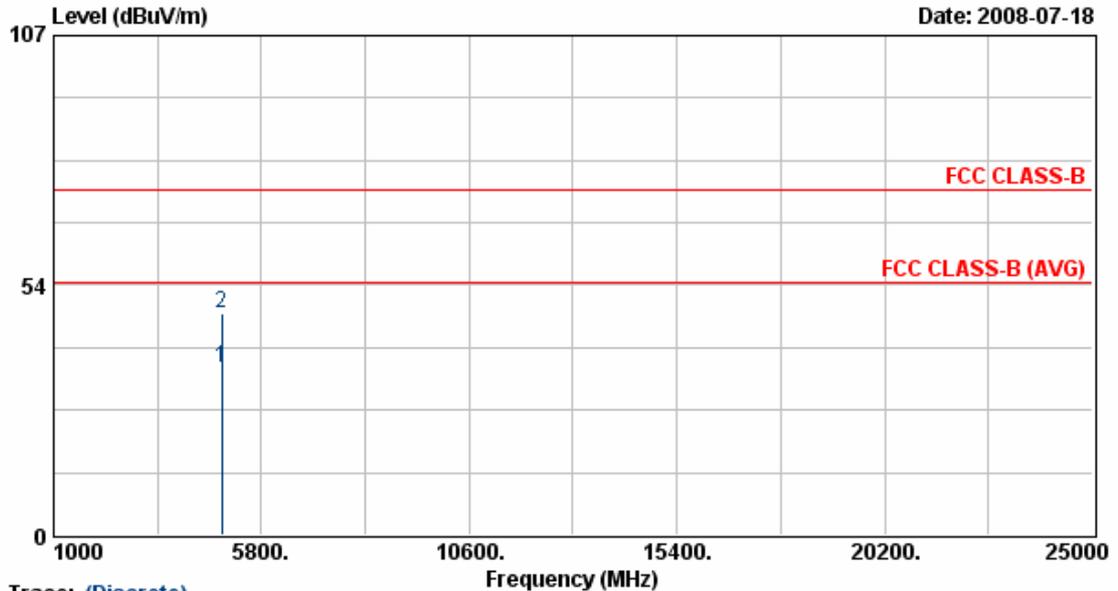


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4873.88 | 30.07 | 5.80 | 35.87 | 54.00 | -18.13 | Average | 127 | 162 |
| 2 | 4873.88 | 41.69 | 5.80 | 47.49 | 74.00 | -26.51 | Peak | 127 | 162 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 6 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

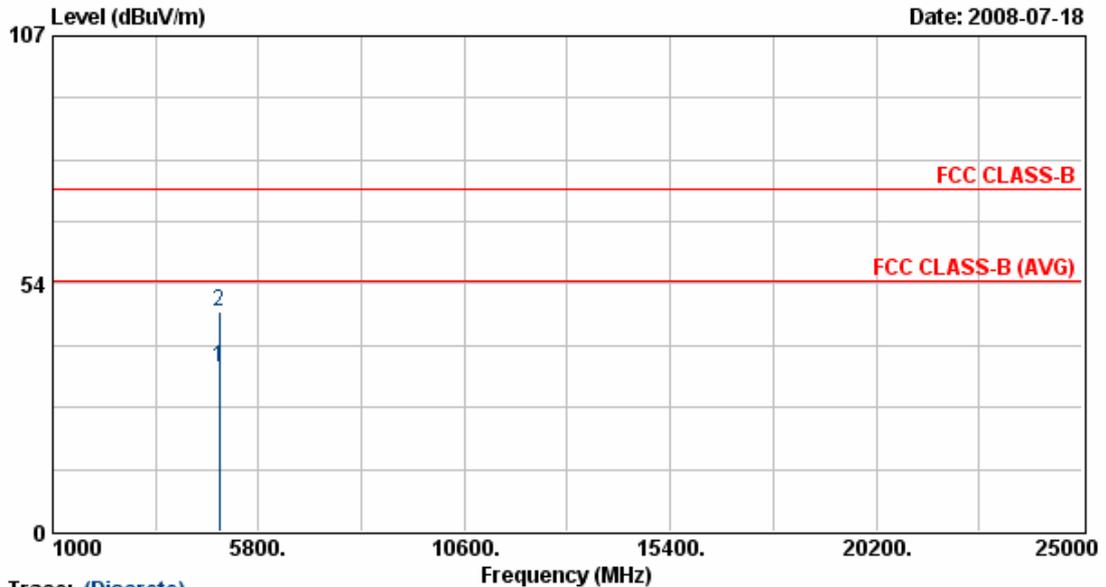


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4874.05 | 29.74 | 5.80 | 35.54 | 54.00 | -18.46 | Average | 127 | 159 |
| 2 | 4874.05 | 41.57 | 5.80 | 47.37 | 74.00 | -26.63 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|------------|
| Power | : AC 120V | Pol/Phase | : VERTICAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 11 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

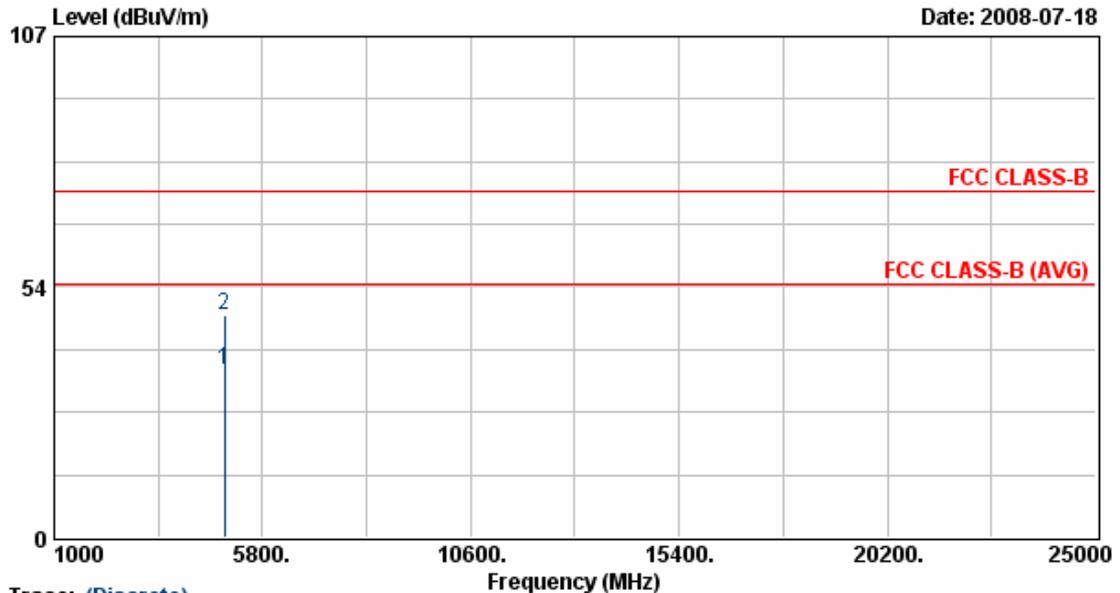


Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4924.10 | 29.95 | 5.93 | 35.88 | 54.00 | -18.12 | Average | 127 | 162 |
| 2 | 4924.10 | 41.49 | 5.93 | 47.42 | 74.00 | -26.58 | Peak | 127 | 162 |

- Notes:
1. Result = Read Value + Factor
 2. Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
 6. The other emissions is too low to be measured.

| | | | |
|-------------------|------------------------|----------------------|--------------|
| Power | : AC 120V | Pol/Phase | : HORIZONTAL |
| Test Mode | : Transmit / Receive | Temperature | : 30 °C |
| Operation Channel | : 11 | Humidity | : 70 % |
| Modulation Type | : 802.11g | Atmospheric Pressure | : 1010 hPa |
| Memo | : DSA-6G-05 FUS 050100 | Rate | : 54 Mbps |

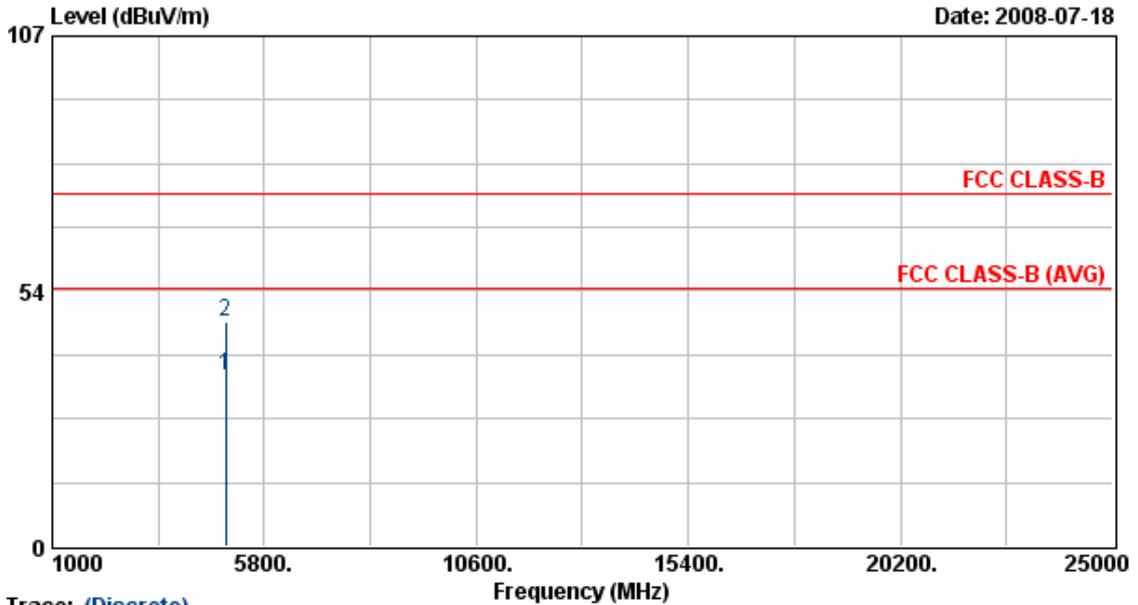

Trace: (Discrete)

| Item | Freq | Read Value | Factor | Result | Limit | Margin | Remark | Ant Pos | Tab Pos |
|------|---------|------------|--------|--------|--------|--------|---------|---------|---------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | cm | Deg |
| 1 | 4923.80 | 29.68 | 5.93 | 35.61 | 54.00 | -18.39 | Average | 127 | 159 |
| 2 | 4923.80 | 41.28 | 5.93 | 47.21 | 74.00 | -26.79 | Peak | 127 | 159 |

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Test engineer: Ben

6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

6.3 Test Setup Layout

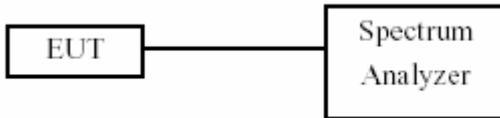

6.4 Measurement Equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date |
|----------------------|-----------|--------------|------------|------------------|------------|
| Spectrum Analyzer | FSP40 | R&S | 10047 | 2008/02/22 | 2009/02/21 |

6.5 Test Result and Data

Test Date : Jul. 16, 2008
 Temperature : 20
 Humidity : 60%
 Atmospheric Pressure : 1008 hPa


(1) Modulation Standard: IEEE 802.11b (11Mbps)

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------|-----------------|---------------------|
| 01 | 2412 | 12.20 |
| 06 | 2437 | 12.30 |
| 11 | 2462 | 12.30 |

(2) Modulation Standard: IEEE 802.11g (06Mbps)


| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |
|---------|-----------------|---------------------|
| 01 | 2412 | 16.40 |
| 06 | 2437 | 16.50 |
| 11 | 2462 | 16.50 |

Modulation Standard: 802.11b (11Mbps)
 Channel: 01

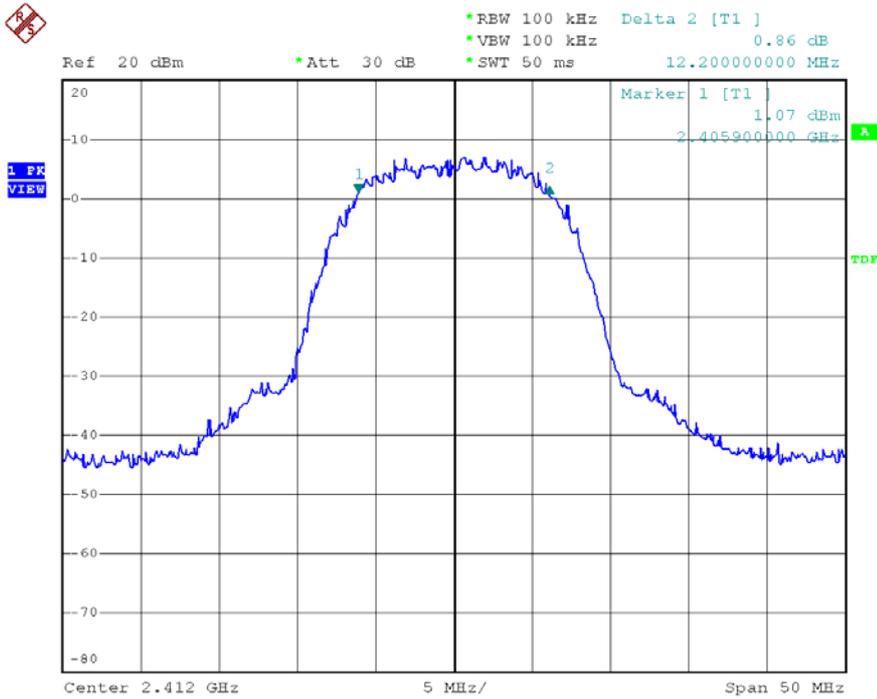


Date: 16.JUL.2008 16:58:04

Modulation Standard: 802.11b (11Mbps)
 Channel: 06

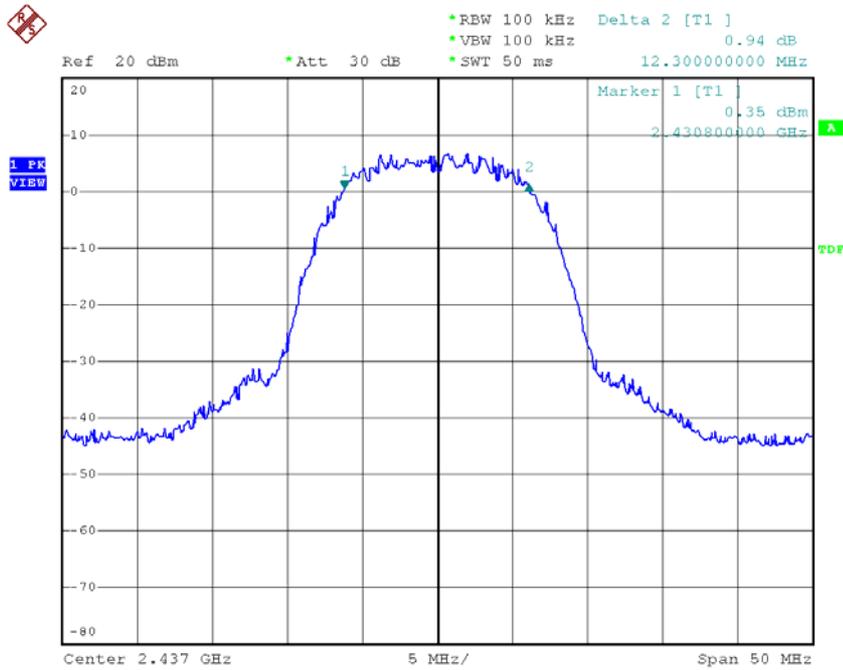


Date: 16.JUL.2008 16:56:15

Modulation Standard: 802.11b (11Mbps)
 Channel: 11

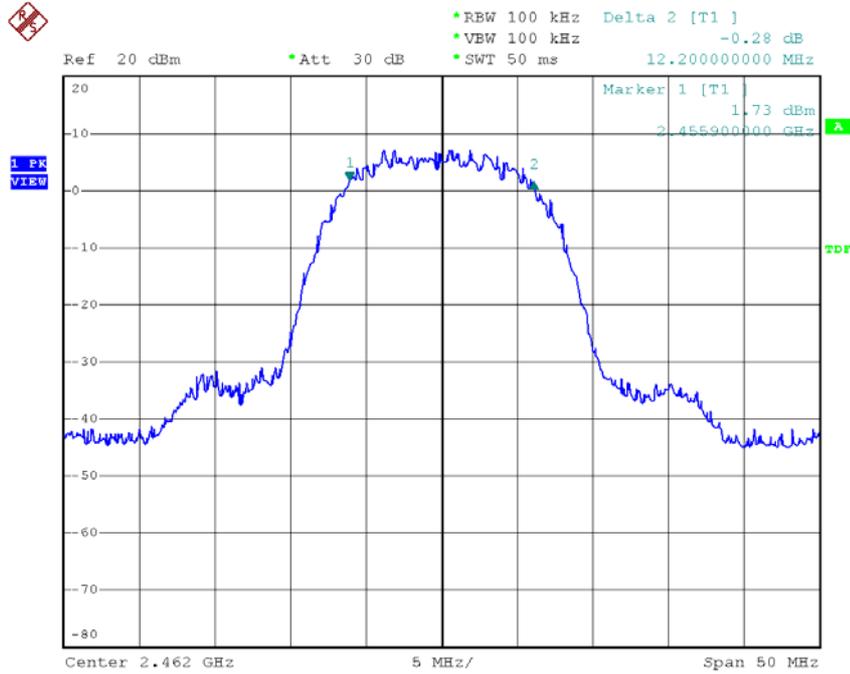


Date: 16.JUL.2008 16:54:27

Modulation Standard: 802.11g (06Mbps)
 Channel: 01

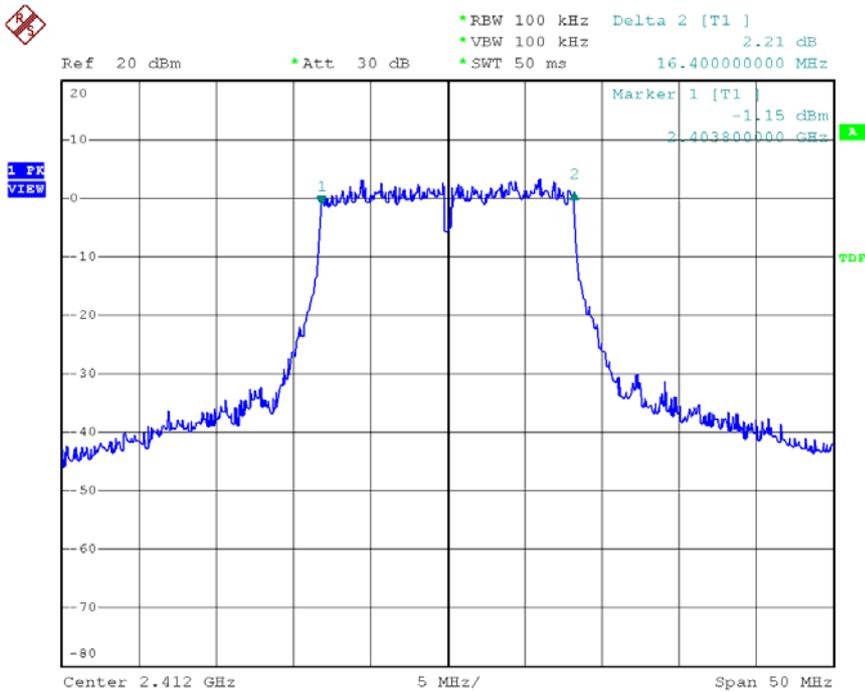


Date: 16.JUL.2008 16:45:44

Modulation Standard: 802.11g (06Mbps)
 Channel: 06

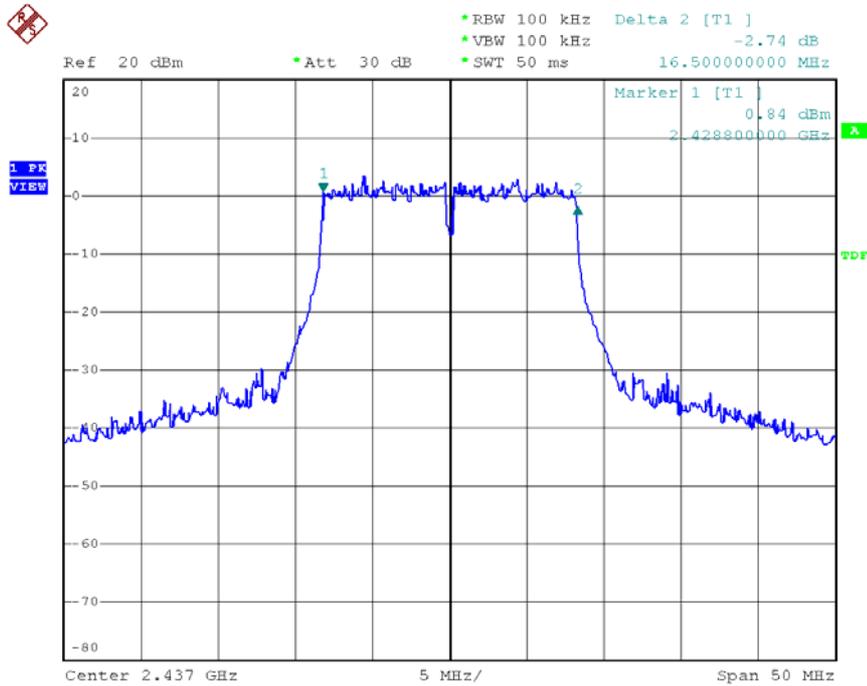

Date: 16.JUL.2008 16:50:16

Modulation Standard: 802.11g (06Mbps)
 Channel: 11

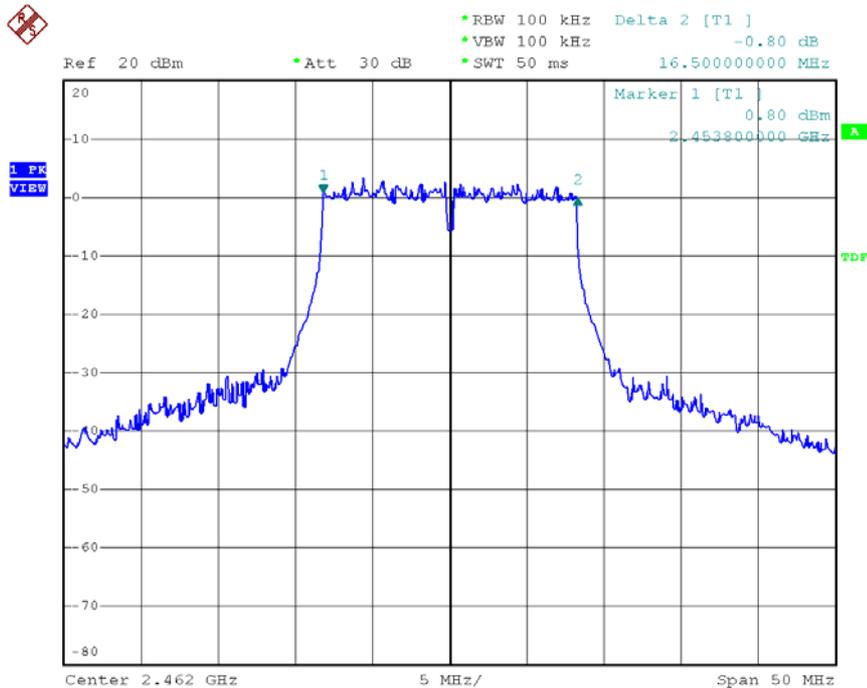

Date: 16.JUL.2008 16:52:49

7. Maximum Peak Output Power


7.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

7.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

7.3 Test Setup Layout

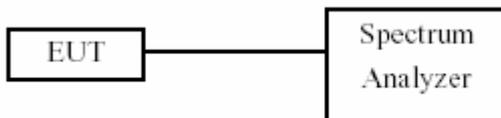

7.4 Measurement equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date |
|----------------------|-----------|--------------|------------|------------------|------------|
| Spectrum Analyzer | FSP40 | R&S | 10047 | 2008/02/22 | 2009/02/21 |

7.5 Test Result and Data

Test Date : Jul. 16, 2008
 Temperature : 20
 Humidity : 60%
 Atmospheric Pressure : 1008 hPa


(1) Modulation Standard: IEEE 802.11b (11Mbps)

| Channel | Frequency (MHz) | Peak Power Output (dBm) | Peak Power Output (mW) |
|---------|-----------------|-------------------------|------------------------|
| 01 | 2412 | 24.87 | 306.90 |
| 06 | 2437 | 24.74 | 297.90 |
| 11 | 2462 | 24.85 | 305.50 |

(2) Modulation Standard: IEEE 802.11g (06Mbps)

| Channel | Frequency (MHz) | Peak Power Output (dBm) | Peak Power Output (mW) |
|---------|-----------------|-------------------------|------------------------|
| 01 | 2412 | 23.93 | 247.20 |
| 06 | 2437 | 23.94 | 247.70 |
| 11 | 2462 | 23.91 | 246.00 |


Modulation Standard: 802.11b (11Mbps)
 Channel: 01

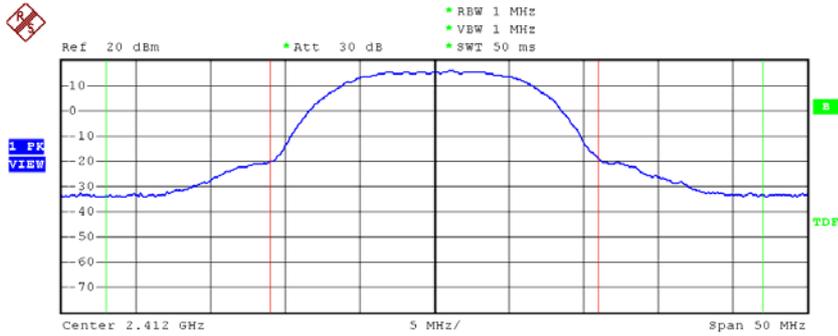

| | | | |
|--------------------------|----------|---------------------|-----------|
| Tx Channel | | WLAN 802.11B | |
| Bandwidth | 22 MHz | Power | 24.87 dBm |
| Adjacent Channel | | | |
| Bandwidth | 11 MHz | Lower | -41.11 dB |
| Spacing | 16.5 MHz | Upper | -40.48 dB |
| Alternate Channel | | | |
| Bandwidth | 11 MHz | Lower | ----- |
| Spacing | 27.5 MHz | Upper | ----- |

Date: 16.JUL.2008 16:34:49


Modulation Standard: 802.11b (11Mbps)
 Channel: 06

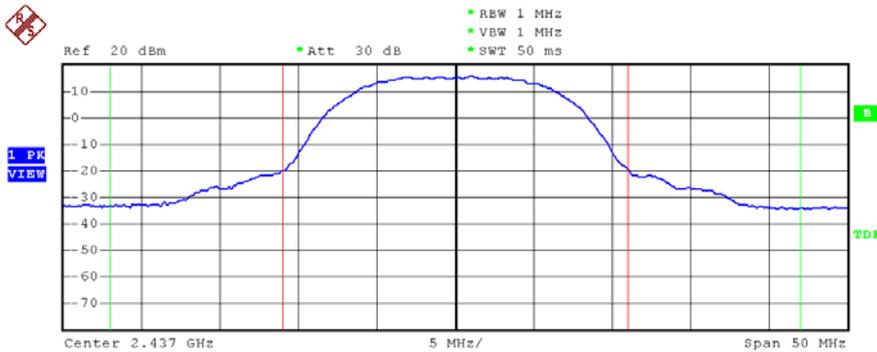

| | | | |
|--------------------------|----------|---------------------|-----------|
| Tx Channel | | WLAN 802.11B | |
| Bandwidth | 22 MHz | Power | 24.74 dBm |
| Adjacent Channel | | | |
| Bandwidth | 11 MHz | Lower | -41.06 dB |
| Spacing | 16.5 MHz | Upper | -41.24 dB |
| Alternate Channel | | | |
| Bandwidth | 11 MHz | Lower | ----- |
| Spacing | 27.5 MHz | Upper | ----- |


Date: 16.JUL.2008 16:36:29

Modulation Standard: 802.11b (11Mbps)
 Channel: 11

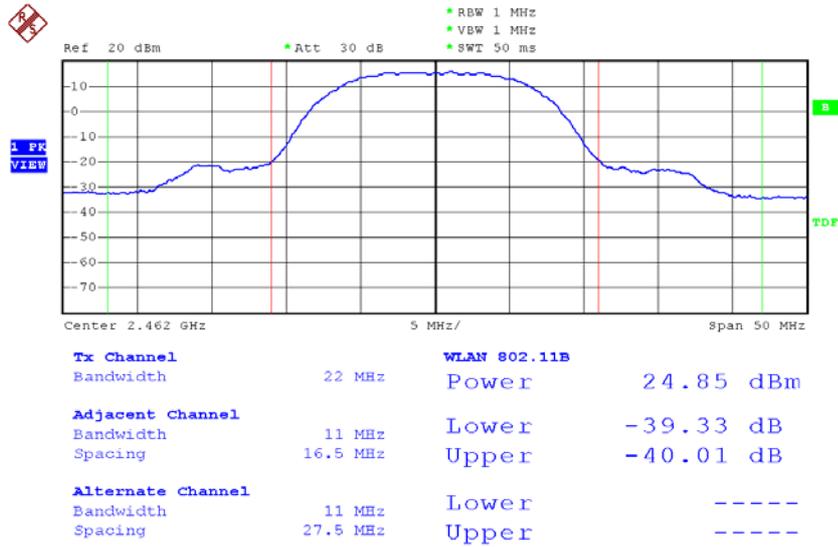


Date: 16.JUL.2008 16:38:11

Modulation Standard: 802.11g (06Mbps)
 Channel: 01

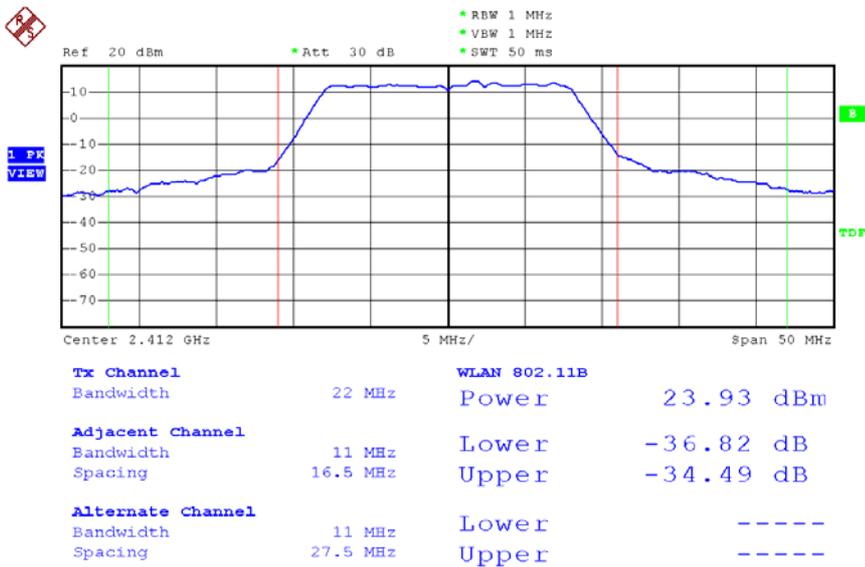


Date: 16.JUL.2008 16:44:48

Modulation Standard: 802.11g (06Mbps)
 Channel: 06

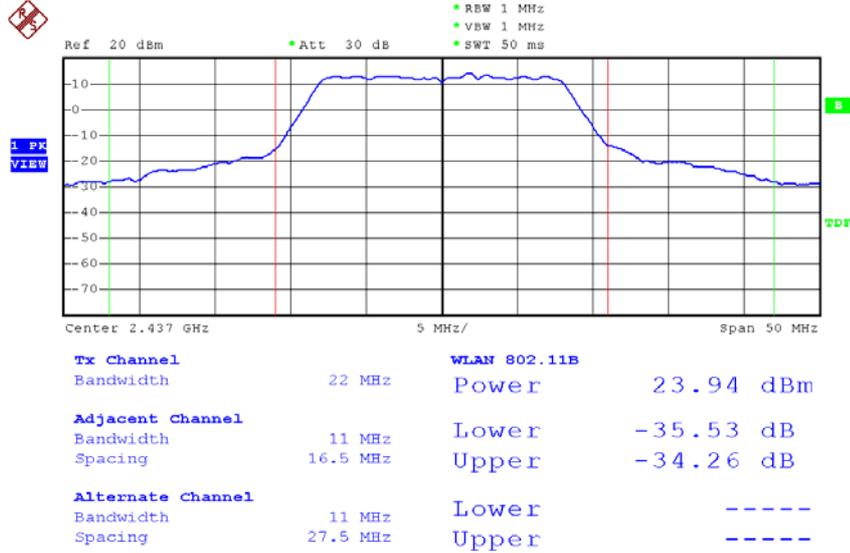

Date: 16.JUL.2008 16:43:52

Modulation Standard: 802.11g (06Mbps)
 Channel: 11

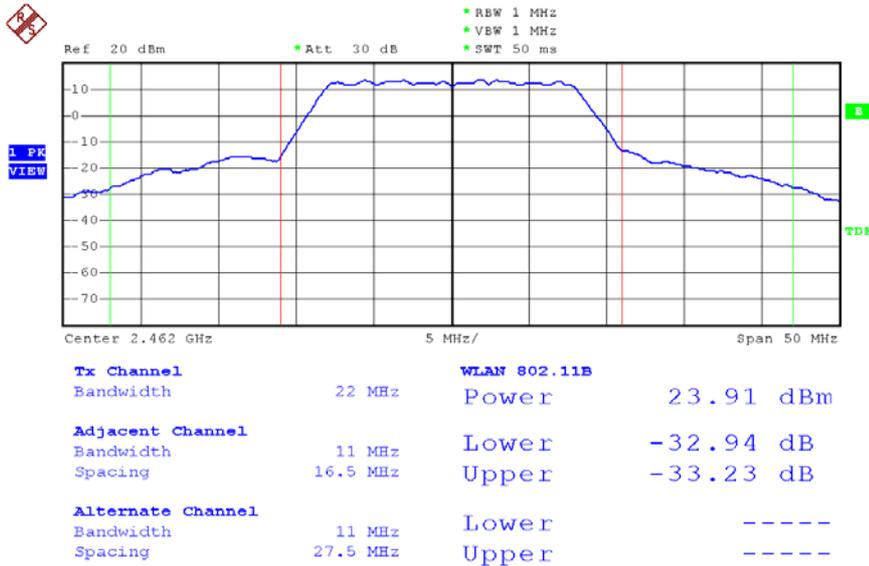

Date: 16.JUL.2008 16:42:06

8. Band Edges Measurement


8.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

8.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

8.3 Test Setup Layout

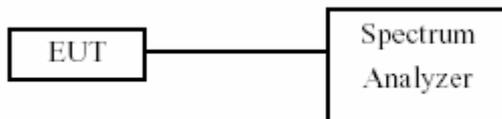

8.4 Measurement equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date |
|----------------------|-----------|--------------|------------|------------------|------------|
| Spectrum Analyzer | FSP40 | R&S | 10047 | 2008/02/22 | 2009/02/21 |

8.5 Test Result and Data

Test Date : Jul. 16, 2008
 Temperature : 20
 Humidity : 60%
 Atmospheric Pressure : 1008 hPa


(1) Modulation Standard: IEEE 802.11b (11Mbps)

| Channel | Frequency | maximum value in frequency (MHz) | maximum value is (dBm) |
|---------|-----------|----------------------------------|------------------------|
| 01 | 2412 | 2399.80 | -31.29 |
| 11 | 2462 | 2860.00 | -38.24 |


(2) Modulation Standard: IEEE 802.11g (06Mbps)

| Channel | Frequency | maximum value in frequency (MHz) | maximum value is (dBm) |
|---------|-----------|----------------------------------|------------------------|
| 01 | 2412 | 2399.80 | -27.36 |
| 11 | 2462 | 2484.70 | -40.36 |

Modulation Standard: 802.11b (11Mbps)
 Channel: 01

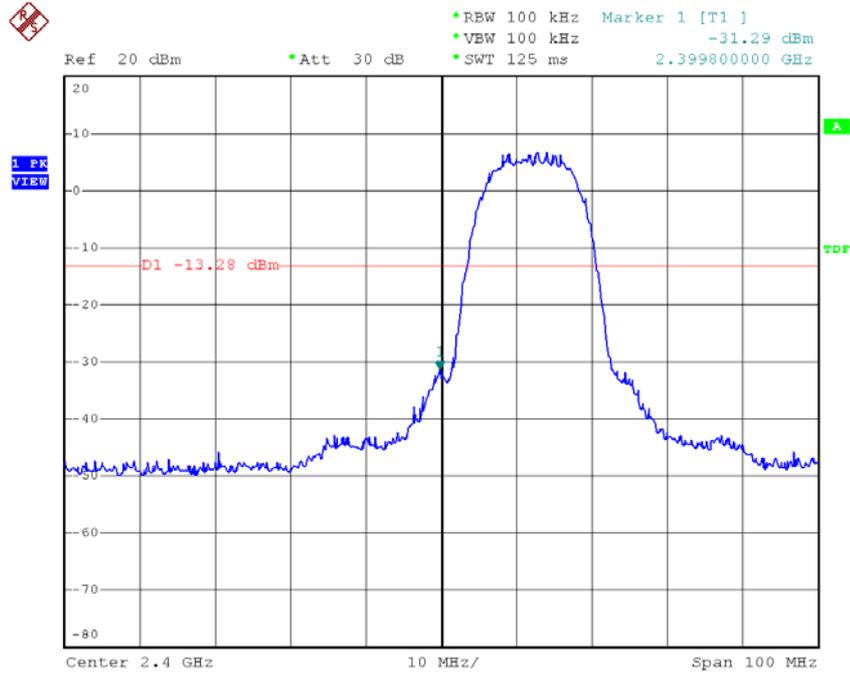


Date: 16.JUL.2008 17:00:03

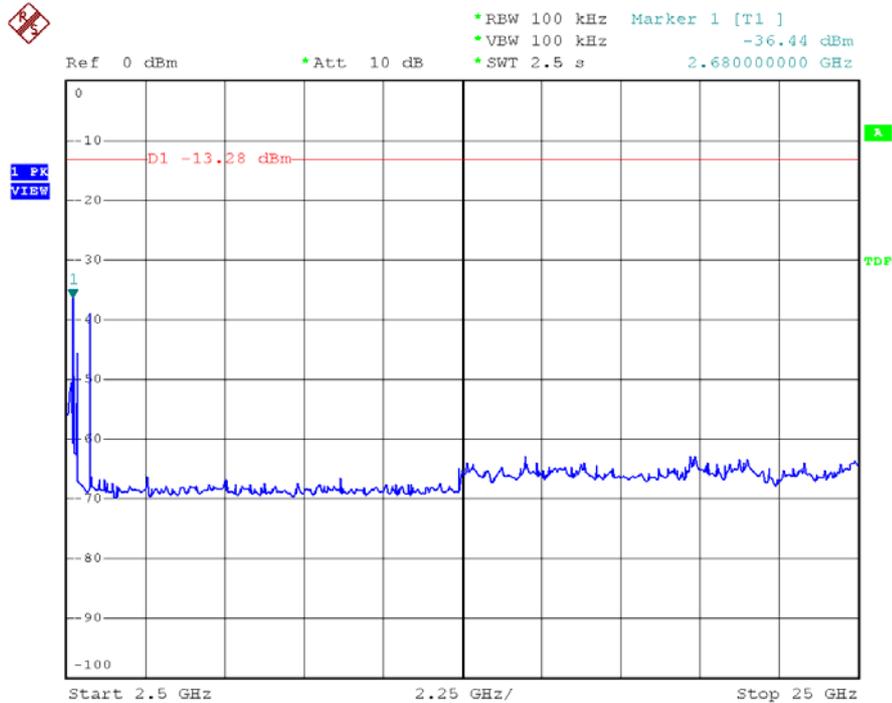


Date: 16.JUL.2008 17:00:52

Modulation Standard: 802.11b (11Mbps)
 Channel: 11

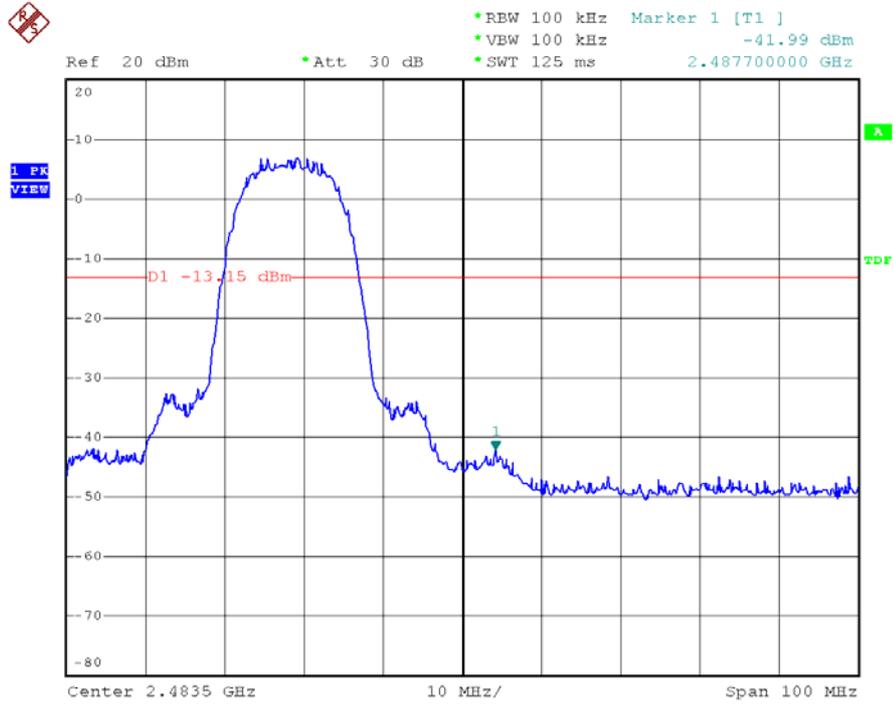


Date: 16.JUL.2008 17:02:08

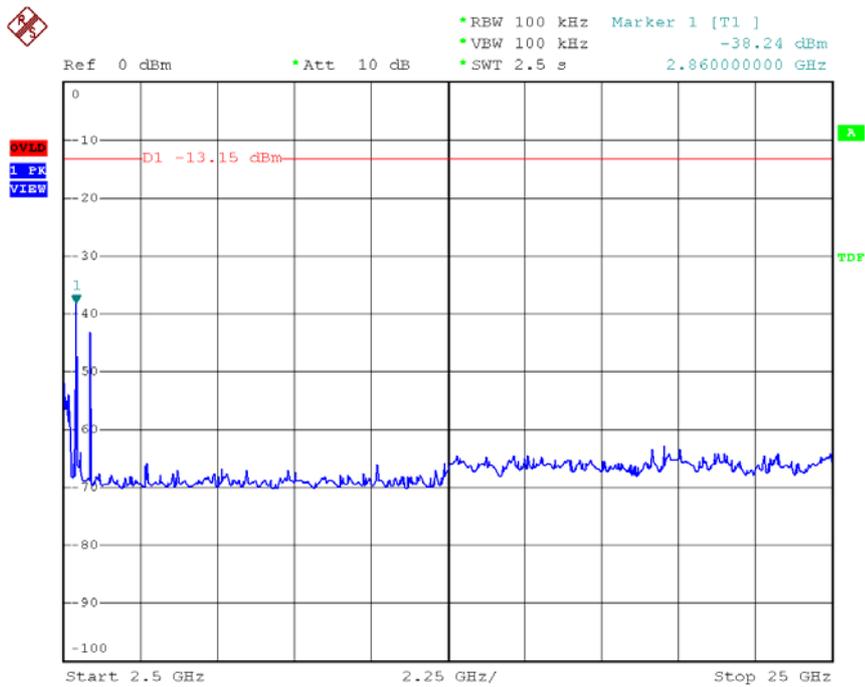


Date: 16.JUL.2008 17:02:48

Modulation Standard: 802.11g (06Mbps)
 Channel: 01

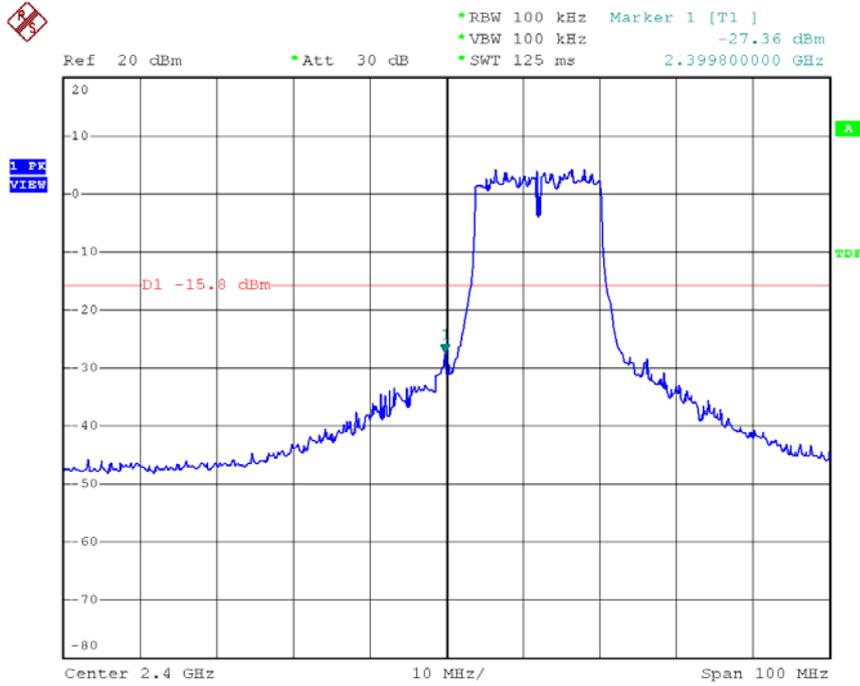


Date: 16.JUL.2008 17:06:16

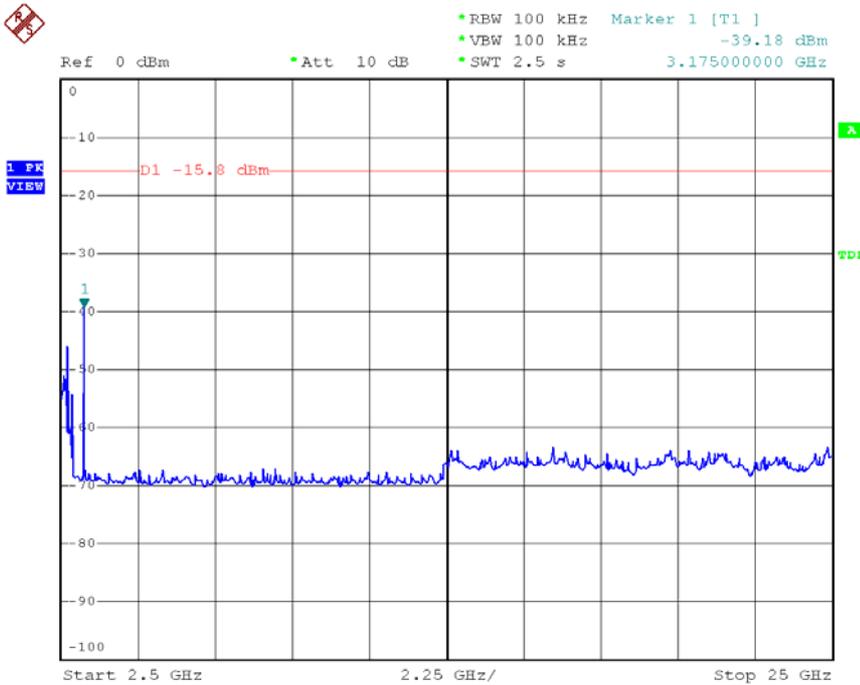


Date: 16.JUL.2008 17:07:01

Modulation Standard: 802.11g (06Mbps)
 Channel: 11

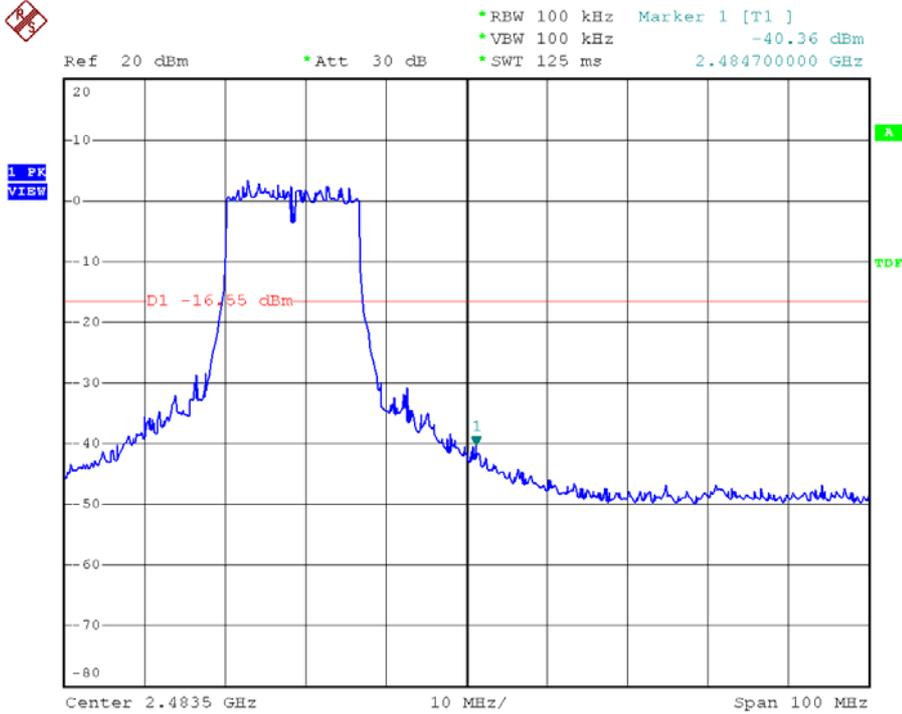

Date: 16.JUL.2008 17:08:03

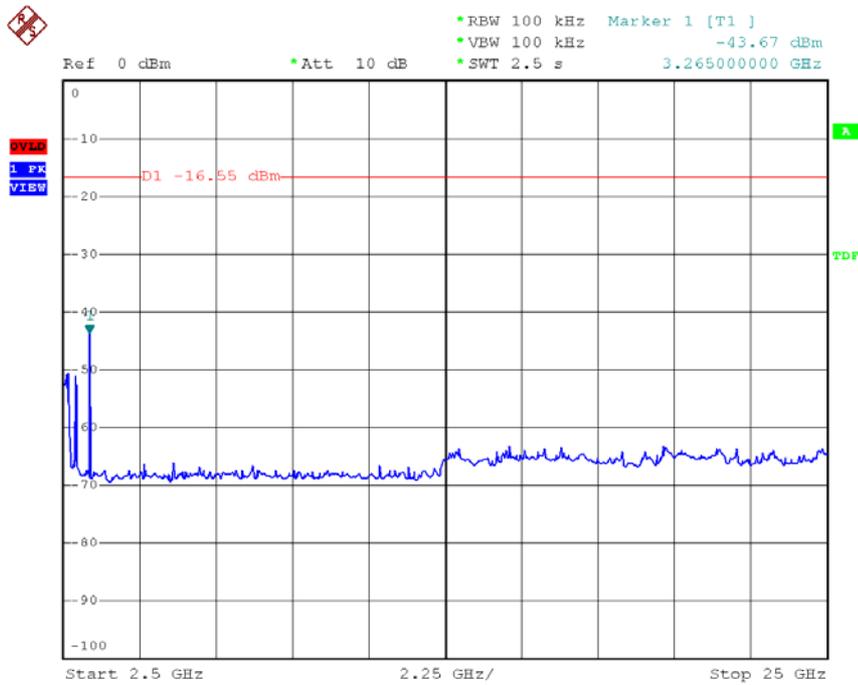

Date: 16.JUL.2008 17:09:05

8.6 Restrict Band Emission Measurement Data

Test Date : Jul. 18, 2008
 Temperature : 30
 Humidity : 70%
 Atmospheric Pressure : 1010 hPa

Modulation Standard: IEEE 802.11b (11Mbps)

a) Channel 1

| Frequency (MHz) | Ant-Pol H/V | Meter Reading | Corrected Factor | Result (dBuV/m) | Remark | Limit@3m (dBuV/m) | | Margin (dB) | Table (Deg.) | Ant High (m) |
|-----------------|-------------|---------------|------------------|-----------------|--------|-------------------|------|-------------|--------------|--------------|
| | | | | | | Peak | Ave. | | | |
| 2386.19 | H | 56.47 | -3.31 | 53.16 | Peak | 74 | 54 | -20.84 | 124 | 1.13 |
| 2387.42 | H | 44.34 | -3.31 | 41.03 | Ave | 74 | 54 | -12.97 | 124 | 1.13 |
| 2385.17 | V | 65.69 | -3.31 | 62.38 | Peak | 74 | 54 | -11.62 | 210 | 1.13 |
| 2387.42 | V | 53.74 | -3.31 | 50.43 | Ave | 74 | 54 | -3.57 | 210 | 1.13 |

b) Channel 11

| Frequency (MHz) | Ant-Pol H/V | Meter Reading | Corrected Factor | Result (dBuV/m) | Remark | Limit@3m (dBuV/m) | | Margin (dB) | Table (Deg.) | Ant High (m) |
|-----------------|-------------|---------------|------------------|-----------------|--------|-------------------|------|-------------|--------------|--------------|
| | | | | | | Peak | Ave. | | | |
| 2488.30 | H | 55.82 | -2.94 | 52.88 | Peak | 74 | 54 | -21.12 | 124 | 1.13 |
| 2487.04 | H | 43.58 | -2.95 | 40.63 | Ave | 74 | 54 | -13.37 | 124 | 1.13 |
| 2487.73 | V | 65.10 | -2.94 | 62.16 | Peak | 74 | 54 | -11.84 | 210 | 1.13 |
| 2487.16 | V | 53.65 | -2.95 | 50.70 | Ave | 74 | 54 | -3.30 | 210 | 1.13 |

Modulation Standard: 802.11g (54Mbps)

a) Channel 1

| Frequency (MHz) | Ant-Pol H/V | Meter Reading | Corrected Factor | Result (dBuV/m) | Remark | Limit@3m (dBuV/m) | | Margin (dB) | Table (Deg.) | Ant High (m) |
|-----------------|-------------|---------------|------------------|-----------------|--------|-------------------|------|-------------|--------------|--------------|
| | | | | | | Peak | Ave. | | | |
| 2389.97 | H | 61.08 | -3.30 | 57.78 | Peak | 74 | 54 | -16.22 | 124 | 1.13 |
| 2389.97 | H | 49.19 | -3.30 | 45.89 | Ave | 74 | 54 | -8.11 | 124 | 1.13 |
| 2389.46 | V | 66.02 | -3.30 | 62.72 | Peak | 74 | 54 | -11.28 | 210 | 1.13 |
| 2389.97 | V | 53.62 | -3.30 | 50.32 | Ave | 74 | 54 | -3.68 | 210 | 1.13 |

b) Channel 11

| Frequency (MHz) | Ant-Pol H/V | Meter Reading | Corrected Factor | Result (dBuV/m) | Remark | Limit@3m (dBuV/m) | | Margin (dB) | Table (Deg.) | Ant High (m) |
|-----------------|-------------|---------------|------------------|-----------------|--------|-------------------|------|-------------|--------------|--------------|
| | | | | | | Peak | Ave. | | | |
| 2483.51 | H | 58.33 | -2.96 | 55.37 | Peak | 74 | 54 | -18.63 | 124 | 1.13 |
| 2496.54 | H | 46.73 | -2.91 | 43.82 | Ave | 74 | 54 | -10.18 | 124 | 1.13 |
| 2483.51 | V | 66.30 | -2.96 | 63.34 | Peak | 74 | 54 | -10.66 | 210 | 1.13 |
| 2483.51 | V | 53.87 | -2.96 | 50.91 | Ave | 74 | 54 | -3.09 | 210 | 1.13 |

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz

9. Power Spectral Density


9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- c. The power spectral density was measured and recorded.
- d. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

9.3 Test Setup Layout :

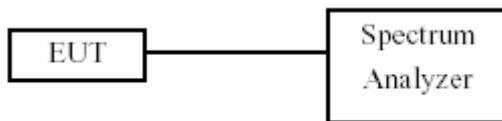

9.4 Measurement equipment

| Instrument/Ancillary | Model No. | Manufacturer | Serial No. | Calibration Date | Valid Date |
|----------------------|-----------|--------------|------------|------------------|------------|
| Spectrum Analyzer | FSP40 | R&S | 10047 | 2008/02/22 | 2009/02/21 |

9.5 Test Result and Data

Test Date : Jul. 18, 2008
 Temperature : 30
 Humidity : 70%
 Atmospheric Pressure : 1010 hPa


(1) Modulation Standard: IEEE 802.11b (11Mbps)

| Channel | Frequency | Maximum Power Density of 3 kHz Bandwidth (dBm) |
|---------|-----------|--|
| 01 | 2412 | -7.24 |
| 06 | 2437 | -7.39 |
| 11 | 2462 | -7.18 |

(2) Modulation Standard: IEEE 802.11g (06Mbps)


| Channel | Frequency | Maximum Power Density of 3 kHz Bandwidth (dBm) |
|---------|-----------|--|
| 01 | 2412 | -12.34 |
| 06 | 2437 | -12.50 |
| 11 | 2462 | -10.90 |

Modulation Standard: 802.11b (11Mbps)
 Channel: 01

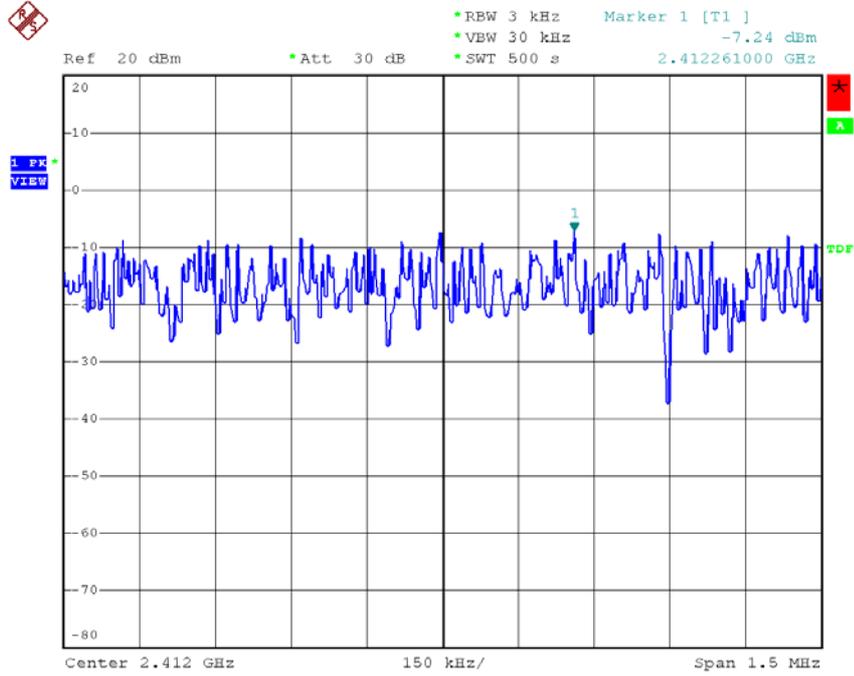


Date: 16.JUL.2008 17:37:20

Modulation Standard: 802.11b (11Mbps)
 Channel: 06

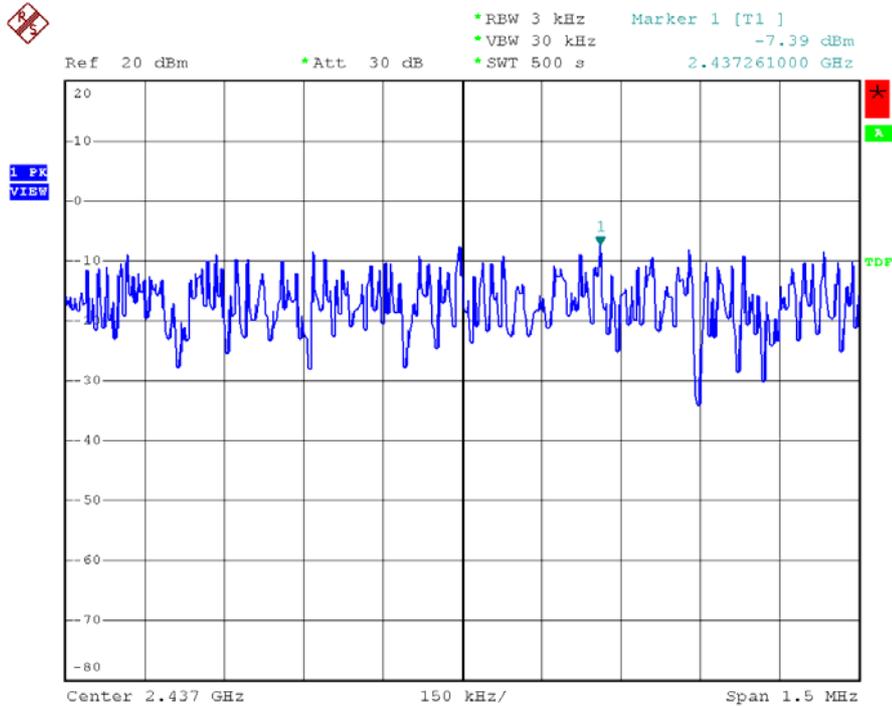


Date: 16.JUL.2008 17:37:52

Modulation Standard: 802.11b (11Mbps)
 Channel: 11

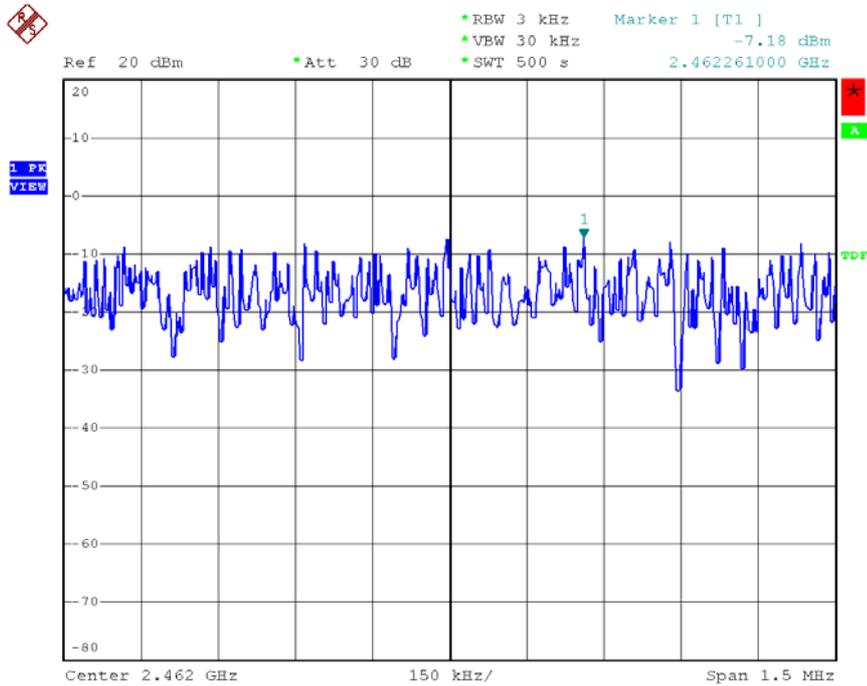


Date: 16.JUL.2008 17:38:23

Modulation Standard: 802.11g (06Mbps)
 Channel: 01

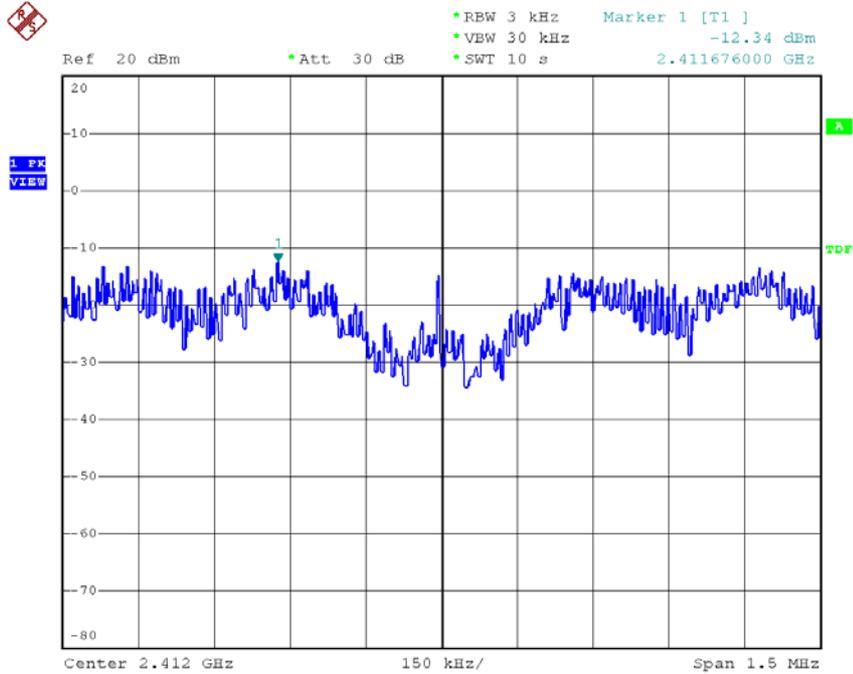


Date: 16.JUL.2008 17:29:58

Modulation Standard: 802.11g (06Mbps)
Channel: 06

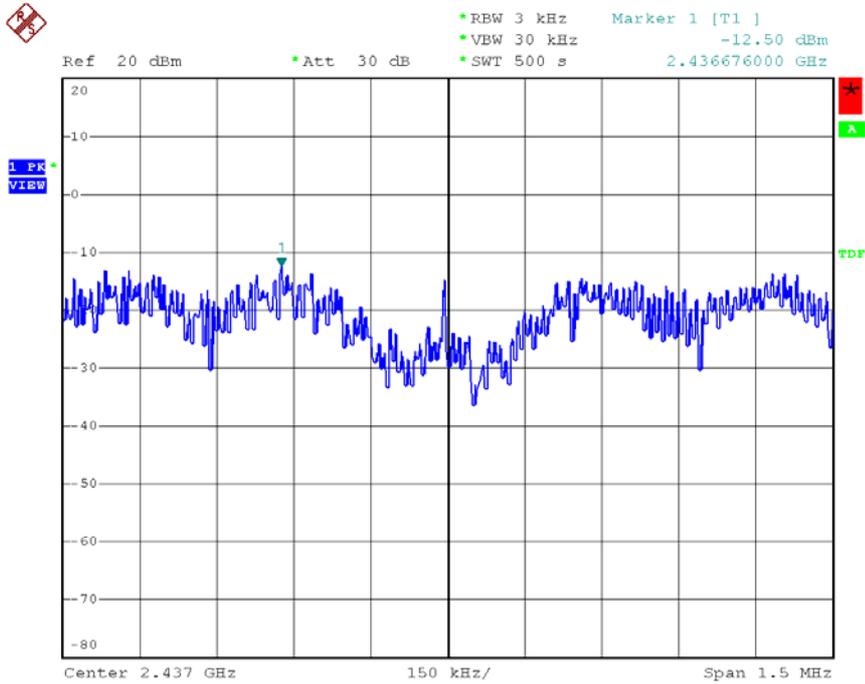

Date: 16.JUL.2008 17:28:52

Modulation Standard: 802.11g (06Mbps)
Channel: 11

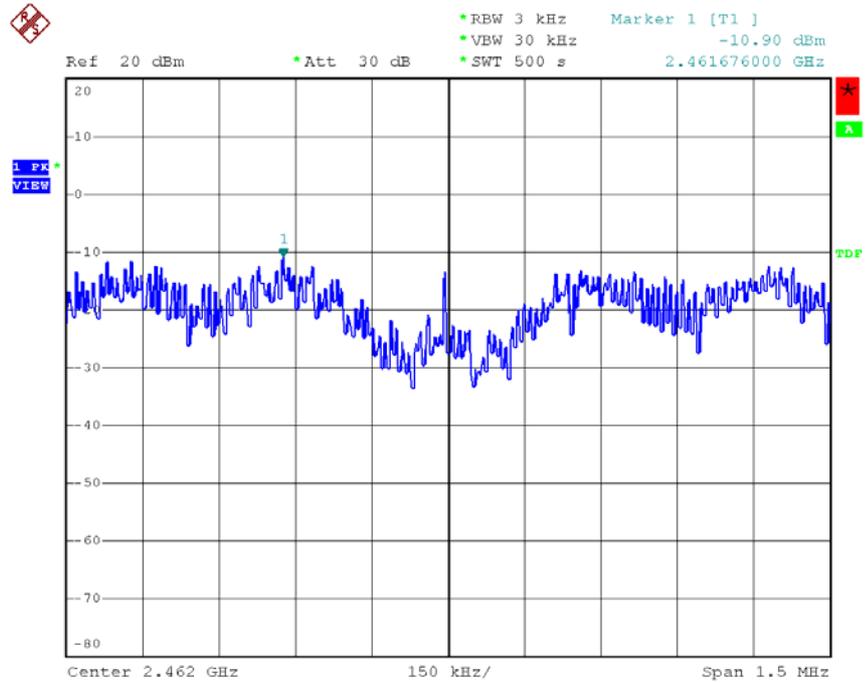

Date: 16.JUL.2008 17:21:01

10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|-----------------|
| 0.09000 – 0.11000 | 16.42000 – 16.42300 | 399.9 – 410.0 | 4.500 – 5.250 |
| 0.49500 – 0.505** | 16.69475 – 16.69525 | 608.0 – 614.0 | 5.350 – 5.460 |
| 2.17350 – 2.19050 | 16.80425 – 16.80475 | 960.0 – 1240.0 | 7.250 – 7.750 |
| 4.12500 – 4.12800 | 25.50000 – 25.67000 | 1300.0 – 1427.0 | 8.025 – 8.500 |
| 4.17725 – 4.17775 | 37.50000 – 38.25000 | 1435.0 – 1626.5 | 9.000 – 9.200 |
| 4.20725 – 4.20775 | 73.00000 – 74.60000 | 1645.5 – 1646.5 | 9.300 – 9.500 |
| 6.21500 – 6.21800 | 74.80000 – 75.20000 | 1660.0 – 1710.0 | 10.600 – 12.700 |
| 6.26775 – 6.26825 | 108.00000 – 121.94000 | 1718.8 – 1722.2 | 13.250 – 13.400 |
| 6.31175 – 6.31225 | 123.00000 – 138.00000 | 2200.0 – 2300.0 | 14.470 – 14.500 |
| 8.29100 – 8.29400 | 149.90000 – 150.05000 | 2310.0 – 2390.0 | 15.350 – 16.200 |
| 8.36200 – 8.36600 | 156.52475 – 156.52525 | 2483.5 – 2500.0 | 17.700 – 21.400 |
| 8.37625 – 8.38675 | 156.70000 – 156.90000 | 2655.0 – 2900.0 | 22.010 – 23.120 |
| 8.41425 – 8.41475 | 162.01250 – 167.17000 | 3260.0 – 3267.0 | 23.600 – 24.000 |
| 12.29000 – 12.29300 | 167.72000 – 173.20000 | 3332.0 – 3339.0 | 31.200 – 31.800 |
| 12.51975 – 12.52025 | 240.00000 – 285.00000 | 3345.8 – 3358.0 | 36.430 – 36.500 |
| 12.57675 – 12.57725 | 322.00000 – 335.40000 | 3600.0 – 4400.0 | Above 38.6 |
| 13.36000 – 13.41000 | | | |

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.