


STRA-T4 SERIES UNDERCABINET FIXTURE INSTRUCTION

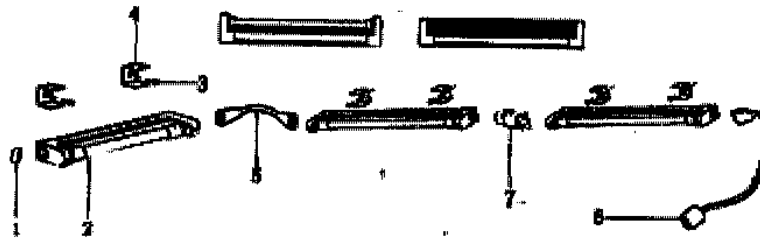

I. ASSEMBLY INSTRUCTION:

- a. FIX THE PLASTIC HOLDER (ITEM 4) ON THE WALL WITH SCREW (ITEM 3).
- b. CONNECT ALL FIXTURES, CORD (ITEM 5) AND POLAR CONNECTOR (ITEM 7) TOGETHER IN A CIRCUIT.
- c. INSERT THE COVER (ITEM 1) IN THE HOLE AT THE END OF FIXTURE.
- d. INSET FIXTURES (ITEM 2) INTO PLASTIC HOLDER (ITEM 4) IN RETURN.
- e. CONNECT A CIRCUIT AND THE POWER SUPPLY OF 120V 50/60HZ WITH CORD (ITEM 6).
- f. THE MAXIMUM POWER OF A CIRCUIT IS NOT OVER 250 WATTAGES.

II. WARNING:

- a. EMPLOYS IN THE ROOM. THE BOUNDARY DEGREE IS THE BELAR ZERO 10 TILL 55 DEGRESS. HUMIDITY $\leq 80\%$.
- b. CAN NOT SET EASE IS LIVING IN THE YI RAN SPARE.
- c. NOT CALM IS LIVING, AND CHILD BE ABLE TO JOIN THE SPACE OF STROKES.

This Product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.15-30 MHz.

This device complies with Part 18 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.