




LABEL ARTWORK

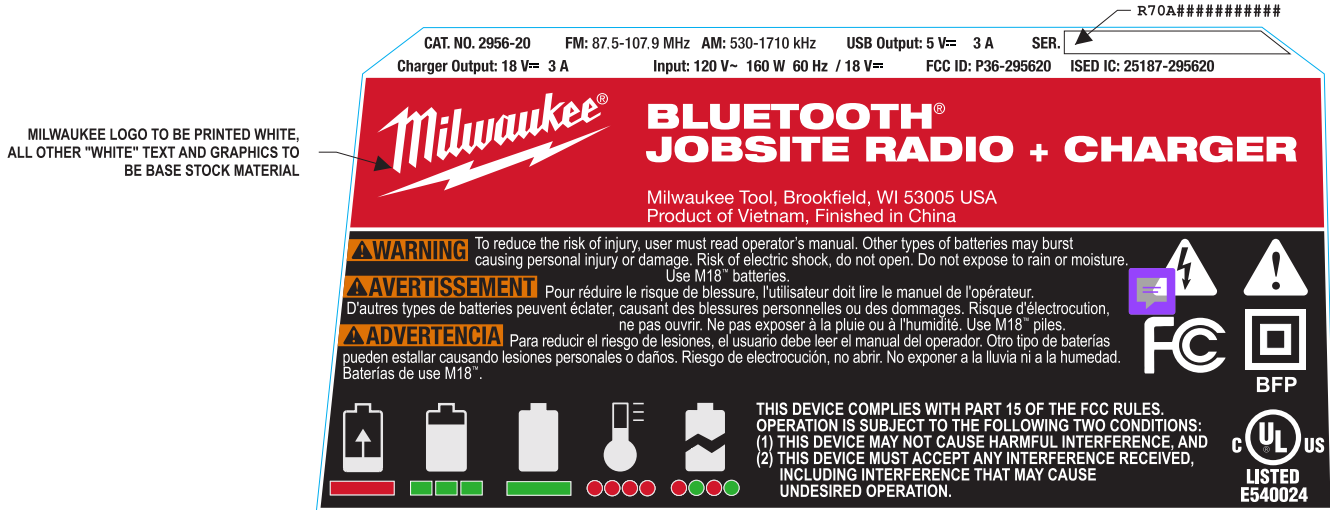

REFERENCE DIMENSIONS

- NOTES:
- SERIAL NUMBER CODING TO BE PRINTED EITHER AT LABEL SUPPLIER OR FACTORY IN A SECONDARY PROCESS:
1. TYPE STYLE FOR VARIABLE INFORMATION TO BE BLACK, 6 POINT SIZE IN AN APPROVED FONT, SUCH AS HELVETICA BOLD CONDENSED, ARIAL BOLD, OR COURIER BOLD.
 2. REFER TO ES 19-1 FOR SERIALIZATION PROCEDURE.
 - A.) THREE-CHARACTER ALPHA-NUMERIC PREFIX TO DEFINE THE CATALOG NO. (**R70**)
 - B.) ONE ALPHA CHARACTER (A-Z) FOR SPL BREAKS (**A**)
 - C.) ONE ALPHA-NUMERIC CHARACTER FOR MANUFACTURING PLANT IDENTIFICATION, DEFINED IN ES 19-1, SECTION III A
 - D.) TWO DIGITS (00-99) FOR THE YEAR OF MANUFACTURE
 - E.) TWO DIGITS (01-53) FOR THE WEEK OF MANUFACTURE
 - F.) FIVE DIGITS (00001-99999) FOR INDIVIDUAL UNIT SERIALIZATION
 - G.) ONE ALPHA-NUMERIC CHARACTER FOR SUPPLIER IDENTIFICATION, DEFINED IN ES 19-1, SECTION III B
 3. THE DATE CODE AND SERIAL NUMBER (IF ANY) MUST BE PRINTED BENEATH THE LAMINATION UNLESS ALLOWED BY A UL-APPROVED CONSTRUCTION.

REVISION 01		EDITION A		SCALE 100%		DIE CUT DISPLAYED IN BLUE		TTI		DESCRIPTION NAMEPLATE		Milwaukee MILWAUKEE TOOL 13135 WEST LISBON ROAD BROOKFIELD, WI 53005				
MILWAUKEE PART #		PN0008838						COLOR 5C	WHITE	PANTONE 186C	PANTONE 361C	DRN BY A.W.				
TTI PART #		01643200101K							BLACK	PANTONE 152C						
DATE		06/13/2025						SIZE	134.6x64.0 (±0.2mm)				APPROVED BY G. Strommen ENGINEER			
TC ITEM ID		CM00#####						MATERIAL	CORE: 2 mil UL Matte Silver Foil						APPROVED BY V. Iai DESIGNER	
REVISION HISTORY									LAMINATION: Gloss PET with Matte UV							
ECN #		ECN-MM0#####							ADHESIVE: ☒ Permanent ☐ Removable ☐ Other				APPROVED BY K.Goers MANAGER			
ISSUE DATE		###/###/20##							2 MIL ACRYLIC BASED SYSTEM FOR USE ON POLYCARBONATE, NYLON, AND POLYPROPYLENE.							
								REMARKS	1. MUST BE A UL RECOGNIZED AND C.S.A. APPROVED MARKING AND LABELING SYSTEM SUITABLE FOR SURFACES AND ENVIRONMENTAL CONDITIONS. 2. THE LIGHT FASTNESS OF SPOT COLOR INK IS GRADE 6 OR ABOVE.							
								ALTERNATE ID HISTORY	PN0008838							
									01643200101K-01							