


NDI		
Title		
RF MOUSE TRANSMITTER BLOCK DIAGRAM		
Size A	Document Number <Doc>	Rev 1
Date: Monday, October 08, 2001	Sheet 1 of 1	

Linx RF Module Block/SIGNAL DIAGRAM

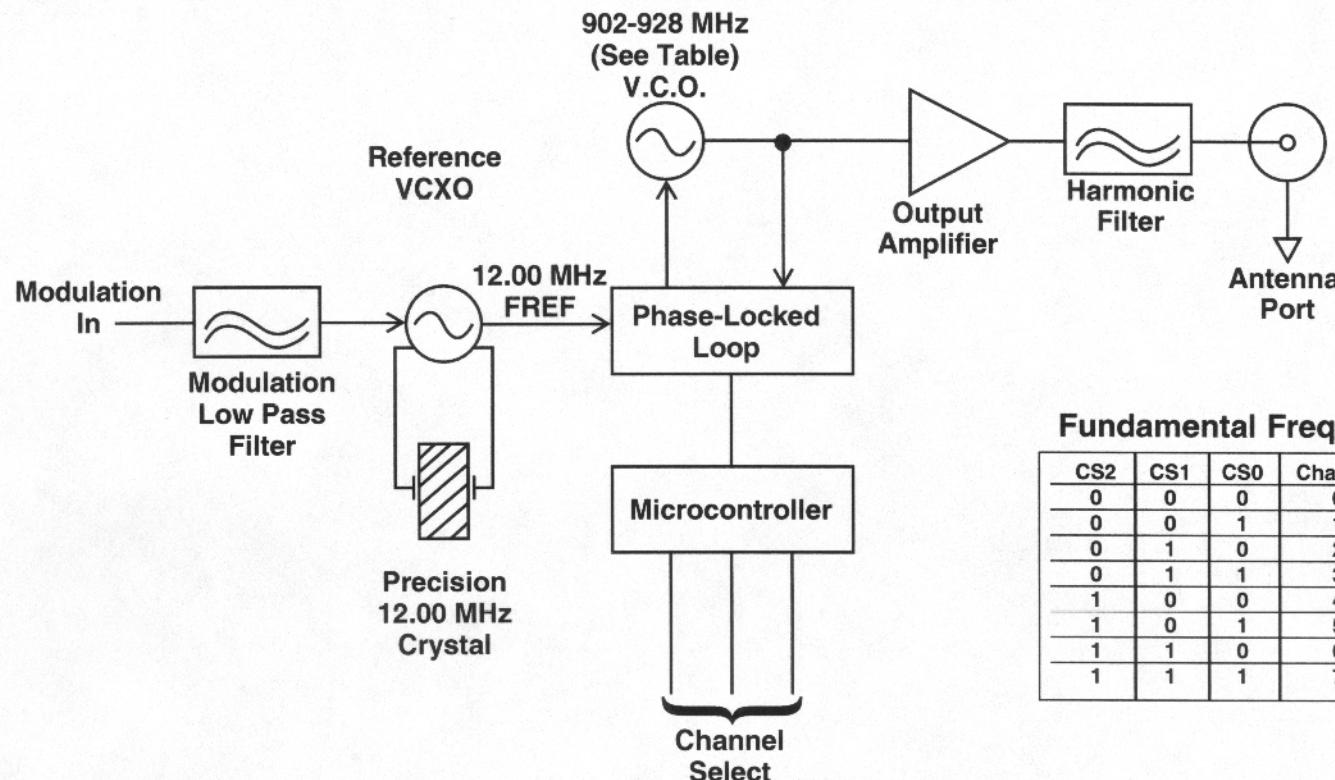

Fundamental Frequency Table

CS2	CS1	CS0	Channel	Frequency
0	0	0	0	903.37
0	0	1	1	906.37
0	1	0	2	907.87
0	1	1	3	909.37
1	0	0	4	912.37
1	0	1	5	915.37
1	1	0	6	919.87
1	1	1	7	921.37



575 SE ASHLEY PLACE • GRANTS PASS, OR 97526
PHONE: (800) 736-6677 • FAX: (541) 471-6251

Module Series	HP TXM	Architecture	_____
Modulation Method	FM/FSK	Duty Cycle	Continuous Carrier
Frequency	902-928MHz	Overall Accuracy	±50KHz
Occupied Bandwidth	32KHz		

This product utilizes a modular hybrid RF stage manufactured by Linx Technologies Inc. The module contains all RF components excepting antennas. While each module is inherently designed to meet or exceed all FCC requirements, external factors such as antenna selection, transmission content, and intended application may affect its use. A block diagram of the modules internal architecture and signal path is shown above. Additional information regarding the use, construction or testing of Linx modules may be obtained by calling (541) 471-6256, from 8-4 PST or addressing a written e-mail request to info@linxtechnologies.com.