



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E022R-048

Applicant : Decktron Co., Ltd.

Address : 187-3 Sinbong-Dong, Hungduk-Gu, Cheongju-Si, Chungcheongbuk-Do, 361-839 Korea

Manufacturer : Decktron Co., Ltd.

Address : 187-3 Sinbong-Dong, Hungduk-Gu, Cheongju-Si, Chungcheongbuk-Do, 361-839 Korea

Type of Equipment : Digital Voice Recorder & Dual Camera

FCC ID : P42DMR1009C

Model / Type No. : DMR-1009C

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : November 26, 2001

Date of issuing : February 22, 2002

SUMMARY

The equipment complies with the regulation; **FCC CFR 47 PART 15 SUBPART B, Class B.**


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:


G. W. Lee/ Ass. Chief Engineer
EMC Dept.
ONETECH Corp.

Reviewed by:


Y. K. Kwon/ Chief Engineer
EMC Dept.
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS.....	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION.....	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
4. PRELIMINARY TEST.....	8
4.1 CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASUREMENT.....	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : Decktron Co., Ltd.
ADDRESS : 187-3 Sinbong-Dong, Hungduk-Gu, Cheongju-Si, Chungcheongbuk-Do, 361-839 Korea
CONTACT PERSON : Dong-Woong Shin / Assist Manager
TELEPHONE NO : +82-43-269-9671
FCC ID : P42DMR1009C
MODEL NO/NAME : DMR-1009C
SERIAL NUMBER : N/A
DATE : February 22, 2002

DEVICE TYPE	Peripheral Device for Class B Computing Device -Unintentional Radiator
E.U.T. DESCRIPTION	Digital Voice Recorder & Dual Camera
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The Decktron Co., Ltd., Model DMR-1009C (referred to as the EUT in this report) is a Digital Voice Recorder & Dual Camera, which can record voice by using external/built-in microphone and connect to PC in order to transfer recorded message in EUT. Also can image capture, use internet visual chatting and the internet phone at the same time seeing the partner's face if you are member of the sites which can offer internet phone call service & visual chatting service. Product specification described herein was obtained from product data sheet or user's manual.

Chassis Type	Plastic (shield coating)
List of Each Oscillator or Crystal Frequency	16.384MHz, 12MHz, 36.864MHz, 22.1184MHz, 27MHz and 48MHz
Power Requirements	DC 1.5V x 2 (AA Size Battery)
Max File No to Rec.	4 Folder X 99 Files
Frequency Response	400Hz ~ 3500Hz
Battery Life	10hours/Recording mode, 8hours / Playback mode
Storage Medium	Built-in Flash Memory
Max Output Power	100 mW @ THD 10%
Input	Built-in MIC & 3.5F Mono Jack
Output	Built-in Speaker & 3.5F Mono Jack
External Connector	Mic Jack, Earphone Jack, USB Port

Model Differences:

- The following list consists of added model name and their difference. The basic and added models are identical except for model name and built-in flash memory.

	Model Name	Max Recording Time (SP)	Picture
Basic Model Name	DMR-1009C	510 min.	255 pictures
Added Model Name	DMR-1004C	250 min.	255 pictures

2.2 Related Submittal(s) / Grant(s)

Original submittal only.

2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
DMR-1009C	Decktron Co., Ltd.	P42DMR1009C	Digital Voice Recorder & Dual Camera (EUT)	PC
DCM	DELL Computer corp.	DoC	PC	-
CDP-G220	SONY	DoC	Monitor	PC
N/A	N/A	N/A	EARPHONE	EUT
N/A	N/A	N/A	MICROPHONE	EUT
KB-9963	Compaq	DoC	KEYBOARD	PC
M-S48a	Logitech	GJJS965M3	MOUSE	PC
020-0470	Cardinal	GDE0196	MODEM	PC
2225C	HP	DSI6XU2225	PRINTER	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992.

Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
CPU Board	Decktron Co., Ltd.	N/A	N/A
AUDIO Board	Decktron Co., Ltd.	N/A	N/A

3.2 EUT exercise Software

After connecting the earphone, microphone and PC using interface cable on the EUT, the EUT was tested at each following mode during the testing.

- 1) Standby mode
- 2) Recording mode
- 3) Playing the recorded message
- 4) Display image of the dual camera
- and
- 5) PC Communication Mode between PC and the EUT

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Digital Voice Recorder & Dual Camera (EUT)	N/A	Y	1.2 (D)
PC	N	Y	1.5(P), 1.2(D)
MONITOR	N	Y	1.5(P), 1.5(D)
MODEM	N	Y	1.5(P), 1.2(D)
KEYBOARD	N/A	Y	1.2(D)
MOUSE	N/A	Y	1.2(D)
PRINTER	N	Y	1.5(P), 1.5(D)
EARPHONE	N/A	N	1.2(D)
MIC	N/A	N	1.2(D)

* The marked "(P)" means the Power Cable, "(D)" means the Data Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Digital Voice Recorder & Dual Camera (EUT)	Y	EUT END	Y	BOTH END
PC	-	-	-	-
MONITOR	N	N/A	Y	BOTH END
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
MODEM	N	N/A	Y	BOTH END
PRINTER	N	N/A	Y	BOTH END
EARPHONE	Y	EUT END	Y	EUT END
MIC	N	N/A	Y	EUT END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by Decktron Co., Ltd during compliance testing:

1. Added a ferrite core on the USB cable at EUT end.
2. Added a ferrite core on the earphone cable at EUT end.
3. Added a capacitor (30pF) and a resistance (120ohm) at input of X3-1.
4. Added a bead (600ohm) at Vcc of X3-1.
5. Changed a resistance to a bead (150ohm) at R40 and Added a capacitor (150pF).
6. Changed a resistance to a bead (150ohm) at R34 and Added a capacitor (150pF).
7. Changed a resistance value to 51ohm at R60 and Added a bead (220ohm).
8. Changed a resistance value to 51ohm at R61 and Added a bead (220ohm).
9. Changed a resistance value to 43ohm at R67 and R68.
10. Changed a bead value to 220ohm at L3 and L4.
11. Changed a bead value to 600ohm at L6 and Added a capacitor (1nF).
12. Connected board ground of two PCB to the shield case.

3.6 Configuration of Test System

Line Conducted Test: EUT was connected to the PC by using interface cable and PC was connected to LISN, all supporting equipment was connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 Conducted Emission Test

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Standby Mode	
Recording Mode	
Playing the recorded Message	
Display image of the dual camera	
Download and Upload between EUT and PC	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Standby Mode	
Recording Mode	
Playing the recorded Message	
Display image of the dual camera	
Download and Upload between EUT and PC	X

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

Humidity Level : 39 %

Temperature : 20°C

Limits apply to : FCC CFR 47, PART 15, SUBPART B

Type of Test : CLASS B

Result : PASSED BY -10.17 dB at 6.2 MHz

EUT : Digital Voice Recorder & Dual Camera


Date: February 21, 2002

Operating Condition : Continuously played the recording of voice and played the messages recorded in EUT


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.73	35.59	NEUTRAL	48.00	-12.41
1.22	36.89	HOT	48.00	-11.11
1.83	37.35	NEUTRAL	48.00	-10.65
4.17	37.61	HOT	48.00	-10.39
6.20	37.83	HOT	48.00	-10.17
24.00	35.55	NEUTRAL	48.00	-12.45


Line Conducted Emission Tabulated Data

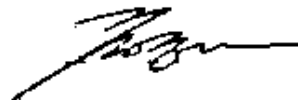

Tested by: Young Min, Choi / Project Engineer

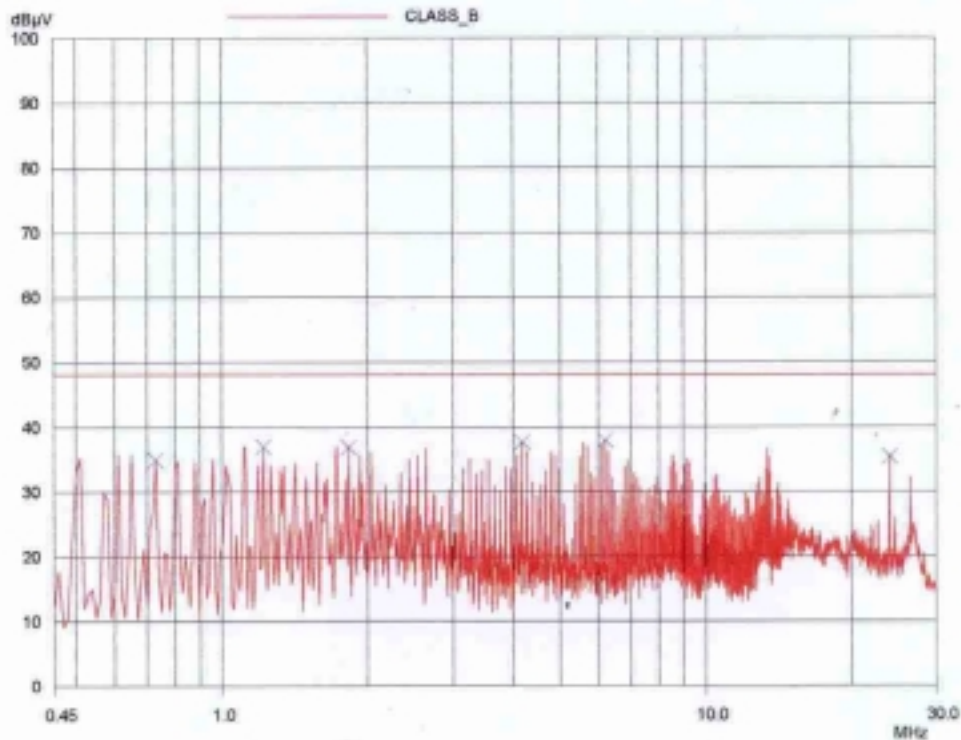

HOT LINE

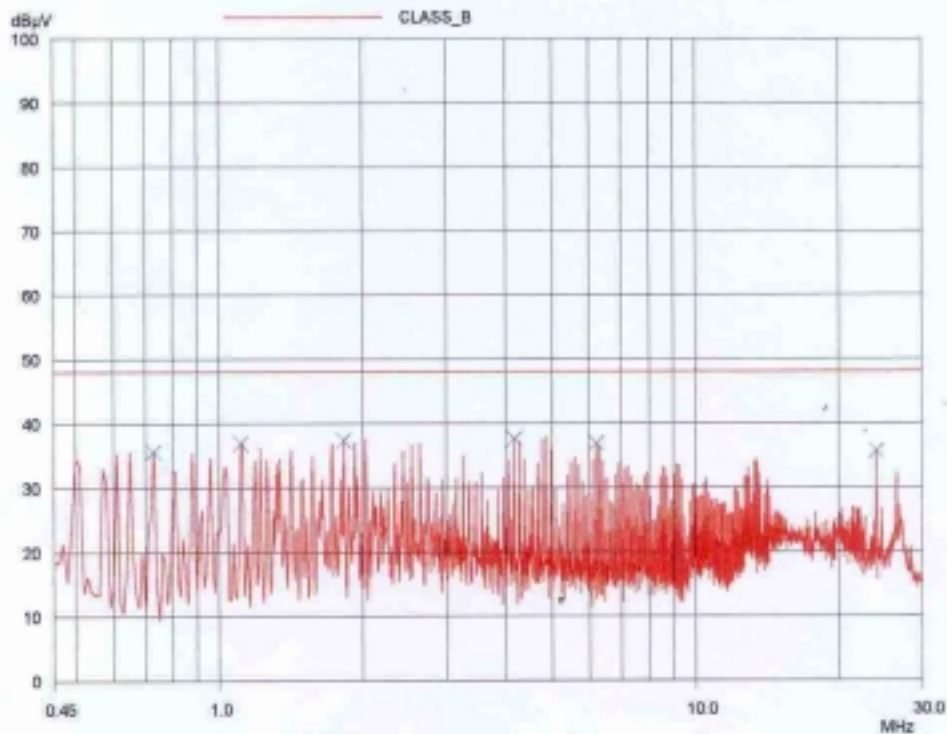

NEUTRAL LINE

5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 39 % Temperature : 13 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B
 Type of Test : CLASS B
 Result : PASSED BY -3.62 dB at 288.00 MHz

EUT : Digital Voice Recorder & Dual Camera Date: February 21, 2002
 Operating Condition : Upload and Down load messages between PC and EUT
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	21.50	H	10.85	0.91	33.26	40.00	-6.74
72.00	27.30	V	7.40	1.00	35.70	40.00	-4.30
144.00	21.50	H	13.28	1.33	36.11	43.50	-7.39
179.80	19.20	H	16.32	1.45	36.97	43.50	-6.53
215.60	23.10	H	10.91	1.65	35.66	43.50	-7.84
239.80	29.20	H	11.35	1.78	42.33	46.00	-3.67
288.00	26.60	H	13.83	1.95	42.38	46.00	-3.62
312.00	21.20	H	14.42	2.07	37.69	46.00	-8.31
336.40	22.60	H	14.40	2.21	39.21	46.00	-6.79
480.00	17.60	H	17.18	2.62	37.40	46.00	-8.60

Radiated Emission Tabulated Data



Tested by: Young Min, Choi / Project Engineer

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/01	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APR/01	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/01	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/01	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/01	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/01	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/01	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	JUN/01	12MONTH	■
9.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/01	12MONTH	■
10.	RF Amplifier	HP	8447F	3113A04554	JUN/01	N/A	
11.	Spectrum Analyzer	HP	8591A	3131A02312	APR/01	12MONTH	
12.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
13.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
14.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
15.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
16.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■